

FCC Part 15 Test Report

for DSSS System

Product Name : MobileMapper 20
Model Name : MobileMapper 20

Prepared for:
Trimble Nantes S.A.S.
Z.A.C de La Fleuriaye CD 60433,44474 Carquefou Cedex France
TEL: +33-0-228093800
FAX: +33-0-228093939

Prepared by:
Unilab (Shanghai) Co., Ltd.
FCC 2.948 register number is 714465
No. 1350, Lianxi Rd. Pudong New District, Shanghai, China
TEL: +86-21-50275125
FAX: +86-21-50275126

Report Number : UL28620131105CE/FCC/IC014-4
Date of Report : 2013-12-24
Date of Test : 2013-11-17~2013-12-20

Notes :

The test results only relate to these samples which have been tested.
Partly using this report will not be admitted unless been allowed by Unilab.
Unilab is only responsible for the complete report with the reported stamp of Unilab.

Applicant: Trimble Nantes S.A.S.
Z.A.C de La Fleuriaye CD 60433,44474 Carquefou Cedex France

Manufacturer: Trimble Nantes S.A.S.
Z.A.C de La Fleuriaye CD 60433,44474 Carquefou Cedex France

Product Name: MobileMapper 20

Brand Name: SPECTRA Precision

Model Name: MobileMapper 20

FCC ID: NZI802168

IC ID: 9288A-802168

Serial Number: N/A

Technical Data: AC input: AC 100~240V 50/60Hz
Battery: 3.64V~4.2V

Date of Receipt: 2013-11-17

Test Standard: FCC CFR Title 47 Part 15 Subpart C
ANSI C 63.4: 2009
KDB 558074 D01

Test Result: Complied

Date of Test 2013-11-17~2013-12-20

Prepared by :


Andy Wei


(Technical Engineer: Andy Wei)

Reviewed by :


Forest Cao

(Senior Engineer: Forest Cao)

Approved by :


Eva Wang

(Supervisor: Eva Wang)

TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	EUT DESCRIPTION.....	5
1.2	TEST MODE	5
2.	TEST METHODOLOGY	6
2.1	EUT CONFIGURATION.....	6
2.2	EUT EXERCISE	6
2.3	GENERAL TEST PROCEDURES	6
2.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
2.5	DESCRIPTION OF TEST MODES.....	7
3.	TECHNIACL SUMMARY	8
3.1	SUMMARY OF STANDARDS AND TEST RESULTS.....	8
3.2	TEST UNCERTAINTY.....	8
3.3	TEST EQUIPMENT LIST	8
3.4	TEST FACILITY	9
3.5	TEST SETUP CONFIGURATION	9
4.	6 DB BANDWIDTH.....	10
4.1	TEST SETUP	10
4.2	LIMITS.....	10
4.3	TEST PROCEDURE	10
4.4	RESULTS & PERFORMANCE	11
5.	POWER SPECTRAL DENSITY.....	15
5.1	TEST SETUP	15
5.2	LIMITS.....	15
5.3	TEST PROCEDURE	15
5.4	RESULTS & PERFORMANCE	16
6.	PEAK OUTPUT POWER (CONDUCTION)	20
6.1	TEST SETUP	20
6.2	LIMITS.....	20
6.3	TEST PROCEDURE	20
6.4	RESULTS & PERFORMANCE	21
7.	SPURIOUS EMISSIONS (CONDUCTION).....	25
7.1	TEST SETUP	25
7.2	LIMITS.....	25
7.3	TEST PROCEDURE	25
7.4	RESULTS & PERFORMANCE	26
	BAND EDGE MEASUREMENT	32
7.5	TEST SETUP	32
7.6	LIMITS.....	32
7.7	TEST PROCEDURE	32
7.8	RESULTS & PERFORMANCE	33
8.	SPURIOUS EMISSIONS (RADIATION)	49
8.1	TEST SETUP	49
8.2	LIMITS.....	50
8.3	TEST PROCEDURE	50
8.4	RESULTS & PERFORMANCE	52
9.	AC POWER LINE CONDUCTED EMISSIONS.....	78

9.1	TEST SETUP	78
9.2	LIMITS.....	78
9.3	TEST PROCEDURE	78
9.4	RESULTS & PERFORMANCE	79
APPENDIX 1	PHOTOGRAPHS OF EUT	83

1. GENERAL INFORMATION

1.1 EUT DESCRIPTION

Product Name:	MobileMapper 20
Model Name:	MobileMapper 20
Hardware Version:	E750W_V0.3
Software Version:	V1.1.2
RF Exposure Environment:	Uncontrolled
WIFI	
Frequency Range:	2400MHz~2483.5MHz
Type of Modulation:	DSSS, OFDM
Channel Number:	13
Antenna Type:	Internal
Antenna Peak Gain:	0.7dBi
Component	
AC Adapter:	Model Name: PSAI05R-050Q
	Input: AC 100-240V 50/60Hz
	Output: DC 5V/1A

1.2 TEST MODE

Unilab has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: 802.11b CH1
Mode 2: 802.11b CH7
Mode 3: 802.11b CH13
Mode 4: 802.11g CH1
Mode 5: 802.11g CH7
Mode 6: 802.11g CH13

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application

2.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT and support equipment were placed on a nonconductive table 0.8m above the horizontal ground reference plane. According to the requirements in Section 13.3 of ANSI C63.4: 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.4 of ANSI C63.4: 2009.

2.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

2.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2442MHz)

Channel High (2472MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2442MHz)

Channel High (2472MHz) with 54Mbps data rate were chosen for full testing.

3. TECHNICAL SUMMARY

3.1 SUMMARY OF STANDARDS AND TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Test Item	FCC	Result
Occupied Bandwidth	§15.247 (a)	P
6 dB bandwidth	§15.247 (a)	P
Power spectral density	§15.247 (e)	P
Peak Output Power (Conduction)	§15.247 (b)	P
Spurious Emissions (Conduction)	§15.247 (d)	P
Band edge measurement	§15.247 (d)	P
Spurious Emissions (Radiation)	§15.247 (d) §15.35 (b) §15.209 (a)	P
AC Power Line Conducted Emissions	§15.207 (a)	P

Note: P means pass, F means failure, N/A means not applicable

3.2 TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted disturbance	3.4
Radiated disturbance	4.2

3.3 TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	Agilent	N9038A	MY51210142	2014/09/28
Wireless Connectivity Test Set	Agilent	N4010A	MY49080305	2014/09/28
Loop Antenna	Schwarzbeck	FMZB1519	1519-020	2014/03/27
LISN	R&S	ENV216	100069	2014/08/28
3m Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	CT-0000336	2016/11/27
Microwave Preamplifier	EM Electronics	EM30180	3008A02425	2014/03/01
Power Splitter	Agilent	11667C/ 52401	MY53806148	2014/03/01
Cold-heat climate test chamber	Weiss-Voetsch Environmental Testing Instruments(Taica	C, 180, -40	546860026200 10	2014/07/25

	ng) Co., Ltd.			
DC Power Supply	Agilent	6612C	MY43002989	2014/03/04
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	2014/07/19
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	2014/07/19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	2014/07/19
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	2014/07/19
Horn Antenna(18-40GHz)	ETS	3116	00070497	2014/07/19

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and has been calibrated by accredited calibration laboratories.

3.4 TEST FACILITY


All test facilities used to collect the test data are located at No. 1350, Lianxi Rd. Pudong New District, Shanghai, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4: 2009, CISPR 16-1-1 and other equivalent standards. The laboratory is compliance with the requirements of the ISO/IEC/E 17025.

3.5 TEST SETUP CONFIGURATION

The information contained within this report is intended to show verification of compliance of the EUT to the requirements of CFR 47 FCC Part 15.247 and RSS-210. Unilab has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report.

4. 6 DB BANDWIDTH

4.1 TEST SETUP

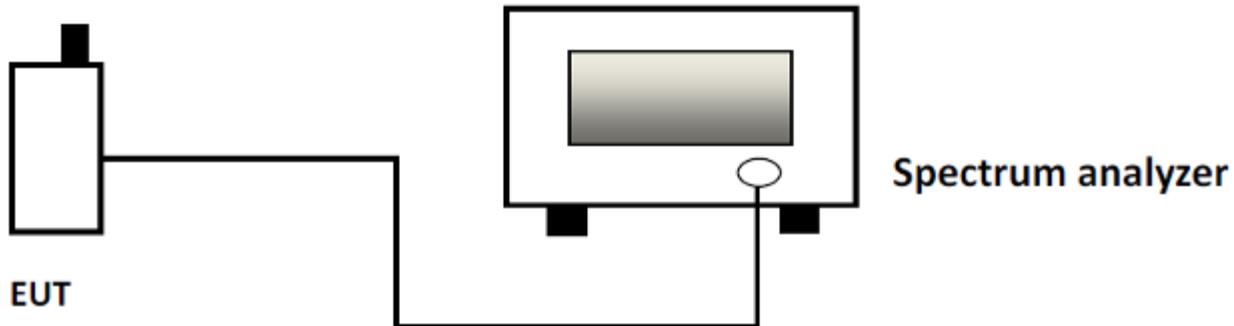

4.2 LIMITS

Limit	≥ 500 kHz
-------	----------------

4.3 TEST PROCEDURE

KDB 558074 D01 DTS Measurement Guidance V03 r01 April 9, 2013

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 6 dB bandwidth, centered on a channel

RBW=100KHz

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.


If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

4.4 RESULTS & PERFORMANCE


Channel	Measured 6dB bandwidth (MHz)	Limit (MHz)	Result
802.11b			
802.11b CH1	10.08	≥ 0.5	PASS
802.11b CH7	10.08	≥ 0.5	PASS
802.11b CH13	10.08	≥ 0.5	PASS
802.11g			
802.11g CH1	16.49	≥ 0.5	PASS
802.11g CH7	16.47	≥ 0.5	PASS
802.11g CH13	16.47	≥ 0.5	PASS

802.11b


802.11b channel 1

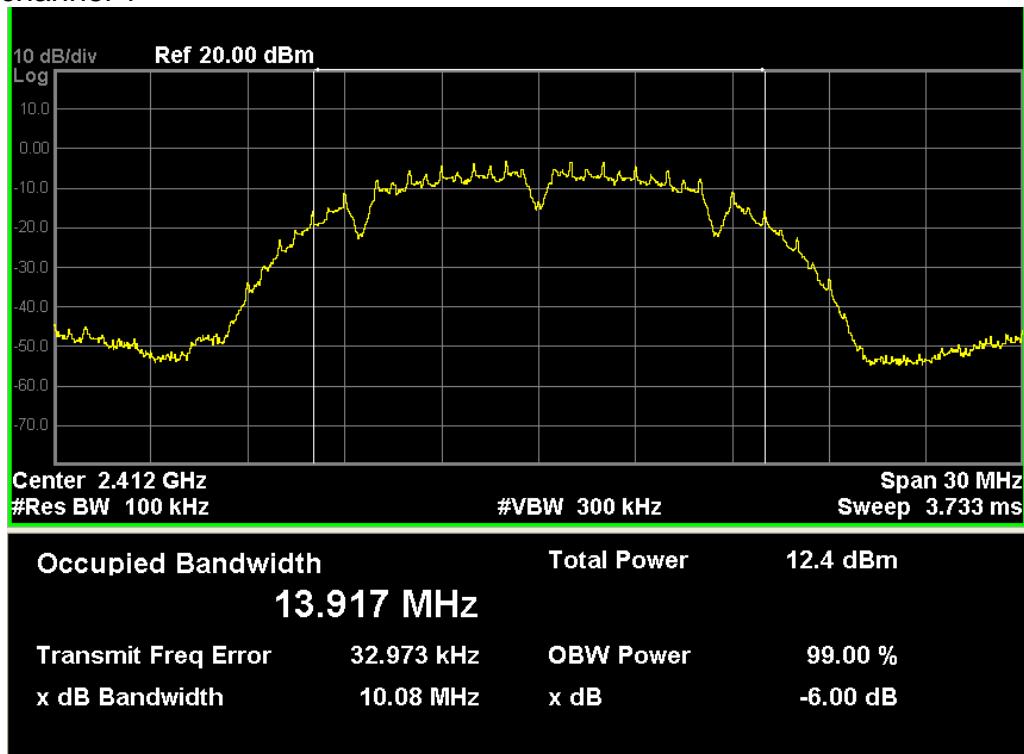

802.11b channel 7

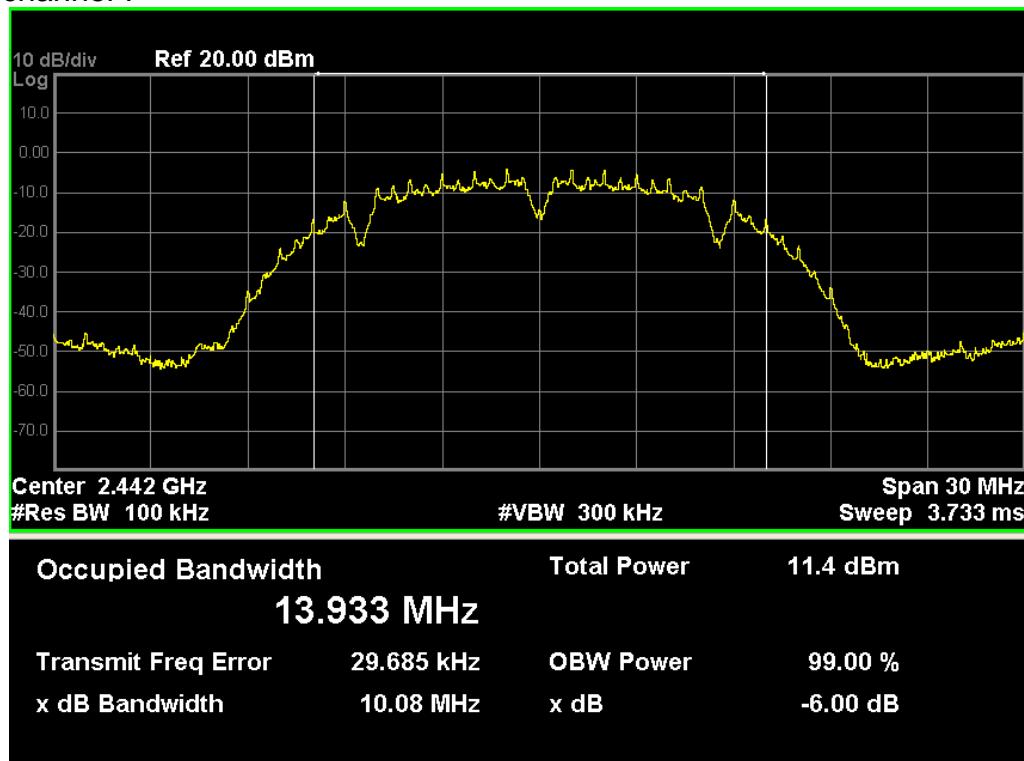


802.11b channel 13

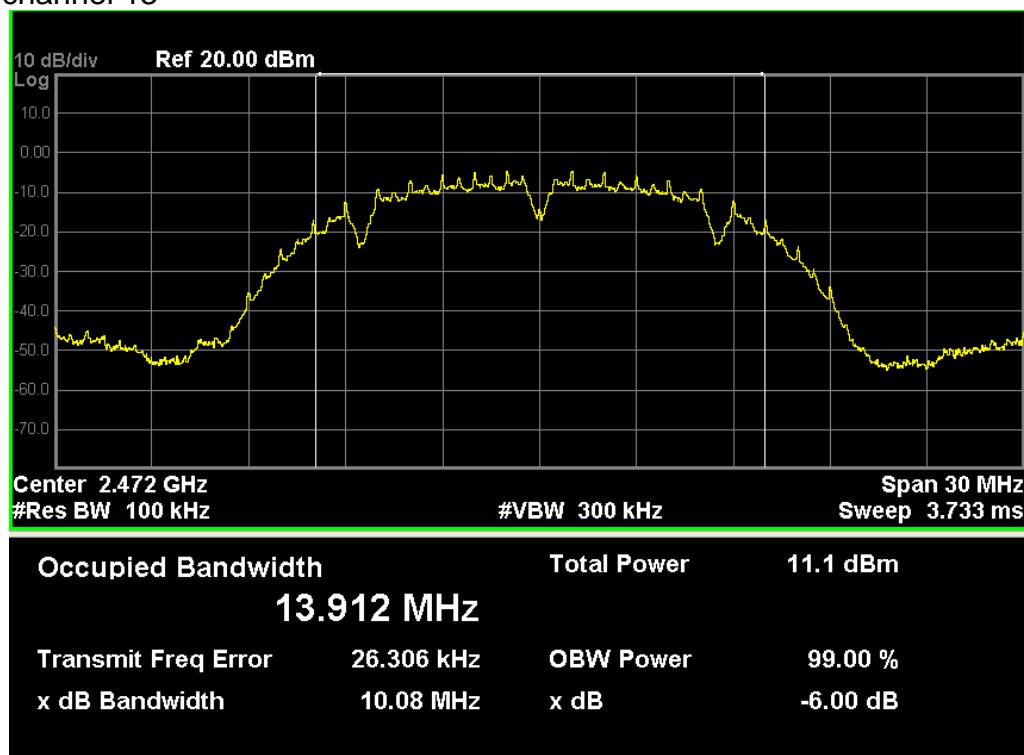


802.11g


802.11g channel 1

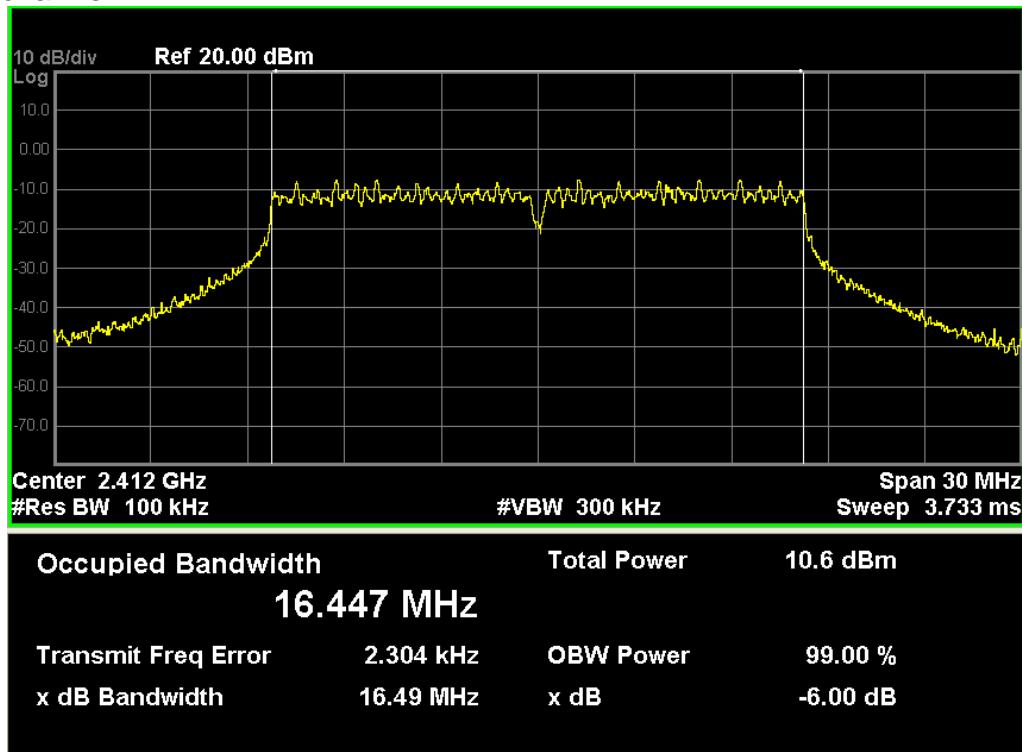

802.11g channel 7

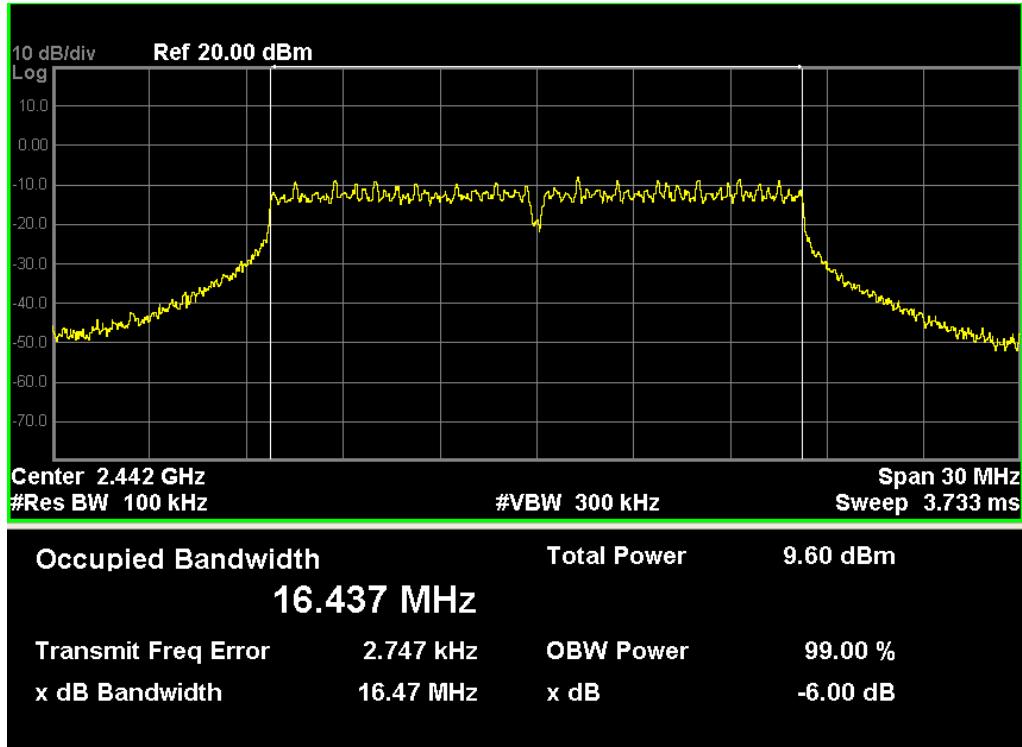


802.11g channel 13

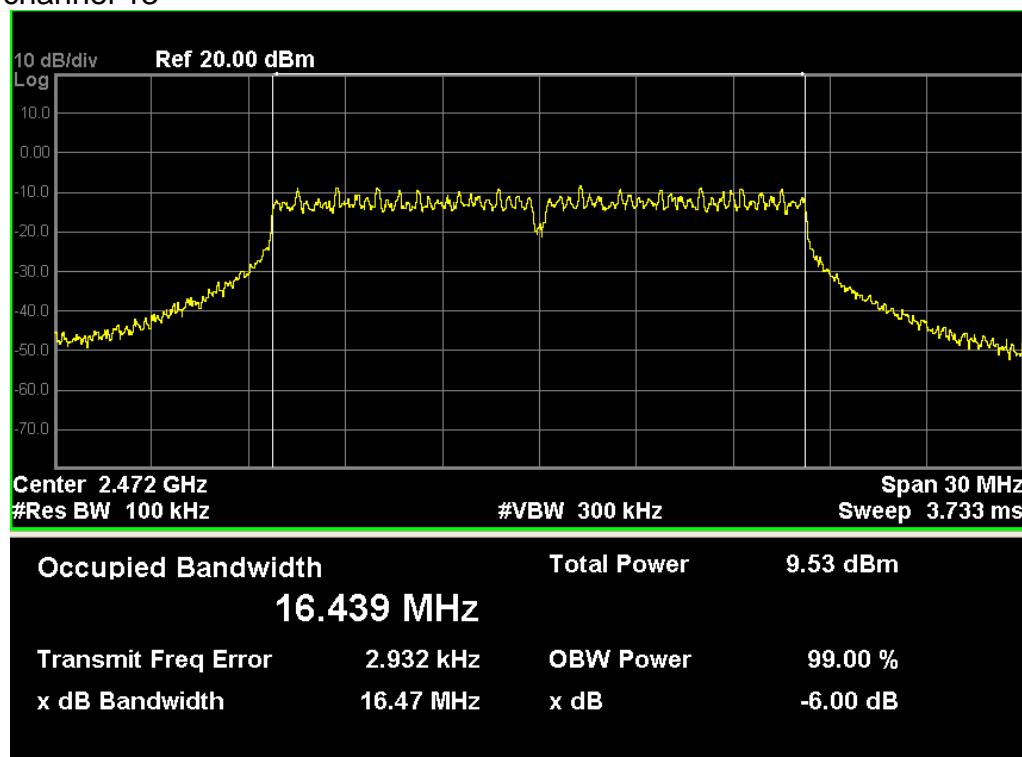

5. POWER SPECTRAL DENSITY

5.1 TEST SETUP

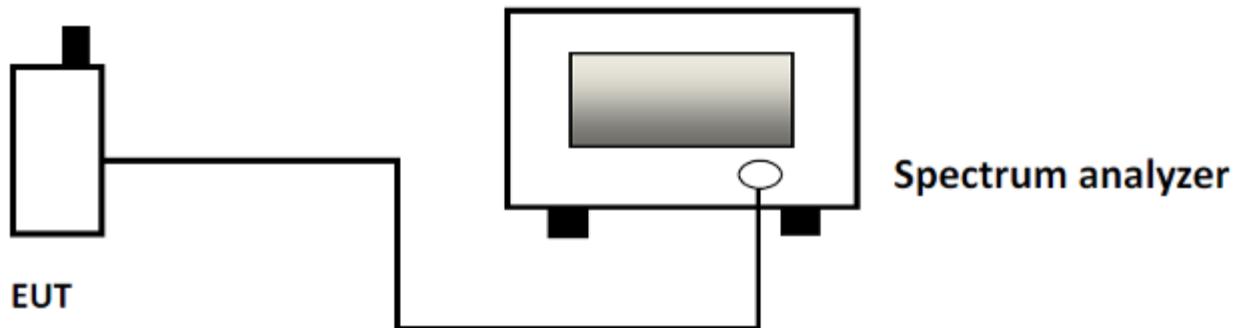

5.2 LIMITS

Limits	$\leq 8\text{dBm}$
--------	--------------------

5.3 TEST PROCEDURE

KDB 558074 D01 DTS Measurement Guidance V03 r01 April 9, 2013

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.

Set the VBW $\geq 3 \times \text{RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.4 RESULTS & PERFORMANCE


Channel	Mode	Measured level (dBm)	Limit (dBm)	Result
1 (2412MHz)	802.11b	-14.440	≤8.00	Pass
	802.11g	-18.323	≤8.00	Pass
7 (2442 MHz)	802.11b	-17.60	≤8.00	Pass
	802.11g	-19.312	≤8.00	Pass
13 (2472 MHz)	802.11b	-15.124	≤8.00	Pass
	802.11g	-19.141	≤8.00	Pass

802.11b


802.11b channel 1

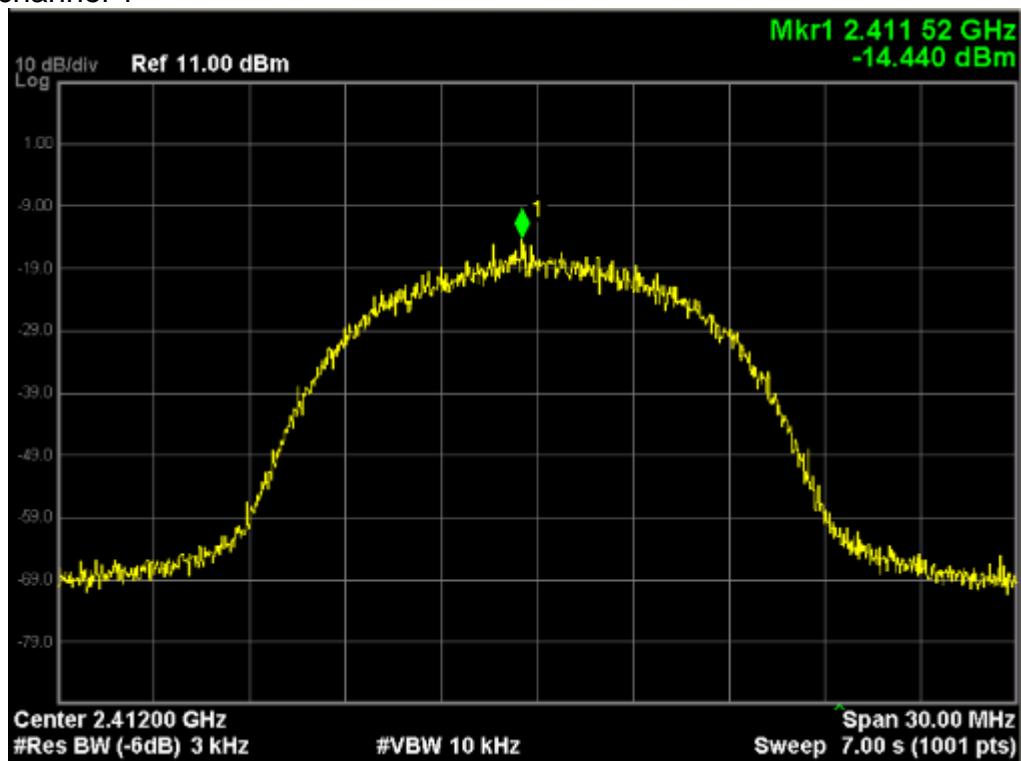

802.11b channel 7

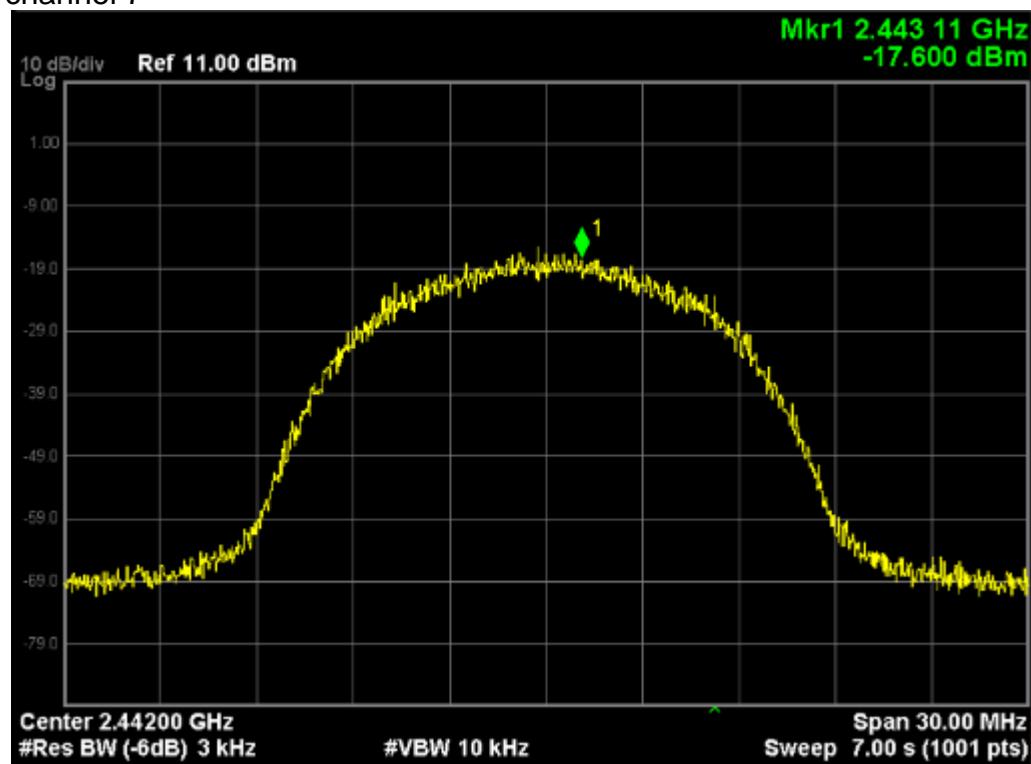


802.11b channel 13

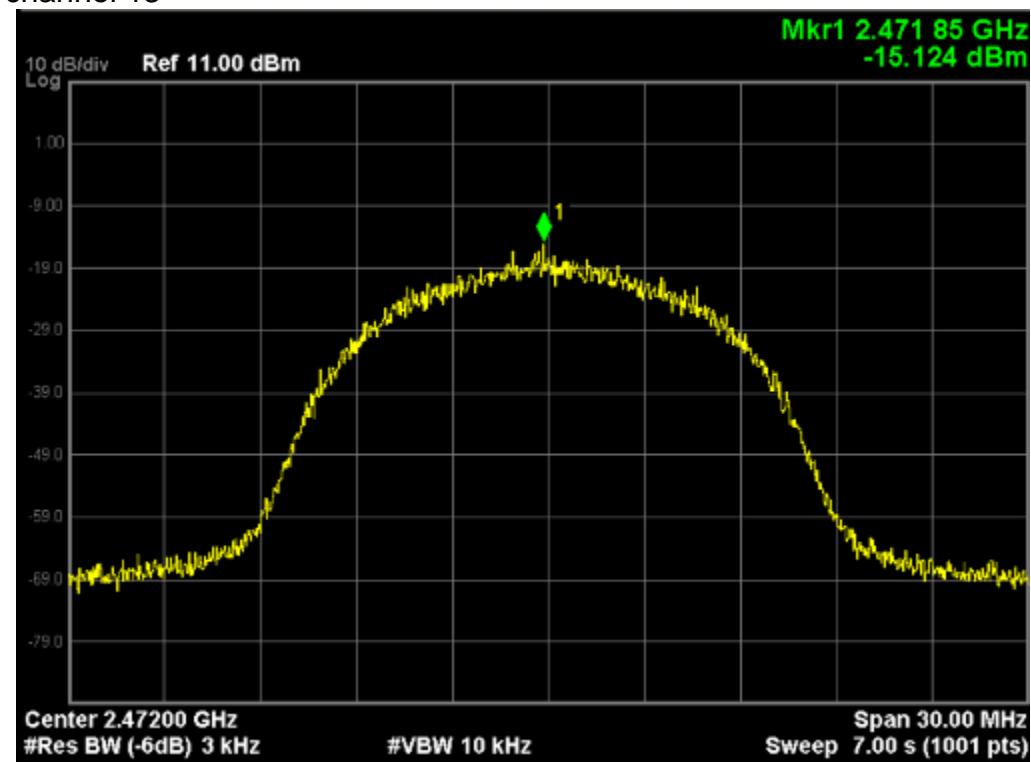


802.11g


802.11g channel 1

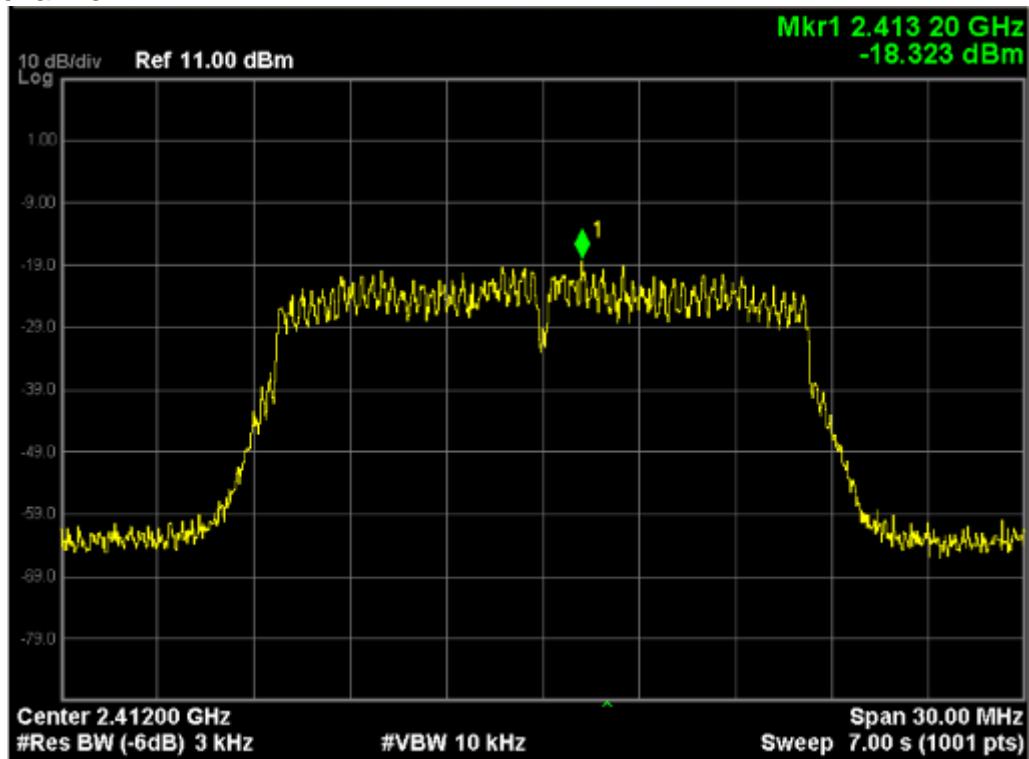

802.11g channel 7

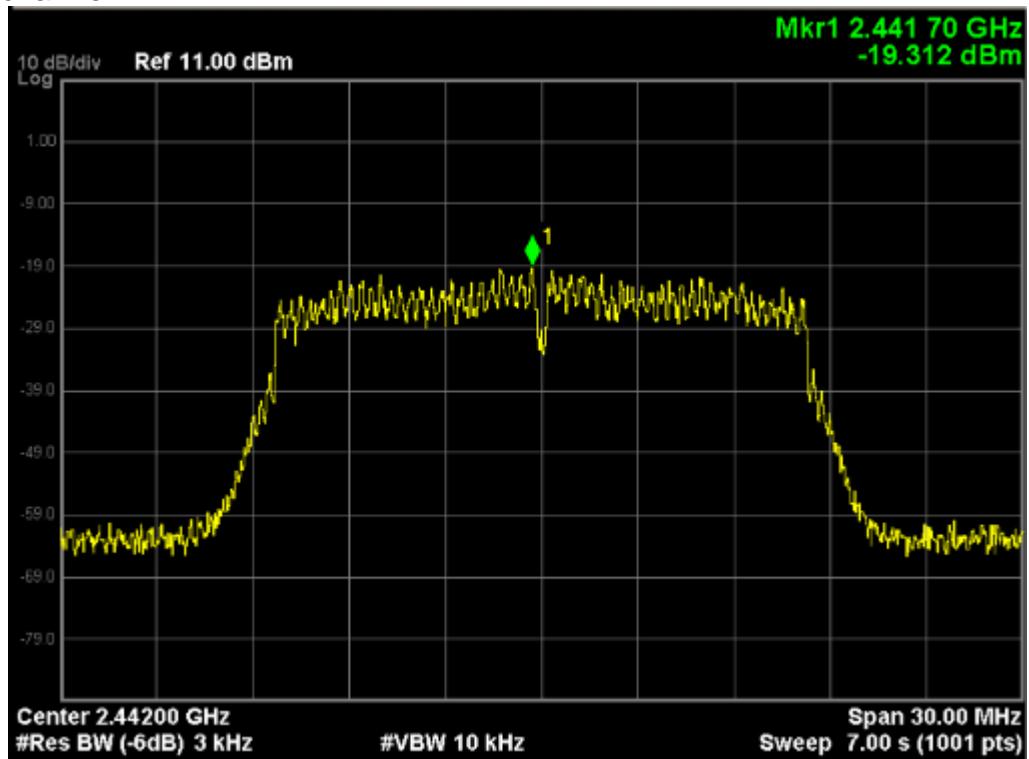


802.11g channel 13

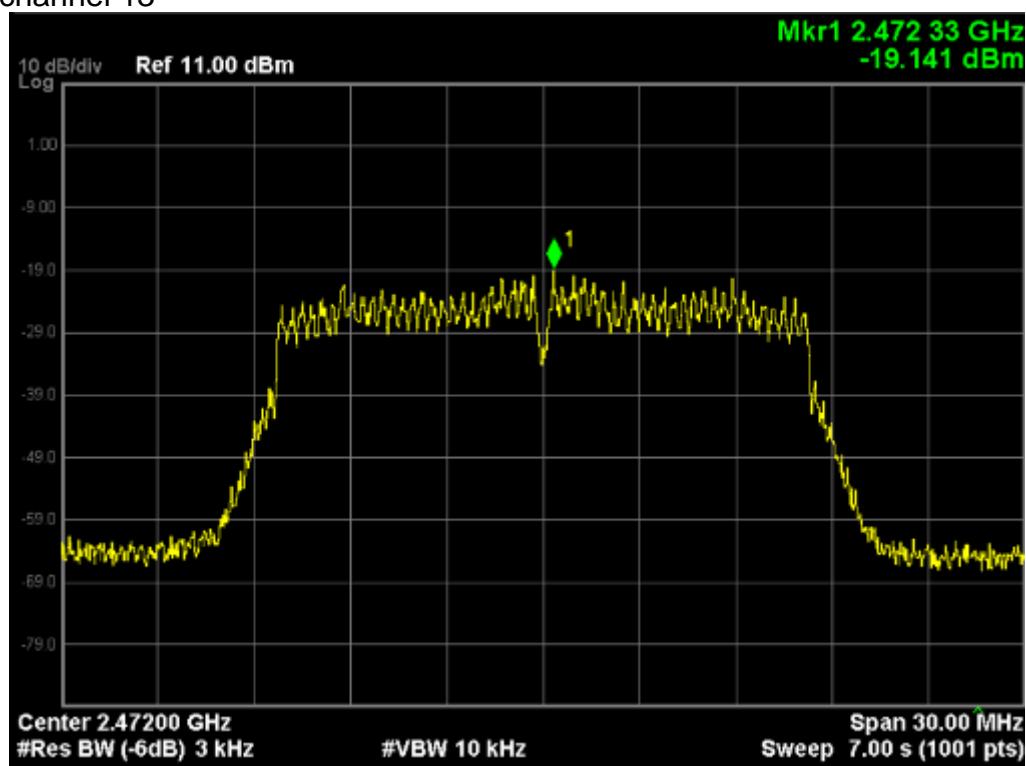

6. PEAK OUTPUT POWER (CONDUCTION)

6.1 TEST SETUP

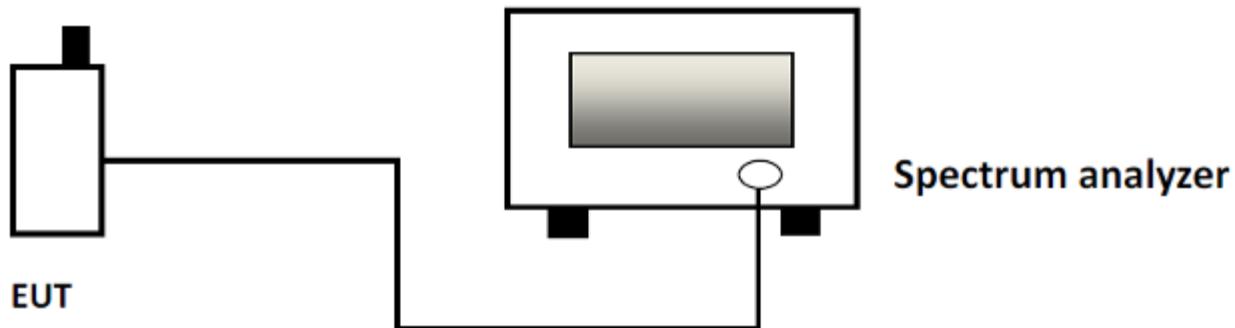

6.2 LIMITS

Limits	<30dBm
--------	--------

6.3 TEST PROCEDURE

Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum analyzer. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels.

WIFI: Low(1), Middle(7) and High (13).

Using Channel power measurement function of spectrum analyzer and settings are: Integ BW = 20MHz RBW = 1MHz and VBW = 3MHz Trace = max hold

6.4 RESULTS & PERFORMANCE

802.11b			
Channel	Peak power (dBm)	Limit (dBm)	Margin (dB)
1 (2412MHz)	18.74	30	11.26
7 (2442MHz)	18.76	30	11.24
13 (2472MHz)	18.43	30	11.57


802.11g			
Channel	Peak power (dBm)	Limit (dBm)	Margin (dB)
1 (2412MHz)	18.50	30	11.50
7 (2442MHz)	18.96	30	11.04
13 (2472MHz)	19.15	30	10.85

802.11b


802.11b channel 1



802.11b channel 7

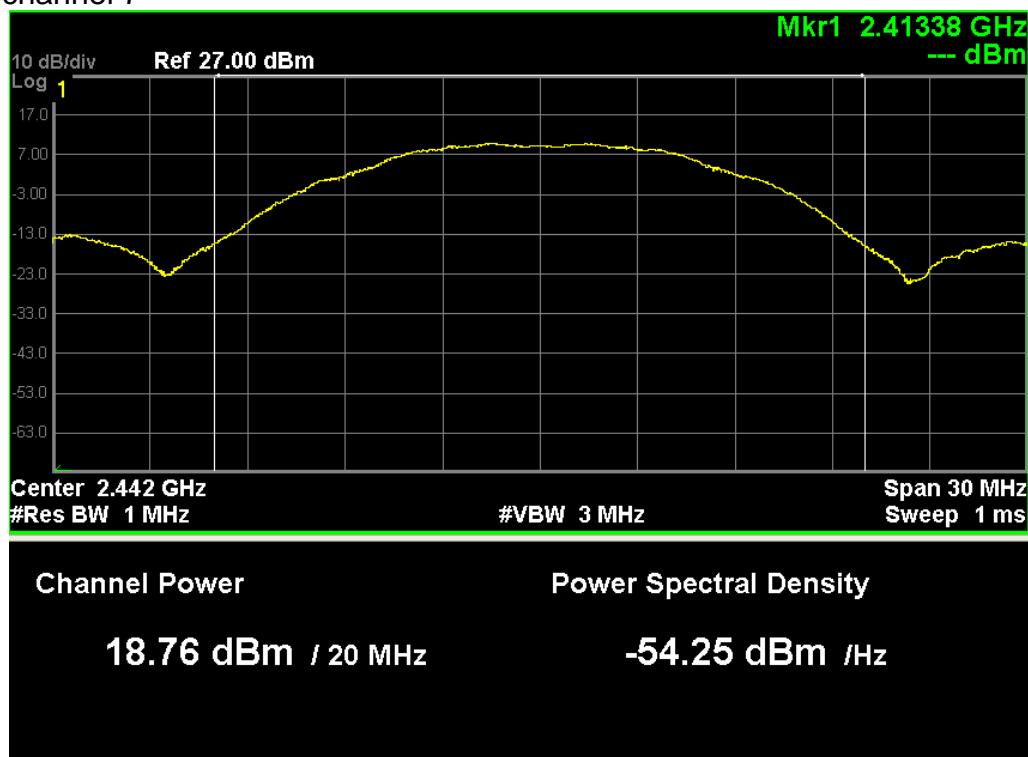


802.11b channel 13

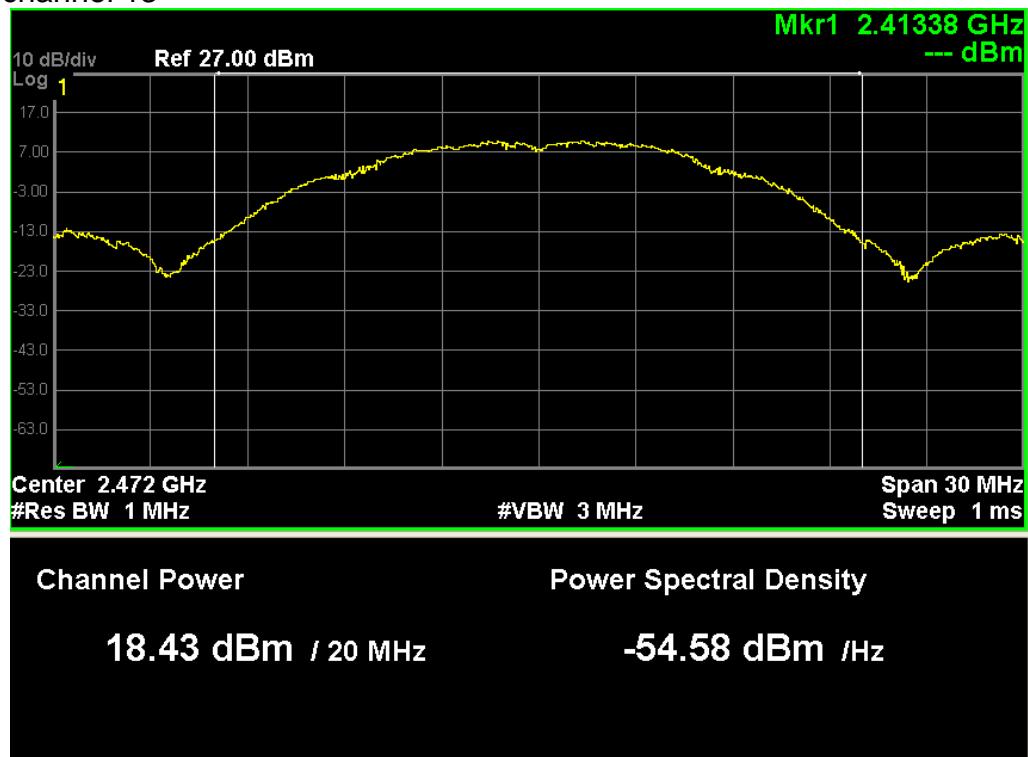


802.11g


802.11g channel 1

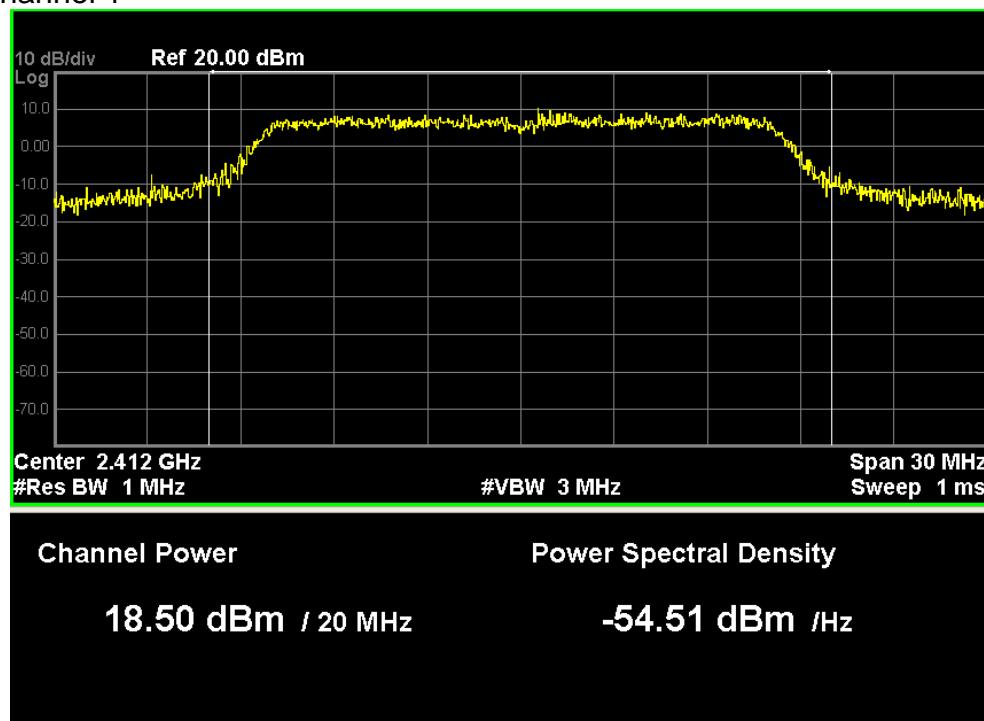

802.11g channel 7

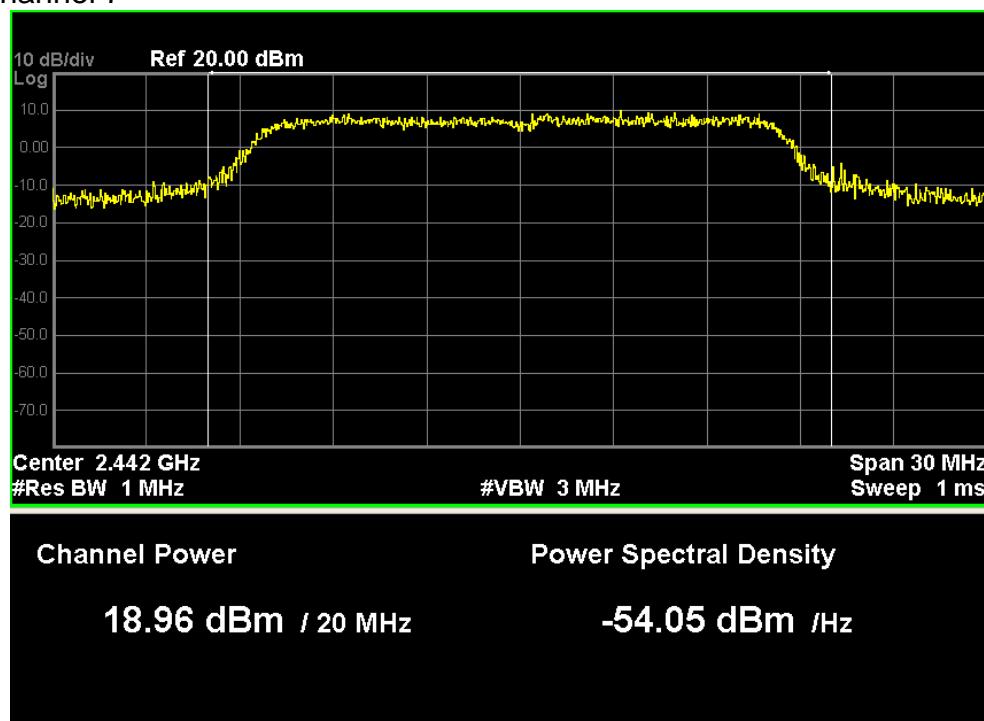


802.11g channel 13

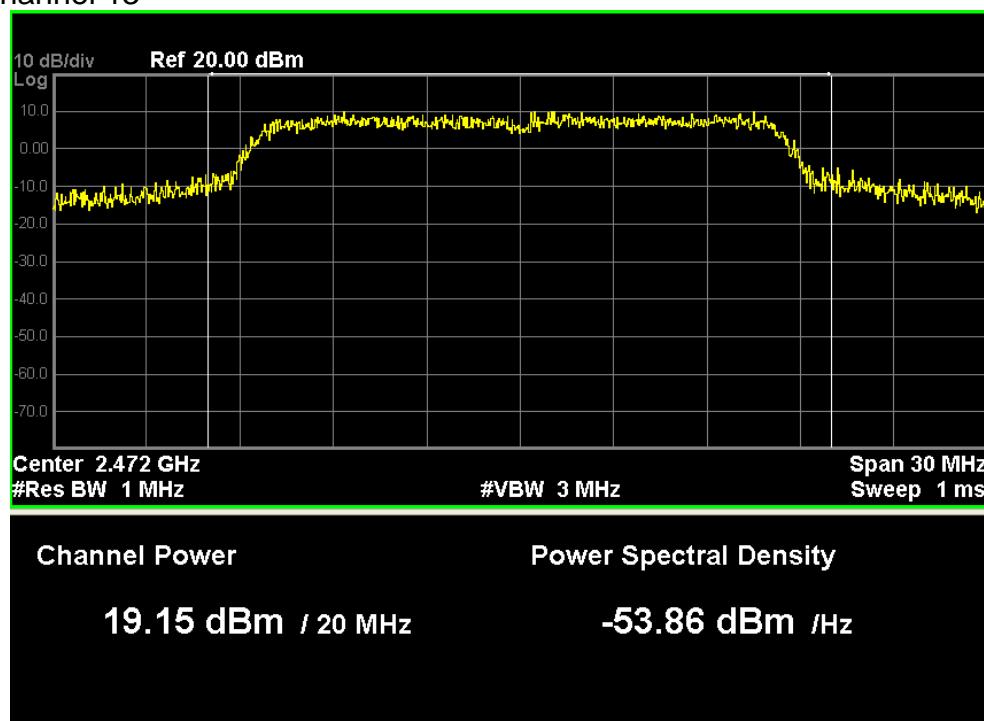

7. SPURIOUS EMISSIONS (CONDUCTION)

7.1 TEST SETUP

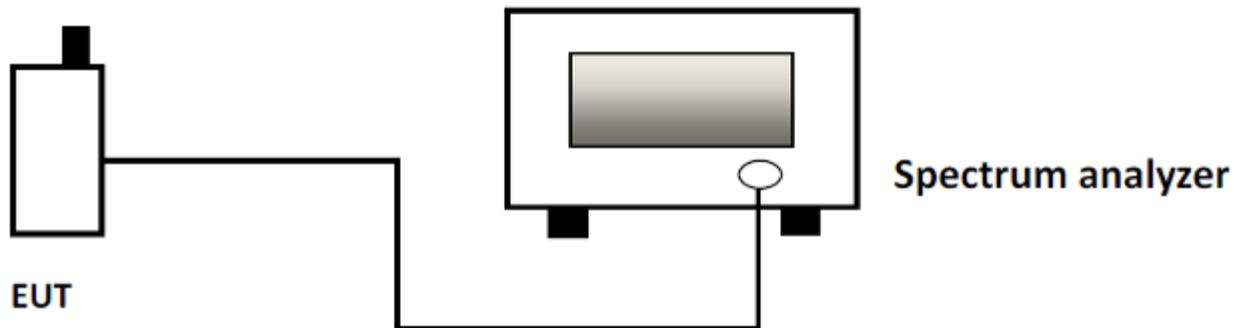

7.2 LIMITS

Limit	$<(P-20dB)$
Note: P is the highest level of the desired power	

7.3 TEST PROCEDURE

The EUT was connected to Spectrum Analyzer and Base Station via power divider. Use the following spectrum analyzer settings:



Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 200 Hz for range frequency from 9 KHz to 150KHz, RBW = 9KHz for range frequency from 0.15MHz to 30MHz, and RBW = 100 kHz for above 30MHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold


Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

7.4 RESULTS & PERFORMANCE


802.11b, traffic mode; Channel 1; Below 30 MHz

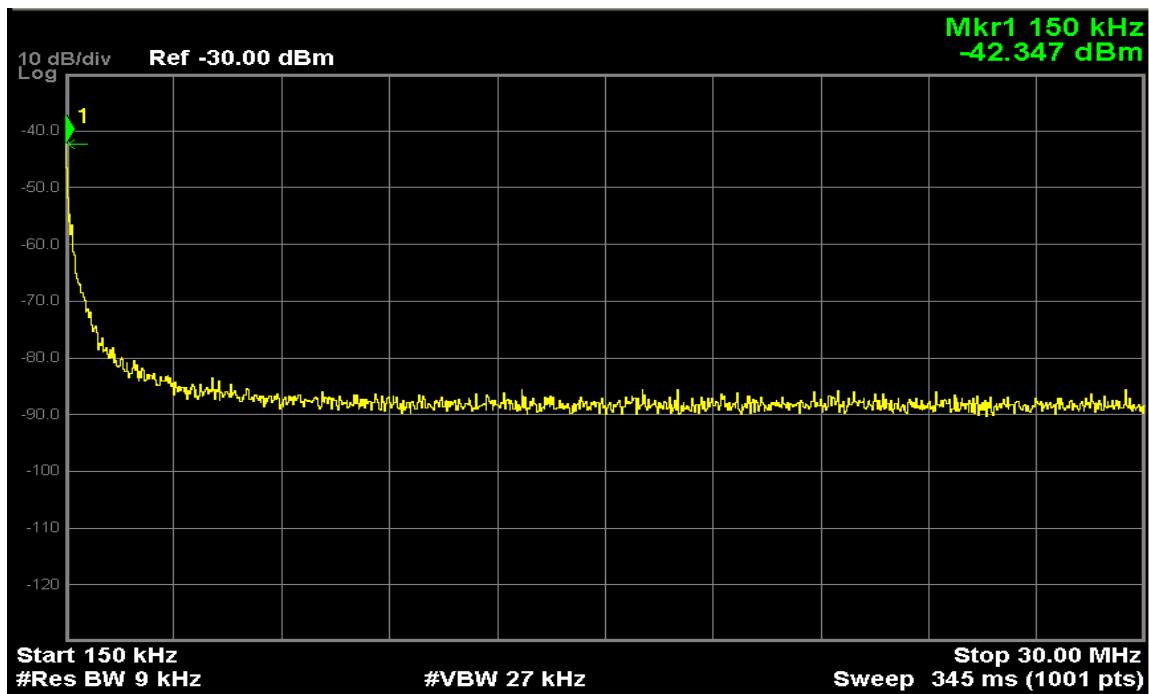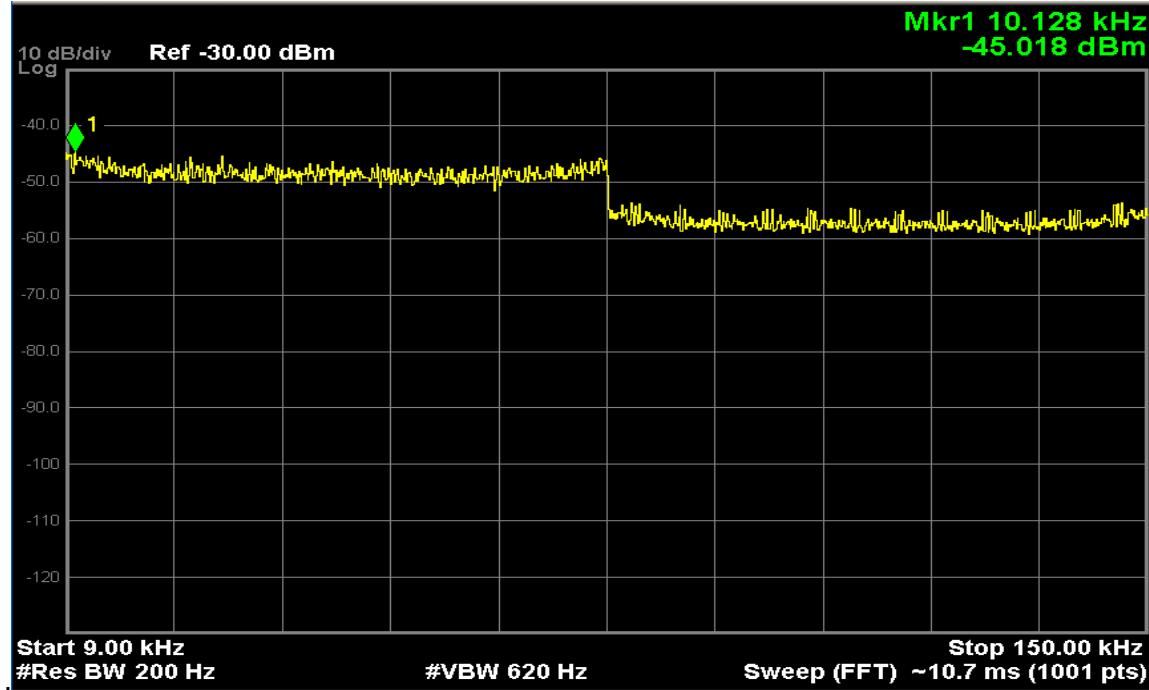

802.11b, traffic mode; Channel 1; (30~1000) MHz

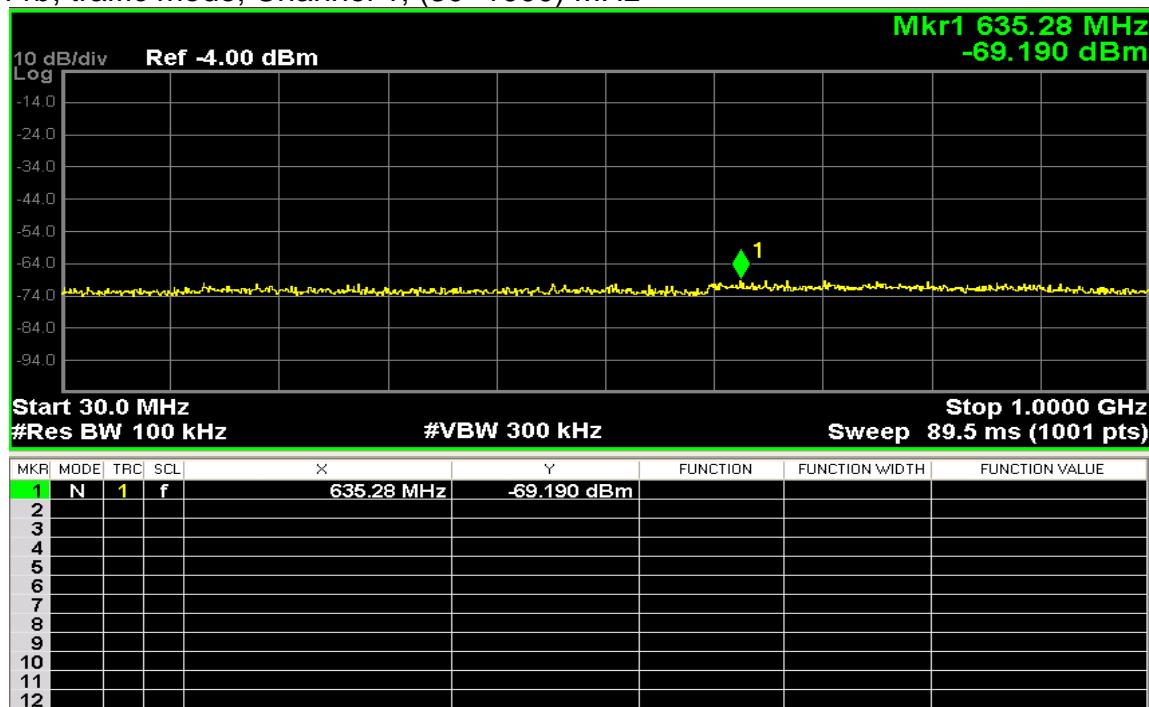

802.11b, traffic mode; Channel 1; (1~12.75)GHz


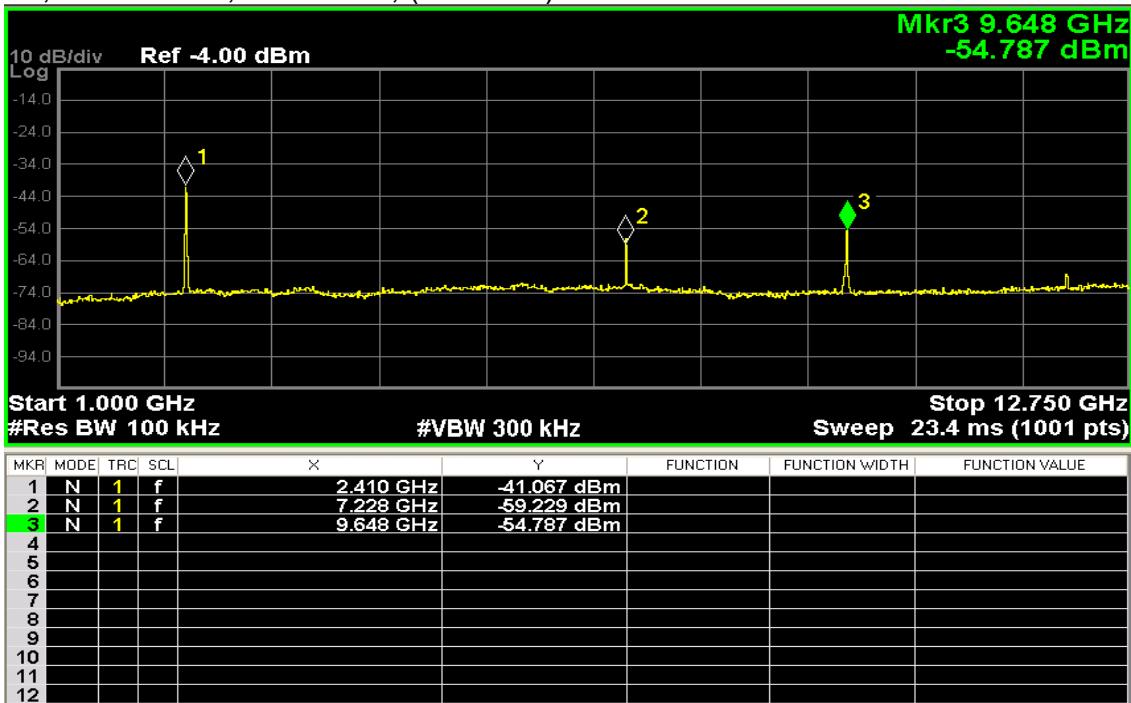


Note: The point mark1 is carrier.


802.11b, traffic mode; Channel 1; (12.75~25)GHz




802.11g, traffic mode; Channel 1; Below 30 MHz

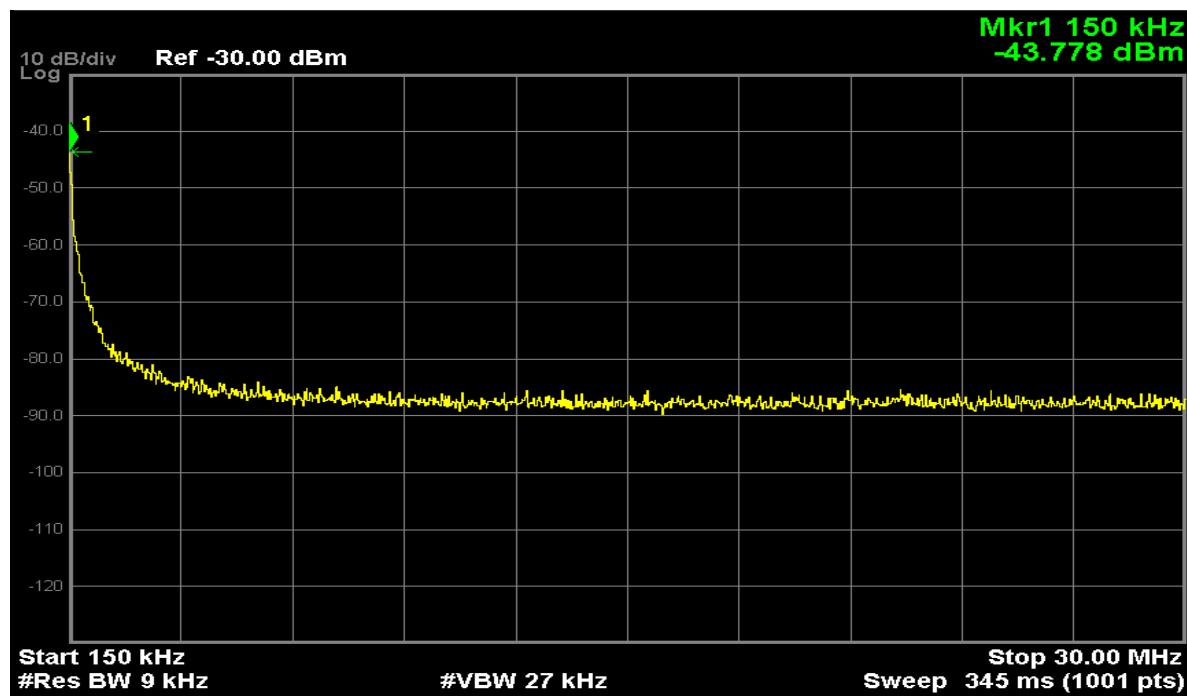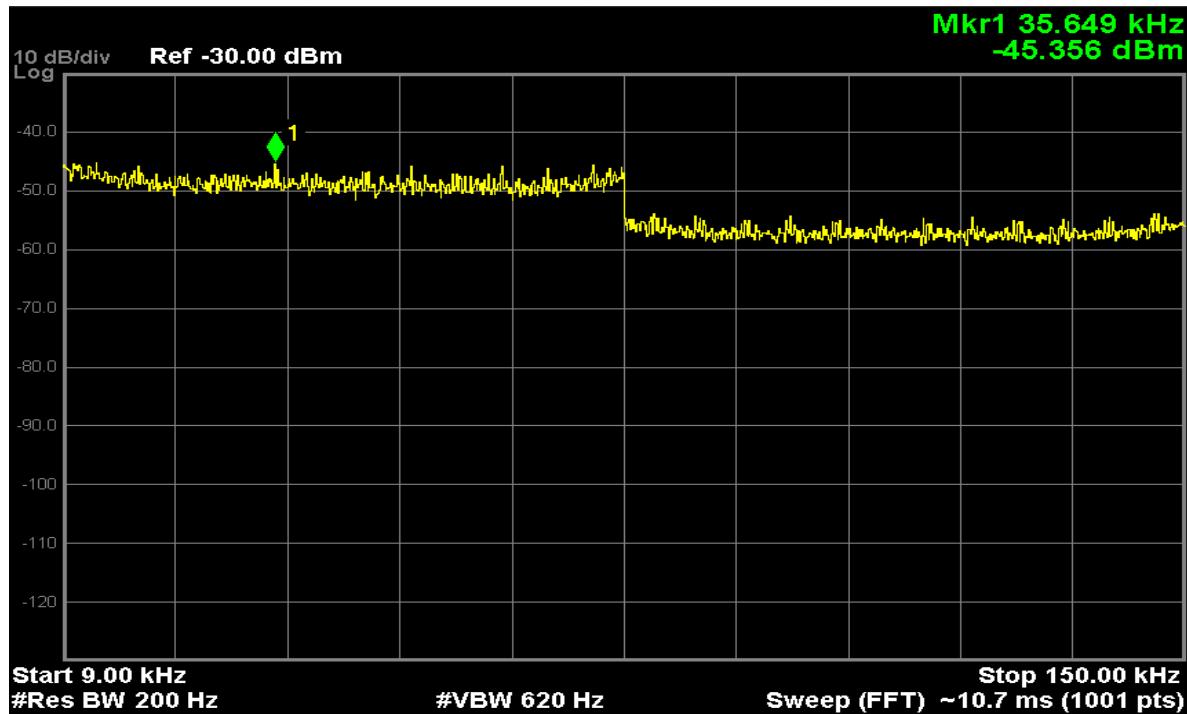

802.11g, traffic mode; Channel1 ; (30~1000) MHz

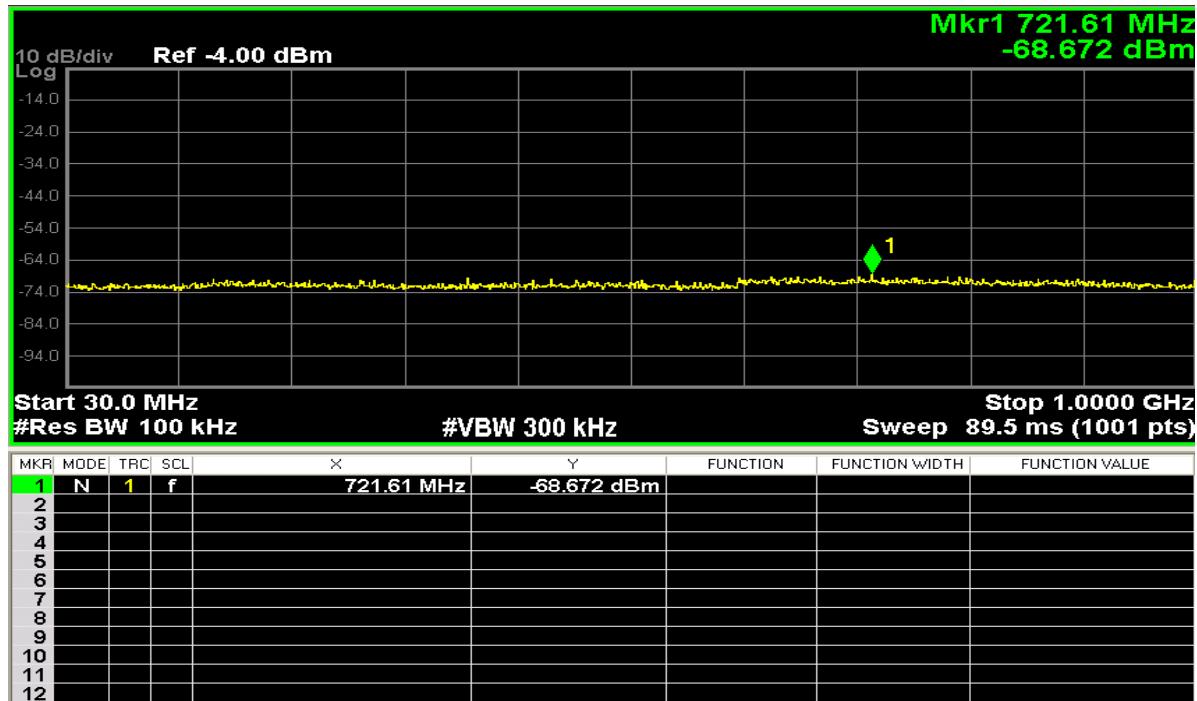


802.11g, traffic mode; Channel 1; (1~12.75)GHz

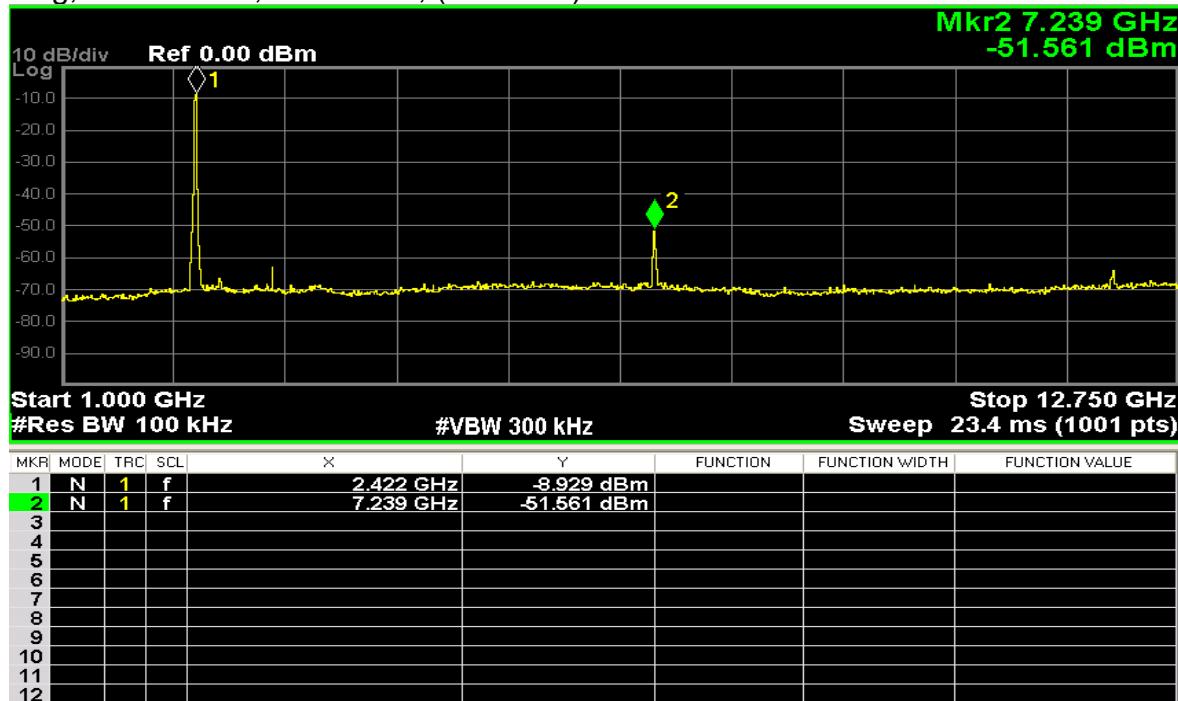


Note: The point mark1 is carrier.

802.11g, traffic mode; Channel 1; (12.75~25) GHz

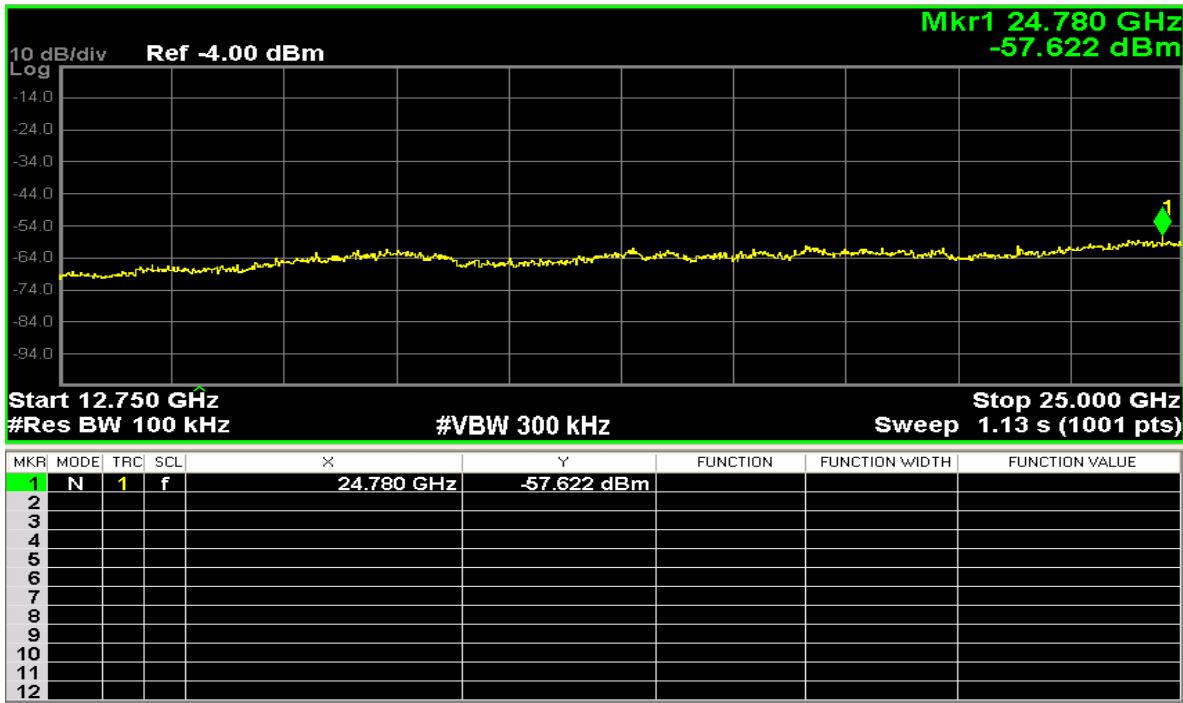

8. BAND EDGE MEASUREMENT

8.1 TEST SETUP

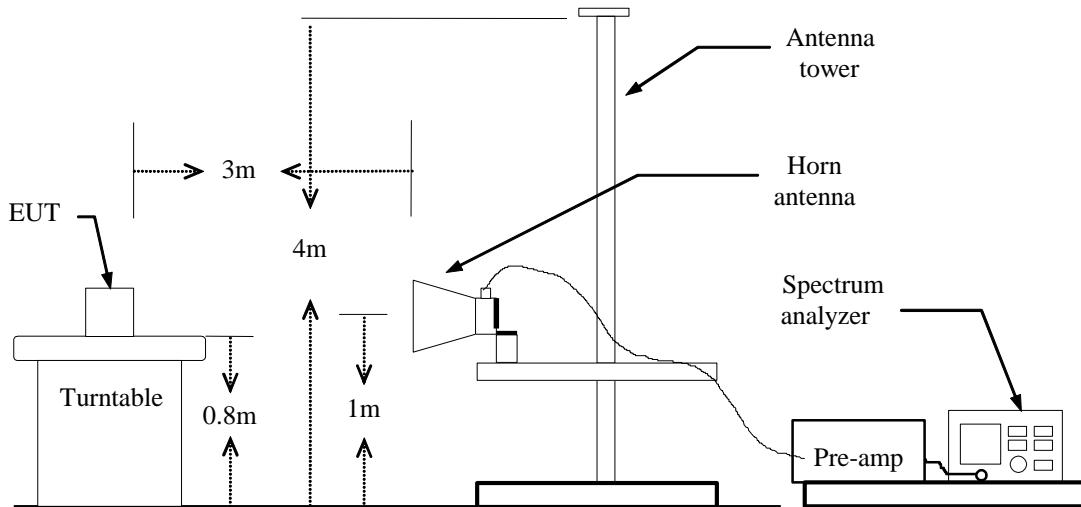

8.2 LIMITS

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

8.3 TEST PROCEDURE

The EUT is placed on a turntable, which is 0.8m above the ground plane.

The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

peak measurements are made using a peak detector and RBW=1MHz, Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz, and the test config as following:

PEAK: RBW= 1MHz / VBW \geq 3MHz / Sweep=AUTO


AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

8.4 RESULTS & PERFORMANCE

802.11b (low channel)

Measurement Mode: Peak Polarity: Horizontal

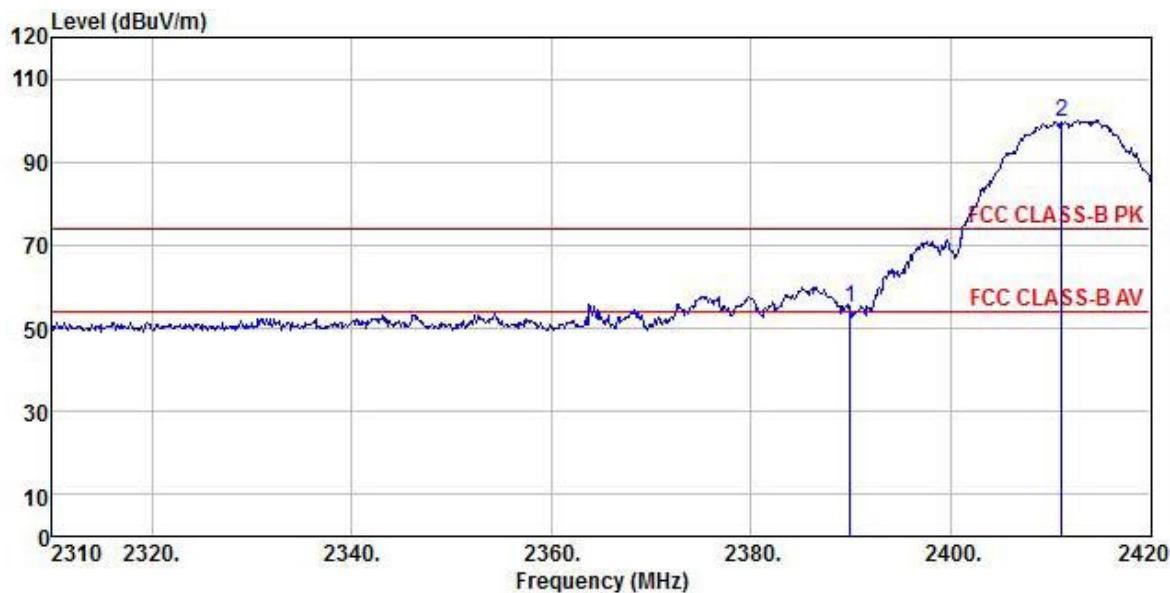

Site : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V

Mode : 802.11 b ch1


Memo :

Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level Factor	Limit Level	Line Limit	Over Limit	Remark
------	-------------------	--------------	-------------	--------------	-------------	------------	------------	--------

1	2389.97	58.66	27.58	7.13	38.34	55.03	74.00	-18.97 Peak
2 pp	2411.09	103.29	27.54	7.21	38.34	99.70	74.00	25.70 Peak

Measurement Mode: Average

Polarity: Horizontal

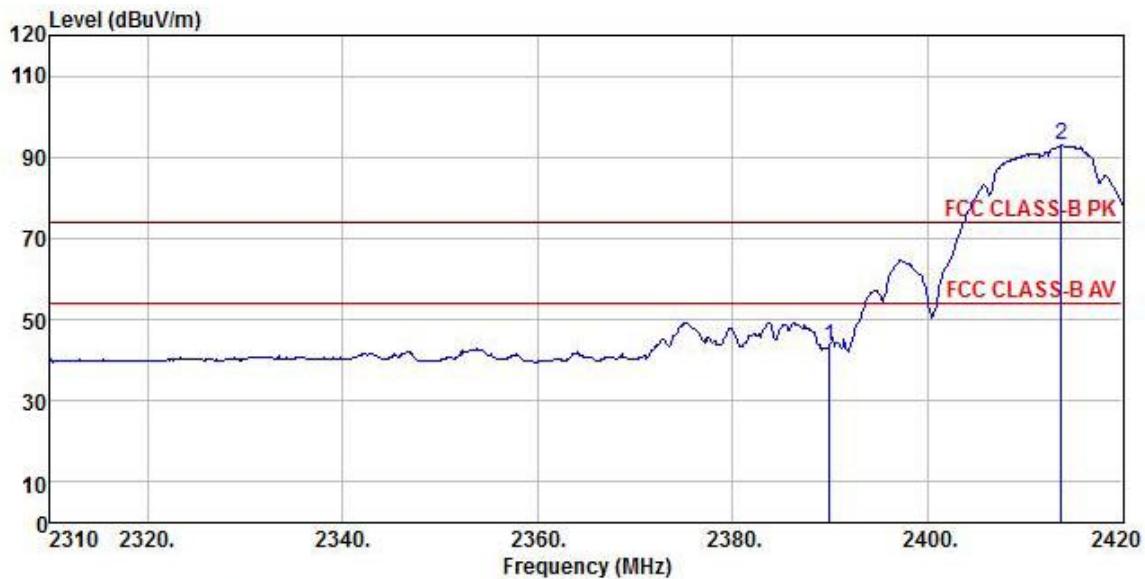

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch1

Memo :

Freq	ReadAntenna	Cable	Preamp	Limit	Over	Limit	Remark
	Level	Factor	Loss				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2389.97	47.18	27.58	7.13	38.34	43.55	54.00 -10.45 Average
2 pp	2413.73	96.42	27.54	7.21	38.34	92.83	54.00 38.83 Average

Measurement Mode: Peak

Polarity: Vertical

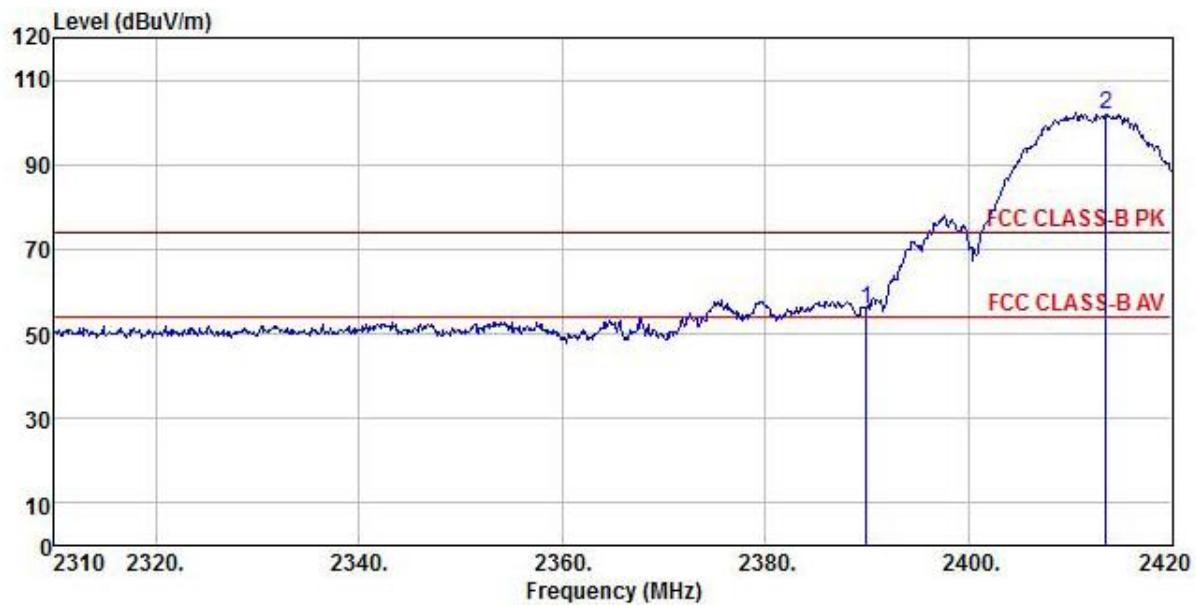

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch1

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	59.51	27.58	7.13	38.34	55.88	74.00	-18.12 Peak
2 pp	2413.51	105.42	27.54	7.21	38.34	101.83	74.00	27.83 Peak

Measurement Mode: Average

Polarity: Vertical

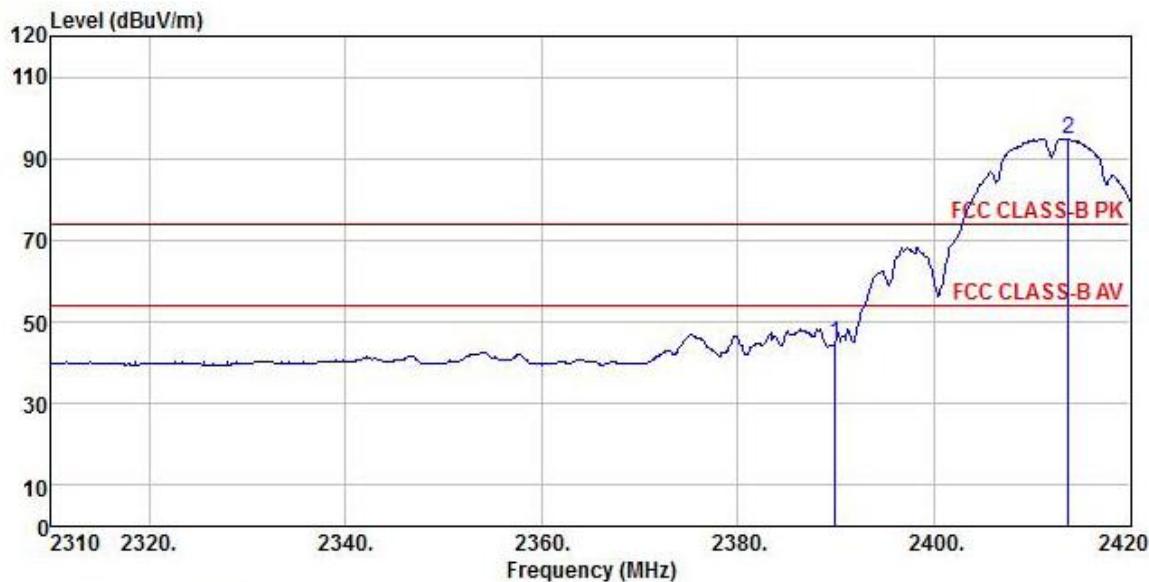

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch1

Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor	Level	dBuV/m				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2389.97	48.57	27.58	7.13	38.34	44.94	54.00	-9.06	Average	
2 pp	2413.73	98.42	27.54	7.21	38.34	94.83	54.00	40.83	Average	

802.11b (high channel)

Measurement Mode: Peak Polarity: Horizontal

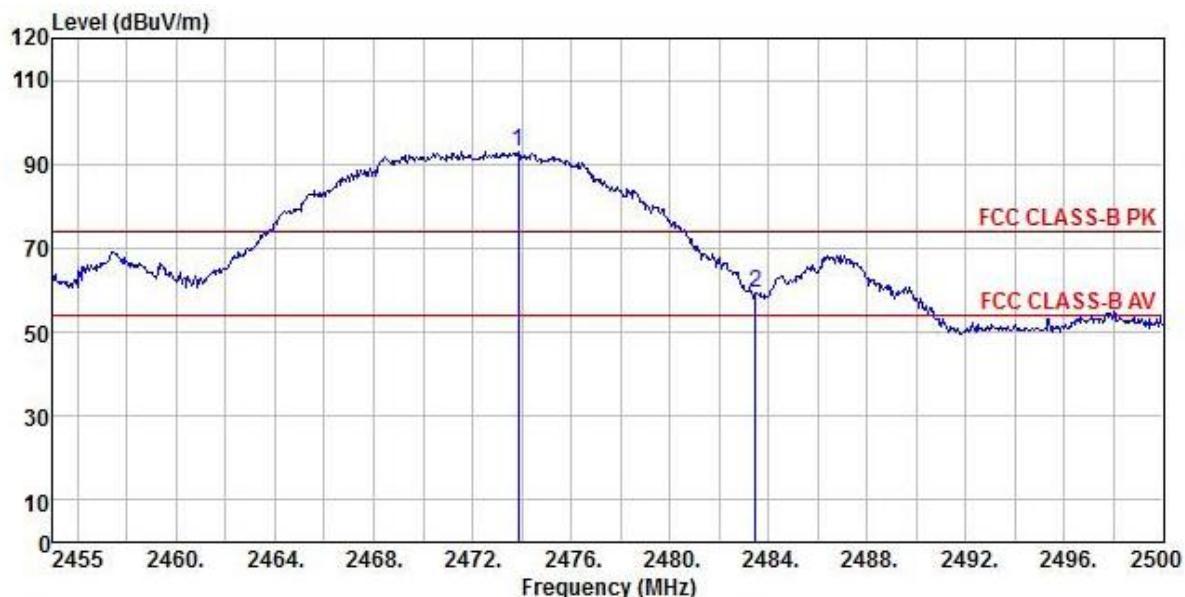

Site : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch13

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Freq	Level	Factor	Loss			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2473.86	96.29	27.52	7.41	38.31	92.91	74.00 18.91 Peak
2	2483.49	62.86	27.52	7.41	38.31	59.48	74.00 -14.52 Peak

Measurement Mode: Average

Polarity: Horizontal

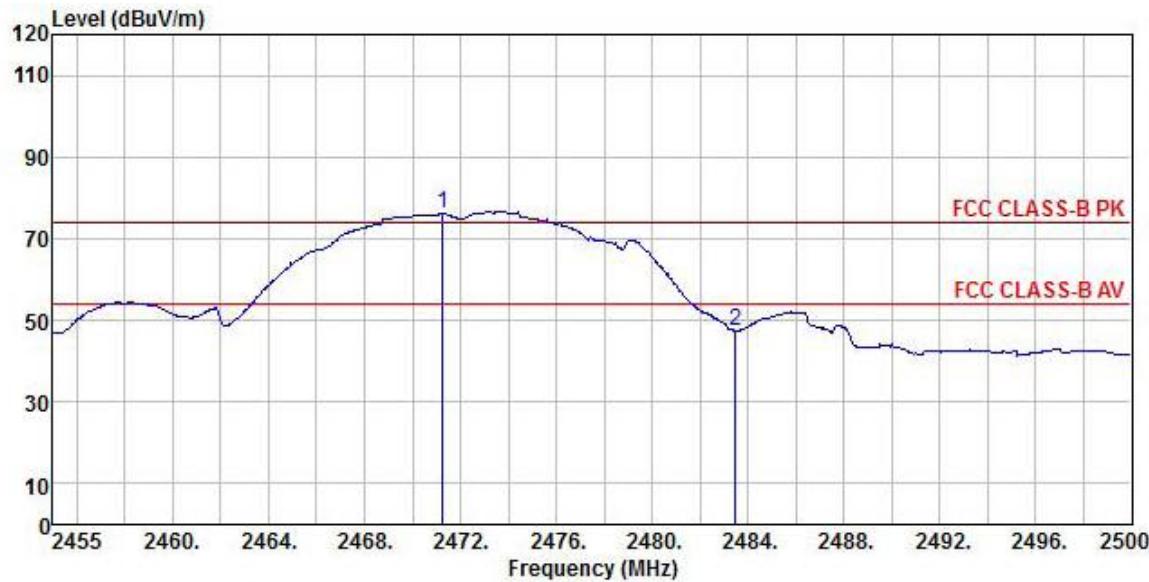

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch13

Memo :

Freq	ReadAntenna		Cable Preamp		Limit Level	Line	Over Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	2471.25	79.46	27.49	7.41	38.31	76.05	54.00	22.05 Average
2	2483.49	50.94	27.52	7.41	38.31	47.56	54.00	-6.44 Average

Measurement Mode: Peak

Polarity: Vertical

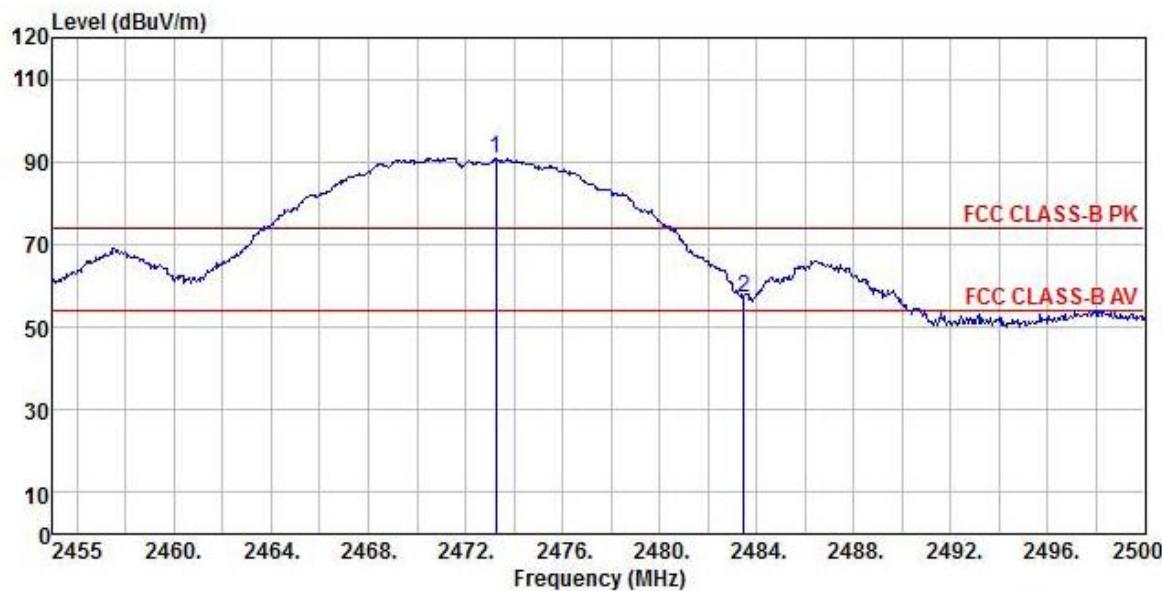

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch13

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark	
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1 pp	2473.27	94.17	27.52	7.41	38.31	90.79	74.00	16.79 Peak
2	2483.49	60.68	27.52	7.41	38.31	57.30	74.00	-16.70 Peak

Measurement Mode: Average

Polarity: Vertical

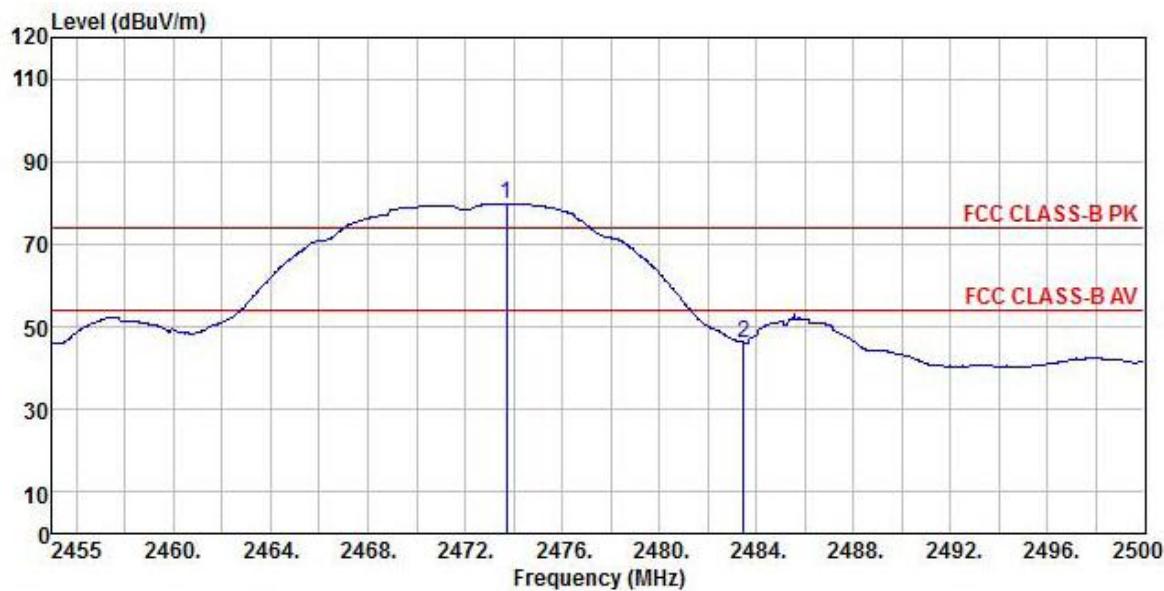

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 b ch13

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2473.72	83.18	27.52	7.41	38.31	79.80	54.00	25.80 Average
2	2483.49	49.64	27.52	7.41	38.31	46.26	54.00	-7.74 Average

802.11g (low channel)

Measurement Mode: Peak Polarity: Horizontal

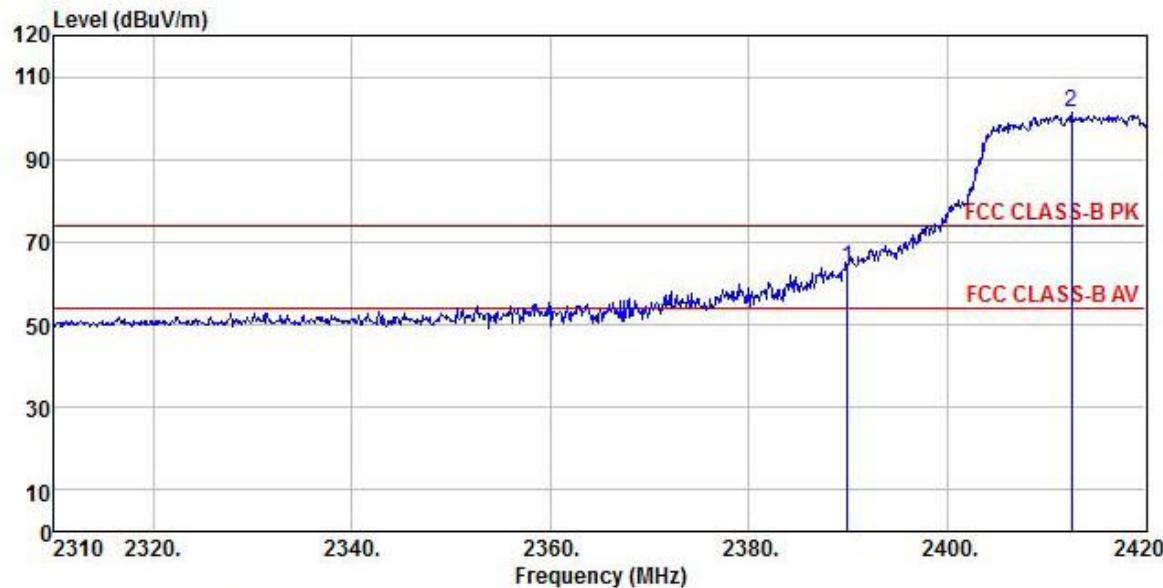

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 g ch1

Memo :

Freq	ReadAntenna		Cable		Preamp	Level	Limit	Over	Remark
	Level	Factor	Loss	Factor					
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2389.97	67.25	27.58	7.13	38.34	63.62	74.00	-10.38	Peak
2 pp	2412.52	105.01	27.54	7.21	38.34	101.42	74.00	27.42	Peak

Measurement Mode: Average

Polarity: Horizontal

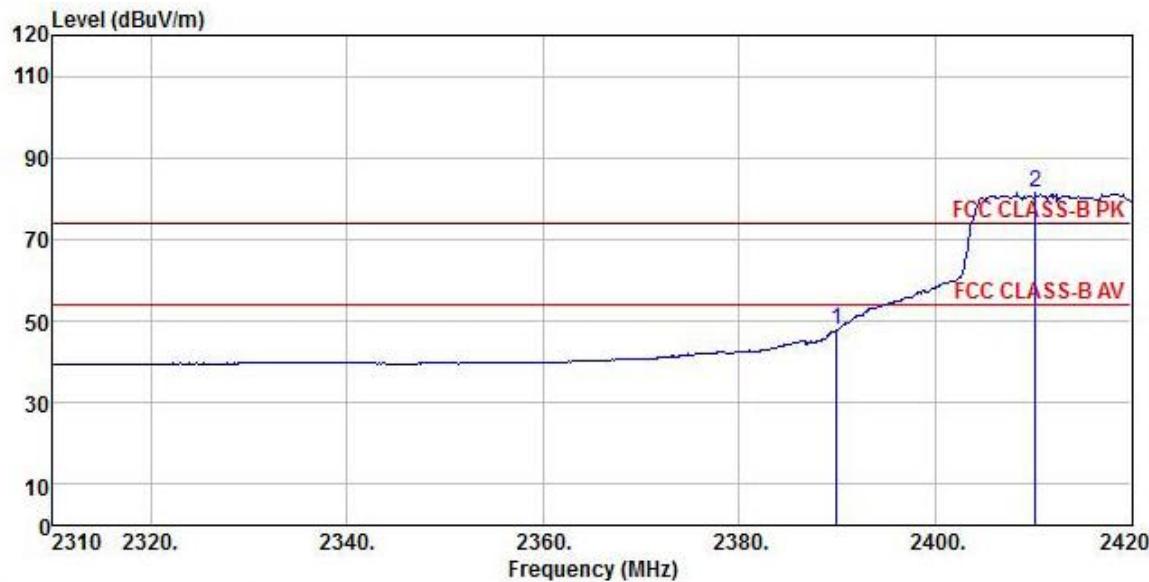

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 g ch1

Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor	Level	Line				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	2389.97	51.32	27.58	7.13	38.34	47.69	54.00	-6.31	Average	
2 pp	2410.21	84.94	27.54	7.21	38.34	81.35	54.00	27.35	Average	

Measurement Mode: Peak

Polarity: Vertical

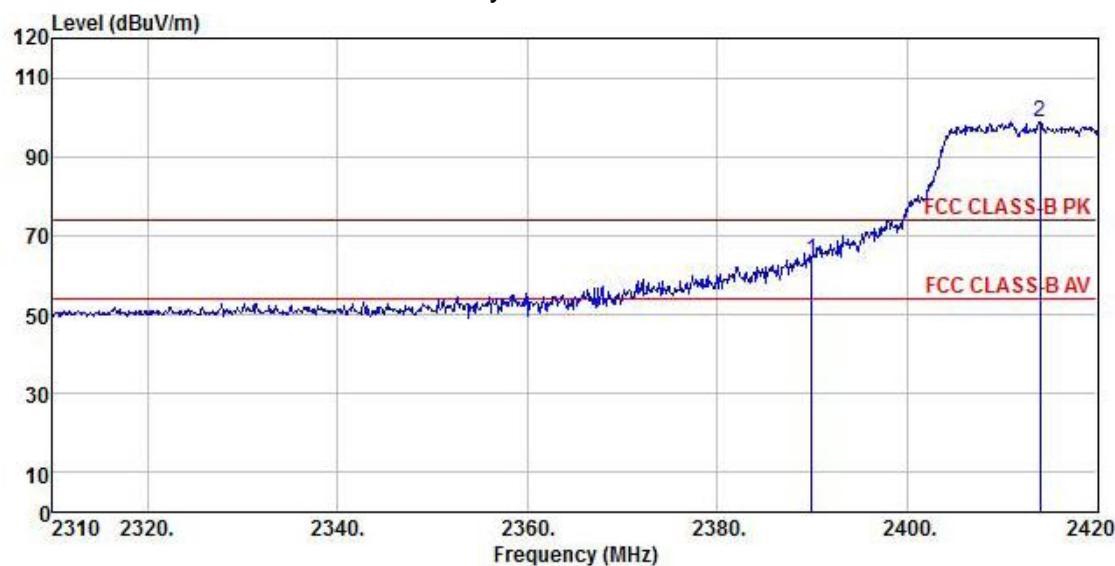

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V

Mode : 802.11 g ch1


Memo :

	ReadAntenna	Cable	Preamp	Limit	Over			
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark

	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	67.25	27.58	7.13	38.34	63.62	74.00	-10.38	Peak
2 pp	2413.95	102.39	27.54	7.21	38.34	98.80	74.00	24.80	Peak

Measurement Mode: Average

Polarity: Vertical

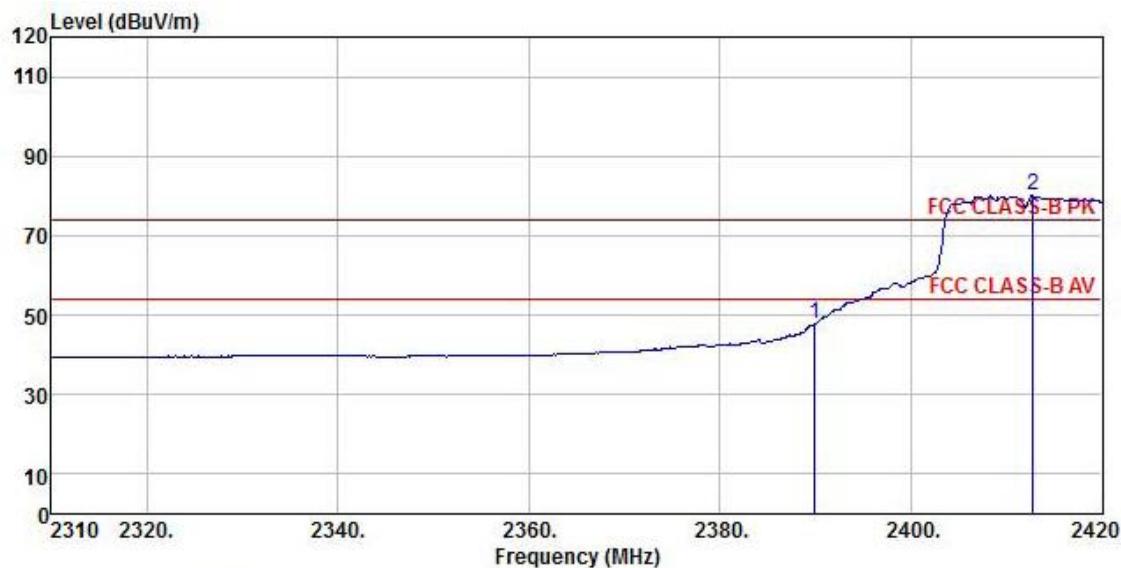

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V

Mode : 802.11 g ch1


Memo :

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2389.97	51.32	27.58	7.13	38.34	47.69	54.00	-6.31 Average
2 pp	2412.74	83.75	27.54	7.21	38.34	80.16	54.00	26.16 Average

802.11g (high channel)

Measurement Mode: Peak

Polarity: Horizontal

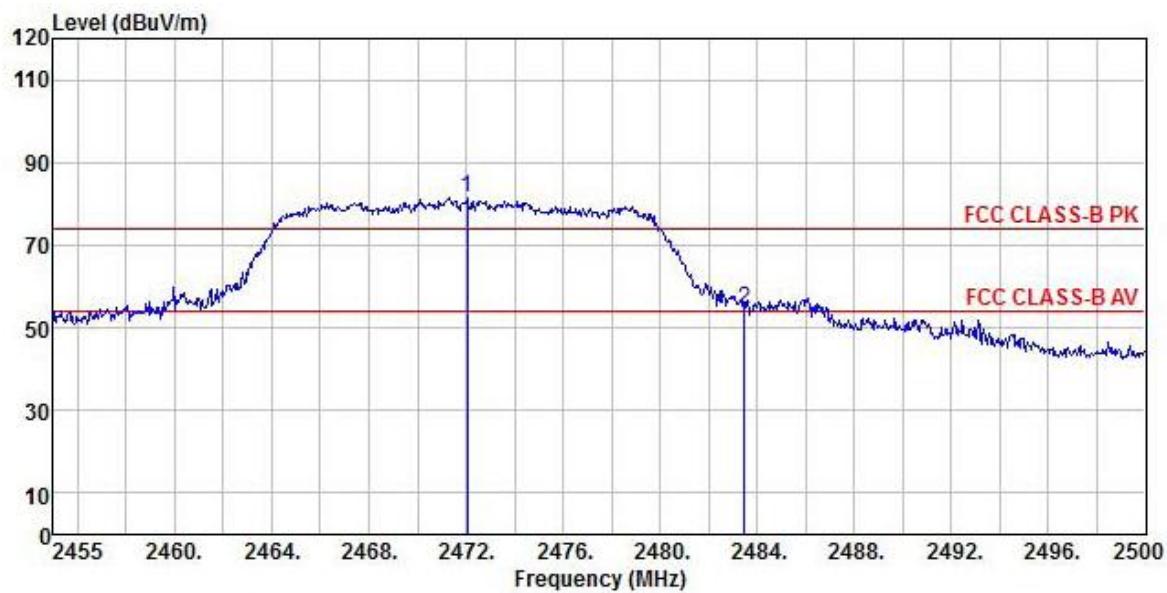

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 g ch13

Memo :

	ReadAntenna Freq	Cable Level	Preamp Factor	Limit Loss	Line Factor	Limit Level	Over dBuV/m	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2472.06	84.81	27.49	7.41	38.31	81.40	74.00	7.40 Peak
2	2483.49	57.76	27.52	7.41	38.31	54.38	74.00	-19.62 Peak

Measurement Mode: Average

Polarity: Horizontal

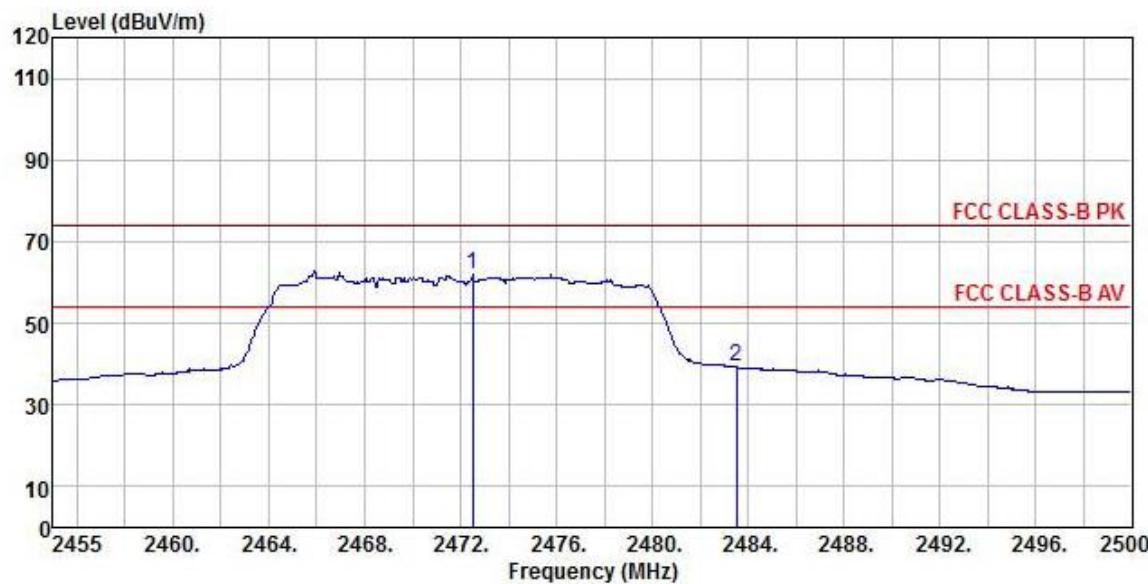

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 g ch13

Memo :

Freq	ReadAntenna		Cable		Preamp Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	Factor	Loss					
1 pp	2472.51	65.23	27.49	7.41	38.31	61.82	54.00	7.82	Average
2	2483.53	42.57	27.52	7.41	38.31	39.19	54.00	-14.81	Average

Measurement Mode: Peak

Polarity: Vertical

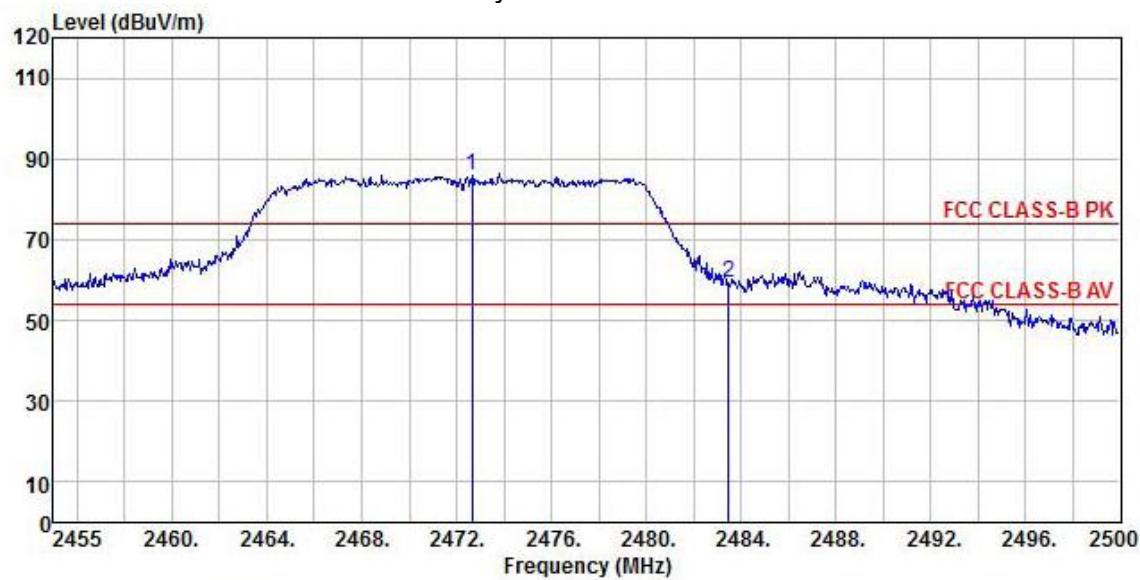

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : 802.11 g ch13

Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Limit	Remark
	MHz	dBuV	Factor	Loss	Factor	Level				
1 pp	2472.64	89.44	27.49	7.41	38.31	86.03	74.00	12.03	Peak	
2	2483.49	62.76	27.52	7.41	38.31	59.38	74.00	-14.62	Peak	

Measurement Mode: Average

Polarity: Vertical

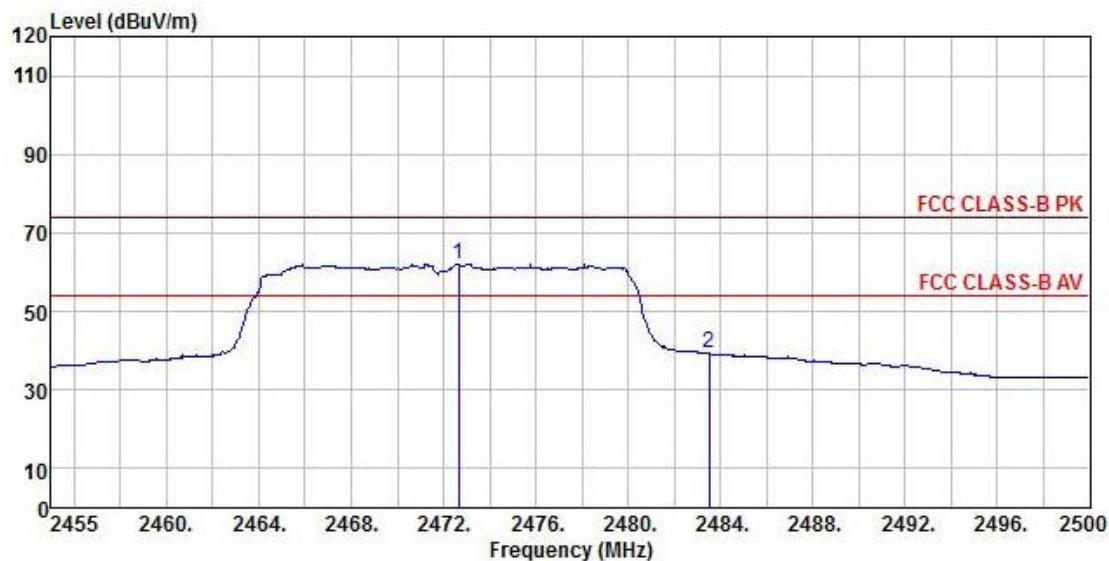


Site : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL
EUT : MobileMapper 20
Model Name : MobileMapper 20
Temp/Humi : 21°C/54%
Power Rating: DC 3.8V
Mode : 802.11 g ch13
Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor	Level	Line			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 pp	2472.64	65.57	27.49	7.41	38.31	62.16	54.00	8.16	Average
2	2483.53	42.57	27.52	7.41	38.31	39.19	54.00	-14.81	Average


9. SPURIOUS EMISSIONS (RADIATION)

9.1 TEST SETUP


Radiated Spurious Measurement: below 30MHz

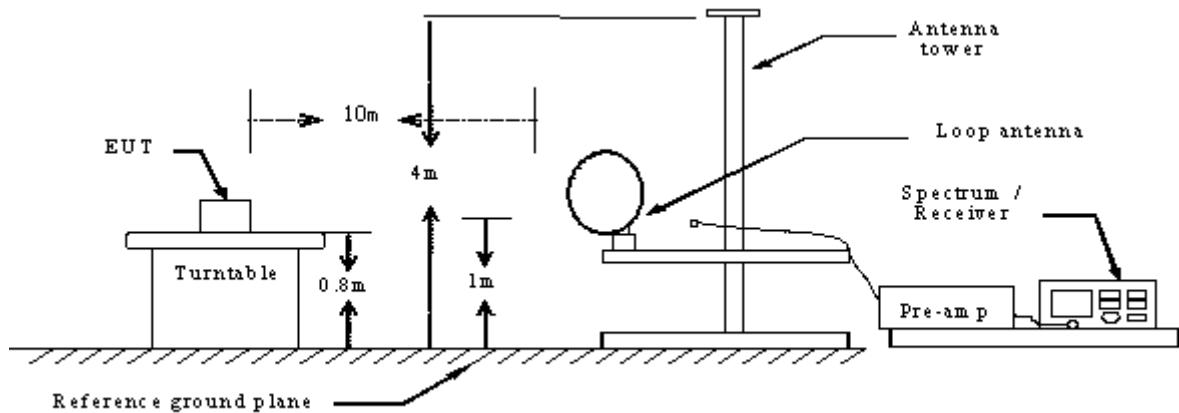

Radiated Spurious Measurement: below 1GHz

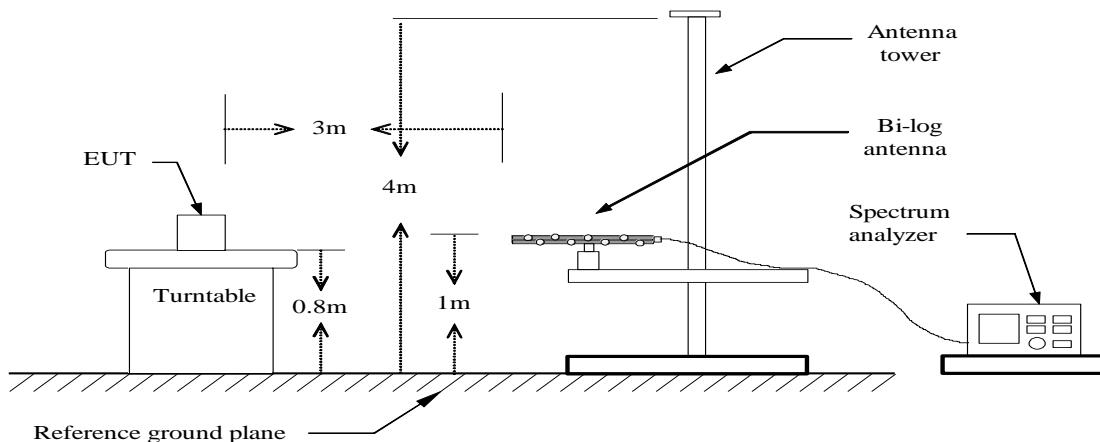

Radiated Spurious Measurement: above 1GHz

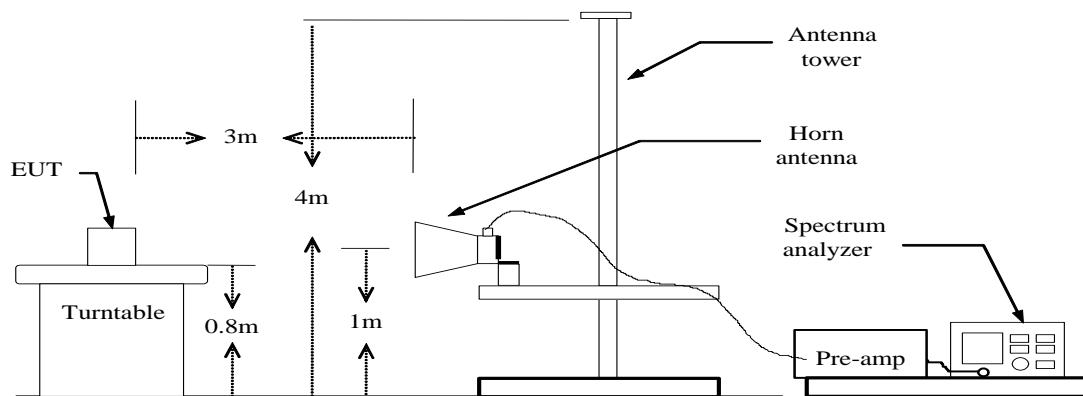

9.2 LIMITS

Frequency (MHz)	Limits (dB μ V/m)	Measured distance (m)
0.009-0.490	107.6-72.9	10
0.490-1.705	52.8-42.1	
1.705-30.0	49	
30~88	40	
88~216	43.5	
216-960	46	
Above 960	54	3

Notes: the calculate formula for below 30MHz

$$L2 = 20\lg(L1) + 40\lg(d1/d2)$$

L2: is the specified limit in dB microvolts per metre at distance d2.

L1: is the specified limit in microvolts per metre at distance d1.

For example:

$L1 = 2400/9 \text{ } (\mu\text{V/m})$, $d1 = 300 \text{ (m)}$, $d2 = 10 \text{ (m)}$, so L2 as follows:

$$20\lg(2400/9) + 40\lg(300/10) = 107.6 \text{ (dB}\mu\text{V/m)}$$

9.3 TEST PROCEDURE

Radiated Emission (9 kHz – 30 MHz) :

Spurious emissions from the EUT are measured in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 10 meters horizontally from the EUT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz.

Radiated Emission (30 MHz – 1000 MHz) :

According to description of ANSI C63.4: 2009 sec.13.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT. The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements. The measurement is carried out using a spectrum analyzer or receiver. The Quasi-peak detector is used and RBW is set to 120kHz .The antenna height and turn table rotation is adjusted until the maximum power value is founded on spectrum analyzer or receiver.

Radiated Emission (Above 1 GHz) :


According to description of ANSI C63.4: 2009 sec.13.4, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT. The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 1GHz to 25GHz (higher than the 10th harmonic of the carrier). The peak detector is used for Peak limit and RBW is set to 1MHz ,VBW \geq 3RBW. The peak detector is used for Average limit and RBW is set to 1MHz ,VBW is not smaller than 1/T, T = to the shortest pulse width. The antenna height and turn table rotation is adjusted until the maximum power value is founded on spectrum analyzer or receiver.

9.4 RESULTS & PERFORMANCE


From 9KHz to 30MHz:

802.11b, traffic mode; Channel 1

H:

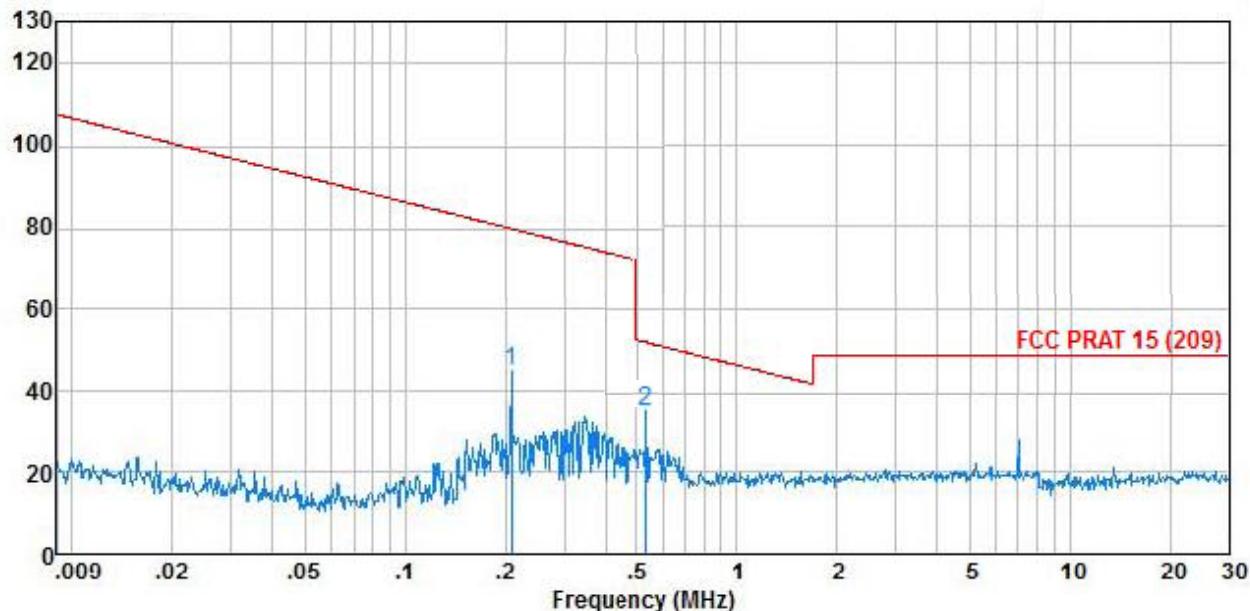

V:

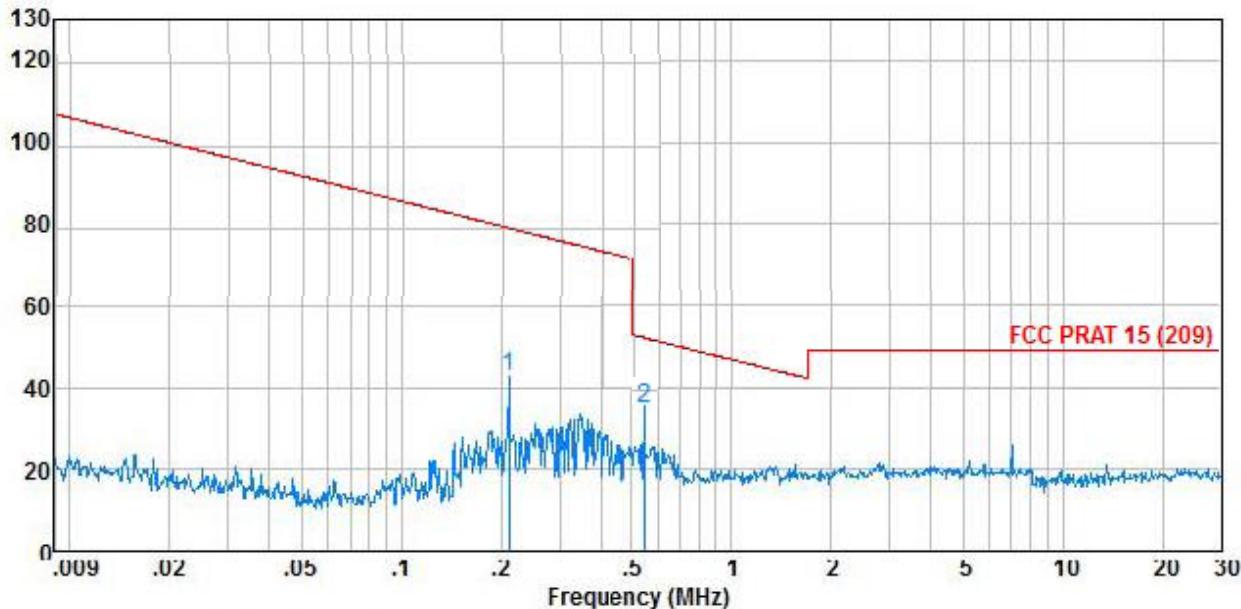


Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector
0.21	H	25.96	18.85	44.81	80.24	-35.43	Peak
0.21	V	24.7	17.92	42.62	80.24	-37.62	Peak
0.54	H	15.54	19.44	34.98	72.03	-35.05	Peak
0.55	V	17.32	18.21	35.53	71.88	-36.35	Peak

H: Horizontal V: Vertical


Measure Level(dBuV/m) = Reading (dBuV/m) + Correction Factor (dB/m)

802.11g, traffic mode; Channel 1

H:

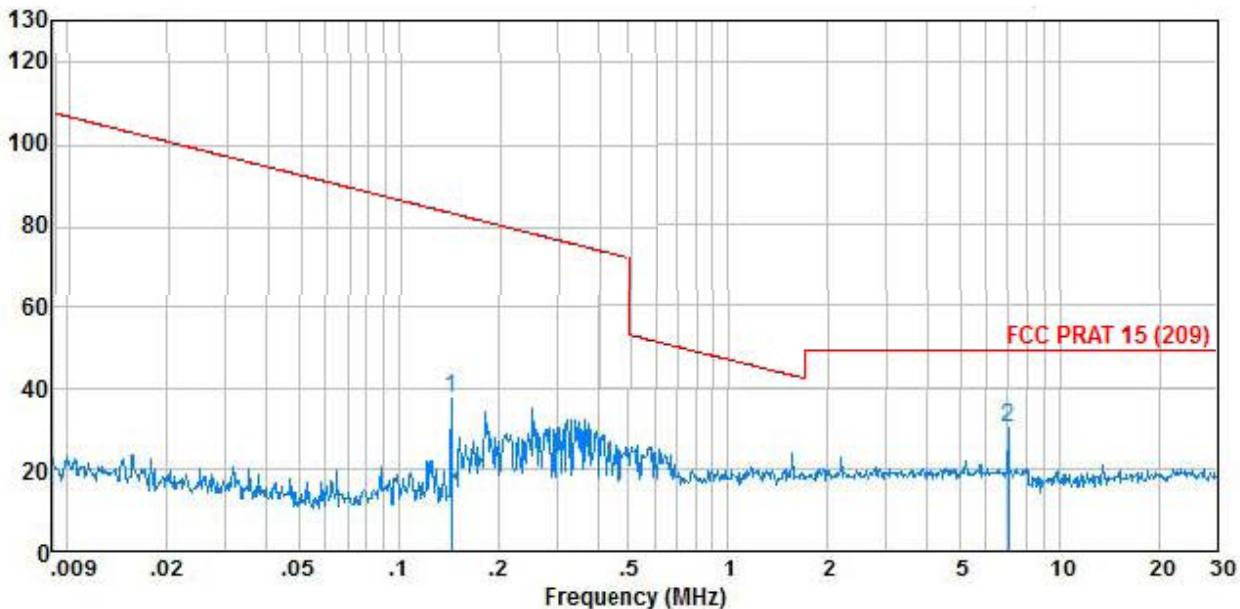

V:

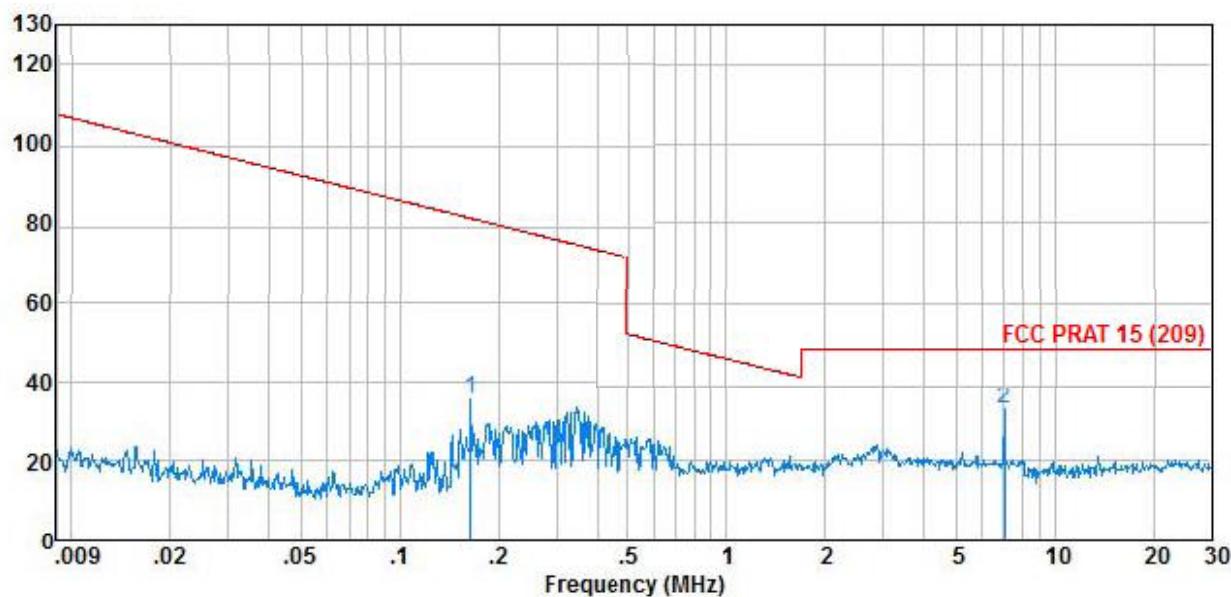


Frequency (MHz)	Polarization (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector
0.14	H	18.38	19.21	37.59	83.76	-46.17	Peak
0.16	V	16.93	18.48	35.41	82.60	-47.19	Peak
7.02	H	11.27	18.75	30.02	49	-18.98	Peak
7.02	V	15.81	17.21	33.02	49	-15.98	Peak

H: Horizontal V: Vertical

Measure Level(dBuV/m) = Reading (dBuV/m) + Correction Factor (dB/m)

From 30MHz to 1GHz:
802.11b, traffic mode; Channel 1

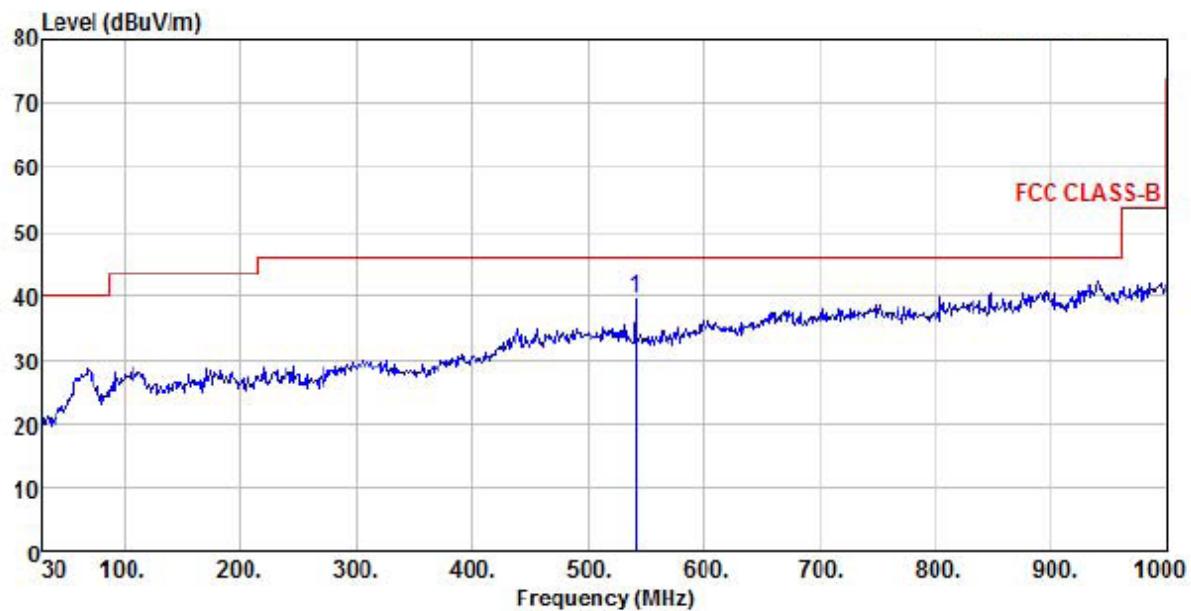

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMepper 20

Model Name : MobileMepper 20


Temp/Humi : 23 °C / 55%

Power Rating: DC 3.7V

Mode : wifi ch1 11b

Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Remark
	Freq	Level	Factor	Loss	Factor	Level			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 pp	542.16	8.09	28.32	3.13	0.00	39.54	46.00	-6.46	Peak

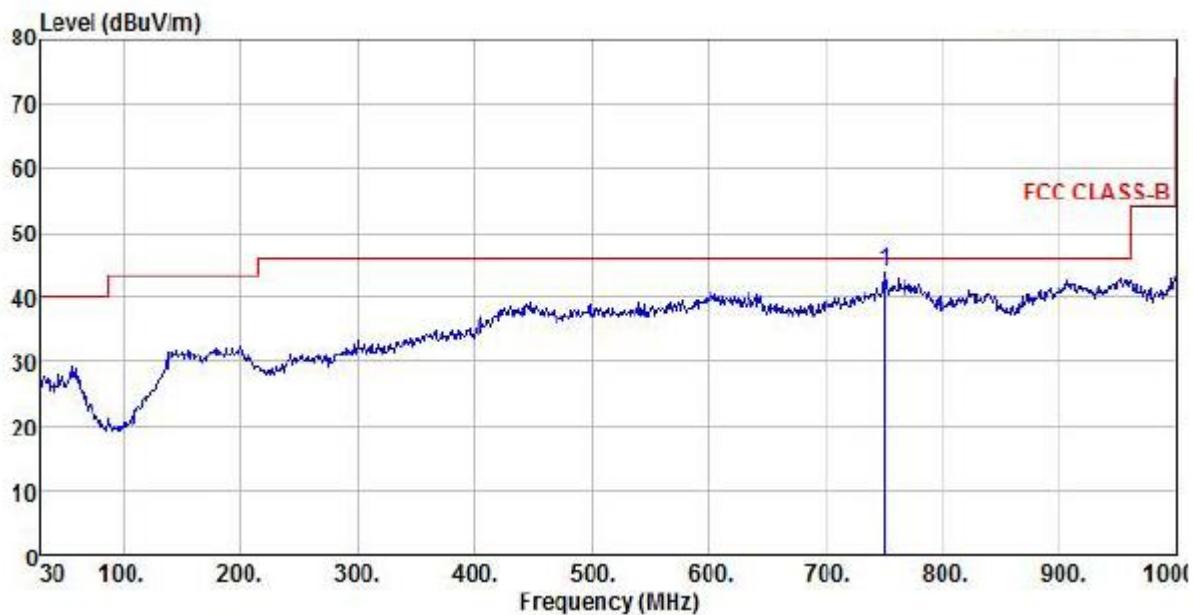

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch1 11b

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	750.71	0.09	40.19	3.80	0.00	44.08	46.00 -1.92 Peak

802.11b, traffic mode; Channel 7

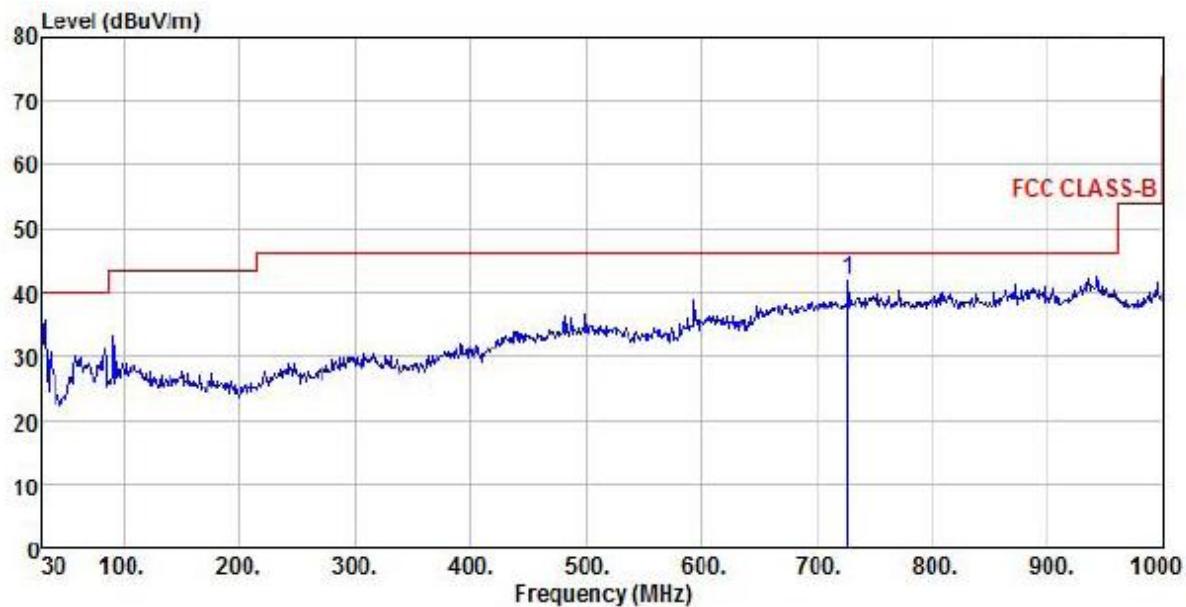

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20


Temp/Humi : 23 °C / 55%

Power Rating: DC 3.8V

Mode : wifi ch7 11b

Memo :

Freq	ReadAntenna		Cable		Preamp Loss Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB					
1 pp	726.46	5.69	32.63	3.62	0.00	41.94	46.00	-4.06	Peak

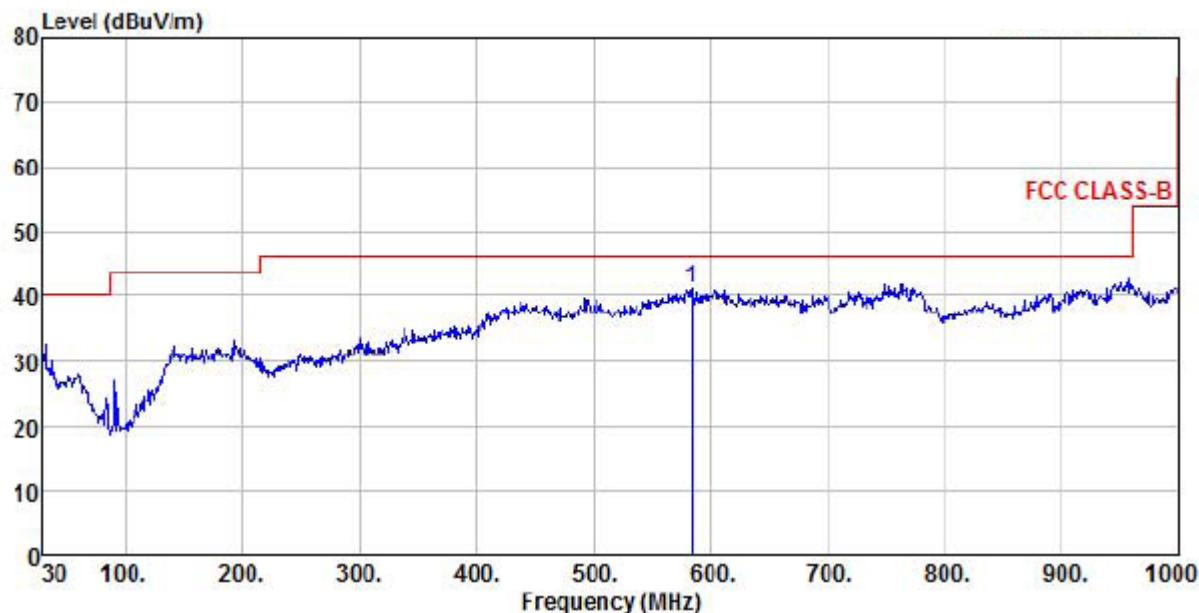

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch7 11b

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	584.84	2.59	35.29	3.29	0.00	41.17	46.00 -4.83 Peak

802.11b, traffic mode; Channel 13

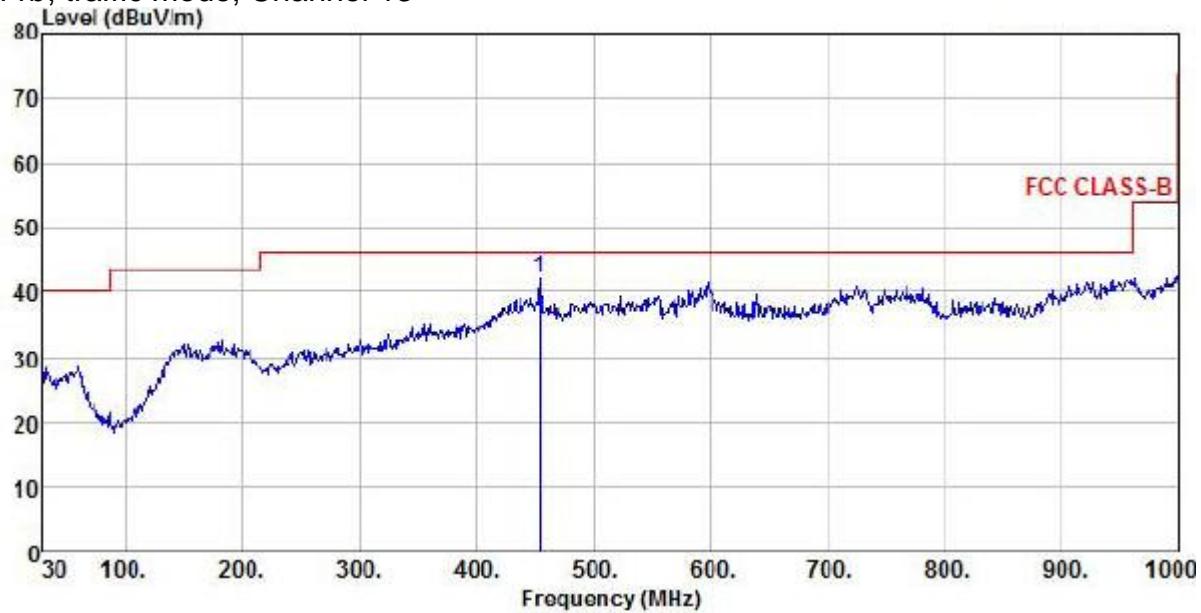

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch13 11b

Memo :

	ReadAntenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit

1 pp	454.86	5.84	33.08	2.87	0.00	41.79	46.00	-4.21	Peak
------	--------	------	-------	------	------	-------	-------	-------	------

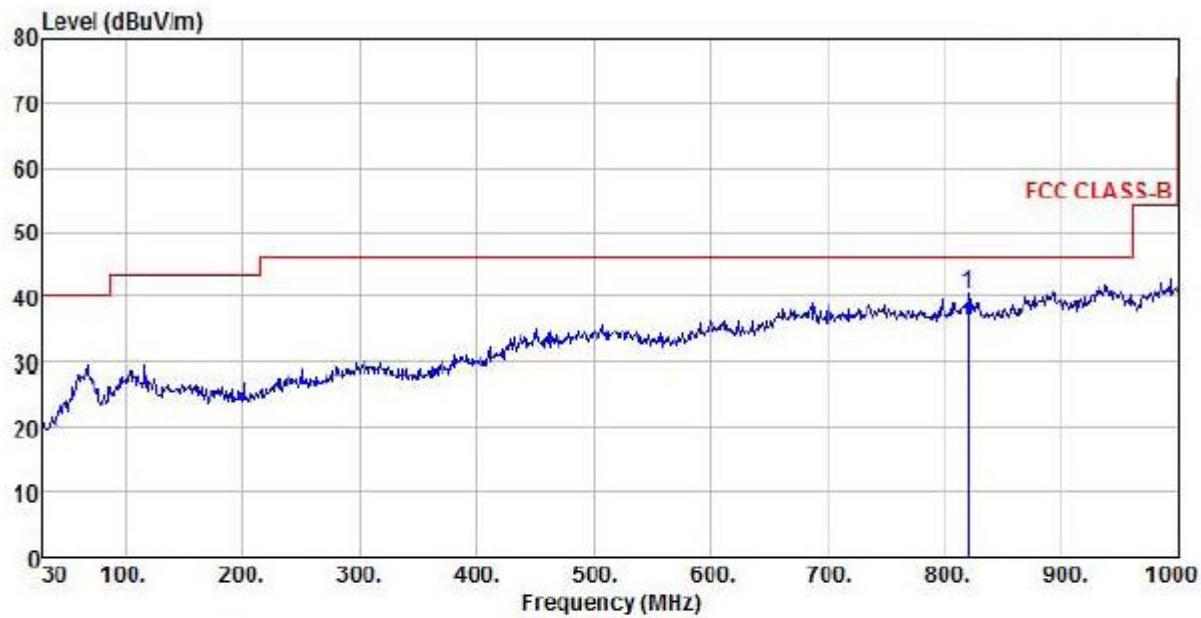

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch13 11b

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	820.55	3.43	33.35	3.74	0.00	40.52	46.00 -5.48 Peak

802.11g, traffic mode; Channel 1

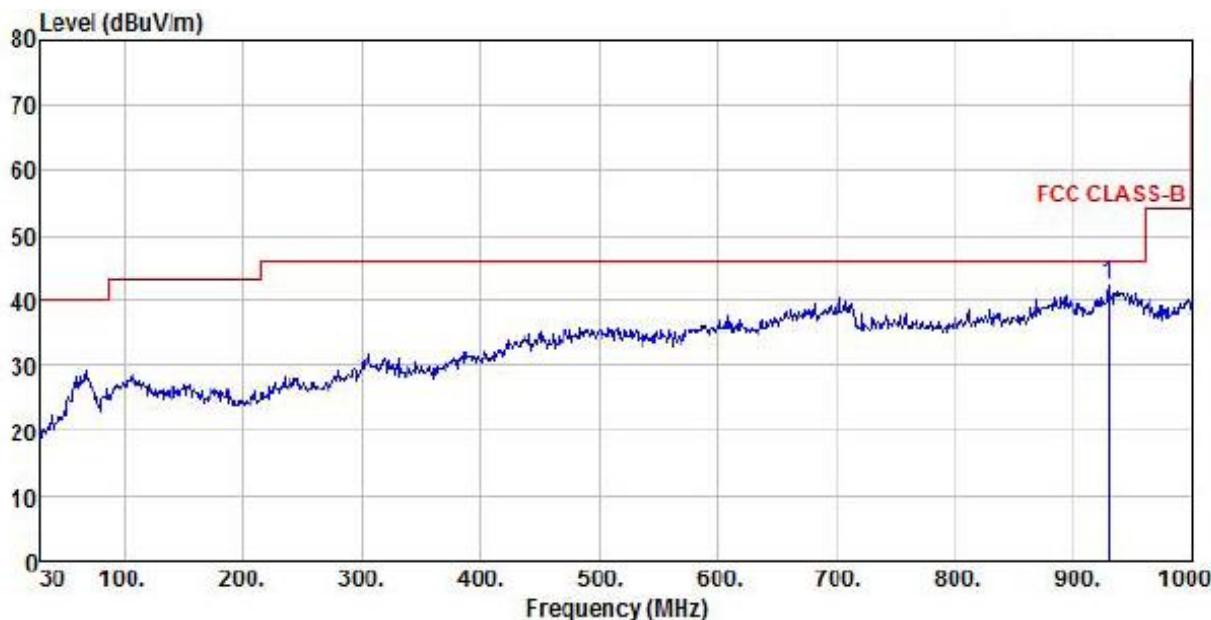

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20


Temp/Humi : 23 °C / 55%

Power Rating: DC 3.8V

Mode : wifi ch1 11g

Memo :

Freq	ReadAntenna		Cable		Preamp Loss Factor	Level	Limit Line	Over Line	Over Limit	Remark
	MHz	dB _{uV}	Level Factor	dB						
1 pp	929.19	2.64	35.83	4.10	0.00	42.57	46.00	-3.43	Peak	

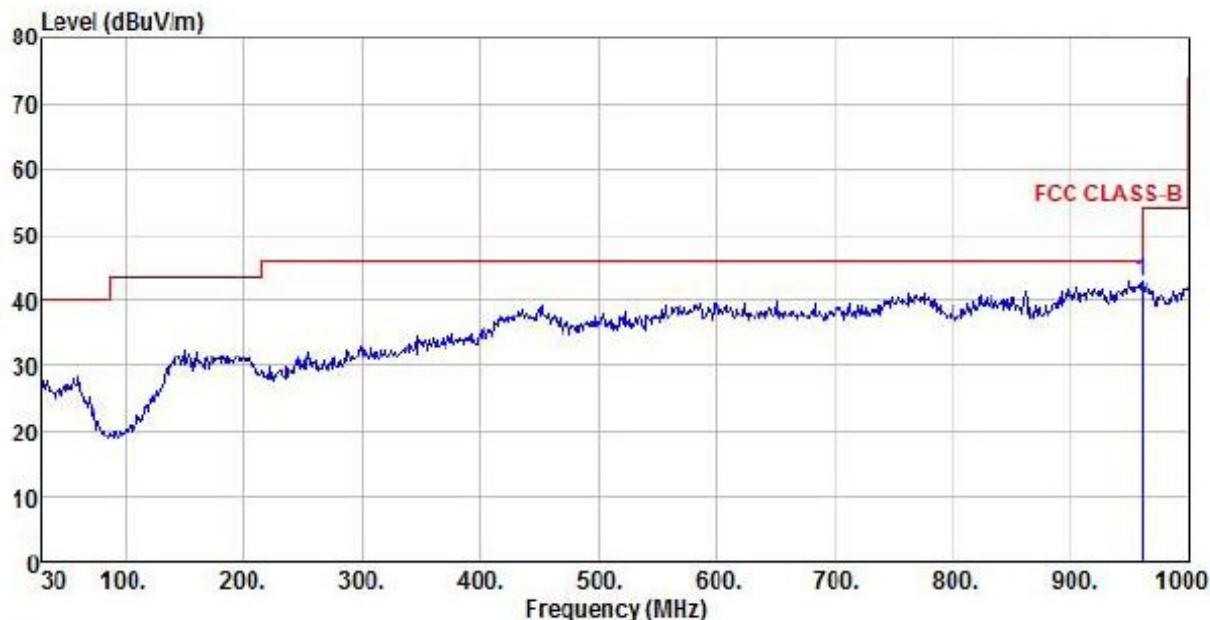

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

tU1 : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch1 11g

Memo :

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	960.23	-4.71	43.29	4.20	0.00	42.78	54.00	-11.22 Peak

802.11g, traffic mode; Channel 7

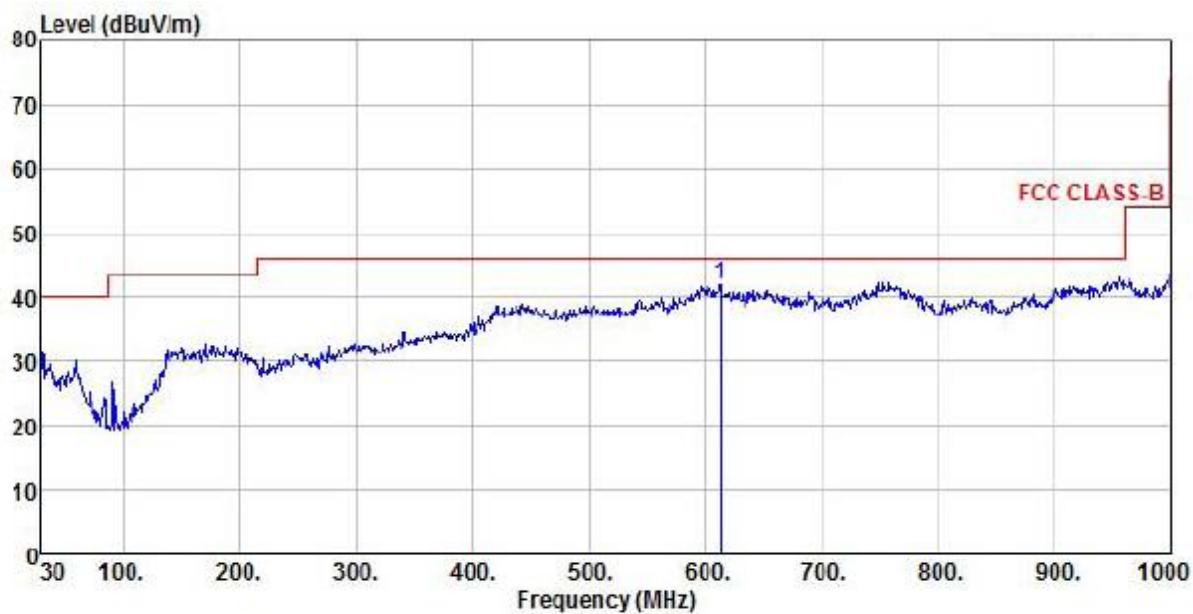

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20


Temp/Humi : 23 °C / 55%

Power Rating: DC 3.8V

Mode : wifi ch7 11g

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Limit	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	613.94	2.57	36.08	3.39	0.00	42.04	46.00	-3.96 Peak

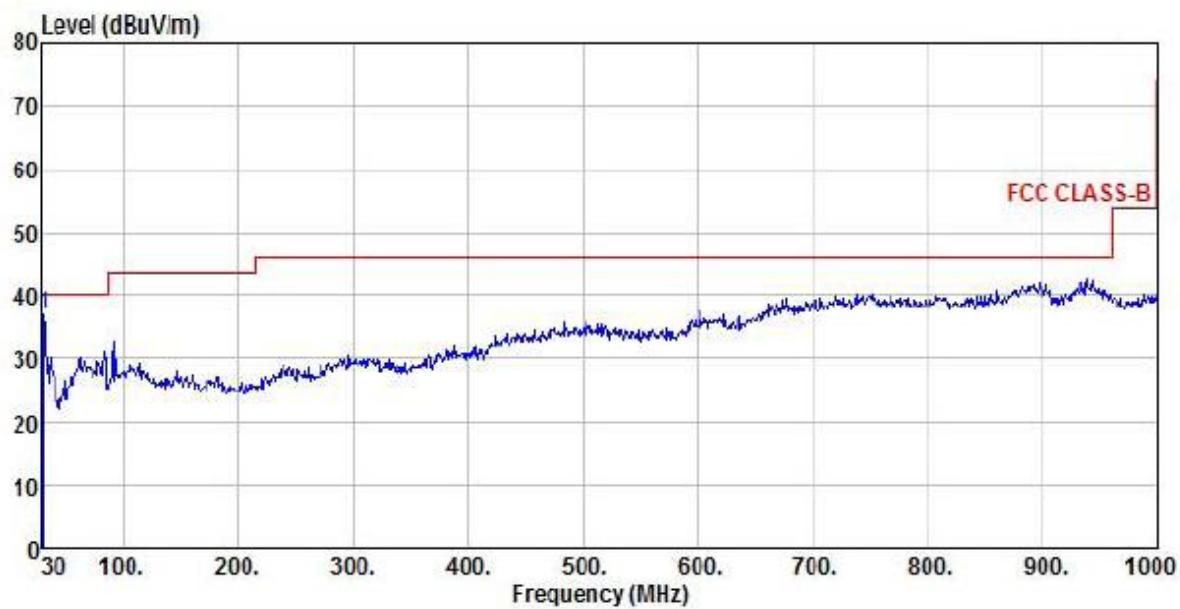

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch7 11g

Memo :

Freq	ReadAntenna		Cable		Preamp Loss Factor	Level	Limit Line	Over Limit	Remark
	Level	Factor	Loss	Factor					
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1 pp	30.97	18.29	17.82	0.68	0.00	36.79	40.00	-3.21	Peak

802.11g, traffic mode; Channel 13

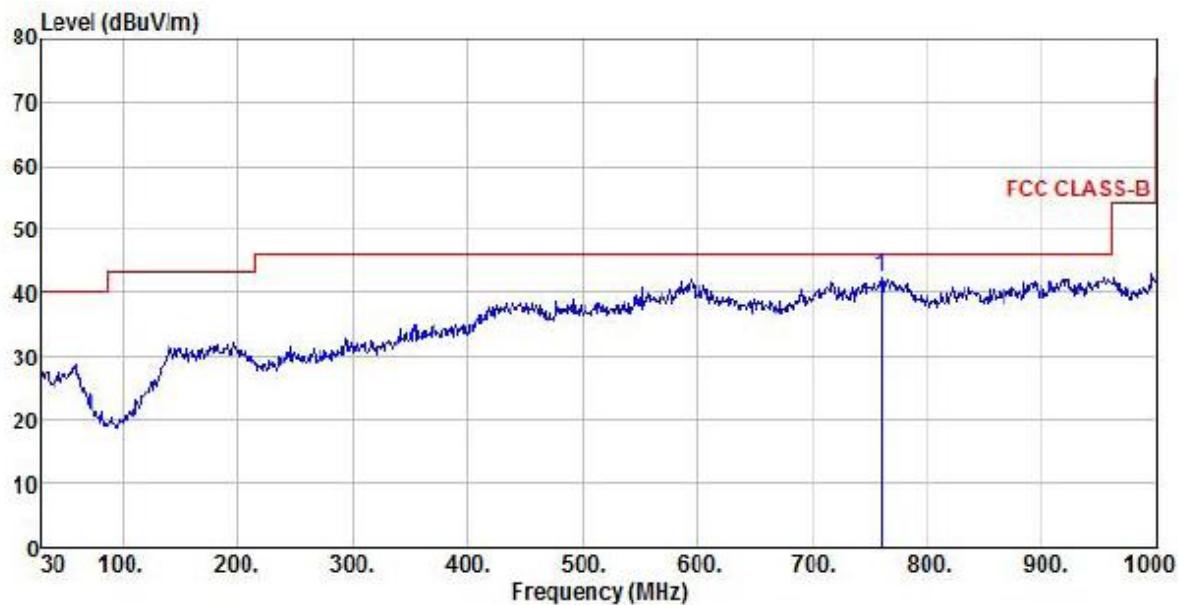

Site : chamber

Condition : FCC CLASS-B 3m VULB9160(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20


Temp/Humi : 23 °C / 55%

Power Rating: DC 3.8V

Mode : wifi ch13 11g

Memo :

Freq	ReadAntenna		Cable		Preamp	Limit	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 pp	760.41	-1.47	40.32	3.70	0.00	42.55	46.00	-3.45 Peak

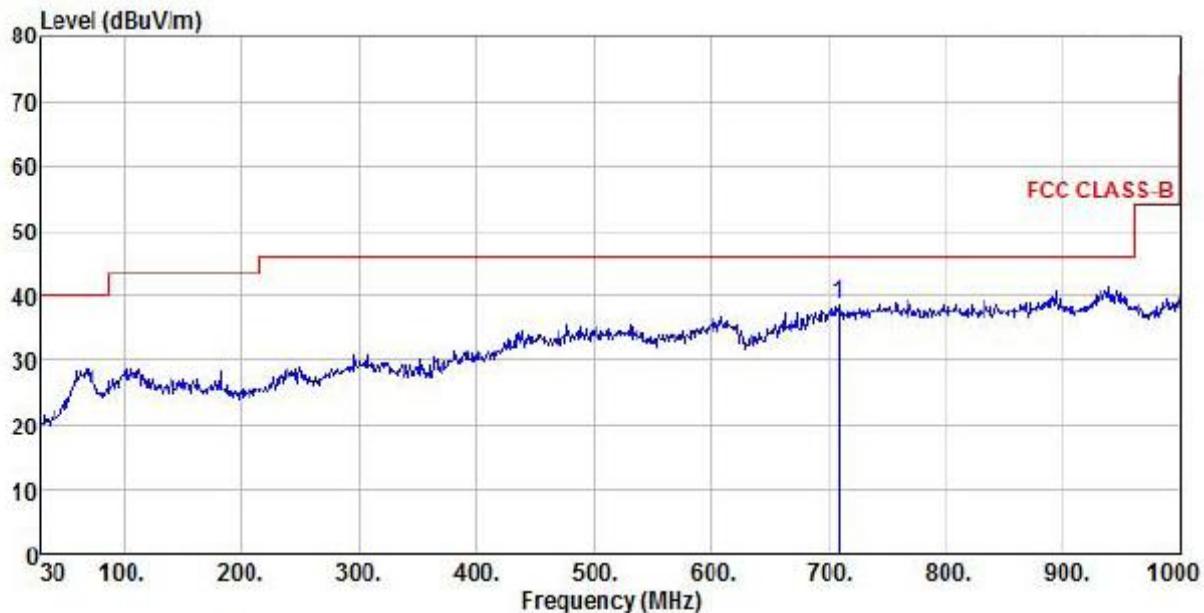

Site : chamber
Condition : FCC CLASS-B 3m VULB9160(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C / 55%


Power Rating: DC 3.8V

Mode : wifi ch13 11g

Memo :

Freq	ReadAntenna		Cable Preamp		Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB				
1 pp	709.97	2.32	32.62	3.60	0.00	38.54	46.00	-7.46 Peak

Above 1GHz:
802.11b, traffic mode; Channel 1

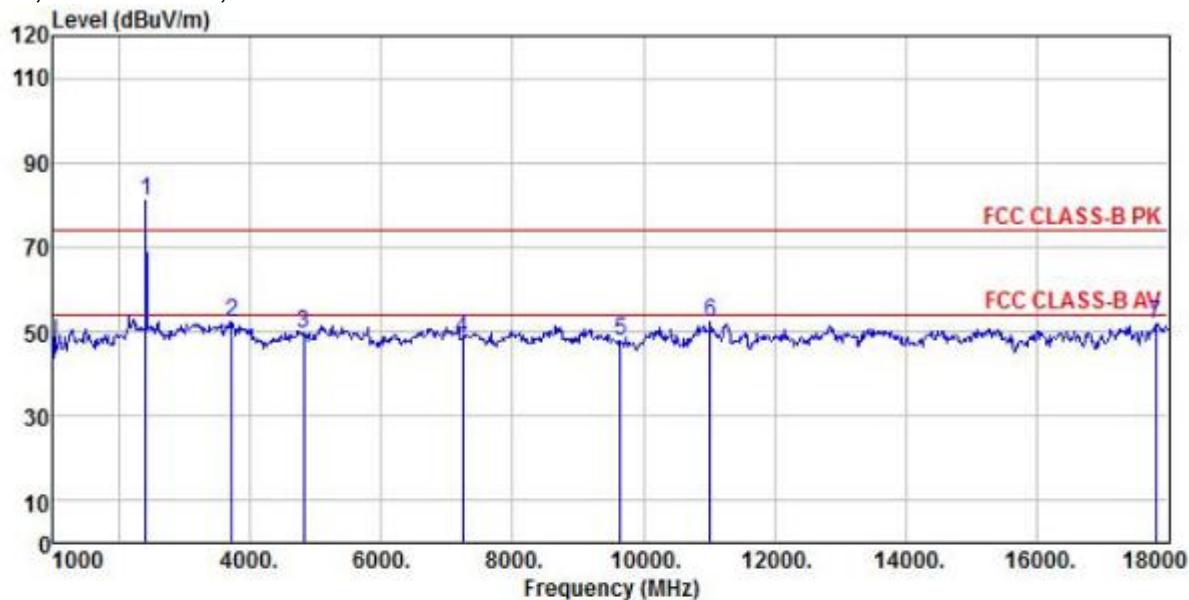

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : wifi ch1 11b

Memo :

Freq	ReadAntenna MHz	Cable		Preamp Factor	Loss dB	Limit Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Over Remark
		Level	Factor						
1 pp	2411.00	74.24	37.89	7.21	38.34	81.00	74.00	7.00	Peak
2	3720.00	40.29	40.81	8.71	37.67	52.14	74.00	-21.86	Peak
3	4824.00	34.35	42.05	10.39	37.17	49.62	74.00	-24.38	Peak
4	7236.00	26.78	45.97	12.58	37.13	48.20	74.00	-25.80	Peak
5	9648.00	22.90	50.38	14.69	40.02	47.95	74.00	-26.05	Peak
6	11013.00	23.17	52.02	15.84	38.91	52.12	74.00	-21.88	Peak
7	17813.00	11.79	57.47	19.60	37.02	51.84	74.00	-22.16	Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

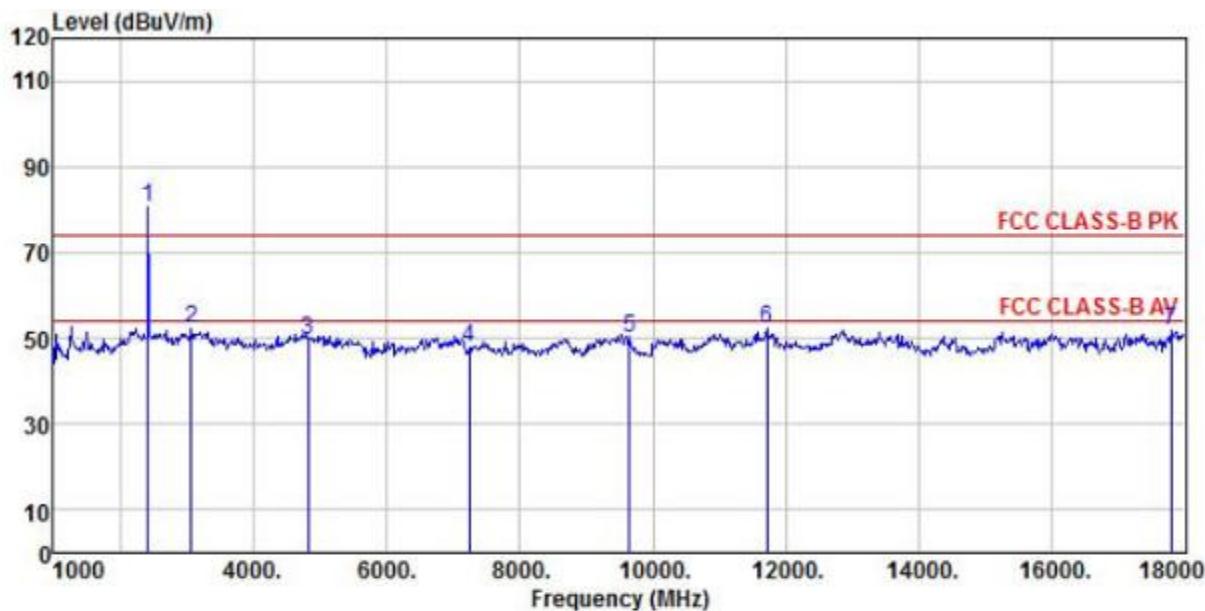


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL
 EUT : MobileMapper 20
 Model Name : MobileMapper 20
 Temp/Humi : 21°C/54%
 Power Rating: DC 3.8V
 Mode : wifi ch1 11b
 Memo :

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Remark
	MHz	Level	Factor	Loss			
1 pp	2411.00	73.98	37.89	7.21	38.34	80.74	74.00 6.74 Peak
2	3074.00	42.11	39.86	8.16	38.06	52.07	74.00 -21.93 Peak
3	4824.00	34.53	42.05	10.39	37.17	49.80	74.00 -24.20 Peak
4	7236.00	26.30	45.97	12.58	37.13	47.72	74.00 -26.28 Peak
5	9648.00	25.00	50.38	14.69	40.02	50.05	74.00 -23.95 Peak
6	11710.00	24.31	50.83	16.25	39.26	52.13	74.00 -21.87 Peak
7	17779.00	12.49	56.78	19.54	37.07	51.74	74.00 -22.26 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

802.11b, traffic mode; Channel 7

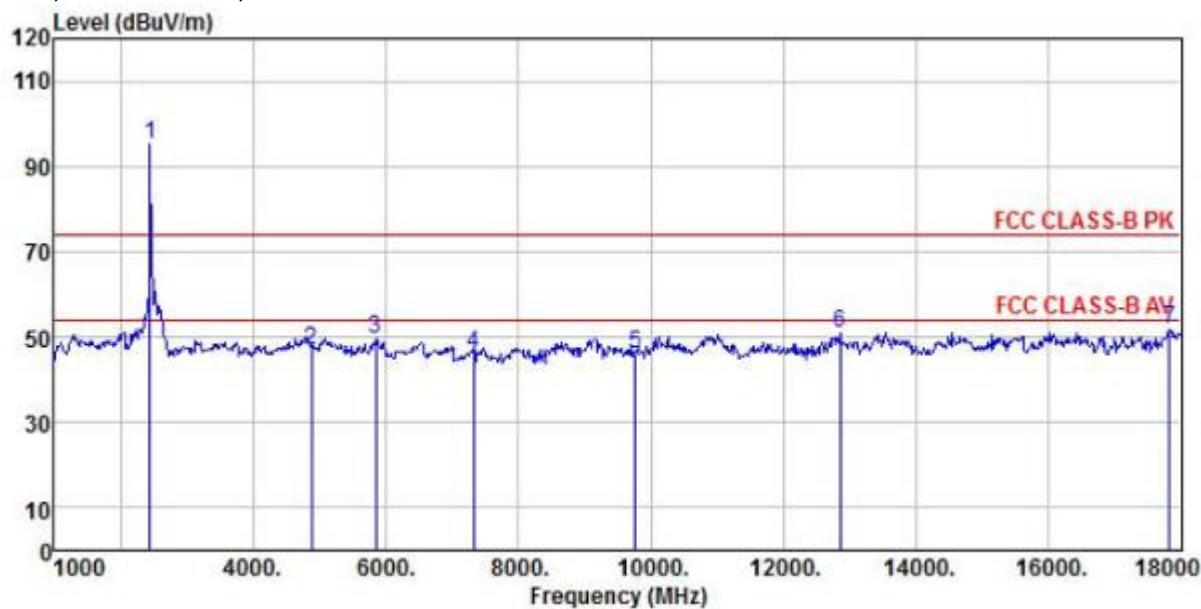

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : wifi ch7 11b

Memo :

Freq	ReadAntenna MHz	Level dBuV	Factor	Cable Preamp		Limit dBuV/m	Over Line	Over Limit	Remark
				Loss	Factor				
1 pp	2445.00	87.76	38.25	7.37	38.32	95.06	74.00	21.06	Peak
2	4884.00	32.27	41.63	10.36	37.15	47.11	74.00	-26.89	Peak
3	5845.00	31.47	43.19	11.72	36.85	49.53	74.00	-24.47	Peak
4	7326.00	24.53	46.37	12.75	37.43	46.22	74.00	-27.78	Peak
5	9768.00	21.14	50.16	14.68	39.80	46.18	74.00	-27.82	Peak
6	12849.00	19.91	52.00	17.36	38.55	50.72	74.00	-23.28	Peak
7	17830.00	11.51	57.65	19.55	36.99	51.72	74.00	-22.28	Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

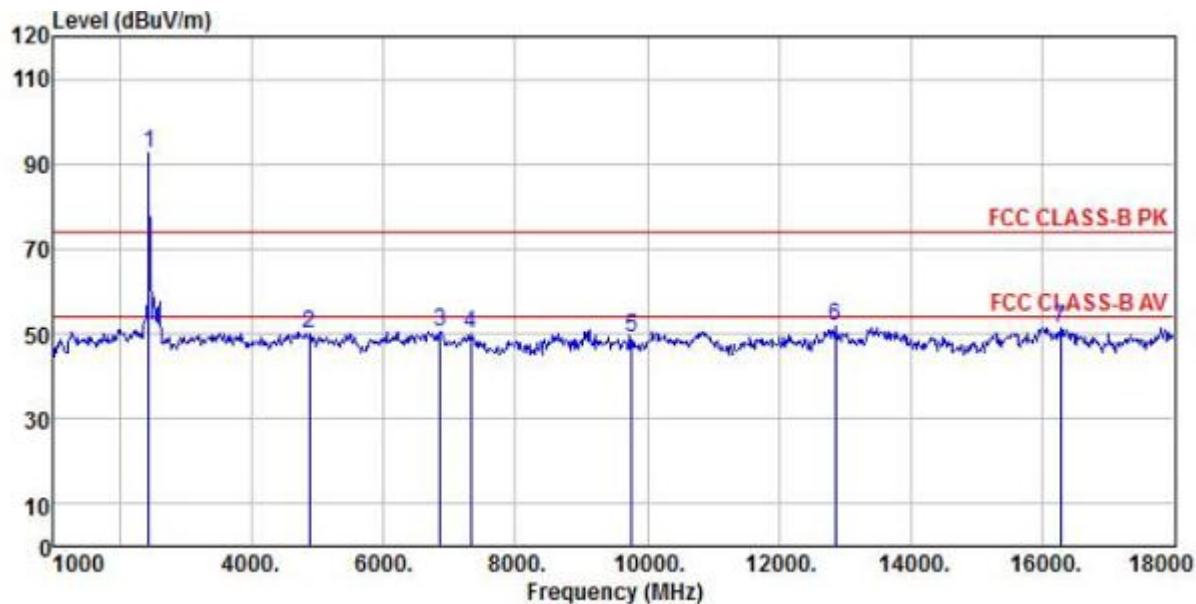


Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL
 EUT : MobileMapper 20
 Model Name : MobileMapper 20
 Temp/Humi : 21°C/54%
 Power Rating: DC 3.8V
 Mode : wifi ch7 11b
 Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2445.00	85.03	38.25	7.37	38.32	92.33	74.00	18.33 Peak
2	4884.00	35.06	41.63	10.36	37.15	49.90	74.00	-24.10 Peak
3	6865.00	29.99	44.62	12.38	36.37	50.62	74.00	-23.38 Peak
4	7326.00	28.39	46.37	12.75	37.43	50.08	74.00	-23.92 Peak
5	9768.00	23.91	50.16	14.68	39.80	48.95	74.00	-25.05 Peak
6	12849.00	20.79	52.00	17.36	38.55	51.60	74.00	-22.40 Peak
7	16266.00	17.22	54.91	17.93	38.55	51.51	74.00	-22.49 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

802.11b, traffic mode; Channel 13

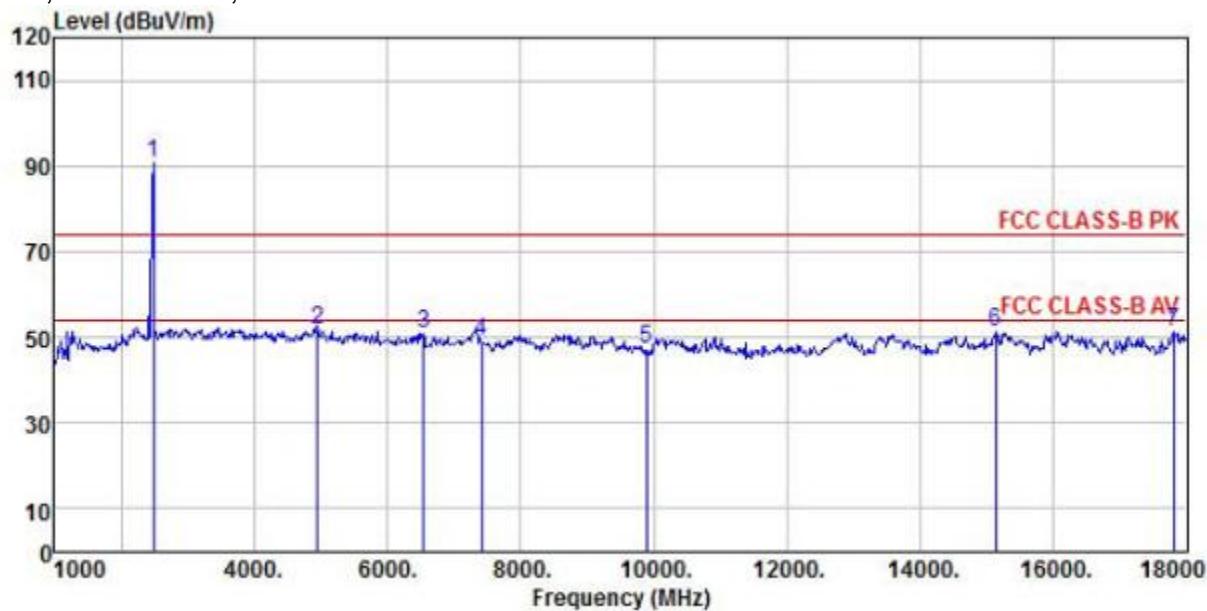

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : wifi ch13 11b

Memo :

Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Freq	Limit Level	Limit Line	Over Limit	Remark
				MHz	dBuV	dB/m	dB	dB
1 pp	2479.00	83.31	38.38	7.41	38.31	90.79	74.00	16.79 Peak
2	4944.00	36.22	41.95	10.62	37.12	51.67	74.00	-22.33 Peak
3	6542.00	30.63	44.63	12.36	36.53	51.09	74.00	-22.91 Peak
4	7416.00	27.47	46.68	12.70	37.72	49.13	74.00	-24.87 Peak
5	9888.00	23.27	48.95	14.71	39.59	47.34	74.00	-26.66 Peak
6	15127.00	18.92	52.32	18.11	37.81	51.54	74.00	-22.46 Peak
7	17813.00	11.49	57.47	19.60	37.02	51.54	74.00	-22.46 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

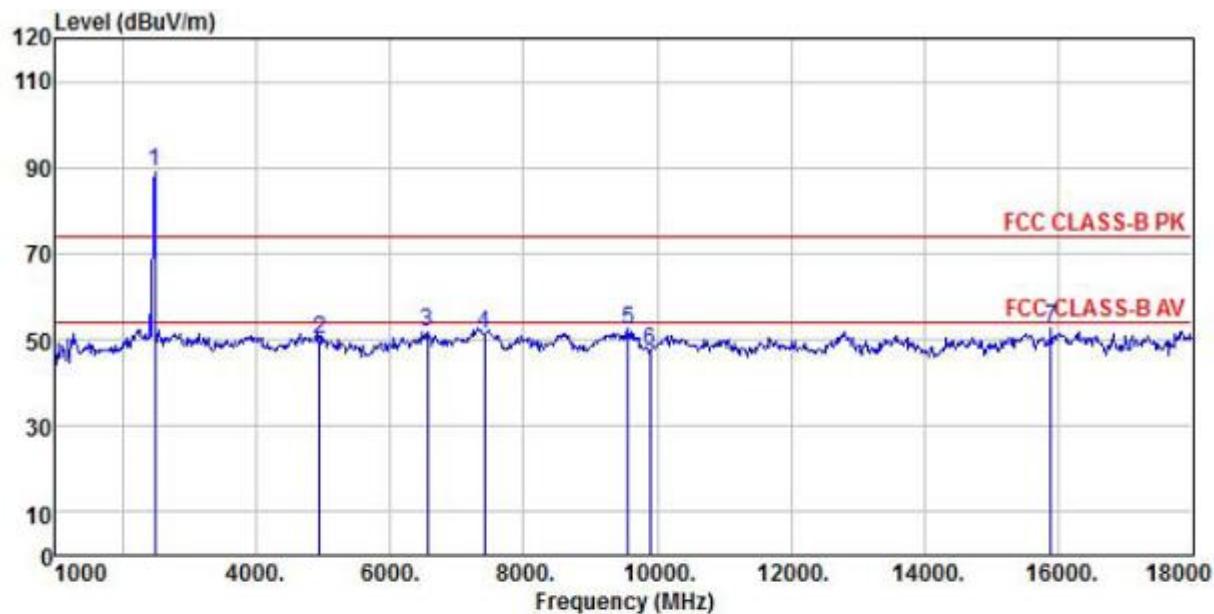

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V

Mode : wifi ch13 11b


Memo :

Freq	ReadAntenna		Cable Preamp		Limit Level	Over Line	Over Limit	Remark
	Freq	Level	Factor	Loss				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2479.00	81.68	38.38	7.41	38.31	89.16	74.00	15.16 Peak
2	4944.00	34.71	41.95	10.62	37.12	50.16	74.00	-23.84 Peak
3	6559.00	31.36	44.62	12.31	36.52	51.77	74.00	-22.23 Peak
4	7416.00	29.60	46.68	12.70	37.72	51.26	74.00	-22.74 Peak
5	9568.00	27.62	50.64	14.06	40.18	52.14	74.00	-21.86 Peak
6	9888.00	23.09	48.95	14.71	39.59	47.16	74.00	-26.84 Peak
7	15892.00	18.08	55.48	17.64	38.51	52.69	74.00	-21.31 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

802.11g, traffic mode; Channel 1

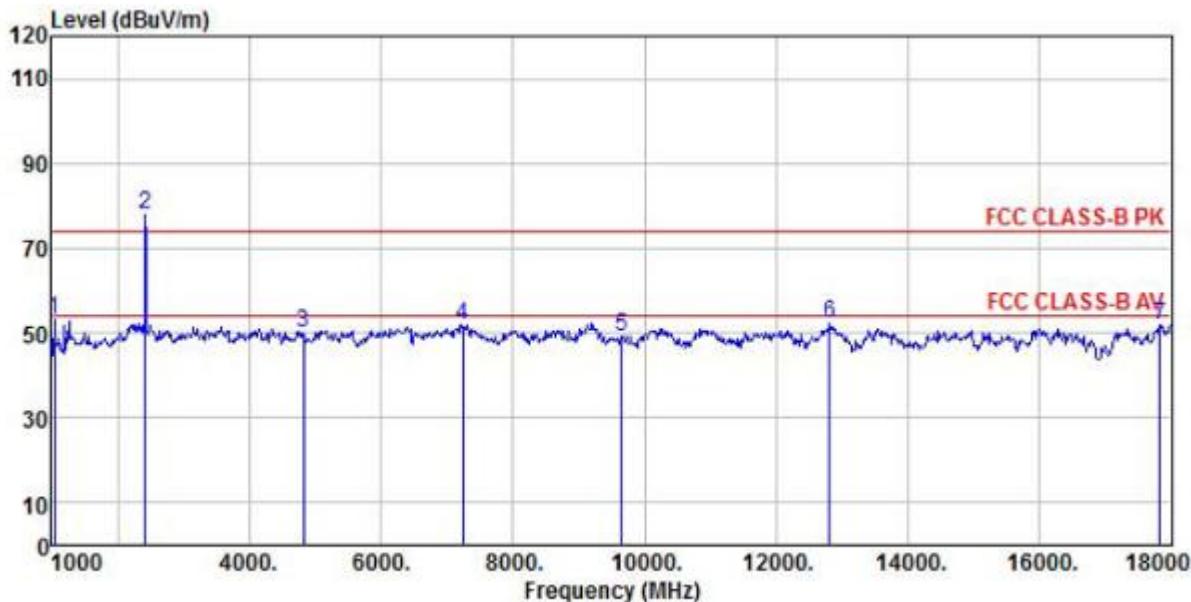

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%


Power Rating: DC 3.8V

Mode : wifi ch1 11g

Memo :

Freq	ReadAntenna MHz	Level dBuV	Cable Factor	Preamp Loss Factor	Limit dB	Over Line dBuV/m	Over Line dBuV/m	Over Line dB	Limit	
									Limit	Over Line Remark
1	1034.00	50.88	35.97	4.77	38.40	53.22	74.00	-20.78	Peak	
2 pp	2411.00	71.04	37.89	7.21	38.34	77.80	74.00	3.80	Peak	
3	4824.00	34.95	42.05	10.39	37.17	50.22	74.00	-23.78	Peak	
4	7236.00	30.27	45.97	12.58	37.13	51.69	74.00	-22.31	Peak	
5	9648.00	24.19	50.38	14.69	40.02	49.24	74.00	-24.76	Peak	
6	12815.00	21.95	51.86	17.13	38.59	52.35	74.00	-21.65	Peak	
7	17830.00	11.54	57.65	19.55	36.99	51.75	74.00	-22.25	Peak	

Notes: there is not any harmonic but for background noise above 6GHz

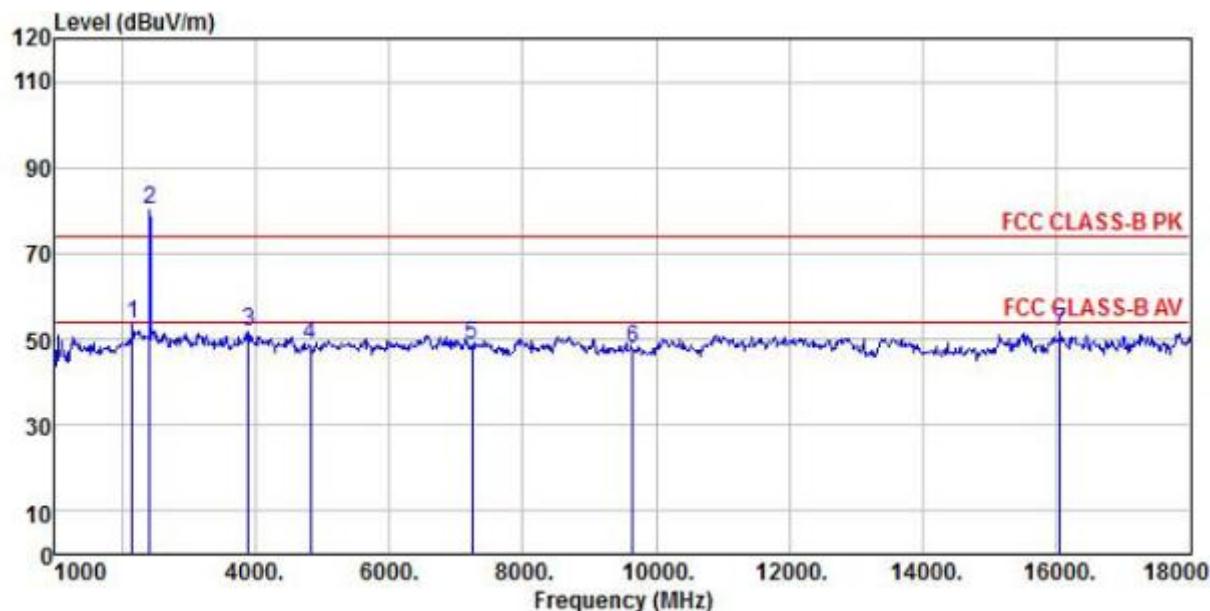

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL


EUT : MobileMapper 20
 Model Name : MobileMapper 20
 Temp/Humi : 21°C/54%
 Power Rating: DC 3.8V
 Mode : wifi ch1 11g
 Memo :

Freq	ReadAntenna		Cable		Preamp		Limit	Over	Remark
	Level	Factor	Loss	Factor	Level	Line			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2156.00	46.81	38.34	6.79	38.44	53.50	74.00	-20.50	Peak
2 pp	2411.00	73.24	37.89	7.21	38.34	80.00	74.00	6.00	Peak
3	3890.00	39.19	40.99	9.12	37.56	51.74	74.00	-22.26	Peak
4	4824.00	33.30	42.05	10.39	37.17	48.57	74.00	-25.43	Peak
5	7236.00	27.39	45.97	12.58	37.13	48.81	74.00	-25.19	Peak
6	9648.00	22.77	50.38	14.69	40.02	47.82	74.00	-26.18	Peak
7	16062.00	16.47	55.78	18.13	38.59	51.79	74.00	-22.21	Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

802.11g, traffic mode; Channel 7

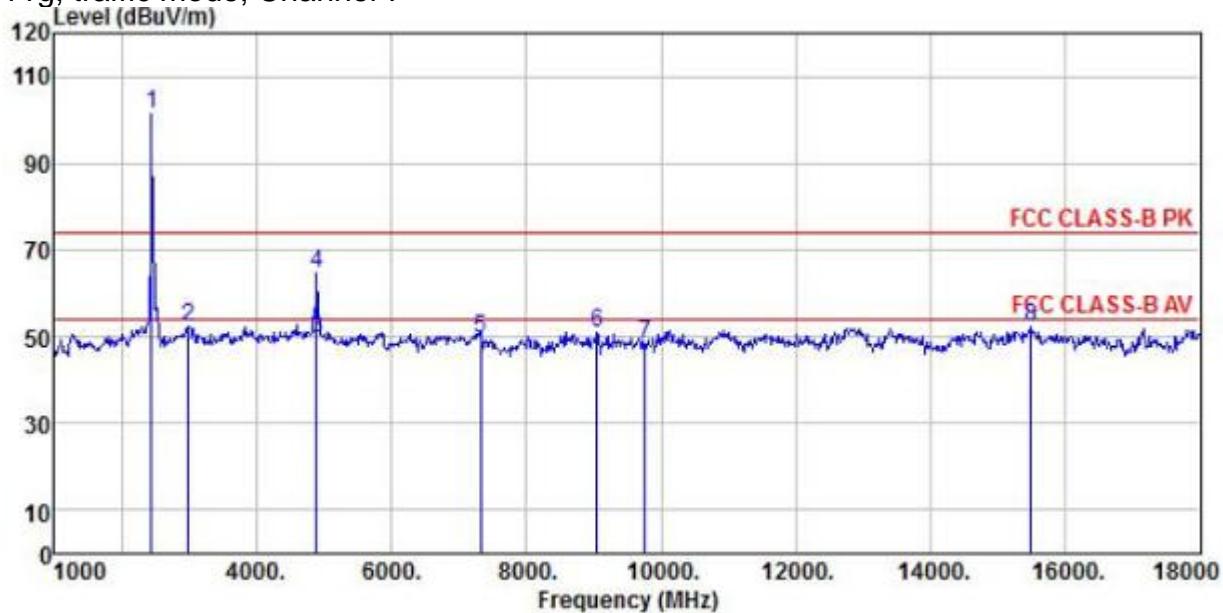


Site : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL
EUT : MobileMapper 20
Model Name : MobileMapper 20
Temp/Humi : 21°C/54%
Power Rating: DC 3.8V
Mode : wifi ch7 11g
Memo :

Freq	ReadAntenna MHz	Level Factor	Cable Preamp		Limit Level	Over Line	Over Limit	Remark
			Loss	Factor				
1 pp	2445.00	94.09	38.25	7.37	38.32	101.39	74.00	27.39 Peak
2	2989.00	42.43	40.05	8.06	38.11	52.43	74.00	-21.57 Peak
3 av	4893.00	34.96	41.55	10.35	37.14	49.72	54.00	-4.28 Average
4	4893.00	49.93	41.55	10.35	37.14	64.69	74.00	-9.31 Peak
5	7326.00	28.03	46.37	12.75	37.43	49.72	74.00	-24.28 Peak
6	9058.00	27.68	50.01	14.20	41.11	50.78	74.00	-23.22 Peak
7	9768.00	23.33	50.16	14.68	39.80	48.37	74.00	-25.63 Peak
8	15484.00	17.22	54.95	18.32	38.13	52.36	74.00	-21.64 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

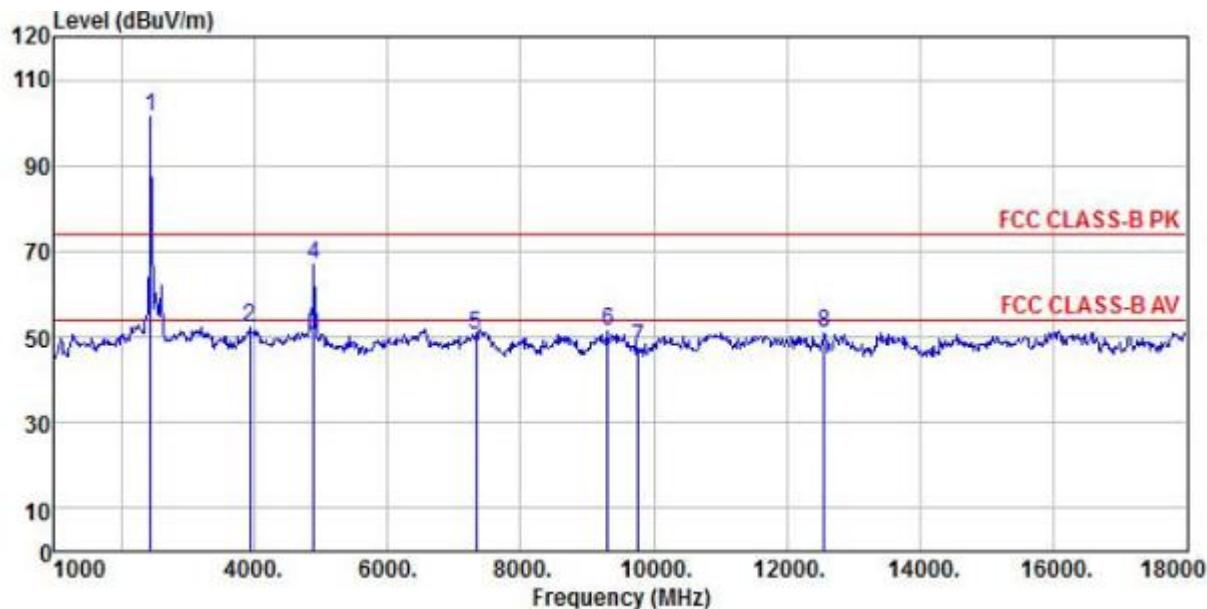

Site : chamber
 Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V

Mode : wifi ch7 11g


Memo :

Freq	ReadAntenna Level	Antenna Factor	Cable Preamp		Limit Level	Line Limit	Over Limit	Remark
			Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 pp	2445.00	94.32	38.25	7.37	38.32	101.62	74.00	27.62 Peak
2	3941.00	39.83	40.80	9.03	37.53	52.13	74.00	-21.87 Peak
3 av	4893.00	35.89	41.55	10.35	37.14	50.65	54.00	-3.35 Average
4	4893.00	52.06	41.55	10.35	37.14	66.82	74.00	-7.18 Peak
5	7326.00	29.00	46.37	12.75	37.43	50.69	74.00	-23.31 Peak
6	9313.00	26.80	51.08	14.06	40.64	51.30	74.00	-22.70 Peak
7	9768.00	22.51	50.16	14.68	39.80	47.55	74.00	-26.45 Peak
8	12560.00	22.63	49.81	17.45	38.84	51.05	74.00	-22.95 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

802.11g, traffic mode; Channel 13

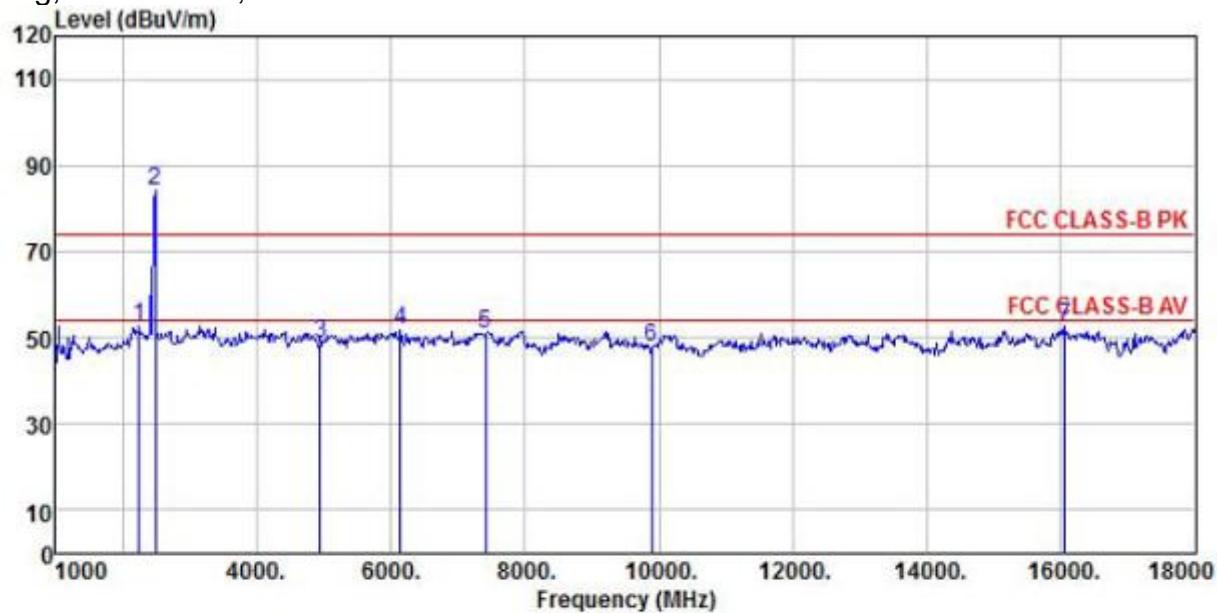

Site : chamber

Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-H) HORIZONTAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 21°C/54%

Power Rating: DC 3.8V


Mode : wifi ch13 11g

Memo :

Freq	ReadAntenna		Cable Preamp		Limit	Over	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2241.00	44.53	39.68	6.83	38.41	52.63	74.00	-21.37	Peak
2 pp	2479.00	76.59	38.38	7.41	38.31	84.07	74.00	10.07	Peak
3	4944.00	33.22	41.95	10.62	37.12	48.67	74.00	-25.33	Peak
4	6151.00	33.10	43.68	11.83	36.72	51.89	74.00	-22.11	Peak
5	7416.00	29.08	46.68	12.70	37.72	50.74	74.00	-23.26	Peak
6	9888.00	23.83	48.95	14.71	39.59	47.90	74.00	-26.10	Peak
7	16062.00	17.38	55.78	18.13	38.59	52.70	74.00	-21.30	Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

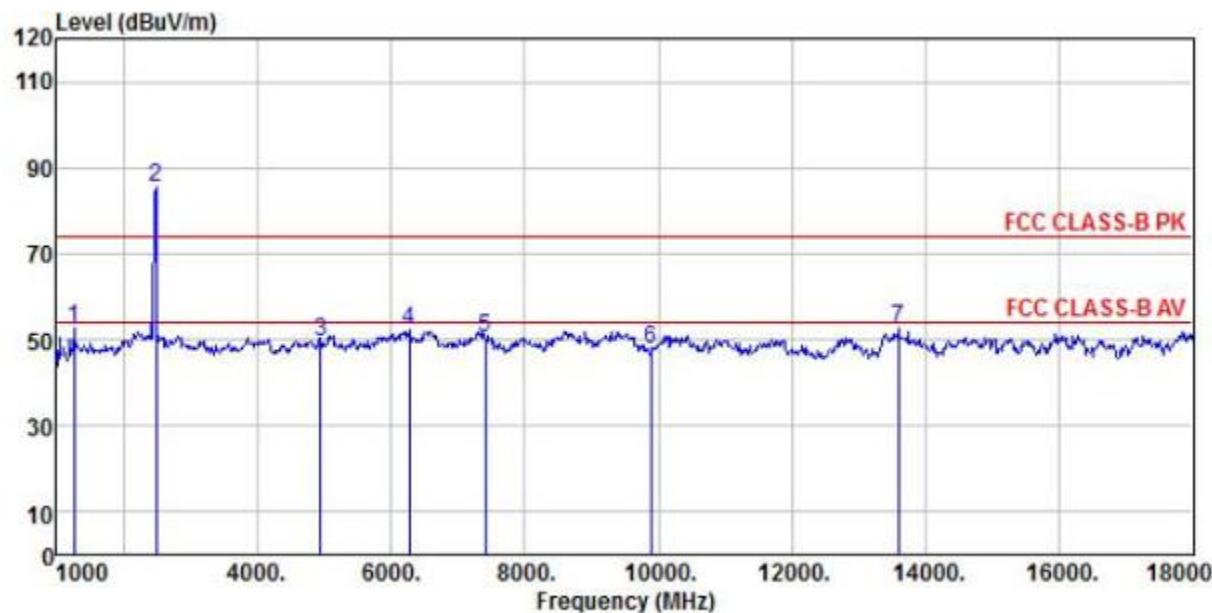

Site : chamber
Condition : FCC CLASS-B PK 3m BBHA9120D(RSE-V) VERTICAL
EUT : MobileMapper 20
Model Name : MobileMapper 20
Temp/Humi : 21°C/54%
Power Rating: DC 3.8V
Mode : wifi ch13 11g
Memo :


Freq	ReadAntenna		Cable Preamp		Limit Level	Line	Over Limit	Remark
	Freq	Level Factor	Loss Factor	Preamp				
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1255.00	46.58	39.31	5.09	38.43	52.55	74.00	-21.45 Peak
2 pp	2479.00	77.83	38.38	7.41	38.31	85.31	74.00	11.31 Peak
3	4944.00	34.18	41.95	10.62	37.12	49.63	74.00	-24.37 Peak
4	6270.00	33.47	43.54	11.93	36.66	52.28	74.00	-21.72 Peak
5	7416.00	28.96	46.68	12.70	37.72	50.62	74.00	-23.38 Peak
6	9888.00	23.61	48.95	14.71	39.59	47.68	74.00	-26.32 Peak
7	13597.00	22.40	51.26	17.50	38.58	52.58	74.00	-21.42 Peak

Notes: The point 1 is carrier.

There is not any harmonic but for background noise above 6GHz

10. AC POWER LINE CONDUCTED EMISSIONS

10.1 TEST SETUP

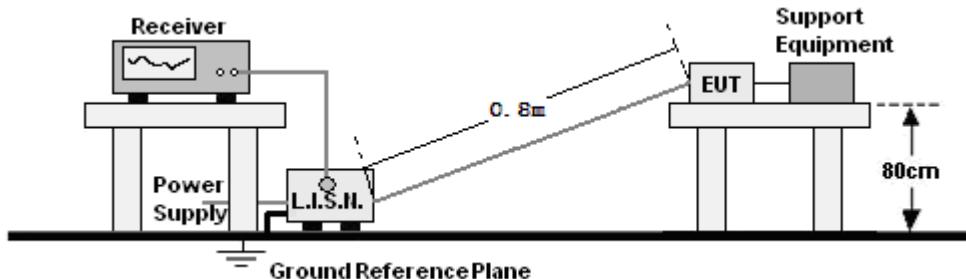

10.2 LIMITS

Frequency range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.


10.3 TEST PROCEDURE

According to description of ANSI C63.4: 2009 sec.13.3, the AC power line preliminary conducted emissions measurements were carried out. The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements. The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The EUT is connected to LISN and LISN is connected to the reference ground. All other supplemental devices are connected with EUT through other LISN. The distance between EUT and LISN is 80cm. A radio link is established between EUT and the tester. The output power of the EUT is controlled by the tester and driven to maximum value. An initial pre-scan was performed on the live L line and neutral line with peak detector (9kHz RBW). Both average detector and quasi-peak detector are performed at the frequencies with maximized peak emission.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


10.4 RESULTS & PERFORMANCE

802.11b

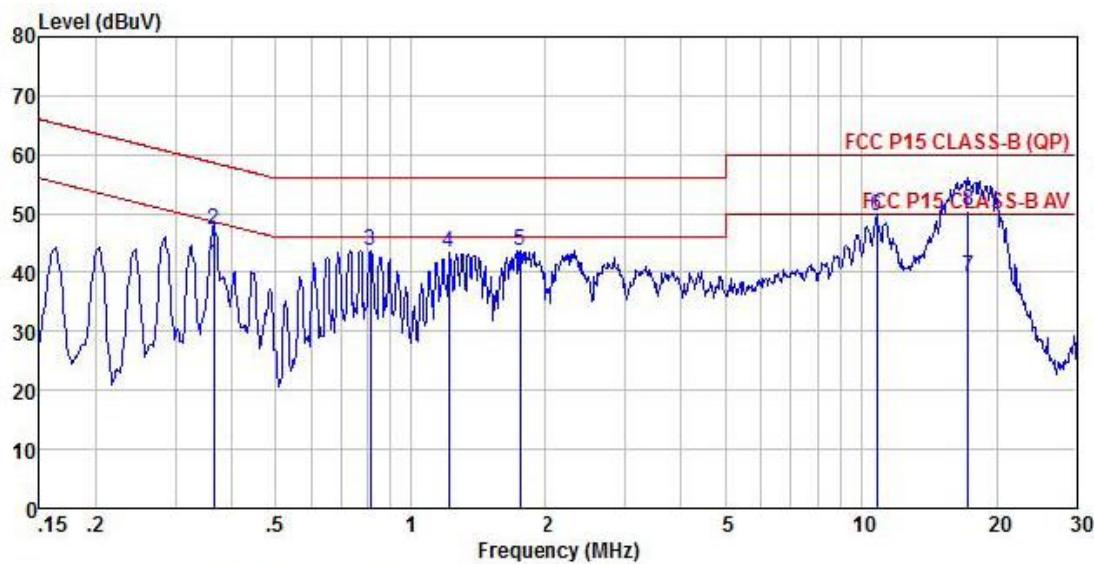

Site : shielded room 3
Condition : FCC P15 CLASS-B (QP) ENV216(L)-20120730 LINE
EUT : MobileMapper 20
Model Name : MobileMapper 20
Temp/Humi : 23 °C /52%
Power Rating: AC 120V/60Hz
Mode : WIFI 11b
Memo :

Freq	Read	LISN	Cable	Preamp	Limit	Over	Limit	Remark
	MHz	dBuV	Factor	Loss				
1 pp	0.37	30.54	10.52	0.15	0.00	41.21	48.61	-7.40 Average
2	0.37	36.59	10.52	0.15	0.00	47.26	58.61	-11.35 QP
3	0.81	33.05	10.45	0.13	0.00	43.63	56.00	-12.37 Peak
4	1.21	32.69	10.52	0.14	0.00	43.35	56.00	-12.65 Peak
5	1.74	33.01	10.52	0.15	0.00	43.68	56.00	-12.32 Peak
6 pk	10.85	38.82	10.42	0.30	0.00	49.54	60.00	-10.46 Peak
7	17.29	28.59	10.52	0.12	0.00	39.23	50.00	-10.77 Average
8 qp	17.29	39.86	10.52	0.12	0.00	50.50	60.00	-9.50 QP

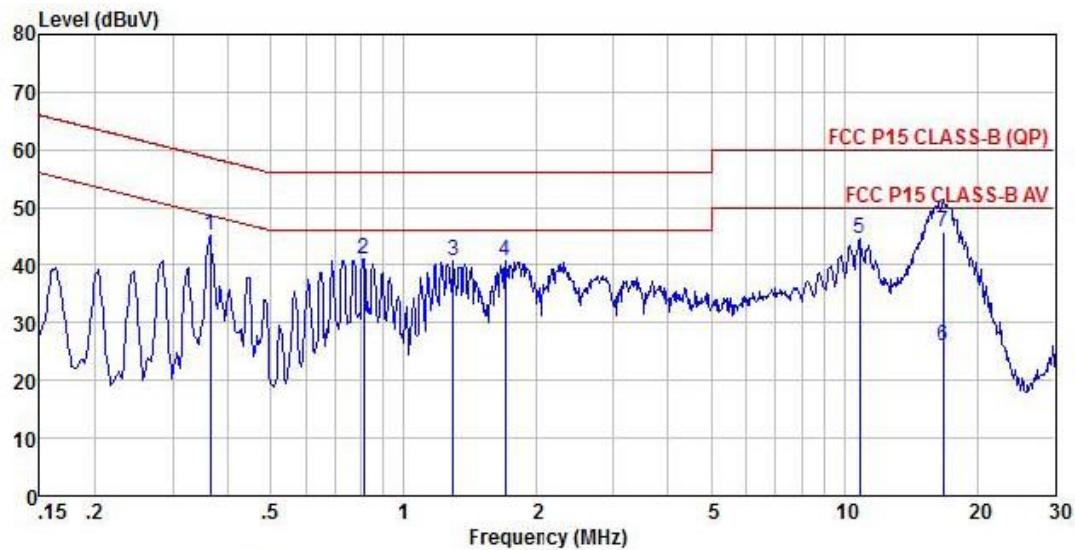

Site : shielded room 3

Condition : FCC P15 CLASS-B (QP) ENV216(N)-20120730 NEUTRAL

EUT : MobileMapper 20

Model Name : MobileMapper 20

Temp/Humi : 23 °C /52%


Power Rating: AC 120V/60Hz

Mode : WIFI 11b

Memo :


Freq	Read	LISN	Cable	Preamp	Limit	Over	Limit	Remark
	MHz	dBuV	Factor	Loss				
1 pp	0.37	34.58	10.42	0.15	0.00	45.15	58.61	-13.46 Peak
2	0.81	30.61	10.31	0.13	0.00	41.05	56.00	-14.95 Peak
3	1.30	30.35	10.31	0.14	0.00	40.80	56.00	-15.20 Peak
4	1.70	30.18	10.31	0.15	0.00	40.64	56.00	-15.36 Peak
5	10.85	33.84	10.39	0.30	0.00	44.53	60.00	-15.47 Peak
6 av	16.75	15.24	10.50	0.12	0.00	25.86	50.00	-24.14 Average
7 qp	16.75	35.11	10.50	0.12	0.00	45.73	60.00	-14.27 QP

802.11g

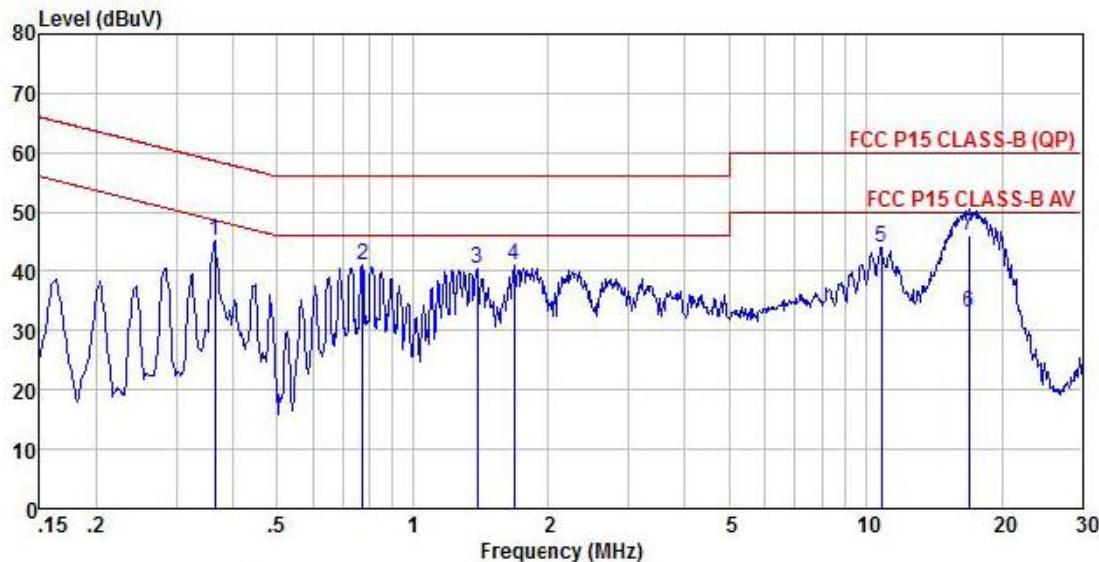

Site : shielded room 3
Condition : FCC P15 CLASS-B (QP) ENV216(N)-20120730 NEUTRAL
EUT : MobileMapper 20
Model Name : MobileMapper 20
Temp/Humi : 23 °C /52%
Power Rating: AC 120V/60Hz
Mode : WIFI 11g
Memo :

		Read Freq	LISN Level	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
		MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1 pp		0.37	34.56	10.42	0.15	0.00	45.13	58.61	-13.48 Peak
2		0.77	30.47	10.31	0.12	0.00	40.90	56.00	-15.10 Peak
3		1.38	29.89	10.31	0.14	0.00	40.34	56.00	-15.66 Peak
4		1.66	30.43	10.31	0.15	0.00	40.89	56.00	-15.11 Peak
5		10.85	33.41	10.39	0.30	0.00	44.10	60.00	-15.90 Peak
6 av		16.92	22.59	10.49	0.12	0.00	33.20	50.00	-16.80 Average
7 qp		16.92	35.49	10.49	0.12	0.00	46.10	60.00	-13.90 QP

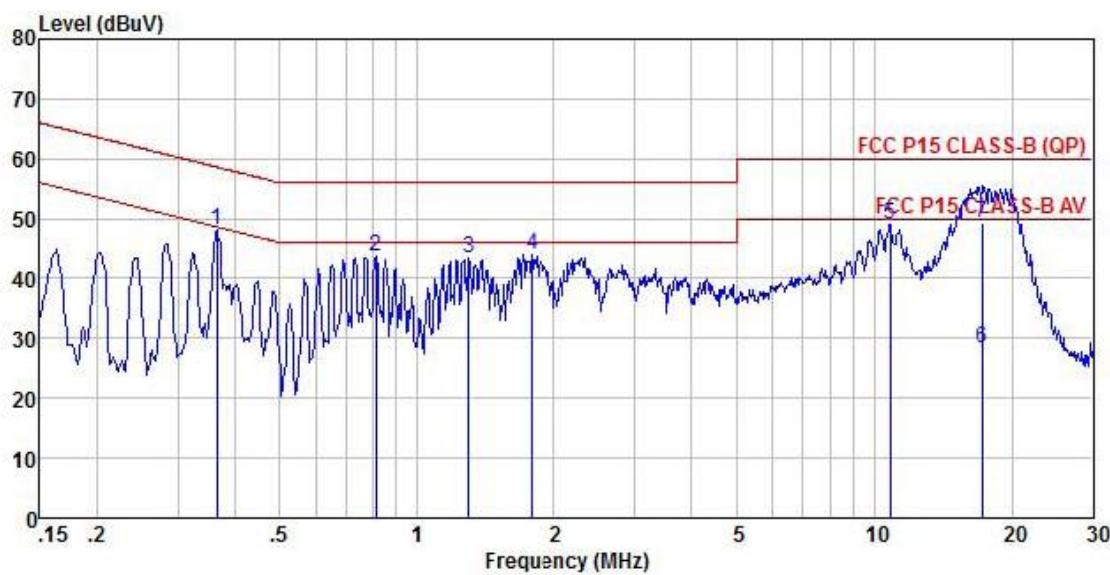

Site : shielded room 3
 Condition : FCC P15 CLASS-B (QP) ENV216(L)-20120730 LINE
 EUT : MobileMapper 20
 Model Name : MobileMapper 20
 Temp/Humi : 23 °C /52%
 Power Rating: AC 120V/60Hz
 Mode : WIFI 11g
 Memo :

	Freq	Read	LISN	Cable	Preamp	Limit Level	Line	Over Limit	Remark
		MHz	dBuV	dB	dB				
1 pp	0.37	37.43	10.52	0.15	0.00	48.10	58.61	-10.51	Peak
2	0.81	33.02	10.45	0.13	0.00	43.60	56.00	-12.40	Peak
3	1.30	32.68	10.52	0.14	0.00	43.34	56.00	-12.66	Peak
4	1.78	33.25	10.52	0.15	0.00	43.92	56.00	-12.08	Peak
5	10.85	38.36	10.42	0.30	0.00	49.08	60.00	-10.92	Peak
6 av	17.20	17.56	10.52	0.12	0.00	28.20	50.00	-21.80	Average
7 qp	17.20	38.78	10.52	0.12	0.00	49.42	60.00	-10.58	QP

PHOTOGRAPHS OF TEST SETUP

Please refer to the file named “NZI802168_Part 15C Setup Photos”.

APPENDIX 1 PHOTOGRAHPS OF EUT

Please refer to the two files named “NZI802168_EUT External Photos” and “NZI802168_EUT Internal Photos”.

---End of the report----