






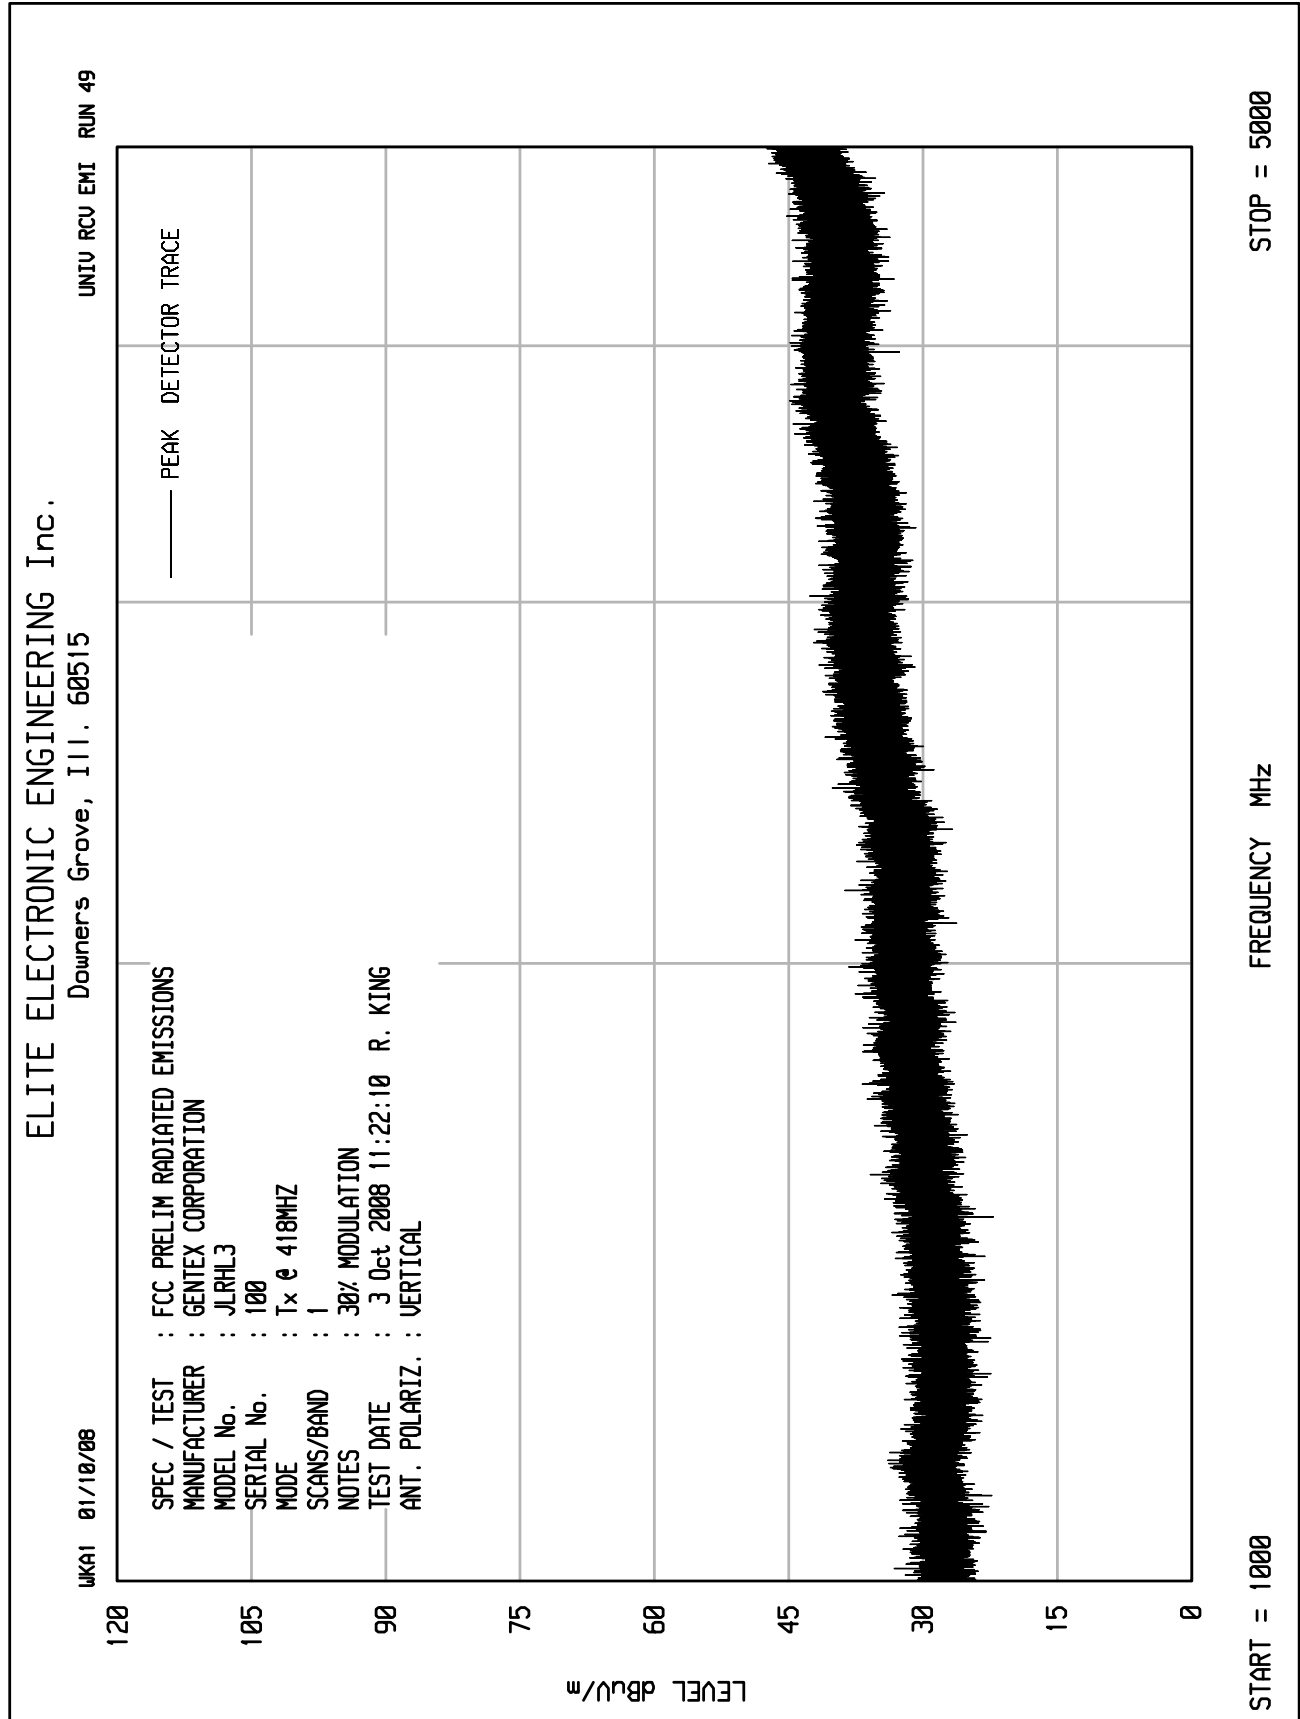

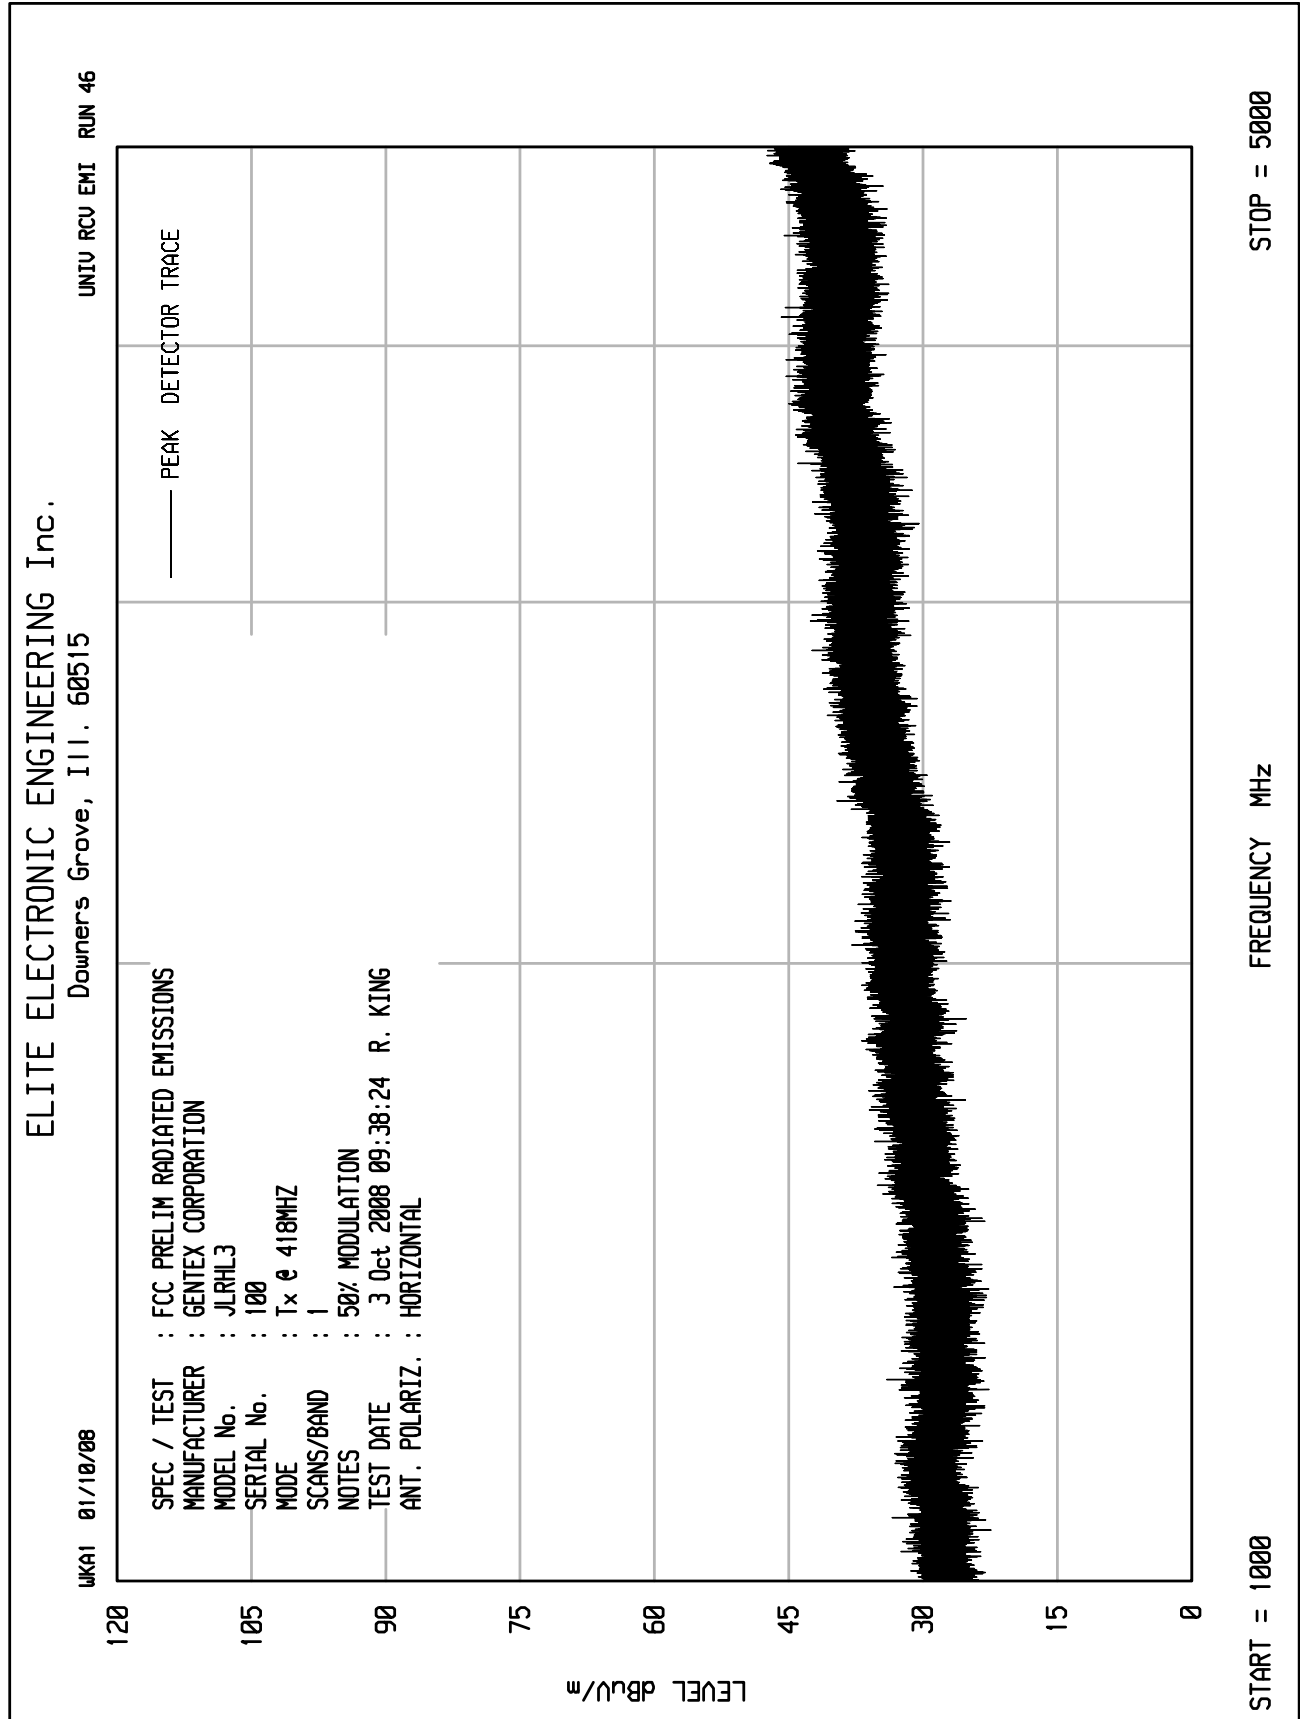

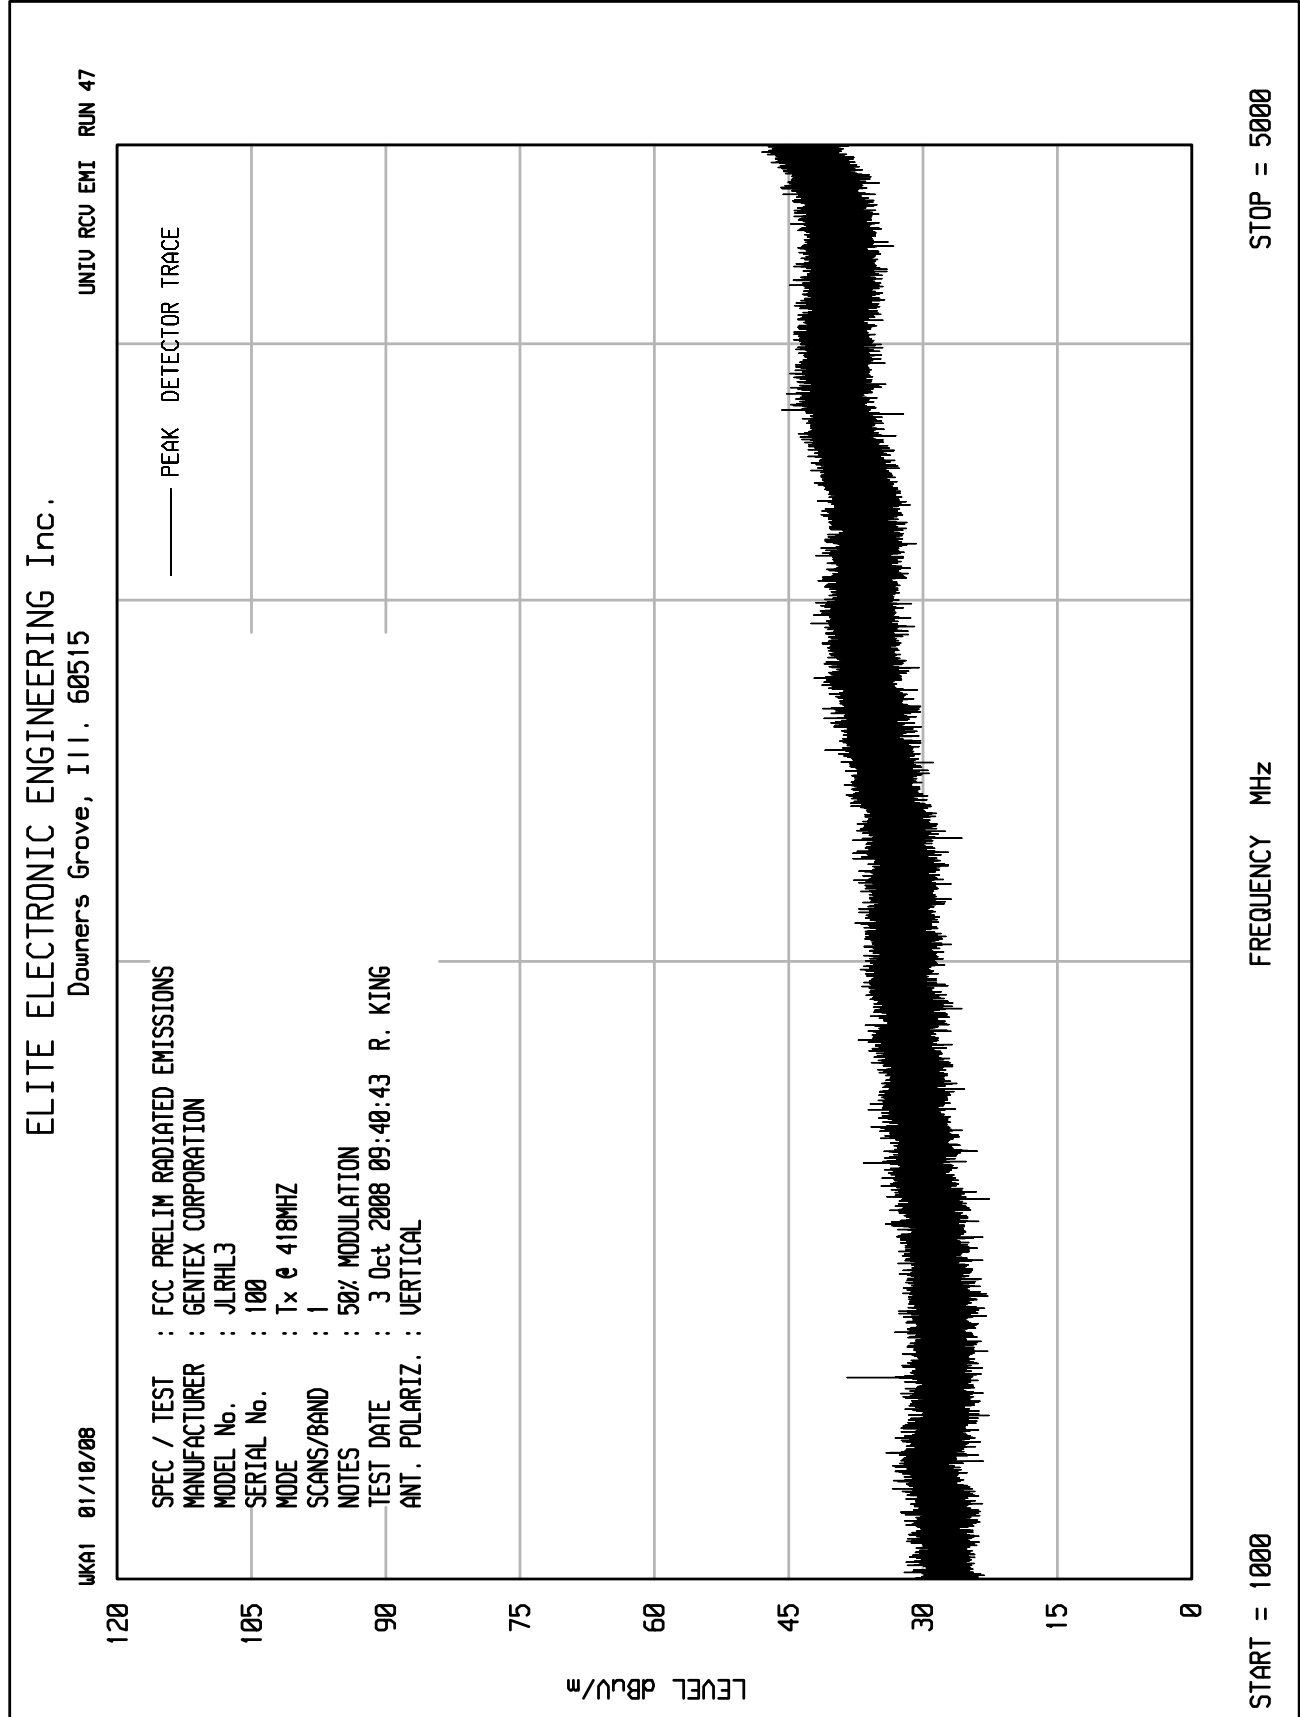

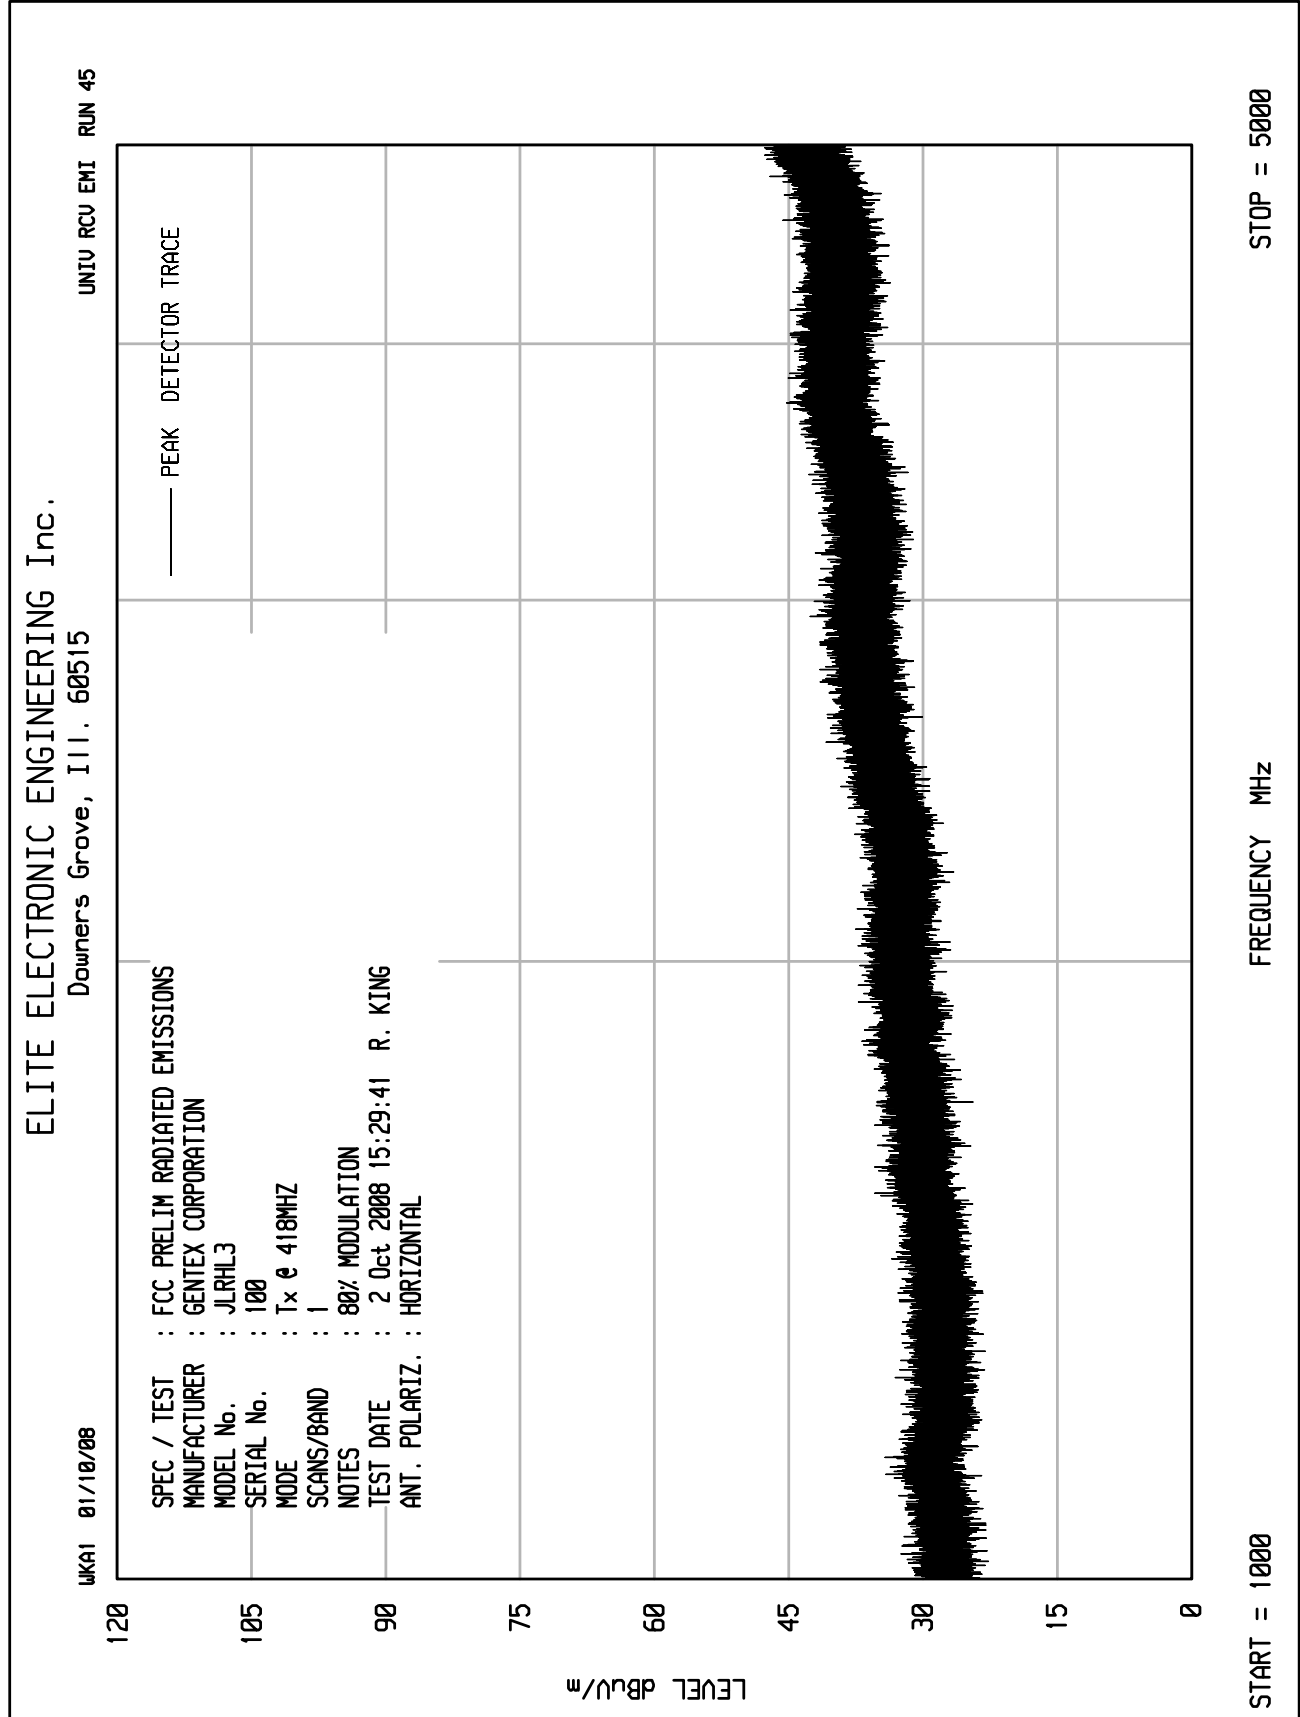

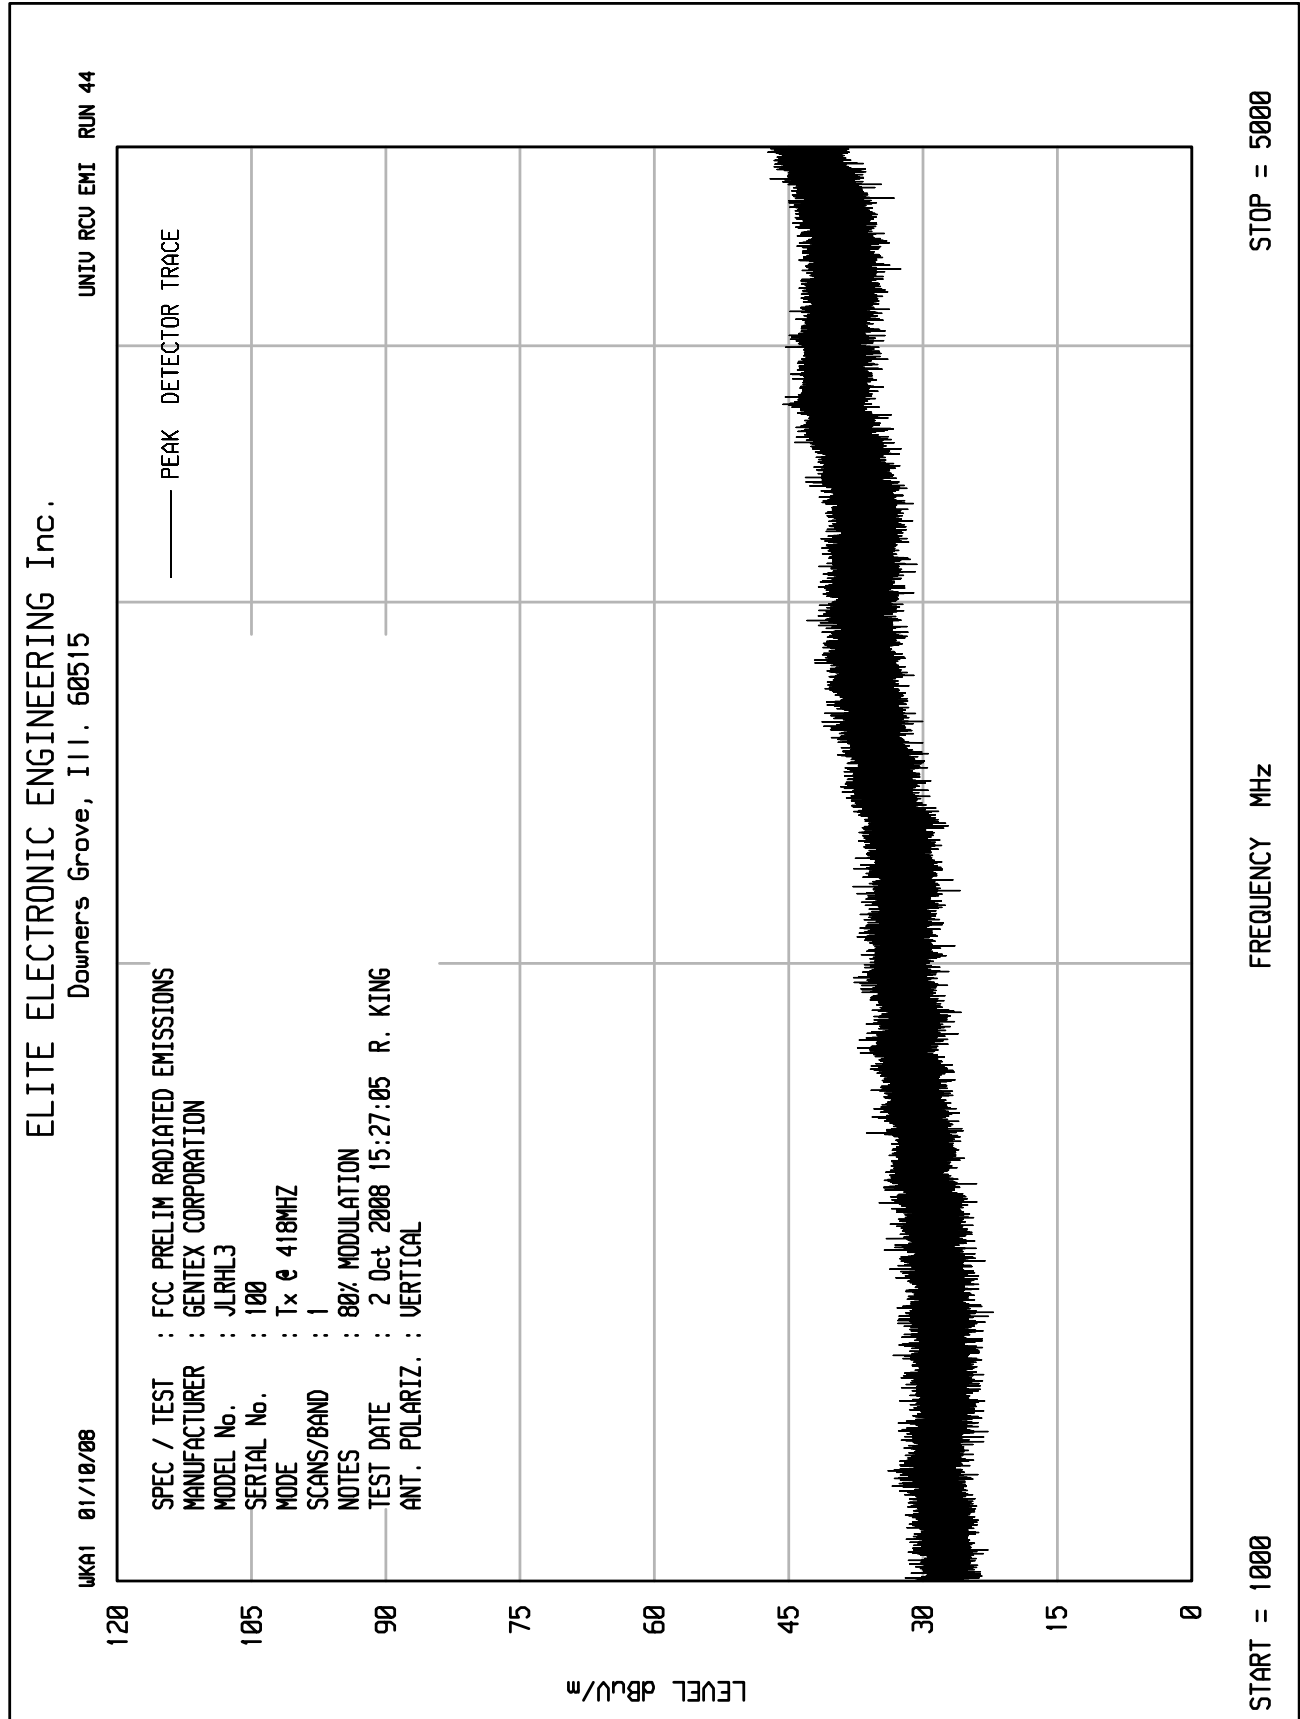



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 288MHz
: 30% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
288.0	H	60.5		1.3	13.5	-10.5	64.8	1734.0	4916.7	-9.1
288.0	V	65.4		1.3	13.5	-10.5	69.7	3044.8	4916.7	-4.2
576.0	H	33.4		1.9	18.9	-10.5	43.8	154.0	500	-10.2
576.0	V	29.2		1.9	18.9	-10.5	39.5	94.8	500	-14.4
864.0	H	7.9		2.3	22.1	-10.5	21.9	12.4	500	-32.1
864.0	V	14.7		2.3	22.1	-10.5	28.6	27.1	500	-25.3
1152.0	H	16.0		2.7	23.8	-10.5	32.0	40.0	500	-21.9
1152.0	V	14.9	*	2.7	23.8	-10.5	30.9	35.3	500	-23.0
1440.0	H	19.4		3.1	25.6	-10.5	37.6	76.0	500	-16.4
1440.0	V	20.2		3.1	25.6	-10.5	38.4	82.9	500	-15.6
1728.0	H	14.5	*	3.4	27.2	-10.5	34.6	54.0	500	-19.3
1728.0	V	16.4	*	3.4	27.2	-10.5	36.6	67.4	500	-17.4
2016.0	H	13.6	*	3.6	28.3	-10.5	35.2	57.2	500	-18.8
2016.0	V	13.6	*	3.6	28.3	-10.5	35.2	57.2	500	-18.8
2304.0	H	13.6	*	3.8	29.1	-10.5	36.0	63.4	500	-17.9
2304.0	V	13.8	*	3.8	29.1	-10.5	36.2	64.4	500	-17.8
2592.0	H	15.5	*	3.9	29.8	-10.5	38.7	86.6	500	-15.2
2592.0	V	14.3	*	3.9	29.8	-10.5	37.6	75.6	500	-16.4
2880.0	H	14.0	*	4.0	30.7	-10.5	38.3	82.1	500	-15.7
2880.0	V	14.3	*	4.0	30.7	-10.5	38.5	84.5	500	-15.4

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 288MHz
: 50% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBUV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBUV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
288.0	H	56.3		1.3	13.5	-6.0	65.1	1788.8	4916.7	-8.8
288.0	V	61.4		1.3	13.5	-6.0	70.2	3232.6	4916.7	-3.6
576.0	H	25.1		1.9	18.9	-6.0	39.9	98.6	500	-14.1
576.0	V	22.1		1.9	18.9	-6.0	36.9	69.8	500	-17.1
864.0	H	5.9	*	2.3	22.1	-6.0	24.3	16.4	500	-29.7
864.0	V	7.4	*	2.3	22.1	-6.0	25.8	19.5	500	-28.2
1152.0	H	14.4	*	2.7	23.8	-6.0	34.9	55.4	500	-19.1
1152.0	V	14.8	*	2.7	23.8	-6.0	35.2	57.8	500	-18.7
1440.0	H	15.6		3.1	25.6	-6.0	38.3	81.8	500	-15.7
1440.0	V	17.5		3.1	25.6	-6.0	40.2	102.0	500	-13.8
1728.0	H	14.3	*	3.4	27.2	-6.0	38.9	87.7	500	-15.1
1728.0	V	14.2	*	3.4	27.2	-6.0	38.7	86.4	500	-15.2
2016.0	H	13.9	*	3.6	28.3	-6.0	39.9	98.3	500	-14.1
2016.0	V	14.4	*	3.6	28.3	-6.0	40.4	104.2	500	-13.6
2304.0	H	14.8	*	3.8	29.1	-6.0	41.6	120.6	500	-12.3
2304.0	V	13.5	*	3.8	29.1	-6.0	40.3	104.0	500	-13.6
2592.0	H	14.9	*	3.9	29.8	-6.0	42.6	135.5	500	-11.3
2592.0	V	15.5	*	3.9	29.8	-6.0	43.2	144.1	500	-10.8
2880.0	H	14.6	*	4.0	30.7	-6.0	43.2	144.9	500	-10.8
2880.0	V	15.2	*	4.0	30.7	-6.0	43.9	156.0	500	-10.1

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 288MHz
: 80% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
288.0	H	51.6		1.3	13.5	-1.9	64.5	1673.2	4916.7	-9.4
288.0	V	57.2		1.3	13.5	-1.9	70.1	3188.3	4916.7	-3.8
576.0	H	17.4		1.9	18.9	-1.9	36.3	65.3	500	-17.7
576.0	V	14.9		1.9	18.9	-1.9	33.8	49.0	500	-20.2
864.0	H	5.3	*	2.3	22.1	-1.9	27.8	24.6	500	-26.2
864.0	V	5.6	*	2.3	22.1	-1.9	28.1	25.4	500	-25.9
1152.0	H	15.2	*	2.7	23.8	-1.9	39.8	97.2	500	-14.2
1152.0	V	13.9	*	2.7	23.8	-1.9	38.5	83.9	500	-15.5
1440.0	H	15.6	*	3.1	25.6	-1.9	42.4	131.4	500	-11.6
1440.0	V	15.1		3.1	25.6	-1.9	41.8	123.5	500	-12.1
1728.0	H	13.6	*	3.4	27.2	-1.9	42.3	130.8	500	-11.6
1728.0	V	14.5	*	3.4	27.2	-1.9	43.2	144.4	500	-10.8
2016.0	H	15.1	*	3.6	28.3	-1.9	45.1	180.3	500	-8.9
2016.0	V	14.3	*	3.6	28.3	-1.9	44.4	165.0	500	-9.6
2304.0	H	13.9	*	3.8	29.1	-1.9	44.9	175.0	500	-9.1
2304.0	V	13.8	*	3.8	29.1	-1.9	44.7	172.4	500	-9.2
2592.0	H	15.3	*	3.9	29.8	-1.9	47.2	227.9	500	-6.8
2592.0	V	15.6	*	3.9	29.8	-1.9	47.4	235.1	500	-6.6
2880.0	H	14.6	*	4.0	30.7	-1.9	47.3	232.9	500	-6.6
2880.0	V	14.4	*	4.0	30.7	-1.9	47.2	229.4	500	-6.8

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 310MHz
: 30% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
310.0	H	62.0		1.4	14.0	-10.5	66.9	2224.2	5833.3	-8.4
310.0	V	67.3		1.4	14.0	-10.5	72.2	4084.8	5833.3	-3.1
620.0	H	35.8		2.0	19.5	-10.5	46.9	220.3	583	-8.5
620.0	V	27.8		2.0	19.5	-10.5	38.9	88.1	583	-16.4
930.0	H	15.1		2.4	22.5	-10.5	29.5	30.0	583	-25.8
930.0	V	11.6		2.4	22.5	-10.5	26.1	20.1	583	-29.3
1240.0	H	16.8		2.8	25.0	-10.5	34.2	51.4	500	-19.8
1240.0	V	15.6		2.8	25.0	-10.5	33.0	44.5	500	-21.0
1550.0	H	16.2		3.2	26.4	-10.5	35.3	58.2	500	-18.7
1550.0	V	16.7		3.2	26.4	-10.5	35.8	62.0	500	-18.1
1860.0	H	14.3	*	3.5	28.3	-10.5	35.6	60.5	583	-19.7
1860.0	V	14.6	*	3.5	28.3	-10.5	35.9	62.3	583	-19.4
2170.0	H	13.9	*	3.7	28.8	-10.5	35.9	62.4	583	-19.4
2170.0	V	13.6	*	3.7	28.8	-10.5	35.6	60.5	583	-19.7
2480.0	H	14.0	*	3.8	29.5	-10.5	36.9	70.2	583	-18.4
2480.0	V	14.2	*	3.8	29.5	-10.5	37.1	71.2	583	-18.3
2790.0	H	14.6	*	4.0	30.4	-10.5	38.5	84.2	500	-15.5
2790.0	V	15.6	*	4.0	30.4	-10.5	39.6	95.0	500	-14.4
3100.0	H	14.8	*	4.2	31.6	-10.5	40.1	101.1	583	-15.2
3100.0	V	14.7	*	4.2	31.6	-10.5	40.0	99.6	583	-15.4

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 310MHz
: 50% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
310.0	H	56.5		1.4	14.0	-6.0	65.8	1957.4	5833.3	-9.5
310.0	V	62.0		1.4	14.0	-6.0	71.4	3712.6	5833.3	-3.9
620.0	H	27.5		2.0	19.5	-6.0	43.0	140.8	583	-12.3
620.0	V	20.2		2.0	19.5	-6.0	35.7	61.1	583	-19.6
930.0	H	5.7	*	2.4	22.5	-6.0	24.6	17.0	583	-30.7
930.0	V	5.4	*	2.4	22.5	-6.0	24.2	16.3	583	-31.1
1240.0	H	15.0	*	2.8	25.0	-6.0	36.8	69.0	500	-17.2
1240.0	V	13.1	*	2.8	25.0	-6.0	34.9	55.8	500	-19.1
1550.0	H	15.1	*	3.2	26.4	-6.0	38.6	85.4	500	-15.3
1550.0	V	13.3	*	3.2	26.4	-6.0	36.8	69.4	500	-17.2
1860.0	H	14.9	*	3.5	28.3	-6.0	40.7	108.5	583	-14.6
1860.0	V	14.8	*	3.5	28.3	-6.0	40.6	106.8	583	-14.7
2170.0	H	15.1	*	3.7	28.8	-6.0	41.5	118.7	583	-13.8
2170.0	V	13.9	*	3.7	28.8	-6.0	40.3	104.0	583	-15.0
2480.0	H	13.9	*	3.8	29.5	-6.0	41.2	115.2	583	-14.1
2480.0	V	14.3	*	3.8	29.5	-6.0	41.6	120.4	583	-13.7
2790.0	H	16.2	*	4.0	30.4	-6.0	44.5	168.5	500	-9.4
2790.0	V	14.4	*	4.0	30.4	-6.0	42.8	138.1	500	-11.2
3100.0	H	14.0	*	4.2	31.6	-6.0	43.8	154.2	583	-11.6
3100.0	V	15.5	*	4.2	31.6	-6.0	45.2	181.8	583	-10.1

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 310MHz
: 80% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
310.0	H	52.2		1.4	14.0	-1.9	65.7	1923.9	5833.3	-9.6
310.0	V	58.1		1.4	14.0	-1.9	71.6	3794.7	5833.3	-3.7
620.0	H	4.8	*	2.0	19.5	-1.9	24.4	16.6	583	-30.9
620.0	V	13.2		2.0	19.5	-1.9	32.8	43.8	583	-22.5
930.0	H	5.3	*	2.4	22.5	-1.9	28.3	25.9	583	-27.0
930.0	V	5.8	*	2.4	22.5	-1.9	28.8	27.4	583	-26.6
1240.0	H	13.6	*	2.8	25.0	-1.9	39.6	95.1	500	-14.4
1240.0	V	13.4	*	2.8	25.0	-1.9	39.3	92.3	500	-14.7
1550.0	H	15.3	*	3.2	26.4	-1.9	43.0	141.6	500	-11.0
1550.0	V	16.6		3.2	26.4	-1.9	44.3	163.2	500	-9.7
1860.0	H	15.2	*	3.5	28.3	-1.9	45.1	179.6	583	-10.2
1860.0	V	14.4	*	3.5	28.3	-1.9	44.3	164.3	583	-11.0
2170.0	H	14.4	*	3.7	28.8	-1.9	45.0	177.2	583	-10.3
2170.0	V	14.0	*	3.7	28.8	-1.9	44.6	169.6	583	-10.7
2480.0	H	14.6	*	3.8	29.5	-1.9	46.0	199.3	583	-9.3
2480.0	V	13.9	*	3.8	29.5	-1.9	45.4	185.1	583	-10.0
2790.0	H	14.9	*	4.0	30.4	-1.9	47.4	235.3	500	-6.5
2790.0	V	14.9	*	4.0	30.4	-1.9	47.4	235.3	500	-6.5
3100.0	H	14.6	*	4.2	31.6	-1.9	48.4	262.8	583	-6.9
3100.0	V	15.6	*	4.2	31.6	-1.9	49.4	296.6	583	-5.9

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 418MHz
: 30% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
418.0	H	60.7		1.6	17.2	-10.5	69.1	2835.5	1033.3	-11.2
418.0	V	69.1		1.6	17.2	-10.5	77.5	7466.7	1033.3	-2.8
836.0	H	29.1		2.3	21.5	-10.5	42.4	132.1	1033.3	-17.9
836.0	V	29.3		2.3	21.5	-10.5	42.6	135.2	1033.3	-17.7
1254.0	H	21.7		2.8	25.0	-10.5	39.1	89.8	1033.3	-21.2
1254.0	V	26.7		2.8	25.0	-10.5	44.1	160.8	1033.3	-16.2
1672.0	H	13.5	*	3.3	27.1	-10.5	33.5	47.2	500	-20.5
1672.0	V	17.1		3.3	27.1	-10.5	37.1	71.4	500	-16.9
2090.0	H	14.4	*	3.7	28.5	-10.5	36.2	64.3	1033.3	-24.1
2090.0	V	14.0	*	3.7	28.5	-10.5	35.8	61.6	1033.3	-24.5
2508.0	H	14.3	*	3.9	29.6	-10.5	37.3	73.0	1033.3	-23.0
2508.0	V	14.4	*	3.9	29.6	-10.5	37.4	74.1	1033.3	-22.9
2926.0	H	14.0	*	4.0	30.8	-10.5	38.4	83.5	1033.3	-21.9
2926.0	V	14.9	*	4.0	30.8	-10.5	39.3	92.5	1033.3	-21.0
3344.0	H	14.6	*	4.4	32.9	-10.5	41.4	117.6	1033.3	-18.9
3344.0	V	13.6	*	4.4	32.9	-10.5	40.5	105.9	1033.3	-19.8
3762.0	H	14.0	*	4.8	34.1	-10.5	42.5	134.1	500	-11.4
3762.0	V	14.8	*	4.8	34.1	-10.5	43.3	146.3	500	-10.7
4180.0	H	13.8	*	5.2	34.3	-10.5	42.8	138.4	500	-11.2
4180.0	V	14.7	*	5.2	34.3	-10.5	43.7	153.3	500	-10.3

Checked BY RICHARD E. KING :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 418MHz
: 50% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
418.0	H	55.8		1.6	17.2	-6.0	68.7	2717.2	1033.3	-11.6
418.0	V	62.8		1.6	17.2	-6.0	75.7	6062.2	1033.3	-4.6
836.0	H	22.1		2.3	21.5	-6.0	39.9	99.3	1033.3	-20.3
836.0	V	22.0		2.3	21.5	-6.0	39.8	97.7	1033.3	-20.5
1254.0	H	17.8		2.8	25.0	-6.0	39.6	95.9	1033.3	-20.7
1254.0	V	17.9		2.8	25.0	-6.0	39.8	97.3	1033.3	-20.5
1672.0	H	15.1		3.3	27.1	-6.0	39.5	94.2	500	-14.5
1672.0	V	14.8		3.3	27.1	-6.0	39.2	91.4	500	-14.8
2090.0	H	16.0		3.7	28.5	-6.0	42.2	129.1	1033.3	-18.1
2090.0	V	15.3	*	3.7	28.5	-6.0	41.5	119.3	1033.3	-18.8
2508.0	H	16.0	*	3.9	29.6	-6.0	43.4	148.6	1033.3	-16.8
2508.0	V	13.8	*	3.9	29.6	-6.0	41.2	114.9	1033.3	-19.1
2926.0	H	14.2	*	4.0	30.8	-6.0	43.0	141.2	1033.3	-17.3
2926.0	V	14.0	*	4.0	30.8	-6.0	42.9	139.3	1033.3	-17.4
3344.0	H	15.1	*	4.4	32.9	-6.0	46.4	208.1	1033.3	-13.9
3344.0	V	15.1	*	4.4	32.9	-6.0	46.4	208.1	1033.3	-13.9
3762.0	H	15.1	*	4.8	34.1	-6.0	48.0	251.7	500	-6.0
3762.0	V	15.2	*	4.8	34.1	-6.0	48.1	255.5	500	-5.8
4180.0	H	14.3	*	5.2	34.3	-6.0	47.8	244.9	500	-6.2
4180.0	V	14.4	*	5.2	34.3	-6.0	47.9	248.6	500	-6.1

Checked BY RICHARD E. KING :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 418MHz
: 50% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
418.0	H	55.8		1.6	17.2	-6.0	68.7	2717.2	1033.3	-11.6
418.0	V	62.8		1.6	17.2	-6.0	75.7	6062.2	1033.3	-4.6
836.0	H	22.1		2.3	21.5	-6.0	39.9	99.3	1033.3	-20.3
836.0	V	22.0		2.3	21.5	-6.0	39.8	97.7	1033.3	-20.5
1254.0	H	17.8		2.8	25.0	-6.0	39.6	95.9	1033.3	-20.7
1254.0	V	17.9		2.8	25.0	-6.0	39.8	97.3	1033.3	-20.5
1672.0	H	15.1		3.3	27.1	-6.0	39.5	94.2	500	-14.5
1672.0	V	14.8		3.3	27.1	-6.0	39.2	91.4	500	-14.8
2090.0	H	16.0		3.7	28.5	-6.0	42.2	129.1	1033.3	-18.1
2090.0	V	15.3	*	3.7	28.5	-6.0	41.5	119.3	1033.3	-18.8
2508.0	H	16.0	*	3.9	29.6	-6.0	43.4	148.6	1033.3	-16.8
2508.0	V	13.8	*	3.9	29.6	-6.0	41.2	114.9	1033.3	-19.1
2926.0	H	14.2	*	4.0	30.8	-6.0	43.0	141.2	1033.3	-17.3
2926.0	V	14.0	*	4.0	30.8	-6.0	42.9	139.3	1033.3	-17.4
3344.0	H	15.1	*	4.4	32.9	-6.0	46.4	208.1	1033.3	-13.9
3344.0	V	15.1	*	4.4	32.9	-6.0	46.4	208.1	1033.3	-13.9
3762.0	H	15.1	*	4.8	34.1	-6.0	48.0	251.7	500	-6.0
3762.0	V	15.2	*	4.8	34.1	-6.0	48.1	255.5	500	-5.8
4180.0	H	14.3	*	5.2	34.3	-6.0	47.8	244.9	500	-6.2
4180.0	V	14.4	*	5.2	34.3	-6.0	47.9	248.6	500	-6.1

Checked BY RICHARD E. KING :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 418MHz
: 80% Modulation
: TEST DISTANCE IS 3 METERS

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
418.0	H	51.5		1.6	17.2	-1.9	68.4	2634.1	1033.3	-11.9
418.0	V	59.2		1.6	17.2	-1.9	76.2	6443.6	1033.3	-4.1
836.0	H	18.3		2.3	21.5	-1.9	40.2	102.1	1033.3	-20.1
836.0	V	21.0		2.3	21.5	-1.9	42.9	139.6	1033.3	-17.4
1254.0	H	15.9		2.8	25.6	-1.9	42.4	132.6	1033.3	-17.8
1254.0	V	20.5		2.8	25.6	-1.9	47.1	226.7	1033.3	-13.2
1672.0	H	14.0	*	3.3	26.9	-1.9	42.3	130.6	500	-11.7
1672.0	V	15.6		3.3	26.9	-1.9	43.9	156.3	500	-10.1
2090.0	H	14.3	*	3.7	28.5	-1.9	44.6	169.6	1033.3	-15.7
2090.0	V	15.3	*	3.7	28.5	-1.9	45.6	191.2	1033.3	-14.7
2508.0	H	15.1	*	3.9	29.6	-1.9	46.6	213.4	1033.3	-13.7
2508.0	V	14.6	*	3.9	29.6	-1.9	46.1	201.2	1033.3	-14.2
2926.0	H	14.7	*	4.0	30.8	-1.9	47.6	240.1	1033.3	-12.7
2926.0	V	15.3	*	4.0	30.8	-1.9	48.3	259.1	1033.3	-12.0
3344.0	H	15.5	*	4.4	32.9	-1.9	50.9	349.7	1033.3	-9.4
3344.0	V	14.6	*	4.4	32.9	-1.9	50.0	314.6	1033.3	-10.3
3762.0	H	15.2	*	4.8	34.1	-1.9	52.2	409.6	500	-1.7
3762.0	V	15.6	*	4.8	34.1	-1.9	52.7	429.4	500	-1.3
4180.0	H	15.5	*	5.2	34.3	-1.9	53.1	449.8	500	-0.9
4180.0	V	14.8	*	5.2	34.3	-1.9	52.4	416.4	500	-1.6

Checked BY RICHARD E. King :

Richard E. King



DATA PAGE

MANUFACTURER : Gentex Corporation
MODEL : JLRHL3
S/N : None Assigned
SPECIFICATION : FCC-15C Radiated Emissions
DATE : October 6, 2008
NOTES : Transmitting @ 340MHz, 365MHz and 390MHz
: 30%, 50% and 80% Modulation
: TEST DISTANCE IS 3 METERS

30% Modulation

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
340.0	H	63.3		1.5	14.8	-10.5	69.1	2845.1	7083.3	-7.9
340.0	V	69.2		1.5	14.8	-10.5	75.0	5624.7	7083.3	-2.0
365.0	H	62.7		1.5	15.4	-10.5	69.1	2858.3	8125.0	-9.1
365.0	V	68.7		1.5	15.4	-10.5	75.2	5736.0	8125.0	-3.0
390.0	H	63.0		1.6	16.3	-10.5	70.5	3333.7	9166.7	-8.8
390.0	V	69.7		1.6	16.3	-10.5	77.1	7201.5	9166.7	-2.1

50% Modulation


Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
340.0	H	57.8		1.5	14.8	-6.0	68.0	2524.0	7083.3	-9.0
340.0	V	65.2		1.5	14.8	-6.0	75.5	5930.6	7083.3	-1.5
365.0	H	56.4		1.5	15.4	-6.0	67.3	2307.3	8125.0	-10.9
365.0	V	61.9		1.5	15.4	-6.0	72.8	4371.3	8125.0	-5.4
390.0	H	58.1		1.6	16.3	-6.0	69.9	3125.5	9166.7	-9.3
390.0	V	64.4		1.6	16.3	-6.0	76.3	6507.7	9166.7	-3.0

80% Modulation

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Duty Cycle Factor (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
340.0	H	51.7		1.5	14.8	-1.9	66.0	2004.9	7083.3	-11.0
340.0	V	58.0		1.5	14.8	-1.9	72.4	4164.8	7083.3	-4.6
365.0	H	52.0		1.5	15.4	-1.9	67.0	2234.1	8125.0	-11.2
365.0	V	59.1		1.5	15.4	-1.9	74.2	5100.5	8125.0	-4.0
390.0	H	53.3		1.6	16.3	-1.9	69.2	2893.5	9166.7	-10.0
390.0	V	60.3		1.6	16.3	-1.9	76.2	6470.3	9166.7	-3.0

Checked BY RICHARD E. King :


Richard E. King

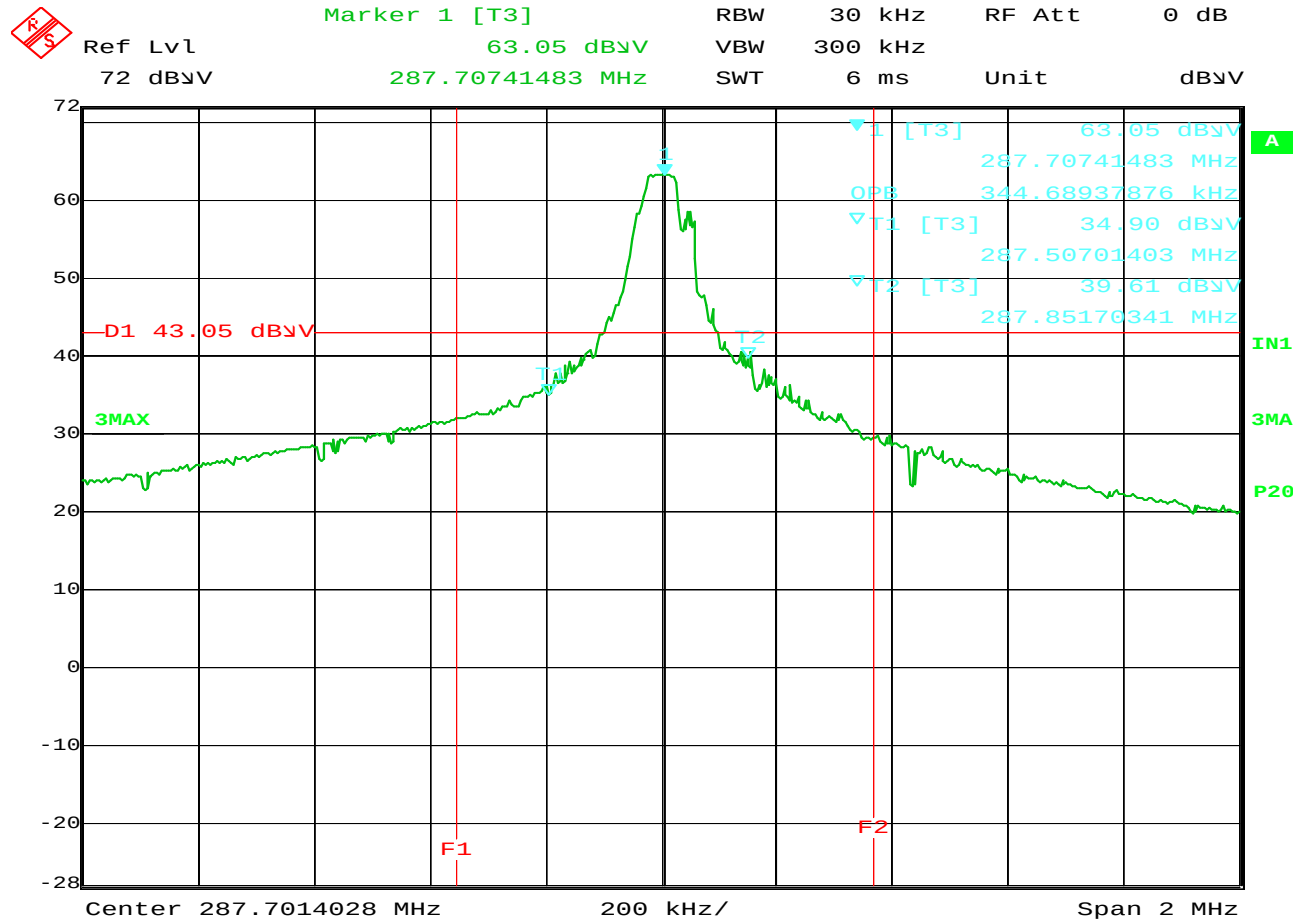

Date: 6.OCT.2008 17:30:42

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 30% Modulation
TEST MODE : Tx @ 288MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

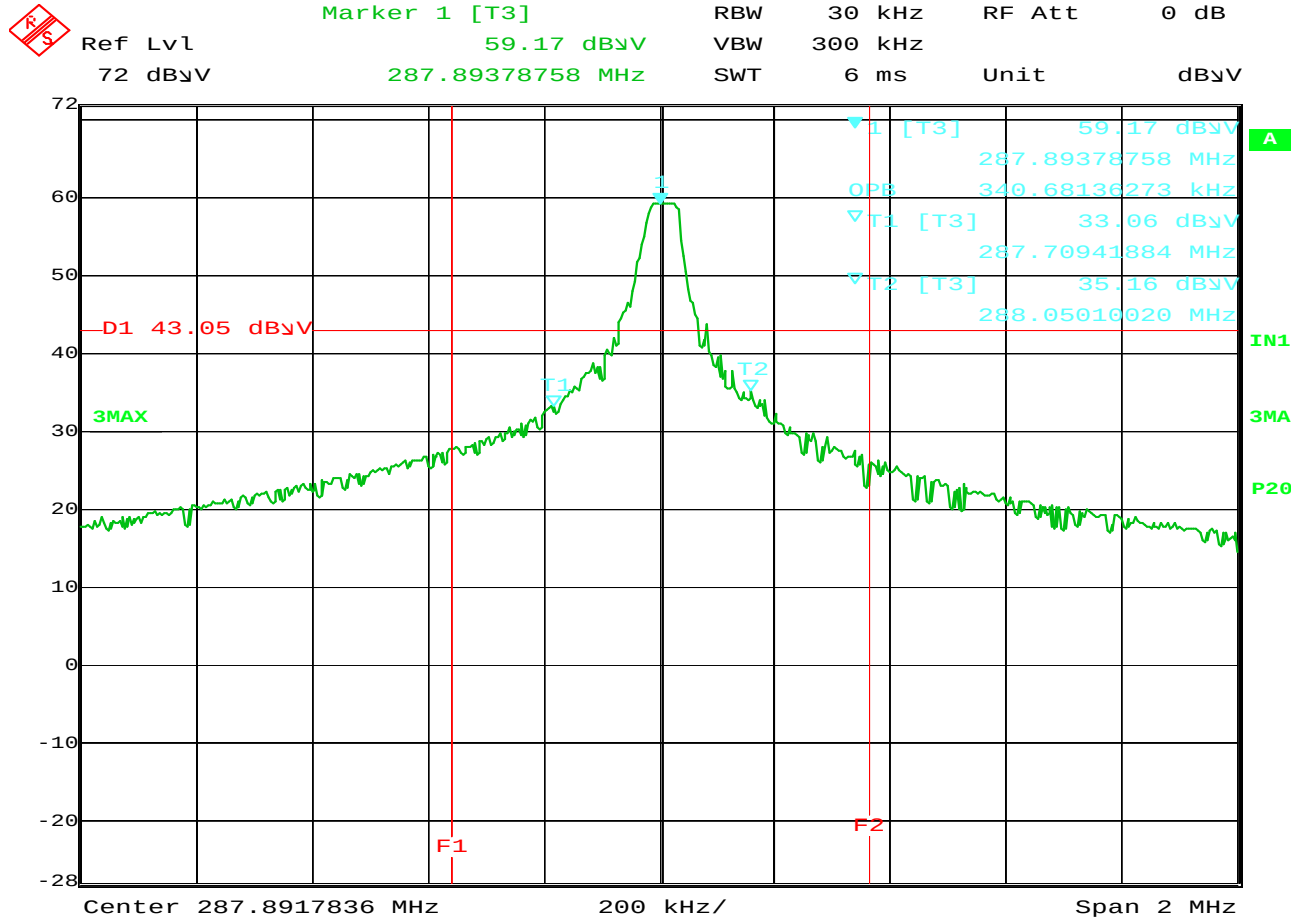

Date: 6.OCT.2008 17:35:16

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 288MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

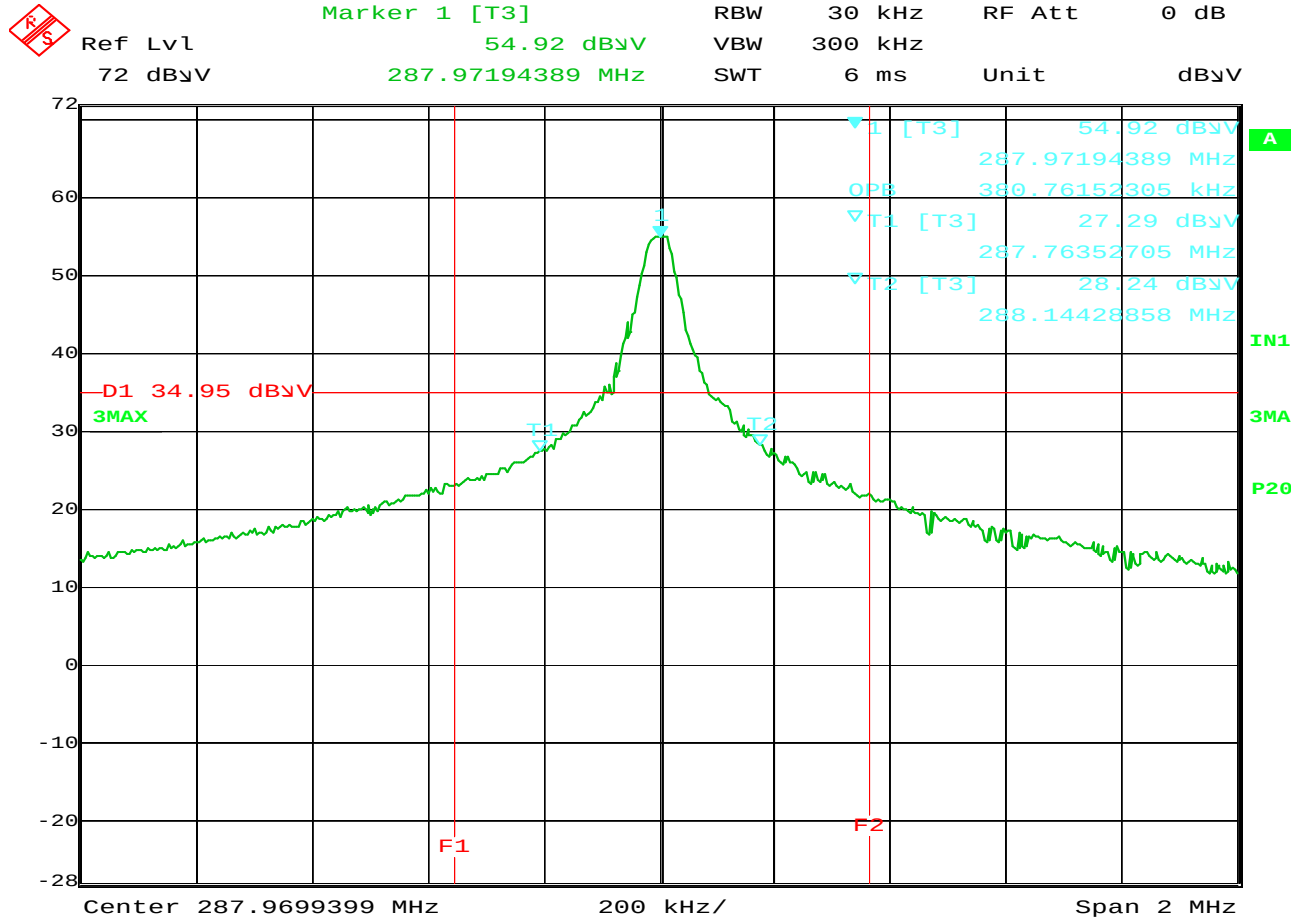

Date: 6.OCT.2008 17:40:27

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 80% Modulation
TEST MODE : Tx @ 288MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

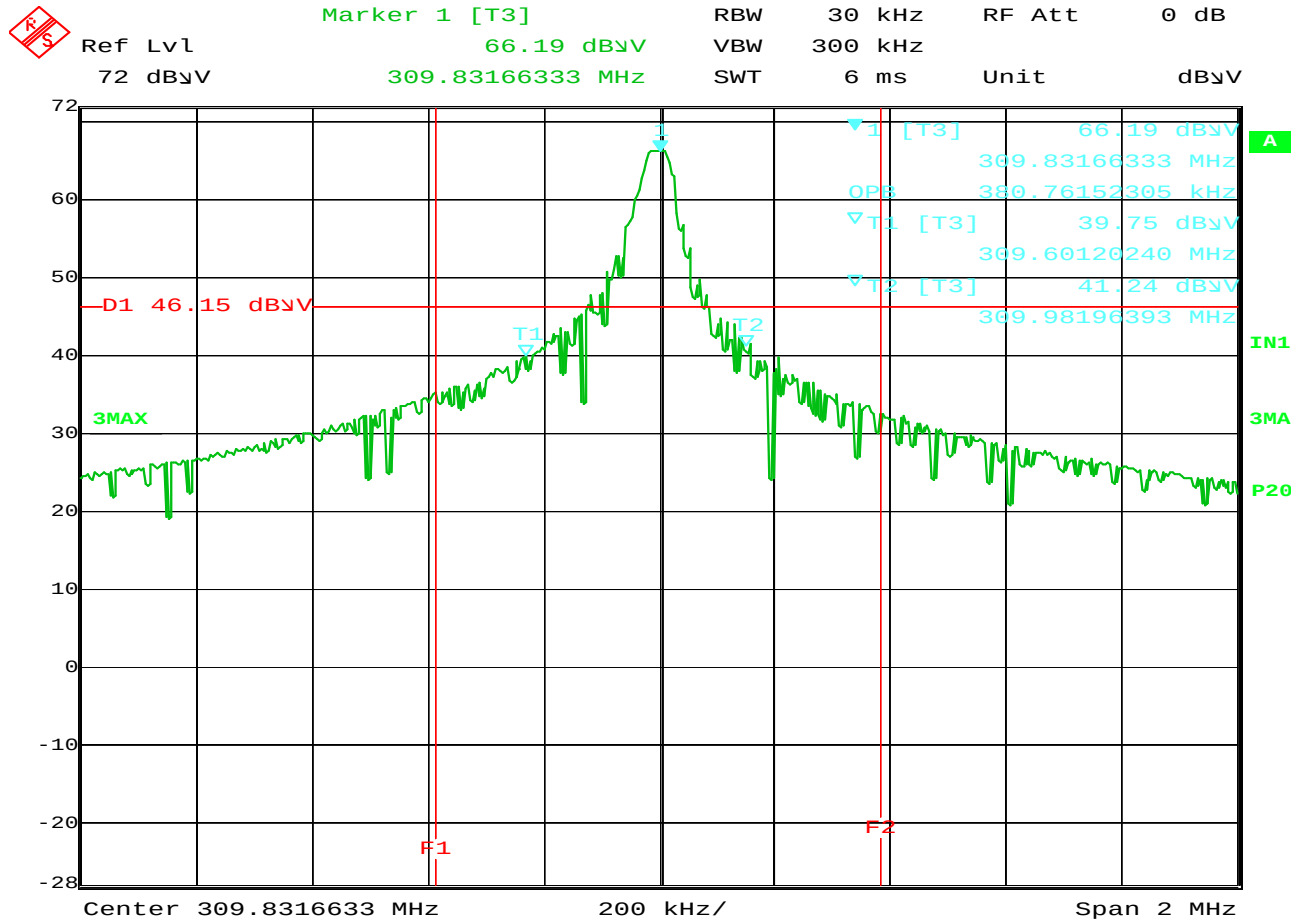

Date: 6.OCT.2008 17:16:35

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 30% Modulation
TEST MODE : Tx @ 310MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

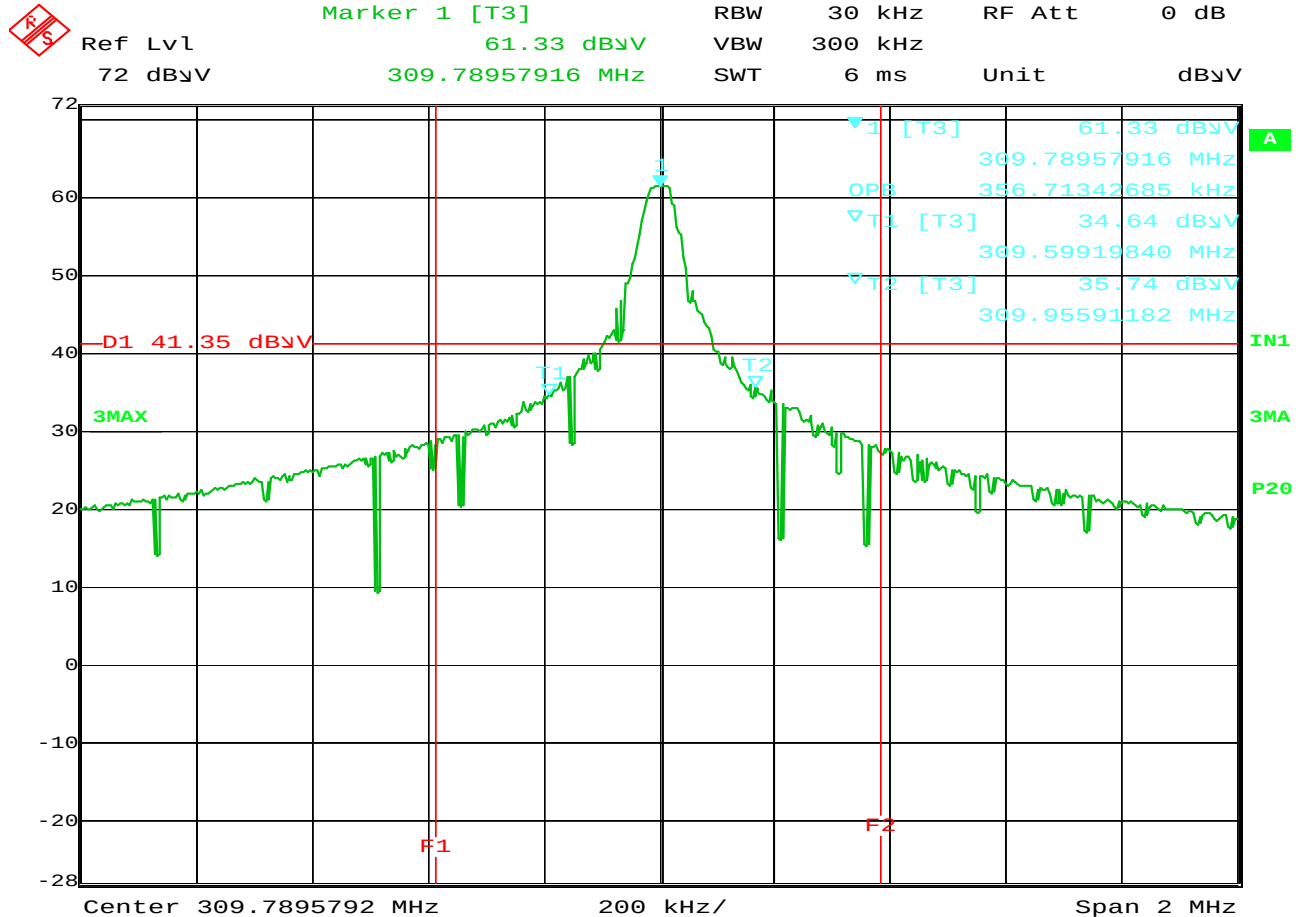

Date: 6.OCT.2008 16:56:48

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 310MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

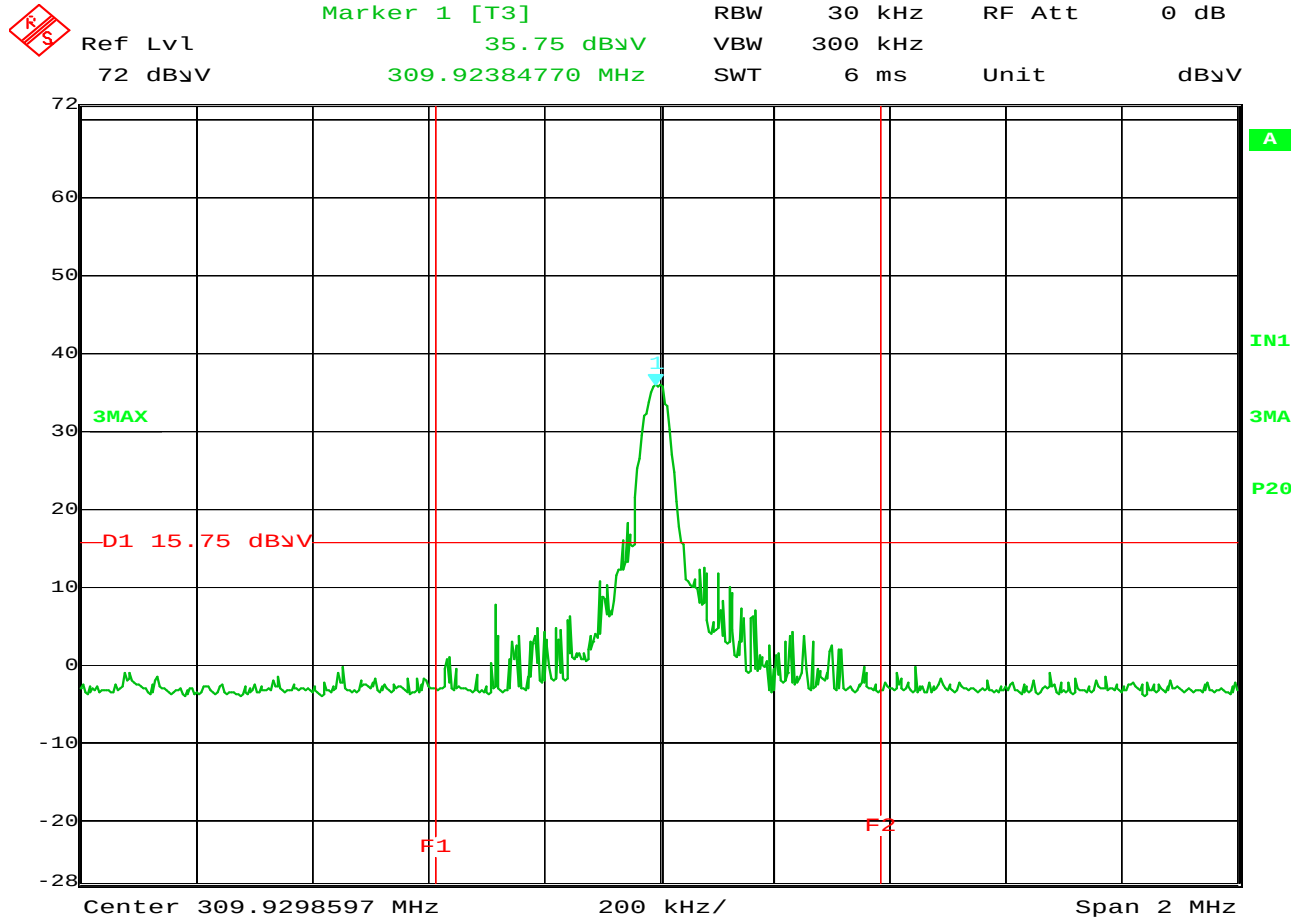

Date: 6.OCT.2008 16:28:55

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 80% Modulation
TEST MODE : Tx @ 310MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

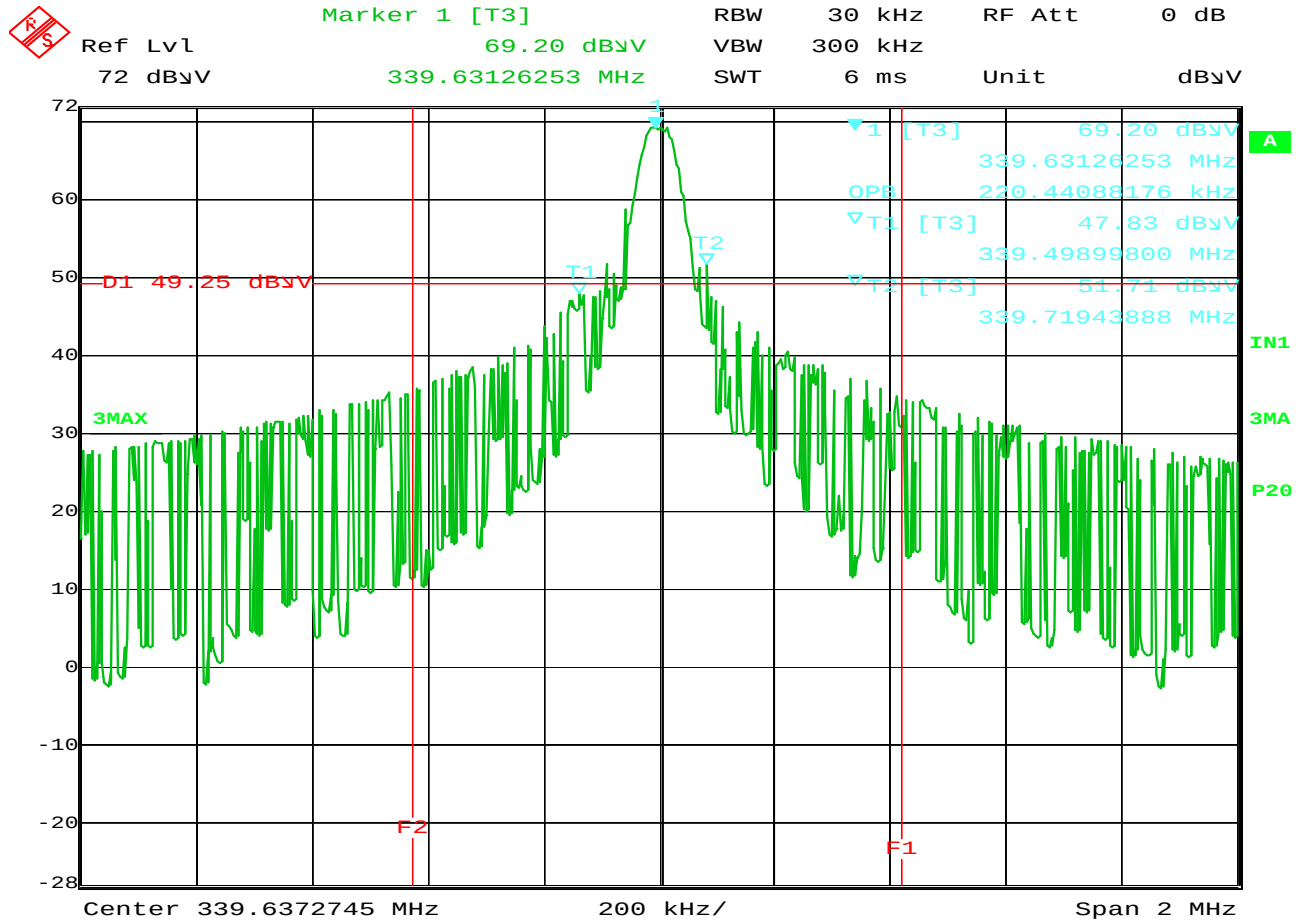

Date: 6.OCT.2008 17:52:16

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 30% Modulation
TEST MODE : Tx @ 340MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

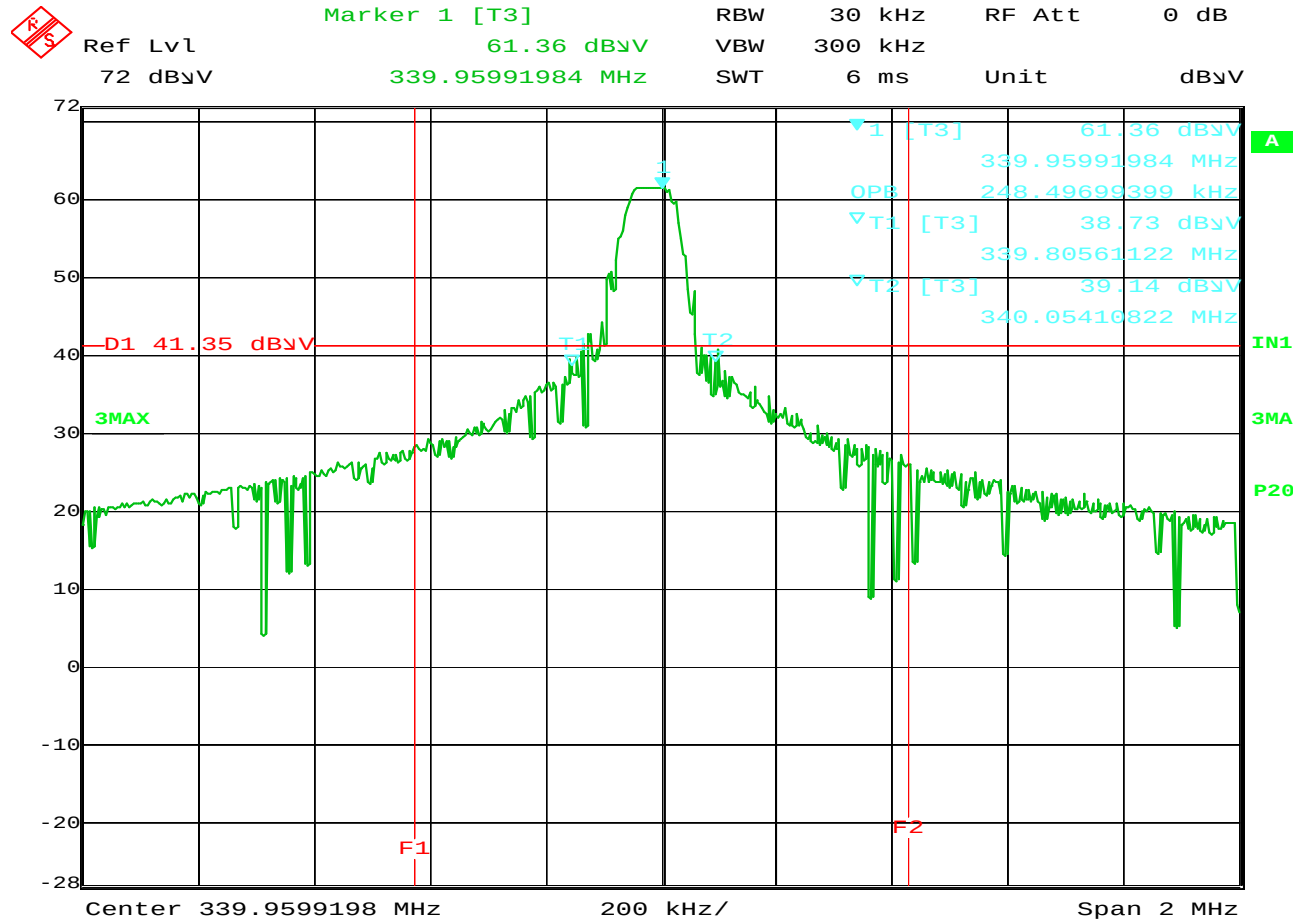

Date: 6.OCT.2008 21:08:39

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 340MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

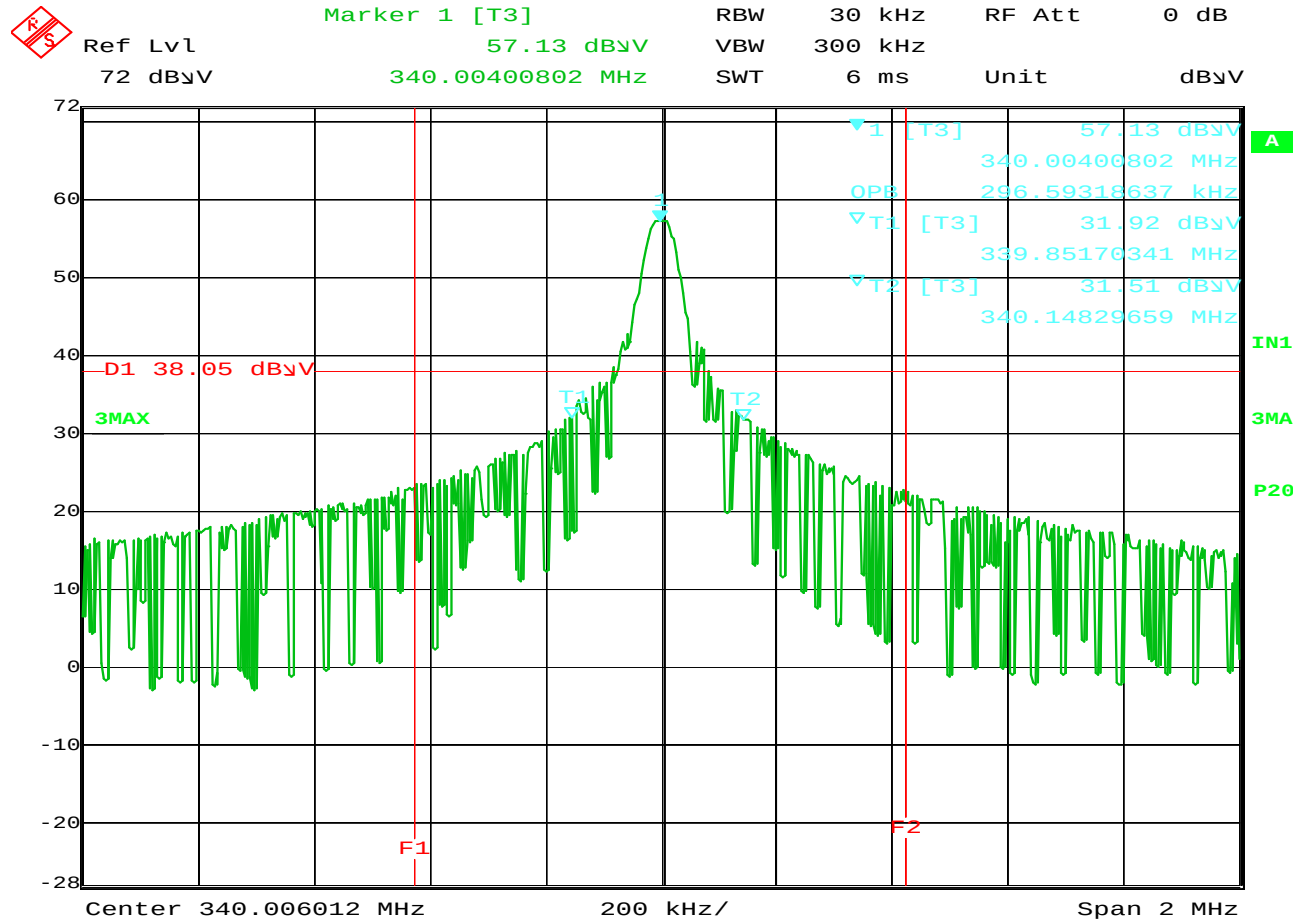

Date: 6.OCT.2008 21:04:47

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 340MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

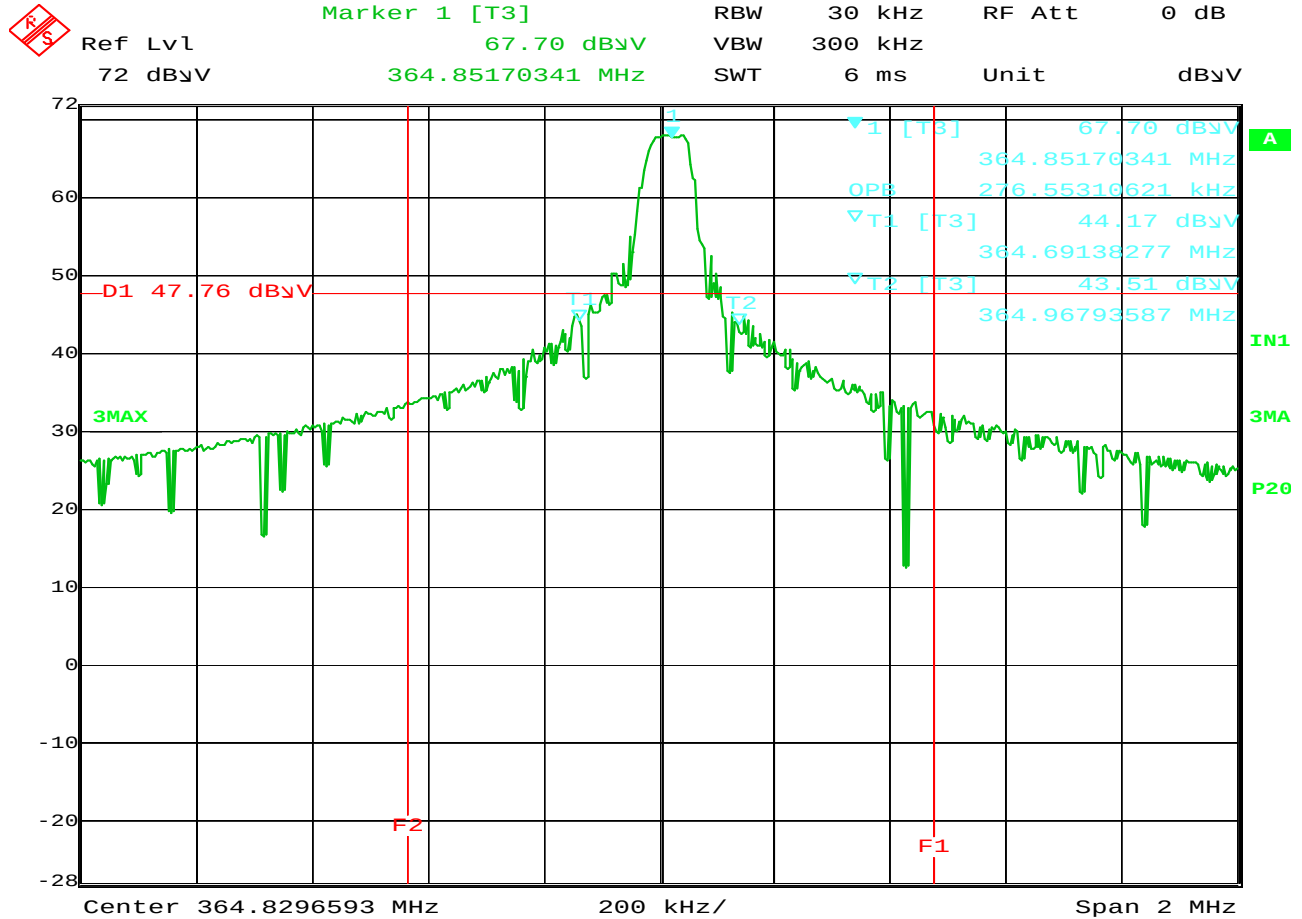

Date: 6.OCT.2008 21:23:19

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 30% Modulation
TEST MODE : Tx @ 365MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

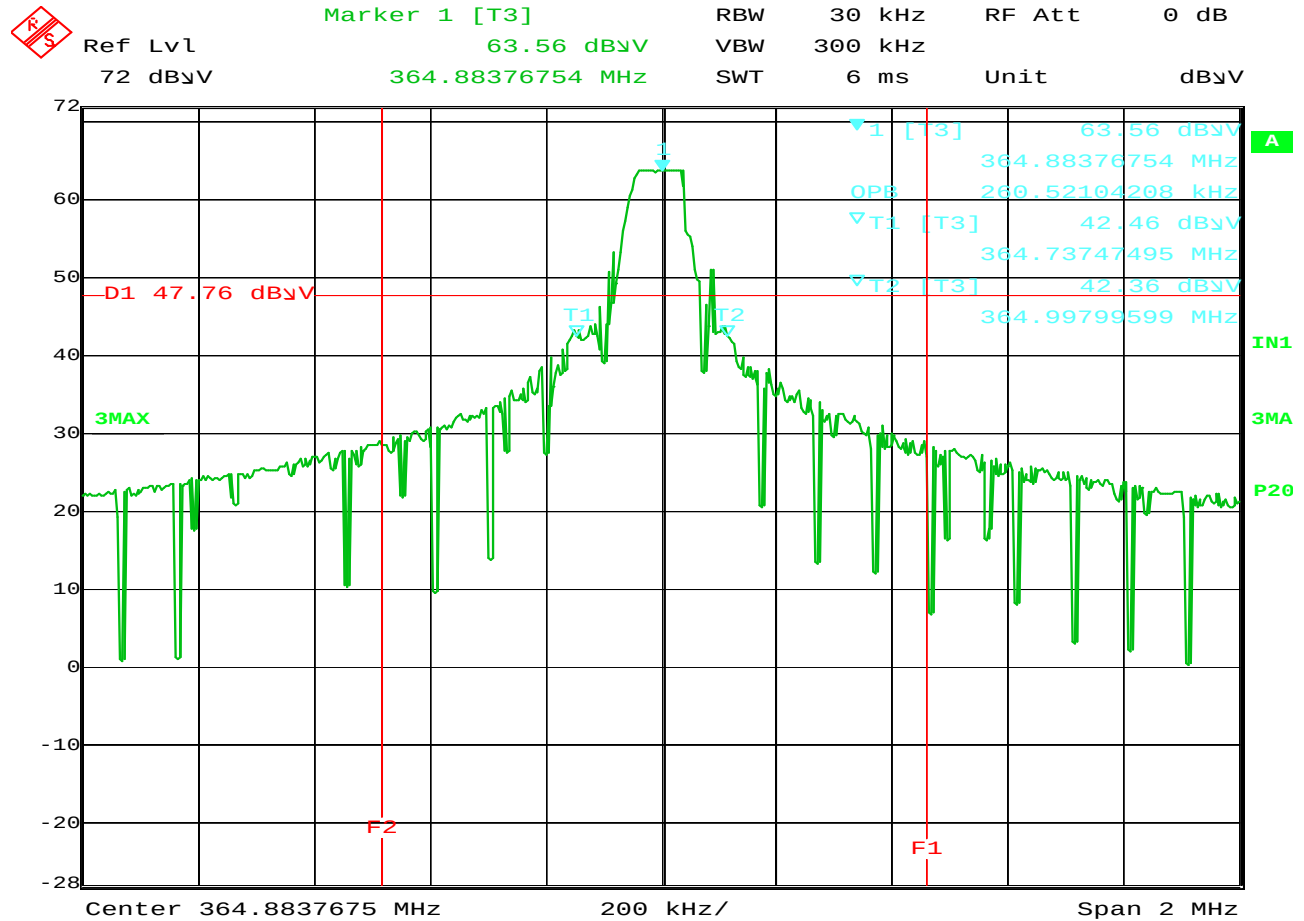

Date: 6.OCT.2008 21:27:37

FCC 15.231(c) 20dB Bandwidth

MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 365MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

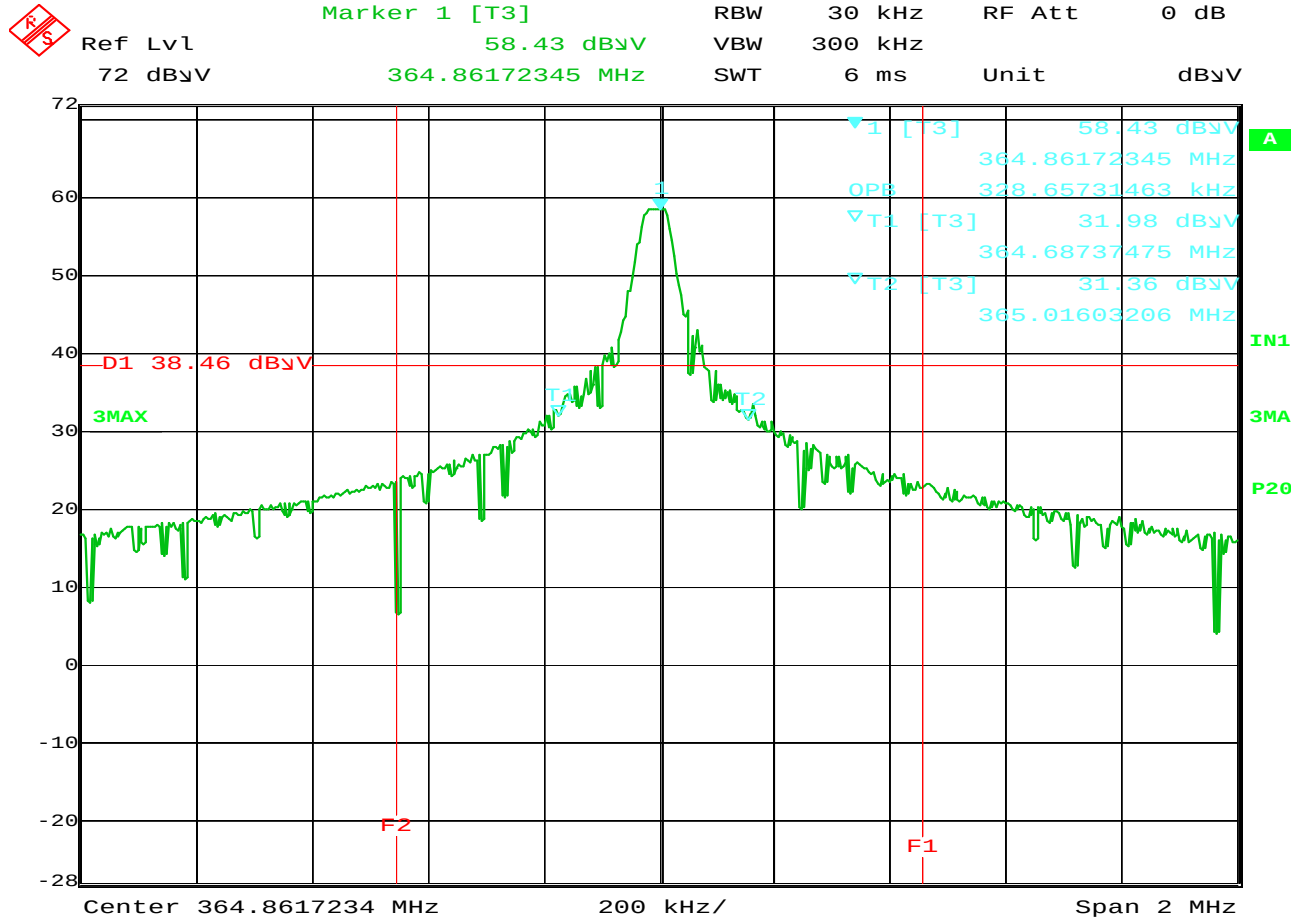


Date: 6.OCT.2008 21:32:26

FCC 15.231(c) 20dB Bandwidth

MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 80% Modulation
TEST MODE : Tx @ 365MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0




MANUFACTURER	: Gentex Corporation
MODEL NUMBER	: JLRHL3
SERIAL NUMBER	: None Assigned
TEST MODULATION	: 30% Modulation
TEST MODE	: Tx @ 390MHz
TEST PARAMETER	: Display Line (D1) represents the 20dB down point : from the modulated carrier. Display Lines (F1 & : F2) represent the 0.25% bandwidth.
EQUIPMENT USED	: RBB0, NTA0

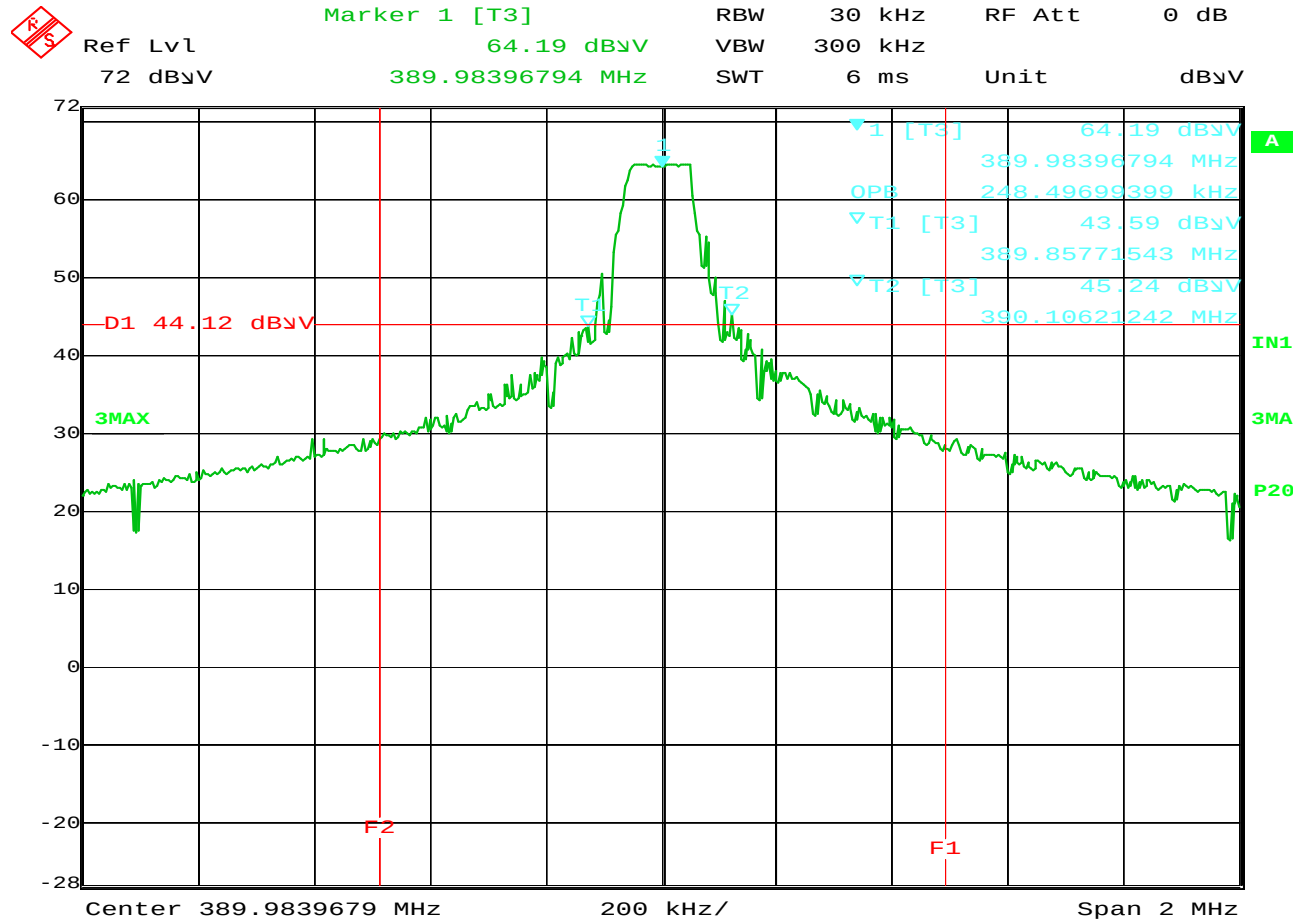

Date: 7.OCT.2008 15:05:13

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 390MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

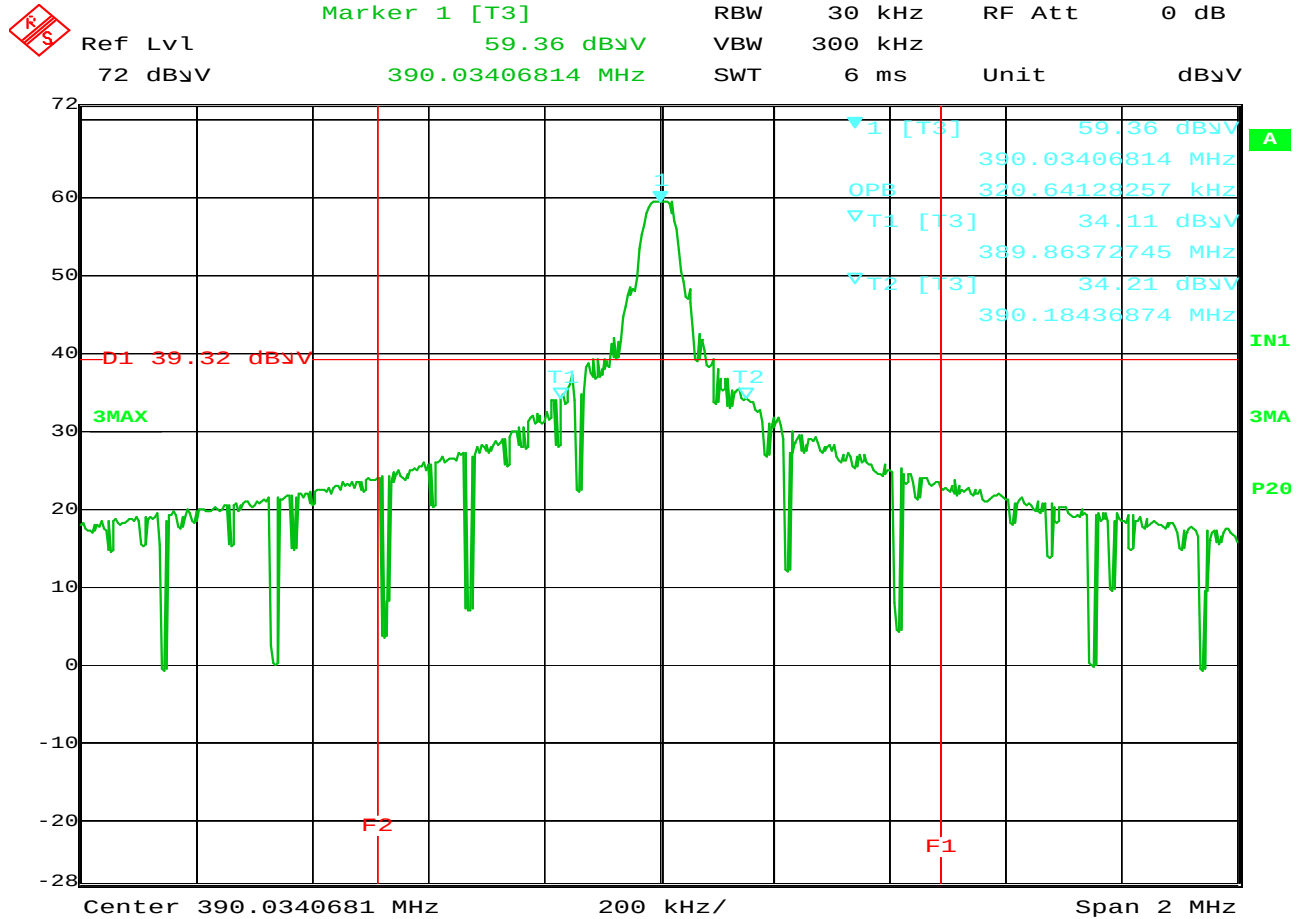

Date: 7.OCT.2008 15:19:27

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 80% Modulation
TEST MODE : Tx @ 390MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

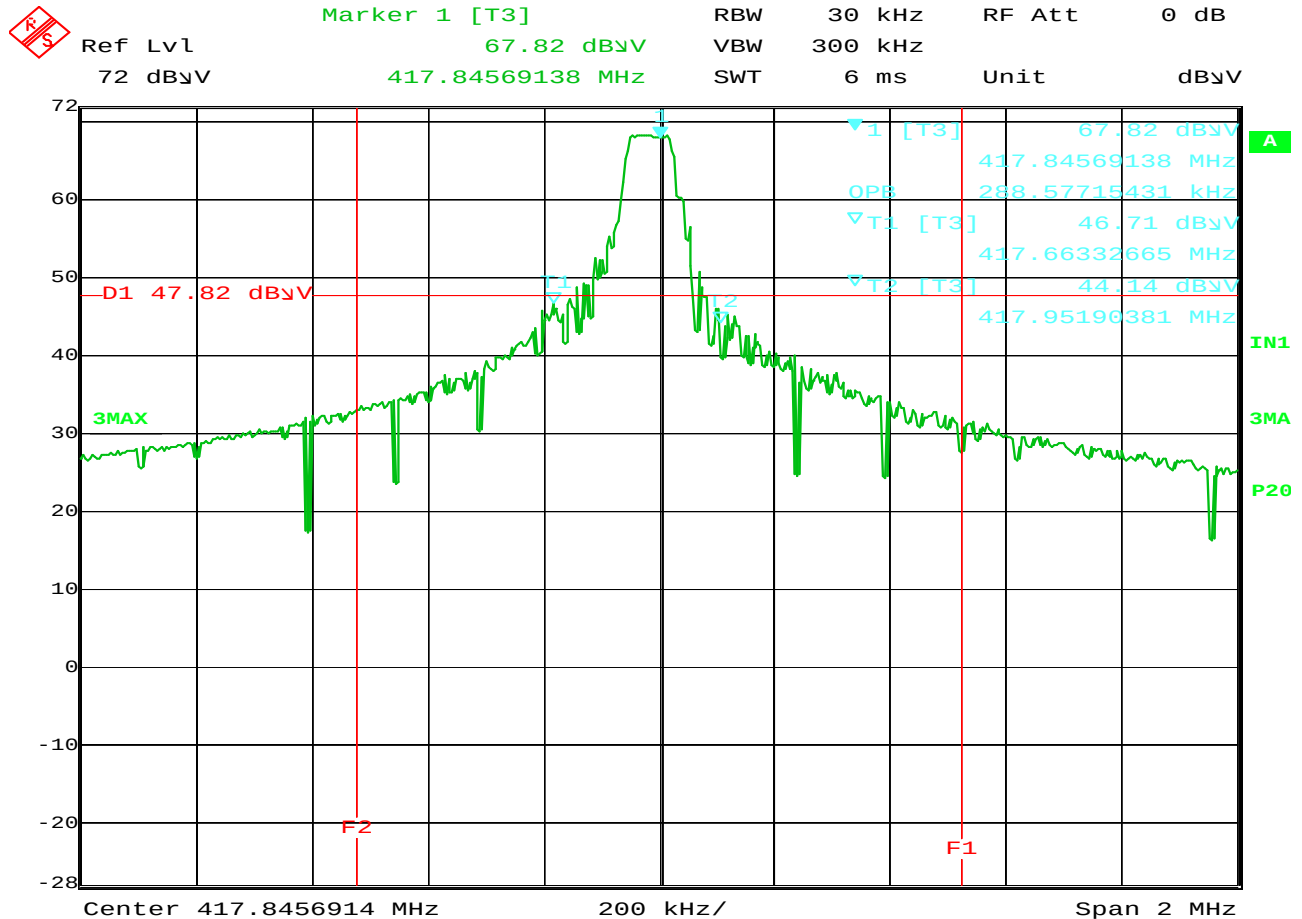

Date: 7.OCT.2008 15:48:17

FCC 15.231(c) 20dB Bandwidth


MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 30% Modulation
TEST MODE : Tx @ 418MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

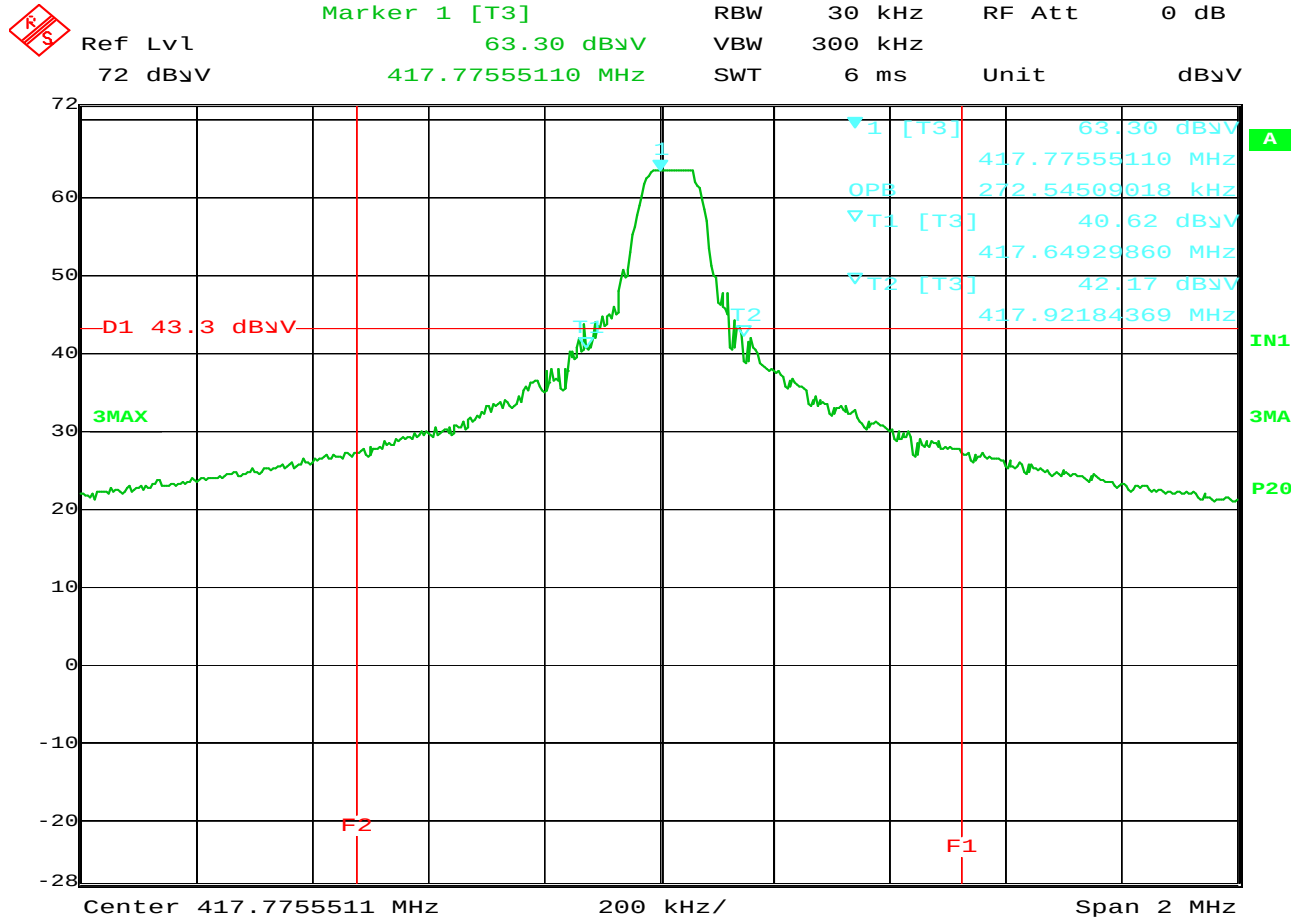

Date: 7.OCT.2008 15:53:30

FCC 15.231(c) 20dB Bandwidth

MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 50% Modulation
TEST MODE : Tx @ 418MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0

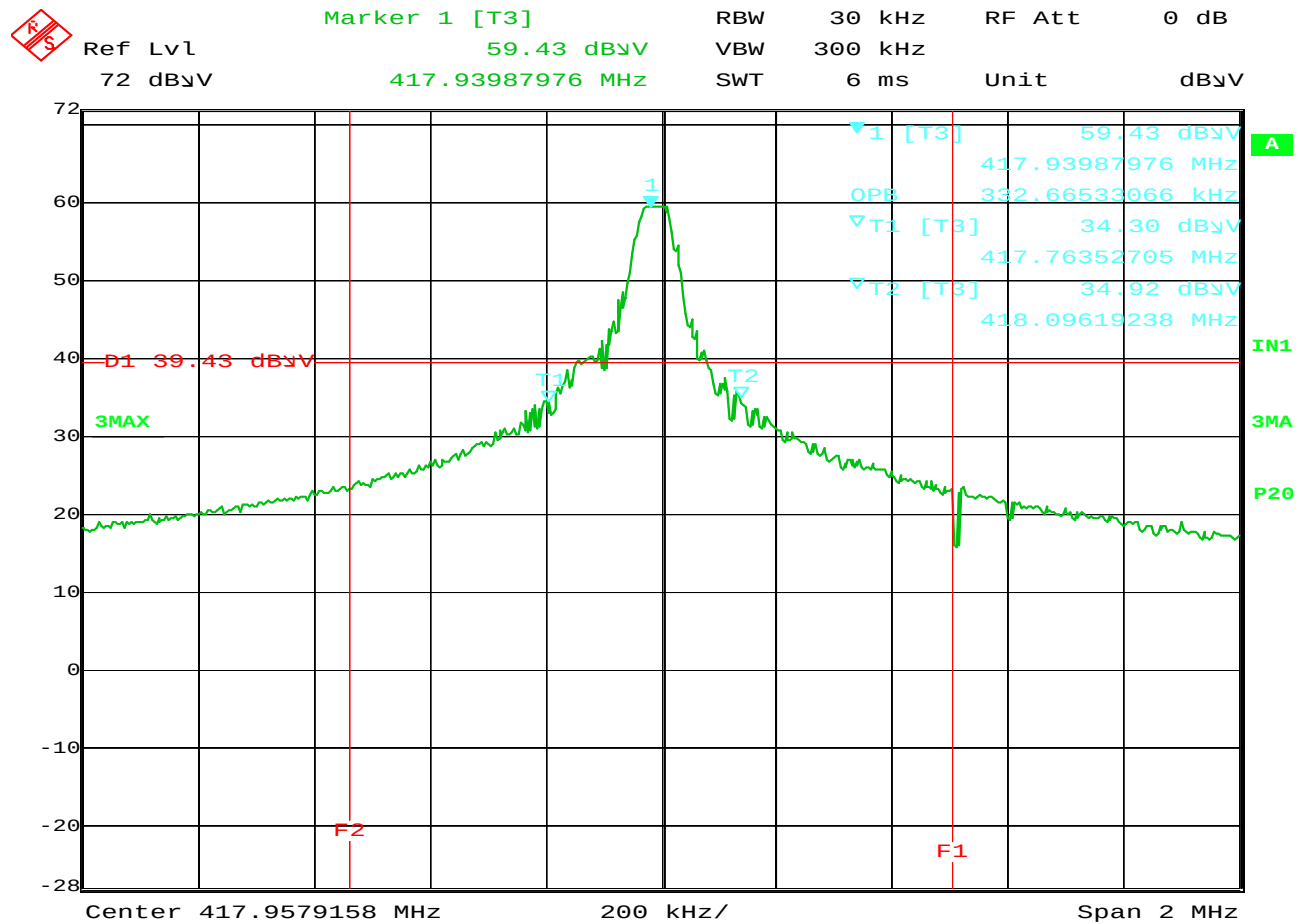

Date: 7.OCT.2008 15:57:38

FCC 15.231(c) 20dB Bandwidth

MANUFACTURER : Gentex Corporation
MODEL NUMBER : JLRHL3
SERIAL NUMBER : None Assigned
TEST MODULATION : 80% Modulation
TEST MODE : Tx @ 418MHz
TEST PARAMETER : Display Line (D1) represents the 20dB down point
: from the modulated carrier. Display Lines (F1 &
: F2) represent the 0.25% bandwidth.
EQUIPMENT USED : RBB0, NTA0