



Technical Report to the FCC and ISED Regarding Gentex Corporation - HomeLink® VI

**Model: MUAHL6
FCC ID: NZLMUAHL6
ISED: 4112A-MUAHL6**

**Emission Designator: 56K7L1D
10/24/2024**

A report concerning approval for Gentex Corporation Homelink® model MUAHL6
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pacheco
Laboratory Validation Engineer III
Gentex Corporation

Measurements Reviewed by:

Dan Brasier
Laboratory Development Engineer II
Gentex Corporation

Report Prepared by:

Patricia Szeszulski
Laboratory Validation Engineer I
Gentex Corporation

Report Approved by:

Jason Vargo
Laboratory Manager I
Gentex Corporation

Report Submitted by:

Brian Miller
Laboratory Group Leader – Regulatory II
Gentex Corporation

Test Report Revision

REV Number	Date	Author	Description
1.0	8/19/2024	Patricia Szeszulski	Initial release
2.0	10/24/2024	Patricia Szeszulski	Updated comments in Verification of Non-Operation in Restricted Bands for 307.5 and 319MHz on pages 8 and 9.

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink® HL6 Universal Garage Door Opener is a low-power transceiver OEM device that is installed into the rearview mirror of an automobile. The installation is provided by trained technicians during the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power the unit.

The unit is only operational when the user presses down the control button. It becomes inactive after the release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. The service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR 15.247 and part 15B. The device will have FCC ID # of NZLMUAHL6 and ISED ID # of 4112A-MUAHL6 under both rule parts. A separate report is submitted for functionality covered under 47 CFR 15.247 and part 15B.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.10:2013. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.



1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 05/20/2016 and includes accreditation to ANSI C63.4:2014 and ANSI C63.10:2013. The report filed with ISED, dated February 11, 2015, was accepted via a letter dated February 11, 2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address

Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address

Gentex Corporation
380 Riley Street
Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, and Radiated Emissions at 3m, FCC 47 CFR Part 15, ISED RSS-210.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLMUAHL6. The ISED certification number is 4112A-MUAHL6. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using a molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual.

"This device complies with FCC rules Part 15 and with ISED RSS-210. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.

ISED: 4112A-MUAHL6

FCC ID: NZLMUAHL6

MODEL: MUAHL6

2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.10-2013. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for measurements below 1GHz and elevated to 1.5m for measurements above 1GHz. The harness was run down the edge of the test table to a power supply sitting underneath the turntable.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

4. Block Diagram

For system block diagram please refer to attachment named "Block Diagram.pdf"

5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

6. Radiated Emissions Data

6.1. Date(s) Tested: 9/10/2024-9/12/2024

6.2. Test Method Deviations: None

6.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	21.8-23.1	°C
Humidity	42-45.5	%R.H.

6.4. Summary of Results

Measurement	Margin	Frequency - Duty Cycle
Worst Case Peak Emission	12.01 dB	288MHz - 30%
Worst Case Average Emission	1.5 dB	288MHz - 50%
Worst Case Harmonic	9.67 dB	1290MHz - (430MHz - 80%)
Worst Case Restricted Band Emission	9.67 dB	1290MHz - (430MHz - 80%)
Maximum -20 dB Occupied BW	12.50kHz	288MHz - 30%
Maximum 99% Occupied BW	56.7kHz	288MHz - 30%
Delta of Field Strength with Supply Voltage of 6-18V	N/A	288MHz - 30%

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 6V, and power reduced to 80.78 dBuV/m at 6V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated in less than 5 seconds after the activation button is depressed.
- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of $k=2.26$ and confidence interval of approximately 95%.

Expanded Uncertainty $U_{(k=2.26)}$ is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.1 dB
- Radiated Emissions – LPA (250-1000 MHz): 5.0 dB
- Radiated Emissions – DRWG (26.5 GHz): 4.2 dB
- Frequency: 0.007 ppm

6.5. Test Equipment Setup and Procedure

6.5.1. Test Equipment Used

Equipment used			
ID / Serial #	Manufacturer	Description	Cal / PM Due Date
6595	Rohde and Schwarz	EMI Receiver	11/13/2024
CF GCL	Megaphase/Pasternack	3m Chamber Port and Cables	4/30/2025
H6192	EMCO	3148 Log Periodic RX	5/13/2027
8893	Com-Power	AHA-118 Horn	4/22/2027
Tower 2	ETS-Lindgren	2171B Boresight Tower	VBU
PJ2246	ETS-Lindgren	Shielded Enclosure	12/31/2024
8292	Omega	iBTHX-W Virtual	10/2/2024
HL5 Transceiver-GCL	Gentex	Default Receiver	VBU
6539	Stanley	Tape Measure	6/19/2026
H4554	87V	Multimeter	1/11/2025
S/N:419726	AIM-TTI	PL303-P Power Supply	VBU
SW30	Gentex	3m Chamber Software	3/31/2025
SW48	Gentex	Gentex Emissions Measurement Software	3/31/2025
Absorber 1	ETS-Lindgren	Absorbers	VBU

EMI Receiver Settings Emissions:

Detector Function: Peak
 Resolution Bandwidth: 120 kHz (below 1GHz)
 1MHz (above 1GHz)

EMI Receiver (in Spectrum Analyzer mode) Settings Occupied Bandwidth:

Detector: Peak
 Resolution Bandwidth: 1 MHz (to determine peak level)
 1 kHz (to determine occupied bandwidth)
 Video Bandwidth: 3 MHz (to determine peak level)
 3 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.10:2013 for stand-alone equipment. The 2-conductor harness was run down the edge of the test table to a power supply underneath the turntable.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 6.2.1.

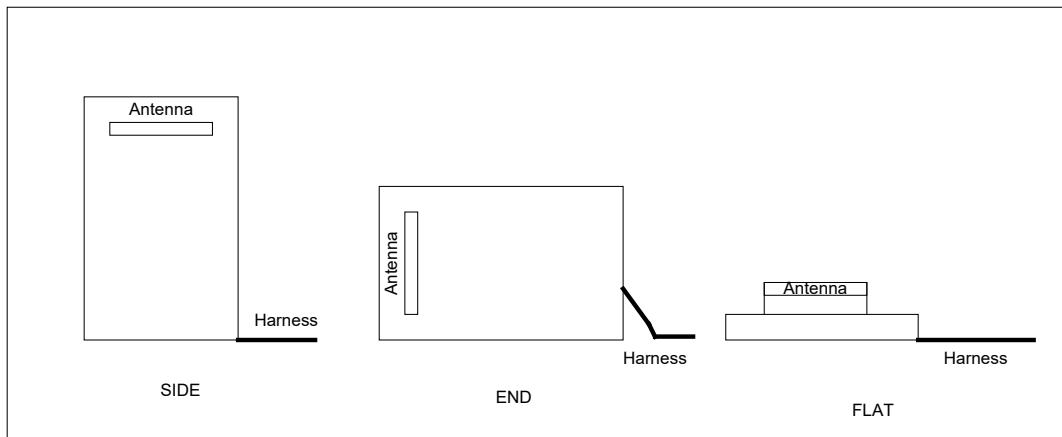


Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations. Radiated testing was performed in all three orientations or the in-vehicle position only.

6.6. Measured Data – See Appendix A

7. Verification of Non-Operation in Restricted Bands

An exercise was to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise, it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in RSS-210 Issue 9, Table 1 and 47 CFR 15.205.

This exercise is described as follows:

HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 440 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz

HomeLink will only transmit at frequencies it is able to train to therefore, to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, the Agilent 33120A signal generator was set up to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. It was then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, the various frequencies in the vicinity of the banned region boundaries were tested and verified that HomeLink trained when it saw a signal at a valid frequency and did not train when it saw a signal

at a banned frequency. In the instances where HomeLink trained to a valid frequency, it was then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore, HomeLink may not adhere to the specified limits with absolute precision. This is why the FCC banned frequencies are guard-banded by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, it guarantees that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain "harmonic avoidance frequency regions" which HomeLink will train to but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

FCC Banned Regions	Harmonic Avoidance Regions
(HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	(HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz

Frequency	Allowed/Banned	Trained/Would Not Train	Pass/Fail	Comments
285	banned	would not train	Pass	
285.5	allowed	would not train	Pass	Trained and Transmitted at 286 MHz
	(guard band			
	region)			
286	allowed	trained	Pass	Trained and Transmitted at 286 MHz
	(guard band			
	region)			
287	allowed	trained	Pass	Trained and Transmitted at 287 MHz
303.5	allowed	trained	Pass	Trained and Transmitted at 303.5 MHz
304	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	Trained and Transmitted at 307.5 MHz

GENTEX
CORPORATION

319	allowed	trained	Pass	Trained and Transmitted at 319 MHz
320	allowed	trained	Pass	Trained and Transmitted at 320 MHz
320.5	allowed	trained	Pass	Trained and Transmitted at 320.5 MHz
321	allowed	trained	Pass	Trained and Transmitted at 321 MHz
	(guard band			
	region)			
322	banned	would not train	Pass	
323	banned	would not train	Pass	
324	banned	would not train	Pass	
325	banned	would not train	Pass	
326	banned	would not train	Pass	
327	banned	would not train	Pass	
328	banned	would not train	Pass	
329	banned	would not train	Pass	
330	banned	would not train	Pass	
331	banned	would not train	Pass	
332	banned	would not train	Pass	
333	banned	would not train	Pass	
334	banned	would not train	Pass	
335	banned	would not train	Pass	
336	allowed	would not train	Pass	
	(guard band			
	region)			
337	allowed	trained	Pass	Trained and Transmitted at 337 MHz
	(guard band			
	region)			
338	allowed	trained	Pass	Trained and Transmitted at 338 MHz
398	allowed	trained	Pass	Trained and Transmitted at 398 MHz

GENTEX
CORPORATION

399	allowed	trained	Pass	While this is a valid frequency, HomeLink guard bands this region to ensure it doesn't train to 399.9 MHz DUT Trained to 399 MHz
	(guard band			
	region)			
399.5	allowed	would not train	Pass	While this is a valid frequency, HomeLink guard bands this region to ensure it doesn't train to 399.9 MHz
	(guard band			
	region)			
400	banned	would not train	Pass	
401	banned	would not train	Pass	
402	banned	would not train	Pass	
403	banned	would not train	Pass	
404	banned	would not train	Pass	
405	banned	would not train	Pass	
406	banned	would not train	Pass	
407	banned	would not train	Pass	
408	banned	would not train	Pass	
409	banned	would not train	Pass	
410	banned	would not train	Pass	
410.5	allowed	would not train	Pass	
	(guard band			
	region)			
411	allowed	trained	Pass	Trained and Transmitted at 411 MHz
	(guard band			
	region)			
411.5	allowed	trained	Pass	Trained and Transmitted at 411.5 MHz
412	allowed	trained	Pass	Trained and Transmitted at 412 MHz
439	allowed	trained	Pass	Trained and Transmitted at



439 MHz				
440	allowed	trained	Pass	Trained and Transmitted at 440 MHz
440.5	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
441	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
442	allowed	would not train	Pass	HomeLink only operates up to 440 MHz

8. Verification of De-activation after 5 seconds

The product Software Design team underwent an exercise to verify that the device was deactivated appropriately. This device stops transmitting after 1.099s once the activation button is released.

9. Formulas and Sample Calculations

9.1. Adjustment to account for duty cycle

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

Formula 1: FS (dBuV/m) = M(dBuV) + AF (dB/m) + CF (dB) – AG (dB)

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

Formula 2: Average Level(dBuV/m) = Peak Level (dBuV/m) + duty cycle factor(dB).

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30): duty cycle factor (dB) = $20 \cdot \log(0.3) = -10.46$

For 50% (0.50): duty cycle factor(dB) = 20*Log (0.5) = -6.02

For 80% (0.80): duty cycle factor(dB) = 20*Log (0.8) = -1.94

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 μ V/m), the adjusted level would be:

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

9.2. Calculation of ISED Limits from Table 4, RSS-210 and 47 CFR Part 15.231

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 μ V/m and 12500 μ V/m. The equation used to calculate the limit using this criterion is:

$$\text{FCC limit} = 41.67 * f - 7083.33$$

(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

$$\text{dB limit} = 20 * \log_{10}(\text{FCC limit in dBuV/m}) = 20 * \log_{10}(41.67 * f - 7083.33)$$

(\log_{10} is used to indicate the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 * \log_{10}(4917.6)$	= 73.8 dBuV/m
310MHz	$20 * \log_{10}(5834.4)$	= 75.3 dBuV/m
390MHz	$20 * \log_{10}(9168.0)$	= 79.2 dBuV/m
433MHz	$20 * \log_{10}(10959.8)$	= 80.8 dBuV/m

9.3 Antenna Gain

All measurements were performed radiated and therefore additional antenna gain documentation is not required.

Appendix A

1. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.10-2013 on the Gentex Corporation 3m test table.

* Measurements include Cable corrections and Antenna Factors

Measurement Settings:

Measurement Frequency: Below 1GHz
Span: 500kHz or greater
RBW: 100/120kHz VBW: 300kHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto

Measurement Frequency: Above 1GHz

Span: 500kHz or greater
RBW: 1MHz VBW: 3MHz or 3 x RBW
Sweep Time: 25ms
Attenuation: Auto

1.1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
288	Side	H	30	81.82	93.8	12.01	-10.5	71.4	73.8	2.47
288	Side	H	50	78.35	93.8	15.48	-6.0	72.3	73.8	1.50
288	Side	H	80	72.45	93.8	21.38	-1.9	70.5	73.8	3.32

1.2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
310	Side	H	30	83.25	95.3	12.07	-10.5	72.8	75.3	2.53
310	Side	H	50	78.78	95.3	16.54	-6.0	72.8	75.3	2.56
310	Side	H	80	74.40	95.3	20.92	-1.9	72.5	75.3	2.86



1.3. DUT Tuned to Fund 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
365	Side	H	30	83.11	98.2	15.09	-10.5	72.7	78.2	5.54
365	Side	H	50	77.90	98.2	20.30	-6.0	71.9	78.2	6.32
365	Side	H	80	74.17	98.2	24.03	-1.9	72.2	78.2	5.96

1.4. DUT Tuned to Fund 430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurem ent* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
430	Side	H	30	85.63	100.7	15.07	-10.5	75.2	80.7	5.52
430	Side	H	50	80.80	100.7	19.90	-6.0	74.8	80.7	5.92
430	Side	H	80	76.41	100.7	24.29	-1.9	74.5	80.7	6.22



1.5. DUT Tuned to Har_288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
576	Side	H	30	38.1	73.8	35.70	-10.5	27.6	53.8	26.16
576	Side	H	50	37.98	73.8	35.85	-6.0	32.0	53.8	21.87
576	Side	H	80	37.94	73.8	35.89	-1.9	36.0	53.8	17.83
864	Side	H	30	41.6	73.8	32.23	-10.5	31.1	53.8	22.69
864	Side	H	50	41.55	73.8	32.28	-6.0	35.5	53.8	18.30
864	Side	H	80	41.63	73.8	32.20	-1.9	39.7	53.8	14.14
1152	Side	V	30	31.1	74.0	42.90	-10.5	20.6	54.0	33.36
1152	Side	V	50	32.55	74.0	41.45	-6.0	26.5	54.0	27.47
1152	Side	V	80	30.45	74.0	43.55	-1.9	28.5	54.0	25.49
1440	Side	H	30	43.67	74.0	30.33	-10.5	33.2	54.0	20.79
1440	Side	H	50	41.23	74.0	32.77	-6.0	35.2	54.0	18.79
1440	Side	H	80	39.22	74.0	34.78	-1.9	37.3	54.0	16.72
1728	Side	H	30	38.26	74.0	35.74	-10.5	27.8	54.0	26.20
1728	Side	V	50	36.55	74.0	37.45	-6.0	30.5	54.0	23.47
1728	Side	V	80	35.41	74.0	38.59	-1.9	33.5	54.0	20.53
2016	Side	V	30	39.35	73.8	34.48	-10.5	28.9	53.8	24.94
2016	Side	V	50	36.25	73.8	37.58	-6.0	30.2	53.8	23.60
2016	Side	H	80	34.17	73.8	39.66	-1.9	32.2	53.8	21.60
2304	Side	H	30	35.15	74.0	38.85	-10.5	24.7	54.0	29.31
2304	Side	H	50	33.28	74.0	40.72	-6.0	27.3	54.0	26.74
2304	Side	H	80	31.78	74.0	42.22	-1.9	29.8	54.0	24.16
2592	Side	H	30	38.33	74.0	35.67	-10.5	27.9	54.0	26.13
2592	Side	H	50	36.25	74.0	37.75	-6.0	30.2	54.0	23.77
2592	Side	H	80	34.12	74.0	39.88	-1.9	32.2	54.0	21.82
2880	Side	H	30	35.87	74.0	38.13	-10.5	25.4	54.0	28.59
2880	Side	H	50	33.25	74.0	40.75	-6.0	27.2	54.0	26.77
2880	Side	H	80	31.54	74.0	42.46	-1.9	29.6	54.0	24.40

1.6. DUT Tuned to Har_310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
620	Side	H	30	39.01	75.3	36.29	-10.5	28.6	55.3	26.75
620	Side	H	50	39	75.3	36.30	-6.0	33.0	55.3	22.32
620	Side	H	80	38.9	75.3	36.40	-1.9	37.0	55.3	18.34
930	Side	H	30	43.09	74.0	30.91	-10.5	32.6	54.0	21.37
930	Side	H	50	43.12	74.0	30.88	-6.0	37.1	54.0	16.90
930	Side	H	80	43.05	74.0	30.95	-1.9	41.1	54.0	12.89
1240	Side	H	30	33.89	74.0	40.11	-10.5	23.4	54.0	30.57
1240	Side	H	50	32.54	74.0	41.46	-6.0	26.5	54.0	27.48
1240	Side	V	80	31.14	74.0	42.86	-1.9	29.2	54.0	24.80
1550	Side	H	30	42.61	74.0	31.39	-10.5	32.2	54.0	21.85
1550	Side	H	50	39.71	74.0	34.29	-6.0	33.7	54.0	20.31
1550	Side	V	80	37.72	74.0	36.28	-1.9	35.8	54.0	18.22
1860	Side	H	30	37.71	75.3	37.59	-10.5	27.3	55.3	28.05
1860	Side	H	50	35.22	75.3	40.08	-6.0	29.2	55.3	26.10
1860	Side	H	80	34.12	75.3	41.18	-1.9	32.2	55.3	23.12
2170	Side	H	30	38.96	74.0	35.04	-10.5	28.5	54.0	25.50
2170	Side	H	50	35.44	74.0	38.56	-6.0	29.4	54.0	24.58
2170	Side	V	80	34.78	74.0	39.22	-1.9	32.8	54.0	21.16
2480	Side	V	30	38.89	74.0	35.11	-10.5	28.4	54.0	25.57
2480	Side	V	50	35.21	74.0	38.79	-6.0	29.2	54.0	24.81
2480	Side	V	80	34.51	74.0	39.49	-1.9	32.6	54.0	21.43
2790	Side	H	30	37.51	74.0	36.49	-10.5	27.1	54.0	26.95
2790	Side	H	50	36.21	74.0	37.79	-6.0	30.2	54.0	23.81
2790	Side	H	80	35.4	74.0	38.60	-1.9	33.5	54.0	20.54
3100	Side	V	30	35.95	75.3	39.35	-10.5	25.5	55.3	29.81
3100	Side	H	50	35.11	75.3	40.19	-6.0	29.1	55.3	26.21
3100	Side	V	80	32.54	75.3	42.76	-1.9	30.6	55.3	24.70

1.7. DUT Tuned to Har_365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
730	Side	H	30	41.15	78.2	37.05	-10.5	30.7	58.2	27.51
730	Side	V	50	40.98	78.2	37.22	-6.0	35.0	58.2	23.24
730	Side	V	80	41.04	78.2	37.16	-1.9	39.1	58.2	19.10
1095	Side	V	30	46.84	74.0	27.16	-10.5	36.4	54.0	17.62
1095	Side	H	50	44.74	74.0	29.26	-6.0	38.7	54.0	15.28
1095	Side	H	80	42.94	74.0	31.06	-1.9	41.0	54.0	13.00
1460	Side	H	30	43.43	74.0	30.57	-10.5	33.0	54.0	21.03
1460	Side	H	50	41.95	74.0	32.05	-6.0	35.9	54.0	18.07
1460	Side	H	80	39.93	74.0	34.07	-1.9	38.0	54.0	16.01
1825	Side	H	30	45.91	74.0	28.09	-10.5	35.5	54.0	18.55
1825	Side	H	50	43.58	74.0	30.42	-6.0	37.6	54.0	16.44
1825	Side	H	80	41.83	74.0	32.17	-1.9	39.9	54.0	14.11
2190	Side	H	30	39.34	74.0	34.66	-10.5	28.9	54.0	25.12
2190	Side	H	50	37.45	74.0	36.55	-6.0	31.4	54.0	22.57
2190	Side	H	80	35.21	74.0	38.79	-1.9	33.3	54.0	20.73
2555	Side	H	30	41.64	74.0	32.36	-10.5	31.2	54.0	22.82
2555	Side	H	50	40.39	74.0	33.61	-6.0	34.4	54.0	19.63
2555	Side	H	80	37.32	74.0	36.68	-1.9	35.4	54.0	18.62
2920	Side	H	30	40.81	74.0	33.19	-10.5	30.4	54.0	23.65
2920	Side	H	50	40.32	74.0	33.68	-6.0	34.3	54.0	19.70
2920	Side	H	80	38.45	74.0	35.55	-1.9	36.5	54.0	17.49
3285	Side	H	30	48.89	74.0	25.11	-10.5	38.4	54.0	15.57
3285	Side	H	50	42.41	74.0	31.59	-6.0	36.4	54.0	17.61
3285	Side	H	80	40.83	74.0	33.17	-1.9	38.9	54.0	15.11
3650	Side	H	30	41.86	74.0	32.14	-10.5	31.4	54.0	22.60
3650	Side	H	50	38.56	74.0	35.44	-6.0	32.5	54.0	21.46
3650	Side	H	80	35.77	74.0	38.23	-1.9	33.8	54.0	20.17

1.8. DUT Tuned to Har_430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
860	Side	V	30	46.05	80.8	34.75	-10.5	35.6	60.8	25.21
860	Side	H	50	45.41	80.8	35.39	-6.0	39.4	60.8	21.41
860	Side	H	80	44.15	80.8	36.65	-1.9	42.2	60.8	18.59
1290	Side	V	30	47.81	74.0	26.19	-10.5	37.4	54.0	16.65
1290	Side	V	50	47	74.0	27.00	-6.0	41.0	54.0	13.02
1290	Side	V	80	46.27	74.0	27.73	-1.9	44.3	54.0	9.67
1720	Side	H	30	42.57	74.0	31.43	-10.5	32.1	54.0	21.89
1720	Side	H	50	40.22	74.0	33.78	-6.0	34.2	54.0	19.80
1720	Side	H	80	37.41	74.0	36.59	-1.9	35.5	54.0	18.53
2150	Side	H	30	44.38	80.8	36.42	-10.5	33.9	60.8	26.88
2150	Side	H	50	41.3	80.8	39.50	-6.0	35.3	60.8	25.52
2150	Side	H	80	38.78	80.8	42.02	-1.9	36.8	60.8	23.96
2580	Side	H	30	36.11	74.0	37.89	-10.5	25.7	54.0	28.35
2580	Side	H	50	35.21	74.0	38.79	-6.0	29.2	54.0	24.81
2580	Side	H	80	34.15	74.0	39.85	-1.9	32.2	54.0	21.79
3010	Side	H	30	49.26	74.0	24.74	-10.5	38.8	54.0	15.20
3010	Side	H	50	46.85	74.0	27.15	-6.0	40.8	54.0	13.17
3010	Side	H	80	45.5	74.0	28.50	-1.9	43.6	54.0	10.44
3440	Side	V	30	42.79	74.0	31.21	-10.5	32.3	54.0	21.67
3440	Side	V	50	41.33	74.0	32.67	-6.0	35.3	54.0	18.69
3440	Side	H	80	40.78	74.0	33.22	-1.9	38.8	54.0	15.16
3870	Side	H	30	43.44	74.0	30.56	-10.5	33.0	54.0	21.02
3870	Side	H	50	42.68	74.0	31.32	-6.0	36.7	54.0	17.34
3870	Side	H	80	40.88	74.0	33.12	-1.9	38.9	54.0	15.06
4300	Side	H	30	41.87	74.0	32.13	-10.5	31.4	54.0	22.59
4300	Side	H	50	38.55	74.0	35.45	-6.0	32.5	54.0	21.47
4300	Side	H	80	39.65	74.0	34.35	-1.9	37.7	54.0	16.29

2. Pulsed Operation

The Homelink[©] transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles are provided here. Measurements were taken at 288 MHz with the span set to zero on the R&S ESR26 EMI Receiver. The modulation frequency is 500Hz.


2.1. 30% Duty Cycle



2.2. 50% Duty Cycle



2.3. 80% Duty Cycle

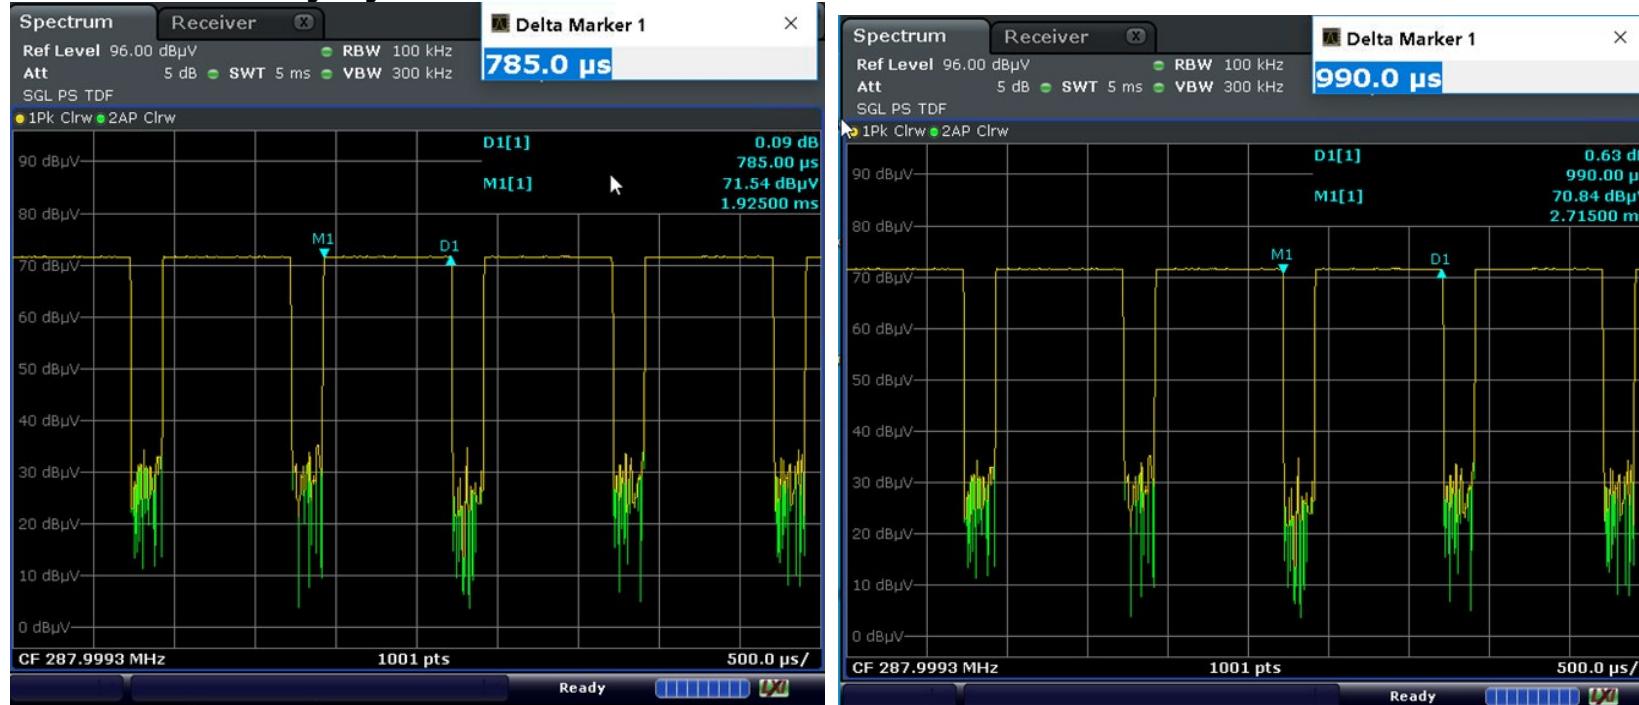

3. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, 365 and 430MHz. The occupied bandwidth was determined using the -20dB and 99% measurement methods.

3.1. -20dB Occupied Bandwidth Measurement


-20dB Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	12.50	720	707.50
	50	7.40	720	712.60
	80	7.60	720	712.40
310	30	12.48	775	762.53
	50	7.37	775	767.63
	80	7.57	775	767.43
365	30	12.38	912.5	900.13
	50	7.38	912.5	905.13
	80	7.60	912.5	904.90
430	30	12.48	1082.5	1070.03
	50	7.38	1082.5	1075.13
	80	7.58	1082.5	1074.93

3.2. 99% Occupied Bandwidth Measurement


99% Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	56.70	720	663.30
	50	29.13	720	690.88
	80	27.75	720	692.25
310	30	56.05	775	718.95
	50	27.15	775	747.85
	80	27.00	775	748.00
365	30	54.33	912.5	858.18
	50	29.98	912.5	882.53
	80	26.98	912.5	885.53
430	30	54.60	1082.5	1027.90
	50	27.40	1082.5	1055.10
	80	26.75	1082.5	1055.75

3.3. Occupied Bandwidth Worse-Case Screenshot

20dB BW

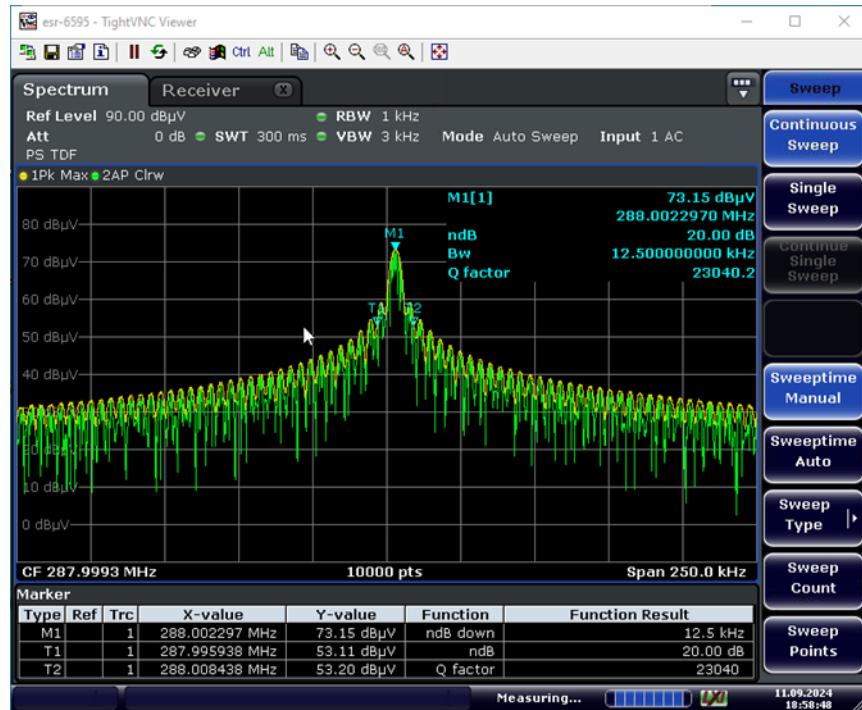


99% BW

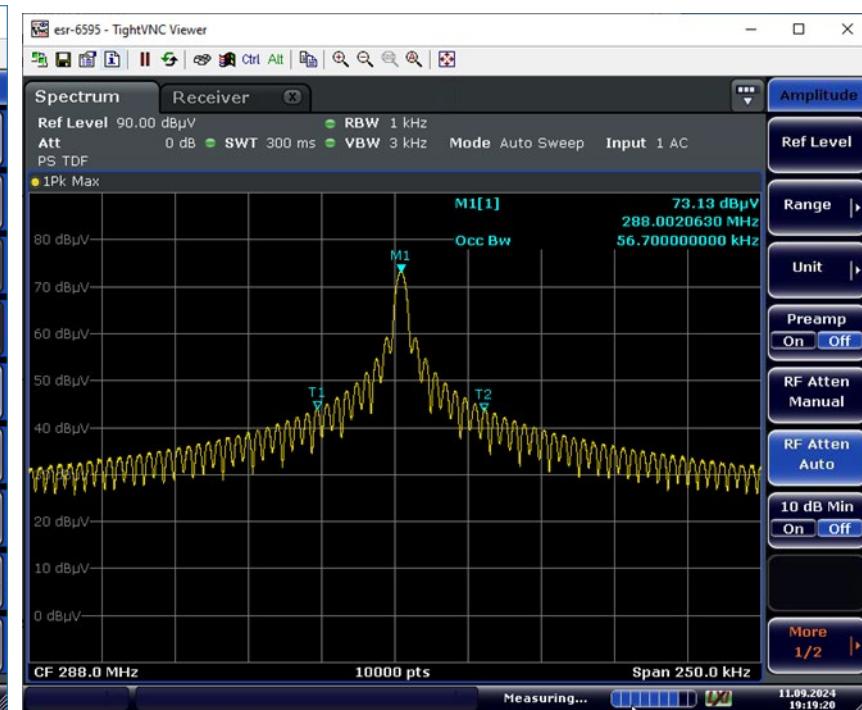

4. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at the peak frequency, 288MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

4.1. Plot of output power over supply voltage

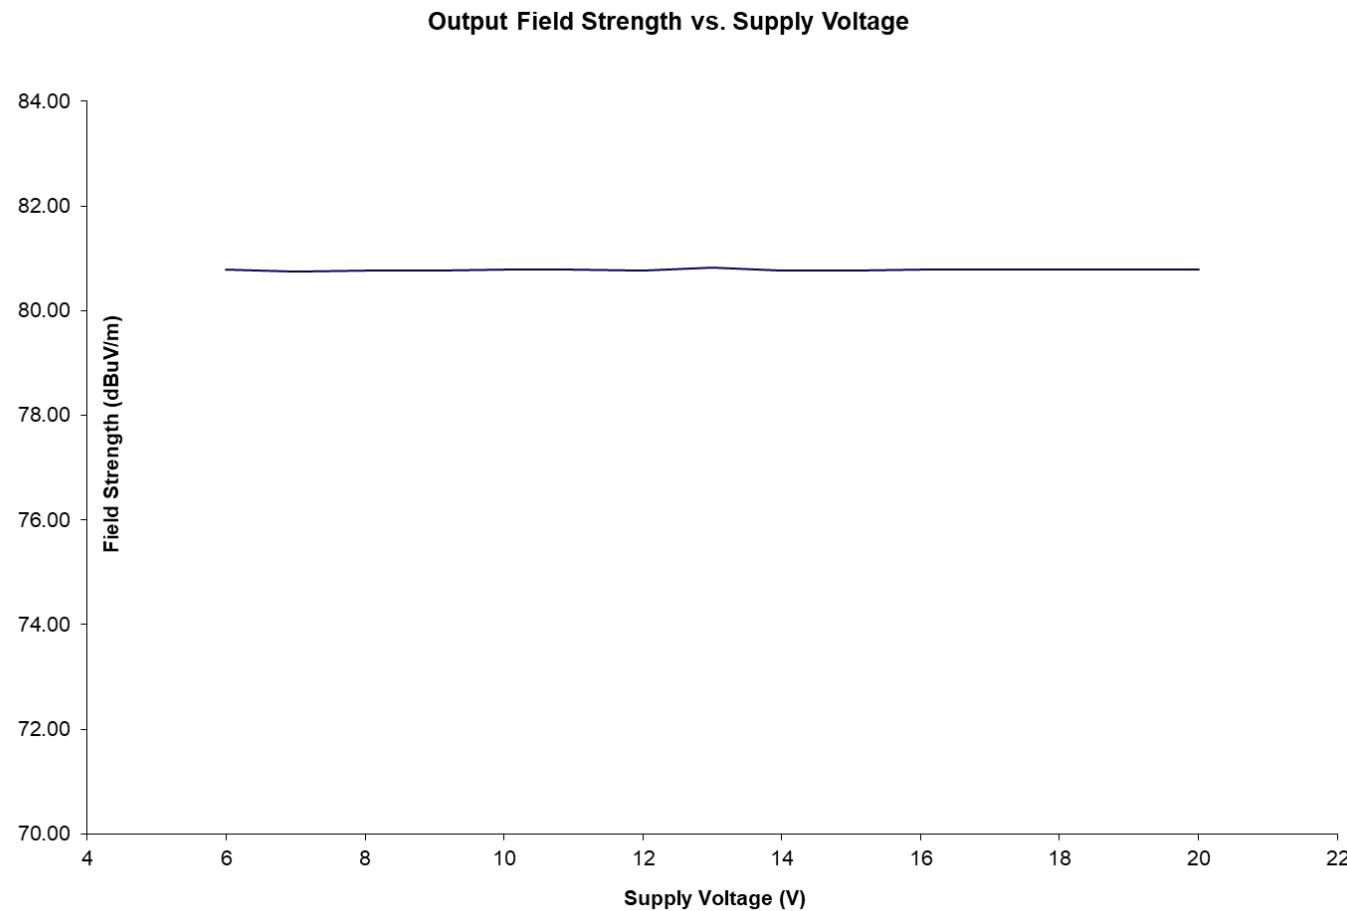

4.2. Output Power as a Function of Supply Voltage

Voltage	Field Strength (dBuV/m)
6	80.78
7	80.75
8	80.77
9	80.77
10	80.79
11	80.78
12	80.77
13	80.82
14	80.76
15	80.77
16	80.79
17	80.78
18	80.78
19	80.78
20	80.78