

**Engineering Test Report No. 2401893-01 Rev. B**

Report Date	February 19, 2025	
Manufacturer Name	Gentex Corporation	
Manufacturer Address	380 E. Riley Street Zeeland, MI 49464	
Model No.	Connected Smoke CO Base – PL1AS	
Date Received	August 30, 2024	
Test Dates	September 3, 2024 – January 16, 2025	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249 Innovation, Science, and Economic Development Canada, RSS-210 Innovation, Science, and Economic Development Canada, RSS-GEN	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Nathaniel Bouchie	
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	3675160	

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249 and Innovation, Science, and Economic Development Canada, RSS-210 and RSS-Gen test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
2.1.	Scope of Tests .....	4
2.2.	Purpose .....	4
2.3.	Identification of the EUT .....	4
3.	Power Input .....	4
4.	Grounding .....	4
5.	Support Equipment .....	4
6.	Interconnect Leads .....	5
7.	Modifications Made to the EUT .....	5
8.	Modes of Operation .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	5
11.	Deviation, Additions to, or Exclusions from Test Specifications .....	5
12.	Laboratory Conditions .....	6
13.	Summary .....	6
14.	Sample Calculations .....	6
15.	Statement of Conformity .....	6
16.	Certification .....	6
17.	Photographs of EUT .....	7
18.	Equipment List .....	9
19.	Block Diagram of Test Setup .....	10
20.	Powerline Conducted Emissions Test (AC Mains) .....	11
21.	Duty Cycle Factor Measurements .....	27
22.	Case Spurious Radiated Emissions .....	34
23.	Band-Edge Compliance .....	47
24.	Scope of Accreditation .....	51

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
–	11 SEP 2024	Initial Release of Engineering Test Report No. 2401893-01
A	20 FEB 2025 By NDB	<ul style="list-style-type: none"><li>– Throughout report: Updated report number to 2401893-01 Rev. A in the header. Changed Mode 1 from “Tx @ 5725.1MHz, Ch 85” to “Tx @ 5727.2MHz, Ch 87”. Changed Mode 3 from “Tx @ 5874.5MHz, Ch 330” to “Tx @ 5872MHz, Ch 327”.</li><li>– Cover Page: Changed final date of testing to January 16, 2025.</li><li>– Section 8: Changed Low transmit frequency from 5725.1MHz to 5727.2MHz. Changed High transmit frequency from 5874.5MHz to 5872MHz.</li><li>– Section 20, Pages 13-14: Updated CE photographs for new EUT cable routing.</li><li>– Section 20, Pages 15-26: Updated CE measurements for new EUT cable routing.</li><li>– Section 21, Pages 28-33: Updated Duty Cycle plots for Low and High frequencies. Updated Duty Cycle calculations for Low and High frequencies.</li><li>– Section 22, Pages 36-40: Updated RE photographs to reflect new EUT orientation.</li><li>– Section 22, Pages 41-46: Updated RE measurements to reflect new EUT orientation.</li><li>– Added Section 23.</li></ul>
B	4 MAR 2025 By NDB	<ul style="list-style-type: none"><li>– Throughout report: Updated report number to 2401893-01 Rev. B in the header.</li><li>– Section 23: Added Peak Band Edge measurements.</li></ul>

## 2. Introduction

### 2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Gentex Corporation Connected Smoke CO Base (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Gentex Corporation located in Zeeland, MI.

### 2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.249.

The test series was also performed to determine if the EUT meets the RF emission requirements of the Industry Canada Radio Standards Specification RSS-Gen and Industry Canada Radio Standards Specification RSS-210 for Transmitters.

Testing was performed in accordance with ANSI C63.10-2013.

### 2.3. Identification of the EUT

The EUT was identified as follows:

EUT Identification	
Product Description	Connected Smoke CO Base
Model/Part No.	PL1AS
S/N	918-0022-002
Band of Operation	5725-5875 MHz
Modulation Type	CW
Software/Firmware Version	316-1132-040209
Rated Output Power	-4dBm
Antenna Type	Patch Antenna
Size of EUT	5.75 in x 5.75 in x 1.75 in
FCC ID Number	2AVK2-AT5815B

The EUT listed above was used throughout the test series.

## 3. Power Input

The EUT obtained 120VAC 60Hz power via a 3-wire unshielded power cord.

## 4. Grounding

The EUT was connected to ground through the third wire of its input power cord.

## 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Support Laptop	---	TR-13015

## 6. Interconnect Leads

The following interconnect cables were submitted with the EUT:

Item	Description
USB	Connects laptop to EUT

## 7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

## 8. Modes of Operation

Mode	Description
Tx @ 5727.2MHz, Ch 87	The EUT was configured to transmit on channel 87, which corresponded to 5727.2MHz.
Tx @ 5800MHz, Ch 208	The EUT was configured to transmit on channel 208, which corresponded to 5800MHz.
Tx @ 5872MHz, Ch 327	The EUT was configured to transmit on channel 327, which corresponded to 5872MHz.

## 9. Test Specifications

The tests were performed to selected portions of, and in accordance with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications.

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- RSS-210 Issue 10, December 2019, "License-Exempt Radio Apparatus: Category I Equipment"
- RSS-Gen Issue 5, March 2019, Amendment 1, Innovation, Science, and Economic Development Canada, "Spectrum Management and Telecommunications, Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

## 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Gentex Corporation and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249, Innovation, Science, and Economic Development Canada, RSS-210, and ANSI C63.4-2014 specifications.

## 11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

## 12. Laboratory Conditions

Ambient Parameters	Value
Temperature	23°C
Relative Humidity	42%
Atmospheric Pressure	1027mb

## 13. Summary

The following EMC tests were performed and the results are shown below:

Test Description	Requirements	Test Methods	Results
Powerline Conducted Emissions Test (AC Mains)	FCC 15C RSS-GEN	ANSI C63.10: 2013	Conforms
Duty Cycle Factor Measurements	FCC 15C ISED RSS-210	ANSI C63.10: 2013	Conforms
Case Spurious Radiated Emissions	FCC 15C ISED RSS-210	ANSI C63.10: 2013	Conforms
Band-Edge Compliance	FCC 15C ISED RSS-210	ANSI C63.10: 2013	Conforms

## 14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dBuV)} = MTR \text{ (dBuV)} + CF \text{ (dB)}.$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS \text{ (dBuV/m)} = MTR \text{ (dBuV)} + AF \text{ (dB/m)} + CF \text{ (dB)} + (-PA \text{ (dB)}) + DC \text{ (dB)}$$

To convert the Field Strength dBuV/m term to uV/m, the dBuV/m is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in uV/m terms.

$$\text{Formula 2: } FS \text{ (uV/m)} = \text{AntiLog} [(FS \text{ (dBuV/m)})/20]$$

## 15. Statement of Conformity


The Gentex Corporation Connected Smoke CO Base, Model No. PL1AS, Serial No. 918-0022-002, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249 and Innovation, Science, and Economic Development Canada, RSS-210.

## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.249 and Innovation, Science, and Economic Development Canada, RSS-210 test specifications. The data presented in this test report pertains to the EUT as received by the customer on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 17. Photographs of EUT



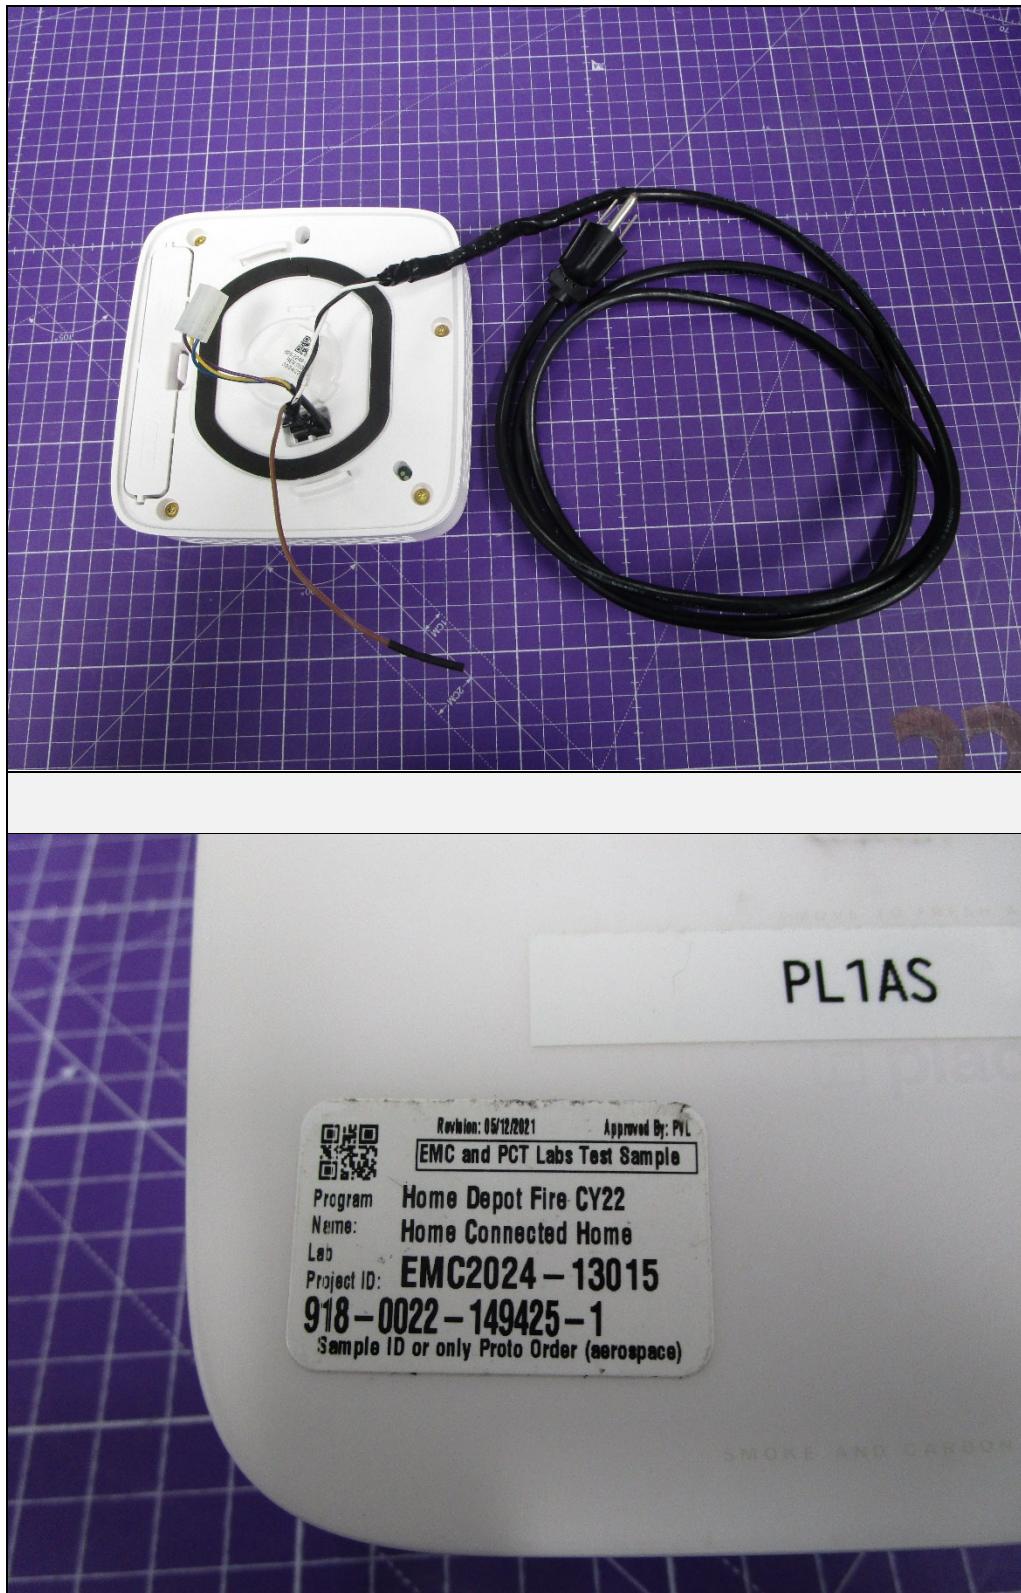

## 18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW18	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G-3R0-10-12-SFF	PL34312/2148	18-26.5GHZ	2/23/2024	2/23/2025
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	3/20/2024	3/20/2025
APW17	PREAMPLIFIER (26.5-40GHZ)	PLANAR ELECTRONICS	PE2-36-26D540G-5R0-10-12-292FF	PL30297/2039	26.5-40GHz	06/11/2024	06/11/2025
CDZ4	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
GRB0	1MHZ, LISN SIGNAL CHECKER	ELITE	LISNCHKR1M	1	1MHZ	02/11/2025	02/11/2027
MEA9	MICRO-OHM METER	KEITHLEY	580	---	10UOHM-200KOHM	11/30/2024	11/30/2025
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NHH1	STANDARD GAIN HORN ANTENNA	NARDA	V637	---	26.5-40GHz	NOTE 1	
NSDS1	UNIVERSAL SPHERICAL DIPOLE SOURCE	AET	USDS-H	AET-1116		NOTE 1	
NTA3	BILOG ANTENNA	TESEQ	6112D	32853	25-2000MHz	10/03/2024	10/03/2026
NWQ2	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS LINDGREN	3117	66659	1GHZ-18GHZ	4/26/2024	4/26/2026
PLF2	CISPR16 50UH LISN	ELITE	CISPR16/70A	002	150kHz-30MHz	3/26/2024	3/26/2025
PLF4	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	150kHz-30MHz	3/26/2024	3/26/2025
R21F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHz-18GHz	3/1/2024	3/1/2025
R23P	ROOM 23			001	---	CNR	
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2Hz-44GHz	3/7/2024	3/7/2025
SHC2	Power Supplies	HENGFU	HF60W-SL-24	A11372702	24V	NOTE 1	
T1EF	10DB 25W ATTENUATOR	WEINSCHEL	46-10-34	CD3550	DC-18GHz	1/3/2024	1/3/2026
VBR8	COMMERCIAL CONDUCTED EMISSIONS.EXE	ELITE				N/A	
VBV2	COMMERCIAL RADIATED EMISSIONS.EXE	ELITE		---	---	N/A	
XLT18	5W, 50Ω TERMINATION	JFW INDUSTRIES	50T-199 N M	---	DC-18 GHz	12/20/2023	12/20/2025
XPQ5	FILTER	K&L MICROWAVE	11SH10-9000/U2000-O/O	1	5000-5800 MHZ	9/14/2023	9/14/2025


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## 19. Block Diagram of Test Setup

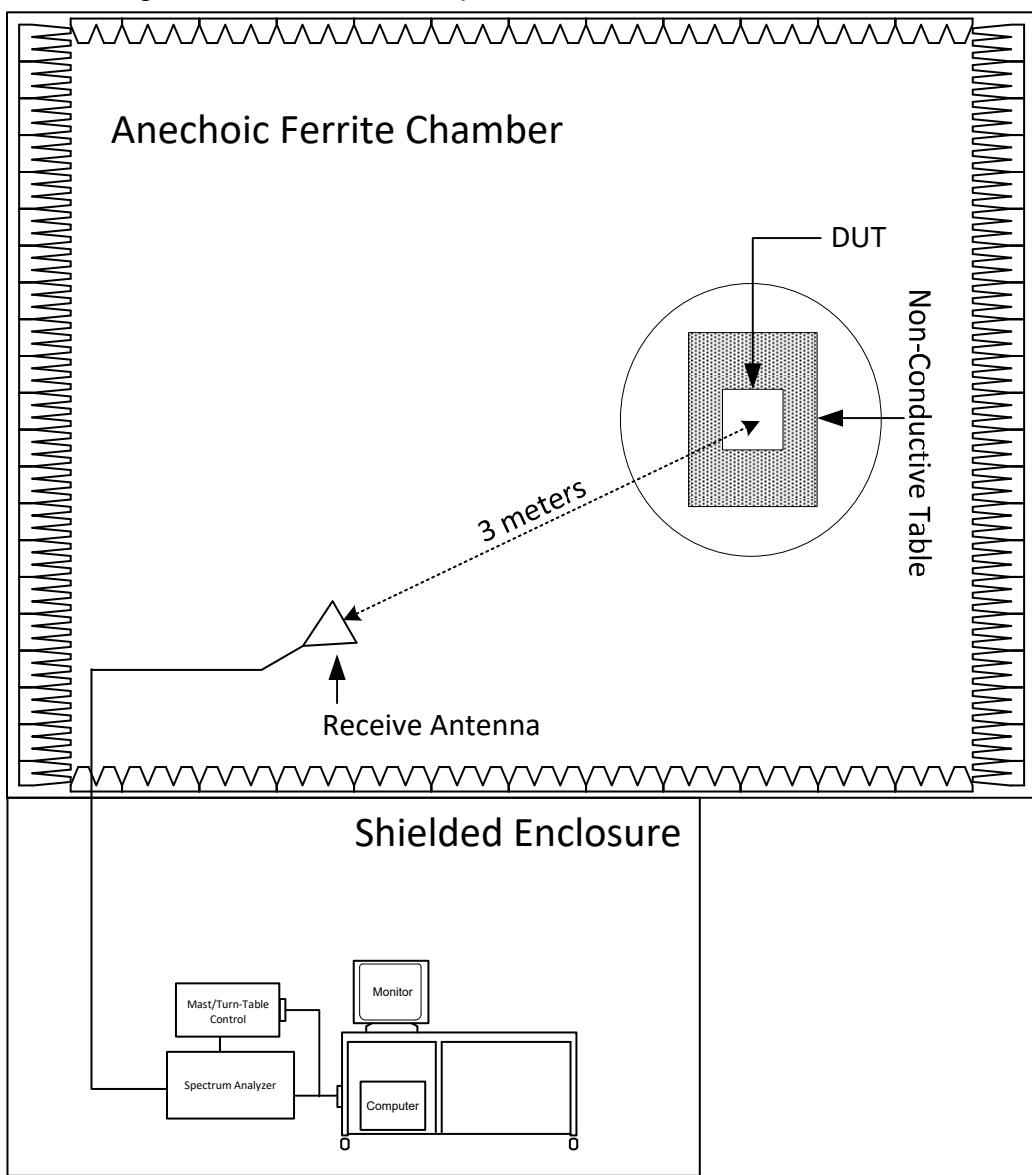

## Radiated Measurements Test Setup

## 20. Powerline Conducted Emissions Test (AC Mains)

Test Information	
Manufacturer	Gentex Corporation
Product	Connected Smoke CO Base
Model	PL1AS
Serial No	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87 Tx OFF

Test Setup Details	
Setup Format	Tabletop
Type of Test Site	Reverberation Chamber
Test site used	R23P
Note	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7

Requirements			
All radio frequency voltages on the power lines for any frequency or frequencies of an intentional radiator shall not exceed the limits in the following table:			
Frequency of Emission (MHz)		Conducted Limits (dB $\mu$ V)	
		Quasi-peak	Average
0.15-05	66 to 56*	56-46*	
0.5-5	56	46	
5-30	60	50	

### Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- 1) The EUT was operated in the Tx @ 5727.2MHz, Ch 87 mode.
- 2) Measurements were first made on the Voltage high line.
- 3) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- 7) Steps (3) through (6) were repeated on the Voltage return line.
- 8) Steps (2) through (7) were repeated with the EUT operated in the Tx OFF mode.



Test Setup for Powerline Conducted Emissions Test



Test Setup for Powerline Conducted Emissions Test



Test Setup for Powerline Conducted Emissions Test



Test Setup for Powerline Conducted Emissions Test

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Significant Emissions Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx OFF  
 Line Tested : High, PLF4  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 16, 2025 07:52:51 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.150	58.8	66.0		29.1	56.0	
0.159	58.1	65.5		28.6	55.5	
0.168	57.4	65.1		27.1	55.1	
0.177	57.3	64.6		26.1	54.6	
0.186	56.8	64.2		25.5	54.2	
0.195	56.4	63.8		25.2	53.8	
0.204	56.1	63.4		24.8	53.4	
0.213	55.7	63.1		24.4	53.1	
0.222	55.2	62.7		24.0	52.7	
0.231	54.6	62.4		23.7	52.4	
0.240	54.4	62.1		23.3	52.1	
0.249	54.1	61.8		23.1	51.8	
0.258	53.5	61.5		22.9	51.5	
0.267	53.6	61.2		22.8	51.2	
0.283	52.5	60.7		22.1	50.7	
0.292	52.2	60.5		21.9	50.5	
0.301	52.3	60.2		21.8	50.2	
0.310	51.9	60.0		21.7	50.0	
0.319	51.5	59.7		21.6	49.7	
0.328	51.1	59.5		21.5	49.5	
0.346	50.2	59.1		20.8	49.1	
0.364	50.0	58.6		20.6	48.6	


Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.378	49.8	58.3		20.5	48.3	
0.400	49.1	57.9		20.2	47.9	
0.423	48.8	57.4		19.6	47.4	
0.432	48.5	57.2		19.5	47.2	
0.441	48.3	57.1		19.5	47.1	
0.454	48.7	56.8		19.0	46.8	
0.477	47.6	56.4		18.9	46.4	
0.486	47.5	56.2		18.8	46.2	
0.495	47.4	56.1		18.8	46.1	
0.505	46.6	56.0		18.5	46.0	
0.514	46.6	56.0		18.5	46.0	
0.532	46.4	56.0		18.5	46.0	
0.563	46.2	56.0		18.1	46.0	
0.572	46.1	56.0		18.0	46.0	
0.792	43.2	56.0		17.0	46.0	
1.615	18.3	56.0		10.4	46.0	
2.345	16.9	56.0		9.2	46.0	
3.760	16.7	56.0		9.0	46.0	
5.000	16.3	56.0		8.6	46.0	
9.932	15.2	60.0		8.1	50.0	
29.992	21.3	60.0		12.8	50.0	

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Cumulative Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx OFF  
 Line Tested : High, PLF4  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 16, 2025 07:52:51 AM

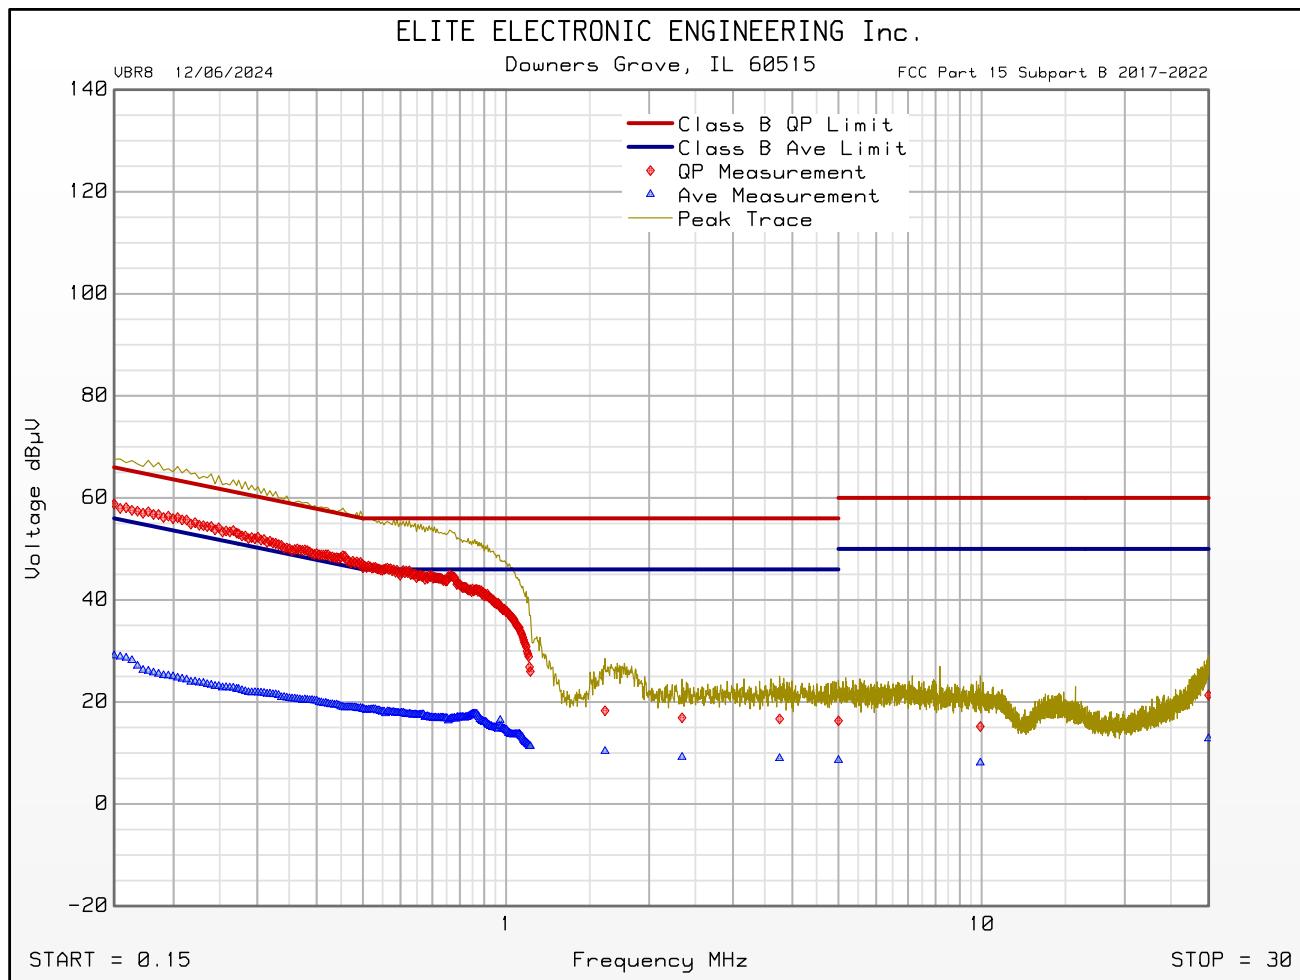

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Significant Emissions Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx OFF  
 Line Tested : Neutral, PLF2  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 16, 2025 07:07:53 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.150	57.3	66.0		29.4	56.0	
0.168	56.5	65.1		28.3	55.1	
0.177	56.1	64.6		26.3	54.6	
0.186	55.1	64.2		26.1	54.2	
0.195	54.3	63.8		26.1	53.8	
0.204	54.6	63.4		25.8	53.4	
0.213	53.9	63.1		24.7	53.1	
0.222	53.5	62.7		24.3	52.7	
0.231	53.4	62.4		24.1	52.4	
0.240	52.9	62.1		23.8	52.1	
0.249	52.4	61.8		23.8	51.8	
0.258	52.1	61.5		24.1	51.5	
0.267	51.7	61.2		24.0	51.2	
0.274	51.6	61.0		23.3	51.0	
0.283	51.3	60.7		22.8	50.7	
0.292	50.6	60.5		22.7	50.5	
0.301	50.5	60.2		22.7	50.2	
0.432	47.2	57.2		20.4	47.2	
0.518	46.2	56.0		19.5	46.0	
0.527	46.3	56.0		19.6	46.0	
0.536	46.2	56.0		19.4	46.0	
0.545	46.0	56.0		18.9	46.0	


Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.797	42.7	56.0		21.4	46.0	
1.426	22.4	56.0		13.6	46.0	
2.259	21.2	56.0		11.8	46.0	
4.498	17.4	56.0		9.2	46.0	
5.000	16.6	56.0		8.9	46.0	
10.126	15.6	60.0		8.1	50.0	
29.650	19.5	60.0		11.4	50.0	

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Cumulative Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx OFF  
 Line Tested : Neutral, PLF2  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 16, 2025 07:07:53 AM

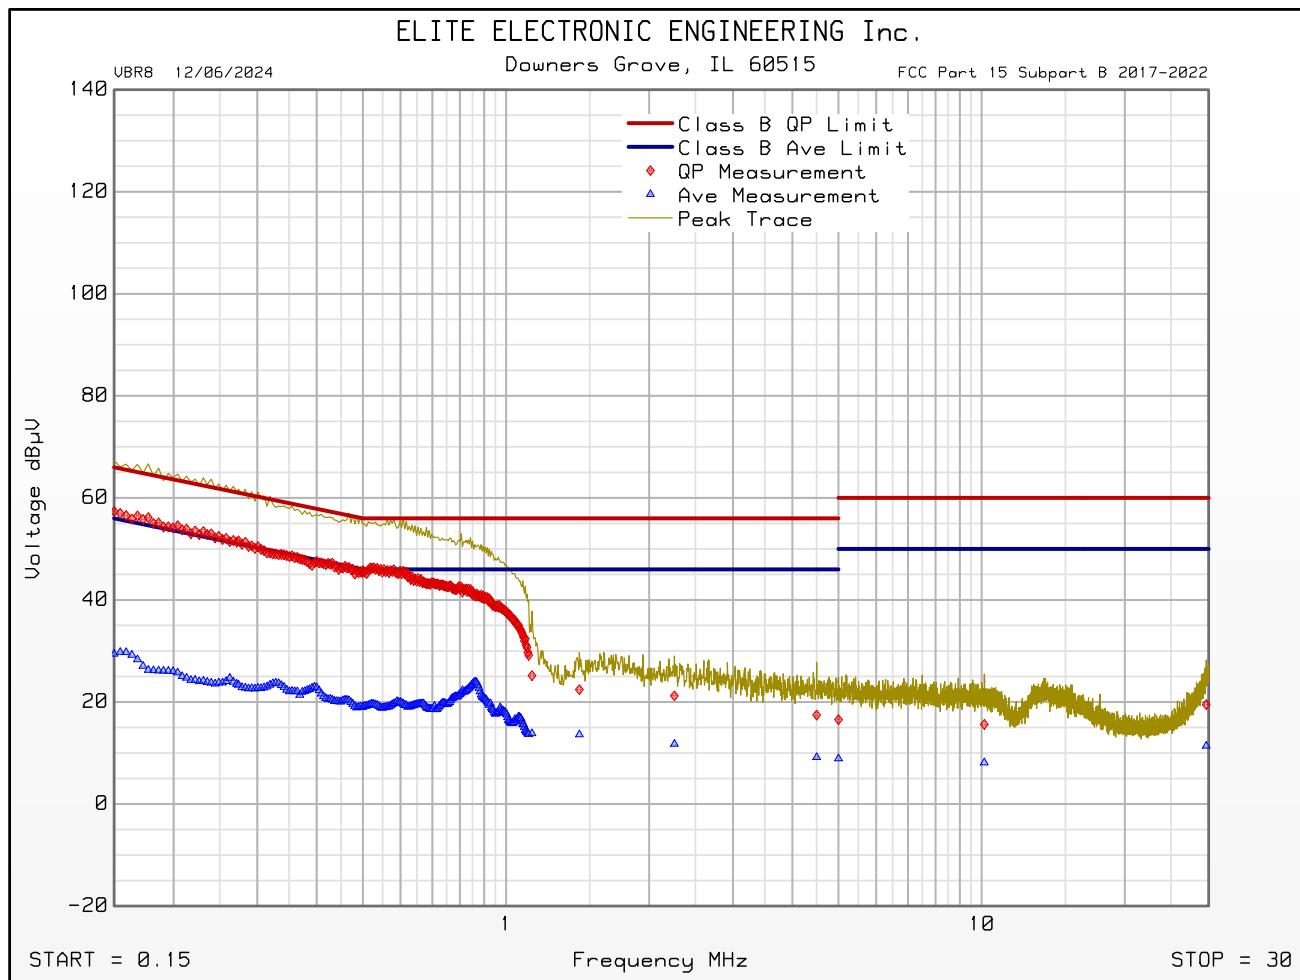

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Significant Emissions Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx ON  
 Line Tested : High, PLF4  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 15, 2025 03:16:02 PM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.150	60.5	66.0		30.2	56.0	
0.164	59.8	65.3		28.9	55.3	
0.173	59.4	64.8		27.8	54.8	
0.182	59.1	64.4		27.1	54.4	
0.191	58.6	64.0		26.9	54.0	
0.209	57.5	63.3		26.0	53.3	
0.218	57.1	62.9		25.6	52.9	
0.231	56.4	62.4		25.2	52.4	
0.249	55.7	61.8		24.6	51.8	
0.258	55.2	61.5		24.5	51.5	
0.272	54.7	61.1		24.0	51.1	
0.297	53.6	60.3		23.2	50.3	
0.315	53.3	59.9		23.0	49.9	
0.328	52.8	59.5		23.1	49.5	
0.337	52.5	59.3		22.8	49.3	
0.346	52.4	59.1		22.2	49.1	
0.364	51.3	58.6		21.7	48.6	
0.378	51.5	58.3		21.9	48.3	
0.391	50.7	58.0		22.0	48.0	
0.409	49.9	57.7		21.0	47.7	
0.427	50.0	57.3		20.6	47.3	
0.436	49.5	57.1		20.3	47.1	


Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.450	49.5	56.9		20.3	46.9	
0.472	48.8	56.5		19.8	46.5	
0.495	48.5	56.1		19.3	46.1	
0.514	47.9	56.0		19.3	46.0	
0.527	47.7	56.0		19.1	46.0	
0.541	47.8	56.0		19.1	46.0	
0.554	47.4	56.0		19.0	46.0	
0.563	47.3	56.0		18.9	46.0	
0.572	47.4	56.0		18.9	46.0	
0.590	47.4	56.0		19.1	46.0	
0.599	46.8	56.0		18.9	46.0	
0.613	46.7	56.0		18.6	46.0	
0.626	46.8	56.0		18.5	46.0	
0.649	46.5	56.0		18.6	46.0	
0.662	46.5	56.0		18.6	46.0	
0.797	44.3	56.0		18.8	46.0	
1.773	20.0	56.0		9.9	46.0	
2.313	16.0	56.0		8.9	46.0	
3.535	15.2	56.0		8.6	46.0	
5.837	14.9	60.0		7.9	50.0	
9.883	13.4	60.0		6.7	50.0	
26.014	23.8	60.0		14.9	50.0	

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Cumulative Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx ON  
 Line Tested : High, PLF4  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 15, 2025 03:16:02 PM

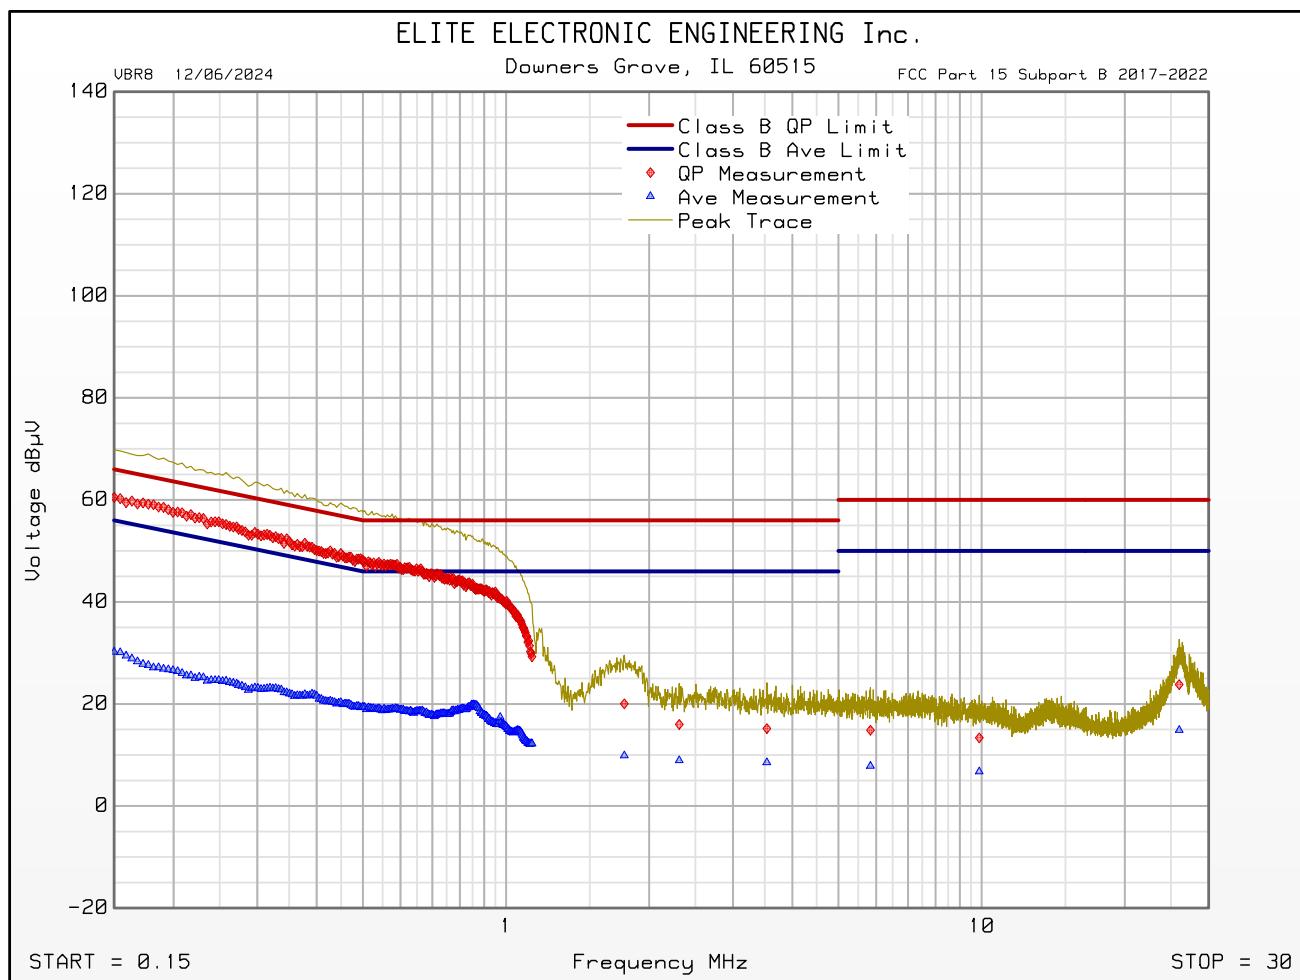

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Significant Emissions Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx ON  
 Line Tested : Neutral, PLF2  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 15, 2025 03:29:47 PM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.150	60.5	66.0		31.0	56.0	
0.168	59.3	65.1		29.2	55.1	
0.177	58.9	64.6		27.3	54.6	
0.191	58.5	64.0		27.8	54.0	
0.200	58.1	63.6		27.4	53.6	
0.218	57.0	62.9		25.8	52.9	
0.227	56.6	62.6		25.6	52.6	
0.240	56.1	62.1		25.4	52.1	
0.249	55.6	61.8		25.2	51.8	
0.272	54.9	61.1		24.9	51.1	
0.292	54.2	60.5		24.1	50.5	
0.301	54.0	60.2		24.0	50.2	
0.315	53.5	59.9		24.4	49.9	
0.333	53.0	59.4		24.8	49.4	
0.346	52.6	59.1		23.5	49.1	
0.355	52.4	58.8		23.2	48.8	
0.369	52.0	58.5		23.2	48.5	
0.400	51.3	57.9		23.2	47.9	
0.414	50.6	57.6		22.1	47.6	
0.427	50.4	57.3		21.7	47.3	
0.445	50.2	57.0		21.3	47.0	
0.454	50.0	56.8		21.4	46.8	


Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.481	49.6	56.3		20.4	46.3	
0.500	49.2	56.0		20.4	46.0	
0.514	48.9	56.0		20.7	46.0	
0.523	49.0	56.0		20.7	46.0	
0.536	48.7	56.0		20.5	46.0	
0.550	48.4	56.0		20.1	46.0	
0.563	48.5	56.0		20.2	46.0	
0.590	48.0	56.0		20.9	46.0	
0.604	47.8	56.0		20.8	46.0	
0.631	47.5	56.0		20.1	46.0	
0.644	47.3	56.0		20.3	46.0	
0.653	47.2	56.0		20.5	46.0	
0.667	47.0	56.0		20.6	46.0	
0.680	46.6	56.0		19.8	46.0	
0.694	46.5	56.0		19.5	46.0	
0.703	46.3	56.0		19.4	46.0	
0.716	46.4	56.0		19.5	46.0	
0.792	45.3	56.0		21.8	46.0	
1.777	20.7	56.0		11.6	46.0	
2.160	19.7	56.0		11.2	46.0	
3.926	15.7	56.0		8.4	46.0	
8.456	14.3	60.0		7.4	50.0	
13.514	15.6	60.0		8.0	50.0	
26.005	21.4	60.0		12.9	50.0	

# FCC Part 15 Subpart B 2017-2022 Conducted Emissions Test

## Cumulative Data

VBR8 12/06/2024

Manufacturer : Gentex  
 Model : PL1AS  
 DUT Revision :  
 Serial Number : 918-0022-002  
 DUT Mode : Tx ON  
 Line Tested : Neutral, PLF2  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes :  
 Test Engineer : N. Bouchie  
 RBW : 9 kHz  
 Limit : Class B  
 Test Date : Jan 15, 2025 03:29:47 PM

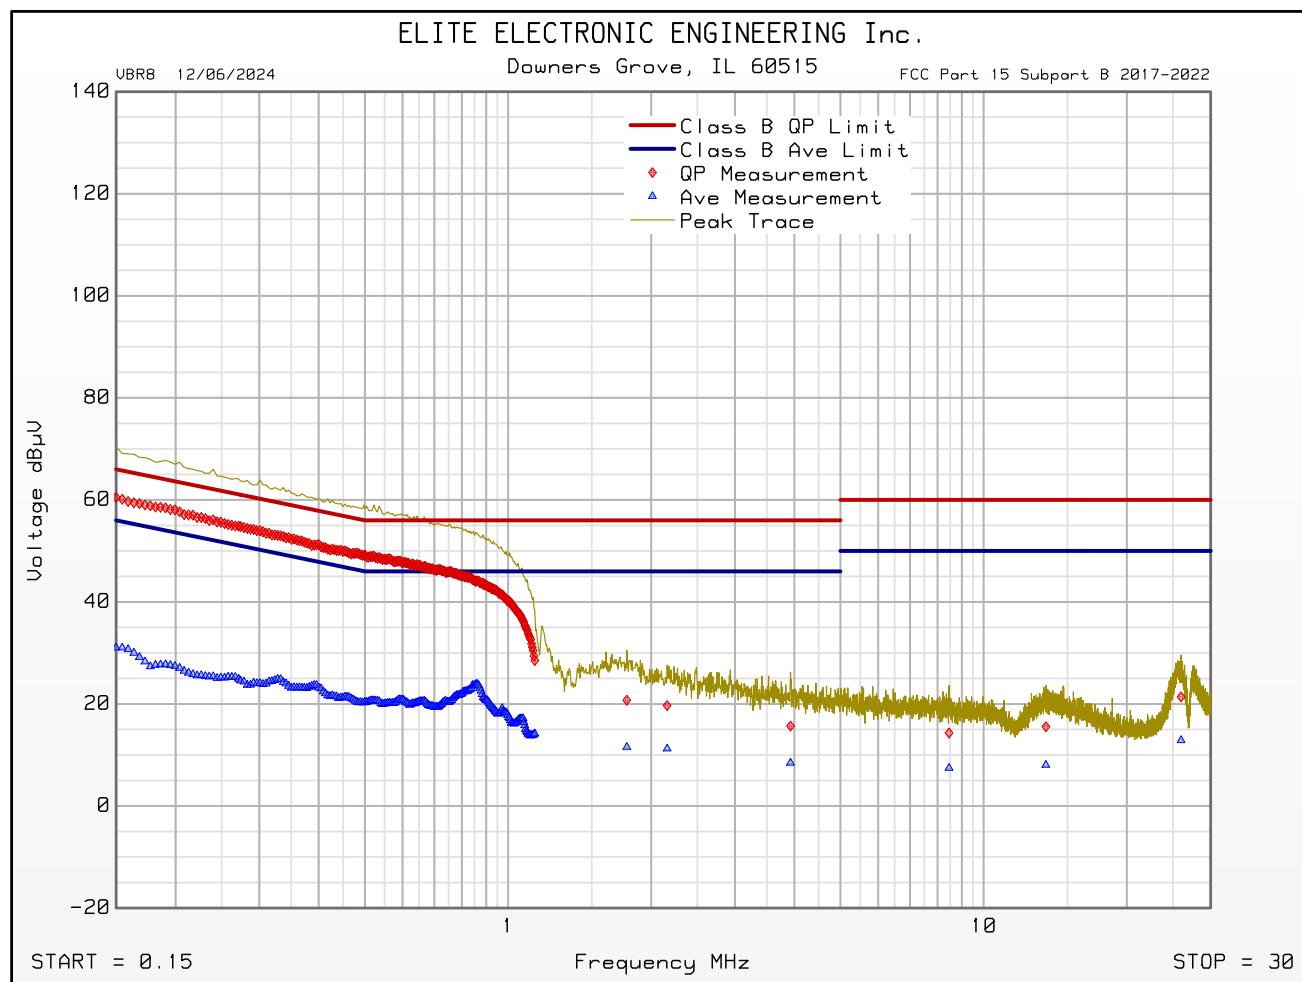

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## 21. Duty Cycle Factor Measurements


Test Information	
Manufacturer	Gentex Corporation
Product	Connected Smoke CO Base
Model	PL1AS
Serial No	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87 Tx @ 5800MHz, Ch 208 Tx @ 5872MHz, Ch 327

Test Setup Details	
Setup Format	Tabletop
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Notes	None


Procedures	
The duty cycle factor is used to convert peak detected readings to average readings when pulsed modulation is employed. This factor is computed from the time domain trace of the pulse modulation signal.	
With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of the "on-time". The trace is recorded.	
Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).	

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87
Carrier Frequency	5727.2MHz
Parameters	On time = 0.0092ms
Notes	None

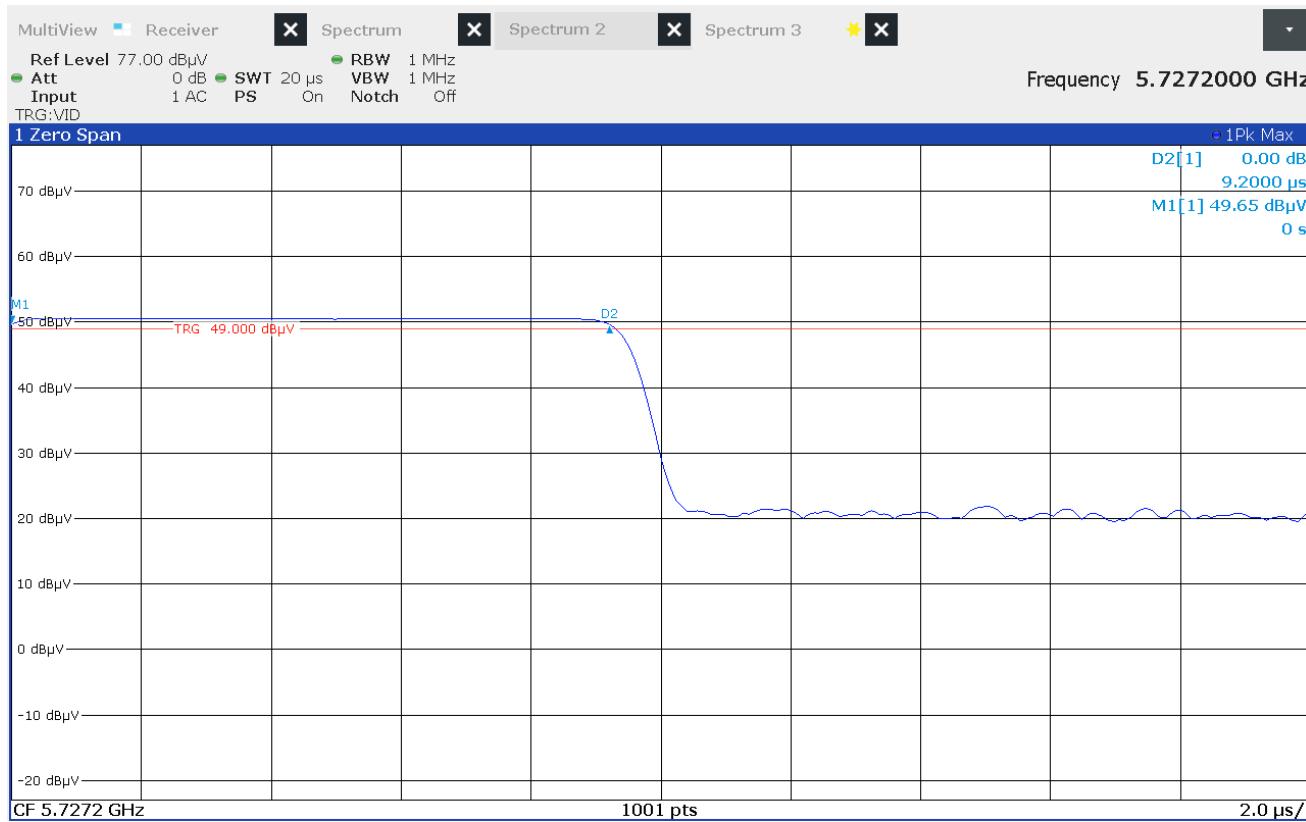


Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87
Carrier Frequency	5727.2MHz
Parameters	Number of Pulses = 51
Notes	None

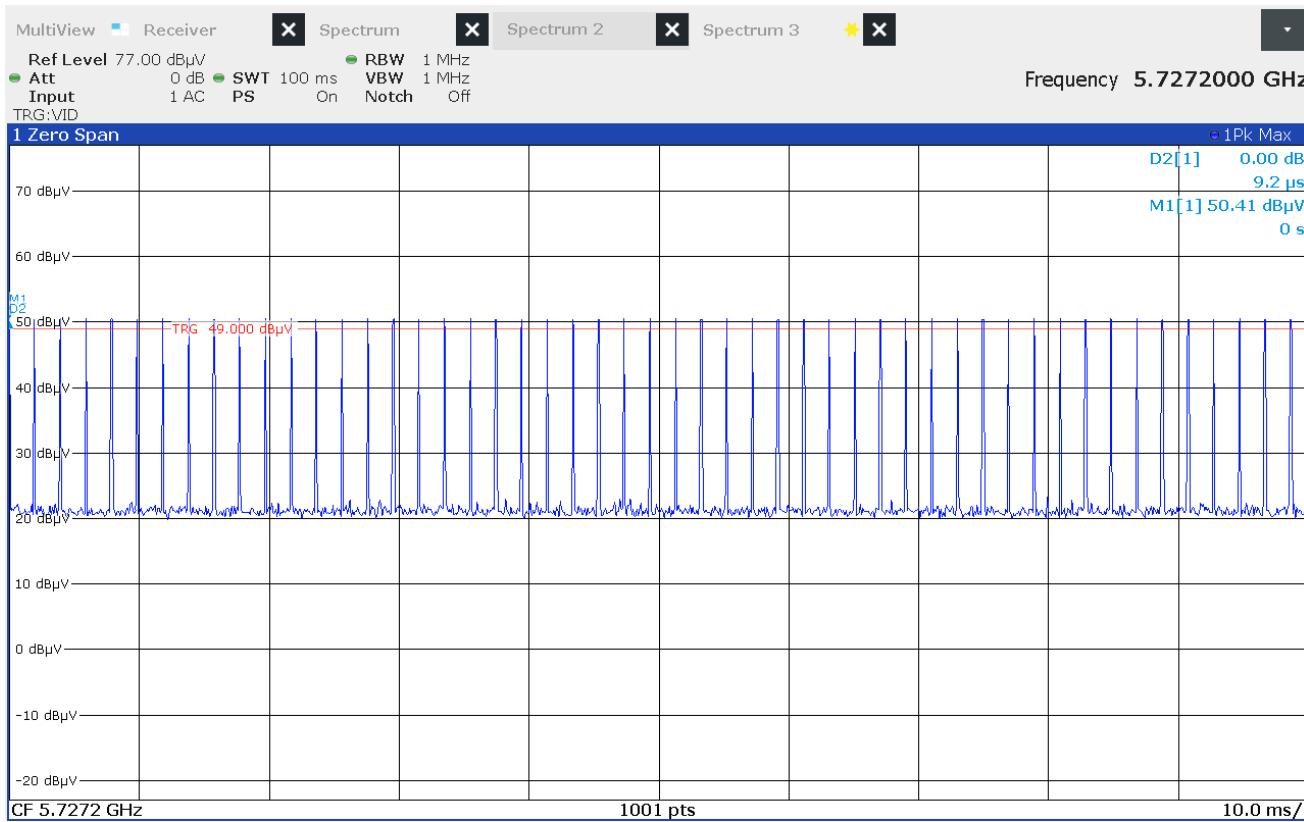


$$\text{Duty Cycle Factor} = 20 \log \left( \frac{On - Time}{100\text{msec}} \right) = 20 \log \left( \frac{0.0092 * 51}{100} \right) = -46.57$$

Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5800MHz, Ch 208
Carrier Frequency	5800MHz
Parameters	On time = 0.00896ms
Notes	None

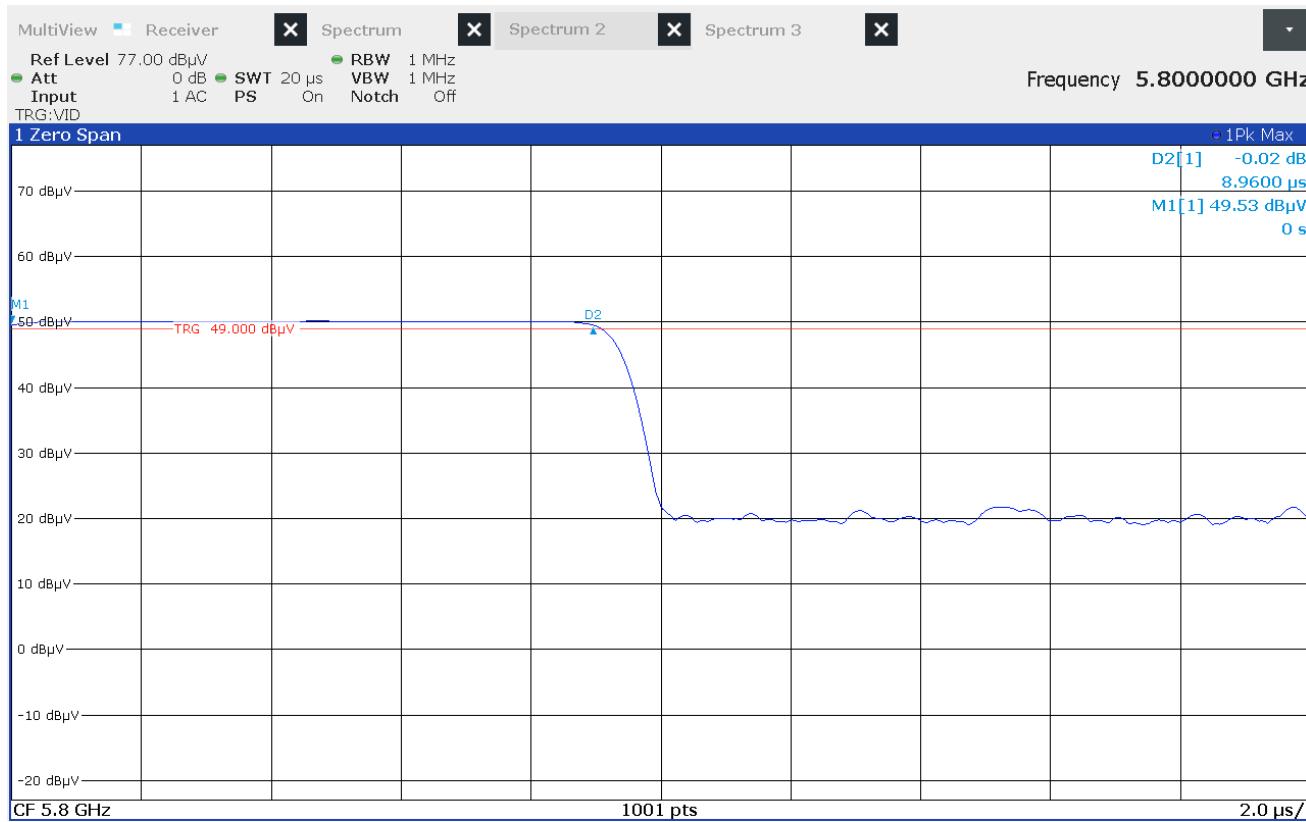


Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5800MHz, Ch 208
Carrier Frequency	5800MHz
Parameters	Number of Pulses = 51
Notes	None

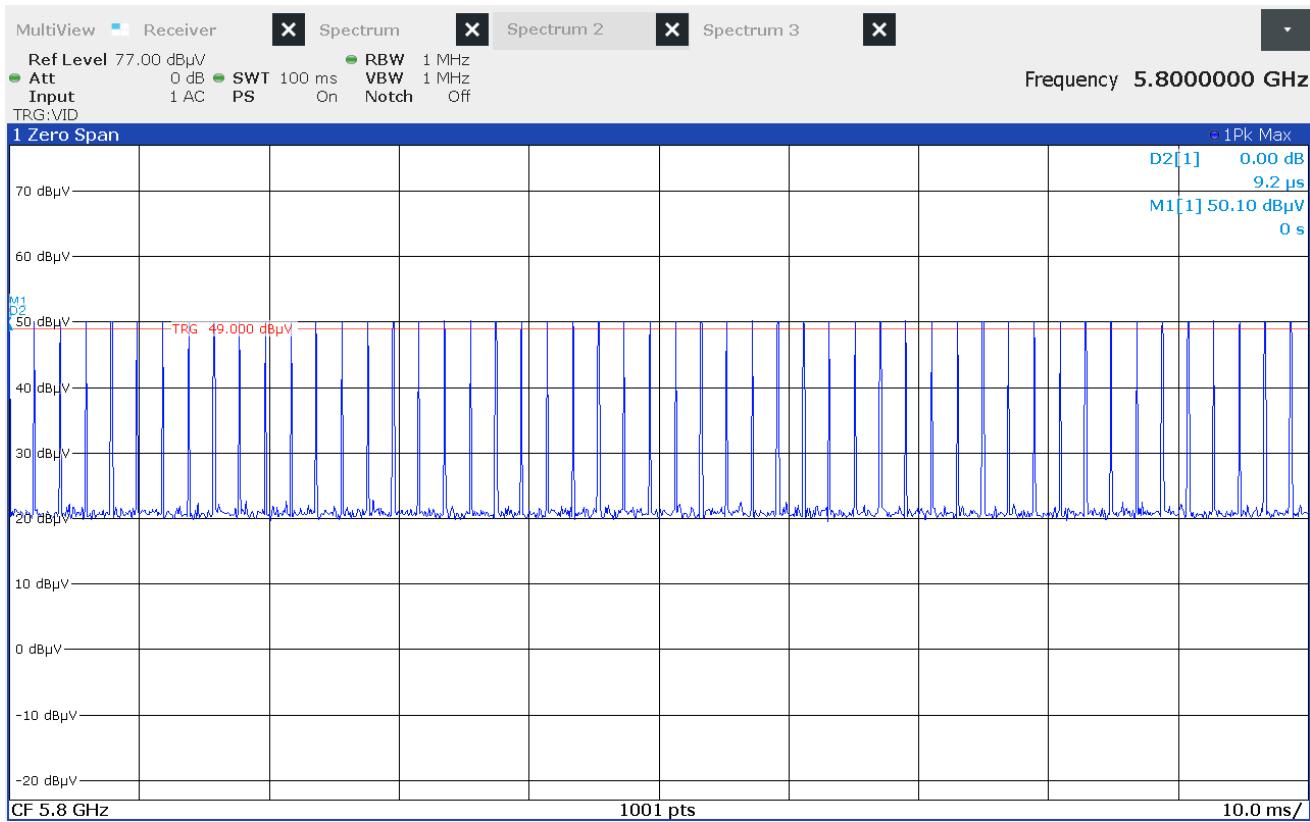


$$\text{Duty Cycle Factor} = 20 \log \left( \frac{On - Time}{100\text{msec}} \right) = 20 \log \left( \frac{0.00896 * 51}{100} \right) = -46.8$$

Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5872MHz, Ch 327
Carrier Frequency	5872MHz
Parameters	On time = 0.0091ms
Notes	None

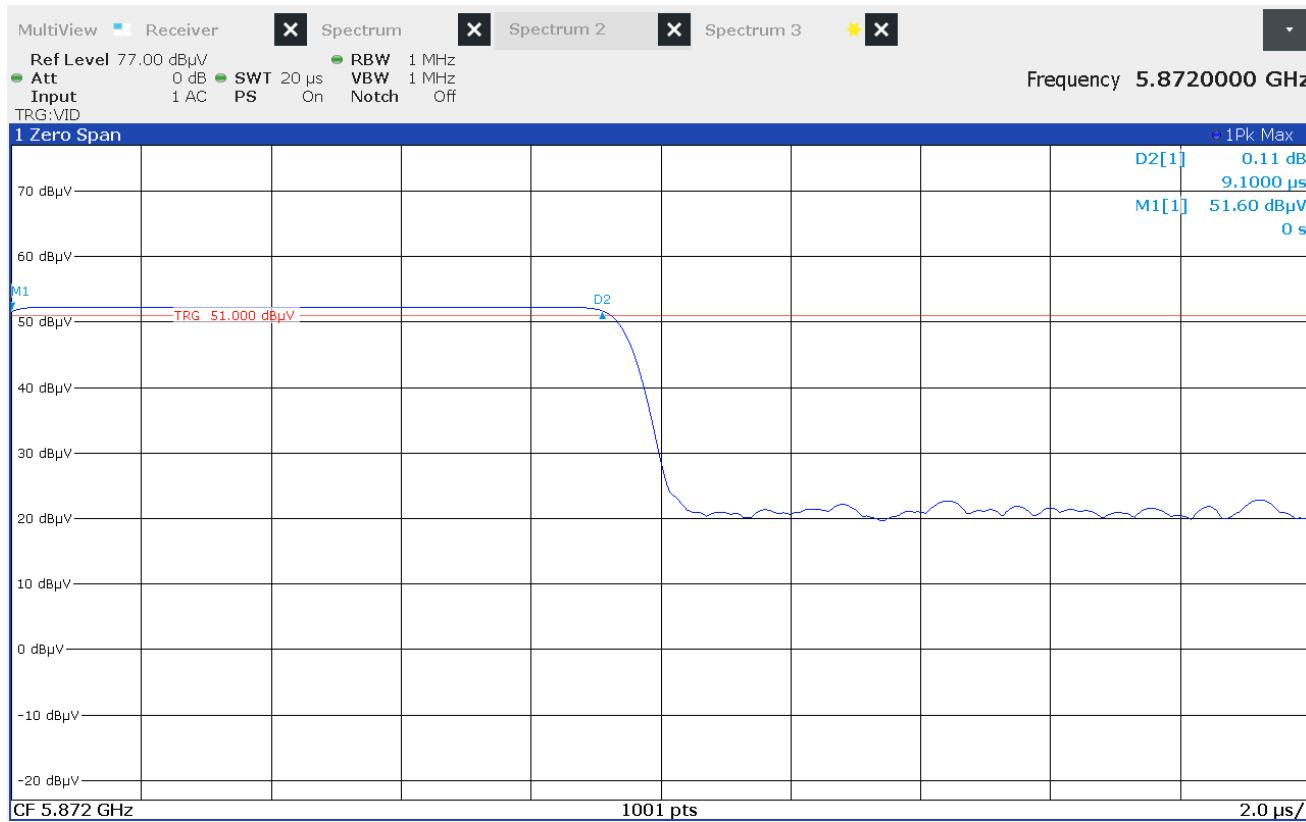

Test Details	
Manufacturer	Gentex Corporation
Model	PL1AS
S/N	918-0022-002
Mode	Tx @ 5872MHz, Ch 327
Carrier Frequency	5872MHz
Parameters	Number of Pulses = 51
Notes	None

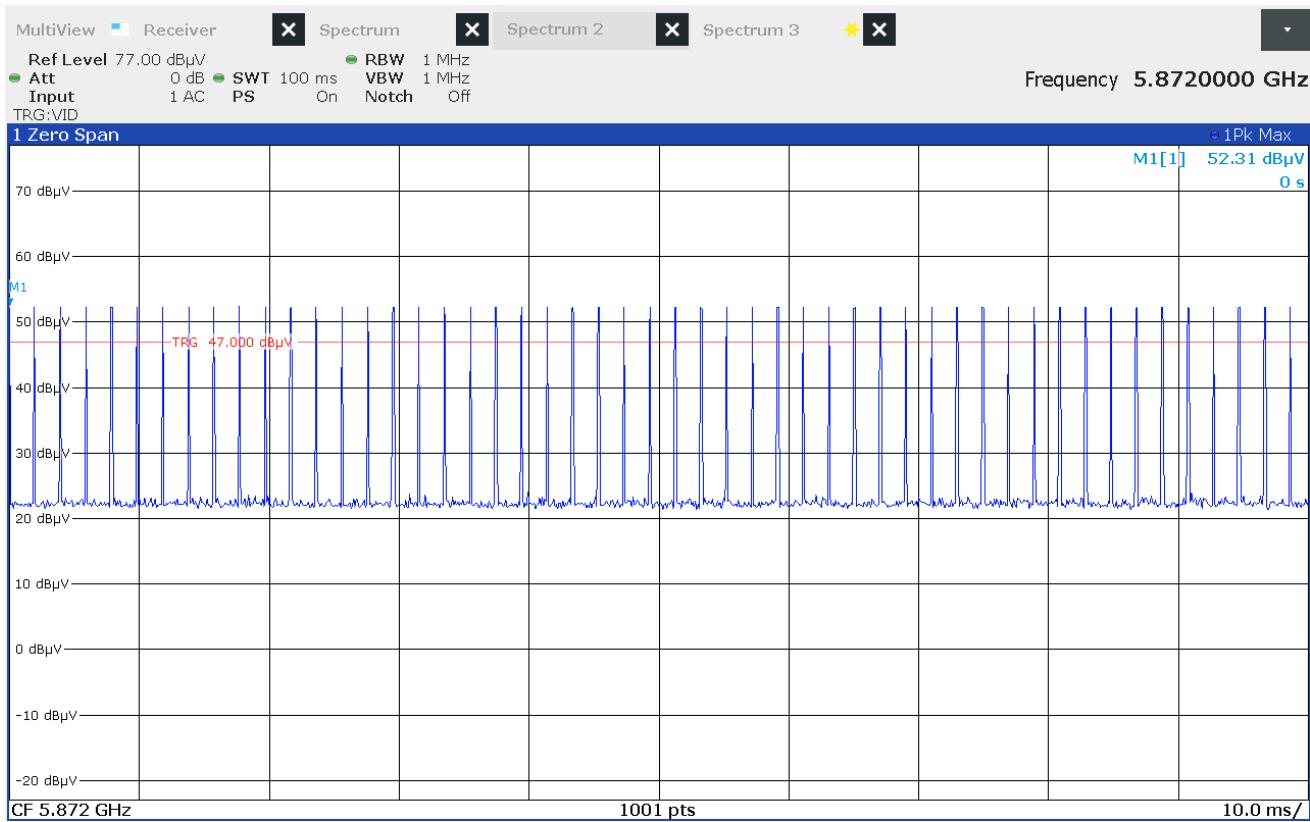

$$\text{Duty Cycle Factor} = 20 \log \left( \frac{On - Time}{100\text{msec}} \right) = 20 \log \left( \frac{0.0091 * 51}{100} \right) = -46.67$$

## 22. Case Spurious Radiated Emissions

Test Information	
Manufacturer	Gentex Corporation
Product	Connected Smoke CO Base
Model	PL1AS
Serial No	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87 Tx @ 5800MHz, Ch 208 Tx @ 5872MHz, Ch 327

Test Setup Details	
Setup Format	Tabletop
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Notes	None

Measurement Uncertainty		
Measurement Type	Expanded Measurement Uncertainty	
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)		4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)		3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)		3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)		3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)		3.4

Requirements		
Fundamental Frequency	Field Strength of Fundamental (mV/m)	Field Strength (mV/m)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 MHz	250	2500

### Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 40GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 40GHz.

Strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

Strengths of all of the harmonics were then measured using a double-ridged waveguide antenna. The antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.

that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:

The EUT was rotated so that all of its sides were exposed to the receiving antenna.

The measuring antenna is linearly polarized, both horizontal and vertical field components were measured.

The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.


In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.




Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization  
Horizontal



Test Setup for Spurious Radiated Emissions, 30-1000MHz – Antenna Polarization  
Vertical

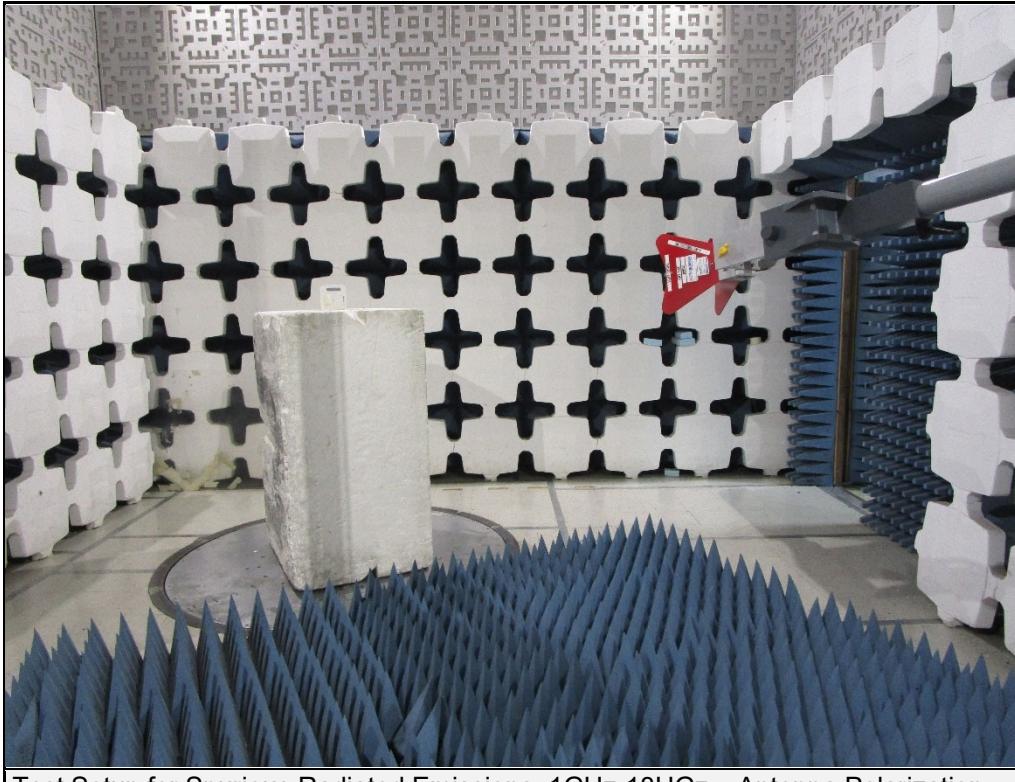

Test Setup for Spurious Radiated Emissions, 1GHz-18GHz – Antenna Polarization  
Horizontal

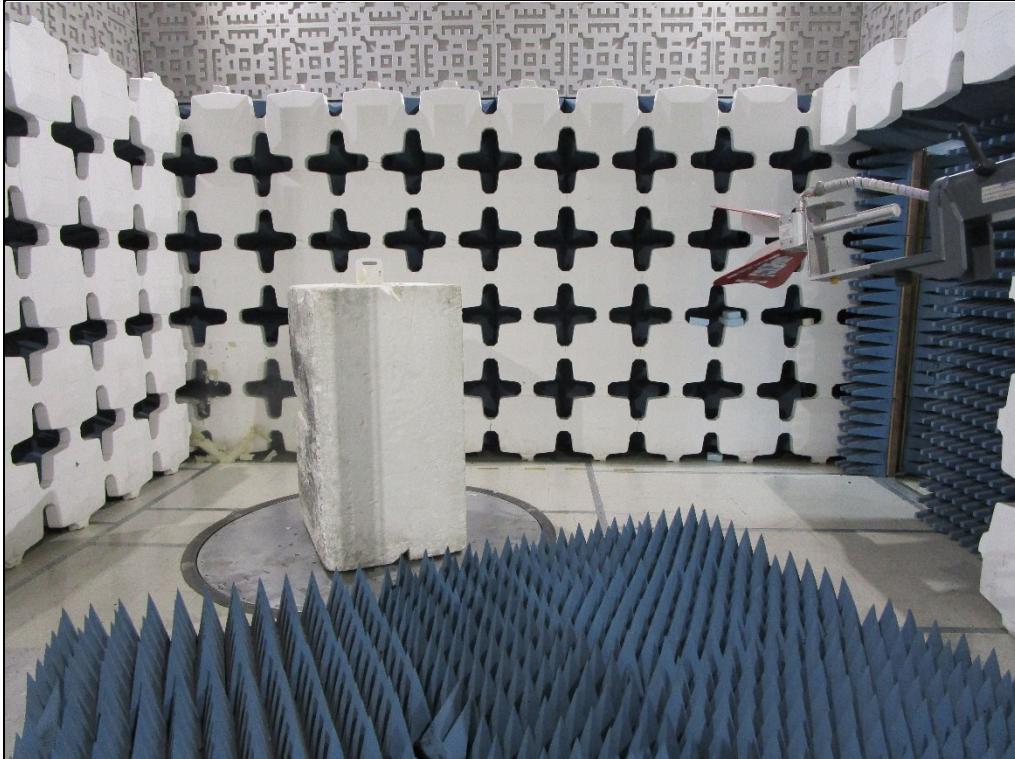

Test Setup for Spurious Radiated Emissions, 1GHz-18GHz – Antenna Polarization  
Vertical



Test Setup for Spurious Radiated Emissions, 18GHz-26GHz – Antenna  
Polarization Horizontal




Test Setup for Spurious Radiated Emissions, 18GHz-26GHz – Antenna  
Polarization Vertical



Test Setup for Spurious Radiated Emissions, 26GHz-40GHz – Antenna  
Polarization Horizontal



Test Setup for Spurious Radiated Emissions, 26GHz-40GHz – Antenna  
Polarization Vertical

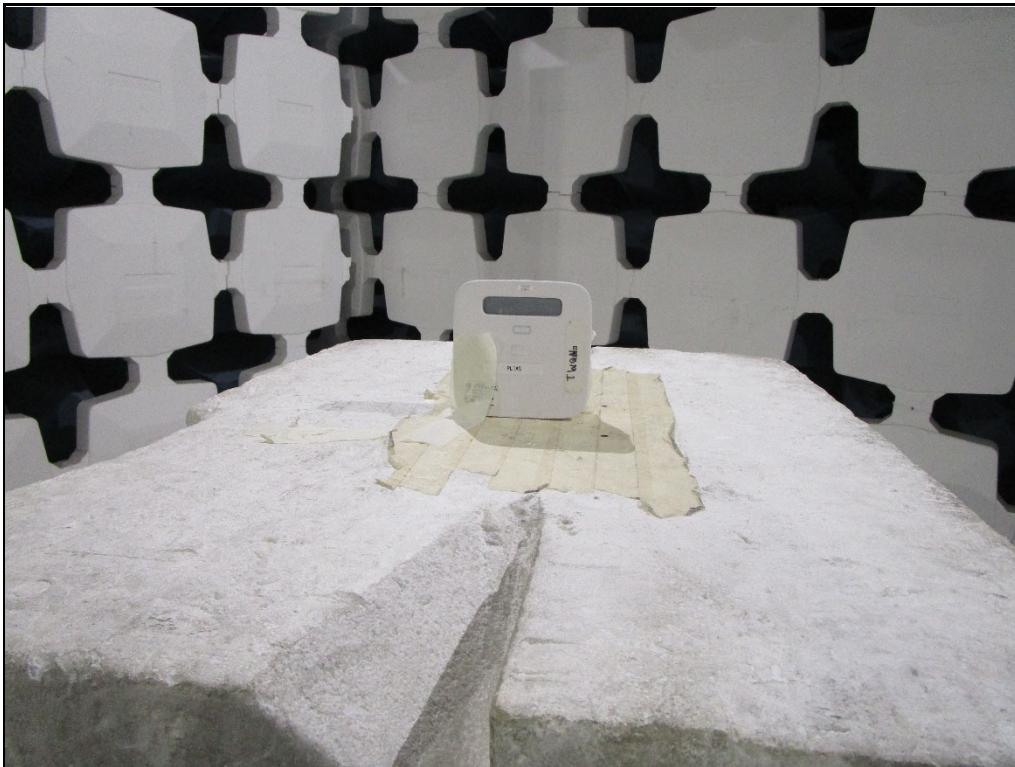

Test Setup for Spurious Radiated Emissions



Test Setup for Spurious Radiated Emissions

Test Details										
Manufacturer	Gentex Corporation									
Model	PL1AS									
S/N	918-0022-002									
Mode	Tx @ 5727.2MHz, Ch 87									
Carrier Frequency	5727.2MHz									
Parameters	Peak Measurements									
Notes	None									

Frequency (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total (dB $\mu$ V/m) at 3m	Peak Total ( $\mu$ V/m) at 3 m	Peak Limit ( $\mu$ V/m) at 3 m	Margin (dB)
5727.200	H	50.6		5.3	35.3	0.0	91.2	36404.9	500000.0	-22.8
5727.200	V	50.6		5.3	35.3	0.0	91.2	36196.0	500000.0	-22.8
11454.400	H	49.8	*	7.7	38.6	-38.6	57.6	755.1	5000.0	-16.4
11454.400	V	49.6	*	7.7	38.6	-38.6	57.4	737.1	5000.0	-16.6
17181.600	H	49.6	*	9.6	42.5	-37.4	64.2	1621.4	5000.0	-9.8
17181.600	V	49.6	*	9.6	42.5	-37.4	64.3	1634.5	5000.0	-9.7
22908.800	H	37.3	*	1.5	40.6	-26.3	53.1	453.9	5000.0	-20.8
22908.800	V	37.4	*	1.5	40.6	-26.3	53.2	458.1	5000.0	-20.8
28636.000	H	41.3	*	1.8	43.8	-34.4	52.5	420.2	5000.0	-21.5
28636.000	V	42.0	*	1.8	43.8	-34.4	53.2	456.0	5000.0	-20.8
34363.200	H	41.2	*	1.6	44.0	-34.1	52.8	434.4	5000.0	-21.2
34363.200	V	41.1	*	1.6	44.0	-34.1	52.6	428.0	5000.0	-21.4

Test Details											
Manufacturer	Gentex Corporation										
Model	PL1AS										
S/N	918-0022-002										
Mode	Tx @ 5727.2MHz, Ch 87										
Carrier Frequency	5727.2MHz										
Parameters	Quasi-Peak/Average Measurements										
Notes	None										

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total (dBuV/m) at 3m	Average Total (uV/m) at 3 m	Average Limit (uV/m) at 3 m	Margin (dB)
5727.20	H	50.60		5.3	35.3	0.0	-46.6	44.7	170.9	50000.0	-49.3
5727.20	V	50.55		5.3	35.3	0.0	-46.6	44.6	169.9	50000.0	-49.4
11454.40	H	49.82	*	7.7	38.6	-38.6	-46.6	11.0	3.5	500.0	-43.0
11454.40	V	49.61	*	7.7	38.6	-38.6	-46.6	10.8	3.5	500.0	-43.2
17181.60	H	49.55	*	9.6	42.5	-37.4	-46.6	17.6	7.6	500.0	-36.4
17181.60	V	49.62	*	9.6	42.5	-37.4	-46.6	17.7	7.7	500.0	-36.3
22908.80	H	37.33	*	1.5	40.6	-26.3	-46.6	6.6	2.1	500.0	-47.4
22908.80	V	37.41	*	1.5	40.6	-26.3	-46.6	6.6	2.2	500.0	-47.3
28636.00	H	41.31	*	1.8	43.8	-34.4	-46.6	5.9	2.0	500.0	-48.1
28636.00	V	42.02	*	1.8	43.8	-34.4	-46.6	6.6	2.1	500.0	-47.4
34363.20	H	41.22	*	1.6	44.0	-34.1	-46.6	6.2	2.0	500.0	-47.8
34363.20	V	41.09	*	1.6	44.0	-34.1	-46.6	6.1	2.0	500.0	-47.9

Test Details										
Manufacturer	Gentex Corporation									
Model	PL1AS									
S/N	918-0022-002									
Mode	Tx @ 5800MHz, Ch 208									
Carrier Frequency	5800MHz									
Parameters	Peak Measurements									
Notes	None									

Frequency (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total (dB $\mu$ V/m) at 3m	Peak Total ( $\mu$ V/m) at 3 m	Peak Limit ( $\mu$ V/m) at 3 m	Margin (dB)
5800.000	H	51.8		5.3	35.6	0.0	92.8	43521.6	500000.0	-21.2
5800.000	V	51.7		5.3	35.6	0.0	92.6	42678.1	500000.0	-21.4
11600.000	H	49.3	*	7.8	38.7	-38.6	57.2	726.8	5000.0	-16.8
11600.000	V	49.6	*	7.8	38.7	-38.6	57.5	748.9	5000.0	-16.5
17400.000	H	49.2	*	9.7	42.5	-37.5	63.8	1557.7	5000.0	-10.1
17400.000	V	48.7	*	9.7	42.5	-37.5	63.3	1470.6	5000.0	-10.6
23200.000	H	39.4	*	1.5	40.6	-26.3	55.2	575.8	5000.0	-18.8
23200.000	V	39.4	*	1.5	40.6	-26.3	55.2	572.5	5000.0	-18.8
29000.000	H	42.1	*	1.4	43.8	-35.3	52.0	398.6	5000.0	-22.0
29000.000	V	41.9	*	1.4	43.8	-35.3	51.8	389.1	5000.0	-22.2
34800.000	H	40.7	*	1.6	44.1	-34.2	52.1	402.8	5000.0	-21.9
34800.000	V	40.9	*	1.6	44.1	-34.2	52.4	414.6	5000.0	-21.6

Test Details											
Manufacturer	Gentex Corporation										
Model	PL1AS										
S/N	918-0022-002										
Mode	Tx @ 5800MHz, Ch 208										
Carrier Frequency	5800MHz										
Parameters	Quasi-Peak/Average Measurements										
Notes	None										

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total (dBuV/m) at 3m	Average Total (uV/m) at 3 m	Average Limit (uV/m) at 3 m	Margin (dB)
5800.00	H	51.84		5.3	35.6	0.0	-46.8	46.0	198.9	50000.0	-48.0
5800.00	V	51.67		5.3	35.6	0.0	-46.8	45.8	195.1	50000.0	-48.2
11600.00	H	49.29	*	7.8	38.7	-38.6	-46.8	10.4	3.3	500.0	-43.6
11600.00	V	49.55	*	7.8	38.7	-38.6	-46.8	10.7	3.4	500.0	-43.3
17400.00	H	49.2	*	9.7	42.5	-37.5	-46.8	17.0	7.1	500.0	-36.9
17400.00	V	48.7	*	9.7	42.5	-37.5	-46.8	16.5	6.7	500.0	-37.4
23200.00	H	39.4	*	1.5	40.6	-26.3	-46.8	8.4	2.6	500.0	-45.6
23200.00	V	39.35	*	1.5	40.6	-26.3	-46.8	8.4	2.6	500.0	-45.6
29000.00	H	42.1	*	1.4	43.8	-35.3	-46.8	5.2	1.8	500.0	-48.8
29000.00	V	41.89	*	1.4	43.8	-35.3	-46.8	5.0	1.8	500.0	-49.0
34800.00	H	40.65	*	1.6	44.1	-34.2	-46.8	5.3	1.8	500.0	-48.7
34800.00	V	40.9	*	1.6	44.1	-34.2	-46.8	5.6	1.9	500.0	-48.4

Test Details										
Manufacturer	Gentex Corporation									
Model	PL1AS									
S/N	918-0022-002									
Mode	Tx @ 5872MHz, Ch 327									
Carrier Frequency	5872MHz									
Parameters	Peak Measurements									
Notes	None									

Frequency (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total (dB $\mu$ V/m) at 3m	Peak Total ( $\mu$ V/m) at 3 m	Peak Limit ( $\mu$ V/m) at 3 m	Margin (dB)
5872.000	H	52.2		5.4	35.9	0.0	93.6	47648.2	500000.0	-20.4
5872.000	V	52.3		5.4	35.9	0.0	93.6	47703.1	500000.0	-20.4
11744.000	H	49.7	*	7.9	38.8	-38.6	57.8	777.2	5000.0	-16.2
11744.000	V	49.3	*	7.9	38.8	-38.6	57.4	744.0	5000.0	-16.5
17616.000	H	50.7	*	9.8	42.2	-37.7	65.1	1796.1	5000.0	-8.9
17616.000	V	50.3	*	9.8	42.2	-37.7	64.7	1709.3	5000.0	-9.3
23488.000	H	37.5	*	1.7	40.6	-26.3	53.5	471.9	5000.0	-20.5
23488.000	V	37.2	*	1.7	40.6	-26.3	53.2	458.5	5000.0	-20.8
29360.000	H	42.3	*	1.1	43.8	-35.4	51.8	389.3	5000.0	-22.2
29360.000	V	43.6	*	1.1	43.8	-35.4	53.0	449.0	5000.0	-20.9
35232.000	H	40.7	*	1.7	44.1	-34.4	52.1	401.8	5000.0	-21.9
35232.000	V	40.4	*	1.7	44.1	-34.4	51.8	387.3	5000.0	-22.2

Test Details											
Manufacturer	Gentex Corporation										
Model	PL1AS										
S/N	918-0022-002										
Mode	Tx @ 5872MHz, Ch 327										
Carrier Frequency	5872MHz										
Parameters	Quasi-Peak/Average Measurements										
Notes	None										

Freq. (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle (dB)	Average Total (dBuV/m) at 3m	Average Total (uV/m) at 3 m	Average Limit (uV/m) at 3 m	Margin (dB)
5872.00	H	52.24		5.4	35.9	0.0	-46.7	46.9	221.1	50000.0	-47.1
5872.00	V	52.25		5.4	35.9	0.0	-46.7	46.9	221.3	50000.0	-47.1
11744.00	H	49.71	*	7.9	38.8	-38.6	-46.7	11.1	3.6	500.0	-42.8
11744.00	V	49.33	*	7.9	38.8	-38.6	-46.7	10.8	3.5	500.0	-43.2
17616.00	H	50.7	*	9.8	42.2	-37.7	-46.7	18.4	8.3	500.0	-35.6
17616.00	V	50.27	*	9.8	42.2	-37.7	-46.7	18.0	7.9	500.0	-36.0
23488.00	H	37.46	*	1.7	40.6	-26.3	-46.7	6.8	2.2	500.0	-47.2
23488.00	V	37.21	*	1.7	40.6	-26.3	-46.7	6.6	2.1	500.0	-47.4
29360.00	H	42.31	*	1.1	43.8	-35.4	-46.7	5.1	1.8	500.0	-48.8
29360.00	V	43.55	*	1.1	43.8	-35.4	-46.7	6.4	2.1	500.0	-47.6
35232.00	H	40.67	*	1.7	44.1	-34.4	-46.7	5.4	1.9	500.0	-48.6
35232.00	V	40.35	*	1.7	44.1	-34.4	-46.7	5.1	1.8	500.0	-48.9

## 23. Band-Edge Compliance

Test Information	
Manufacturer	Gentex Corporation
Product	Connected Smoke CO Base
Model	PL1AS
Serial No	918-0022-002
Mode	Tx @ 5727.2MHz, Ch 87 Tx @ 5872MHz, Ch 327

Test Setup Details	
Setup Format	Tabletop
Measurement Method	Radiated
Type of Test Site	Semi-Anechoic Chamber
Test site used	Room 21
Notes	The general radiated emission limits in 15.209 were used to determine compliance.

Requirements	
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 and RSS-GEN, whichever is the lesser attenuation.	

Procedures	
Band Edge	<ol style="list-style-type: none"> <li>1) The EUT was setup inside the test chamber on a non-conductive stand.</li> <li>2) A broadband measuring antenna was placed at a test distance of 3 meters from the EUT.</li> <li>3) The EUT was set to transmit continuously at the channel closest to the low band-edge.</li> <li>4) The EUT was maximized for worst case emissions at the measuring antenna. The maximum meter reading was recorded.</li> <li>5) To determine the band edge compliance, the following spectrum analyzer settings were used:           <ol style="list-style-type: none"> <li>a. Center frequency = band-edge frequency.</li> <li>b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.</li> <li>c. Resolution bandwidth (RBW) <math>\geq 1\%</math> of the span.</li> <li>d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.</li> <li>e. The marker was set on the highest point outside the frequency band. The peak outside the frequency band was collected and compared to the generic limit of the FCC 15.209 standard.</li> </ol> </li> </ol>

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Test Details										
Manufacturer	Gentex Corporation									
EUT	Connected Smoke CO Base									
Model No.	PL1AS									
Serial No.	918-0022-002									
Mode	Tx @ 5727.2MHz, Ch 87									
Frequency Tested	5727.2MHz									
Notes	Low Band Edge – Peak Measurements									

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
5725.00	H	29.73		5.3	35.3	0.0	70.3	3290.4	5000.0	-3.6
	V	30.23		5.3	35.3	0.0	70.8	3485.4	5000.0	-3.1

Test Details										
Manufacturer	Gentex Corporation									
EUT	Connected Smoke CO Base									
Model No.	PL1AS									
Serial No.	918-0022-002									
Mode	Tx @ 5727.2MHz, Ch 87									
Frequency Tested	5727.2MHz									
Notes	Low Band Edge –Average Measurements									

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dB $\mu$ V/m)	Average Total at 3m ( $\mu$ V/m)	Average Limit at 3m ( $\mu$ V/m)	Margin (dB)
5725.00	H	11.67		5.3	35.3	0.0	0.0	52.3	411.4	500.0	-1.7
	V	11.62		5.3	35.3	0.0	0.0	52.2	409.0	500.0	-1.7

Test Details										
Manufacturer	Gentex Corporation									
EUT	Connected Smoke CO Base									
Model No.	PL1AS									
Serial No.	918-0022-002									
Mode	Tx @ 5872MHz, Ch 327									
Frequency Tested	5872MHz									
Notes	High Band Edge – Peak Measurements									

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
5875.00	H	31.86		5.4	36.0	0.0	73.2	4568.7	5000.0	-0.8
	V	29.01		5.4	36.0	0.0	70.3	3290.7	5000.0	-3.6

Test Details										
Manufacturer	Gentex Corporation									
EUT	Connected Smoke CO Base									
Model No.	PL1AS									
Serial No.	918-0022-002									
Mode	Tx @ 5872MHz, Ch 327									
Frequency Tested	5872MHz									
Notes	High Band Edge – Average Measurements									

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dB $\mu$ V/m)	Average Total at 3m ( $\mu$ V/m)	Average Limit at 3m ( $\mu$ V/m)	Margin (dB)
5875.00	H	11.73		5.4	36.0	0.0	0.0	53.1	450.1	500.0	-0.9
	V	11.82		5.4	36.0	0.0	0.0	53.2	454.8	500.0	-0.8

## 24. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: June 30, 2025

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:*Transient Immunity**(Max Voltage 60V/Max current 100A)*Test Method(s)<sup>1</sup>:

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CI220); FMC1278 (CI220, CI221, CI222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

*Electrostatic Discharge (ESD)**(Up to +/-25kV)*

ISO 10605 (2001, 2008);

CS-11979 Section 7.0; CS.00054, Section 5.10;

EMC-CS-2009.1 (CI 280); FMC1278 (CI280); SAE J1113-13;

GMW 3097 Section 3.6

*Conducted Emissions*

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;

CISPR 25 (2016), Sections 6.3 and 6.4;

CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;

GMW 3097, Section 3.3.2;

EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421, CE 430, CE440)

(A2LA Cert. No. 1786.01) 08/15/2023



Page 1 of 9

5202 Presidents Court, Suite 220 | Frederick, MD 21703-8515 | Phone: 301 644 3248 | Fax: 240 454 9449 | [www.A2LA.org](http://www.A2LA.org)

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<b>Radiated Emissions Anechoic (Up to 6GHz)</b>	CISPR 25 (2002, 2008), Section 6.4; CISPR 25 (2016), Section 6.5; CS-11979, Section 5.3; CS.00054, Section 5.6.3; GMW 3097, Section 3.3.1; EMC-CS-2009.1 (RE 310); FMC1278 (RE310, RE320);
<b>Vehicle Radiated Emissions</b>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<b>Bulk Current Injection (BCI) (1 to 400MHz 500mA)</b>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<b>Radiated Immunity Anechoic (Up to 6GHz and 200V/m) (Including Radar Pulse 600V/m)</b>	ISO 11452-2; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<b>Radiated Immunity Magnetic Field</b>	ISO 11452-8; FMC 1278 (RI140)
<b>Radiated Immunity Reverb (360MHz to 6GHz and 100V/m)</b>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<b>Radiated Immunity (Portable Transmitters) (Up to 6GHz and 20W)</b>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115); GMW 3097, Sec 3.4.4
<b>Vehicle Radiated Immunity (ALSE)</b>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<b>Vehicle Product Specific EMC Standards</b>	EN 14982; EN ISO 13309; ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<b>Electrical Loads</b>	ISO 16750-2
<b>Stripline</b>	ISO 11452-5
<b>Transverse Electromagnetic (TEM) Cell</b>	ISO 11452-3