



A Smarter Vision®

Technical Report to the FCC and ISED Regarding Gentex Corporation - HomeLink® IV

**Model: UAHL5F
FCC ID: NZLU AHL5F
ISED: 4112A-UAHL5F**

**Emission Designator: 49K0L1D
5/6/19**

A report concerning approval for Gentex Corporation Homelink® model UAHL5F
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pannell
Senior EMC Test Engineer
Gentex Corporation

Measurements Reviewed by:

Dan Brasier
Senior EMC Test Engineer
Gentex Corporation

Report and Application Prepared by:

Brian Miller
Regulatory Compliance Engineer
Gentex Corporation

Report Approved and Submitted by:

Craig Harder
Lab Manager - EMC Lab
Gentex Corporation



A Smarter Vision®

Test Report Revision

REV Number	Date	Author	Description
1.0	5/6/19	Brian Miller	Initial Release.

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.

Lab Project ID#: EMC2019-03641
FCC Report Form for 15.231 - 3m

Revision: 03/14/2019 Approved By: Craig Harder
Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F
5/6/19
2 of 29

1. General Information

1.1. Product Description

The Gentex Corporation HomeLink® HLV Universal Garage Door Opener is a low-power transceiver OEM device that is installed into an overhead area of the automobile. The installation is provided by trained technicians during the course of the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

This Universal Garage Door Opener has the capability to

1. Learn the frequency and bit code format of the user's existing garage door remote control devices and
2. Reproduce and transmit the frequency and bit code format to remotely operate the user's garage door.

The unit is designed for the periodic operation of a control signal, which typically activates a garage door opener receiver.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a typical assembly and 2-conductor cable harness were used to power to the unit.

The unit is only operational when the user depresses the control button. It becomes inactive after release of the control button.

The three-button HomeLink® unit replaces up to three hand-held transmitters. In addition to the typical operation of the garage door, the unit will learn the radio frequency codes of other transmitter types to activate entry door locks, estate gates, security systems, and home or office lighting.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. Service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR 15.247. The device will have FCC ID # of NZLU AHL5F and ISED ID # of 4112A-U AHL5F under both rule parts. A separate report is submitted for functionality covered under 47 CFR 15.247.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.10:2013. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required.

The unit is supplied to the automobile manufacturer without harness. For testing purposes a 2-conductor cable harness was used to interface to the unit.



A Smarter Vision®

1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 05/20/2016 and includes accreditation to ANSI C63.4:2014 and ANSI C63.10:2013. The report filed with ISED, dated February 11, 2015, was accepted via a letter dated February 11, 2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.

Corporate Mailing/Shipping Address

Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address

Gentex Corporation
380 Riley Street
Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, and Radiated Emissions at 3m, FCC 47 CFR Part 15, ISED RSS-210.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLU AHL5F. The ISED certification number is 4112A-U AHL5F. These identifiers will be labeled on the product housing.

The label will be imprinted on the exterior of the mirror housing using molding tool that will permanently affix the label.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"This device complies with FCC rules Part 15 and with ISED RSS-210. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.



A Smarter Vision®

ISED: 4112A-UAHL5F

FCC ID: NZLUAHL5F

Model: UAHL5F

2.2. Label Drawing and Location on Product

The label drawing is included in the “Label.pdf” attachment.

A diagram showing the location of the label on the assembly is included in the “Label Location.pdf” attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.10-2013. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for measurements below 1GHz and elevated to 1.5m for measurements above 1GHz. The harness was run straight down from the center of the turntable to a power supply sitting at the base of the table.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

4. Block Diagram

For system block diagram please refer to attachment named “Block Diagram.pdf”

5. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

6. Radiated Emissions Data

6.1. Date(s) Tested: 4/23/19 – 5/2/19

6.2. Test Method Deviations: None.

6.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	20.4	°C
Humidity	47.2	%R.H.

6.4. Summary of Results

Measurement		Margin	Frequency - Duty Cycle
Worst Case Peak Emission	87.09 dBuV/m	11.11 dB	365MHz - 30%
Worst Case Average Emission	77.1 dBuV/m	1.11 dB	365MHz - 80%
Worst Case Harmonic	46.6 dBuV/m	7.39 dB	2555MHz - (365MHz - 80%)
Worst Case Restricted Band Emission	46.6 dBuV/m	7.39 dB	2555MHz - (365MHz - 80%)
Maximum -20 dB Occupied BW	54kHz	666kHz	288MHz - 50% and 80%
Maximum 99% Occupied BW	49kHz	671kHz	288MHz - 50% and 80%
Worst case Digital Emission	30.21 dBuV/m	9.79 dB	59.99MHz - (288MHz)
Worst Case Receiver Spurious Emission	100.36 uV/m	99.64 uV	649MHz
Delta of Field Strength with Supply Voltage of 6-18V	0.49 dB	N/A	365MHz - 30%

- This module exhibits pulsed operation characteristics.
- The device does not operate when the input voltage is below 7V and power reduced to 86.69 dBuV/m at 7V.
- The device was found to be incapable of operating in restricted bands.
- The device deactivated in less than 5 seconds after the activation button is depressed.
- **Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of $k=2.26$ and confidence interval of approximately 95%.

Expanded Uncertainty $U_{(k=2.26)}$ is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.5 dB
- Radiated Emissions – LPA (250-1000 MHz): 4.2 dB
- Radiated Emissions – DRWG (1-18 GHz): 5.0 dB
- Frequency: 0.15ppm

6.5. Test Equipment Setup and Procedure

6.5.1. Test Equipment Used

Description	Model #	ID Number	Last Cal Date	Cal Due
EMCO Biconical Antenna [30-250 MHz]	3110B	H6189	7/16/18	7/16/21
EMCO LPA Antenna [250-1000MHz]	3148	H6192	7/16/18	7/16/21
Com-Power Double Ridged Waveguide [1-18GHz]	AH-118	7182	12/4/18	12/4/21
ETS-Lindgren Double Ridged Waveguide [10-40GHz]	3116C	7257	6/19/18	6/19/19
Rohde & Schwarz EMI Receiver	ESR26	6595	8/31/18	8/31/19

Cables, attenuator and port feed through	various	3M Port Combo	3/31/19	3/31/20
Miteq Preamplifier	AMF-4D-0050100-24-10P	S/N:2053240	3/31/19	3/31/20
3m Chamber SW	N/A	SW30	7/16/18	7/16/21

EMI Receiver Settings Emissions:

Detector Function: Peak
 Resolution Bandwidth: 120 kHz (below 1GHz)
 1MHz (above 1GHz)

EMI Receiver (in Spectrum Analyzer mode) Settings Occupied Bandwidth:

Detector: Peak
 Resolution Bandwidth: 1 MHz (to determine peak level)
 10 kHz (to determine occupied bandwidth)
 Video Bandwidth: 3 MHz (to determine peak level)
 30 kHz (to determine occupied bandwidth)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.10:2013 for stand-alone equipment. The 2-conductor harness was run straight down from the center of the turntable to a power supply sitting at the base of the table.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat. These orientations are described below in Figure 6.2.1.

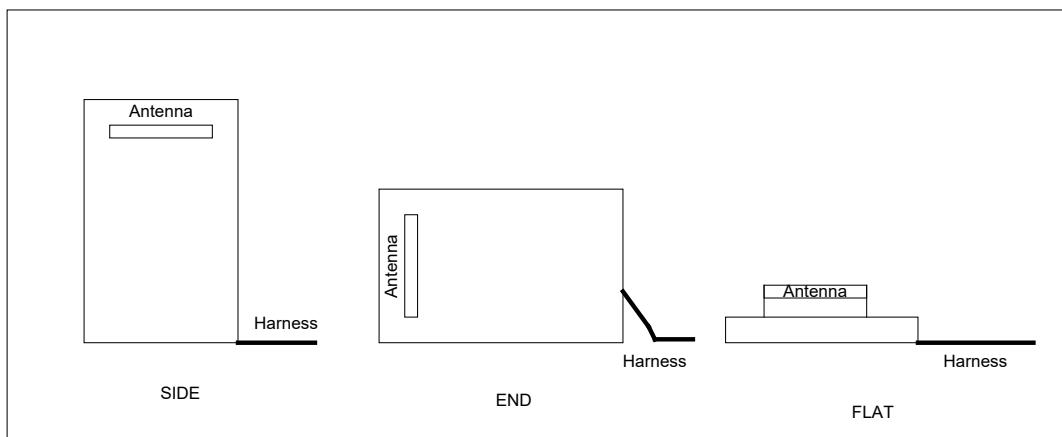


Figure 6.2.1 EUT Orthogonal Orientations

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

6.6. Measured Data – See Appendix A

7. Verification of Non-Operation in Restricted Bands

An exercise was undergone by the product Software Design team to verify that the device was not able to learn and thereby transmit in a restricted band. During this exercise, it was found that the device firmware prevents the device from learning any frequency within 1MHz of any restricted band listed in RSS-210 Issue 9, Table 1 and 47 CFR 15.205.

This exercise is described as follows:

HomeLink Operating Frequencies

HomeLink is designed to transmit from 286 – 440 MHz, with the exception of two regions:

- 321 – 336.4 MHz
- 398.9 – 411 MHz

HomeLink will only transmit at frequencies it is able to train to, therefore to verify HomeLink does not **transmit** outside the designated regions, it must be verified that HomeLink does not **train** to signals outside the designated regions.

To verify this, the Agilent E4421B signal generator was set up to output a 400 Hz square wave with 100% modulation depth and amplitude -5.00 dBm. It was then verified that HomeLink would train to this signal only when it was transmitted at the proper frequencies. Specifically, the various frequencies in the vicinity of the banned region boundaries were tested, and verified that HomeLink trained when it saw a signal at a valid frequency, and did not train when it saw a signal at a banned frequency. In the instances where HomeLink trained to a valid frequency, it was then verified that HomeLink transmitted at that same frequency.

One thing that should be noted: HomeLink margin of error is approximately 100 kHz. Therefore the HomeLink may not adhere to the specified limits with absolute precision. This is why the FCC banned frequencies are guard-banded by 1MHz. For example, the FCC bans transmissions below 285MHz. By setting HomeLink's lower limit to 286 MHz, it guarantees that HomeLink will not operate below 285 MHz, and in all likelihood, HomeLink will not operate below 285.8MHz.

In addition to the banned frequencies, there also exists certain “harmonic avoidance frequency regions” which HomeLink will train to, but will shift the transmit frequency so as not to generate harmonics at particular frequencies. All these frequency regions are listed below, and the table on the following pages shows the exact frequencies tested.

FCC Banned Regions	Harmonic Avoidance Regions
(HomeLink does not train to the following frequencies) 240 – 285 MHz 322 – 335.4 MHz 399.9 – 410 MHz	(HomeLink trains to the following frequencies but transmits on the edges of these bands) 303.5 MHz – 307.5 MHz

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
285.0	banned	would not train	Pass	
285.5	allowed (guard band region)	would not train	Pass	
286.0	allowed (guard band region)	trained	Pass	
287.0	allowed	trained	Pass	
303.5	allowed	trained	Pass	
304.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
304.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.0	allowed	trained	Pass	Frequency shifted to 303.5 MHz
305.5	allowed	trained	Pass	Frequency shifted to 303.5 MHz
306.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
306.5	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.0	allowed	trained	Pass	Frequency shifted to 307.5 MHz
307.5	allowed	trained	Pass	
319.0	allowed	trained	Pass	
320.0	allowed	trained	Pass	
320.5	allowed	trained	Pass	
321.0	allowed (guard band region)	trained	Pass	
322.0	banned	would not train	Pass	
323.0	banned	would not train	Pass	
324.0	banned	would not train	Pass	
325.0	banned	would not train	Pass	
326.0	banned	would not train	Pass	
327.0	banned	would not train	Pass	
328.0	banned	would not train	Pass	
329.0	banned	would not train	Pass	
330.0	banned	would not train	Pass	
331.0	banned	would not train	Pass	
332.0	banned	would not train	Pass	
333.0	banned	would not train	Pass	
334.0	banned	would not train	Pass	
335.0	banned	would not train	Pass	
336.0	allowed (guard band region)	would not train	Pass	
337.0	allowed (guard band region)	trained	Pass	
338.0	allowed	trained	Pass	
398.0	allowed	trained	Pass	
399.0	allowed (guard band region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz

Frequency (MHz)	Part 15 Status	Result	Pass/Fail	Comments
399.5	allowed (guard band region)	would not train	Pass	While this is a valid frequency, HomeLink guardbands this region to ensure it doesn't train to 399.9 MHz
400.0	banned	would not train	Pass	
401.0	banned	would not train	Pass	
402.0	banned	would not train	Pass	
403.0	banned	would not train	Pass	
404.0	banned	would not train	Pass	
405.0	banned	would not train	Pass	
406.0	banned	would not train	Pass	
407.0	banned	would not train	Pass	
408.0	banned	would not train	Pass	
409.0	banned	would not train	Pass	
410.0	banned	would not train	Pass	
410.5	allowed (guard band region)	would not train	Pass	
411.0	allowed (guard band region)	would not train	Pass	
411.5	allowed	trained	Pass	
412.0	allowed	trained	Pass	
439.0	allowed	trained	Pass	
440.0	allowed	trained	Pass	
440.5	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
441.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz
442.0	allowed	would not train	Pass	HomeLink only operates up to 440 MHz

8. Verification of De-activation after 5 seconds

An exercise was undergone by the product Software Design team to verify that the device was deactivated appropriately. This device stops transmitting after 1.099s once the activation button is released.

9. Formulas and Sample Calculations

9.1. Adjustment to account for duty cycle

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

Formula 1: $FS(dBuV/m) = M(dBuV) + AF(dB/m) + CF(dB) - AG(dB)$

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

Formula 2: Average Level(dBuV/m) = Peak Level (dBuV/m) + duty cycle factor(dB).

The peak measurement is adjusted to an average level by a duty cycle described below.

The duty cycle factor to apply is determined for the duty cycles of 30%, 50%, and 80% as follows:

For 30% (0.30):	duty cycle factor (dB) = $20 \cdot \log(0.3) = -10.46$
For 50% (0.50):	duty cycle factor(dB) = $20 \cdot \log(0.5) = -6.02$
For 80% (0.80):	duty cycle factor(dB) = $20 \cdot \log(0.8) = -1.94$

Example calculation:

With the EUT programmed with a 30% duty cycle a measurement of 74 dBuV/m is taken (about 5000 uV/m), the adjusted level would be:

$$74 + (-10.46) = 63.54 \text{ dBuV/m (example)}$$

9.2. Calculation of ISED Limits from Table 4, RSS-210 and 47 CFR Part 15.231

The prescribed limit in the range of 260 MHz to 470 MHz is stated as a linear interpolation between 3750 uV/m and 12500 uV/m. The equation used to calculate the limit using this criterion is:

$$\text{FCC limit} = 41.67 * f - 7083.33$$

(Where 'f' is the measurement frequency in MHz.)

The limit is dBuV/m is then:

$$\text{dB limit} = 20 * \log_{10}(\text{FCC limit uV/m}) = 20 \cdot \log_{10}(41.67 \cdot f - 7083.33)$$

(log10 is used to indicated the use of a base 10 logarithm)

This results in the following limits for the fundamentals:

288MHz	$20 \cdot \log_{10}(4917.6)$	= 73.8 dBuV/m
310MHz	$20 \cdot \log_{10}(5834.4)$	= 75.3 dBuV/m
390MHz	$20 \cdot \log_{10}(9168.0)$	= 79.2 dBuV/m
433MHz	$20 \cdot \log_{10}(10959.8)$	= 80.8 dBuV/m

10. Other Attachments and Description

10.1. User Manual

Please refer to attachment "User_manual.pdf".

10.2. Schematics / Tuning Information

For schematics please refer to exhibit "Schematics.pdf".

10.3. Emission Designation

According to TRC-43, the emission designation for this product is 49K0L1D. Where "49K" is the highest measured occupied bandwidth, "L" indicates the device uses pulse width modulation, "1"



A Smarter Vision®

indicates the modulation as being single channel, digital information and "D" indicates that data is being transmitted.

10.4. Theory of Operation

Please refer to attachment "Theory of operation"

10.5. Label Drawing and Location on Complete Assembly

For a drawing of the label and the position of the label on the finished assembly refer to "Label Location".

10.6. Photos

For interior photos, refer to exhibit "Interior Photographs".

For exterior photos, refer to exhibit "Exterior Photographs".

For test setup photos, refer to exhibit "Test Setup Photographs".

Appendix A

A. Measurements of Fundamentals and Harmonics

Measurements described in this section were taken according to ANSI C63.10-2013 on the Gentex Corporation 3m test table.

1. DUT Tuned to Fund 288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
288	Side	H	30	82.64	93.8	11.19	-10.5	72.2	73.8	1.65
288	Side	H	50	77.91	93.8	15.92	-6.0	71.9	73.8	1.94
288	Side	H	80	72.98	93.8	20.85	-1.9	71.0	73.8	2.79

2. DUT Tuned to Fund 310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
310	Side	H	30	83.92	95.3	11.40	-10.5	73.5	75.3	1.86
310	Side	H	50	79.72	95.3	15.60	-6.0	73.7	75.3	1.62
310	Side	H	80	74.88	95.3	20.44	-1.9	72.9	75.3	2.38

3. DUT Tuned to Fund 365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin- Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin- Average (dB)
365	Side	V	30	87.09	98.2	11.11	-10.5	76.6	78.2	1.56
365	Side	H	50	82.85	98.2	15.35	-6.0	76.8	78.2	1.37
365	Side	V	80	79.02	98.2	19.18	-1.9	77.1	78.2	1.11

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

4. DUT Tuned to Fund 430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
430	Side	V	30	89.13	100.7	11.57	-10.5	78.7	80.7	2.02
430	Side	V	50	84.89	100.7	15.81	-6.0	78.9	80.7	1.83
430	Side	V	80	79.91	100.7	20.79	-1.9	78.0	80.7	2.72

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F

5/6/19

14 of 29

B. DUT Tuned to Har_288MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
576	Side	H	30	40.25	73.8	33.55	-10.5	29.8	53.8	24.01
576	Side	H	50	39.35	73.8	34.48	-6.0	33.3	53.8	20.50
576	Side	H	80	38.55	73.8	35.28	-1.9	36.6	53.8	17.22
864	Side	V	30	42.37	73.8	31.46	-10.5	31.9	53.8	21.92
864	Side	V	50	39.08	73.8	34.75	-6.0	33.1	53.8	20.77
864	Side	V	80	38.09	73.8	35.74	-1.9	36.2	53.8	17.68
1152	Side	V	30	41.6	74.0	32.40	-10.5	31.1	54.0	22.86
1152	Side	V	50	38.56	74.0	35.44	-6.0	32.5	54.0	21.46
1152	Side	V	80	35.1	74.0	38.90	-1.9	33.2	54.0	20.84
1440	Side	H	30	43.15	74.0	30.85	-10.5	32.7	54.0	21.31
1440	Side	H	50	40.22	74.0	33.78	-6.0	34.2	54.0	19.80
1440	Side	H	80	38.42	74.0	35.58	-1.9	36.5	54.0	17.52
1728	Side	H	30	39.8	74.0	34.20	-10.5	29.3	54.0	24.66
1728	Side	H	50	36.22	74.0	37.78	-6.0	30.2	54.0	23.80
1728	Side	H	80	35.26	74.0	38.74	-1.9	33.3	54.0	20.68
2016	Side	H	30	50.88	73.8	22.95	-10.5	40.4	53.8	13.41
2016	Side	H	50	47.32	73.8	26.51	-6.0	41.3	53.8	12.53
2016	Side	H	80	45.75	73.8	28.08	-1.9	43.8	53.8	10.02
2304	Side	V	30	43.88	74.0	30.12	-10.5	33.4	54.0	20.58
2304	Side	V	50	41.25	74.0	32.75	-6.0	35.2	54.0	18.77
2304	Side	V	80	39.24	74.0	34.76	-1.9	37.3	54.0	16.70
2592	Side	H	30	46.95	74.0	27.05	-10.5	36.5	54.0	17.51
2592	Side	H	50	43.56	74.0	30.44	-6.0	37.5	54.0	16.46
2592	Side	H	80	41.55	74.0	32.45	-1.9	39.6	54.0	14.39
2880	Side	H	30	47.25	74.0	26.75	-10.5	36.8	54.0	17.21
2880	Side	H	50	45.23	74.0	28.77	-6.0	39.2	54.0	14.79
2880	Side	H	80	44.23	74.0	29.77	-1.9	42.3	54.0	11.71

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

4. DUT Tuned to Har_310MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
620	Side	V	30	42.7	75.3	32.60	-10.5	32.2	55.3	23.06
620	Side	V	50	37.67	75.3	37.63	-6.0	31.6	55.3	23.65
620	Side	V	80	36.15	75.3	39.15	-1.9	34.2	55.3	21.09
930	Side	V	30	39.92	74.0	34.08	-10.5	29.5	54.0	24.54
930	Side	V	50	35.26	74.0	38.74	-6.0	29.2	54.0	24.76
930	Side	V	80	34.47	74.0	39.53	-1.9	32.5	54.0	21.47
1240	Side	V	30	40.94	74.0	33.06	-10.5	30.5	54.0	23.52
1240	Side	H	50	38.52	74.0	35.48	-6.0	32.5	54.0	21.50
1240	Side	H	80	35.21	74.0	38.79	-1.9	33.3	54.0	20.73
1550	Side	H	30	44.9	74.0	29.10	-10.5	34.4	54.0	19.56
1550	Side	H	50	41.65	74.0	32.35	-6.0	35.6	54.0	18.37
1550	Side	H	80	39.56	74.0	34.44	-1.9	37.6	54.0	16.38
1860	Side	H	30	43.25	75.3	32.05	-10.5	32.8	55.3	22.51
1860	Side	H	50	40.78	75.3	34.52	-6.0	34.8	55.3	20.54
1860	Side	H	80	38.53	75.3	36.77	-1.9	36.6	55.3	18.71
2170	Side	H	30	51.02	74.0	22.98	-10.5	40.6	54.0	13.44
2170	Side	H	50	46.25	74.0	27.75	-6.0	40.2	54.0	13.77
2170	Side	H	80	44.55	74.0	29.45	-1.9	42.6	54.0	11.39
2480	Side	V	30	49.3	74.0	24.70	-10.5	38.8	54.0	15.16
2480	Side	V	50	46.55	74.0	27.45	-6.0	40.5	54.0	13.47
2480	Side	V	80	44.54	74.0	29.46	-1.9	42.6	54.0	11.40
2790	Side	H	30	47.59	74.0	26.41	-10.5	37.1	54.0	16.87
2790	Side	H	50	44.56	74.0	29.44	-6.0	38.5	54.0	15.46
2790	Side	H	80	41.23	74.0	32.77	-1.9	39.3	54.0	14.71
3100	Side	V	30	46.95	75.3	28.35	-10.5	36.5	55.3	18.81
3100	Side	V	50	45.22	75.3	30.08	-6.0	39.2	55.3	16.10
3100	Side	V	80	42.54	75.3	32.76	-1.9	40.6	55.3	14.70

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F

5/6/19

16 of 29

5. DUT Tuned to Har_365MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Average Limit (dBuV/m)	Margin-Average (dB)
730	Side	V	30	38.17	78.2	40.03	-10.5	27.7	58.2	30.49
730	Side	V	50	36.01	78.2	42.19	-6.0	30.0	58.2	28.21
730	Side	V	80	34.92	78.2	43.28	-1.9	33.0	58.2	25.22
1095	Side	V	30	48.77	74.0	25.23	-10.5	38.3	54.0	15.69
1095	Side	V	50	45.26	74.0	28.74	-6.0	39.2	54.0	14.76
1095	Side	V	80	43.65	74.0	30.35	-1.9	41.7	54.0	12.29
1460	Side	V	30	40.95	74.0	33.05	-10.5	30.5	54.0	23.51
1460	Side	V	50	40.55	74.0	33.45	-6.0	34.5	54.0	19.47
1460	Side	V	80	40.87	74.0	33.13	-1.9	38.9	54.0	15.07
1825	Side	V	30	52.07	74.0	21.93	-10.5	41.6	54.0	12.39
1825	Side	V	50	49.68	74.0	24.32	-6.0	43.7	54.0	10.34
1825	Side	V	80	47.81	74.0	26.19	-1.9	45.9	54.0	8.13
2190	Side	H	30	46.59	74.0	27.41	-10.5	36.1	54.0	17.87
2190	Side	H	50	44.57	74.0	29.43	-6.0	38.5	54.0	15.45
2190	Side	H	80	42.51	74.0	31.49	-1.9	40.6	54.0	13.43
2555	Side	H	30	52.65	74.0	21.35	-10.5	42.2	54.0	11.81
2555	Side	H	50	50.35	74.0	23.65	-6.0	44.3	54.0	9.67
2555	Side	H	80	48.55	74.0	25.45	-1.9	46.6	54.0	7.39
2920	Side	H	30	44.74	74.0	29.26	-10.5	34.3	54.0	19.72
2920	Side	H	50	49.28	74.0	24.72	-6.0	43.3	54.0	10.74
2920	Side	H	80	49.3	74.0	24.70	-1.9	47.4	54.0	6.64
3285	Side	H	30	50.65	74.0	23.35	-10.5	40.2	54.0	13.81
3285	Side	H	50	49.58	74.0	24.42	-6.0	43.6	54.0	10.44
3285	Side	H	80	47.85	74.0	26.15	-1.9	45.9	54.0	8.09
3650	Side	H	30	47.22	74.0	26.78	-10.5	36.8	54.0	17.24
3650	Side	H	50	45.12	74.0	28.88	-6.0	39.1	54.0	14.90
3650	Side	H	80	43.54	74.0	30.46	-1.9	41.6	54.0	12.40

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

DUT Tuned to Har_430MHz

Frequency (MHz)	Orientation (Flat/End/Side)	Measurement Polarization (H/V)	Duty Cycle (%)	Measurement* (dBuV/m)	FCC Peak Limit (dBuV/m)	Margin-Peak (dB)	Duty Cycle Correction (dB)	Average Level (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)
860	Side	V	30	36.72	80.8	44.08	-10.5	26.3	60.8	34.54
860	Side	V	50	34.26	80.8	46.54	-6.0	28.2	60.8	32.56
860	Side	V	80	32.22	80.8	48.58	-1.9	30.3	60.8	30.52
1290	Side	V	30	48.08	74.0	25.92	-10.5	37.6	54.0	16.38
1290	Side	V	50	45.33	74.0	28.67	-6.0	39.3	54.0	14.69
1290	Side	V	80	44.87	74.0	29.13	-1.9	42.9	54.0	11.07
1720	Side	H	30	45.6	74.0	28.40	-10.5	35.1	54.0	18.86
1720	Side	H	50	43.56	74.0	30.44	-6.0	37.5	54.0	16.46
1720	Side	H	80	41.36	74.0	32.64	-1.9	39.4	54.0	14.58
2150	Side	H	30	53.47	80.8	27.33	-10.5	43.0	60.8	17.79
2150	Side	H	50	51.33	80.8	29.47	-6.0	45.3	60.8	15.49
2150	Side	H	80	49.67	80.8	31.13	-1.9	47.7	60.8	13.07
2580	Side	V	30	48.84	74.0	25.16	-10.5	38.4	54.0	15.62
2580	Side	V	50	45.98	74.0	28.02	-6.0	40.0	54.0	14.04
2580	Side	V	80	44.84	74.0	29.16	-1.9	42.9	54.0	11.10
3010	Side	H	30	49.34	74.0	24.66	-10.5	38.9	54.0	15.12
3010	Side	H	50	46.25	74.0	27.75	-6.0	40.2	54.0	13.77
3010	Side	H	80	44.44	74.0	29.56	-1.9	42.5	54.0	11.50
3440	Side	V	30	51.04	74.0	22.96	-10.5	40.6	54.0	13.42
3440	Side	V	50	49.56	74.0	24.44	-6.0	43.5	54.0	10.46
3440	Side	V	80	46.55	74.0	27.45	-1.9	44.6	54.0	9.39
3870	Side	V	30	48.17	74.0	25.83	-10.5	37.7	54.0	16.29
3870	Side	V	50	45.35	74.0	28.65	-6.0	39.3	54.0	14.67
3870	Side	V	80	43.56	74.0	30.44	-1.9	41.6	54.0	12.38
4300	Side	H	30	45.47	74.0	28.53	-10.5	35.0	54.0	18.99
4300	Side	H	50	42.11	74.0	31.89	-6.0	36.1	54.0	17.91
4300	Side	H	80	42.35	74.0	31.65	-1.9	40.4	54.0	13.59

Lab Project ID#:

FCC Report Form for 15.231 Appendix A


Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

6. Pulsed Operation

The Homelink® transmitter tested here transmits pulses using amplitude modulation with varying duty cycle. Verification of pulse operation at 30, 50 and 80% duty cycles is provided here. Measurements were taken at 365 MHz with the span set to zero on the R&S ESR26 EMI Receiver. The modulation frequency is 500Hz.

a. 30% Duty Cycle

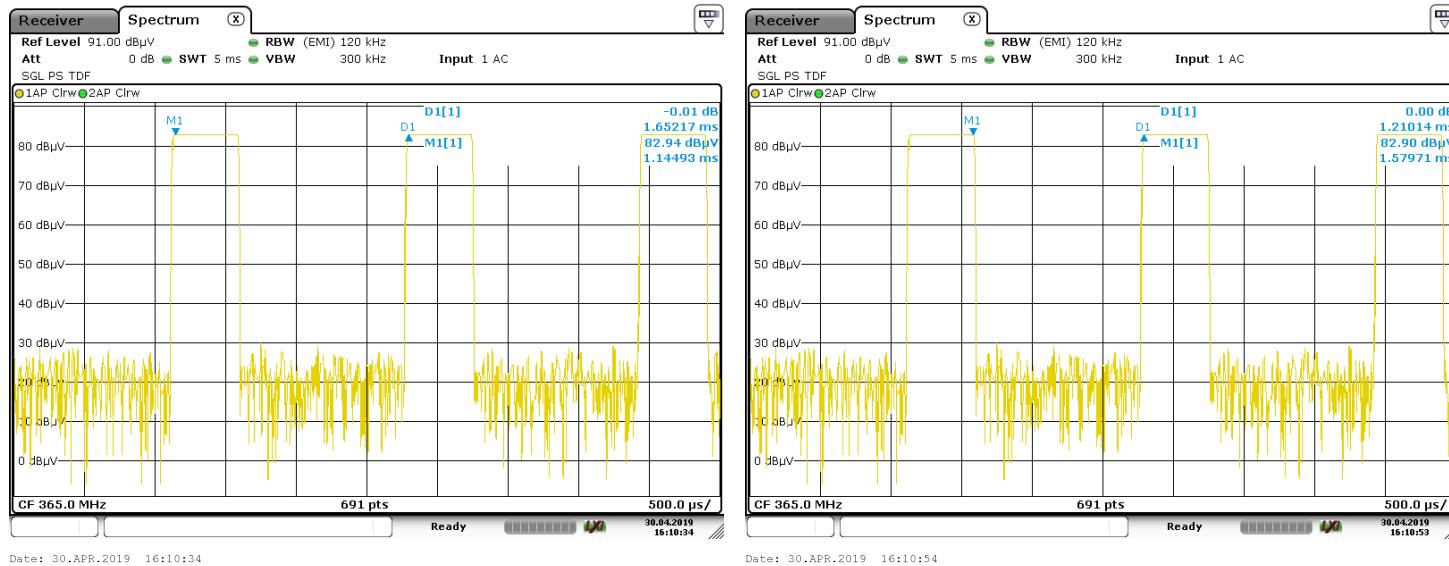


Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

b. 50% Duty Cycle

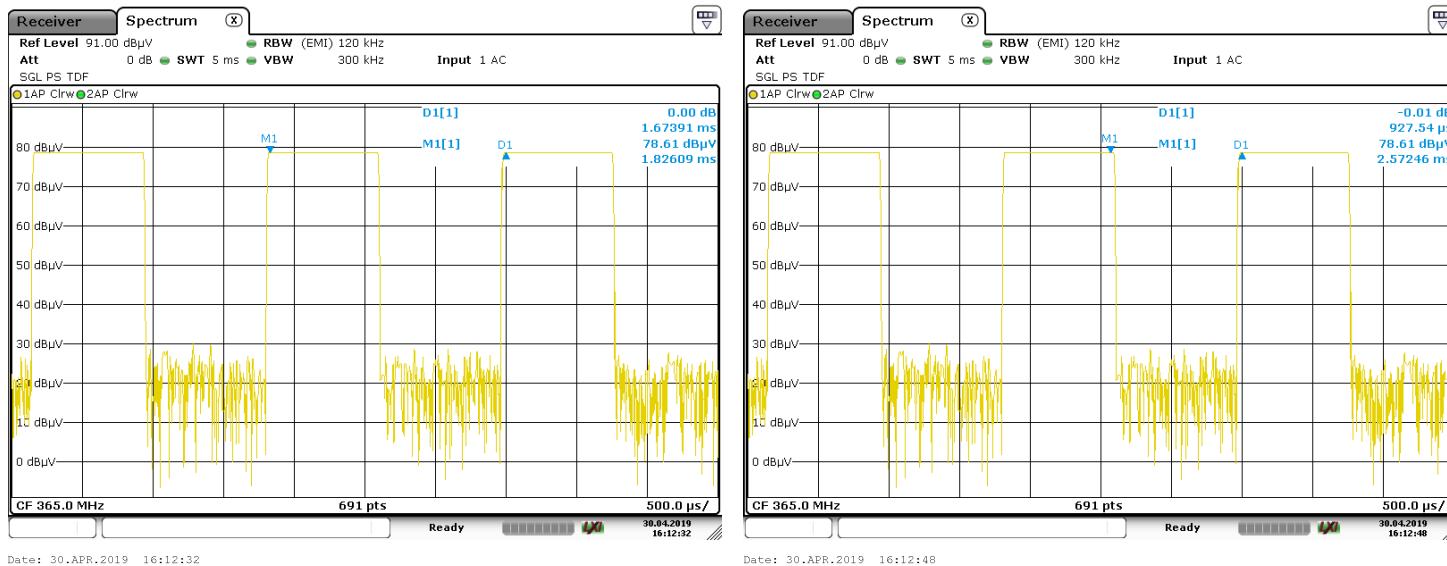


Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

c. 80% Duty Cycle

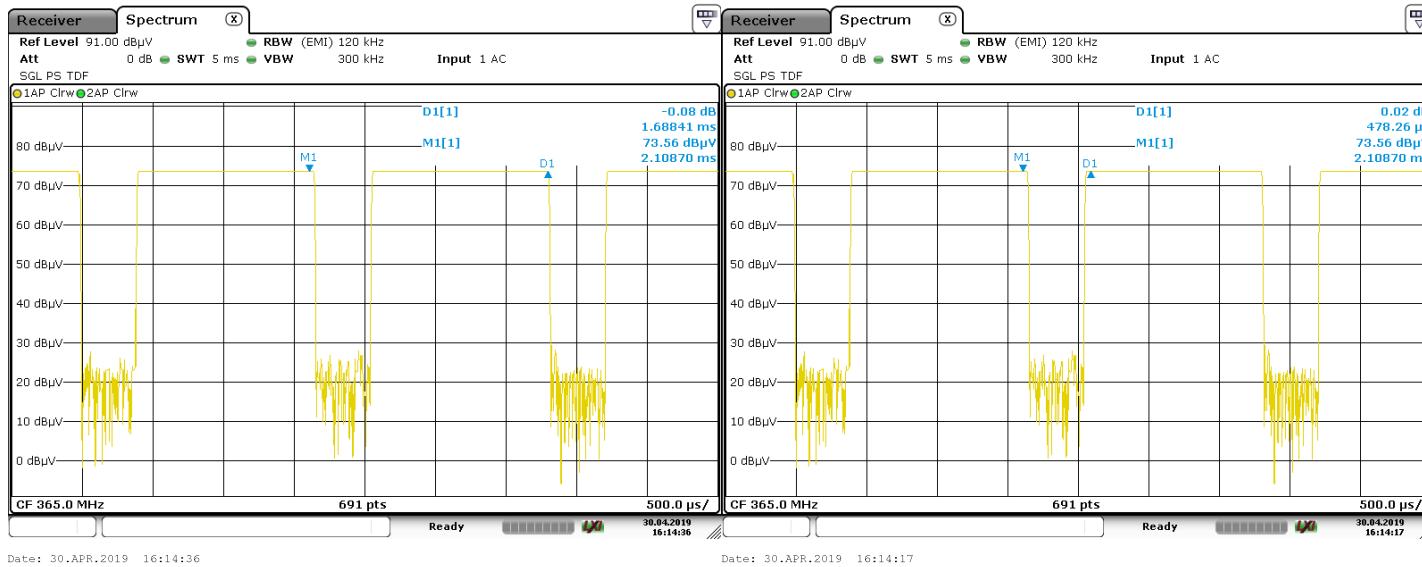

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

7. Occupied Bandwidth

Occupied bandwidth measurements were taken at 288, 310, 365 and 430MHz. The occupied bandwidth was determined using the -20dB and 99% measurement methods.

a. -20dB Occupied Bandwidth Measurement

-20dB Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	53.00	720	667.00
	50	54.00	720	666.00
	80	54.00	720	666.00
310	30	53.00	775	722.00
	50	56.00	775	719.00
	80	54.00	775	721.00
365	30	52.00	912.5	860.50
	50	51.00	912.5	861.50
	80	53.00	912.5	859.50
430	30	50.00	1082.5	1032.50
	50	51.00	1082.5	1031.50
	80	51.00	1082.5	1031.50

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

b. 99% Occupied Bandwidth Measurement

99% Occupied Bandwidth				
Frequency (MHz)	Duty Cycle (%)	Occupied Bandwidth (kHz)	Limit (kHz)	Margin
288	30	47.80	720	672.20
	50	49.00	720	671.00
	80	49.00	720	671.00
310	30	46.00	775	729.00
	50	46.50	775	728.50
	80	48.70	775	726.30
365	30	45.70	912.5	866.80
	50	47.00	912.5	865.50
	80	42.50	912.5	870.00
430	30	47.60	1082.5	1034.90
	50	44.72	1082.5	1037.78
	80	46.48	1082.5	1036.02

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder


Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F


5/6/19

23 of 29

**c. Example of Occupied Bandwidth Measurement
288MHz 30%**

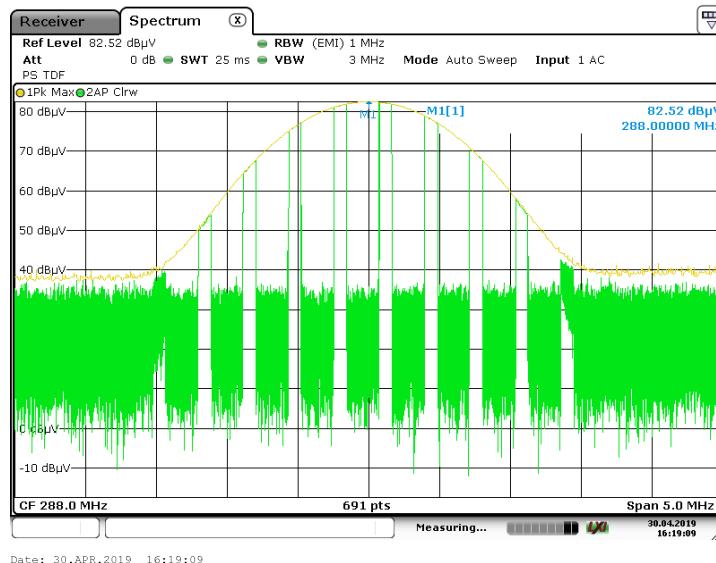

Measuring Peak Reference Level

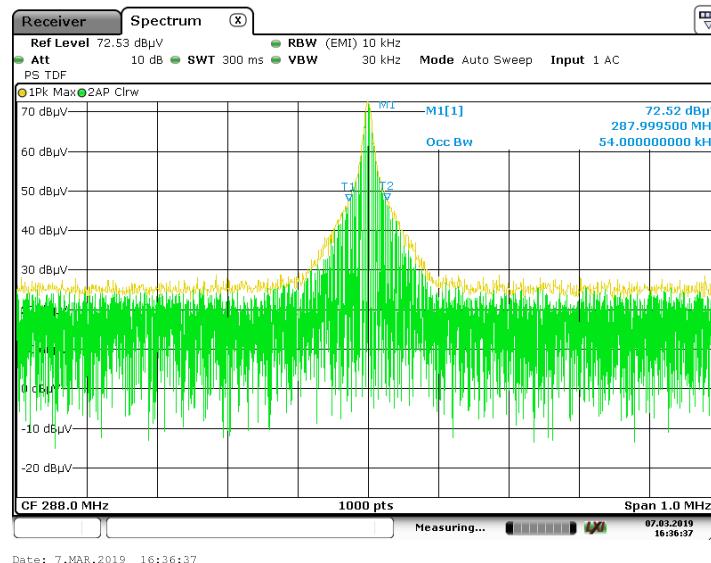

Measuring Occupied Bandwidth at -20dB points 20

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

8. Summary of Emissions Measurements Taken

Transmitting Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (dBuV/m)	Limit (dBuV/m)	Margin (dB)
288	39.99	Side	V	25.63	40	14.37
	44.99	Side	V	24.15	40	15.85
	59.99	Side	V	30.21	40	9.79
	63	Side	V	25.33	40	14.67
	81	Side	V	23.45	40	16.55
	117	Side	V	23.65	40	16.35
310	48.44	Side	V	24.15	40	15.85
	79.98	Side	V	23.55	40	16.45
	116.26	Side	V	23.65	40	16.35
	232.56	Side	V	25.21	40	14.79
	297.26	Side	V	25.21	40	14.79
365	51.02	Side	H	23.55	40	16.45
	79.98	Side	H	24.56	40	15.44
	116	Side	H	25.35	40	14.65
	231	Side	H	25.33	40	14.67
	298	Side	H	24.51	40	15.49
430	39.47	Side	V	26.65	40	13.35
	45.12	Side	V	24.15	40	15.85
	61.23	Side	H	24.88	40	15.12

Measurements were made using a peak detector with Resolution BW of 120 kHz and Video BW of 300 kHz. Cable losses and correction factors are included in measurement.

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

9. Receiver Spurious Emissions

The receiver circuit spurious emissions were measured in accordance to Industry Canada RSS-GEN Issue 5 Section 7 and ANSI C63.4-2014.

The band midpoint over which the receiver is designed to operate is 368MHz. The Homelink 5 is supplied with commands to place it into diagnostic / manufacturing mode, and tune the receiver to the midpoint frequency.

The search for spurious emissions was conducted over a range of 286MHz (The lowest oscillator frequency used by the receiver) to 1350 MHz (3 times the highest tunable frequency of 450MHz).

To determine the orientation of the device at which the worst case emissions would occur, exploratory measurements were taken using a diagnostic command to transmit at the midpoint frequency of 368 MHz. The device was then set to receive using a manufacturing diagnostic command. Refer to setup photograph. The device under test is on its side, with the antenna in horizontal polarization.

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Measurements from 286MHz to 1 GHz were made with the receiver using the peak detection method. The resolution bandwidth setting was 120 kHz. **At the fundamental frequency, 365 MHz, the receiver spurious emissions measurement was 100.36uV/m at 3m. Remaining 99.64 uV/m below the limit.**

Receive Frequency (MHz)	Frequency (MHz)	DUT Orientation	Antenna Polarization	Field Strength (uV/m)	Limit (uV/m)	Margin (uV/m)
365	296	Side	H	36.84	200	163.16
	323	Side	H	34.48	200	165.52
	377	Side	H	37.96	200	162.04
	379	Side	H	39.86	200	160.14
	649	Side	H	100.36	200	99.64
	999	Side	H	162.06	500	337.94
	1000	Side	H	146.22	500	353.78
	1037	Side	H	153.56	500	346.44
	1040	Side	H	151.84	500	348.16
	1110	Side	H	177.47	500	322.53
	1155	Side	H	170.07	500	329.93
	1195	Side	H	170.04	500	329.96
	1199	Side	H	171.79	500	328.21
	1350	Side	H	193.92	500	306.08

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F


5/6/19

27 of 29

10. Variation of Supply Voltage

Measurements of the variation in output field strength due to variation in the supply voltage were taken in accordance with 15.231(e). The DUT was configured to transmit at the peak frequency, 365MHz, 30% Duty Cycle. Values presented are not corrected for duty cycle.

a. Plot of output power over supply voltage

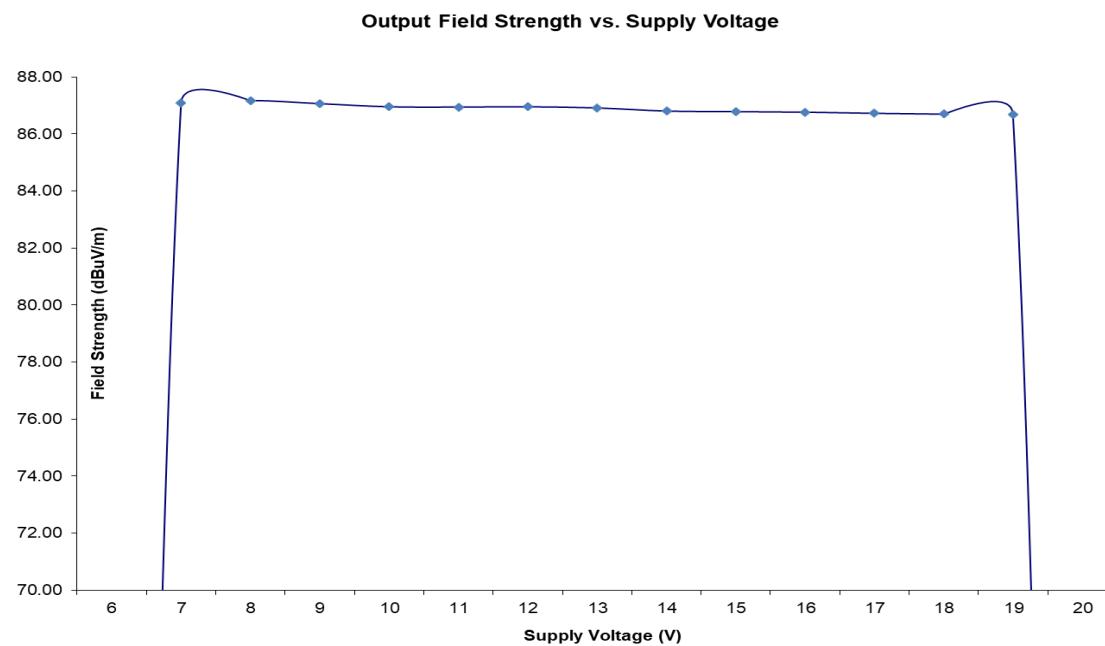

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F

5/6/19

28 of 29

b. Output Power as a Function of Supply Voltage

Voltage	Field Strength (dBuV/m)	Frequency (MHz)
6	0.00	365
7	87.09	365
8	87.18	365
9	87.07	365
10	86.96	365
11	86.95	365
12	86.96	365
13	86.92	365
14	86.81	365
15	86.79	365
16	86.77	365
17	86.73	365
18	86.70	365
19	86.69	365
20	0.00	365

Lab Project ID#:

FCC Report Form for 15.231 Appendix A

Revision: 03/14/2019 Approved By: Craig Harder

Uncontrolled copy if printed unless stamped as a Lab Controlled Document

Model: UAHL5F

5/6/19

29 of 29