



Technical Report to the FCC Gentex Corporation

**Model: UAHL5P
FCC ID: NZLU AHL5P
ISED: 4112A-UAHL5P**

11/6/2024

A report concerning approval for Gentex Corporation model UAHL5P
Please issue grant immediately upon review.

Measurements Made by:

Bolay Pacheco
Laboratory Validation Engineer III
Gentex Corporation

Measurements Reviewed by:

Dan Brasier
Laboratory Development Engineer II
Gentex Corporation

Report Prepared by:

Patricia Szeszulski
Laboratory Validation Engineer I
Gentex Corporation

Report Approved by:

Jason Vargo
Laboratory Manager I
Gentex Corporation

Report Prepared, and Submitted by:

Brian Miller
Laboratory Group Leader – Regulatory II
Gentex Corporation

Test Report Revision

REV Number	Date	Author	Description
1.0	11/6/2024	Patricia Szeszulski	Initial Release

Results relate only to the items tested as received.

Compliance has been evaluated based on the Lab Manual section 7.6.2. The decision rule used regarding measurement uncertainty was to determine results solely on whether the measured values met the defined acceptance criteria without factoring in measurement uncertainty values.



1. General Information

1.1. Product Description

The Gentex Corporation HomeLink OEM device that is installed into a rearview mirror of an automobile. The installation is provided by trained technicians during the manufacture of the automobile. It is powered by the 12 Volt system of the automobile.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a typical assembly and 2-conductor cable harness were used to power to the unit.

The antenna system is an integral part of the unit. It cannot be altered nor replaced by the user. The service of this system is only available from the Automobile Manufacturer's Dealerships and Gentex Corporation.

1.2. Related Grants

This device will have functionality that is covered under 47 CFR Part 15.247 and 15.231 and ISED Canada RSS-231 and RSS-247. The device will have FCC ID # of NZLUAHL5P and ISED ID # of 4112A-UAHL5P.

1.3. Test Methodology

Radiated Emissions testing was performed according to ANSI C63.4:2014. The power source for this product is a 12V automotive vehicle battery, thus conducted emissions measurements are not required. The DUT was tested by placing it in RX mode with a signal generator transmitting to a loop antenna within proximity of the DUT. The emissions sweeps were performed with the signal generator transmitting a CW signal at the low, mid, and high frequency of the intentional radiator frequency bands.

The unit is supplied to the automobile manufacturer without harness. For testing purposes, a 2-conductor cable harness was used to interface to the unit.

The DUT was tested in receive mode only.

1.4. Test Facility

The 3-meter semi-anechoic chamber where these measurements were taken is located on the grounds of Gentex Corporation's Corporate Labs, in the city of Zeeland, county of Ottawa, state of Michigan, United States of America.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

Tabletop testing was conducted on a 3m turntable described in the site recertification report. The 3m chamber has been added to our A2LA scope of accreditation on 4/18/2019 and includes accreditation to ANSI C63.4:2014, ANSI C63.10:2013, and C63.26:2015. Our 3m chamber is registered with the ISED under Site# 4112A-2 and FCC under registration number 357351.



Corporate Mailing/Shipping Address
Gentex Corporation
600 N. Centennial Street
Zeeland, MI 49464

Site Address
Gentex Corporation
380 Riley Street
Zeeland, MI 49464

1.5. Accreditation

The Gentex Corporate EMC Lab is accredited to ISO/IEC 17025 by the American Association for Laboratory Accreditation (A2LA). Our laboratory scope and accreditation certificate #[2529.01](#) are available from their web site www.a2la.org. Our scope of accreditation covers ANSI C63.4:2014, ANSI C63.10:2013, ANSI C63.26:2015 and Radiated Emissions at 3m, FCC 47 CFR Part 90, ISED RSS-137.

2. Product Labeling

2.1. Identifiers

The FCC Identifier assigned is FCC ID: NZLU AHL5P. The ISED certification number is 4112A-U AHL5P. These identifiers will be labeled on the product housing.

The label will be printed on a label, which will be placed on the exterior of the housing and permanently affixed.

Because of the small size of the device and because the installation is inside a portion of the automobile, the following statements will appear in the user's manual. Refer to attachment "Users Manual.pdf" for the entire text of the user's manual.

"The receiver portion of the device complies with FCC rule Part 15. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference that may be received including interference that may cause undesired operation.

WARNING: The transmitter has been tested and complies with FCC and ISED rules. Changes or modifications not expressly approved by the party responsible for the compliance could void the user's authority to operate the device."

This equipment complies with FCC and ISED radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must be at least 20cm from the user and must not be co-located or operating in conjunction with any other antenna or transmitter.

The term "ISED:" before the certification/registration number only signifies that ISED technical specifications were met.

ISED: 4112A-U AHL5P FCC ID: NZLU AHL5P

2.2. Label Drawing and Location on Product

The label drawing is included in the "Label.pdf" attachment.

A diagram showing the location of the label on the assembly is included in the "Label Location.pdf" attachment.

3. Test Configuration

Radiated Emission measurements presented in the report were made in accordance with ANSI C63.4-2014. The EUT was placed on a 1 x 1.5m non-metallic table elevated 80cm above a conducting ground plane for all measurements. The harness was run down the edge of the test table to a power supply beneath the turntable.

For radiated measurements above 1 GHz, RF absorbing material is placed between the antenna and EUT in accordance with ANSI C63.4:2014 Section 5.5 and chamber manufacturer's instructions.

4. Conducted Emissions Measurements

Conducted Measurements are not required for this product.

5. Radiated Emissions Data

5.1. Date(s) Tested: 11/4/2024-11/5/2024

5.2. Test Method Deviations: None

5.3. Temperature and Humidity conditions

	Measured Value	Unit
Temperature	21.6-23.5	°C
Humidity	47.3-54.7	%R.H.

5.4. Summary of Results

Measurement	Margin	Frequency
Worst case Digital Emission	35.53 dBuV/M	10.47dB

- Measurement Uncertainty:** The standard uncertainty of measurement has been determined in accordance with the ISO Guide to the Expression of Uncertainty in Measurements. The estimation of measurement uncertainty reported is the expanded uncertainty for a coverage factor of $k=2.26$ and confidence interval of approximately 95%.

Expanded Uncertainty $U_{(k=2.26)}$ is as follows:

- Radiated Emissions – Bicon (30-250 MHz): 4.1 dB
- Radiated Emissions – LPA (250-1000 MHz): 5.0 dB
- Radiated Emissions – DRWG (26.5 GHz): 4.2 dB
- Frequency: 0.007 ppm

5.5. Test Equipment Setup and Procedure

5.5.1. Sample(s) Used for Measurements

Part Number(s):	905-6548-146021-2
-----------------	-------------------

5.5.2. Test Equipment Used

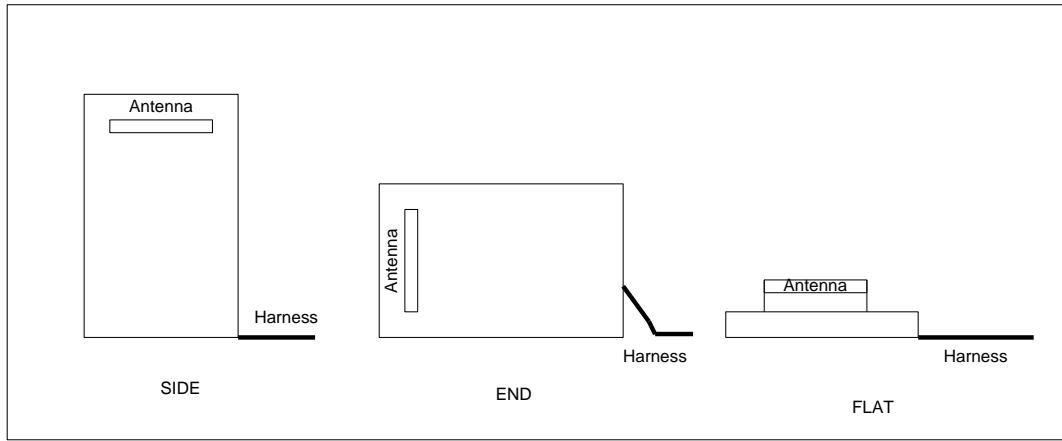
Equipment used			
ID / Serial #	Manufacturer	Description	Cal / PM Due Date
6595	Rohde and Schwarz	EMI Receiver Firmware 3.66 SP1	11/13/2024
CF GCL	Megaphase/Pasternack	3m Chamber Port and Cables	4/30/2025
H6187	EMCO	3110B Biconical RX	5/13/2027
H6192	EMCO	3148 Log Periodic RX	5/13/2027
Tower 2	ETS-Lindgren	2171B Boresight Tower	VBU
PJ2246	ETS-Lindgren	Shielded Enclosure	12/31/2024
7182	Omega	iBTHX-W Virtual	9/24/2025
6539	Stanley	Tape Measure	6/19/2026
H4554	87V	Multimeter	1/11/2025
SW30	Gentex	3m Chamber Software	3/31/2025
SW48	Gentex	Gentex Emissions Measurement Software	3/31/2025
H6193	EMCO	3147 Log Periodic TX	5/13/2027
8893	Com-Power	AH-118 Active Horn	4/22/2027
273123	Sonoma Instrument	Amplifier	12/31/2024
6368	Rohde & Schwarz	Signal Generator	9/14/2025
Absorber 1	ETS-Lindgren	Absorber	VBU
CBL 143	Megaphase	GC29-N1N1-192	4/30/2025
CBL 174	Megaphase	GC12-S1S1-360	4/30/2025

EMI Receiver Settings Emissions:

Detector Function: Quasi-Peak
 Resolution Bandwidth: 120 kHz (below 1GHz)
 1MHz (above 1GHz)

For the testing, the EUT was placed at the center of a non-conducting table 80cm above the ground plane pursuant to ANSI C63.4:2014 for stand-alone equipment. The 2-conductor harness was run down the edge of the test table to a power supply beneath the turntable.

Equipment is placed in one of the three orthogonal orientations, End, Side, and Flat where applicable. The DUT was tested in in-vehicle position only similar to the flat orientation, see test setup photos for details. These orientations are described below in Figure 6.2.1.

**Figure 6.2.1 EUT Orthogonal Orientations**

While in the prescribed orientation, the vertical antenna positioner sweeps in elevation from 1 to 4m in height until the operator finds the peak. The 3m turntable is then rotated through 360 degrees until a peak is found. The table is stopped at the peak location and the peak in elevation re-verified. Procedure is repeated for applicable orientations/measurement antenna polarizations.

6. Class B Emissions

The transmitter spurious radiation emissions were measured in a 3m semi-anechoic chamber. The design utilizes a permanently attached antenna system and offers no provision for antenna replacement. The DUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the measurement antenna. For RX mode, emissions sweeps were performed with a loop antenna in proximity of the DUT and connected to a signal generator. An emissions sweep was performed with the signal generator transmitting a CW signal for each low, mid, and high frequency of the intentional radiator frequency range to be certified.

The turntable was rotated through 360 degrees to locate the position registering the maximum amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the measurement antenna and rotating the turntable to maximize the emission. A Biconical Antenna was used for measuring emissions from 30-200 MHz, Log Antenna for 200-1000 MHz, and Double Ridge Wave Guide Horn for 1-5 GHz. Emissions were measured in dBuV/m at 3 meters.

Data was taken per 47CFR Part 2.1051 and applicable parts of 47CFR Part 15B. The DUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057.

7. Formula and Sample Calculation

The EMI Receiver used for making the measurements in this report automatically corrects for cable correction and antenna factors using values stored in memory taken from the most recent calibration (in the case of antenna factors), periodic cable loss measurements, and preamplifier gain.

$$\text{Formula 1: FS(dBuV/m)} = \text{M(dBuV)} + \text{AF(dB/m)} + \text{CF(dB)} - \text{AG(dB)}$$

The presented field strength is computed by the EMI Receiver by taking the measured level and adding to it the antenna factor and cable loss corrections. The measurements presented were gathered using the EMI Receiver's peak-hold capability.

8. Measurement Settings

30 - 200MHz:

Sweep 1: CISPR Average - 120 kHz

Segment: 1

Start Frequency: 30 MHz

End Frequency: 88 MHz

Band: Band 1

Detector: CISPR Average

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: 50 kHz

Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz):

Disabled

Sweep 2: QuasiPeak - 120 kHz

Segment: 5

Start Frequency: 30 MHz

End Frequency: 88 MHz

Band: Band 1

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: 50 kHz

Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz):

Disabled

Sweep 1: CISPR Average - 120 kHz

Segment: 2

Start Frequency: 88 MHz

End Frequency: 216 MHz

Band: Band 2

Detector: CISPR Average

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: 50 kHz

Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz):

Notch Filter (5.725 - 5.875 GHz):

Disabled

Sweep 2: QuasiPeak - 120 kHz

Segment: 6

Start Frequency: 88 MHz

End Frequency: 216 MHz

Band: Band 2

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: 50 kHz

Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz):

Disabled

200 - 1000MHz:

Sweep 1: CISPR Average - 120 kHz

Segment: 3

Start Frequency: 216 MHz

End Frequency: 960 MHz

Band: Band 3

Detector: CISPR Average

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

Bandwidth Filter: EMI (6dB)

RBW: 120 kHz

Step Size: 50 kHz

Dwell Time: 1000ms

Notch Filter (2.4 - 2.5 GHz): Disabled

Notch Filter (5.725 - 5.875 GHz):

Disabled

Sweep 2: QuasiPeak - 120 kHz

Segment: 7

Start Frequency: 216 MHz

End Frequency: 960 MHz

Band: Band 3

Detector: QuasiPeak

Sweep Mode: FFT

Attenuator: 5 dB

Pre-Amp: Off

Max Hold Trace Mode: Off

GENTEX CORPORATION

Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

1000 - 5000Mhz:

Sweep 3: CISPR Average - 1000 kHz
Segment: 9
Start Frequency: 1000 MHz
End Frequency: 5000 MHz
Band: Band 5
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 1000 kHz
Step Size: 500 kHz
Dwell Time: 5ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 4: Peak - 1000 kHz
Segment: 10
Start Frequency: 1000 MHz
End Frequency: 5000 MHz
Band: Band 5
Detector: Peak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 1000 kHz
Step Size: 500 kHz
Dwell Time: 5ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 1: CISPR Average - 120 kHz
Segment: 4
Start Frequency: 960 MHz
End Frequency: 1000 MHz
Band: Band 4
Detector: CISPR Average
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms
Notch Filter (2.4 - 2.5 GHz): Disabled
Notch Filter (5.725 - 5.875 GHz):
Disabled

Sweep 2: QuasiPeak - 120 kHz
Segment: 8
Start Frequency: 960 MHz
End Frequency: 1000 MHz
Band: Band 4
Detector: QuasiPeak
Sweep Mode: FFT
Attenuator: 5 dB
Pre-Amp: Off
Max Hold Trace Mode: Off
Bandwidth Filter: EMI (6dB)
RBW: 120 kHz
Step Size: 50 kHz
Dwell Time: 1000ms

Emissions in the 1000-5000 frequency range using the average detector were found to be greater than 20dB below the limit.

GENTEX CORPORATION

Test Mode	Detector	Frequency (MHz)		Worst-Case Orientation	Antenna Polarization	Frequencies (MHz)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)
		Start	Stop						
RX	Quasi-Peak	88	216	Flat	V	89.42	26.54	43.5	-16.96
RX	Quasi-Peak	88	216	End	V	94.53	23.65	43.5	-19.85
RX	Quasi-Peak	88	216	Flat	V	100.13	23.65	43.5	-19.85
RX	Quasi-Peak	88	216	End	V	106.25	23.65	43.5	-19.85
RX	Quasi-Peak	88	216	End	V	124.99	26.85	43.5	-16.65
RX	Quasi-Peak	88	216	End	H	162	25.33	43.5	-18.17
RX	Quasi-Peak	216	1000	End	H	225	19.19	46	-26.81
RX	Quasi-Peak	216	1000	Side	H	250	24.73	46	-21.27
RX	Quasi-Peak	216	1000	End	V	516	33.44	46	-12.56
RX	Quasi-Peak	216	1000	End	H	554	22.55	46	-23.45
RX	Quasi-Peak	216	1000	Side	V	730	25.05	46	-20.95
RX	Quasi-Peak	216	1000	End	V	904	35.53	46	-10.47
RX	Peak	1000	5000	Side	H	1034	37.29	74	-36.71
RX	Peak	1000	5000	End	H	1550	38.56	74	-35.44
RX	Peak	1000	5000	End	V	2066	38.95	74	-35.05
RX	Peak	1000	5000	Flat	H	2582	42.24	74	-31.76
RX	Peak	1000	5000	End	H	3098	41.32	74	-32.68
RX	Peak	1000	5000	Side	V	4134	44.04	74	-29.96
RX	Peak	1000	5000	End	H	4430	42.35	74	-31.65