

NOTES:


1. INTERPRET DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.

2. SEE VIEW 'A' FOR LABEL MATERIALS AND CONSTRUCTION.

3. ARTWORK SHALL BE PER TERABEAM COREL DRAW FILE '3613.CDR'.  
ARTWORK FILE LOCATION:  
TERABEAM\HXI-FILE\COMPANY\STATIONARY\PRODUCT LABELS

4. LABEL REQUIREMENTS PER THE FOLLOWING:

FINISHED LABEL WILL BE EXPOSED TO OUTDOOR CONDITIONS UNDER DIRECT SUNLIGHT. INK AND TOP COATING SHALL NOT FADE OR DISCOLOR FOR A MINIMUM OF FIVE (5) YEARS. CLEAR POLY-TOP COAT SHALL BE SCRATCH RESISTANT AS WELL AS U.V. AND WATER RESISTANT. LABEL MUST BE ABLE TO WITHSTAND AN OIL AND GASOLINE WIPE WITHOUT SMEARING OR ERASING THE INK. ADHESIVE LAYER SHALL BE WATER RESISTANT. LABEL MUST ADHERE TO POWDER COATED, IRRIDITED AND PAINTED ALUMINUM SURFACES.

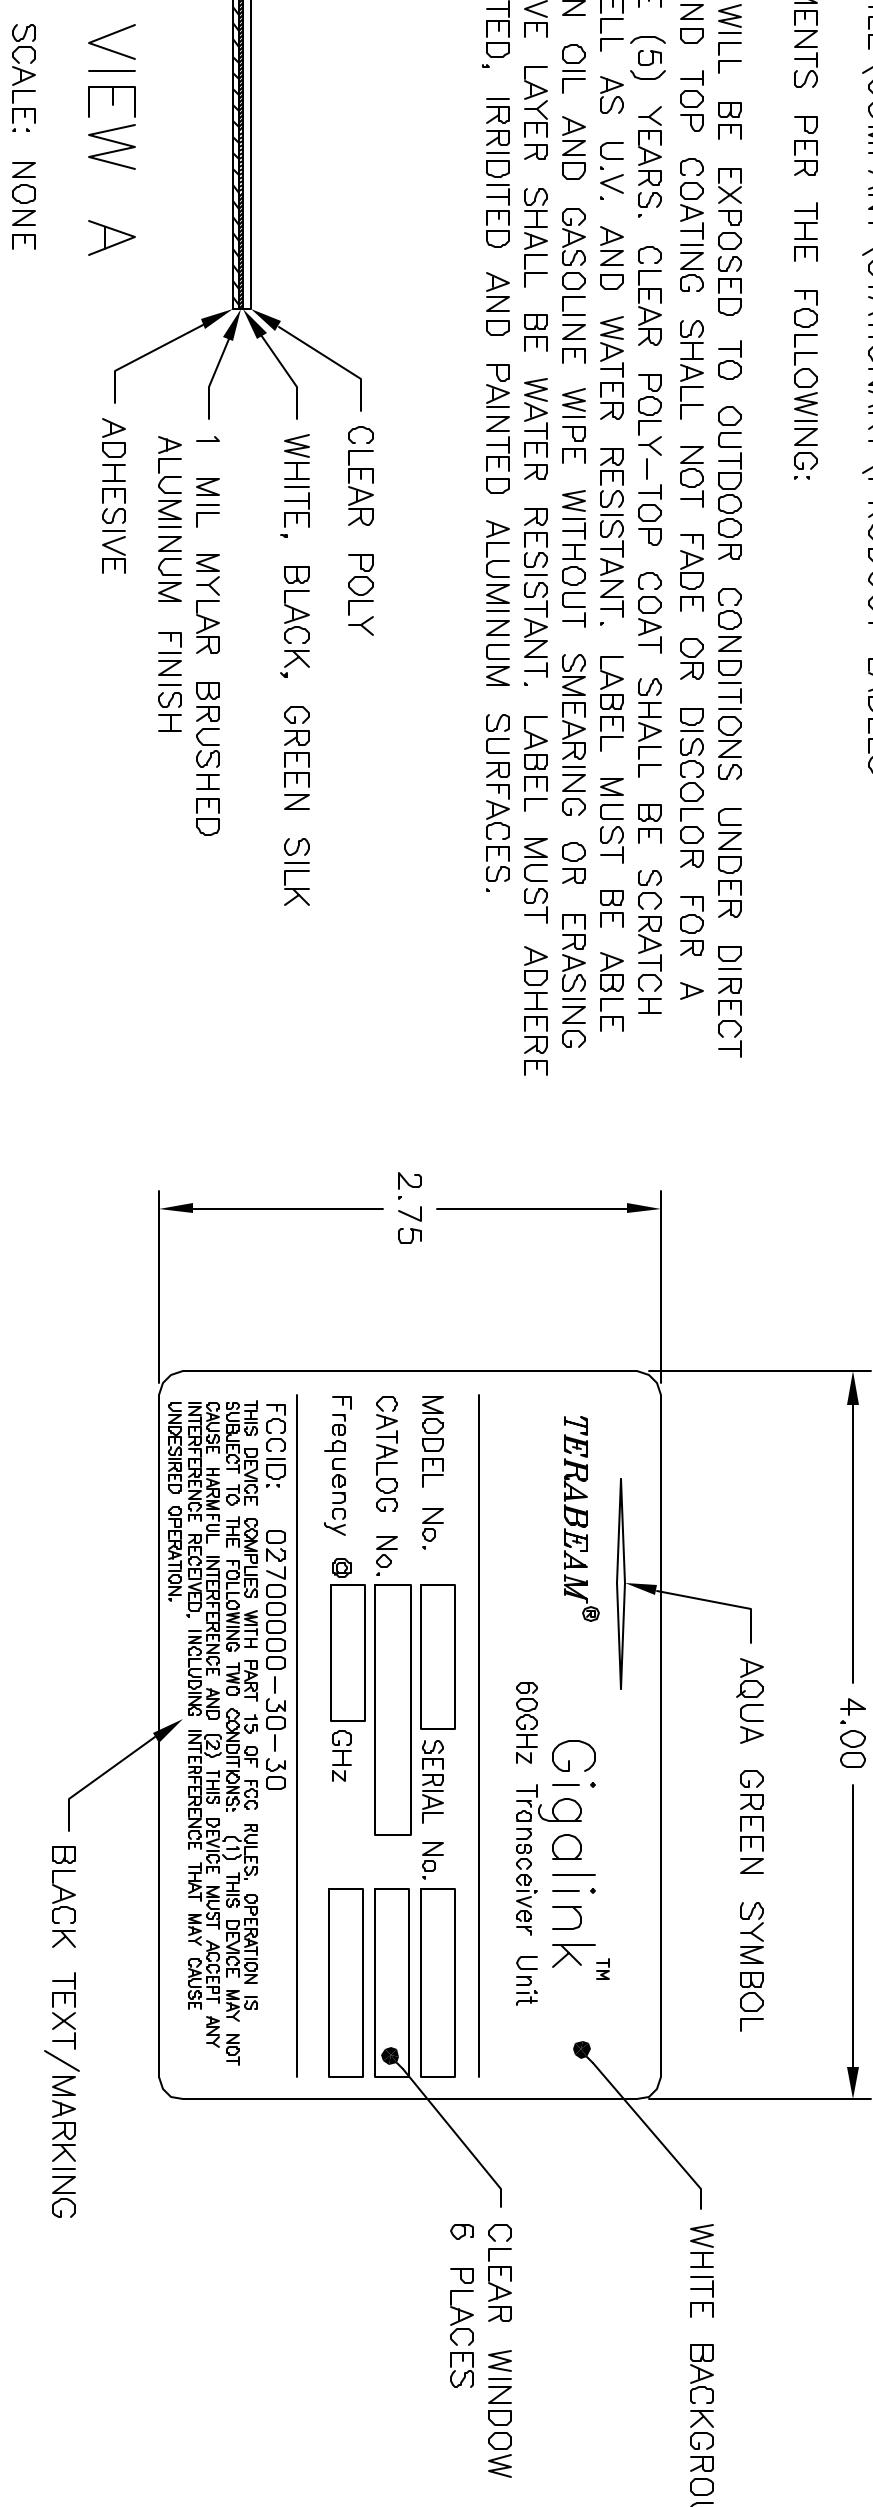

MATERIAL SEE NOTE 2	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY R.CHAGNON	11/22/02	TERABEAM CORPORATION		
FINISH	NONE	CHECKED BY	1755 OSGOOD ST., NORTH ANDOVER, MA 01845	ENG.		
TOLERANCES	.XX DECIMAL ± .02	PROD.		LABEL, I.D. PLATE		
	.XXX DECIMAL ± ---	Q.A.				
ANGLES	± - °	THIRD ANGLE PROJECTION	SIZE B	CAGE CODE 1PT62	3613	
3576	GIGALINK	USED ON	SURFACE QUALITY NA	SCALE 1/1	SHEET 1 OF 1	
NEXT ASSEMBLY	APPLICATION	DO NOT SCALE DRAWING				
THIS DOCUMENT IS THE PROPERTY OF TERABEAM CORPORATION. REPRODUCTION OR DISCLOSURE IS FORBIDDEN WITHOUT THE PRIOR APPROVAL OF TERABEAM CORPORATION.						

REVSIONS	
ZONE LTR	DESCRIPTION DRAWING INITIATED DATE APPROVED