

Nemko Comlab AS

Office address: Gåsevikveien 8, Kjeller
Postal address: P.O.Box 96, N-2027 Kjeller
Telephone: +47 64 84 57 00
Facsimile: +47 64 84 57 05
E-mail: post@comlab.no
<http://www.comlab.no>
Enterprise no: NO 984 592 418 MVA

Pages : 32
Total no. of sheets : 32

Test report : 04/720/3
Item tested : 13192-SARD
Type of equipment : Zigbee transceiver
FCC ID : O2O13192-SARD
Client : Digianswer A/S

Tested according to :

FCC part 15.247
DTS Transmitter
2405 - 2480 MHz

Date of issue : 16 July 2004

Authorized by :


for
Kjell G. Haga
Managing Director


Egil Hauger
Technical Supervisor

The results detailed in this test report applies only to the particular sample(s) tested and with configuration(s) as implemented during testing. This test report shall not be reproduced, except in full, without the written approval of Nemko Comlab AS.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Comlab AS accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test house Info	3
1.2	Client Information	3
1.3	Manufacturer	3
2	Test Information	4
2.1	Tested Item	4
2.2	Test Environment	4
2.3	Test Period	4
3	TEST REPORT SUMMARY	5
3.1	General	5
3.2	Test Summary	6
3.3	Description of modification for Modification Filing	6
3.4	Comments	6
3.5	Family List Rational	6
4	TEST RESULTS	7
4.1	Power line Conducted Emissions	7
4.2	Bandwidth	12
4.3	Peak Power Output	15
4.4	Out-of-band emissions (Radiated)	18
4.5	Power Spectral Density (PSD)	29
	LIST OF TEST EQUIPMENT	30
5	BLOCK DIAGRAM	31
5.1	System set up	31
5.2	Power line Conducted Emission	31
5.3	Test Site Radiated Emission and peak power output	32

1 GENERAL INFORMATION

1.1 Test house Info

Name : Nemko Comlab AS
Address : Gåsevikveien 8, Box 96
N-2027 Kjeller, NORWAY
Telephone : +47 64 84 57 00
Fax : +47 64 84 57 05
E-mail: <mailto:post@comlab.no>
Managing Director: Kjell G. Haga
FCC test firm registration number : 994405
Industry Canada OATS registration number : 4443

1.2 Client Information

Name : Digianswer A/S
Address : Skalhuse 5, 9240 Nibe, Denmark
Telephone : +45 967 10 000
Fax : +45 983 50 052

Contact:

Name : Johnny Jonassen
Telephone : +45 967 12 153
E-mail : jjonas1@freescall.com

1.3 Manufacturer

Name : Digianswer A/S
Address : Skalhuse 5, 9240 Nibe, Denmark
Telephone : +45 967 10 000
Fax : +45 983 50 052

2 Test Information

2.1 Tested Item

Name :	13192-SARD
FCC ID :	O2O13192-SARD
Model/version :	DIG536-2
Serial number :	Marked on PCB "13192-SARD"
Hardware identity and/or version:	80000536000_R0201
Software identity and/or version :	PTC Demo ver.0.99
Frequency Range :	2405 - 2480 MHz
Tunable Bands :	1
Number of Channels :	16 ¹
Modulation :	0-QPSK
Emissions Designator :	G1D
User Frequency Adjustment :	None, Software controlled.
Rated Output Power :	10 mW

1) 16 channels in use.

Theory of Operation

The 13192-SARD is a "Zigbee" low data rate wireless device according to IEEE 802.15.4, with 5MHz channel bandwidth.

2.2 Test Environment

2.2.1 Normal test condition

Temperature:	20 - 23 °C
Relative humidity:	29 - 50 %
Normal test voltage:	9.0 V DC

The values are the limit registered during the test period.

2.3 Test Period

Item received date:	2004-07-02
Test period :	from 2004-07-06 to 2004-07-07

3 TEST REPORT SUMMARY

3.1 General

Manufacturer: Digianswer A/S
Model No.: 13192-SARD
Serial No.: Marked on PCB "13192-SARD"

All measurements are traceable to national standards.

The tests were conducted for the purpose of demonstrating compliance with FCC §15.247 for Digital Modulation devices. Radiated tests were conducted in accordance with ANSI C63.4-1992.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 3 and 10 meters.

☒ New Submission

☒ Production Unit

☐ Class II Permissive Change

☐ Pre-production Unit

DTS Equipment Code

☐ Family Listing

THIS TEST REPORT RELATES ONLY TO THE ITEM (S) TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

COMLAB

NEMKO COMLAB REF: 04/720/3

TESTED BY:



G.Suhanthakumar, Test engineer

DATE: **16 July 2004**

Nemko Comlab AS authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Comlab AS accepts no responsibility for damages suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

3.2 Test Summary

Name of test	Paragraph #	Result
Supply voltage variations	15.31 (e)	Complied
Number of operating frequencies	15.31 (m)	Complied
Conducted Emission (Receiver)	15.107(a)	ref. 15.207(a)
Radiated Emission limits (receiver)	15.109(a)	ref. 15.209(a)
Antenna requirement	15.203	Complied
Radiated emissions limits for restricted bands	15.205(a)	Complied
Power line Conducted Emission	15.207(a)	Complied
Radiated emission limits	15.209(a)	Complied
Bandwidth	15.247(a)(2)	Complied
Peak Power Output	15.247(b)(3)	Complied
Power Spectral Density	15.247(d)	Complied
Out-of-band emissions (Antenna Conducted)	15.247(c)	N/A ¹
Out-of-band emissions (Radiated)	15.247(c)	Complied

¹ The tested equipment has integrated antennas only.

3.3 Description of modification for Modification Filing

Not Applicable.

3.4 Comments

The channels are selected with a laptop PC connected to the EUT. The laptop and the software for communication/test mode is delivered for testing by the manufacturer. The laptop is only used for selection of channels. The measurements are performed at channels near top ch 11, near middle ch 19 and near bottom ch 26. And the output level is set to maximum in the software (code 00FF)The EUT complies at these channels.

The measurements are done with battery (DC power) and AC adapter. All ports were populated during spurious emissions measurements.

3.5 Family List Rational

None.

4 TEST RESULTS

4.1 Power line Conducted Emissions

Para. No.: 15.207 (a)

Test Performed By: G.Suwanthakumar

Date of Test: 07 July 2004

Measurement procedure: CISPR 22 1997 Clause 5.1 Class B ITE using 50 μ H/50 ohms LISN.

Test Results: **Complies.**

Measurement Data: **See attached graph, (Peak detector).**


Highest measured value: for AC adapter

Frequency	Line	Detector	Measured value	Limit	Margin
MHz	L1/ N	Peak/QP/AV	$\text{dB}_{\mu\text{V}}$	$\text{dB}_{\mu\text{V}}$	dB
0.63457	L1	QP	32,03	56	
0.63457	L1	AV	31,05	46	
2,056	L1	QP	21,89	56	
2.056	L1	AV	21,45	46	
2,53	L1	QP	21,89	60	
2,53	L1	AV	21.00	50	
26,6	L1	QP	11,53	60	
26,6	L1	AV	11,20	50	
20.461	N	QP	7,72	60	
20,461	N	AV	7,70	50	


Highest measured value: for external DC power supply

Frequency	Line	Detector	Measured value	Limit	Margin
MHz	L1/ N	Peak/QP/AV	$\text{dB}_{\mu\text{V}}$	$\text{dB}_{\mu\text{V}}$	dB
0.236	N	QP	27.38	56	
0.236	N	AV	26.40	46	


Test equipments used: 2, 4 & 16

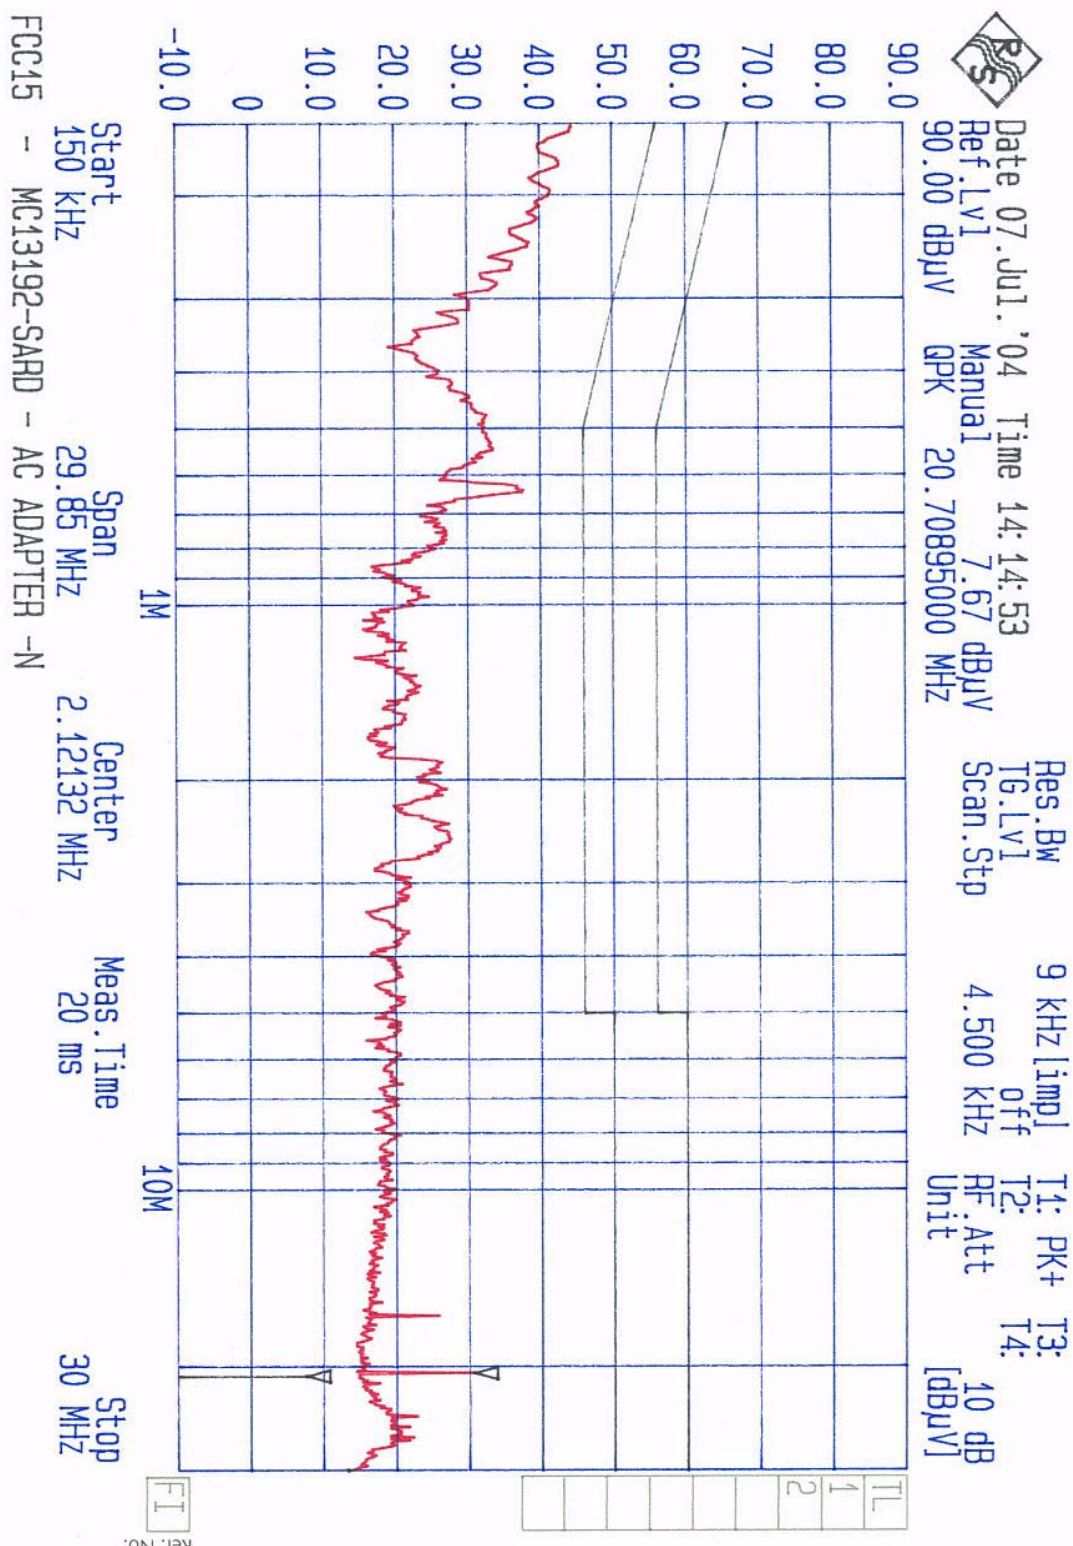


AC adapter, phase N

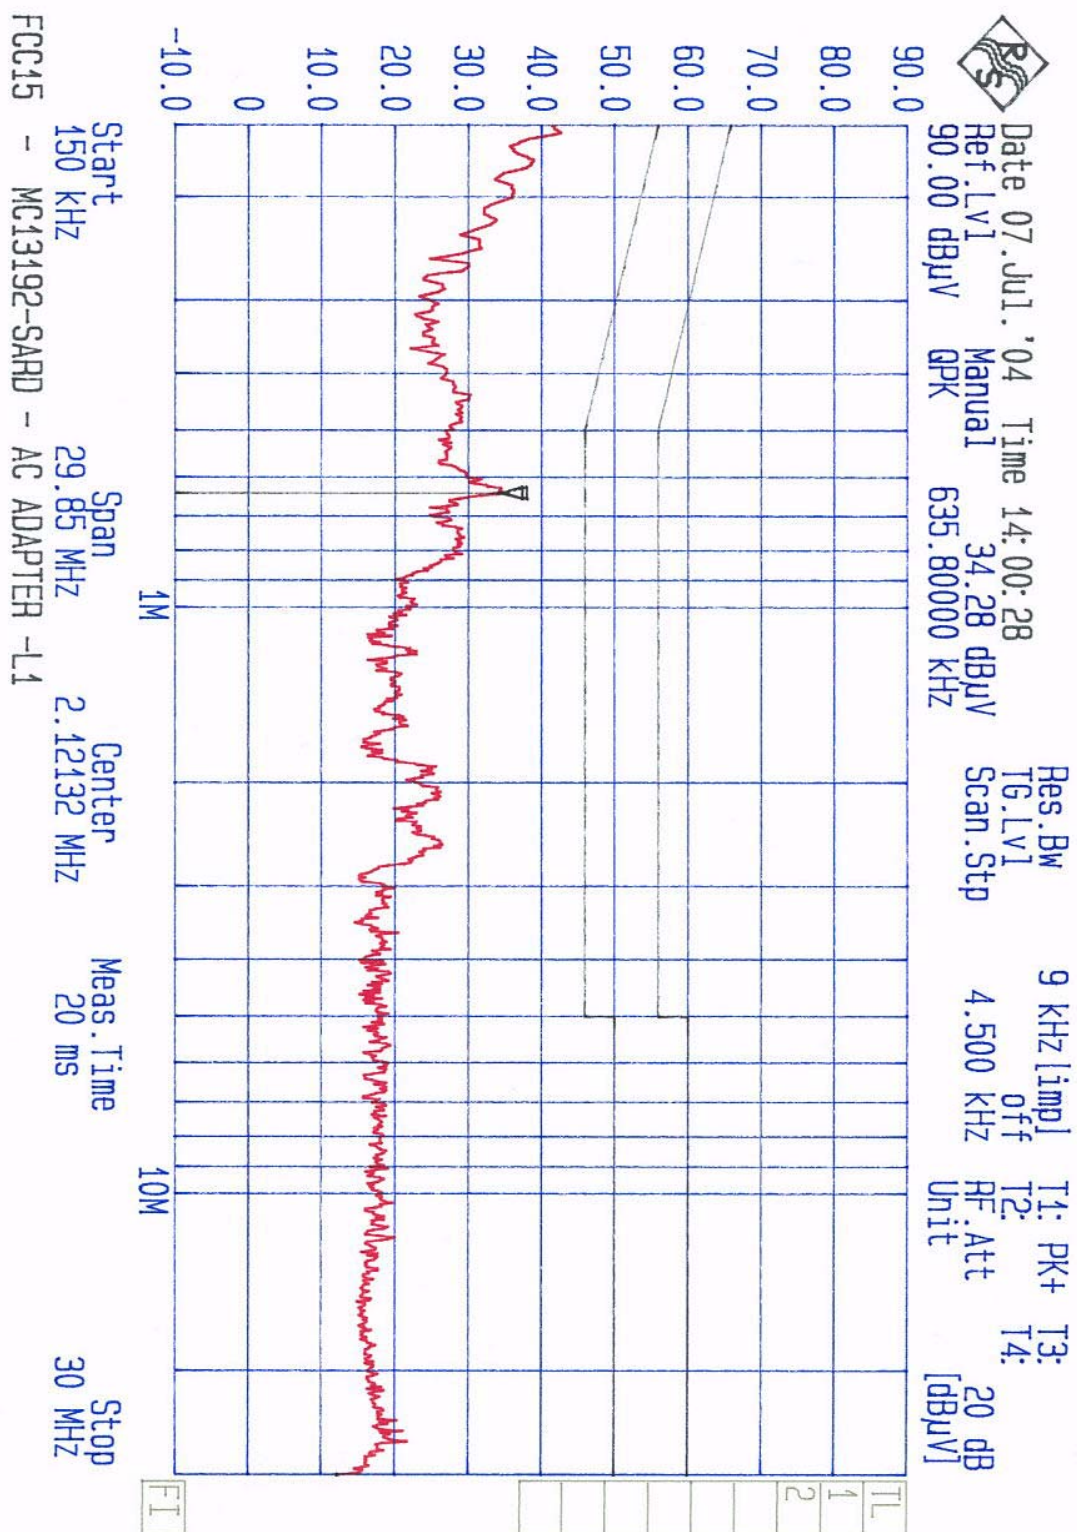

AC adapter, phase L1

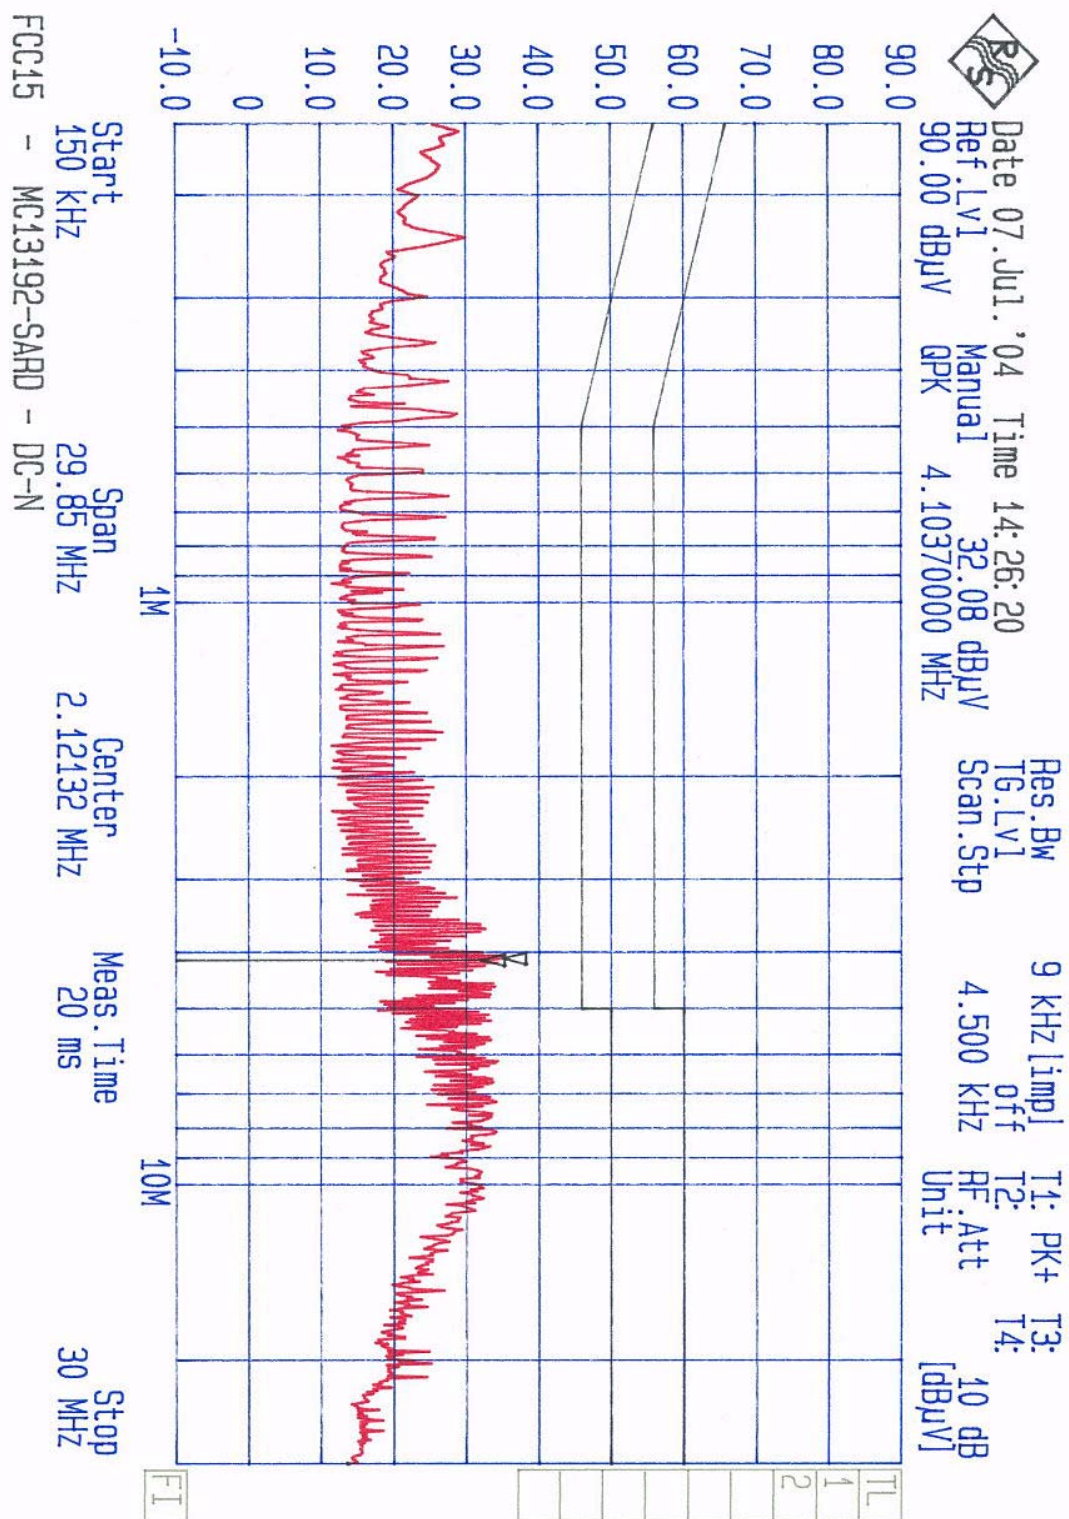

DC power supply, phase N

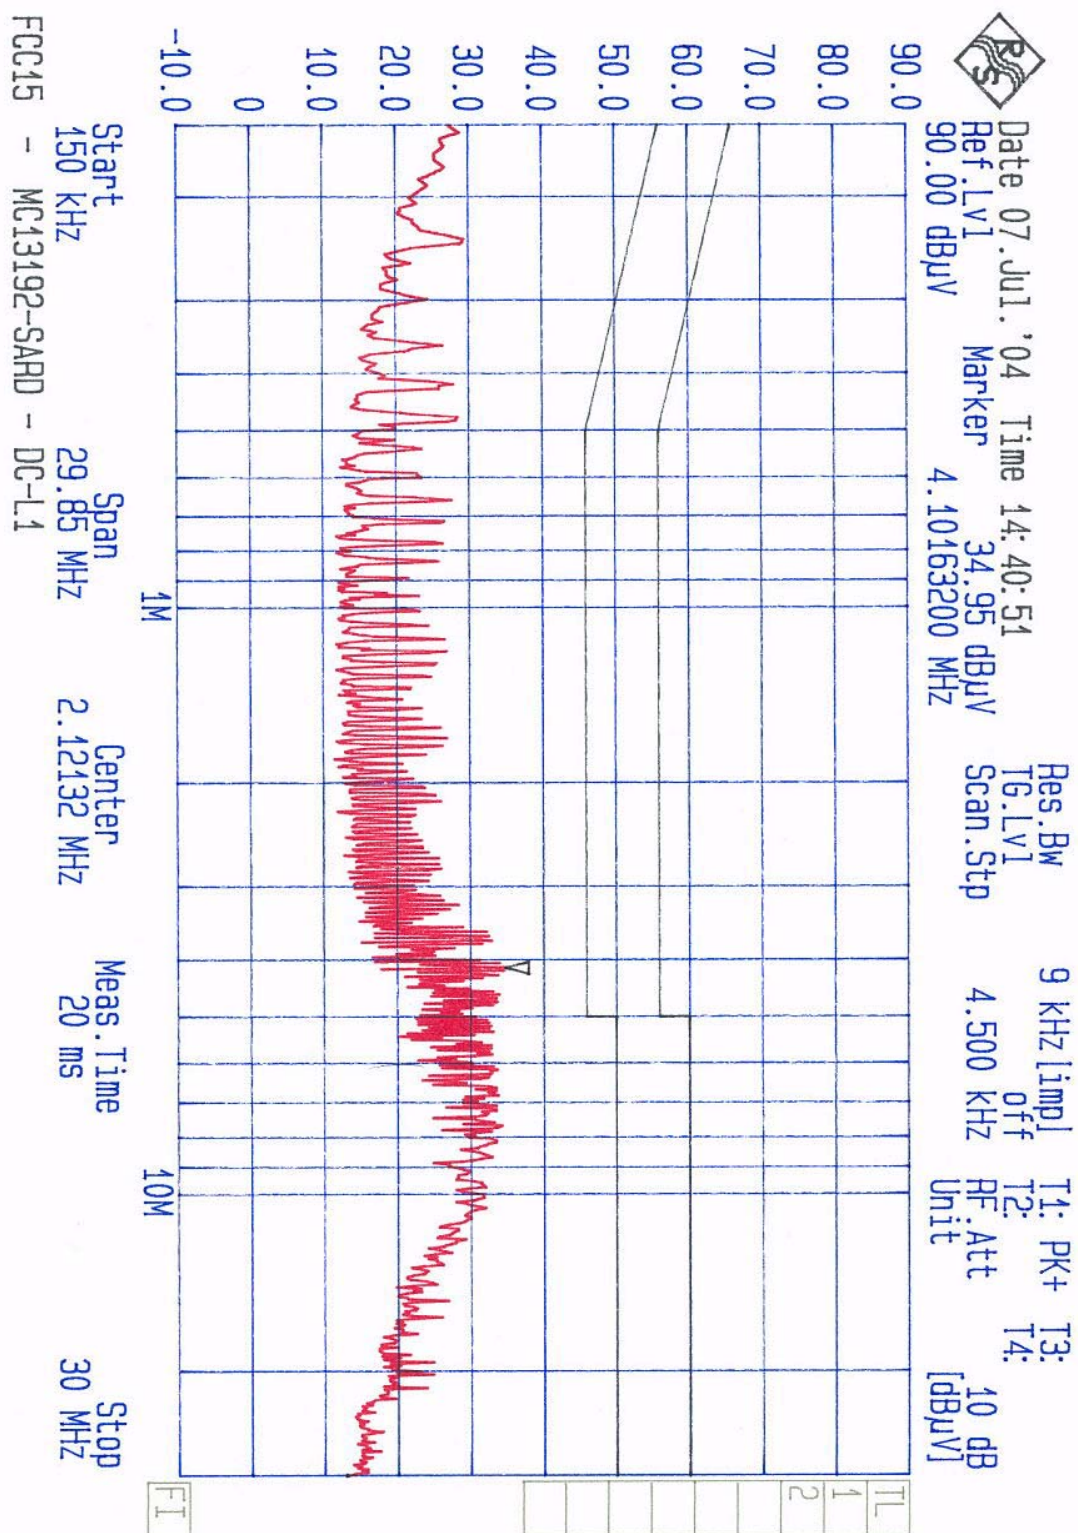

DC power supply, Phase L1

4.2 Bandwidth

Para. No.: 15.247 (a)(2)

Test Performed By: G.Suwanthakumar

Date of Test: 07. July 2004

Test Results: Complies

Measurement Data:



6 dB Bandwidth (MHz)		
Ch 11	Ch 19	Ch 26
1.64	1.60	1.68


Power supply variation within 85 % to 115% of nominal value has no influence on measured value.

Requirements:

The minimum 6 dB bandwidth shall be at least 500 KHz.

Test equipments used: 1, 3, 12 & 19

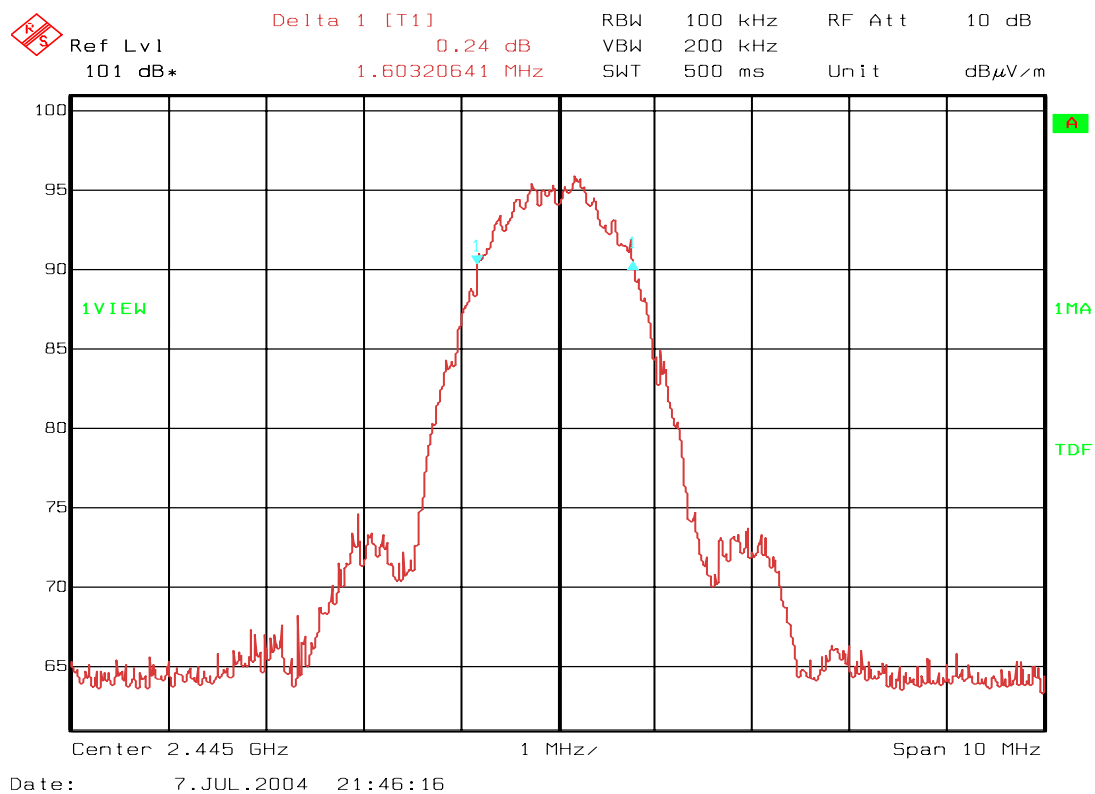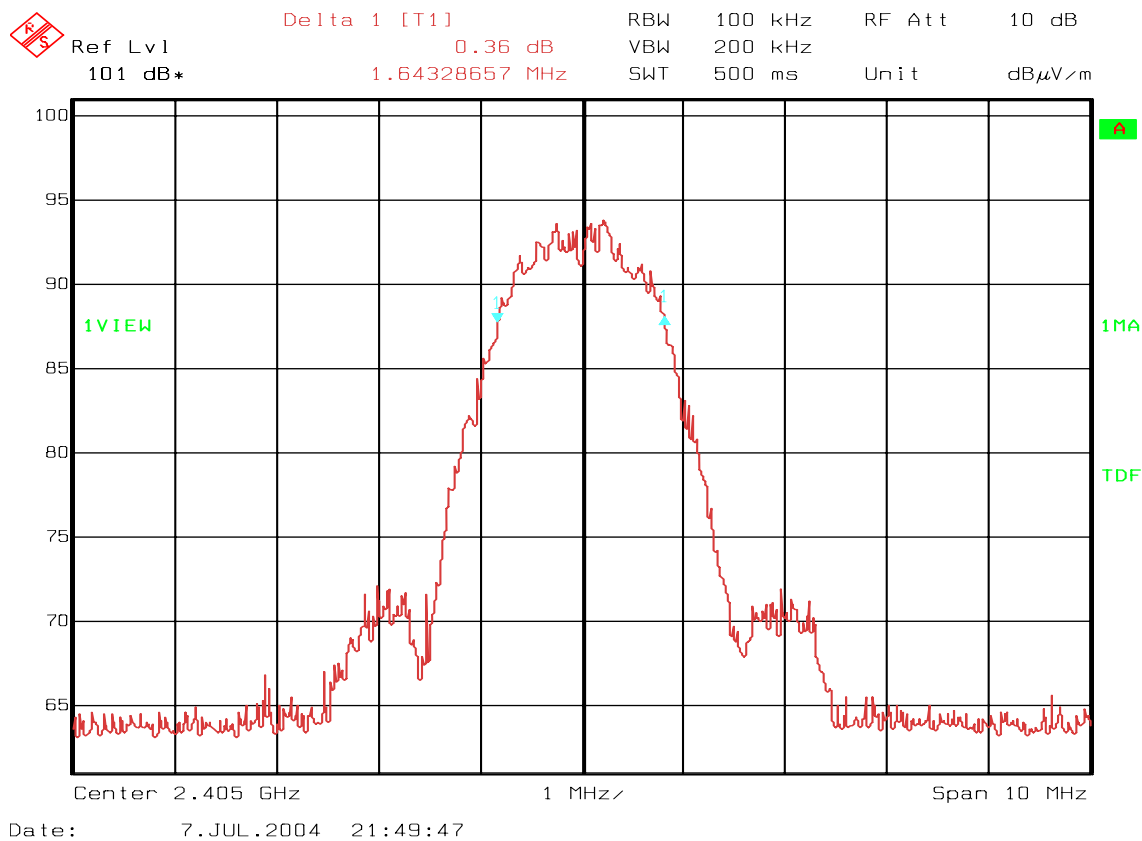

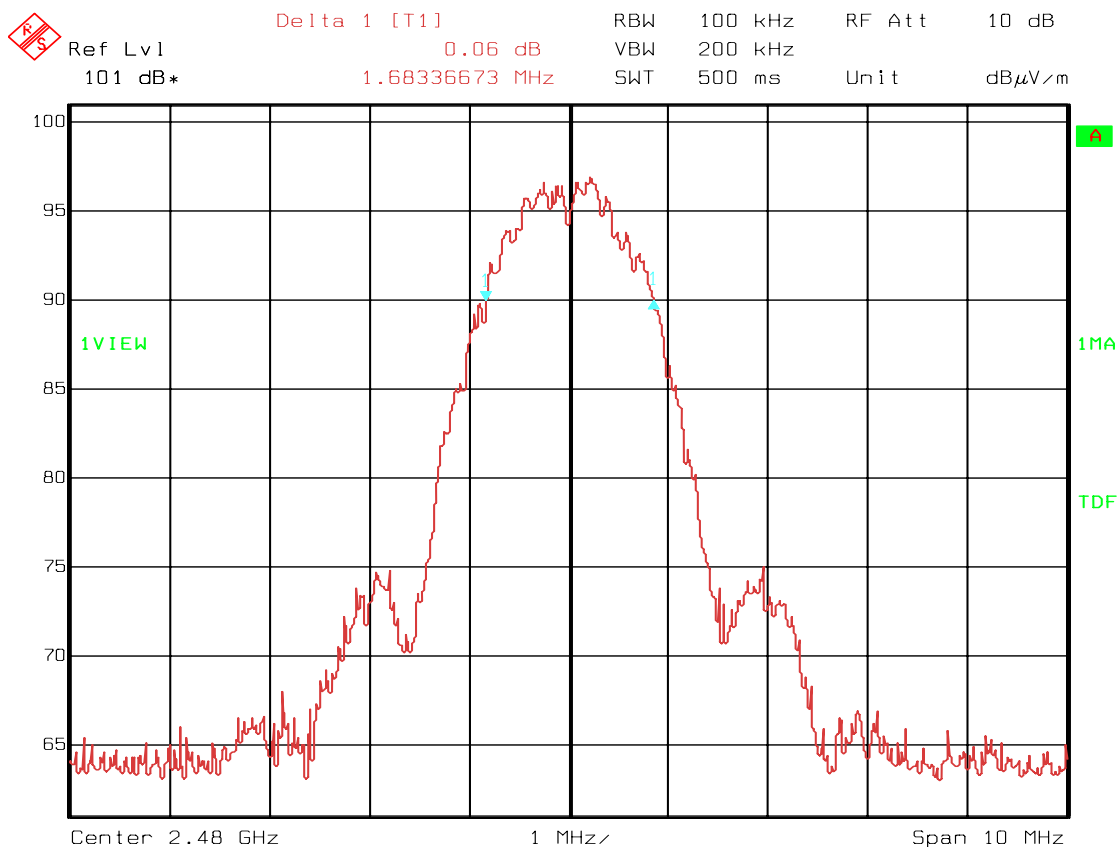

Date: 7.JUL.2004 21:43:57

Ch 26, 6 dB bandwidth - 1.68 MHz

4.3 Peak Power Output

Para. No.: 15.247 (b)(3)

Test Performed By: G.Suethakumar

Date of Test: 07. July 2004

Rated output power level (maximum) 10 mW (10 dBm)

Calculated Transmitter Power , EIRP (mW)		
Ch 11	Ch 19	Ch 26
6.3	10.1	16.3

Test Results: Passed.

Power supply variation within 85 % to 115% of nominal value has no influence on Peak output power.

Measurement Data:

The maximum field strength of fundamental, RBW=10MHz, Ch 11 : 103.23dB μ V/m

The maximum field strength of fundamental, RBW=5MHz, Ch 19 : 105.24 dB μ V/m

The maximum field strength of fundamental, RBW=5MHz, Ch 26 : 107.35 dB μ V/m

Calculated Data:

- The maximum field strength of fundamental in V/m ($10^{((103.23)/20)} \times 1^{-6}$) Ch11: 0.145V/m
- The maximum field strength of fundamental in V/m ($10^{((105.24)/20)} \times 1^{-6}$) Ch19: 0.183V/m
- The maximum field strength of fundamental in V/m ($10^{((107.35)/20)} \times 1^{-6}$) Ch26: 0.233V/m

Calculated maximum EIRP using free field formula:

- Ch11: P(EIRP) watts: $(3 \times 0.145)^2 / 30 = 6.3$ mW
- Ch19: P(EIRP) watts: $(3 \times 0.183)^2 / 30 = 10.1$ mW
- Ch26: P(EIRP) watts: $(3 \times 0.233)^2 / 30 = 16.3$ mW

The maximum power is obtained at Horizontal polarization and measured at 3 meters.


The antenna gain of the measurement antenna and cable loss have been taken into consideration.

Requirements:

The maximum peak output power for DS systems shall not exceed the following limits:


For systems using Digital Modulation in the 2400 - 2483.5 MHz band: less than or equal to 1 watt

Test equipments used: 1, 3, 12 & 19

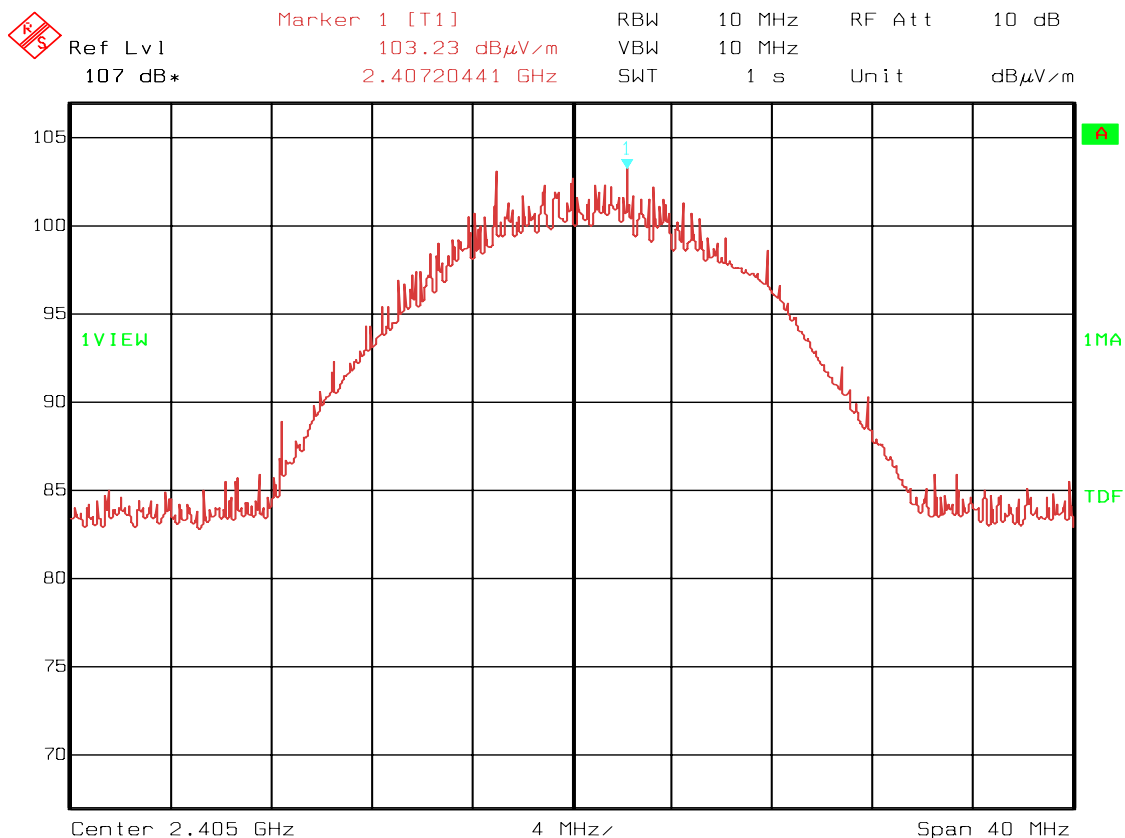


Date: 7.JUL.2004 21:01:25

Ch 11, Peak output power

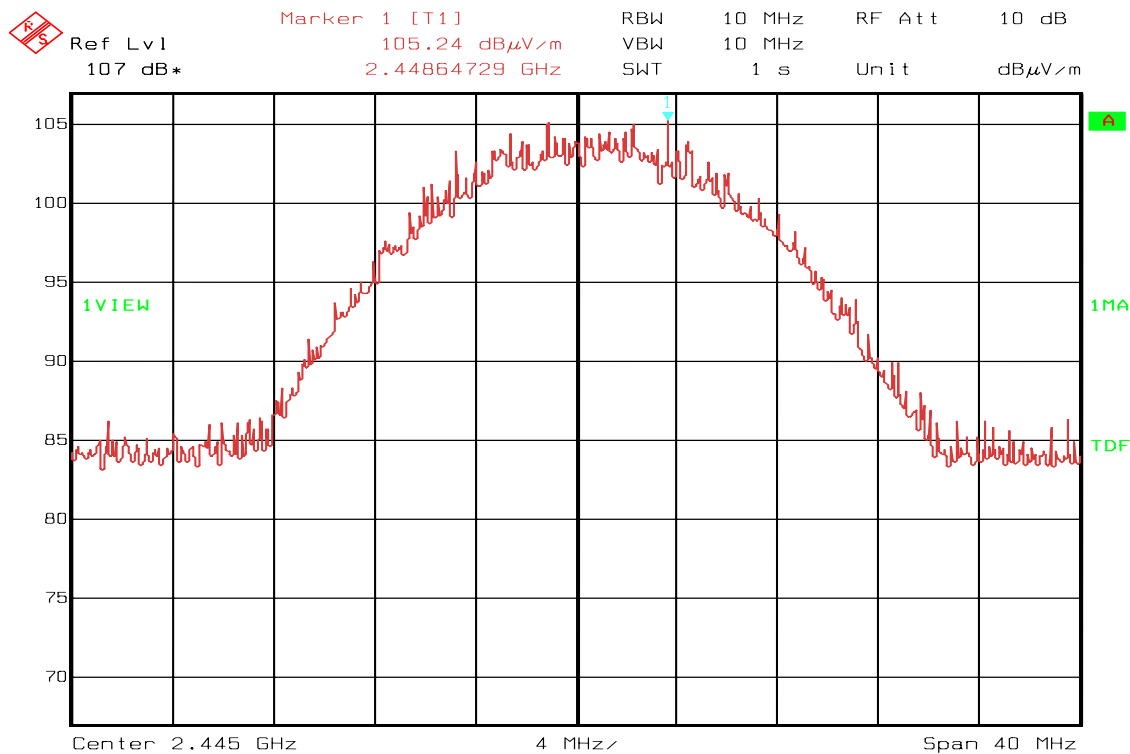

Date: 7.JUL.2004 21:03:41

Ch 19, Peak output power

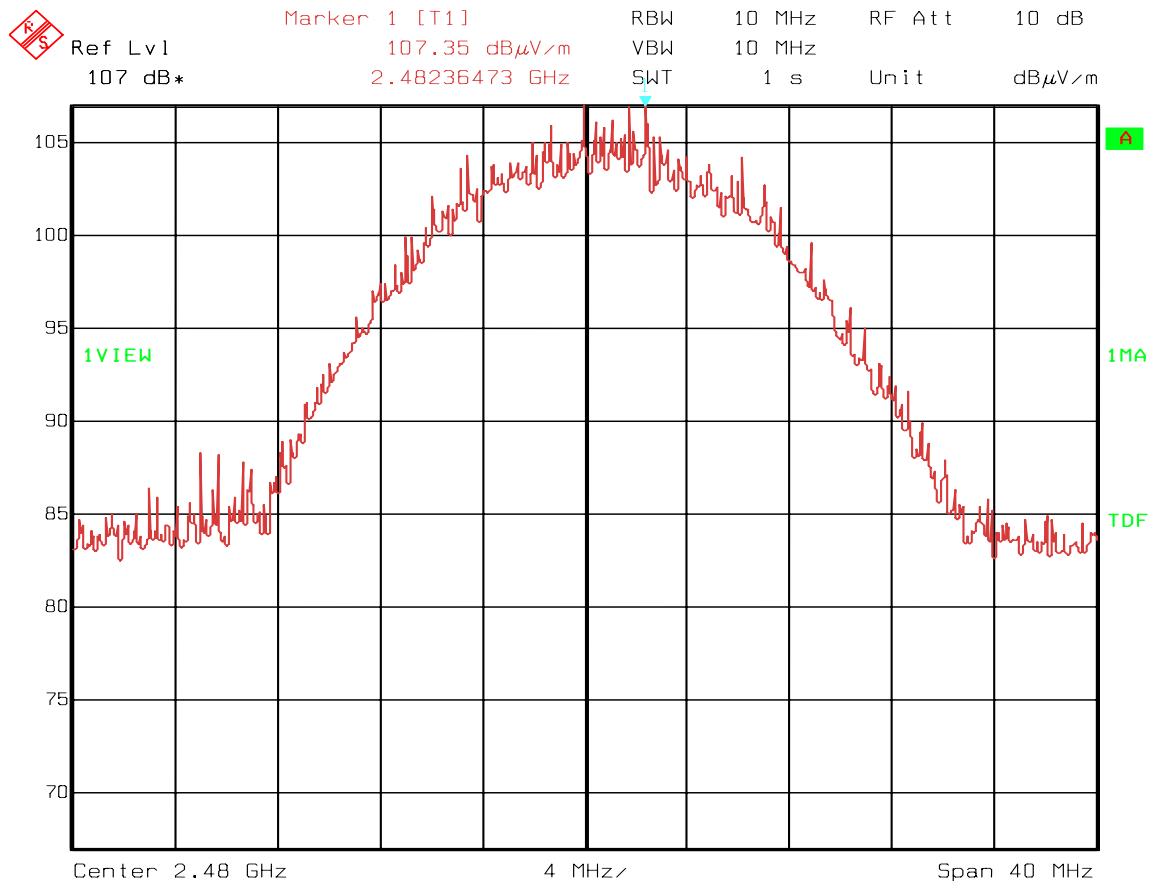

Date: 7.JUL.2004 21:08:16

Ch 26, Peak output power

4.4 Out-of-band emissions (Radiated)

Para. No.: 15.247 (c)

Test Performed By: G.Suwanthakumar

Date of Test: 07. July 2004

Test Results: complies

Measurement Data:

Radiated emission (Integrated ant), 1-25 GHz, see attached table.

Highest value RF Ch 11: Peak 58.92 dB μ V/m, average 44.23 dB μ V/m, 7.214GHz

Ch 19: Peak 50.18 dB μ V/m, average 43.44 dB μ V/m, 1.830 GHz

Ch 26: Peak 49.52 dB μ V/m, average 42.78 dB μ V/m, 1.849 GHz

Duty Cycle Calculation:

RF duty cycle: Calculation according to RF burst Para 15.35 (c)

$$20 \cdot \log (1.5\text{ms}/30.16\text{ms}) = -26 \text{ dB}$$

Maximum duty cycle according to Para 15.35 (b): -20 dB

No components above 2.7 GHz were detected

This value is used when measuring average field strength above 1 GHz with Peak Detector function employed on the spectrum analyzer.


Example of frequency graph of radiated emission is also attached.

Antenna factor, amplifier gain and cable loss are included in the spectrum analyzer "Transducer factor".


Requirements:

Not greater than -20dBc

Test equipments used: 1, 3, 7,8,9,10,11,12,17,18 , 19 & 20

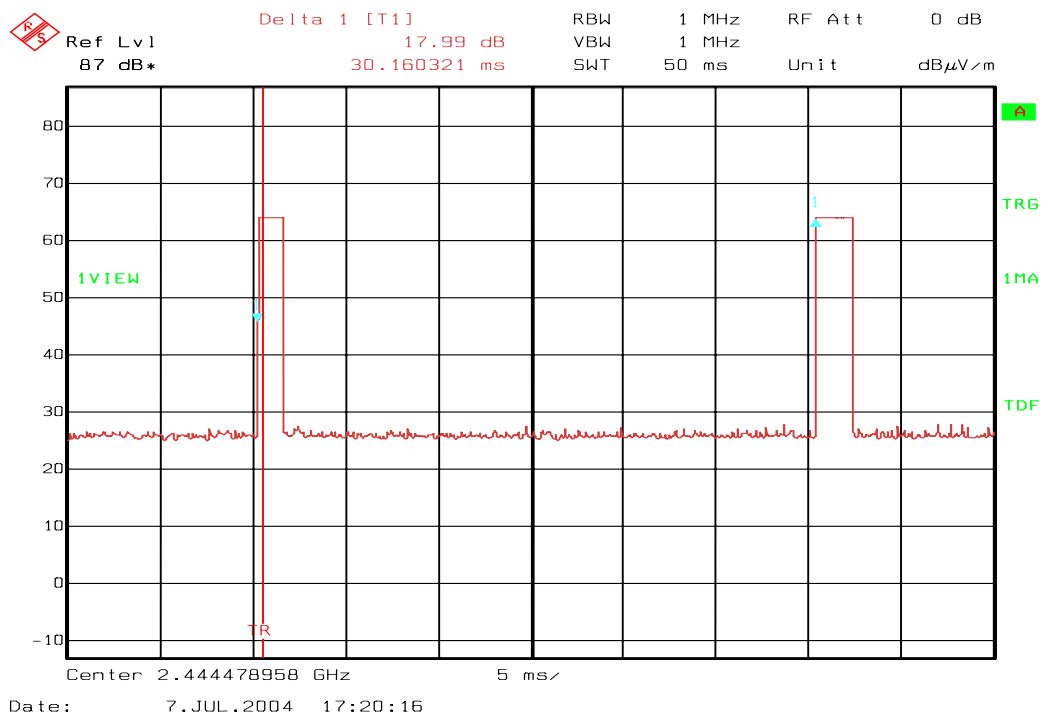

OFF time

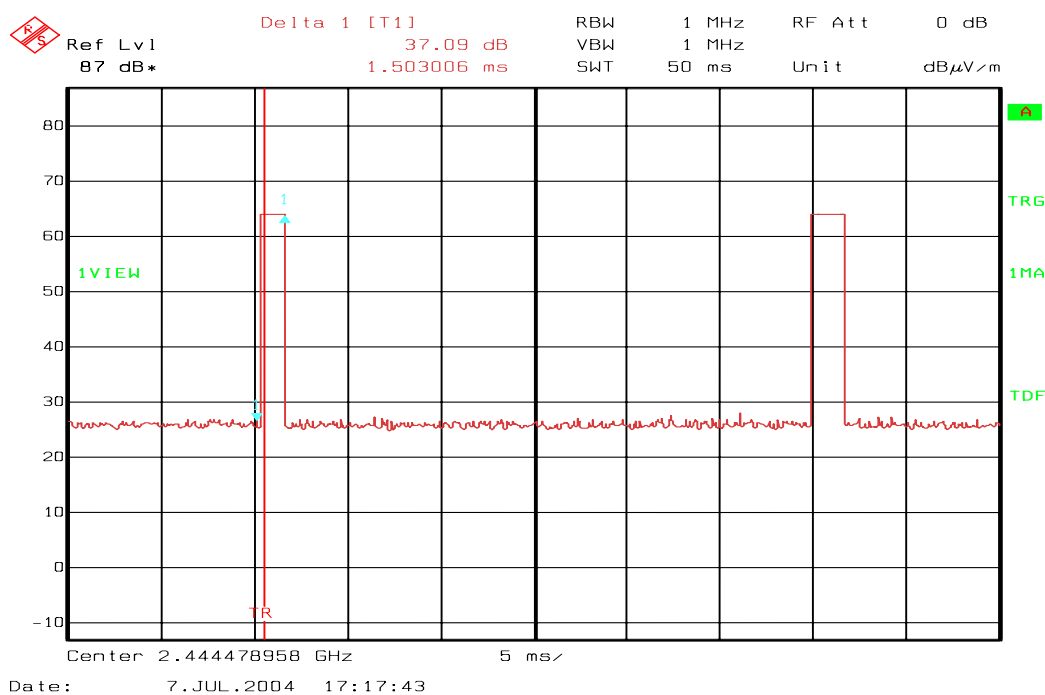

ON time

Radiated Emission 1 – 25 GHz, Peak


Measured with Peak Detector

Frequency	RF channel	Dist. corr. factor	Field strength, Peak, 3m	Duty cycle corr. factor	Limit	Margin
GHz	11-26	dB	dB μ V/m	dB	dB μ V/m	dB
4.809	11	0	58.42	-	74	15.58
4.889	19	0	61.64	-	74	12.36
4.959	26	0	58.71	-	74	15.29
7.214	11	0	58.92	-	74	15.08
7.334	19	0	57.55	-	74	16.45
7.440	26	0	59.58	-	74	14.42
7.5 -24	11	0	None detected	-	74	-
7.5 -24	19	0	None detected	-	74	-
7.5 - 24	26	0	None detected	-	74	-

Radiated emission 1- 25 GHz, Average


Measured with Peak Detector

Frequency	RF channel	Dist. corr. factor	Field strength, Peak, 3 meters	Duty cycle corr. factor	Limit	Margin
GHz	11-26	dB	dB μ V/m	DB	dB μ V/m	dB
4.809	11	0	58.42	-20	54	15.58
4.889	19	0	61.64	-20	54	12.36
4.959	26	0	58.71	-20	54	15.29
7.214	11	0	58.92	-20	54	15.08
7.334	19	0	57.55	-20	54	16.45
7.440	26	0	59.58	-20	54	14.42
7.5 -24	11	0	None detected	-20	54	-
7.5 -24	19	0	None detected	-20	54	-
7.5 - 24	26	0	None detected	-20	54	-

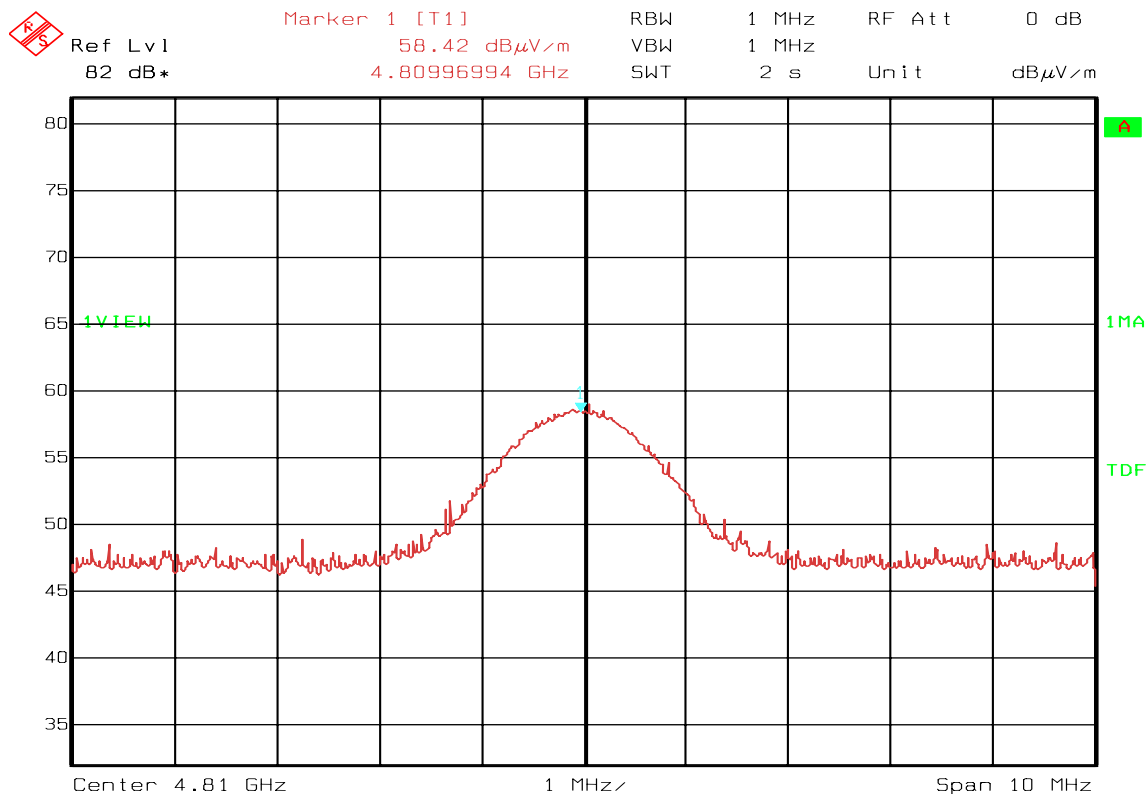


Date: 7.JUL.2004 20:32:45

Max field strength – radiated emission, 2nd Harmonic , ch 11

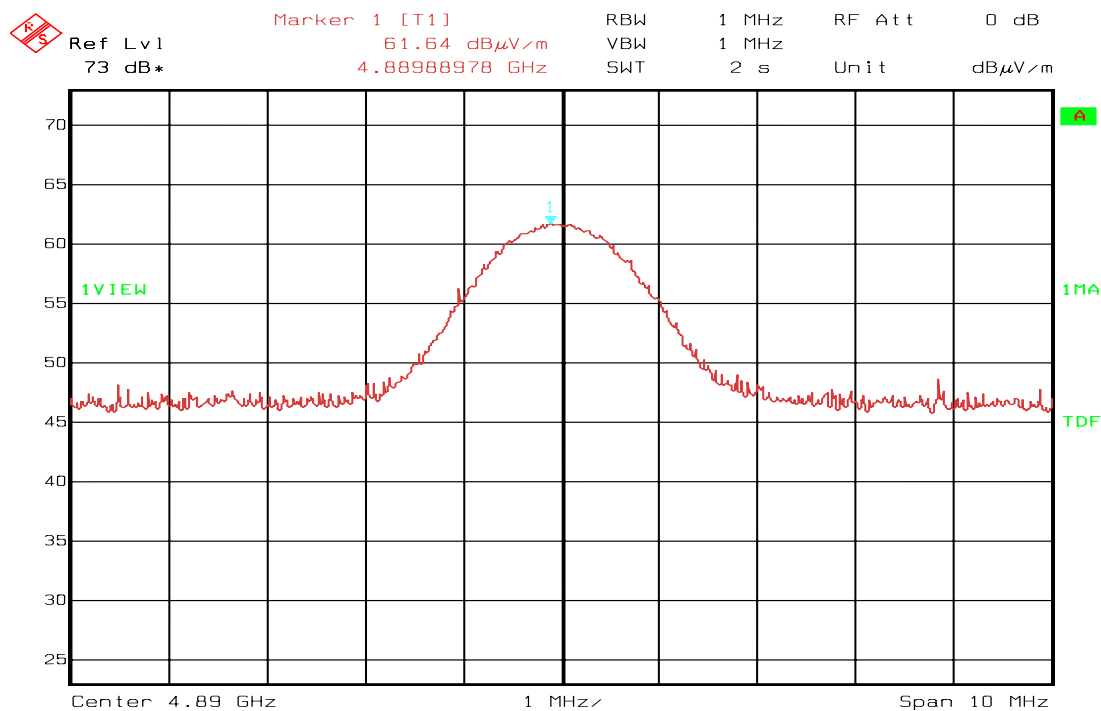


Date: 7.JUL.2004 22:04:08

Max field strength – radiated emission, 2nd Harmonic , ch 19

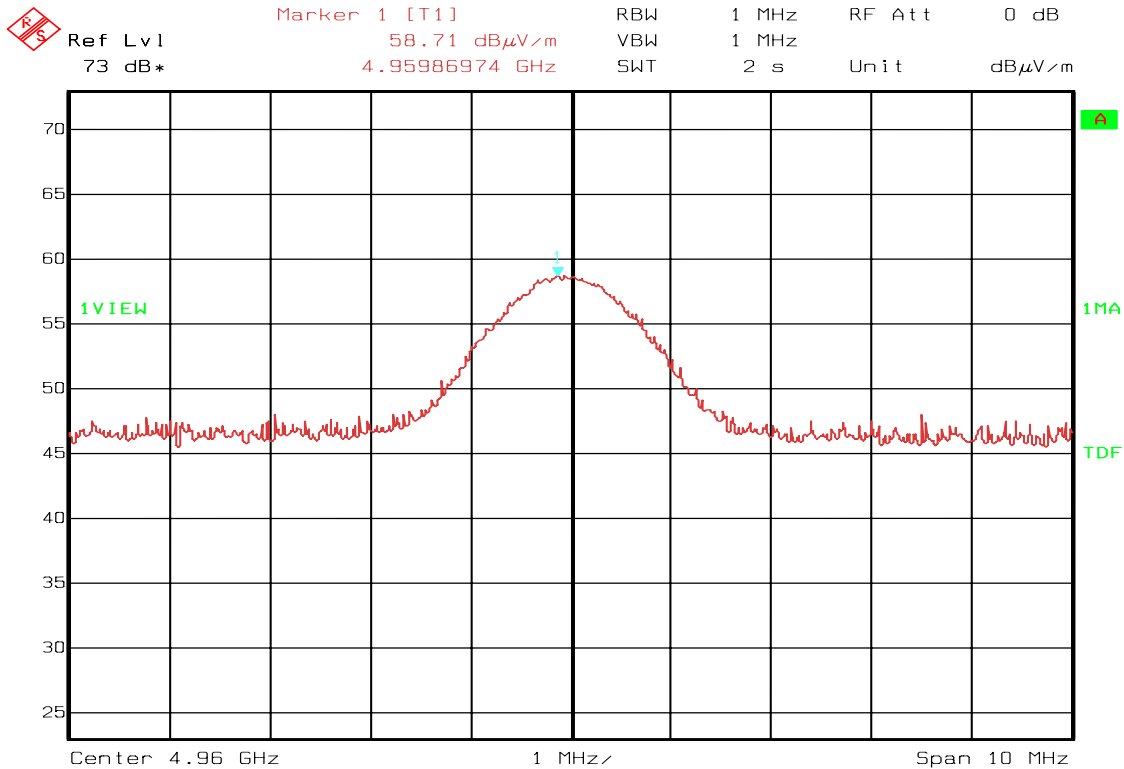


Date: 7.JUL.2004 22:10:45

Max field strength –radiated emission, 2nd Harmonic , ch 26

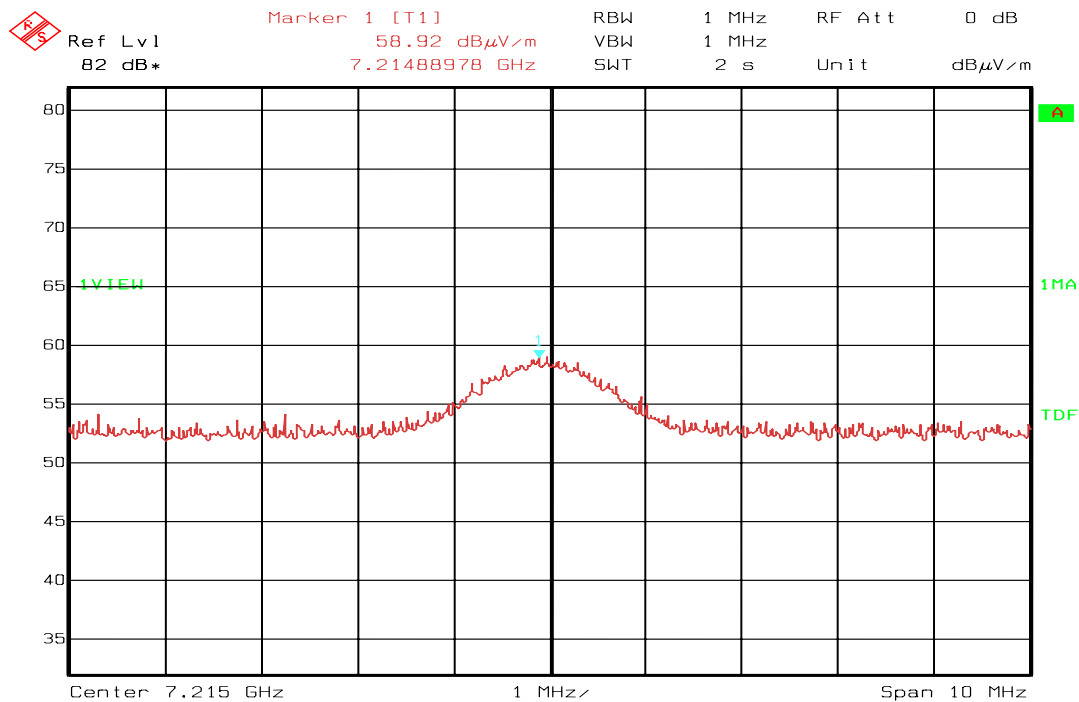


Date: 7.JUL.2004 20:33:56

Max field strength –radiated emission, 3rd Harmonic , ch 11.

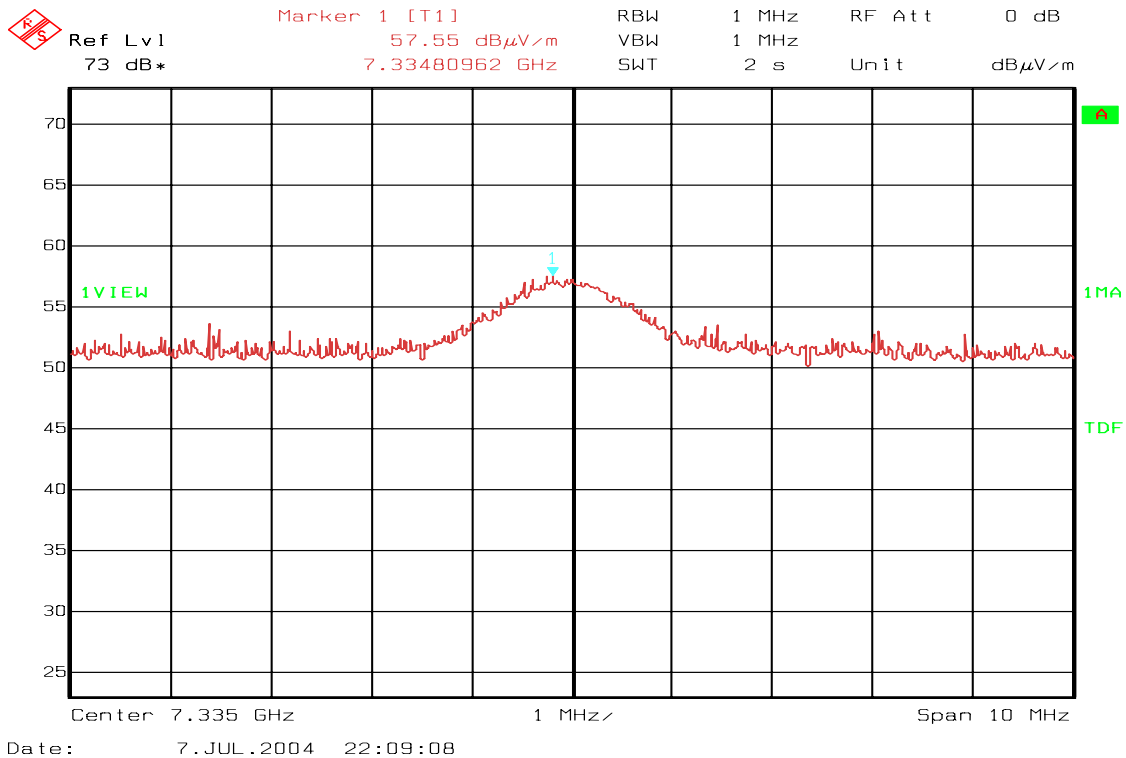

Max field strength –radiated emission, 3rd Harmonic , ch 19

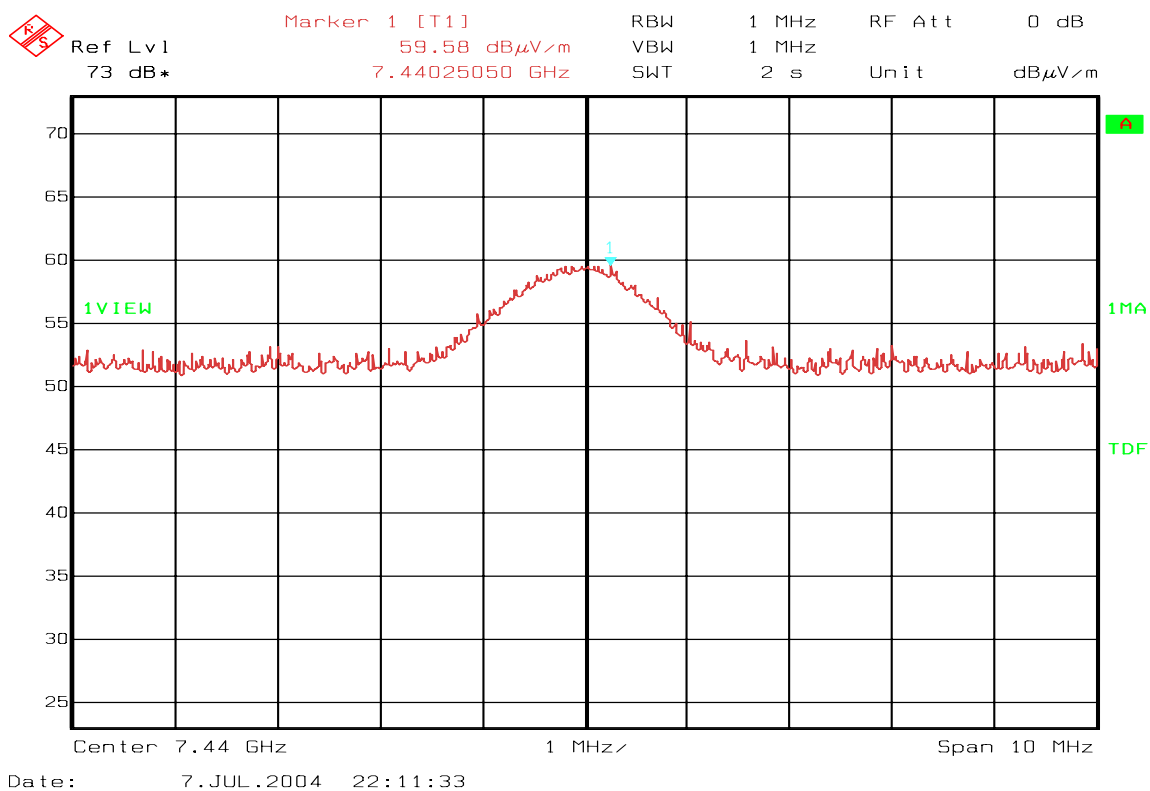

Max field strength –radiated emission, 3rd Harmonic , ch 26

Radiated emission 10 kHz-30 MHz.

Measuring distance 10 m, measured with Peak detector.

No component detected, see attached graph.

Limit is converted to 10 m using 40 dB/decade according to 15.31 (f) (2).

**Nemko Comlab AS
Peak**


07. Jul 04 22:37

Operator: gns
Comment: MC13192/sard
FCC 15

Scan Settings (4 Ranges)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
10k	100k	1k	1k	PK	20ms	0dBLN OFF	60dB
20k	20k	5k	9k	PK	20ms AUTO LN ON	60dB	
20k	10M	5k	9k	PK	20ms AUTO LN OFF	60dB	
10M	30M	5k	9k	PK	20ms AUTO LN OFF	60dB	

Transducer No. Start Stop Name
13 10k 30M HFH2Z2

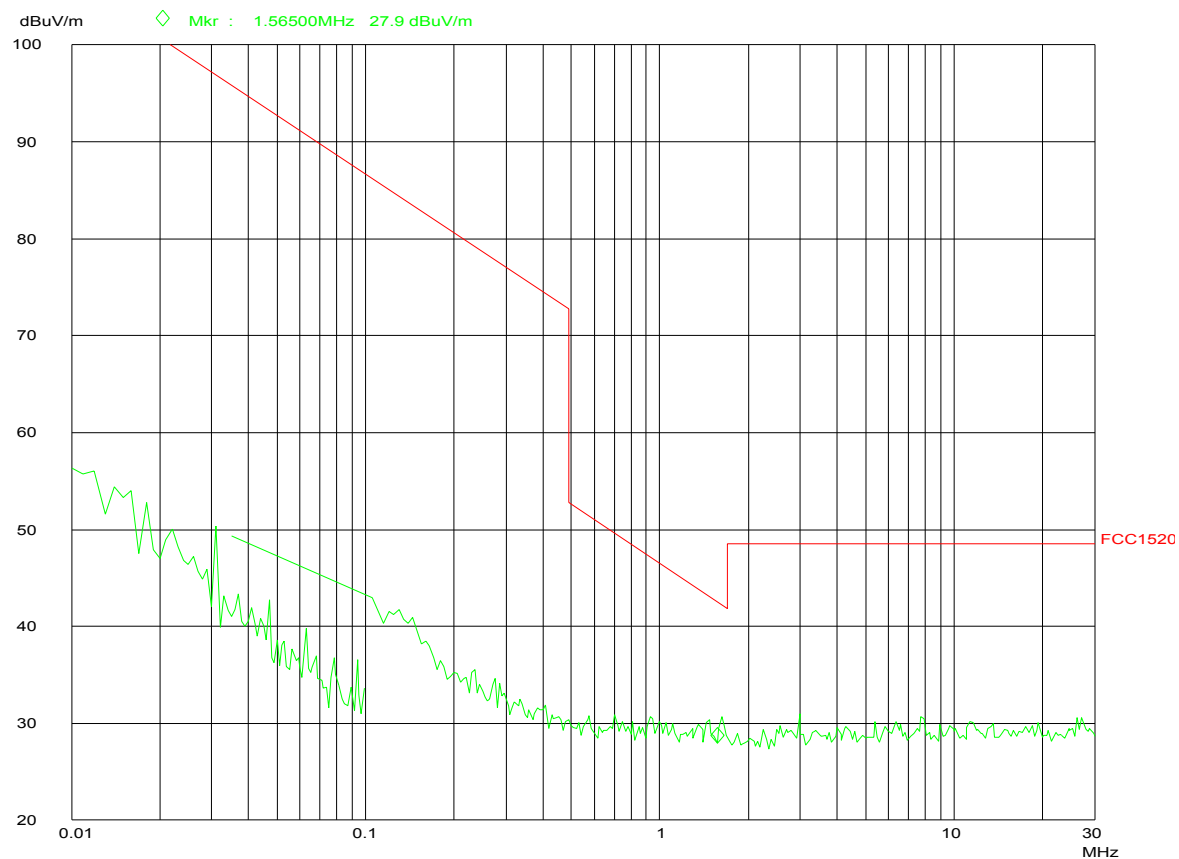

10 kHz – 30MHz –radiated emission

Radiated emission 30 – 1000 MHz.

Detector: Quasi-Peak

Measuring distance 3 m according to CISPR 22.

No component detected, see attached graphs.

Nemko Comlab AS
 pk


06. Jul 04 12:43

EUT: MC13192/SARD
 Manuf: Freescale Semiconductor Danmark AS
 Op Cond: hp 3m
 Operator: gns
 Test Spec: FCC15

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
30M	200M	50k	120k	PK	20ms	AUTO	LN ON 60dB

Transducer No.	Start	Stop	Name
20	30M	200M	HK116

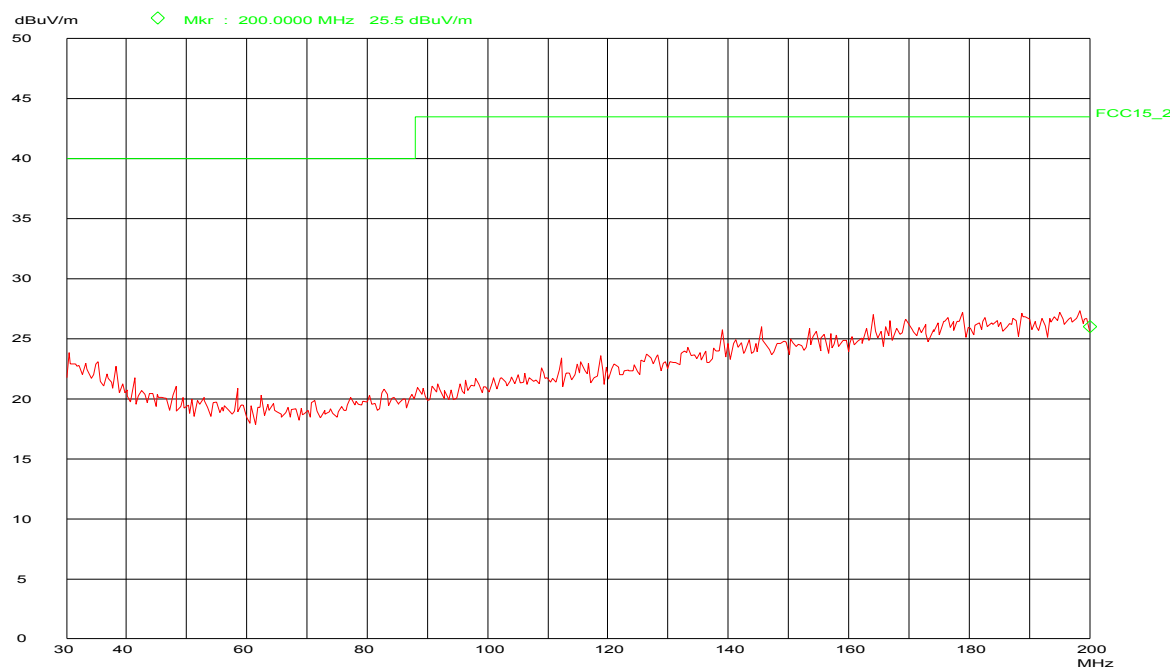

Radiated emission 30 –200MHz, Horizontal polarization

Frequency	Operational condition	Field strength	Measuring distance	Limit FCC15.209	Margin
MHz		dB μ V/m	meters	dB μ V/m	dB
200	TX on	25.5	3	43.5	18

In the column 3 peak values are given for 3 meter.

Nemko Comlab AS

06. Jul 04 12:46


pk

EUT: MC13192/SARD
Manuf: Freescale Semiconductor Danmark AS
Op Cond: vp 3m
Operator: gns
Test Spec: FCC15

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
30M	200M	50k	120k	PK	20ms	AUTO	LN ON	60dB

Transducer No.	Start	Stop	Name
20	30M	200M	HK116

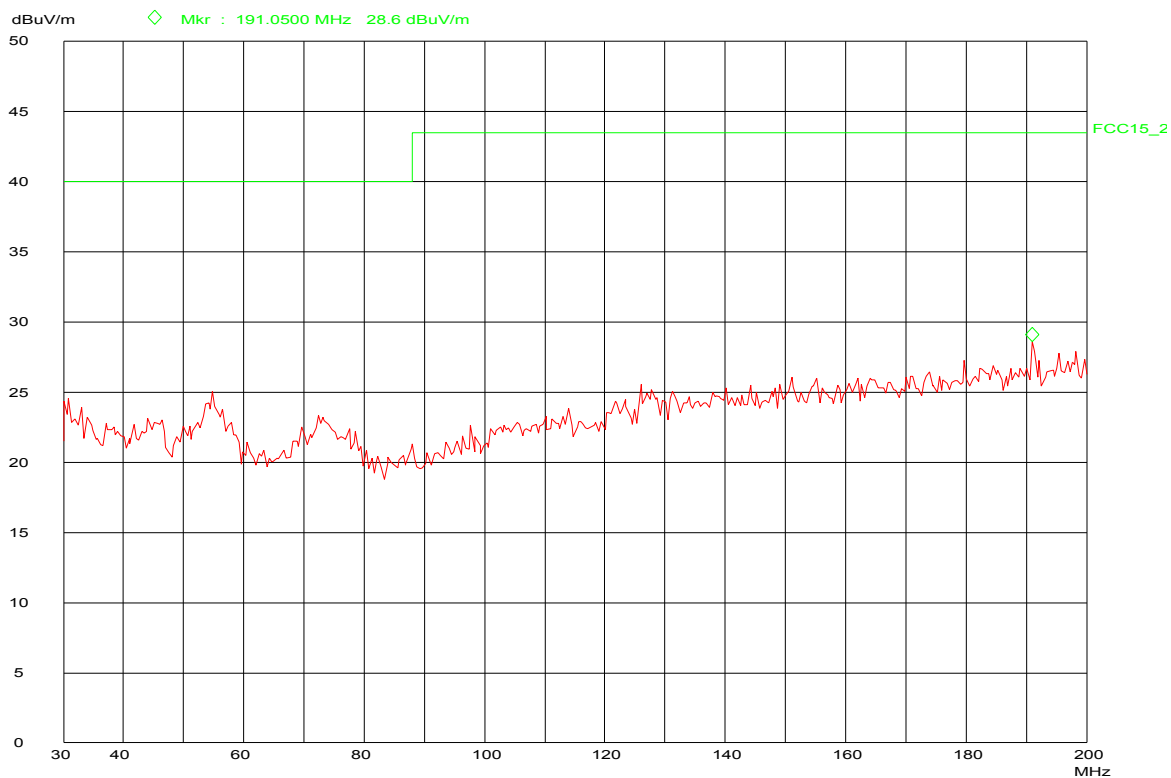

Radiated emission 30 –200MHz, Vertical polarization

Frequency	Operational condition	Field strength	Measuring distance	Limit FCC15.209	Margin
MHz		dB μ V/m	meters	dB μ V/m	dB
191.05	TX on	28.6	3	43.5	14.9

Nemko Comlab AS
pk


06. Jul 04 12:23

EUT: MC13192/SARD
Manuf: Freescale Semiconductor Danmark AS
Op Cond: hp 3m
Operator: gns
Test Spec: FCC15

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
200M	1000M	50k	120k	PK	20ms	AUTO	LN ON	60dB

Transducer No.	Start	Stop	Name
22	200M	1000M	HL223HP

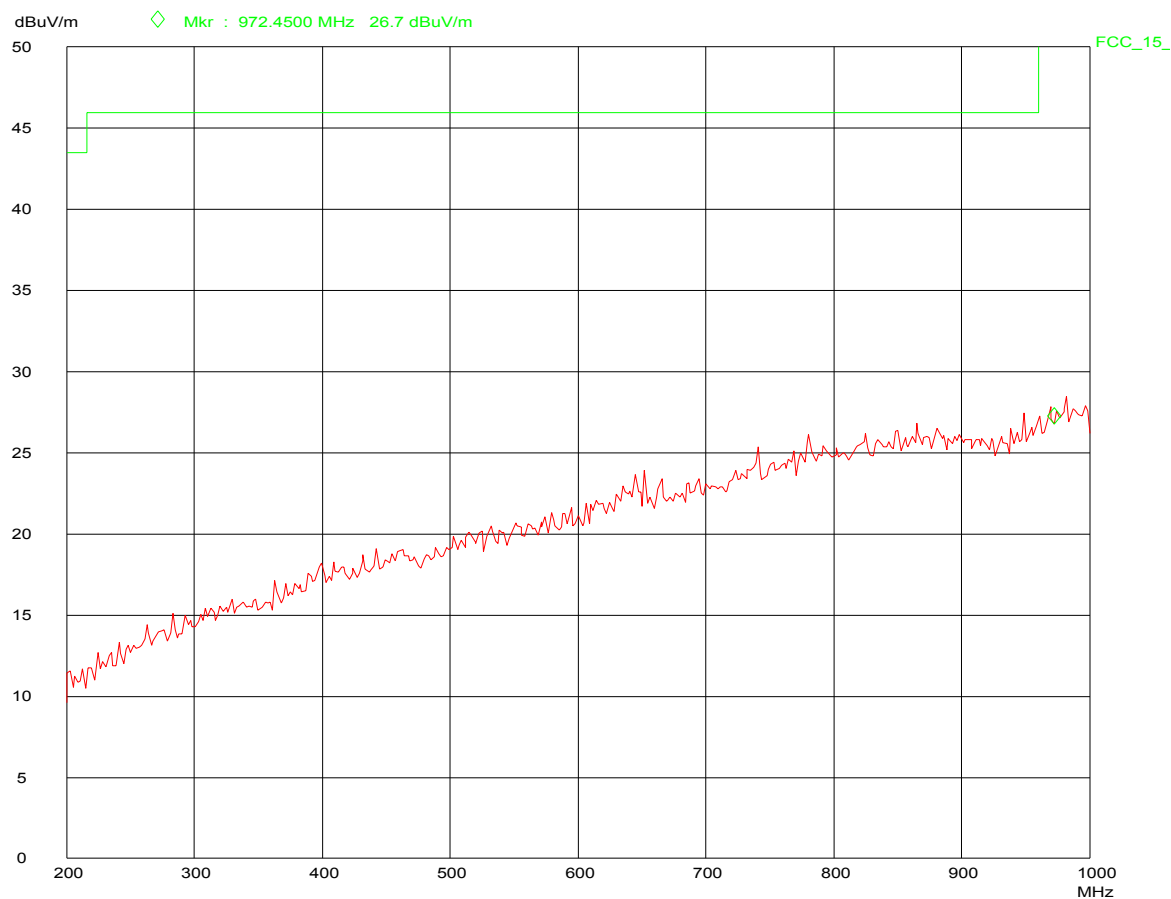

Radiated emission 200 –902 MHz, Horizontal polarization

Nemko Comlab AS
pk


06. Jul 04 12:14

EUT: MC13192/SARD
Manuf: Freescale Semiconductor Danmark AS
Op Cond: vp 3m
Operator: gns
Test Spec: FCC15

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
200M	1000M	50k	120k	PK	20ms	AUTO	LN ON	60dB

Transducer No.	Start	Stop	Name
22	200M	1000M	HL223HP

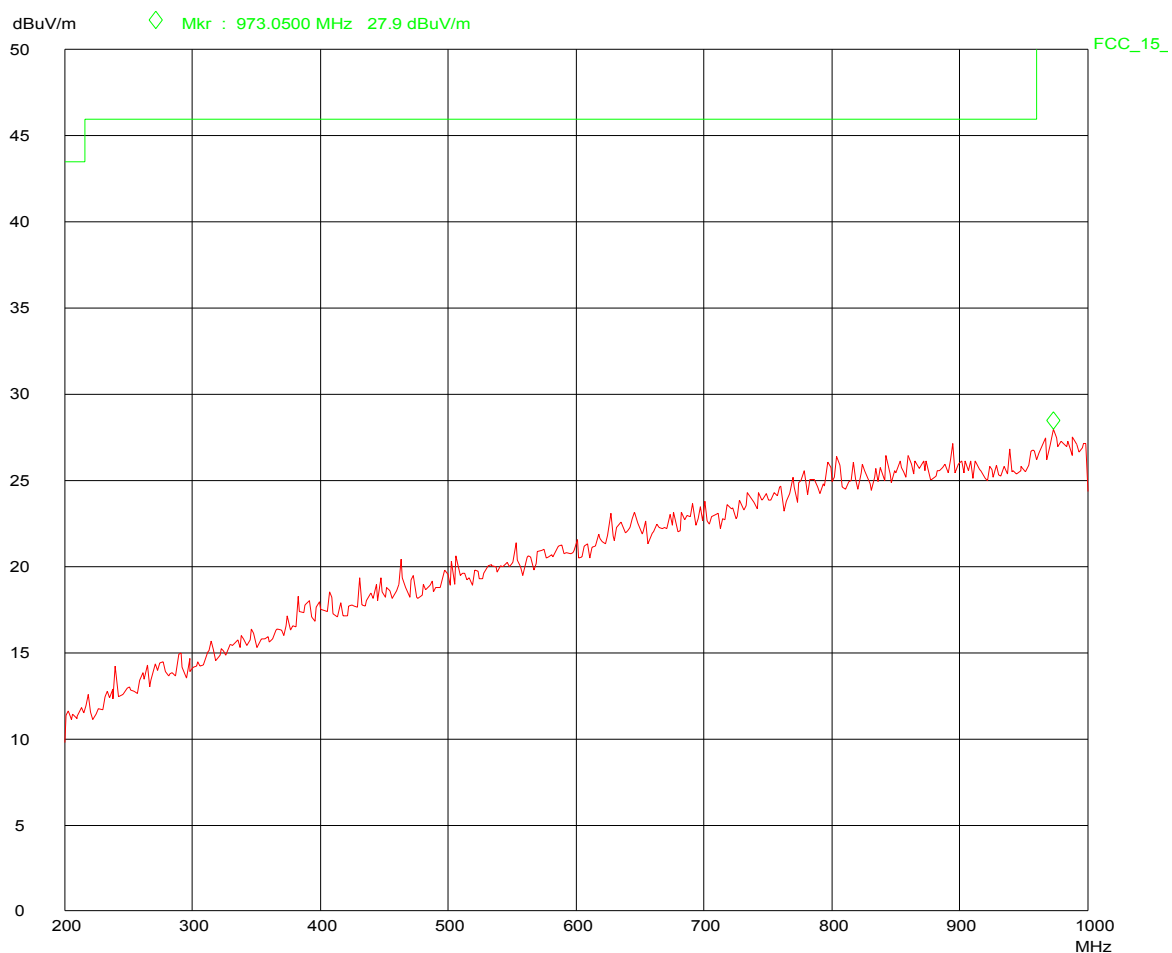

Radiated emission 200 - 902MHz, Vertical polarization

4.5 Power Spectral Density (PSD)

Para. No.: 15.247 (d)

Test Performed By: G.Suwanthakumar

Date of Test: 07.July.2004

Test Results: Passed

Measured and Calculated Data:

The alternative test procedures in point 2) A , B and formula 1 described in guidance on measurements for Digital Transmission Systems is used.

EUT's antenna gain G : 0 dBi --> $10^{(0)} = 1$

Ch11:

- The measured peak level at RBW= 3kHz, VBW= 10kHz, Span =300kHz, Sweep= 100sec is 85.75 dB μ V/m

The calculated field strength $E = 19.38$ mV/m

The calculated PSD using formula $P = (E \times d)^2 / (30 \times G) = (19.38 \text{mV/m} \times 3)^2 / (30 \times 1) = 112.67 \mu \text{ Watts}$

PSD in dBm = $10 \log (P/1\text{mW}) = -9.48$ dBm

Ch19:

- The measured peak level at RBW= 3kHz, VBW= 10kHz, Span =300kHz, Sweep= 100sec is 87.40 dB μ V/m

The calculated field strength $E = 23.44$ mV/m

The calculated PSD using formula $P = (E \times d)^2 / (30 \times G) = (0.02344 \text{V/m} \times 3)^2 / (30 \times 1) = 164.83 \mu \text{ Watts}$

PSD in dBm = $10 \log (P/1\text{mW}) = -7.83$ dBm

Ch26:

- The measured peak level at RBW= 3kHz, VBW= 10kHz, Span =300kHz, Sweep= 100sec is 87.63 dB μ V/m

The calculated field strength $E = 24.07$ mV/m

The calculated PSD using formula $P = (E \times d)^2 / (30 \times G) = (0.02407 \text{V/m} \times 3)^2 / (30 \times 1) = 173.8 \mu \text{ Watts}$

PSD in dBm = $10 \log (P/1\text{mW}) = -7.59$ dBm

Requirements:

No greater than +8 dBm in any 3kHz band

The Test equipments used: 1, 3, 12 & 19


LIST OF TEST EQUIPMENT

To facilitate inclusion of the test equipment used for related tests on each page, each item is numbered by the test house.


No.	Instrument/ancillary	Type of instrument/ancillary	Manufacturer	Ref. no.
1.	FSEK	Spectrum Analyzer	Rohde & Schwarz	1337
2.	ESAI	Spectrum Analyzer	Rohde & Schwarz	1090
3.	3115	Antenna horn	EMCO	1330
4.	ESH3-Z3	LISN	Rohde & Schwarz	1076
5.	8449B	Amplifier	Hewlett Packard	1322
6.	959C	Printer	Hewlett Packard	1414
7.	HFH2-Z2	Antenna loop	Rohde and Schwarz	285
8.	10855A	Amplifier	Hewlett Packard	1445
9.	HL223	Antenna log.per	Rohde & Schwarz	1261
10.	3104C	Antenna biconical	EMCO	1262
11.	ESN	Test Receiver	R&S	1237
12.	HP6032A	Power Supply, program.	HP	1062
13.	5VF2000/400	Filter Band Pass	Texn	042
14.	5VF1000/2000	Filter Band Pass	Trilithic	1174
15.	77	Multimeter, Digital	Fluke	302
16.	B504D	Power Supply	Oltronix	600
17.	EMCO	Antenna Horn	3116	1328
18.	Suhner	Cable Microwave	Sucoflex 102E	1369
19.	ETS	Shielded room	Semi-anechoic	1410
20.	ESVS30	EMI-Receiver	R&S	1101

5 BLOCK DIAGRAM

5.1 System set up

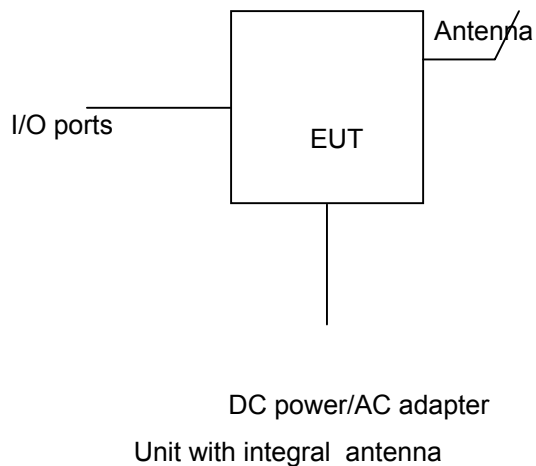

5.2 Power line Conducted Emission

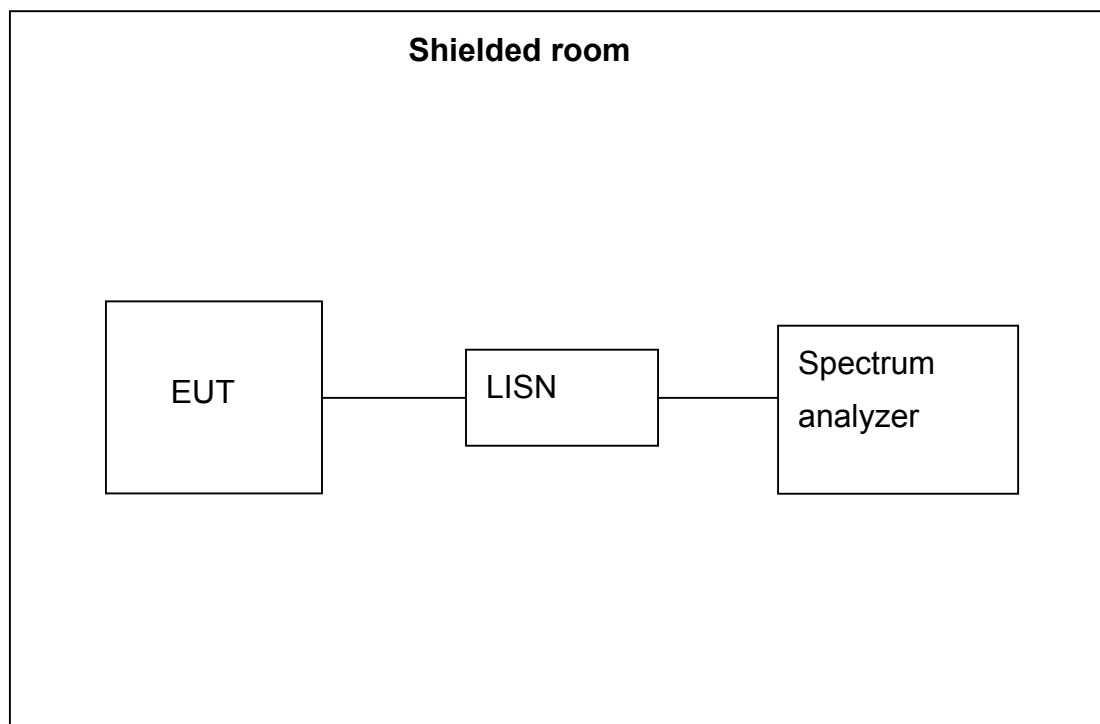

5.3 Test Site Radiated Emission and peak power output

