



SK TECH CO., LTD.

Page 1 of 37

TEST REPORT

Test Report No.:	SKTRFC-120928-020		
Applicant:	Bluepad Co., Ltd		
Applicant Address:	4th Floor, Doosung Bd. 298-21, Gongdan Road, Gunpo-si, Gyeonggi-do, 435-862 Korea		
Manufacturer:	Bluepad Co., Ltd		
Manufacturer Address:	4th Floor, Doosung Bd. 298-21, Gongdan Road, Gunpo-si, Gyeonggi-do, 435-862 Korea		
Device Under Test:	Web Pad		
FCC ID:	O36-BPR-100	Model Name:	BPR-100
Brand/Trade Name:	BluePAD		
Receipt No.:	SKTEU12-1114	Date of receipt:	August 24, 2012
Date of Issue:	September 28, 2012		
Location of Testing:	SK TECH CO., LTD. #820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea		
Test Procedure:	ANSI C63.10-2009 and ANSI C63.4-2009, FCC Public Notice DA 00-705		
Test Specification:	47CFR, FCC Part 15 Rules		
FCC Equipment Class:	DSS - Part 15 Spread Spectrum Transmitter		
Test Result:	The above-mentioned device has been tested and passed.		

Tested & Reported by: Wonsik Ham

Approved by: Jongsoo Yoon

September 28, 2012

Signature

Date

September 28, 2012

Signature

Date

Other Aspects:	-
Abbreviations:	· OK, Pass = passed · Fail = failed · N/A = not applicable

- ☞ This test report is not permitted to copy partly and entirely without our permission.
- ☞ This test result is dependent on only equipment to be used.
- ☞ This test result is based on a single evaluation of submitted samples of the above mentioned.



>> CONTENTS <<

1. GENERAL	4
2. TEST SITE	4
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
3. DESCRIPTION OF THE EQUIPMENT UNDER TEST	6
3.1 Rating and Physical Characteristics	6
3.2 Equipment Modifications	6
3.3 Submitted Documents	6
4. MEASUREMENT CONDITIONS	7
4.1 Description of test configuration	7
4.2 List of Peripherals	7
4.3 Type of Used Cables	7
4.4 Uncertainty	7
5. TEST AND MEASUREMENTS	8
5.1 ANTENNA REQUIREMENT	8
5.1.1 Regulation	8
5.1.2 Result	8
5.2 MAXIMUM PEAK OUTPUT POWER	9
5.2.1 Regulation	9
5.2.2 Test Procedure	9
5.2.3 Test Results	9
Table 1: Measured values of the Maximum Peak Output Power (Conducted)	9
Figure 1: Plot of the Maximum Peak Output Power (Conducted)	10
5.3 CARRIER FREQUENCY SEPARATIONS and 20 dB BANDWIDTH	12
5.3.1 Regulation	12
5.3.2 Test Procedure	12
5.3.3 Test Results	12
Table 2: Measured values of the Carrier Frequency Separation and 20 dB Bandwidth	12
Figure 2: Plot of the Carrier Frequency Separation	13
Figure 3: Plot of the 20dB Channel Bandwidth	15
5.4 NUMBER OF HOPPING CHANNELS	17
5.4.1 Regulation	17
5.4.2 Test Procedure	17
5.4.3 Test Results	17
Table 3: Measured values of the Number of Hopping Channels	17
Figure 4: Plot of the Number of Hopping Channels	18



5.5 TIME OF OCCUPANCY (DWELL TIME)	19
5.5.1 Regulation	19
5.5.2 Test Procedure	19
5.5.3 Test Results	19
Table 4: Measured values of the Time of Occupancy	19
Figure 5: Plot of the Time of Occupancy	20
5.6 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS	22
5.6.1 Regulation	22
5.6.2 Test Procedure	22
5.6.3 Test Results	24
Table 5: Results for the final radiated measurements of the field strength of spurious emission.....	24
Figure 6: Plot of the Band Edge (Conducted)	25
Figure 7: Plot of the Band Edge (Radiated).....	26
Figure 8: Spurious RF conducted emission	28
Figure 9: Emission plot for the preliminary radiated measurements	31
5.7 AC POWER LINE CONDUCTED EMISSIONS	34
5.7.1 Regulation	34
5.7.2 Test Procedure	34
5.7.3 Test Results	35
Table 6: Measured values of the Conducted Emissions.....	35
Figure 10: Plot of the Conducted Emissions	36
5.8 RF EXPOSURE	37
5.8.1 Regulation	37
5.8.2 RF Exposure Compliance Issue	37



1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.10-2009 and ANSI C63.4-2009 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

2. TEST SITE

SK TECH CO., LTD.

2.1 Location

#820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea

(FCC Registered Test Site Number: 938639)

(OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 5429A-1)

This laboratory is also notified to FCC by RRA as a Conformity Assessment Body, and designated to perform compliance testing on equipment subject to Declaration of Conformity (DOC) and Certification under Parts 15 and 18 of the FCC Rules. Designation number: KR0007



2.2 List of Test and Measurement Instruments

No.	Description	Manufacturer	Model No.	Serial No.	Calibrated until	Used
1	Spectrum Analyzer	Agilent	E4405B	US40520856	2013.03.07	
2	Spectrum Analyzer	Agilent	E4440A	MY46186322	2013.03.08	<input checked="" type="checkbox"/>
3	EMC Spectrum Analyzer	Agilent	E7405A	US40240203	2013.07.09	
4	EMI Test Receiver	Rohde&Schwarz	ESPI7	101206	2013.07.10	<input checked="" type="checkbox"/>
5	EMI Test Receiver	Rohde&Schwarz	ESHS10	862970/019	2013.07.09	<input checked="" type="checkbox"/>
6	Artificial Mains Network	Rohde&Schwarz	ESH2-Z5	834549/011	2013.07.09	<input checked="" type="checkbox"/>
7	Pre-amplifier	HP	8447F	3113A05153	2013.07.10	<input checked="" type="checkbox"/>
8	Pre-amplifier	MITEQ	AFS44	1116321	2012.12.22	
9	Pre-amplifier	MITEQ	AFS44	1116322	2013.07.10	<input checked="" type="checkbox"/>
10	Power Meter	Agilent	E4417A	MY45100426	2013.07.10	
11	Power Meter	Agilent	E4418B	US39402176	2013.07.10	
12	Power Sensor	Agilent	E9327A	MY44420696	2013.07.10	
13	Power Sensor	Agilent	8482A	MY41094094	2013.07.10	
14	Attenuator (10dB)	HP	8491B	38072	2013.07.09	<input checked="" type="checkbox"/>
15	High Pass Filter	Wainwright	WHKX3.0/18G	8	2013.07.09	<input checked="" type="checkbox"/>
16	VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	2012.11.07	
17	UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	2012.11.07	
18	Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	2012.12.22	<input checked="" type="checkbox"/>
19	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	189	2013.05.31	<input checked="" type="checkbox"/>
20	Horn Antenna	AH Systems	SAS-200/571	304	N/A	
21	Horn Antenna	EMCO	3115	00040723	2013.05.31	
22	Horn Antenna	EMCO	3115	00056768	2013.09.06	<input checked="" type="checkbox"/>
23	Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170318	2013.09.28	<input checked="" type="checkbox"/>
24	Vector Signal Generator	Agilent	E4438C	MY42080359	2013.07.09	
25	PSG analog signal generator	Agilent	E8257D-520	MY45141255	2013.07.10	
26	DC Power Supply	HP	6622A	3348A03223	2013.07.10	
27	DC Power Supply	HP	6633A	3325A04972	2013.07.10	
28	Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	2013.07.18	<input checked="" type="checkbox"/>
29	Temperature/Humidity Chamber	All Three	ATM-50M	20030425	2013.03.07	
30	Temperature/Humidity Chamber	DAEJIN	DJ-THC02	06071	2013.03.08	

2.3 Test Date

Date of Test: September 3, 2012 ~ September 21, 2012

2.4 Test Environment

See each test item's description.



3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

3.1 Rating and Physical Characteristics

Power source	Two battery packs (7.4 V)
Transmit Frequency	(a) Bluetooth: 2402 MHz ~ 2480 MHz (b) WLAN* IEEE 802.11b: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11g: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11n HT20: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11n HT40: 2422 MHz ~ 2452 MHz (7 channels)
X-tal or Oscillator	XTAL: 32.768 kHz, 14.318 MHz, 20 MHz and 25 MHz, (WLAN module) 40 MHz
Antenna Type	Common antenna for Bluetooth and WLAN (PCB antenna, peak gain: 0.76 dBi)
Type of Modulation	(a) Bluetooth: FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK) (b) WLAN* IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n HT20/40: OFDM(64QAM, 16QAM, QPSK, BPSK)
RF Output power	6.05 dBm PEAK (measured)
External Ports **	DC input(DC 19 V from AC adapter), earphone, USB, SD/MMC, and Docking station

* The test report for the transmitter portion of WLAN was issued with other test report number.

** The test report for the compliance with FCC Part 15B as a digital device was issued with other test report number.

3.2 Equipment Modifications

None

3.3 Submitted Documents

Block diagram

Schematic diagram

Antenna Specification

Part List

User manual



4. MEASUREMENT CONDITIONS

4.1 Description of test configuration

The measurements were taken in TEST MODE provided by the applicant for controlling the EUT.

- Test software installed in the EUT: DRTU- Diagnostics and Regulatory Testing Utility
- Software version (driver version): 8.0.50727.42
- Software manufacturer: Intel Corporation
- Packet type: DH5, DH2-5 and DH3-5
- Power setting: set to 8 dBm as target power in the software.

4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
Keyboard	YET FOUNDATE LTD.	SK-8825	02146924
Mouse	DONGGUAN PRIMAX ELECTRONICS LTD	MO28UOL	44X 4966 077
Head set	CAMAC	CMK-500MV	N/A

4.3 Type of Used Cables

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	EUT	USB	Mouse	USB	1.2	NO
2	EUT	USB	Keyboard	USB	1.5	NO
3	EUT	earphone	Keyboard	earphone	1.7	NO

4.4 Uncertainty

Measurement Item	Combined Standard Uncertainty U_c	Expanded Uncertainty $U = kU_c (k = 2)$
Conducted RF power	± 1.49 dB	± 2.98 dB
Radiated disturbance	± 2.30 dB	± 4.60 dB
Conducted disturbance	± 1.96 dB	± 3.92 dB



5. TEST AND MEASUREMENTS(Part 15.247)

Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
Maximum Peak Output Power	15.247(b)(1), (4)	5.2	PASS
Carrier Frequency Separation	15.247(a)(1)	5.3	PASS
20dB Channel Bandwidth	15.247(a)(1)	5.3	PASS
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	5.4	PASS
Time of Occupancy (Dwell Time)	15.247(a)(iii)	5.5	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.6	PASS
AC power line Conducted emissions	15.207(a)	5.7	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	5.8	PASS

5.1 ANTENNA REQUIREMENT

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result:

PASS

The transmitter has an integral PCB antenna. The directional gain of the antenna is 0.76 dBi.



5.2 MAXIMUM PEAK OUTPUT POWER

5.2.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via SPI interface and make sure the spectrum analyzer is operated in its linear range.
3. Set the spectrum analyzer as follows:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
5. Repeat above procedures until all frequencies measured were complete.

5.2.3 Test Results:

PASS

Table 1: Measured values of the Maximum Peak Output Power (Conducted)

Modulation	Operating Frequency	Resolution Bandwidth	Measured value		Limit
			dBm	W	
Basic (GFSK)	2402 MHz	3 MHz	5.86	0.003 85	1 W (the number of the non-overlapping hopping channels is equal to or greater than 75)
	2441 MHz	3 MHz	6.03	0.004 01	
	2480 MHz	3 MHz	6.05	0.004 03	
EDR ($\pi/4$ DQPSK)	2402 MHz	3 MHz	2.62	0.001 83	0.125 W (all other frequency hopping systems)
	2441 MHz	3 MHz	4.02	0.002 52	
	2480 MHz	3 MHz	4.25	0.002 66	
EDR (8DPSK)	2402 MHz	3 MHz	2.89	0.001 95	
	2441 MHz	3 MHz	4.20	0.002 63	
	2480 MHz	3 MHz	4.52	0.002 79	





NOTE 1. Since the directional gain of the integral antenna declared by the manufacturer (GAIN = 0.76 dBi) does not exceed 6.0 dBi, there was no need to reduce the output power.

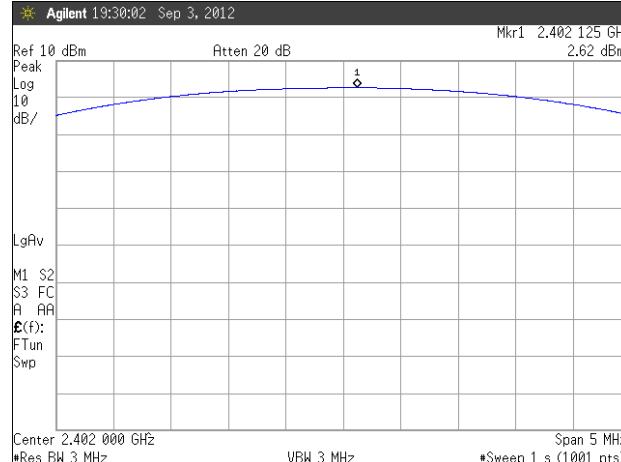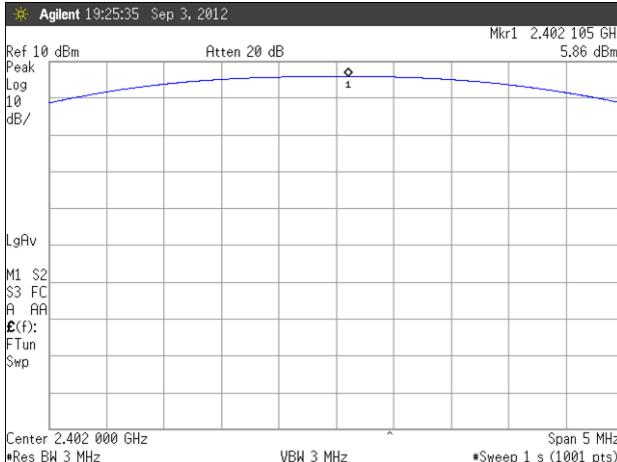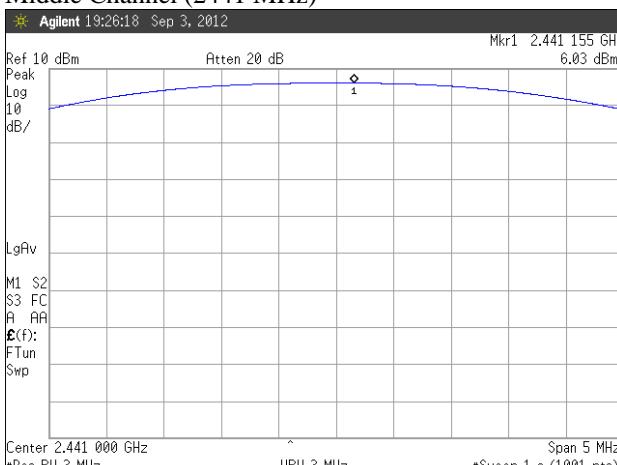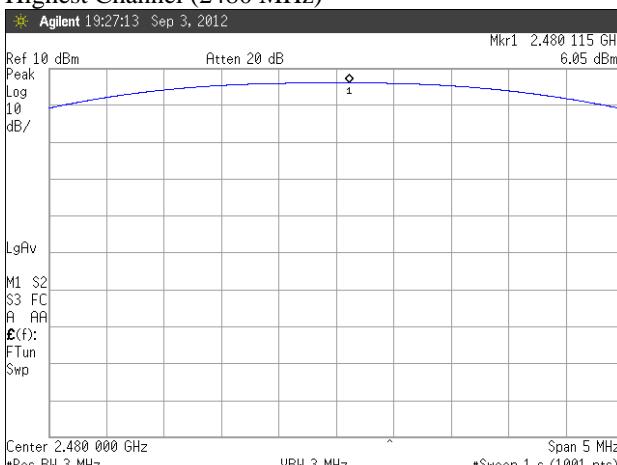NOTE 2. We took the insertion loss of the cable loss into consideration within the measuring instrument.


SK TECH CO., LTD.


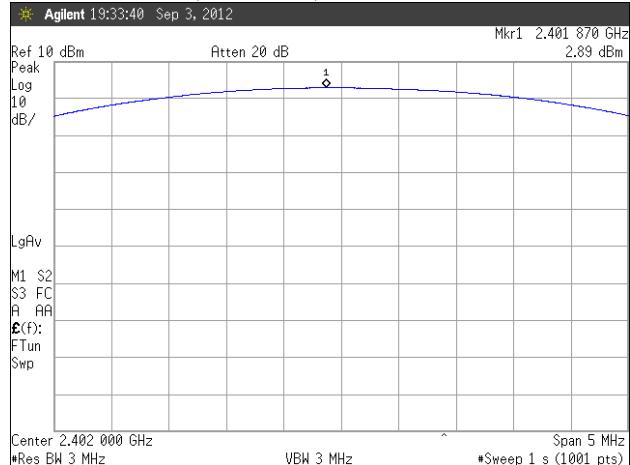
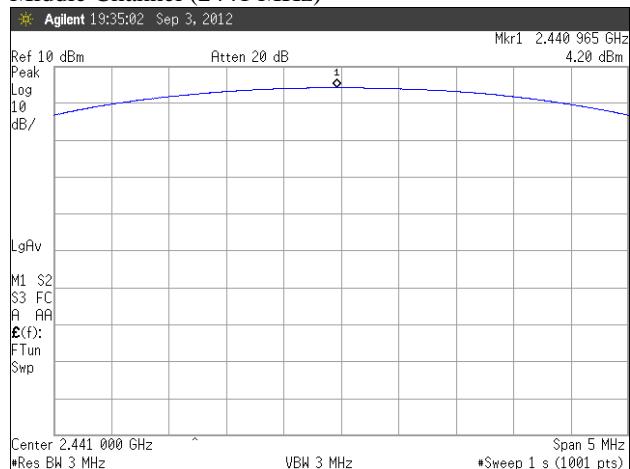
Page 10 of 37

**Figure 1. Plot of the Maximum Peak Output Power (Conducted)
Basic (GFSK) EDR ($\pi/4$ DQPSK)**

Lowest Channel (2402 MHz)

Middle Channel (2441 MHz)

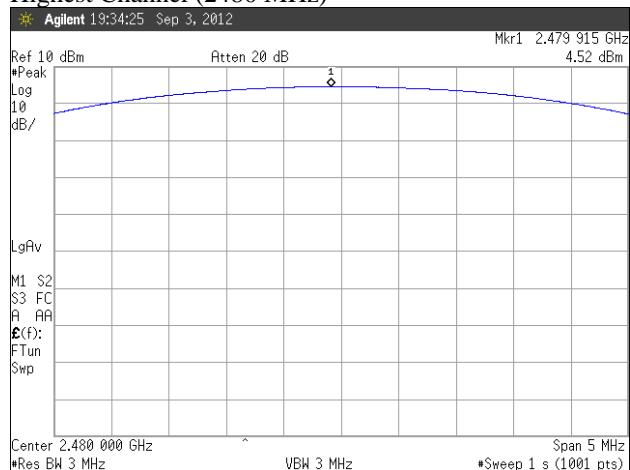Highest Channel (2480 MHz)



SK TECH CO., LTD.

Page 11 of 37

EDR (8DPSK)
Lowest Channel (2402 MHz)

Middle Channel (2441 MHz)

Highest Channel (2480 MHz)




5.3 CARRIER FREQUENCY SEPARATIONS and 20 dB BANDWIDTH

5.3.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.3.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via SPI interface.
3. Set the spectrum analyzer as follows:

For measurements of Carrier Frequency Separation

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurements of 20 dB Bandwidth

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

4. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
5. Repeat above procedures until all frequencies measured were complete.

5.3.3 Test Results:

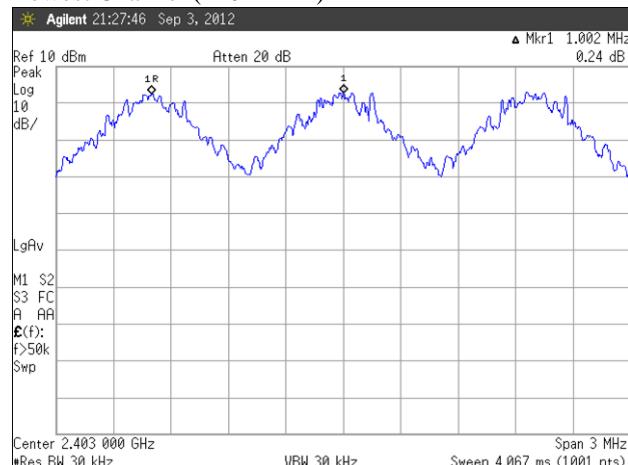
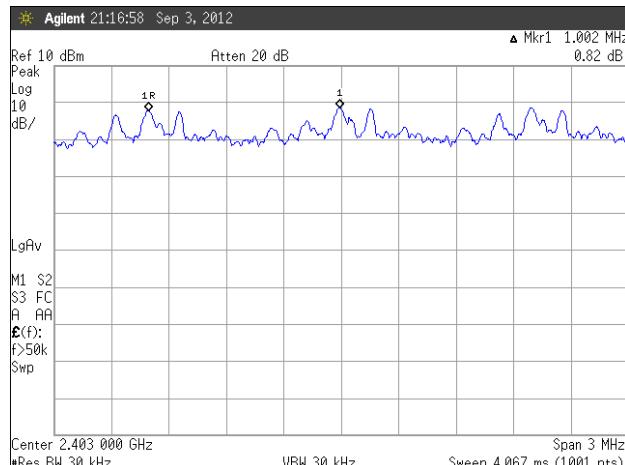
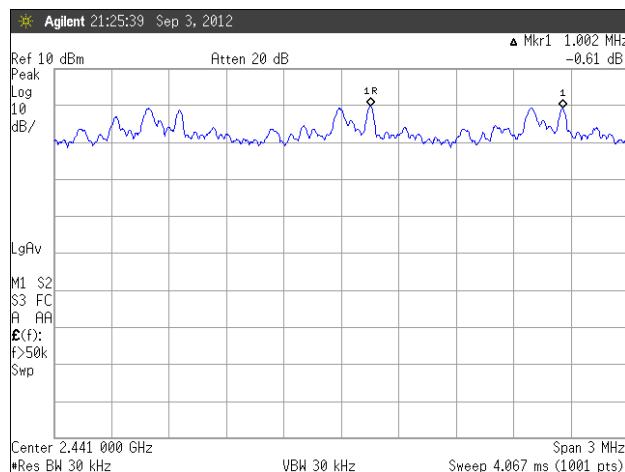
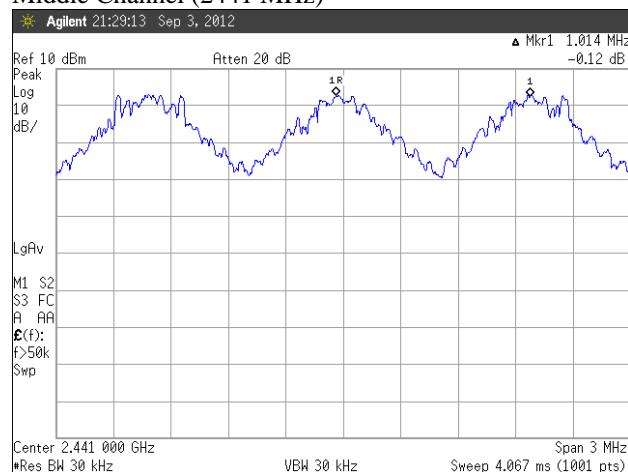
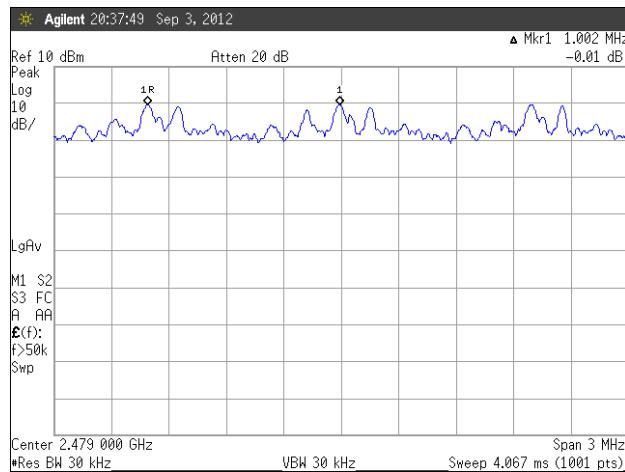
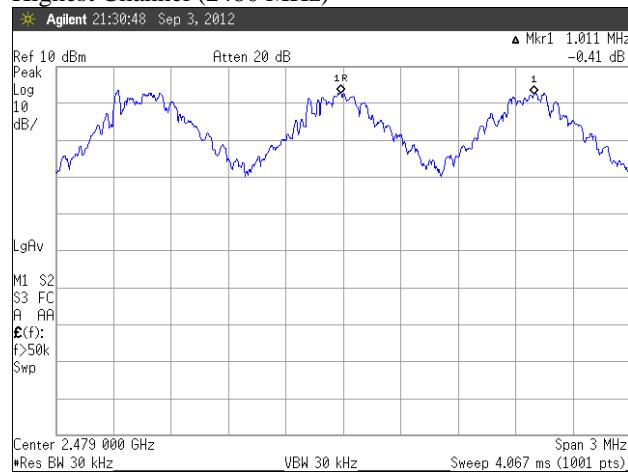
PASS

Table 2: Measured values of the Carrier Frequency Separation and 20 dB Bandwidth

Modulation	Operating Frequency	Frequency Separation	20 dB Bandwidth	LIMIT (Frequency Separation)
Basic (GFSK)	2402 MHz	1 002 kHz	924 kHz	≥ 25 kHz or 20 dB bandwidth, whichever is greater
	2441 MHz	1 014 kHz	924 kHz	
	2480 MHz	1 011 kHz	930 kHz	
EDR ($\pi/4$ DQPSK)	2402 MHz	1 002 kHz	1 266 kHz	Alternatively ≥ 25 kHz or two-thirds of the 20 dB bandwidth, whichever is greater (output power ≤ 125 mW)
	2441 MHz	1 002 kHz	1 266 kHz	
	2480 MHz	1 002 kHz	1 314 kHz	
EDR (8DPSK)	2402 MHz	1 002 kHz	1 263 kHz	Alternatively ≥ 25 kHz or two-thirds of the 20 dB bandwidth, whichever is greater (output power ≤ 125 mW)
	2441 MHz	1 005 kHz	1 269 kHz	
	2480 MHz	1 011 kHz	1 272 kHz	





SK TECH CO., LTD.

Page 13 of 37

Figure 2. Plot of the Carrier Frequency Separation
Basic (GFSK)**Lowest Channel (2402 MHz)****EDR ($\pi/4$ DQPSK)****Middle Channel (2441 MHz)****Highest Channel (2480 MHz)**








SK TECH CO., LTD.

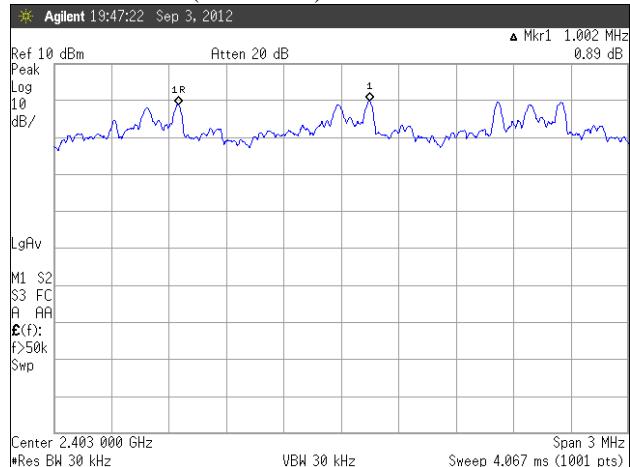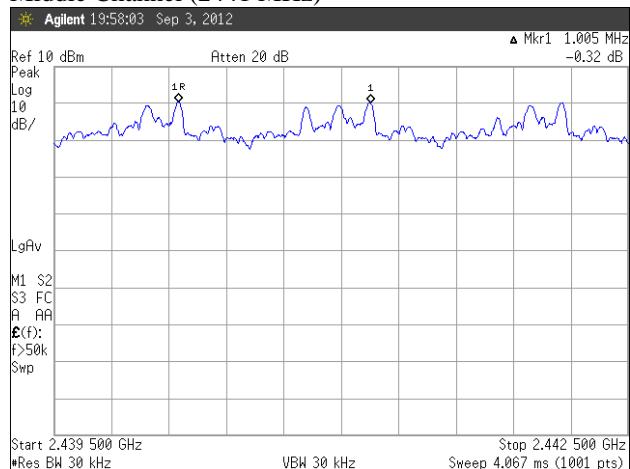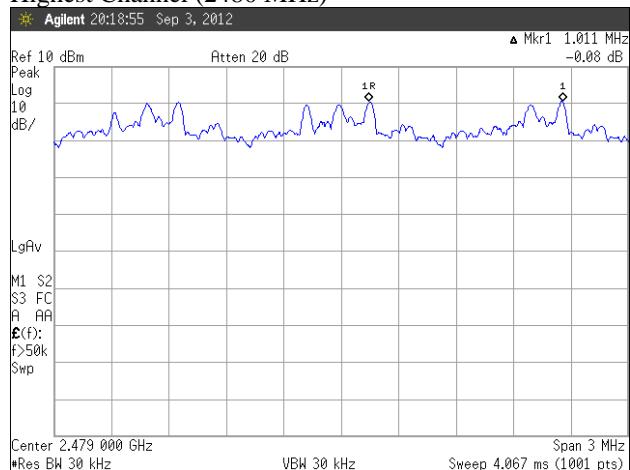Page 14 of 37

EDR (8DPSK)
Lowest Channel (2402 MHz)

Middle Channel (2441 MHz)

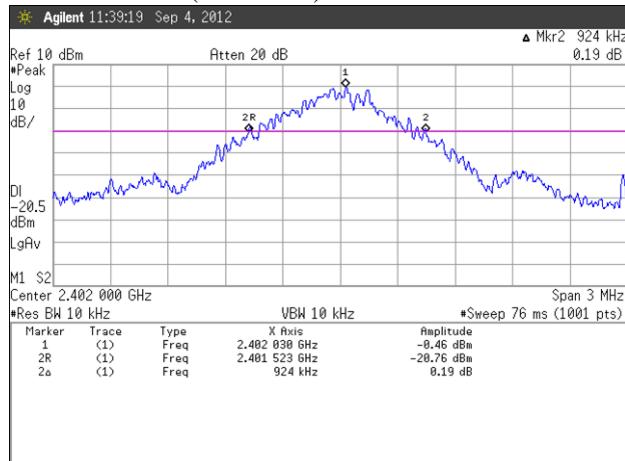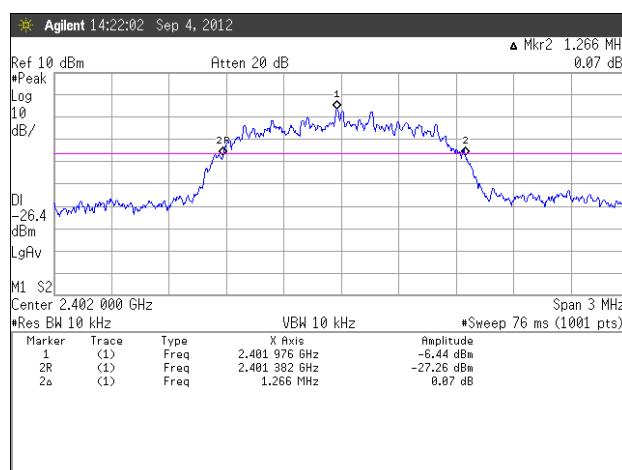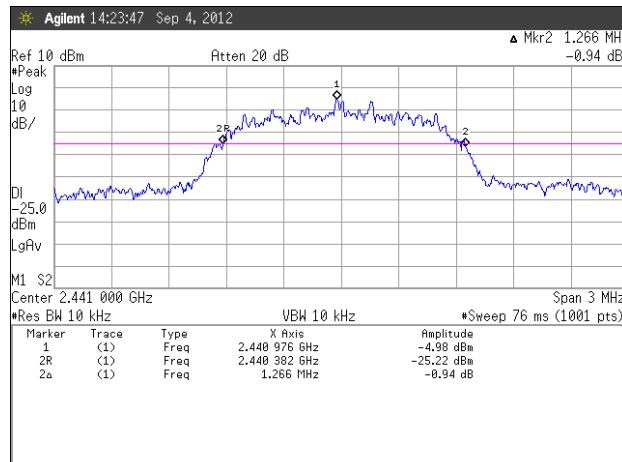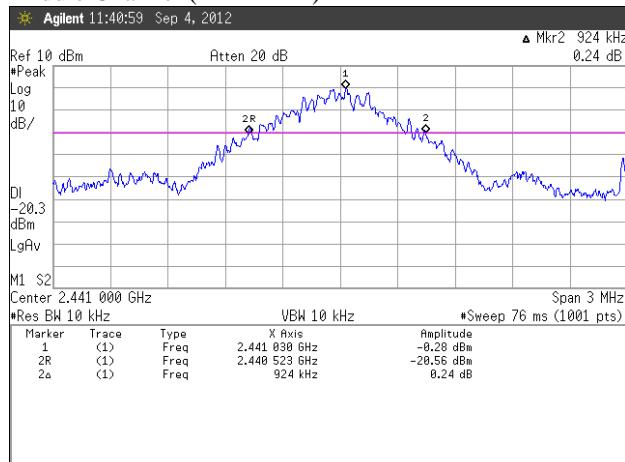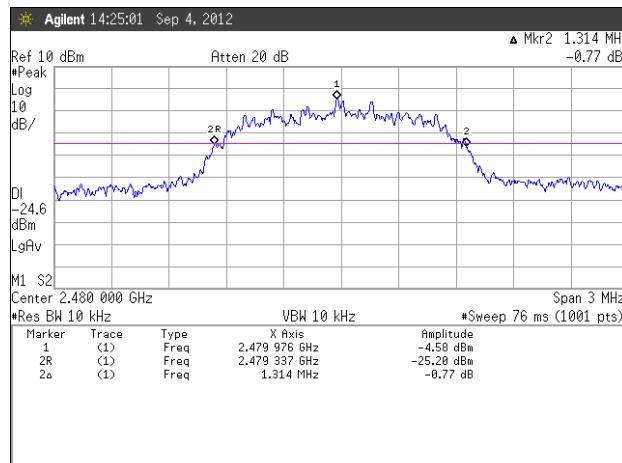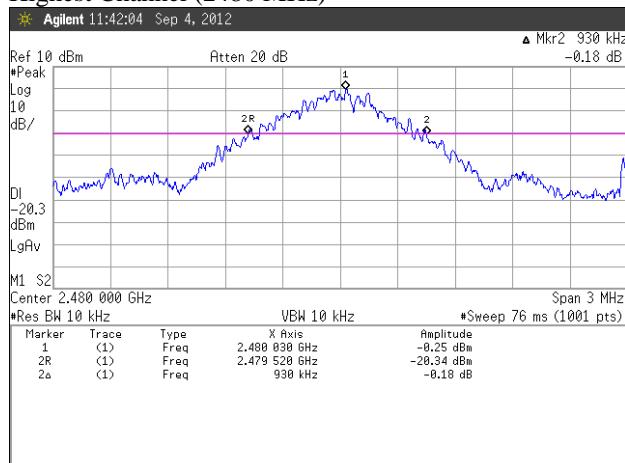Highest Channel (2480 MHz)


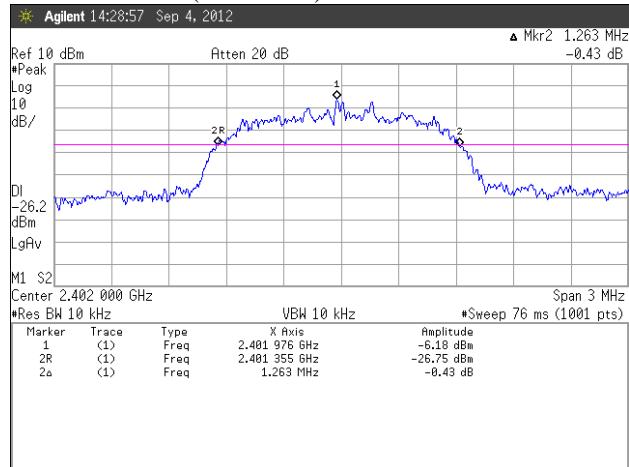
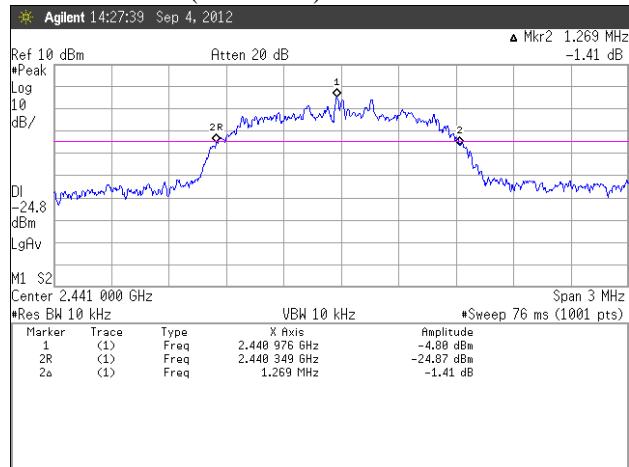
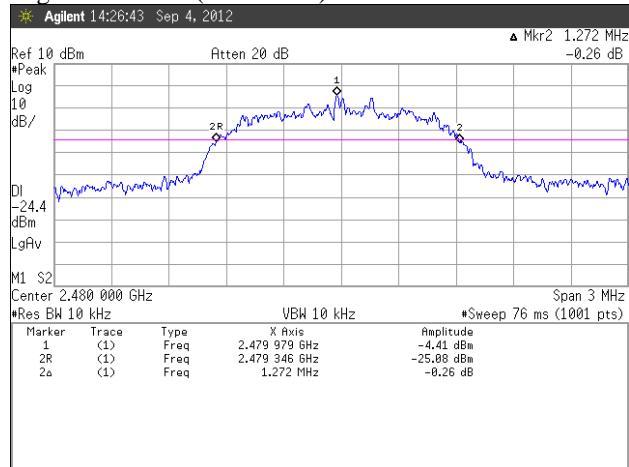

SK TECH CO., LTD.

Page 15 of 37

Figure 3. Plot of the 20 dB Channel Bandwidth
Basic (GFSK)**Lowest Channel (2402 MHz)****EDR ($\pi/4$ DQPSK)****Middle Channel (2441 MHz)****Highest Channel (2480 MHz)**


SK TECH CO., LTD.

Page 16 of 37

EDR (8DPSK)
Lowest Channel (2402 MHz)

Middle Channel (2441 MHz)

Highest Channel (2480 MHz)




5.4 NUMBER OF HOPPING CHANNELS

5.4.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.4.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
2. Turn on the EUT and set the hopping function enabled by controlling it via SPI interface.
3. Set the spectrum analyzer as follows:
 - Span = the frequency band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Record the number of hopping channels.

5.4.3 Test Results:

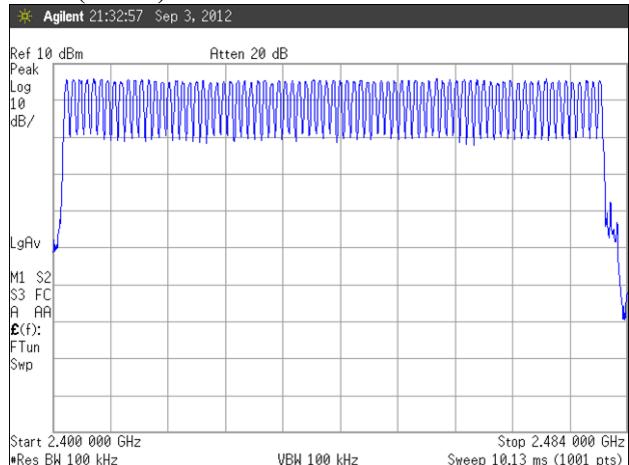
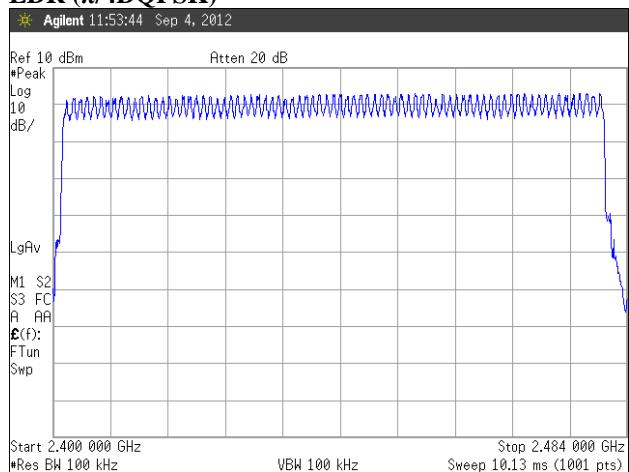
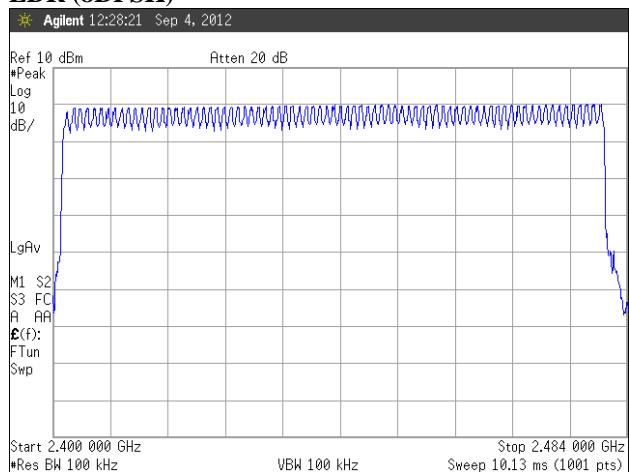
PASS

Table 3: Measured values of the Number of Hopping Channels

Modulation	Operating Frequency	Number of hopping channels	LIMIT
Basic (GFSK)	2402 - 2480 MHz	79	\geq 15
EDR ($\pi/4$ DQPSK)	2402 - 2480 MHz	79	\geq 15
EDR (8DPSK)	2402 - 2480 MHz	79	\geq 15


SK TECH CO., LTD.

Page 18 of 37

Figure 4. Plot of the Number of Hopping Channels
Basic (GFSK)

EDR ($\pi/4$ DQPSK)

EDR (8DPSK)




5.5 TIME OF OCCUPANCY (DWELL TIME)

5.5.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.5.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via SPI interface.
3. Set the spectrum analyzer as follows:
 - Span = zero span, centered on a hopping channel
 - RBW = 1 MHz
 - VBW \geq RBW
 - Sweep = as necessary to capture the entire dwell time per hopping channel
 - Detector function = peak
 - Trace = max hold
4. Measure the dwell time using the marker-delta function.
5. Repeat above procedures until all frequencies measured were complete.
6. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

5.5.3 Test Results:

PASS

Table 4: Measured values of the Time of Occupancy

Modulation	Operating Frequency	Reading (ms)	Hopping rate (hops/s)	Number of Channels	Actual (seconds)	LIMIT (seconds)
Basic (GFSK)	2402 MHz	2.888	266.667	79	0.31	0.4
	2441 MHz	2.876	266.667	79	0.31	0.4
	2480 MHz	2.872	266.667	79	0.31	0.4
EDR ($\pi/4$ DQPSK)	2402 MHz	2.888	266.667	79	0.31	0.4
	2442 MHz	2.888	266.667	79	0.31	0.4
	2480 MHz	2.888	266.667	79	0.31	0.4
EDR (8DPSK)	2402 MHz	2.888	266.667	79	0.31	0.4
	2441 MHz	2.888	266.667	79	0.31	0.4
	2480 MHz	2.888	266.667	79	0.31	0.4







Actual = Reading \times (Hopping rate / Number of channels) \times Test period

Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds]

NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. The DH5 Packet (GFSK), 2-DH5 Packet ($\pi/4$ DQPSK), 3-DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.





SK TECH CO., LTD.

Page 20 of 37

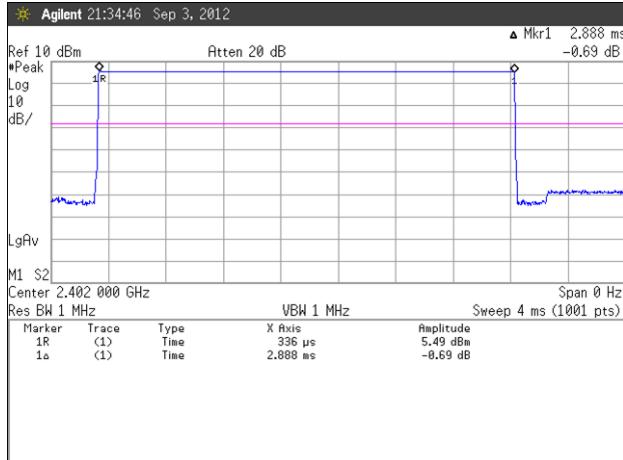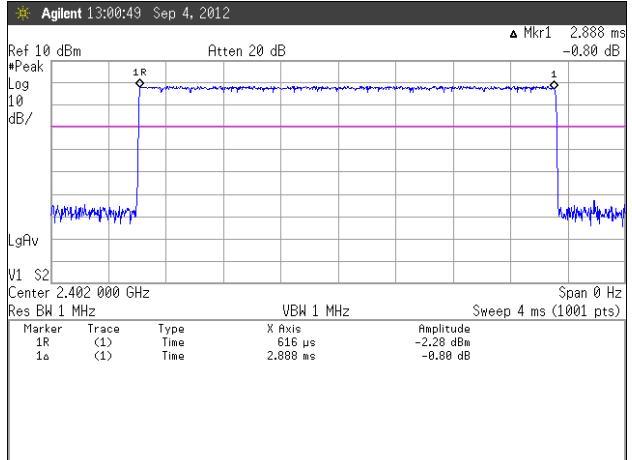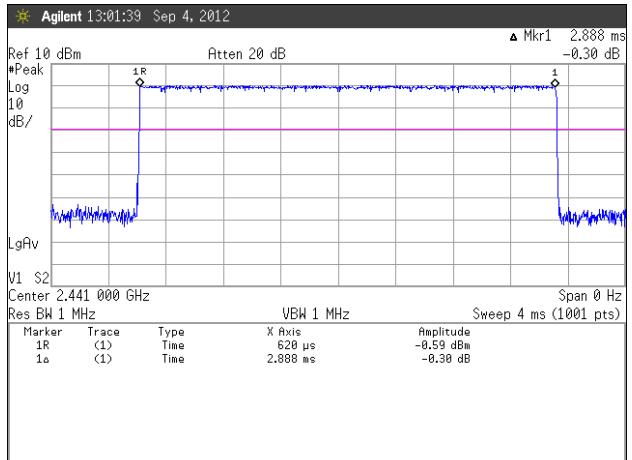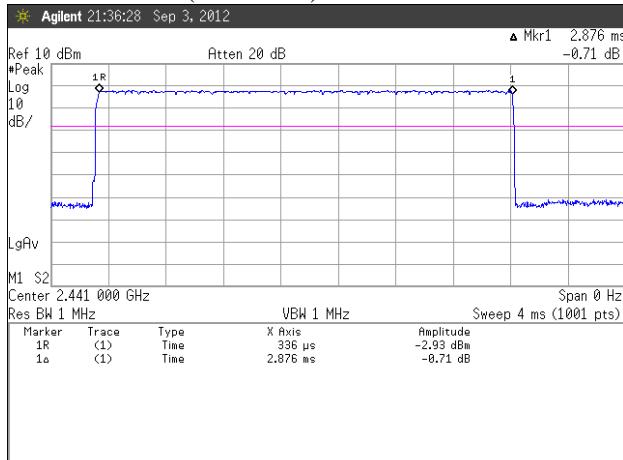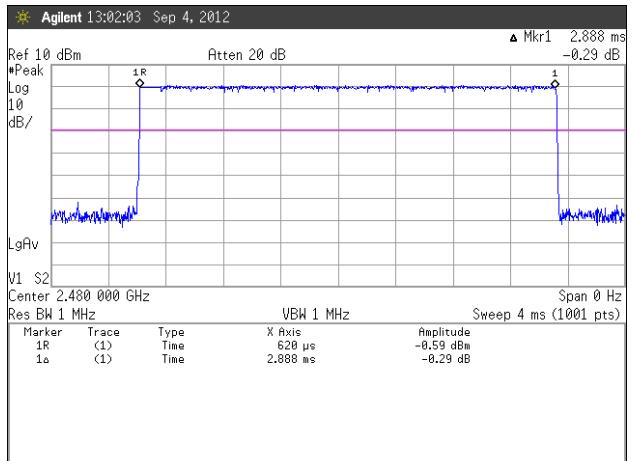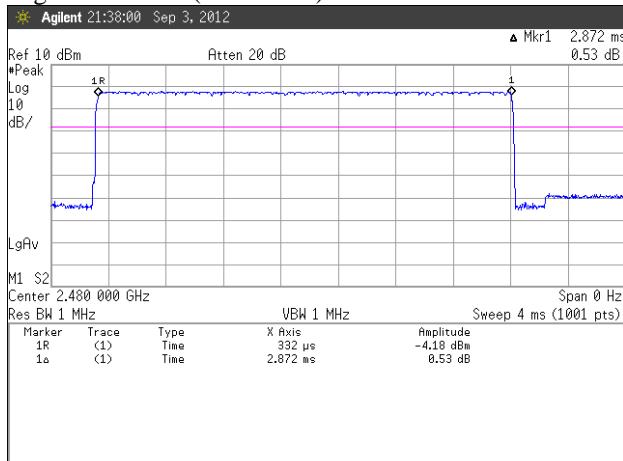Figure 5. Plot of the Time of Occupancy
Basic (GFSK)
Lowest Channel (2402 MHz)

EDR ($\pi/4$ DQPSK)

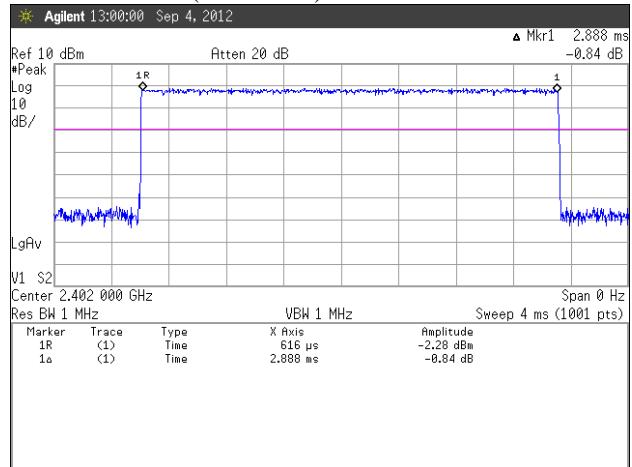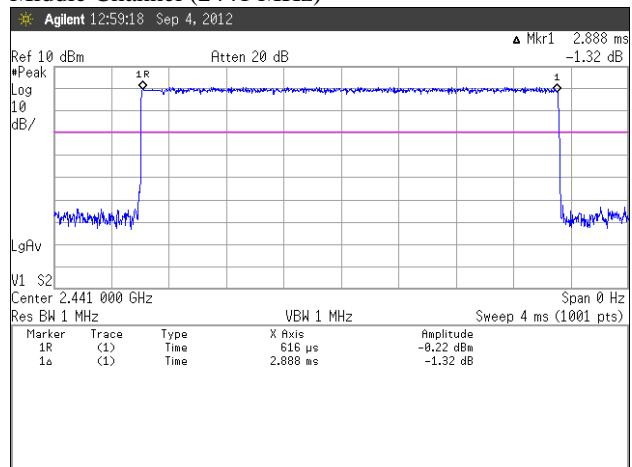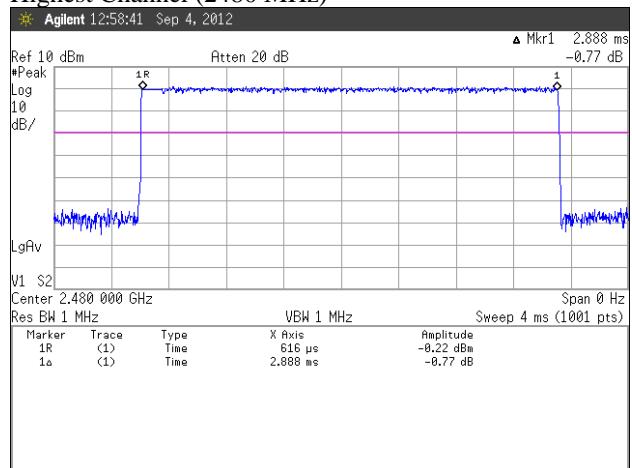Middle Channel (2441 MHz)

Highest Channel (2480 MHz)



SK TECH CO., LTD.

Page 21 of 37

EDR (8DPSK)
Lowest Channel (2402 MHz)

Middle Channel (2441 MHz)

Highest Channel (2480 MHz)




5.6 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

5.6.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength (μ V/m @ 3m)	Field strength (dB μ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

5.6.2 Test Procedure

1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter / 3 meter distance for below 30 MHz.
2. The EUT was placed on the top of the 0.8-meter height, 1 \times 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 \times 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.


SK TECH CO., LTD.

Page 24 of 37

5.6.3 Test Results:
PASS
Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 6 and 7.
Spurious RF conducted emissions were shown in the Figure 8.
Emission plot for the preliminary radiated measurements were shown in the Figure 9.

NOTE 1: for conducted measurement, we took the insertion loss of the cable loss into consideration within the measuring instrument. And for radiated measurement, the results were calibrated to the field strength within the measuring instrument.

NOTE 2: The preliminary radiated measurements were performed in the anechoic chamber in order to find the frequency, which falls in the restricted bands as defined in Section 15.205, and the results for the final measurements were indicated in the Table 5.

Table 5: Results for the final radiated measurements of the field strength of spurious emission

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Turn Table [degree]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
Average/Peak/Quasi-peak data, emissions (9 kHz ~ 30 MHz)												
<i>No Spurious Radiated Emissions Found</i>												
Quasi-peak data, emissions (30 MHz ~ 1000 MHz)												
258.92	100	H	1.30	252	51.17	28.20	-	12.62	1.98	35.57	46.0	8.43
322.94	100	H	1.28	239	50.08	27.88	-	14.24	2.21	38.65	46.0	7.35
386.96	100	H	1.27	244	47.49	27.83	-	15.37	2.43	37.46	46.0	8.54
AVERAGE data, emissions above 1000 MHz												
2386.00	1000	H	1.15	253	-	39.90	10.15	27.98	6.48	43.31	54	10.69
2338.00	1000	V	1.11	330	-	39.88	10.15	27.80	6.40	43.99	54	10.01
2483.60	1000	H	1.19	69	-	39.98	10.14	28.34	6.62	45.43	54	8.57
2483.60	1000	V	1.10	305		39.98	10.14	28.34	6.62	44.24	54	9.76
4804.20	1000	H	1.62	298	35.29	40.47	0.41	33.48	9.68	38.39	54	15.61
4882.05	1000	H	1.61	295	33.31	40.51	0.39	33.57	9.76	36.52	54	17.48
4960.26	1000	H	1.45	301	32.29	40.55	0.37	33.66	9.83	35.60	54	18.40
PEAK data, emissions above 1000 MHz												
2386.00	1000	H	1.15	222	-	39.90	10.15	27.98	6.48	57.12	74	16.88
2338.00	1000	V	1.11	330	-	39.88	10.15	27.80	6.40	59.18	74	14.82
2483.60	1000	H	1.19	69	-	39.98	10.14	28.34	6.62	61.09	74	12.91
2483.60	1000	V	1.10	305	-	39.98	10.14	28.34	6.62	58.80	74	15.20
4804.20	1000	H	1.62	298	38.95	40.47	0.41	33.48	9.68	42.05	74	31.95
4882.05	1000	H	1.61	295	34.96	40.51	0.39	33.57	9.76	38.17	74	35.83
4960.26	1000	H	1.45	301	35.92	40.55	0.37	33.66	9.83	39.23	74	34.77

Margin (dB) = Limit – Actual
[Actual = Reading – Amp Gain + ATT + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF)

3. AF = Antenna Factor, CL = Cable Loss

Remark: “-” in the Reading means that the correction already made as the band-edge compliance measurements.




SK TECH CO., LTD.

Page 25 of 37


Figure 6. Plot of the Band Edge (Conducted)

Lower band-edge


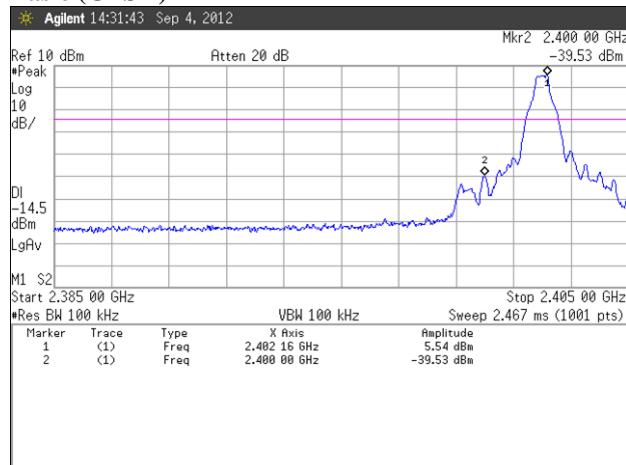
Basic (GFSK)





Upper band-edge

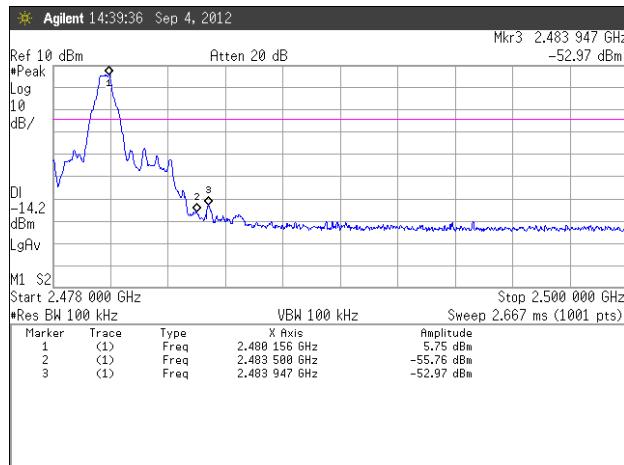

EDR ($\pi/4$ DQPSK)

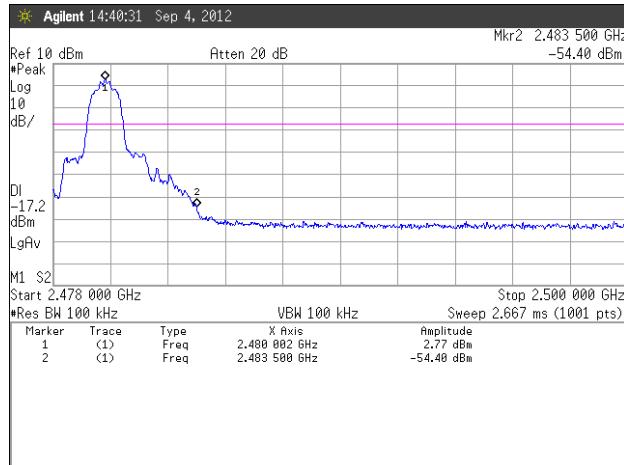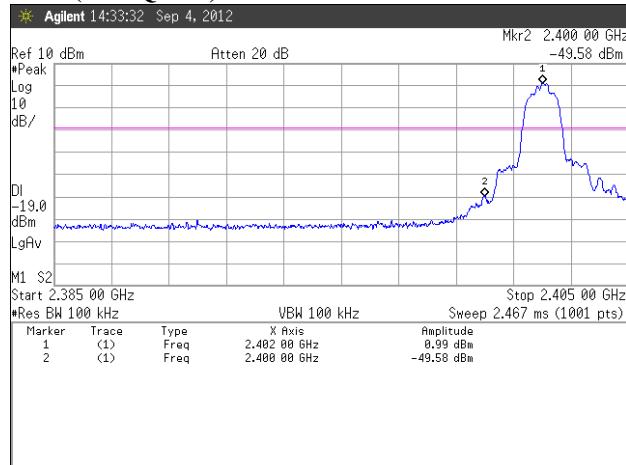

EDR (8DPSK)

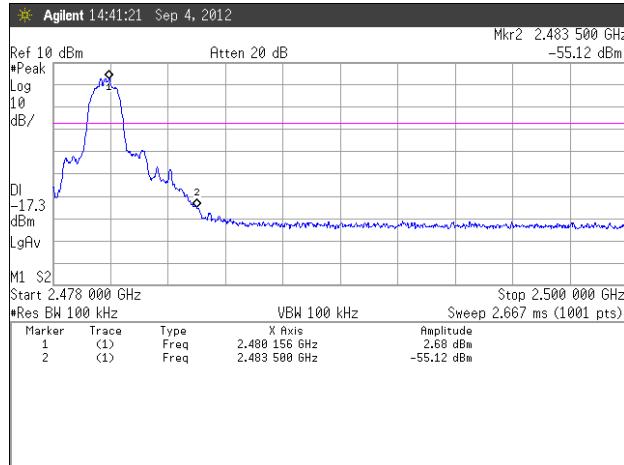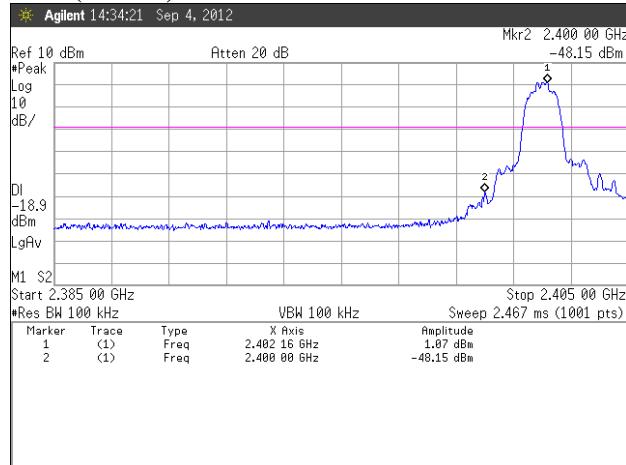



SK TECH CO., LTD.

Page 26 of 37

Figure 7. Plot of the Band Edge (Radiated)




Lowest Channel (operating at 2402 MHz)

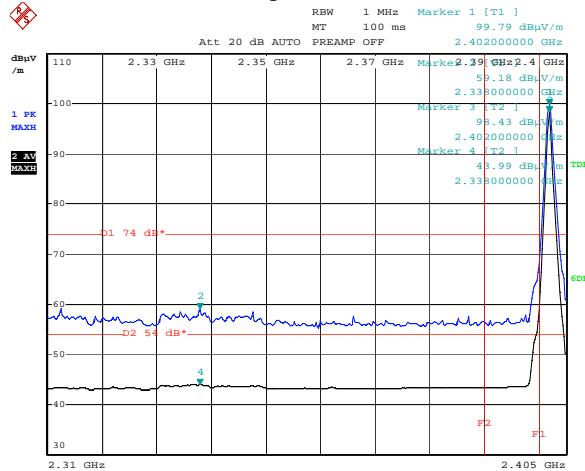Basic (GFSK) - Vertical polarization




Lowest Channel (operating at 2402 MHz)

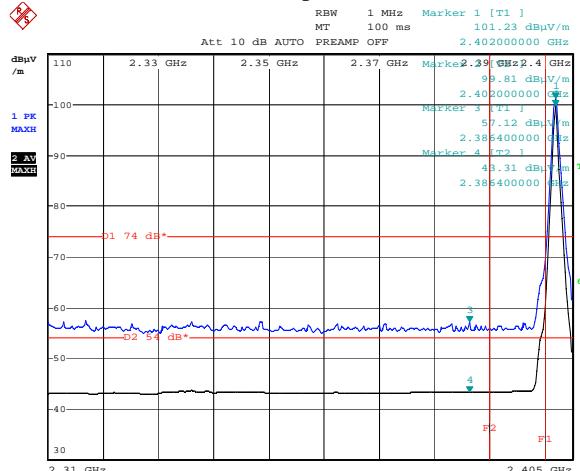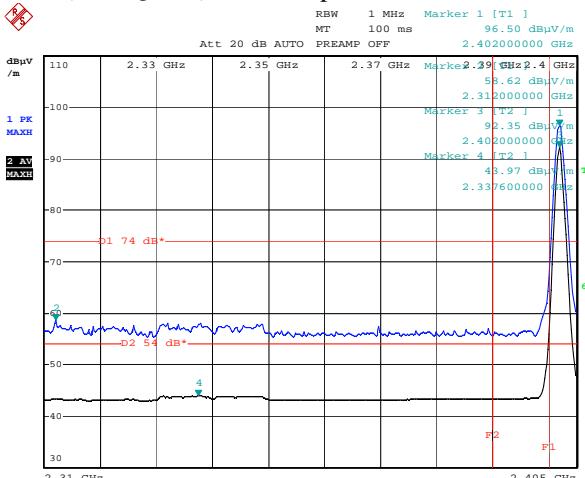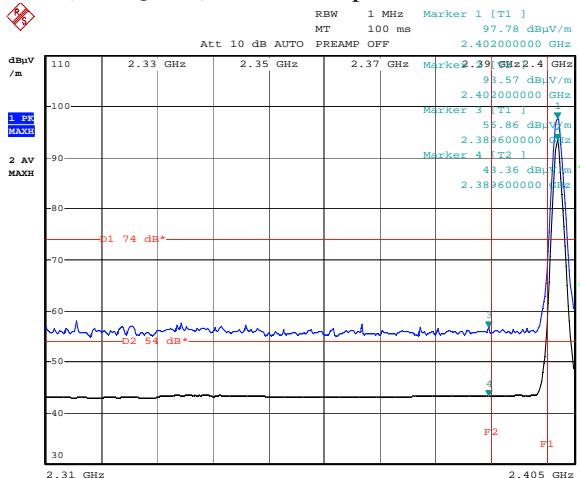
Basic (GFSK) - Horizontal polarization

EDR ($\pi/4$ DQPSK) - Vertical polarizationEDR ($\pi/4$ DQPSK) - Horizontal polarization

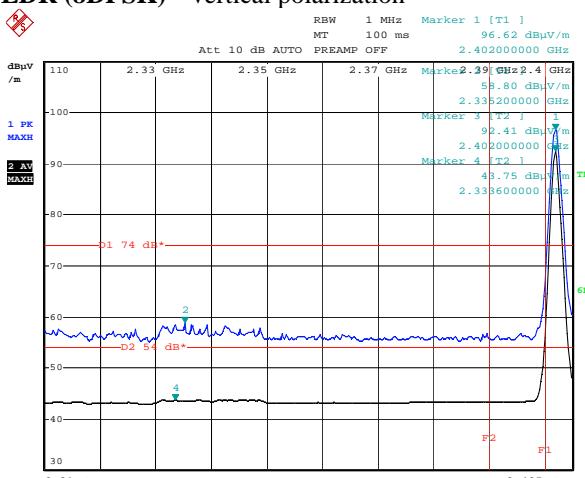EDR (8DPSK) - Vertical polarization



EDR (8DPSK) - Horizontal polarization

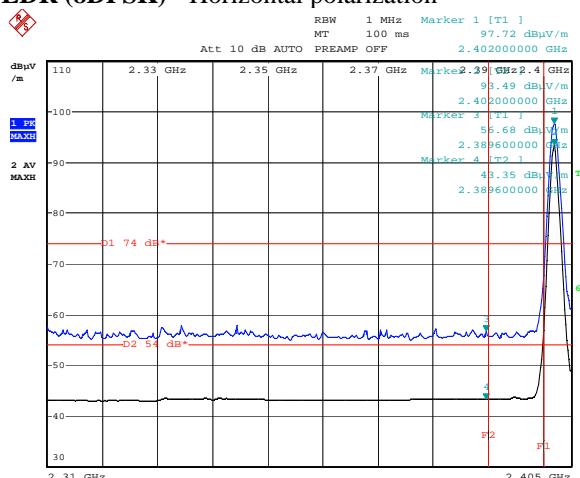




SK TECH CO., LTD.

Page 27 of 37

Plot of the Band Edge (Radiated)




Highest Channel (operating at 2480 MHz)

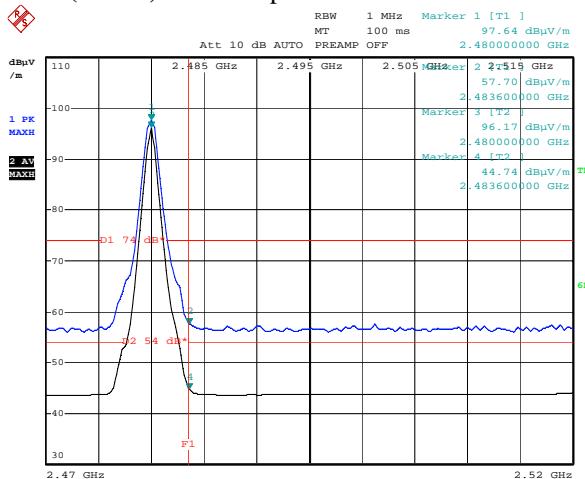Basic (GFSK) - Vertical polarization




Highest Channel (operating at 2480 MHz)

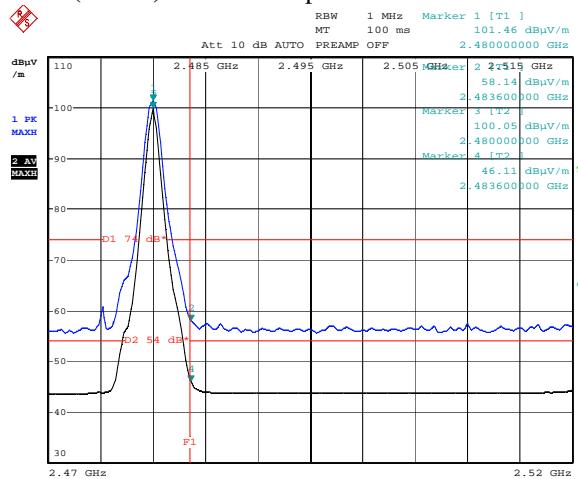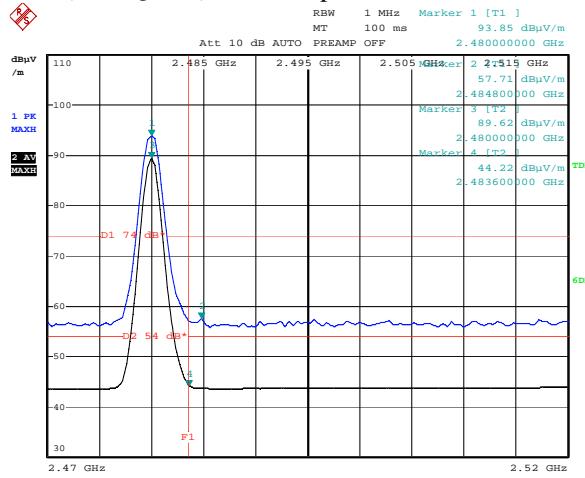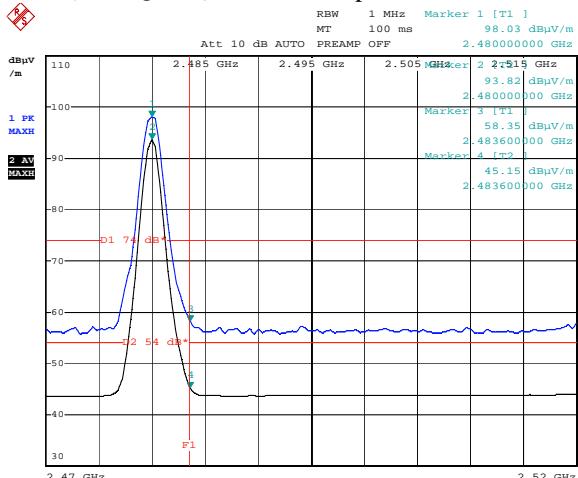
Basic (GFSK) - Horizontal polarization

EDR ($\pi/4$ DQPSK) - Vertical polarizationEDR ($\pi/4$ DQPSK) - Horizontal polarization

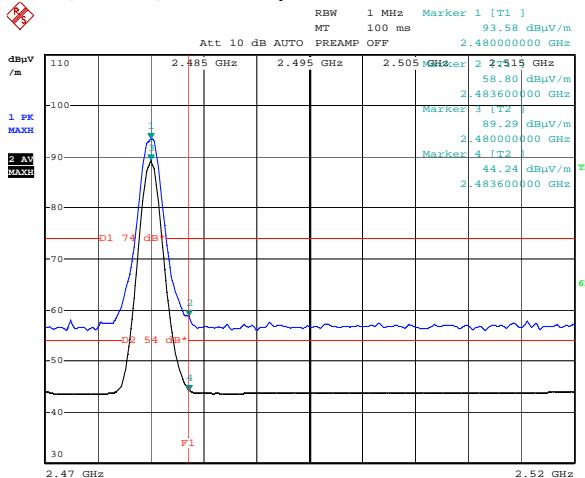EDR (8DPSK) - Vertical polarization









EDR (8DPSK) - Horizontal polarization

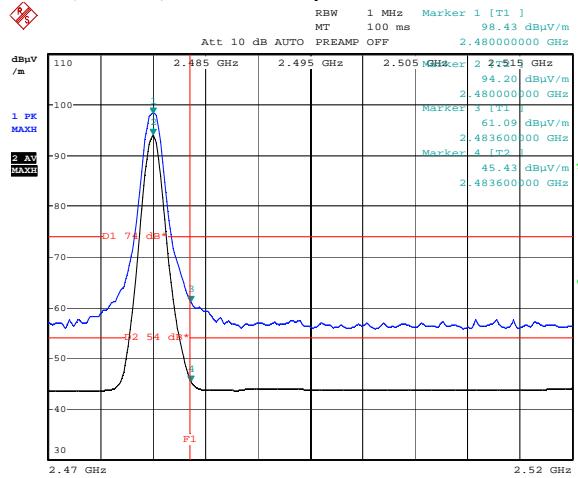

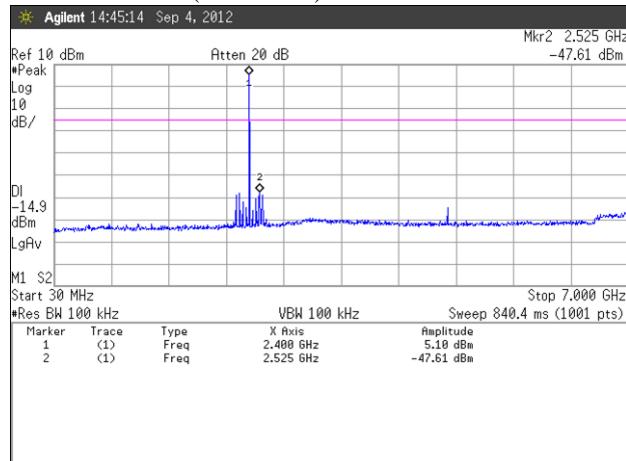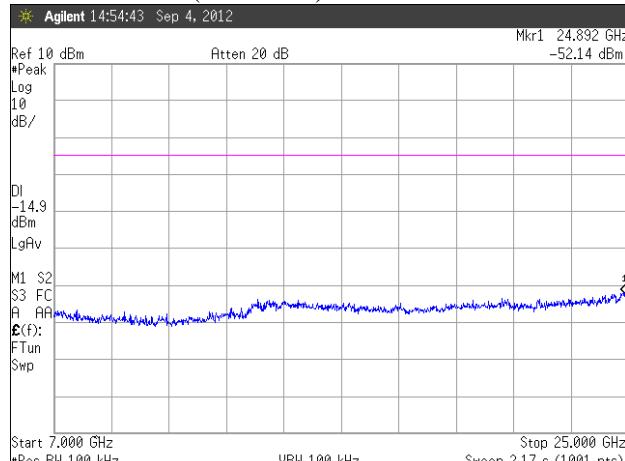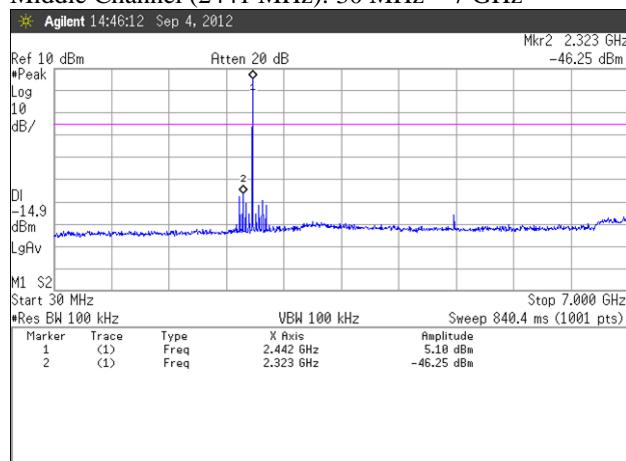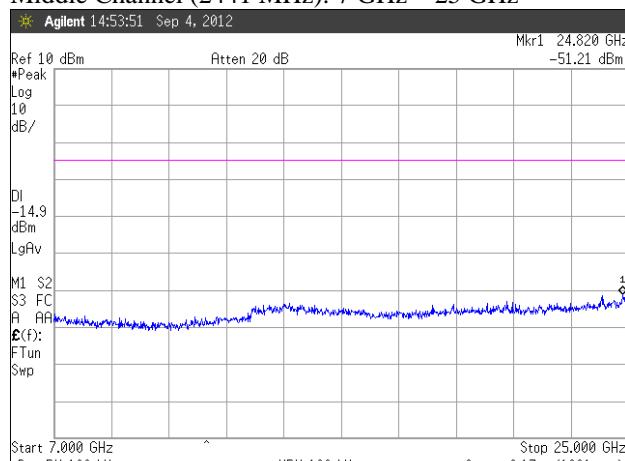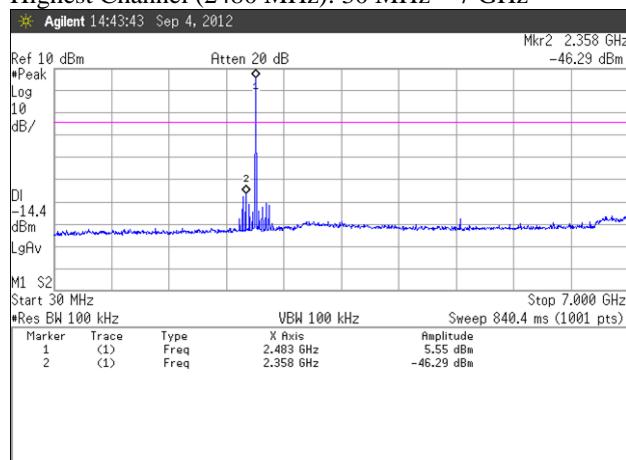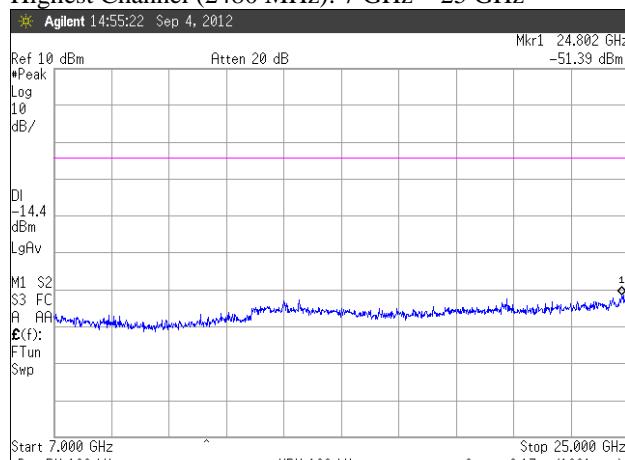
SK TECH CO., LTD.

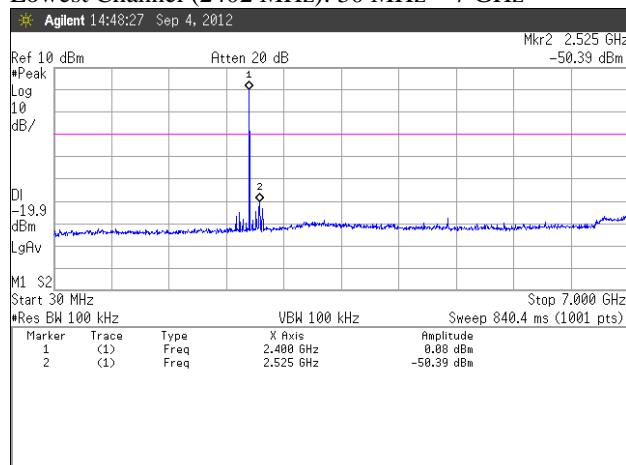
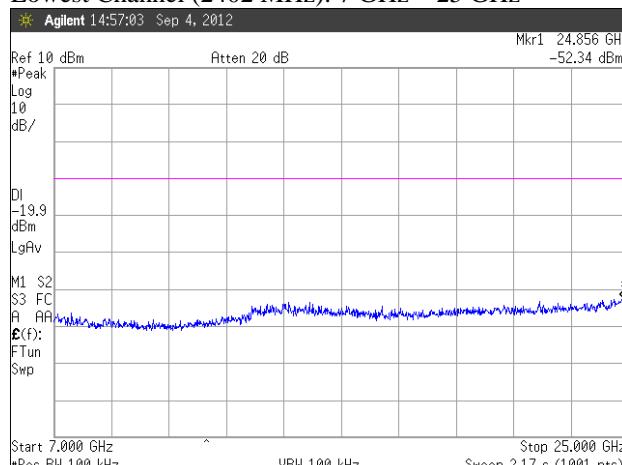
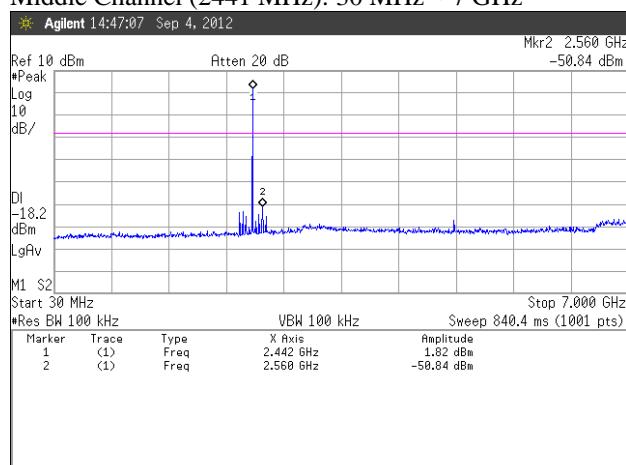
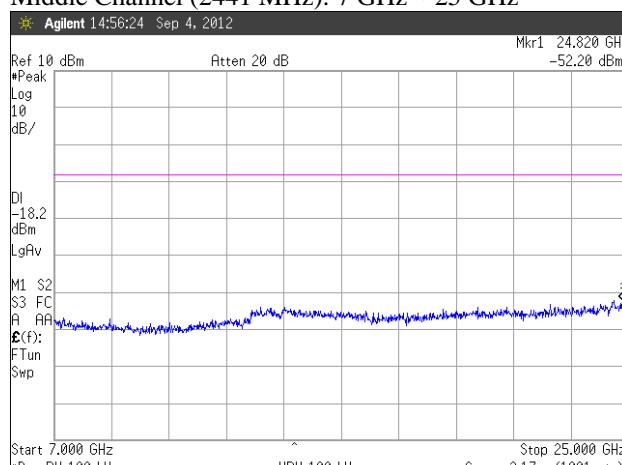
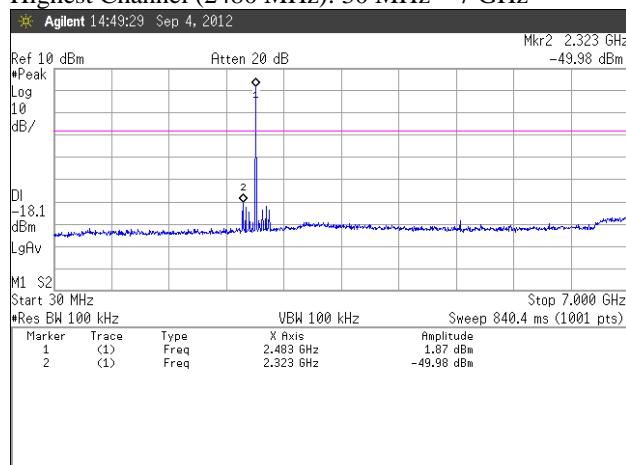
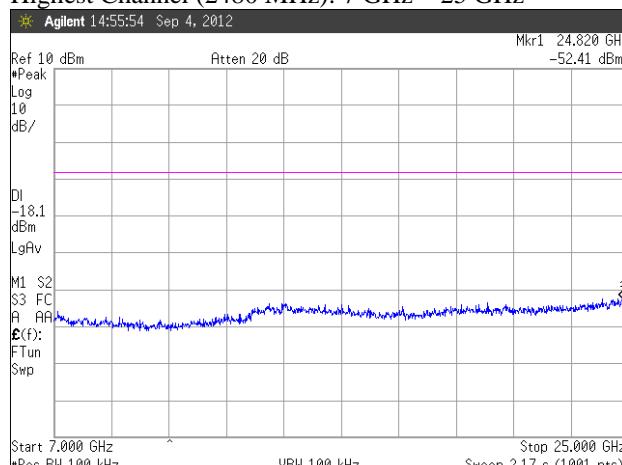
Page 28 of 37

Figure 8. Spurious RF conducted emissions
Basic (GFSK)
Lowest Channel (2402 MHz): 30 MHz ~ 7 GHz

Lowest Channel (2402 MHz): 7 GHz ~ 25 GHz

Middle Channel (2441 MHz): 30 MHz ~ 7 GHz

Middle Channel (2441 MHz): 7 GHz ~ 25 GHz

Highest Channel (2480 MHz): 30 MHz ~ 7 GHz

Highest Channel (2480 MHz): 7 GHz ~ 25 GHz



SK TECH CO., LTD.

Page 29 of 37

Spurious RF conducted emissions

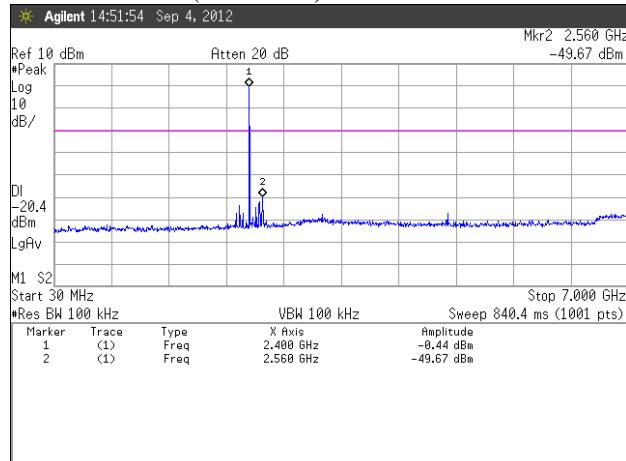
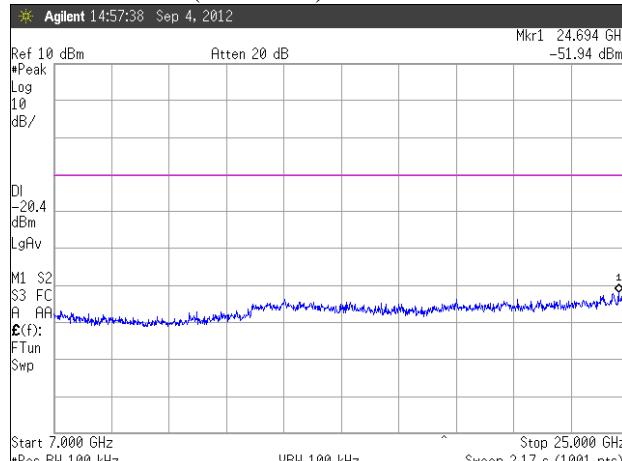
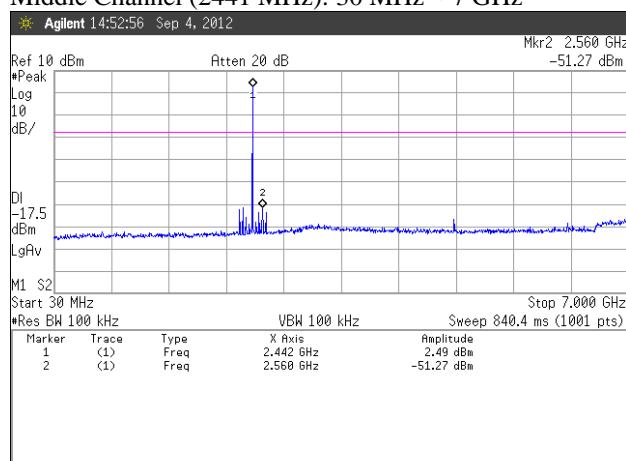
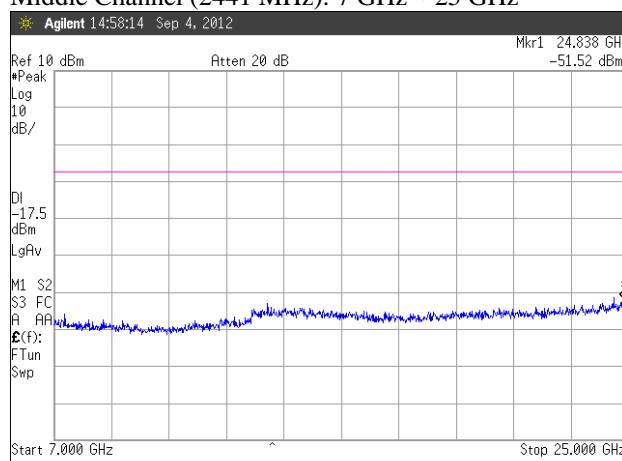
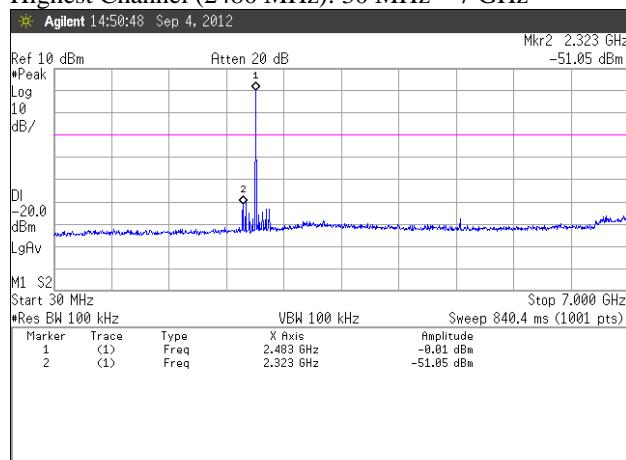
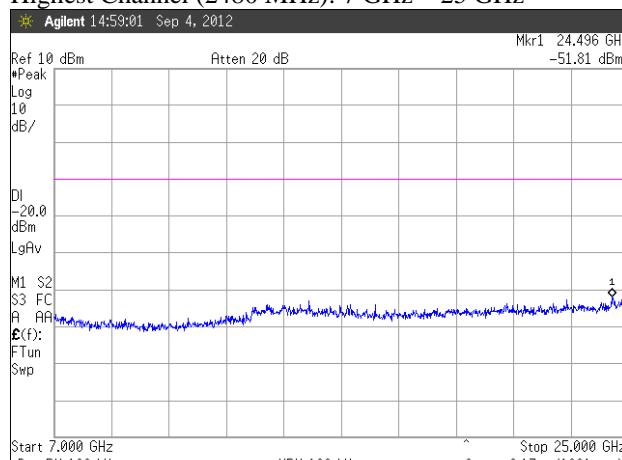
EDR ($\pi/4$ DQPSK)
Lowest Channel (2402 MHz): 30 MHz ~ 7 GHz

Lowest Channel (2402 MHz): 7 GHz ~ 25 GHz

Middle Channel (2441 MHz): 30 MHz ~ 7 GHz

Middle Channel (2441 MHz): 7 GHz ~ 25 GHz

Highest Channel (2480 MHz): 30 MHz ~ 7 GHz

Highest Channel (2480 MHz): 7 GHz ~ 25 GHz



SK TECH CO., LTD.

Page 30 of 37

Spurious RF conducted emissions

EDR (8DPSK)

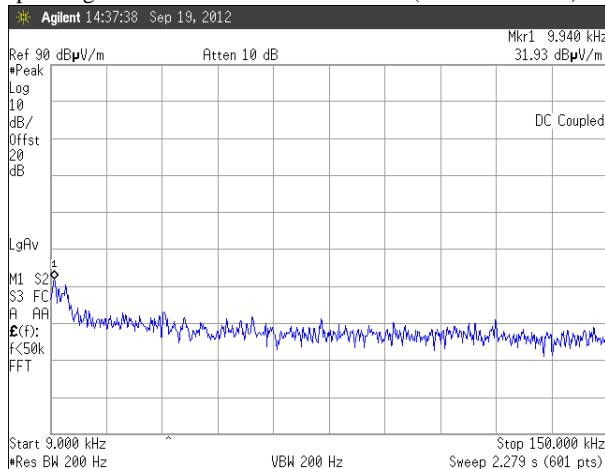
Lowest Channel (2402 MHz): 30 MHz ~ 7 GHz

Lowest Channel (2402 MHz): 7 GHz ~ 25 GHz

Middle Channel (2441 MHz): 30 MHz ~ 7 GHz

Middle Channel (2441 MHz): 7 GHz ~ 25 GHz

Highest Channel (2480 MHz): 30 MHz ~ 7 GHz

Highest Channel (2480 MHz): 7 GHz ~ 25 GHz



SK TECH CO., LTD.


Page 31 of 37

Figure 9. Emission plot for the preliminary radiated measurements


Operating at 2402 MHz: 9 kHz ~ 150 kHz (@ 3-m distance)



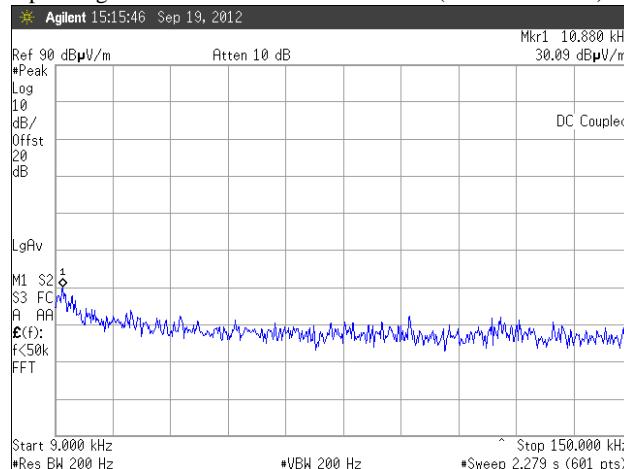
Operating at 2480 MHz: 9 kHz ~ 150 kHz (@ 3-m distance)



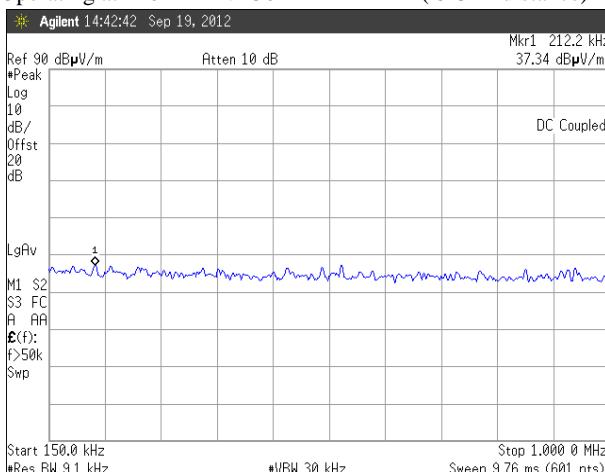
Operating at 2402 MHz: 150 kHz ~ 1 MHz (@ 3-m distance)



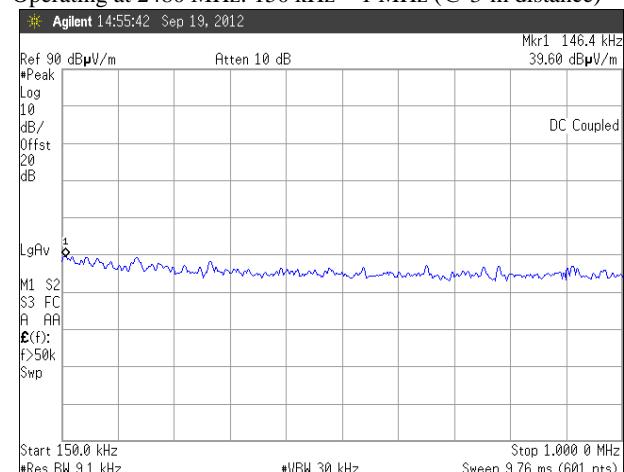
Operating at 2480 MHz: 150 kHz ~ 1 MHz (@ 3-m distance)



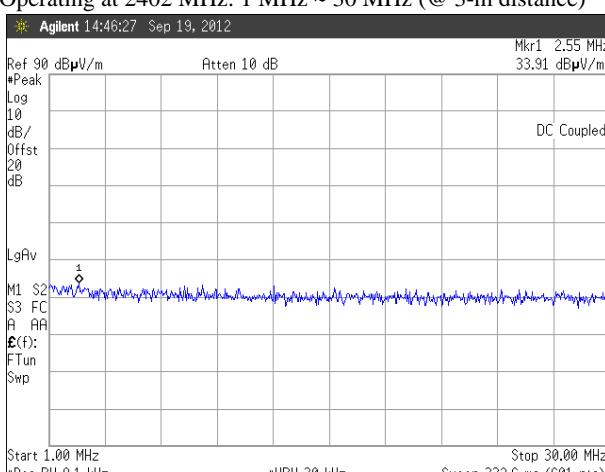Operating at 2402 MHz: 1 MHz ~ 30 MHz (@ 3-m distance)



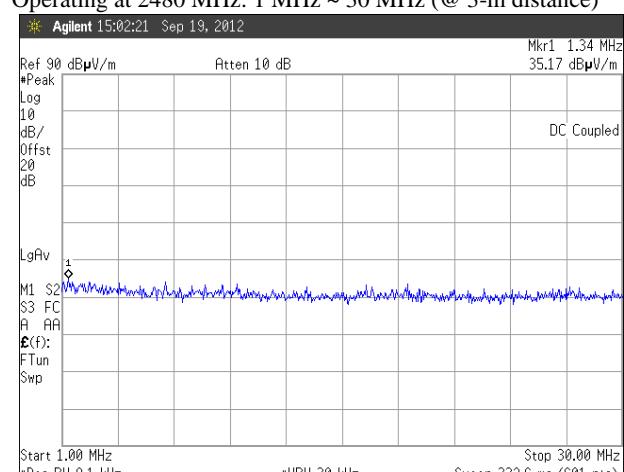Operating at 2480 MHz: 1 MHz ~ 30 MHz (@ 3-m distance)






SK TECH CO., LTD.

Page 32 of 37


Emission plot for the preliminary radiated measurements (continued)

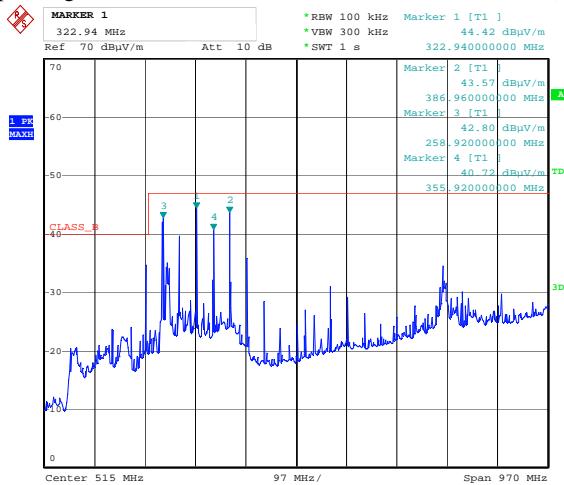Operating at 2402 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)




Date: 12.SEP.2012 13:06:34

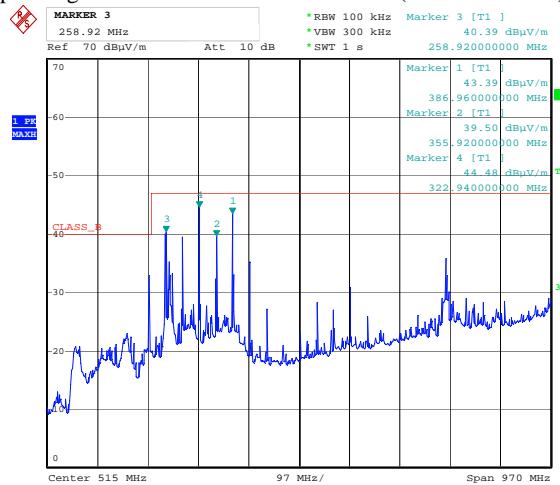Operating at 2480 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)




Date: 12.SEP.2012 13:13:47

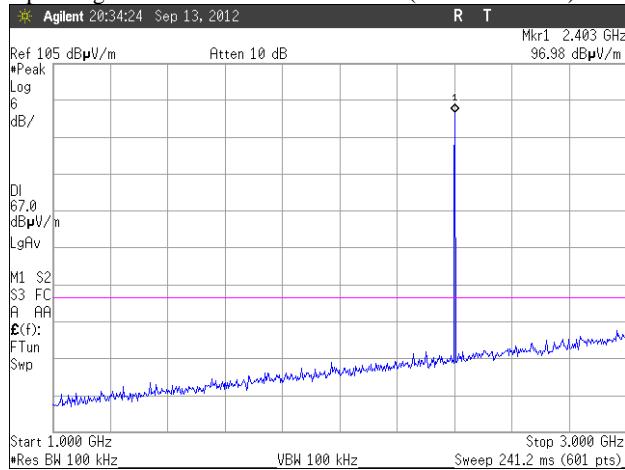
Operating at 2402 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)



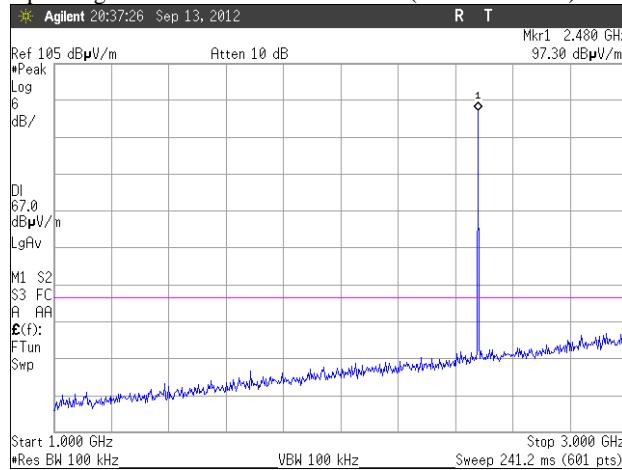
Operating at 2480 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)



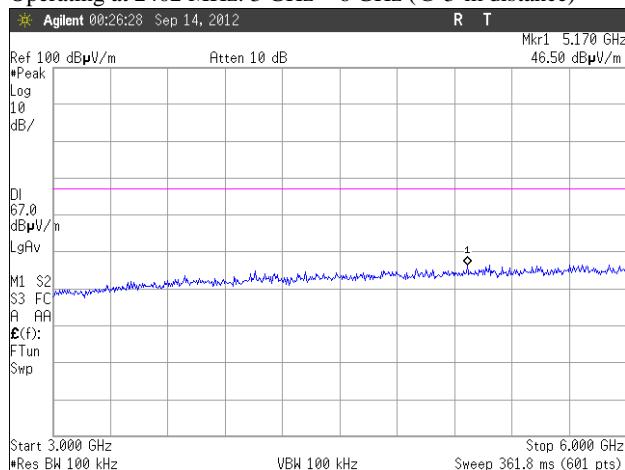Operating at 2402 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)



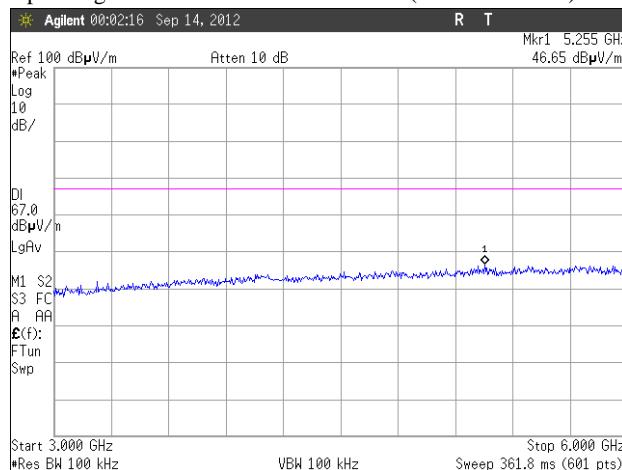Operating at 2480 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)





SK TECH CO., LTD.


Page 33 of 37

Emission plot for the preliminary radiated measurements (continued)

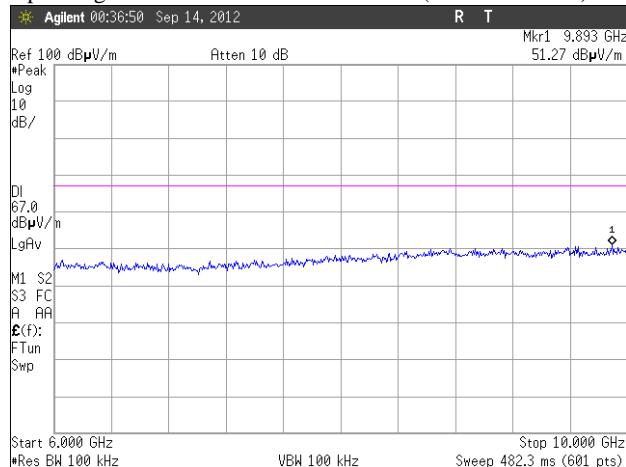
Operating at 2402 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)



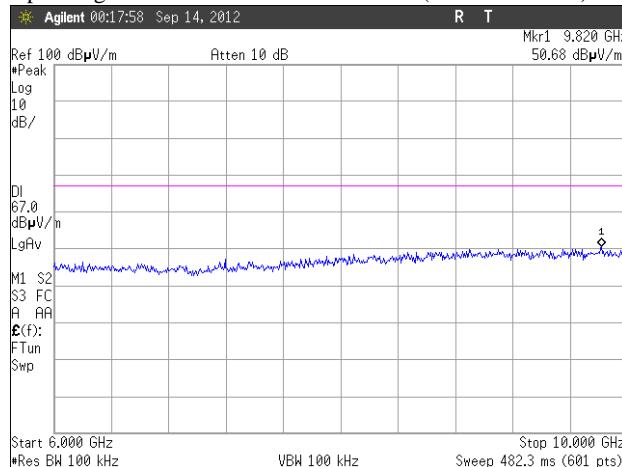
Operating at 2480 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)



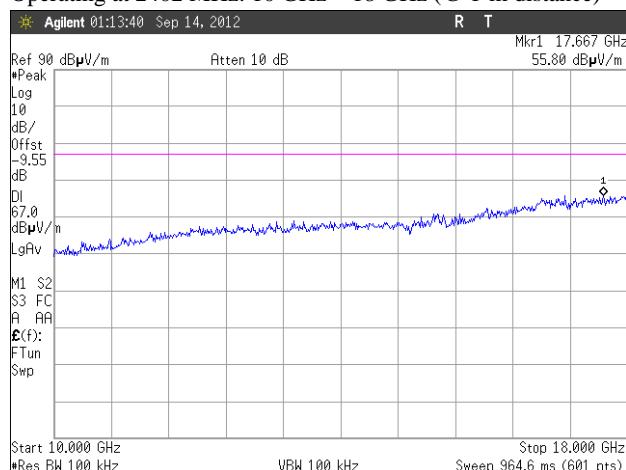
Operating at 2402 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)



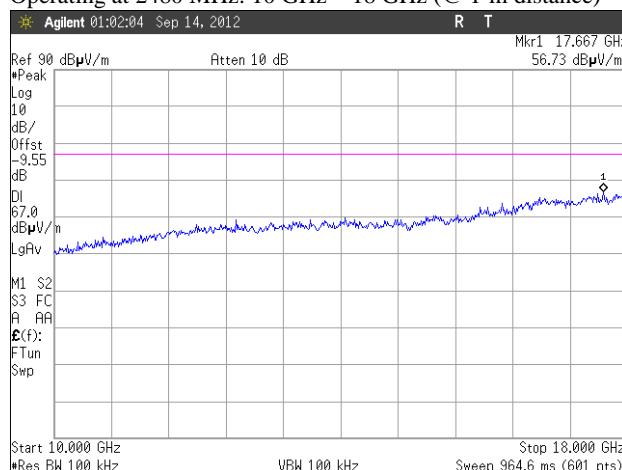
Operating at 2480 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)



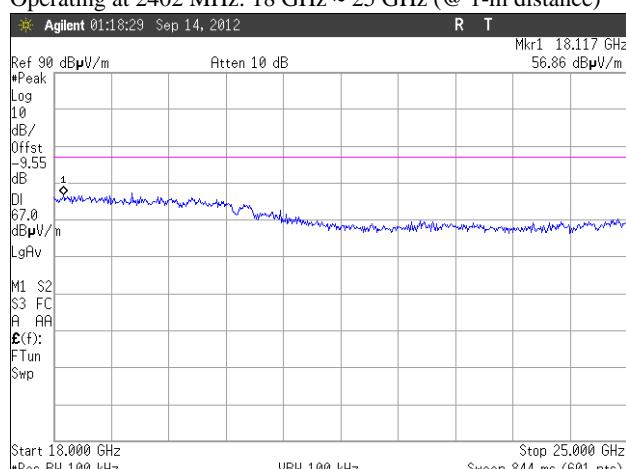Operating at 2402 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)



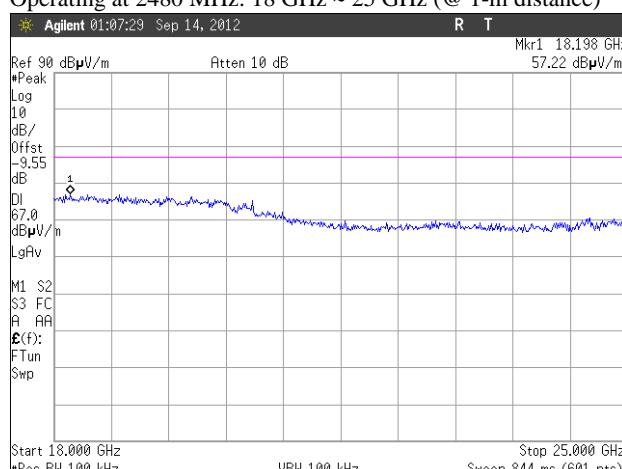Operating at 2480 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)





5.7 AC POWER LINE CONDUCTED EMISSIONS

5.7.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a $50\mu\text{H}/50\Omega$ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.7.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a $50\Omega/50\mu\text{H}$ LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.


SK TECH CO., LTD.

Page 35 of 37

5.7.3 Test Results:
PASS
Table 6: Measured values of the Conducted Emissions

Frequency [MHz]	Reading [dB μ V]	L / N	CF [dB]	CL [dB]	Actual [dB μ V]	Limit [dB μ V]	Margin [dB]
QUASI-PEAK DATA							
0.185	47.10	L	0.22	0.02	47.34	64.26	16.92
0.245	41.12	L	0.22	0.02	41.36	61.92	20.56
0.555	32.46	N	0.22	0.04	32.72	56.00	23.28
0.615	34.06	L	0.23	0.04	34.33	56.00	21.67
0.680	34.60	N	0.23	0.04	34.87	56.00	21.13
0.740	32.48	L	0.23	0.04	32.75	56.00	23.25
16.000	37.30	L	0.92	0.26	38.48	60.00	21.52
17.910	40.10	L	1.03	0.28	41.41	60.00	18.59
18.095	39.54	N	0.96	0.28	40.78	60.00	19.22
20.065	37.78	N	1.07	0.30	39.15	60.00	20.85
20.135	40.12	L	1.14	0.30	41.56	60.00	18.44
22.850	36.00	L	1.14	0.31	37.45	60.00	22.55
AVERAGE DATA							
0.185	36.64	L	0.22	0.02	36.88	54.26	17.38
0.555	28.04	N	0.22	0.04	28.30	46.00	17.70
0.615	28.00	L	0.23	0.04	28.27	46.00	17.73
0.680	30.88	L	0.23	0.04	31.15	46.00	14.85
0.740	27.00	L	0.23	0.04	27.27	46.00	18.73
16.000	31.84	L	0.92	0.26	33.02	50.00	16.98
17.910	34.97	L	1.03	0.28	36.28	50.00	13.72
18.095	34.59	N	0.96	0.28	35.83	50.00	14.17
20.065	31.93	N	1.07	0.30	33.30	50.00	16.70
20.135	35.16	L	1.14	0.30	36.60	50.00	13.40
22.725	30.14	N	1.02	0.31	31.47	50.00	18.53
22.850	30.52	L	1.14	0.31	31.97	50.00	18.03

Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]



L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.

**SK TECH CO., LTD.**

Page 36 of 37

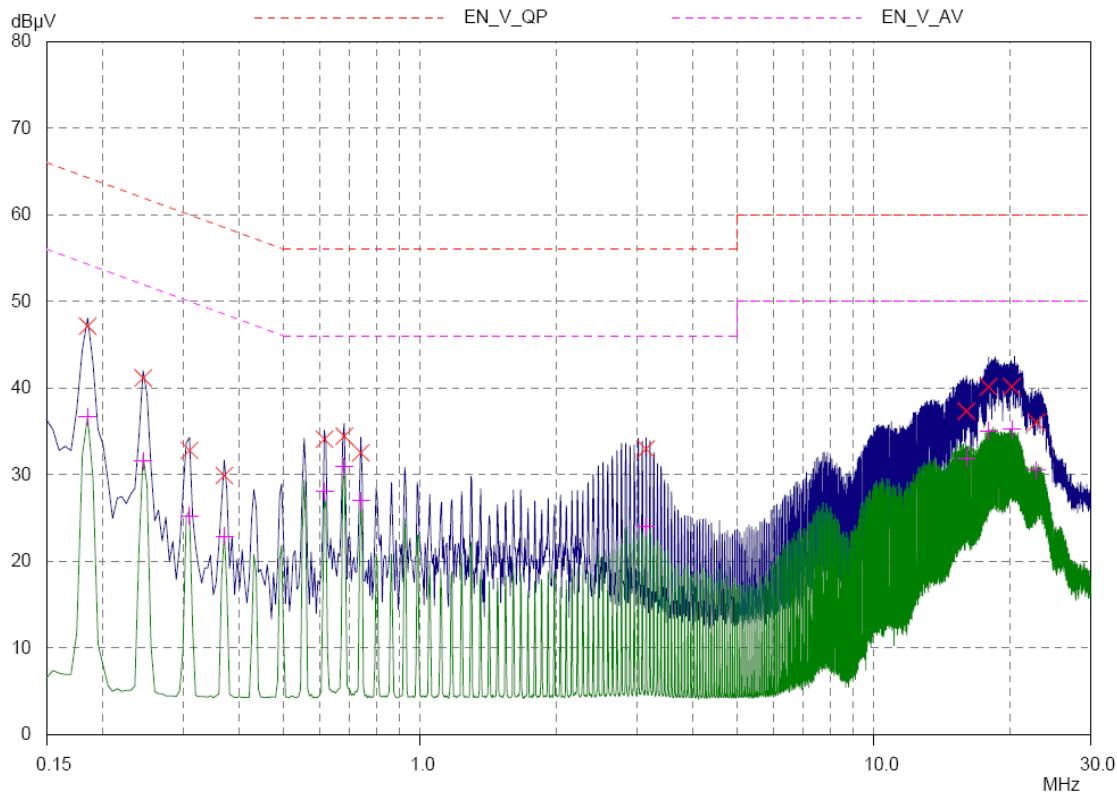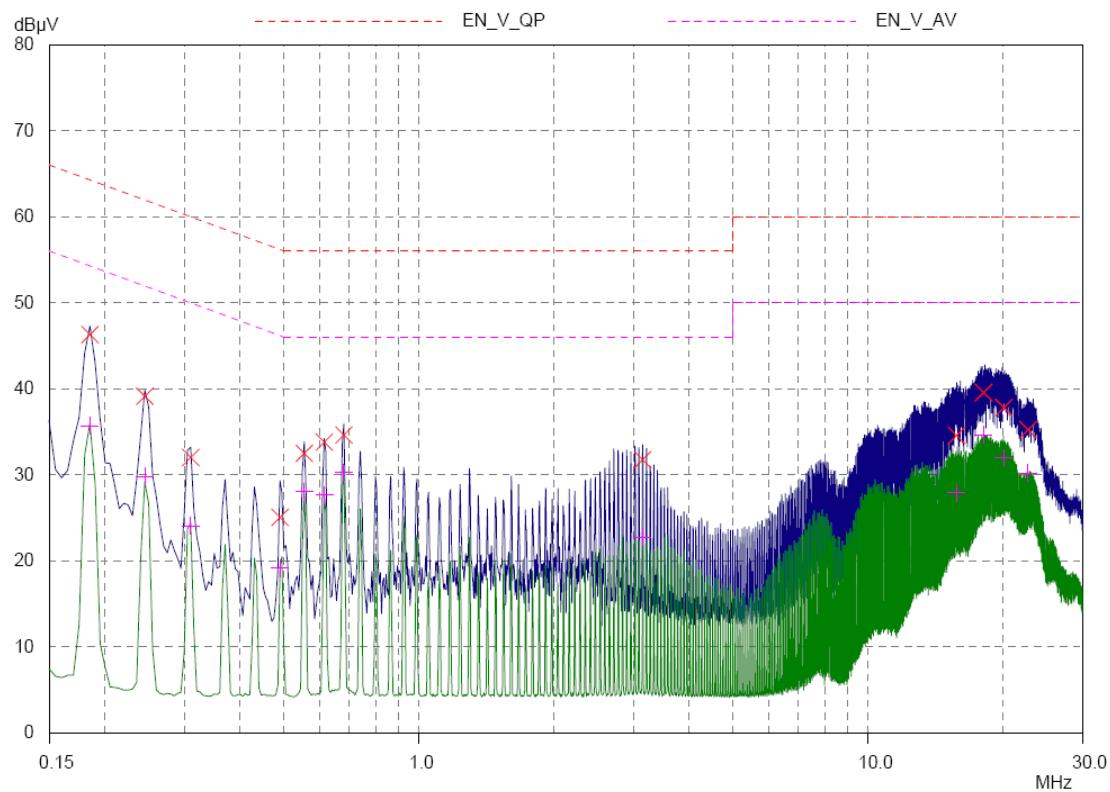Figure 10. Plot of the AC Power Line Conducted Emissions**Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**



5.8 RF Exposure

5.8.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm ²]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f ²)	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	<u>1.0</u>	<u>30</u>

f = frequency in MHz, * = Plane-wave equivalent power density

MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm²]

P = power input to antenna [mW]

$$(\Rightarrow R = \sqrt{PG/4\pi S})$$

G = power gain of the antenna in the direction of interest
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power=4.03 [mW](= 6.05 dBm)& Antenna gain=1.19 (= 0.76 [dBi])	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
4.03 mW, at 20 cm from the antenna 0.76 [dBi]	$S = PG/4\pi R^2 = 0.0010 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

5.8.2 RF Exposure Compliance Issue

July 02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f_{GHZ} ≈ 25) mW, d < 2.5 cm, (120/f_{GHZ} ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f_{GHZ} ≈ 370) mW, d < 20 cm], where f_{GHZ}: 2.44, d: distance to a person's body

The users manual for end users must include the following information in a prominent location:

"IMPORTANT NOTE: This device is only sold for use as a Mobile Device, and not ever be used less than 20 cm from the User. To comply with FCC RF exposure compliance requirements, this device should be permanently mounted in a vehicle using a manufacturer or customer supplied mounting plate. This device must be installed to provide a separation distance of at least 20 cm from all persons."