



SK TECH CO., LTD.

Page 1 of 39

## TEST REPORT

Test Report No.:	SKTRFC-120928-021		
Applicant:	Bluepad Co., Ltd		
Applicant Address:	4th Floor, Doosung Bd. 298-21, Gongdan Road, Gunpo-si, Gyeonggi-do, 435-862 Korea		
Manufacturer:	Bluepad Co., Ltd		
Manufacturer Address:	4th Floor, Doosung Bd. 298-21, Gongdan Road, Gunpo-si, Gyeonggi-do, 435-862 Korea		
Device Under Test:	Web Pad		
FCC ID:	O36-BPR-100	Model Name:	BPR-100
Brand/Trade Name:	BluePAD		
Receipt No.:	SKTEU12-1114	Date of receipt:	August 24, 2012
Date of Issue:	September 28, 2012		
Location of Testing:	SK TECH CO., LTD. #820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea		
Test Procedure:	ANSI C63.10-2009 and ANSI C63.4-2009, KDB 558074 D01		
Test Specification:	47CFR, FCC Part 15 Rules		
FCC Equipment Class:	DTS - Part 15 Digital Transmission System		
Test Result:	The above-mentioned device has been tested and passed.		

Tested &amp; Reported by: Wonsik Ham

Approved by: Jongsoo Yoon

September 28, 2012

Signature

Date

September 28, 2012

Signature

Date

Other Aspects:	-
Abbreviations:	· OK, Pass = passed · Fail = failed · N/A = not applicable



- This test report is not permitted to copy partly and entirely without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of submitted samples of the above mentioned.



## &gt;&gt; CONTENTS &lt;&lt;

<b>1. GENERAL</b>	4
<b>2. TEST SITE</b>	4
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
<b>3. DESCRIPTION OF THE EQUIPMENT UNDER TEST</b>	6
3.1 Rating and Physical Characteristics	6
3.2 Equipment Modifications	6
3.3 Submitted Documents	6
<b>4. MEASUREMENT CONDITIONS</b>	7
4.1 Description of test configuration	7
4.2 List of Peripherals	7
4.3 Type of Used Cables	7
4.4 Uncertainty	7
<b>5. TEST AND MEASUREMENTS</b>	8
<b>5.1 ANTENNA REQUIREMENT</b>	8
5.1.1 Regulation	8
5.1.2 Result	8
<b>5.2 Test Configuration of Equipment Under Test</b>	9
<b>5.3 6dB BANDWIDTH</b>	10
5.3.1 Regulation	10
5.3.2 Test Procedure	10
5.3.3 Test Results	10
Table 1: Measured values of the 6dB Bandwidth	10
Figure 1: Plot of the 6dB Bandwidth	11
<b>5.4 MAXIMUM PEAK OUTPUT POWER</b>	13
5.4.1 Regulation	13
5.4.2 Test Procedure	13
5.4.3 Test Results	13
Table 2: Measured values of the Maximum Peak Conducted Output Power	13
Figure 2: Plot of the Maximum Peak Conducted Output Power	14

(Continued)



<b>5.5 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS</b> .....	<b>16</b>
5.5.1 Regulation .....	16
5.5.2 Test Procedure .....	16
5.5.3 Test Results .....	18
Table 3: Measured values of the field strength of spurious emission (Radiated) .....	18
Figure 3: Plot of the Band Edge (Conducted) .....	23
Figure 4: Plot of the Band Edge (Radiated) .....	25
Figure 5: Spurious RF conducted emission .....	29
<b>5.6 PEAK POWER SPECTRAL DENSITY</b> .....	<b>33</b>
5.6.1 Regulation .....	33
5.6.2 Test Procedure .....	33
5.6.3 Test Results .....	33
Table 4: Measured values of the Peak Power Spectral Density .....	33
Figure 6: Plot of the Peak Power Spectral Density .....	34
<b>5.7 AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>36</b>
5.7.1 Regulation .....	36
5.7.2 Test Procedure .....	36
5.7.3 Test Results .....	37
Table 5: Measured values of the AC Power Line Conducted Emissions .....	37
Figure 7: Plot of the AC Power Line Conducted Emissions .....	38
<b>5.8 RF EXPOSURE</b> .....	<b>39</b>
5.8.1 Regulation .....	39
5.8.2 RF Exposure Compliance Issue .....	39



## 1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.10-2009 and ANSI C63.4-2009 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them..

## 2. TEST SITE

SK TECH CO., LTD.

### 2.1 Location

#820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea

(FCC Registered Test Site Number: 938639)

(OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 5429A-1)

This laboratory is also notified to FCC by RRA as a Conformity Assessment Body, and designated to perform compliance testing on equipment subject to Declaration of Conformity (DOC) and Certification under Parts 15 and 18 of the FCC Rules. Designation number: KR0007



## 2.2 List of Test and Measurement Instruments

No.	Description	Manufacturer	Model No.	Serial No.	Calibrated until	Used
1	Spectrum Analyzer	Agilent	E4405B	US40520856	2013.03.07	
2	Spectrum Analyzer	Agilent	E4440A	MY46186322	2013.03.08	<input checked="" type="checkbox"/>
3	EMC Spectrum Analyzer	Agilent	E7405A	US40240203	2013.07.09	
4	EMI Test Receiver	Rohde&Schwarz	ESPI7	101206	2013.07.10	<input checked="" type="checkbox"/>
5	EMI Test Receiver	Rohde&Schwarz	ESHS10	862970/019	2013.07.09	<input checked="" type="checkbox"/>
6	Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	834549/011	2013.07.09	<input checked="" type="checkbox"/>
7	Pre-amplifier	HP	8447F	3113A05153	2013.07.10	<input checked="" type="checkbox"/>
8	Pre-amplifier	MITEQ	AFS44	1116321	2012.12.22	
9	Pre-amplifier	MITEQ	AFS44	1116322	2013.07.10	<input checked="" type="checkbox"/>
10	Power Meter	Agilent	E4417A	MY45100426	2013.07.10	
11	Power Meter	Agilent	E4418B	US39402176	2013.07.10	
12	Power Sensor	Agilent	E9327A	MY44420696	2013.07.10	
13	Power Sensor	Agilent	8482A	MY41094094	2013.07.10	
14	Attenuator (10dB)	HP	8491B	38072	2013.07.09	<input checked="" type="checkbox"/>
15	High Pass Filter	Wainwright	WHKX3.0/18G	8	2013.07.09	<input checked="" type="checkbox"/>
16	VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	2012.11.07	
17	UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	2012.11.07	
18	Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	2012.12.22	<input checked="" type="checkbox"/>
19	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	189	2013.05.31	<input checked="" type="checkbox"/>
20	Horn Antenna	AH Systems	SAS-200/571	304	N/A	
21	Horn Antenna	EMCO	3115	00040723	2013.05.31	
22	Horn Antenna	EMCO	3115	00056768	2013.09.06	<input checked="" type="checkbox"/>
23	Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170318	2013.09.28	<input checked="" type="checkbox"/>
24	Vector Signal Generator	Agilent	E4438C	MY42080359	2013.07.09	
25	PSG analog signal generator	Agilent	E8257D-520	MY45141255	2013.07.10	
26	DC Power Supply	HP	6622A	3348A03223	2013.07.10	
27	DC Power Supply	HP	6633A	3325A04972	2013.07.10	
28	Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	2013.07.18	<input checked="" type="checkbox"/>
29	Temperature/Humidity Chamber	All Three	ATM-50M	20030425	2013.03.07	
30	Temperature/Humidity Chamber	DAEJIN	DJ-THC02	06071	2013.03.08	

## 2.3 Test Date

Date of Test: September 3, 2012 ~ September 21, 2012

## 2.4 Test Environment

See each test item's description.



### 3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

#### 3.1 Rating and Physical Characteristics

Power source	Two battery packs (7.4 V)
Transmit Frequency	(a) Bluetooth*: 2402 MHz ~ 2480 MHz (b) WLAN IEEE 802.11b: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11g: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11n HT20: 2412 MHz ~ 2462 MHz (11 channels) IEEE 802.11n HT40: 2422 MHz ~ 2452 MHz (7 channels)
X-tal or Oscillator	XTAL: 32.768 kHz, 14.318 MHz, 20 MHz and 25 MHz, (WLAN module) 40 MHz
Antenna Type	Common antenna for Bluetooth and WLAN (PCB antenna, peak gain: 0.76 dBi)
Type of Modulation	(a) Bluetooth*: FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK) (b) WLAN IEEE 802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE 802.11g/n HT20/40: OFDM(64QAM, 16QAM, QPSK, BPSK)
RF Output power	22.83 dBm PEAK (measured)
External Ports **	DC input(DC 19 V from AC adapter), earphone, USB, SD/MMC, and Docking station

\* The test report for the transmitter portion of Bluetooth was issued with other test report number.

\*\* The test report for the compliance with FCC Part 15B as a digital device was issued with other test report number.

#### 3.2 Equipment Modifications

None

#### 3.3 Submitted Documents

Block diagram

Schematic diagram

Antenna Specification

Part List

User manual



## 4. MEASUREMENT CONDITIONS

### 4.1 Description of test configuration

The measurements were taken in TEST MODE provided by the applicant for controlling the EUT.

- Test software installed in the EUT: DRTU- Diagnostics and Regulatory Testing Utility
- Software version (driver version): 8.0.50727.42
- Software manufacturer: Intel Corporation
- Power mode: set to the maximum power output, refer to the table on the page of 9 in this report

### 4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
Keyboard	YET FOUNDATION LTD.	SK-8825	02146924
Mouse	DONGGUAN PRIMAX ELECTRONICS LTD	MO28UOL	44X 4966 077
Head set	CAMAC	CMK-500MV	N/A

### 4.3 Type of Used Cables

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	EUT	USB	Mouse	USB	1.2	NO
2	EUT	USB	Keyboard	USB	1.5	NO
3	EUT	earphone	Keyboard	earphone	1.7	NO

### 4.4 Uncertainty

Measurement Item	Combined Standard Uncertainty $U_c$	Expanded Uncertainty $U = kU_c (k = 2)$
Conducted RF power	$\pm 1.49$ dB	$\pm 2.98$ dB
Radiated disturbance	$\pm 2.30$ dB	$\pm 4.60$ dB
Conducted disturbance	$\pm 1.96$ dB	$\pm 3.92$ dB



## 5. TEST AND MEASUREMENTS

### Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
6dB Bandwidth	15.247(a)(2)	5.3	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	5.4	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.5	PASS
Peak Power Spectral Density	15.247(e)	5.6	PASS
AC power line Conducted emissions	15.207(a)	5.7	PASS
RF Exposure	15.247(i), 1.1307(b)(1)	5.8	PASS

### 5.1 ANTENNA REQUIREMENT

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.1.2 Result:

**PASS**

The transmitter has an integral PCB antenna. The directional gain of the antenna is 0.76 dBi.



## 5.2 Test Configuration of Equipment Under Test

### Pre-Scanned RF Power

Preliminary tests were performed in different data rate as below table and the highest power data rates (11b, 11g, 11g/n (BW 20MHz), 11g/n (BW 40MHz) modes) were chosen for full test in the following sections to demonstrate compliance to the limits.

The Gain control in the test software was set to the below table as the maximum power output.

	802.11b	802.11g	802.11nHT20	802.11nHT40
2412 MHz	20	25	22.5	20
2437 MHz	20	25	25.5	23
2462 MHz	20	22	22	-
2452 MHz	-	-	-	20

Measured peak power (dBm) operating 802.11b mode

	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
2412 MHz	16.66	16.91	18.36	<b>19.71</b>
2437 MHz	17.14	17.32	18.88	<b>20.33</b>
2462 MHz	16.90	17.28	18.71	<b>20.06</b>

Measured peak power (dBm) operating 802.11g mode

	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
2412 MHz	19.60	19.48	19.81	19.54	20.19	19.89	19.81	<b>20.31</b>
2437 MHz	22.49	22.80	22.80	22.57	22.81	22.82	21.71	<b>22.83</b>
2462 MHz	19.86	19.94	20.12	20.21	20.23	20.08	20.44	<b>20.47</b>

Measured peak power (dBm) operating 802.11n(HT20) mode

	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
2412 MHz	19.50	19.39	19.46	19.46	19.33	19.47	19.23	<b>19.51</b>
2437 MHz	21.94	21.93	21.95	22.20	22.54	21.78	19.98	<b>22.62</b>
2462 MHz	19.41	19.67	19.57	19.73	19.95	19.98	20.10	<b>20.28</b>

Measured peak power (dBm) operating 802.11n(HT40) mode

	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
2412 MHz	18.64	18.59	19.05	18.76	18.90	19.00	18.37	<b>19.10</b>
2437 MHz	21.11	21.12	20.67	20.87	21.84	20.98	19.48	<b>22.03</b>
2452 MHz	21.26	21.34	21.19	21.40	22.66	21.55	20.10	<b>22.81</b>



## 5.3 6dB BANDWIDTH

### 5.3.1 Regulation

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

### 5.3.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Set the spectrum analyzer as follows:
  - 1) Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
  - 2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
  - 3) Detector = Peak.
  - 4) Trace mode = max hold.
  - 5) Sweep = auto couple.
  - 6) Allow the trace to stabilize.
  - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

### 5.3.3 Test Results:

**PASS**

**Table 1: Measured values of the 6 dB Bandwidth**


Modulation	Operating frequency	Transfer Rate	Occupied Bandwidth (99%)	6dB Bandwidth	Limit
802.11b	2412 MHz	11 Mbps	12.52 MHz	10.19 MHz	$\geq 500$ kHz
	2437 MHz	11 Mbps	12.98 MHz	11.07 MHz	$\geq 500$ kHz
	2462 MHz	11 Mbps	12.51 MHz	10.10 MHz	$\geq 500$ kHz
802.11g	2412 MHz	54 Mbps	16.38 MHz	16.05 MHz	$\geq 500$ kHz
	2437 MHz	54 Mbps	16.41 MHz	16.02 MHz	$\geq 500$ kHz
	2462 MHz	54 Mbps	16.40 MHz	16.20 MHz	$\geq 500$ kHz
802.11n HT20	2412 MHz	MCS 7	17.53 MHz	17.04 MHz	$\geq 500$ kHz
	2437 MHz	MCS 7	17.54 MHz	17.13 MHz	$\geq 500$ kHz
	2462 MHz	MCS 7	17.53 MHz	17.25 MHz	$\geq 500$ kHz
802.11n HT40	2422 MHz	MCS 7	36.06 MHz	35.86 MHz	$\geq 500$ kHz
	2437 MHz	MCS 7	36.04 MHz	35.96 MHz	$\geq 500$ kHz
	2452 MHz	MCS 7	36.02 MHz	35.68 MHz	$\geq 500$ kHz



### Figure 1. Plot of the 6dB Bandwidth


#### 802.11b mode:

Lowest Channel (2412 MHz)

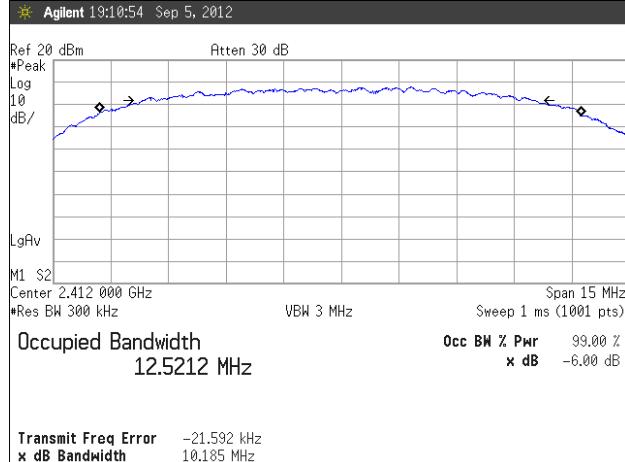


#### 802.11g mode:


Lowest Channel (2412 MHz)

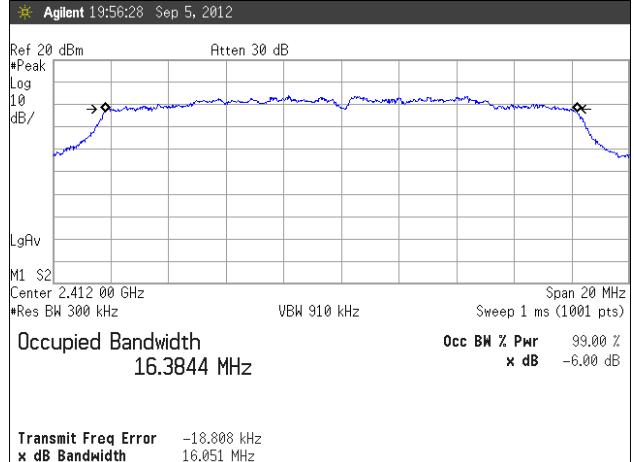


Middle Channel (2437 MHz)

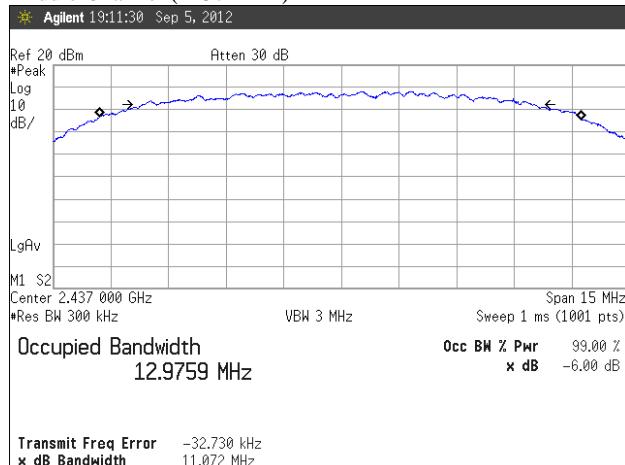


Middle Channel (2437 MHz)

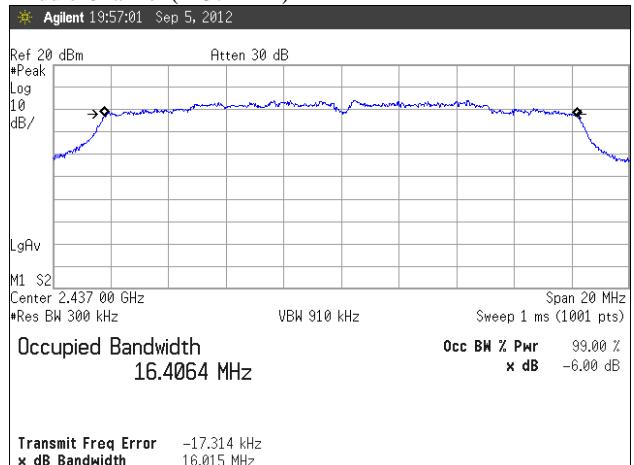

Highest Channel (2462 MHz)

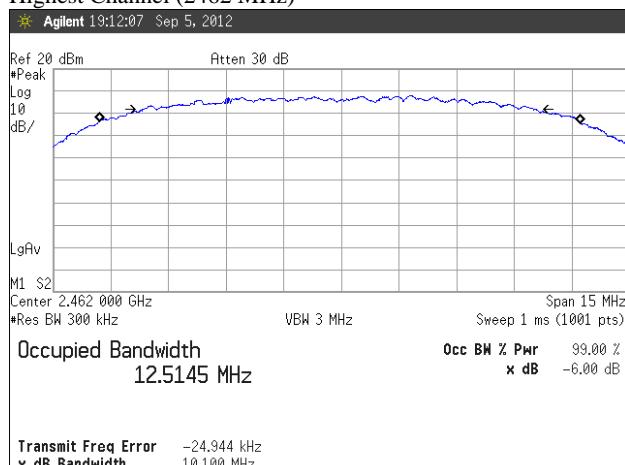

Highest Channel (2462 MHz)

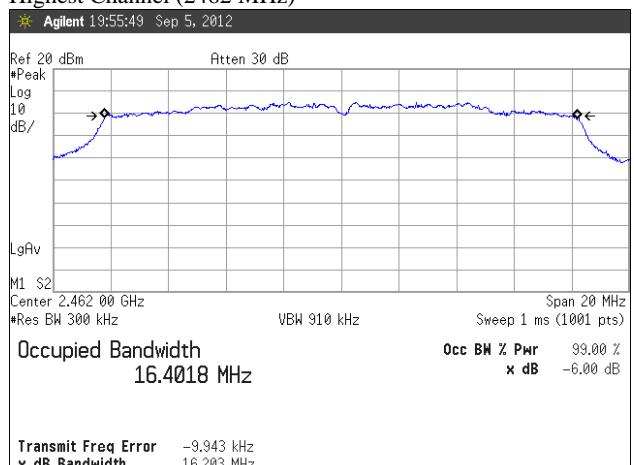




### Figure 1. Plot of the 6dB Bandwidth & Occupied Bandwidth (99%) (continued)


#### 802.11n HT20 mode:

##### Lowest Channel (2412 MHz)

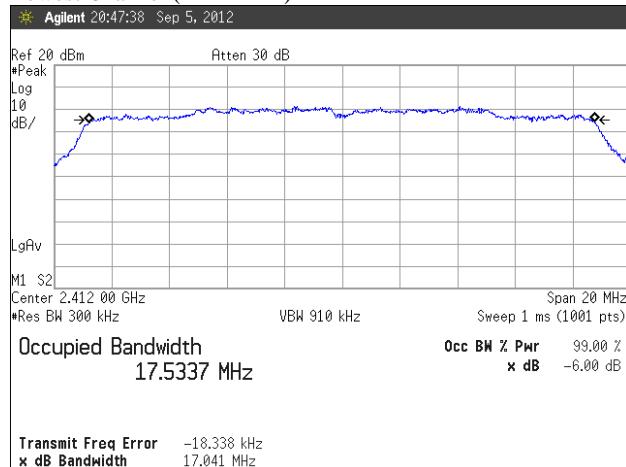


#### 802.11n HT40 mode:


##### Lowest Channel (2422 MHz)

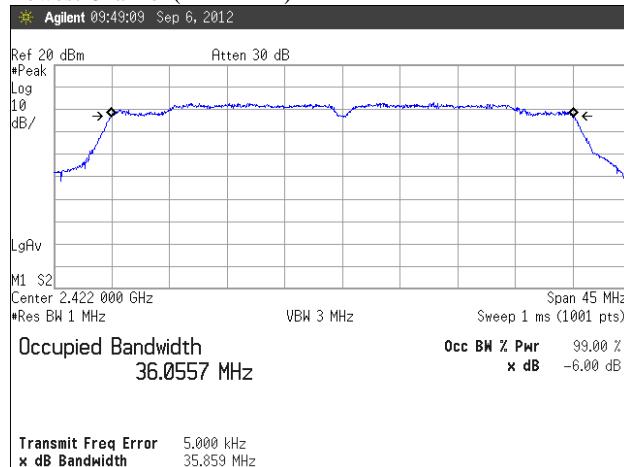


##### Middle Channel (2437 MHz)

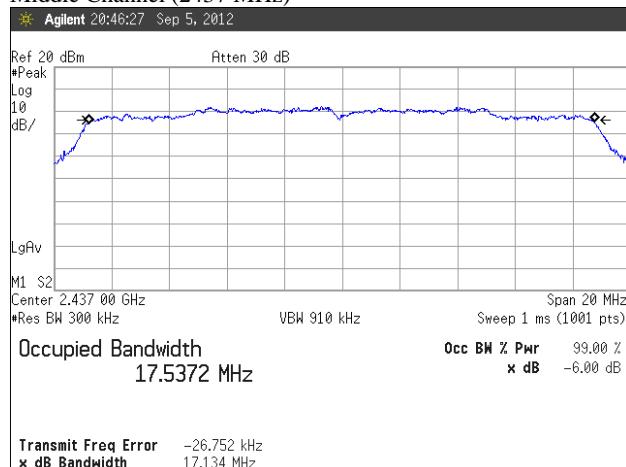


##### Middle Channel (2437 MHz)

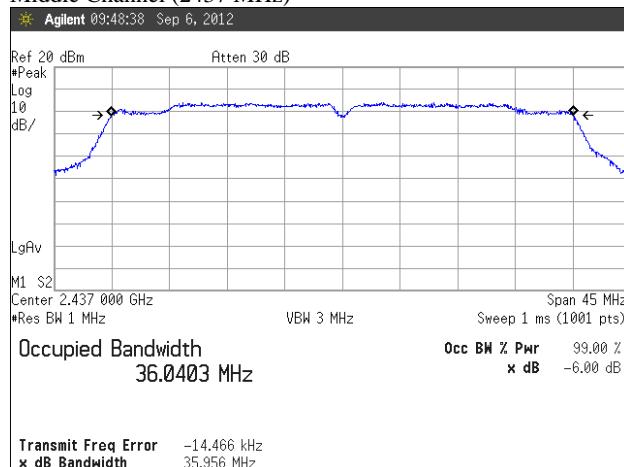

##### Highest Channel (2462 MHz)

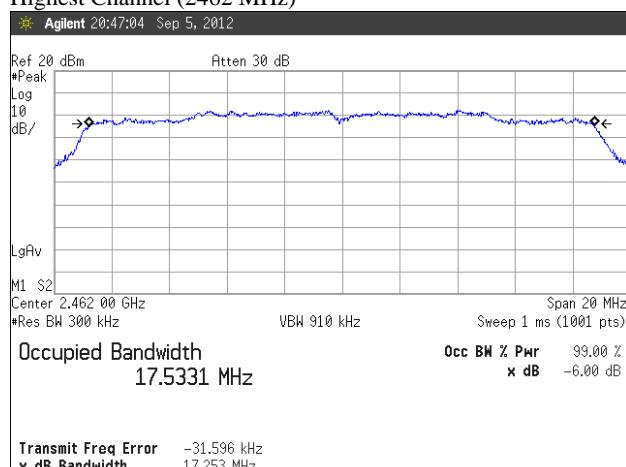

##### Highest Channel (2452 MHz)

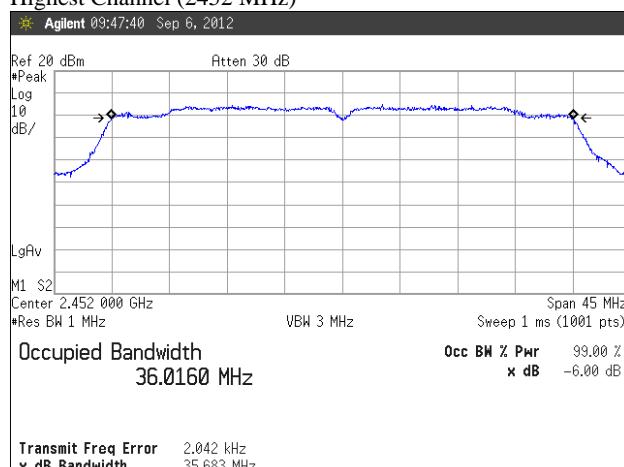



## 5.4 MAXIMUM PEAK OUTPUT POWER

### 5.4.1 Regulation

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.4.2 Test Procedure(Measurement Procedure PK2)

1. Integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band.

### 5.4.3 Test Results:

PASS

**Table 2: Measured values of the Maximum Peak Conducted Output Power**

Modulation	Operating Frequency	Transfer Rate	Peak Power		Average Power* [dBm]	Limit
			[dBm]	W		
802.11b	2412 MHz	11 Mbps	19.71	0.094	13.56	1 W
	2437 MHz		20.33	0.108	13.78	1 W
	2462 MHz		20.06	0.101	13.73	1 W
802.11g	2412 MHz	54 Mbps	20.31	0.107	10.61	1 W
	2437 MHz		22.83	0.192	10.82	1 W
	2462 MHz		20.47	0.111	11.55	1 W
802.11n HT20	2412 MHz	MCS 7	19.51	0.089	8.54	1 W
	2437 MHz		22.62	0.183	9.36	1 W
	2462 MHz		20.28	0.107	9.58	1 W
802.11n HT40	2422 MHz	MCS 7	19.10	0.081	7.68	1 W
	2437 MHz		22.03	0.160	8.59	1 W
	2452 MHz		22.81	0.191	9.10	1 W


The Average power were measured using AVG 1 method as the reference only.



## Figure 2. Plot of the Maximum Peak Conducted Output Power


### 802.11b mode:

Lowest Channel (2412 MHz)

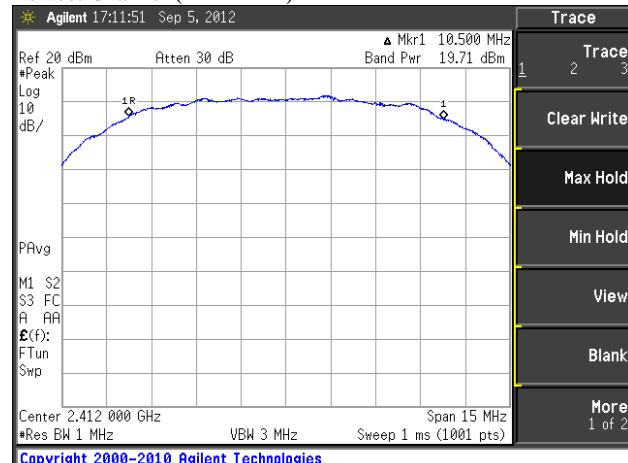


### 802.11g mode:


Lowest Channel (2412 MHz)

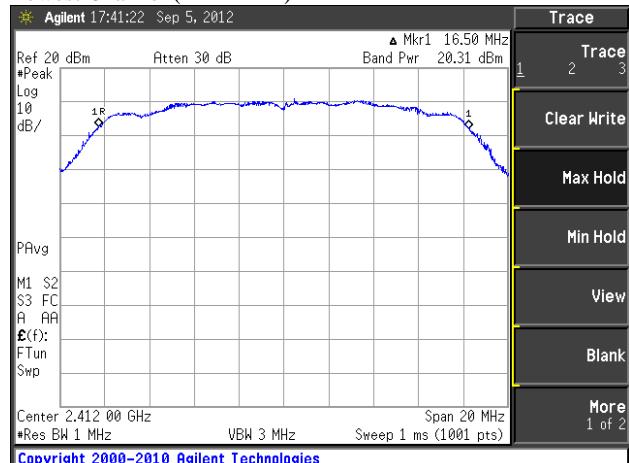


Middle Channel (2437 MHz)

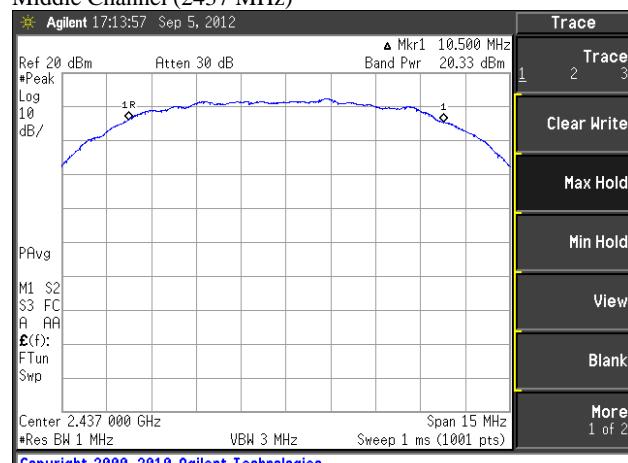


Middle Channel (2437 MHz)

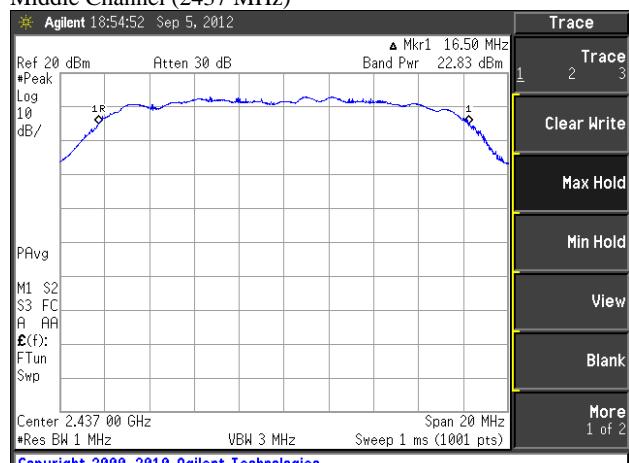

Highest Channel (2462 MHz)

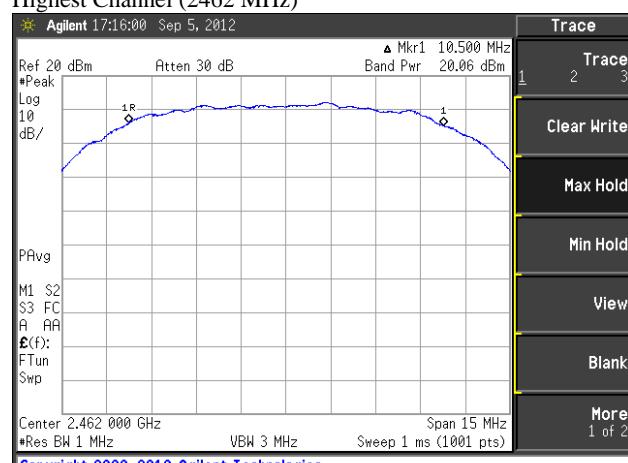

Highest Channel (2462 MHz)

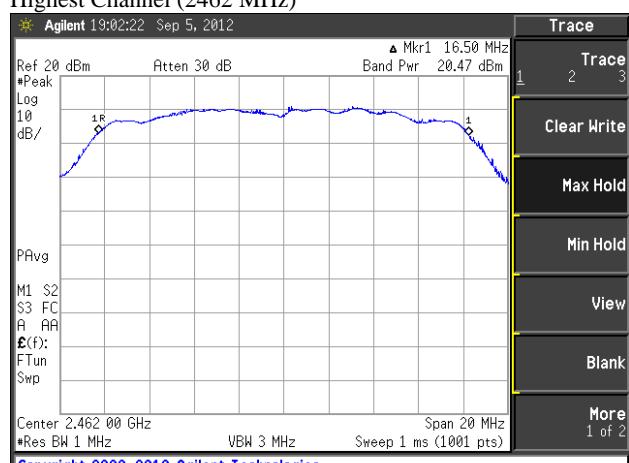




### Figure 2. Plot of the Maximum Peak Conducted Output Power (continued)


#### 802.11n HT20 mode:

Lowest Channel (2412 MHz)

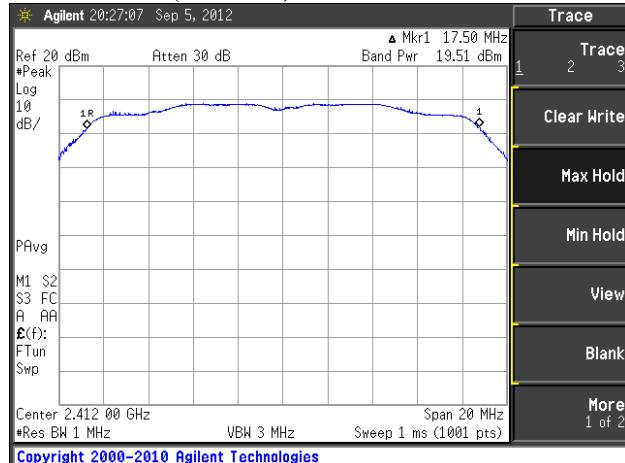


#### 802.11n HT40 mode:


Lowest Channel (2422 MHz)

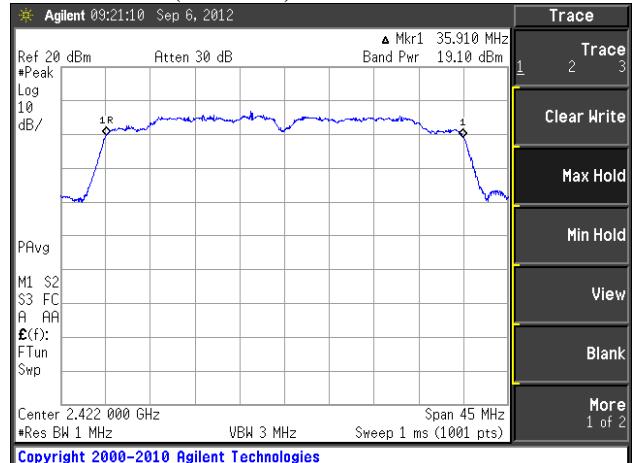


Middle Channel (2437 MHz)

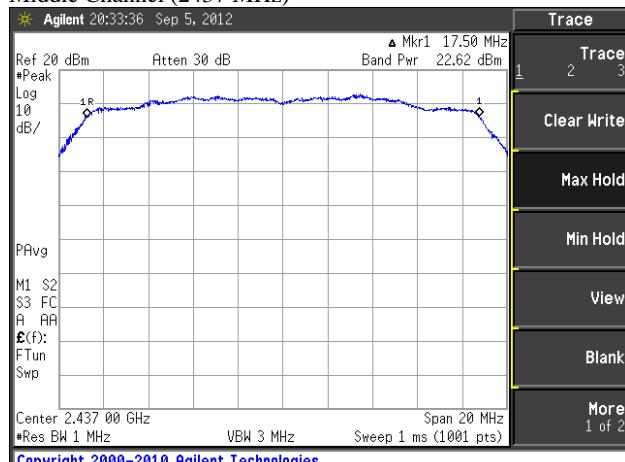


Middle Channel (2437 MHz)

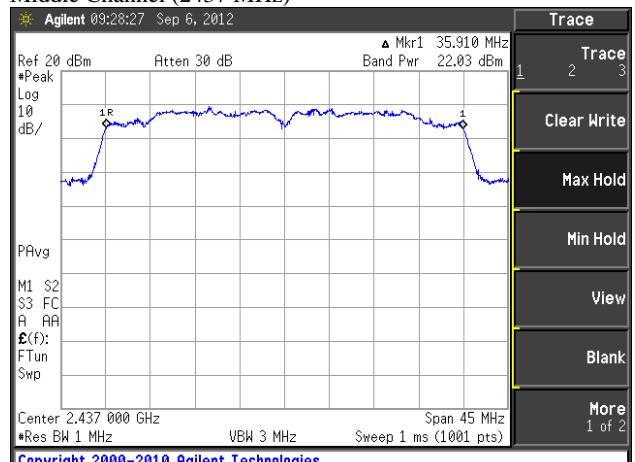

Highest Channel (2462 MHz)

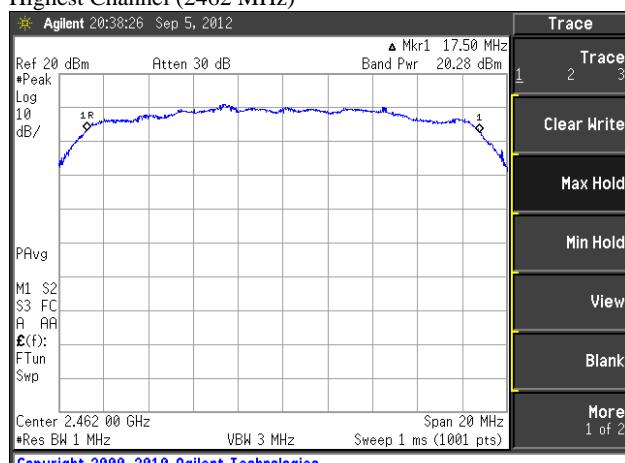

Highest Channel (2452 MHz)

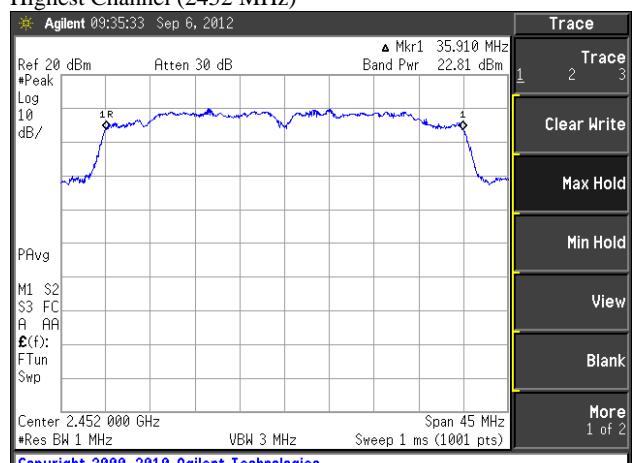



## 5.5 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

### 5.5.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength ( $\mu$ V/m @ 3m)	Field strength (dB $\mu$ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

\*\* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

### 5.5.2 Test Procedure

#### 1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters for above 30 MHz, and at 1 meter / 3 meter distance for below 30 MHz.
2. The EUT was placed on the top of the 0.8-meter height, 1  $\times$  1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4  $\times$  4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.



### 5.5.3 Test Results:

PASS

**Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 3 and 4. Spurious RF conducted emissions were shown in the Figure 5.**

*NOTE 1: for conducted measurement, we took the insertion loss of the cable loss into consideration within the measuring instrument. And for radiated measurement, the results were calibrated to the field strength within the measuring instrument.*

**NOTE 2:** The preliminary radiated measurements were performed in the anechoic chamber in order to find the frequency, which falls in the restricted bands as defined in Section 15.205, and the results for the final measurements were indicated in the Table 5.

**Table 3: Measured values of the Field strength of spurious emission (Radiated)**

## **BELOW 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	[dB(1/m)]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]

## Average/Peak/Quasi-peak data, emissions below (9 kHz ~ 30 MHz)

*No Spurious Radiated Emissions Found*

## Quasi-peak data, emissions below 1000 MHz (802.11 b/g/n HT20/HT40 mode)

**Margin (dB) = Limit – Actual**

[Actual = Reading -Amp Gain + Attenuator + AF + CL]

1. H ≡ Horizontal, V ≡ Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

\* The spurious emission at the frequency does not fall in the restricted bands.

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	dB(1/m)	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
<b>AVERAGE data, emissions above 1000 MHz</b>												
2410.8	1000	H	1.36	247	-	39.92	10.15	28.07	6.52	98.25	Not applicable (802.11b signals)	
2413.2	1000	V	1.32	245	-	39.92	10.15	28.08	6.52	95.59		
2463.3	1000	H	1.29	251	-	39.97	10.14	28.26	6.59	97.68		
2461.3	1000	V	1.26	249	-	39.96	10.14	28.26	6.59	93.50		
2390.0	1000	H	1.36	247	-	39.90	10.15	27.99	6.48	44.69	54.00	9.31
2390.0	1000	V	1.26	249	-	39.90	10.15	27.99	6.48	44.17	54.00	9.83
2483.6	1000	H	1.29	251	-	39.98	10.14	28.34	6.62	46.14	54.00	7.86
2483.6	1000	V	1.26	252	-	39.98	10.14	28.34	6.62	44.71	54.00	9.29
4825.0	1000	V	1.34	259	35.25	40.48	0.41	33.50	9.71	38.39	54.00	15.61
4825.0	1000	H	1.42	289	32.47	40.48	0.41	33.50	9.71	35.61	54.00	18.39
4925.3	1000	V	1.44	302	36.19	40.53	0.38	33.62	9.80	39.46	54.00	14.54
4925.3	1000	H	1.70	210	33.05	40.53	0.38	33.62	9.80	36.32	54.00	17.68
4945.1	1000	V	1.57	249	33.22	40.54	0.37	33.64	9.82	36.51	54.00	17.49
4945.1	1000	H	1.60	239	33.36	40.54	0.37	33.64	9.82	36.65	54.00	17.35
2410.8	1000	H	1.30	247	-	39.92	10.15	28.07	6.52	93.59	Not applicable (802.11g signals)	
2410.8	1000	V	1.26	243	-	39.92	10.15	28.07	6.52	92.43		
2460.8	1000	H	1.29	250	-	39.96	10.14	28.25	6.59	95.68		
2460.8	1000	V	1.26	242	-	39.96	10.14	28.25	6.59	92.12		
2390.0	1000	H	1.29	247	-	39.90	10.15	27.99	6.48	49.07	54.00	4.93
2390.0	1000	V	1.25	243	-	39.90	10.15	27.99	6.48	46.76	54.00	7.24
2483.6	1000	H	1.29	250	-	39.98	10.14	28.34	6.62	50.44	54.00	3.56
2483.6	1000	V	1.26	242	-	39.98	10.14	28.34	6.62	48.29	54.00	5.71
4825.1	1000	V	1.31	270	36.14	40.48	0.41	33.50	9.71	39.28	54.00	14.72
4825.1	1000	H	1.46	303	35.26	40.48	0.41	33.50	9.71	38.40	54.00	15.60
4925.3	1000	V	1.47	304	36.36	40.53	0.38	33.62	9.80	39.63	54.00	14.37
4925.3	1000	H	1.75	217	34.49	40.53	0.38	33.62	9.80	37.76	54.00	16.24
4945.2	1000	V	1.48	270	33.53	40.54	0.37	33.64	9.82	36.82	54.00	17.18
4945.2	1000	H	1.62	223	34.22	40.54	0.37	33.64	9.82	37.51	54.00	16.49

**Margin (dB) = Limit – Actual****[Actual = Reading – Amp Gain + Attenuator + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

*Remark 1. The measured value at the band-edge plots as shown Figure 4 included all the correction factors; those values are the final ('Actual') values.**2. "—" means the emission level was too low to be measured or in the noise floor.*

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	dB(1/m)	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
<b>PEAK data, emissions above 1000 MHz</b>												
2413.2	1000	H	1.36	247	-	39.92	10.15	28.07	6.52	106.56	Not applicable (802.11b signals)	
2413.2	1000	V	1.32	245	-	39.92	10.15	28.08	6.52	104.14		
2463.2	1000	H	1.29	251	-	39.97	10.14	28.26	6.59	105.95		
2463.2	1000	V	1.26	249	-	39.96	10.14	28.26	6.59	102.09		
2390.0	1000	H	1.36	247	-	39.90	10.15	27.99	6.48	60.13	74.00	13.87
2338.0	1000	V	1.26	249	-	39.90	10.15	27.99	6.48	59.76	74.00	14.24
2483.6	1000	H	1.29	251	-	39.98	10.14	28.34	6.62	58.17	74.00	15.83
2484.8	1000	V	1.26	252	-	39.98	10.14	28.34	6.62	58.20	74.00	15.80
4825.0	1000	V	1.32	269	43.04	40.48	0.41	33.50	9.71	46.18	74.00	27.82
4825.0	1000	H	1.47	299	40.28	40.48	0.41	33.50	9.71	43.42	74.00	30.58
4925.3	1000	V	1.46	300	44.16	40.53	0.38	33.62	9.80	47.43	74.00	26.57
4925.3	1000	H	1.76	214	41.10	40.53	0.38	33.62	9.80	44.37	74.00	29.63
4945.1	1000	V	1.55	270	41.09	40.54	0.37	33.64	9.82	44.38	74.00	29.62
4945.1	1000	H	1.63	233	38.42	40.54	0.37	33.64	9.82	41.71	74.00	32.29
2412.4	1000	H	1.30	247	-	39.92	10.15	28.07	6.52	105.29	Not applicable (802.11g signals)	
2414.8	1000	V	1.26	243	-	39.92	10.15	28.07	6.52	103.54		
2462.4	1000	H	1.29	250	-	39.96	10.14	28.25	6.59	107.41		
2462.4	1000	V	1.26	242	-	39.96	10.14	28.25	6.59	104.04		
2390.0	1000	H	1.29	247	-	39.90	10.15	27.99	6.48	68.55	74.00	5.45
2390.0	1000	V	1.25	243	-	39.90	10.15	27.99	6.48	65.19	74.00	8.81
2483.6	1000	H	1.29	250	-	39.98	10.14	28.34	6.62	66.15	74.00	7.85
2483.6	1000	V	1.26	242	-	39.98	10.14	28.34	6.62	65.57	74.00	8.43
4825.1	1000	V	1.32	271	42.26	40.48	0.41	33.50	9.71	45.40	74.00	28.60
4825.1	1000	H	1.47	300	43.38	40.48	0.41	33.50	9.71	46.52	74.00	27.48
4925.3	1000	V	1.46	300	44.07	40.53	0.38	33.62	9.80	47.34	74.00	26.66
4925.3	1000	H	1.76	214	41.21	40.53	0.38	33.62	9.80	44.48	74.00	29.52
4945.2	1000	V	1.50	271	41.61	40.54	0.37	33.64	9.82	44.90	74.00	29.10
4945.2	1000	H	1.60	203	40.92	40.54	0.37	33.64	9.82	44.21	74.00	29.79

**Margin (dB) = Limit – Actual****[Actual = Reading – Amp Gain + Attenuator + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

*Remark 1. The measured value at the band-edge plots as shown Figure 4 included all the correction factors; those values are the final ('Actual') values.**2. "—" means the emission level was too low to be measured or in the noise floor.*

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	[dB(1/m)]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
<b>AVERAGE data, emissions above 1000 MHz</b>												
2410.8	1000	H	1.36	246	-	39.92	10.15	28.07	6.52	91.48	Not applicable (802.11n HT20 signals)	
2414.4	1000	V	1.26	247	-	39.92	10.15	28.08	6.52	89.68		
2458.4	1000	H	1.35	250	-	39.96	10.14	28.25	6.58	93.13		
2460.8	1000	V	1.25	249	-	39.96	10.14	28.25	6.59	89.49		
2390.0	1000	H	1.36	246	-	39.90	10.15	27.99	6.48	47.63	54.00	6.37
2390.0	1000	V	1.26	247	-	39.90	10.15	27.99	6.48	45.50	54.00	8.50
2483.6	1000	H	1.35	250	-	39.98	10.14	28.34	6.62	48.29	54.00	5.71
2483.6	1000	V	1.25	249	-	39.98	10.14	28.34	6.62	46.69	54.00	7.31
4825.1	1000	V	1.30	270	33.51	40.48	0.41	33.50	9.71	36.65	54.00	17.35
4825.1	1000	H	1.45	289	34.08	40.48	0.41	33.50	9.71	37.22	54.00	16.78
4925.3	1000	V	1.47	302	35.62	40.53	0.38	33.62	9.80	38.89	54.00	15.11
4925.3	1000	H	1.73	217	32.09	40.53	0.38	33.62	9.80	35.36	54.00	18.64
4945.0	1000	V	1.55	270	33.42	40.54	0.37	33.64	9.82	36.71	54.00	17.29
4945.0	1000	H	1.64	249	32.94	40.54	0.37	33.64	9.82	36.23	54.00	17.77
2409.6	1000	H	1.36	245	-	48.18	10.29	28.32	6.51	86.36	Not applicable (802.11n HT40 signals)	
2419.6	1000	V	1.26	248	-	48.18	10.28	28.35	6.53	85.47		
2449.6	1000	H	1.35	251	-	48.19	10.28	28.40	6.56	84.15		
2449.6	1000	V	1.25	248	-	48.19	10.28	28.43	6.57	85.45		
2390.0	1000	H	1.36	245	-	48.18	10.29	28.27	6.48	52.51	54.00	1.49
2389.6	1000	V	1.26	248	-	48.18	10.29	28.27	6.48	50.13	54.00	3.87
2483.6	1000	H	1.35	250	-	48.20	10.28	28.52	6.62	49.03	54.00	4.97
2483.6	1000	V	1.25	248	-	48.20	10.28	28.52	6.62	50.00	54.00	4.00
4845.6	1000	V	1.40	290	34.08	40.49	0.40	33.53	9.73	37.25	54.00	16.75
4845.6	1000	H	1.43	230	32.61	40.49	0.40	33.53	9.73	35.78	54.00	18.22
4874.5	1000	V	1.62	310	33.07	40.50	0.39	33.56	9.75	36.27	54.00	17.73
4874.5	1000	H	1.80	325	32.41	40.50	0.39	33.56	9.75	35.61	54.00	18.39
4905.4	1000	V	1.39	202	32.15	40.52	0.38	33.59	9.78	35.38	54.00	18.62
4905.4	1000	H	1.61	196	33.26	40.52	0.38	33.59	9.78	36.49	54.00	17.51

**Margin (dB) = Limit – Actual****[Actual = Reading – Amp Gain + Attenuator + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

*Remark 1. The measured value at the band-edge plots as shown Figure 4 included all the correction factors; those values are the final ('Actual') values.**2. "—" means the emission level was too low to be measured or in the noise floor.*

**Table 3: Measured values of the Field strength of spurious emission (Radiated) (continued)****ABOVE 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	[dB(1/m)]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
<b>PEAK data, emissions above 1000 MHz</b>												
2411.2	1000	H	1.36	246	-	39.92	10.15	28.07	6.52	102.69	Not applicable (802.11n HT20 signals)	
2411.2	1000	V	1.26	247	-	39.92	10.15	28.07	6.52	100.84		
2461.2	1000	H	1.35	250	-	39.96	10.14	28.26	6.59	104.23		
2461.2	1000	V	1.25	249	-	39.96	10.14	28.26	6.59	100.86		
2390.0	1000	H	1.36	246	-	39.90	10.15	27.99	6.48	64.67	74.00	9.33
2390.0	1000	V	1.26	247	-	39.90	10.15	27.99	6.48	61.29	74.00	12.71
2483.6	1000	H	1.35	250	-	39.98	10.14	28.34	6.62	63.83	74.00	10.17
2483.6	1000	V	1.25	249	-	39.98	10.14	28.34	6.62	62.26	74.00	11.74
4825.1	1000	V	1.30	270	42.09	40.48	0.41	33.50	9.71	45.23	74.00	28.77
4825.1	1000	H	1.45	289	42.46	40.48	0.41	33.50	9.71	45.60	74.00	28.40
4925.3	1000	V	1.47	302	43.17	40.53	0.38	33.62	9.80	46.44	74.00	27.56
4925.3	1000	H	1.73	217	41.04	40.53	0.38	33.62	9.80	44.31	74.00	29.69
4945.0	1000	V	1.55	270	41.06	40.54	0.37	33.64	9.82	44.35	74.00	29.65
4945.0	1000	H	1.64	249	40.36	40.54	0.37	33.64	9.82	43.65	74.00	30.35
2412.4	1000	H	1.36	245	-	48.18	10.29	28.33	6.51	97.98	Not applicable (802.11n HT40 signals)	
2424.0	1000	V	1.26	248	-	48.18	10.28	28.35	6.53	96.62		
2442.4	1000	H	1.35	251	-	48.19	10.28	28.41	6.56	95.35		
2442.4	1000	V	1.25	248	-	48.19	10.28	28.43	6.57	96.72		
2390.0	1000	H	1.36	245	-	48.18	10.29	28.27	6.48	71.48	74.00	2.52
2390.0	1000	V	1.26	248	-	48.18	10.28	28.35	6.53	67.79	74.00	6.21
2483.6	1000	H	1.35	250	-	48.20	10.28	28.52	6.62	71.19	74.00	2.81
2483.6	1000	V	1.25	248	-	48.20	10.28	28.52	6.62	71.22	74.00	2.78
4845.6	1000	V	1.40	290	42.09	40.49	0.40	33.53	9.73	45.26	74.00	28.74
4845.6	1000	H	1.43	230	40.34	40.49	0.40	33.53	9.73	43.51	74.00	30.49
4874.5	1000	V	1.62	310	41.61	40.50	0.39	33.56	9.75	44.81	74.00	29.19
4874.5	1000	H	1.80	325	36.60	40.50	0.39	33.56	9.75	39.80	74.00	34.20
4905.4	1000	V	1.39	202	38.21	40.52	0.38	33.59	9.78	41.44	74.00	32.56
4905.4	1000	H	1.61	196	35.24	40.52	0.38	33.59	9.78	38.47	74.00	35.53

**Margin (dB) = Limit – Actual****[Actual = Reading – Amp Gain + Attenuator + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.


*Remark 1. The measured value at the band-edge plots as shown Figure 4 included all the correction factors; those values are the final ('Actual') values.**2. "—" means the emission level was too low to be measured or in the noise floor.*



### Figure 3. Plot of the Band Edge (Conducted)


#### 802.11b mode:

Lowest Channel (2412 MHz)

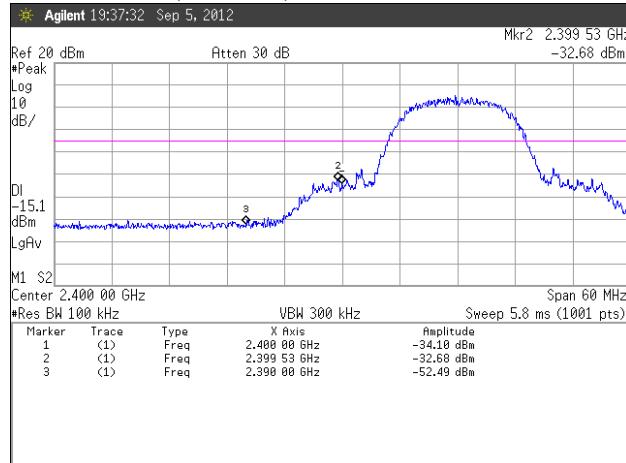


#### 802.11g mode:


Lowest Channel (2412 MHz)

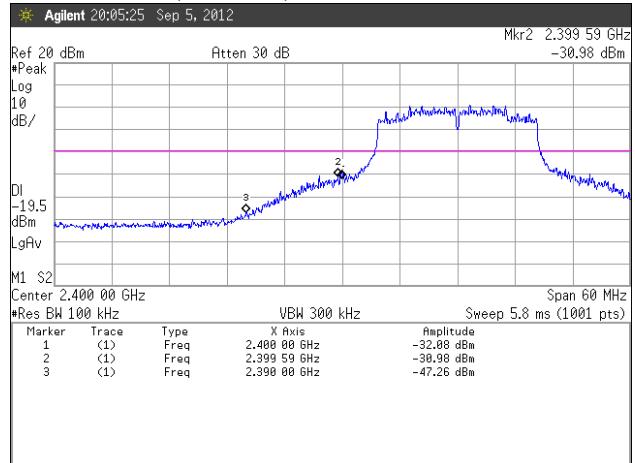

Highest Channel (2462 MHz)

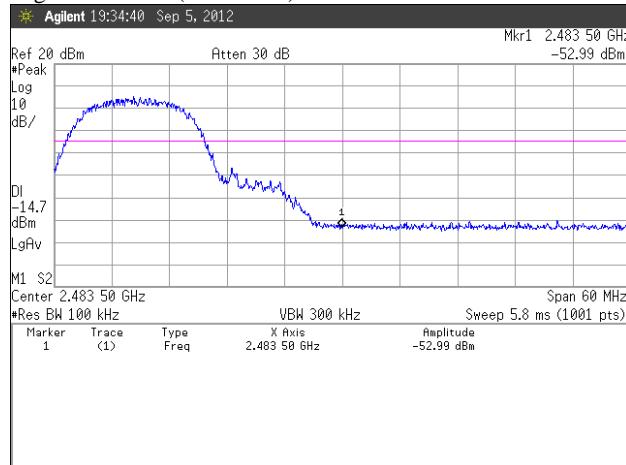

Highest Channel (2462 MHz)

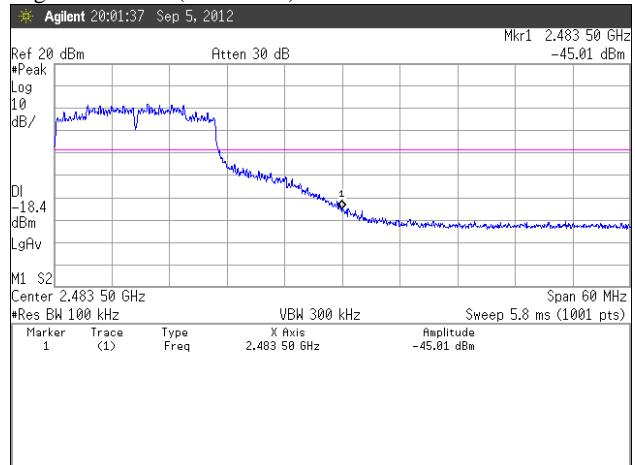




### Figure 3. Plot of the Band Edge (Conducted)


#### 802.11n HT20 mode:

Lowest Channel (2412 MHz)

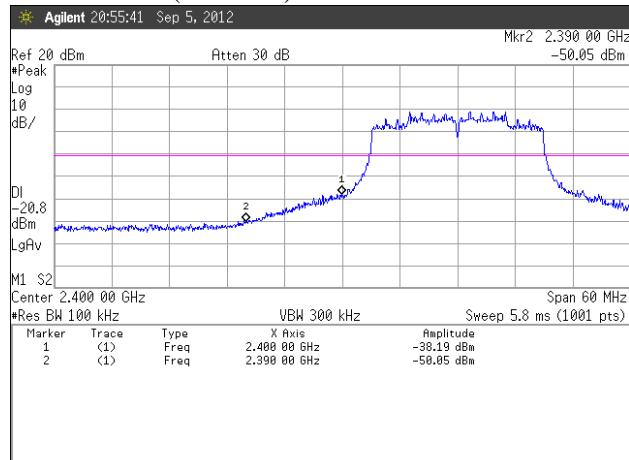


#### 802.11n HT40 mode:


Lowest Channel (2422 MHz)

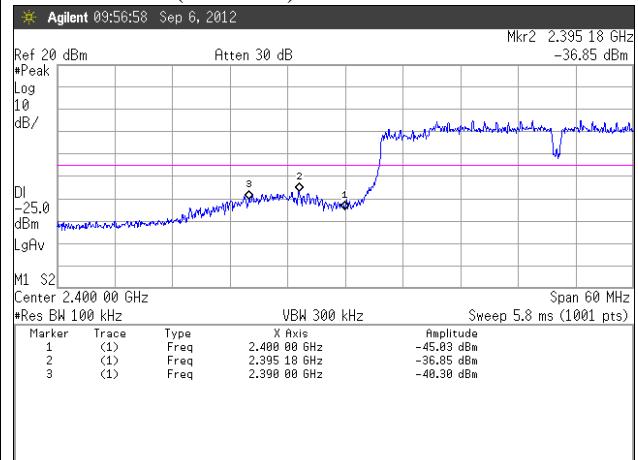

Highest Channel (2462 MHz)

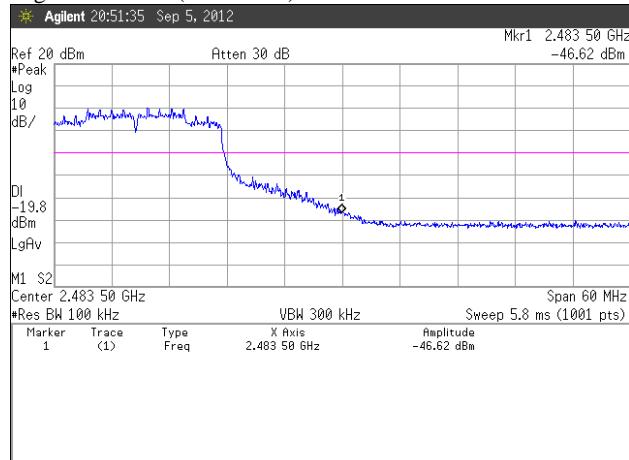

Highest Channel (2452 MHz)

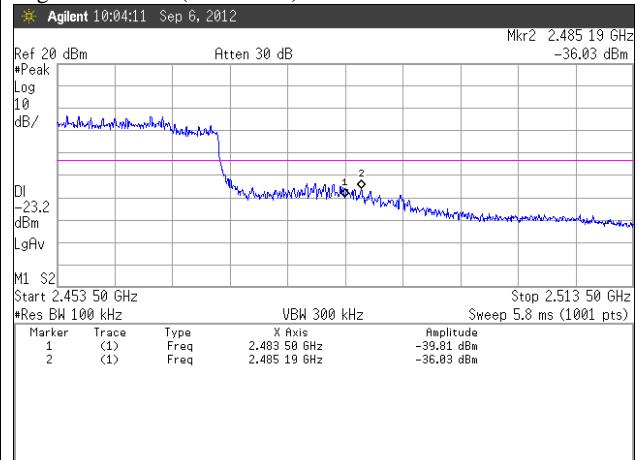




SK TECH CO., LTD.

Page 25 of 39

**Figure 4. Plot of the Band Edge (Radiated) 802.11b mode:**


### Lowest Channel (2412 MHz)

## Horizontal

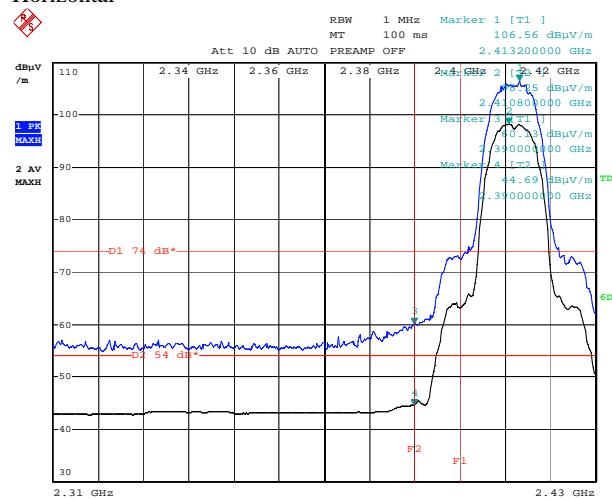


### Highest Channel (2462 MHz)

## Horizontal

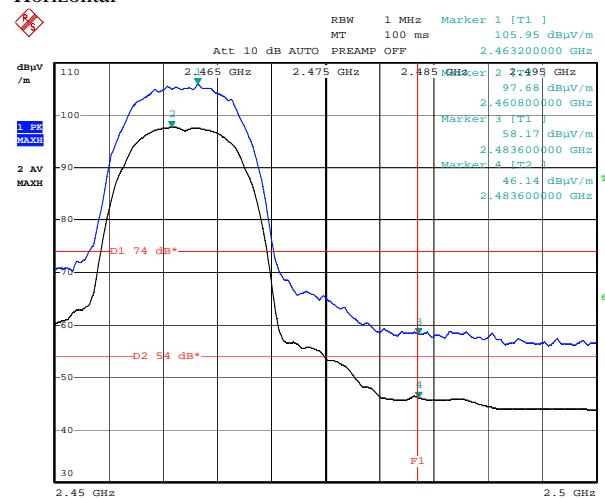


### Lowest Channel (2412 MHz)

## Vertical

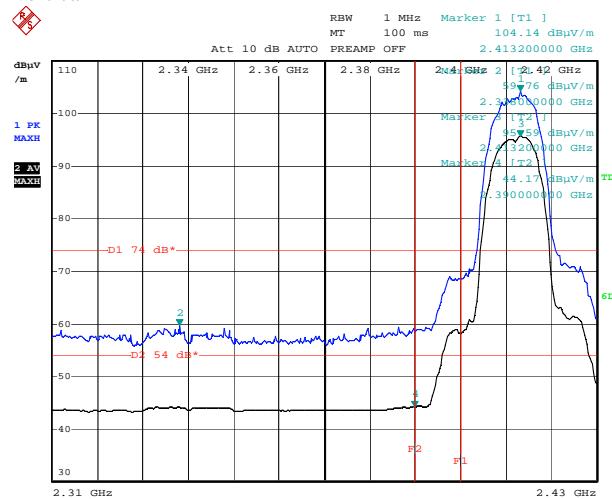

### Highest Channel (2462 MHz)

## Vertical

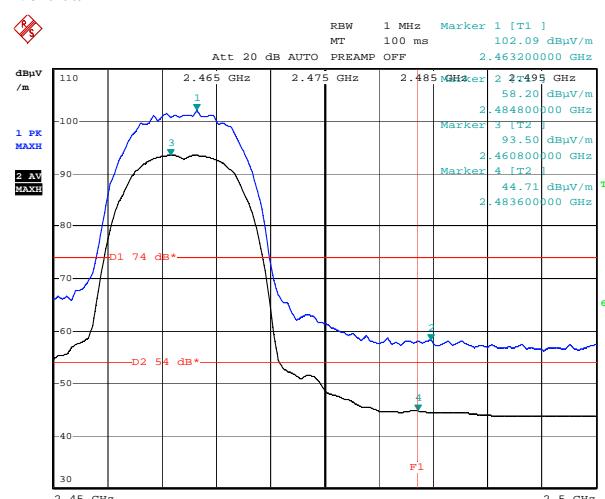




**Figure 4. Plot of the Band Edge (Radiated)  
802.11g mode:**


Lowest Channel (2412 MHz)

Horizontal

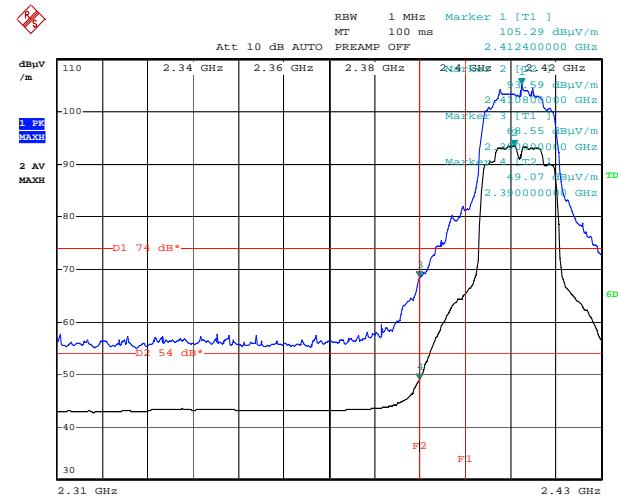


Highest Channel (2462 MHz)

Horizontal

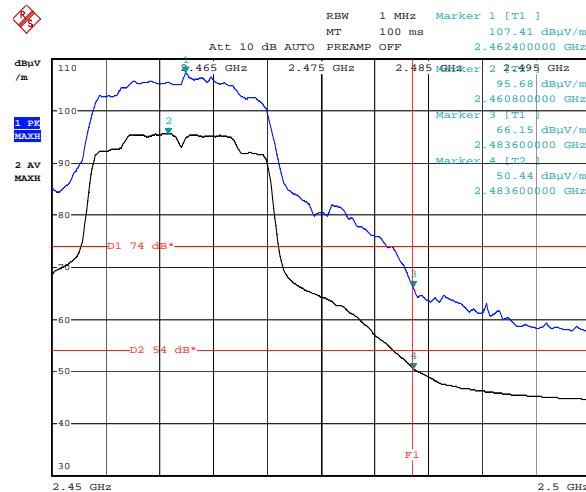

Lowest Channel (2412 MHz)

Vertical

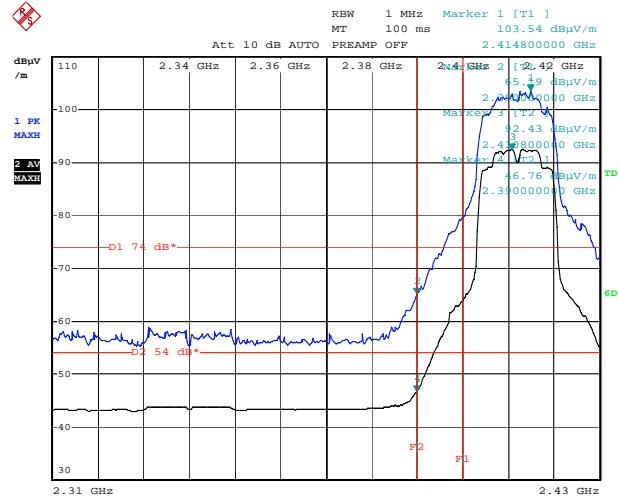

Highest Channel (2462 MHz)

Vertical






**Figure 4. Plot of the Band Edge (Radiated)  
802.11n HT20 mode:**


Lowest Channel (2412 MHz)

Horizontal

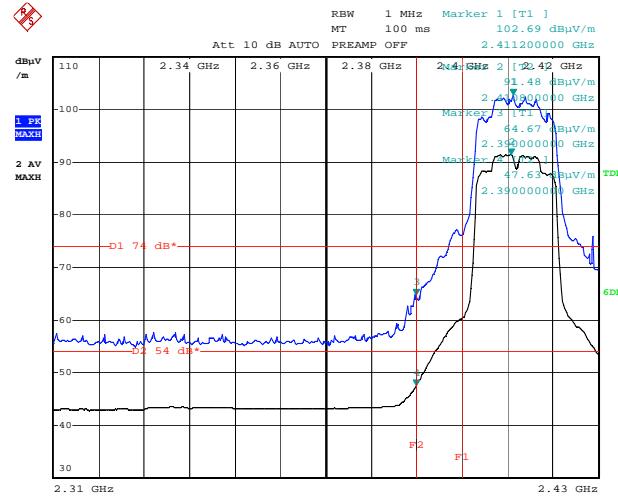


Highest Channel (2462 MHz)

Horizontal

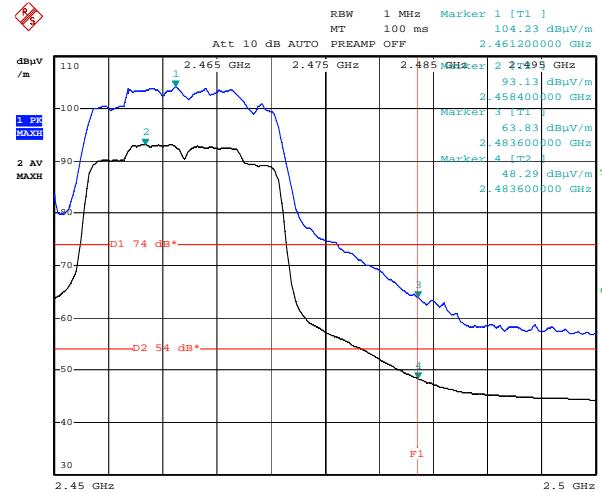


Lowest Channel (2412 MHz)

Vertical

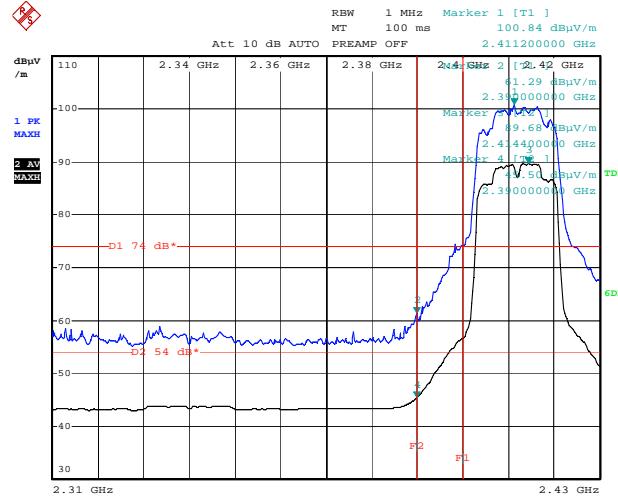

Highest Channel (2462 MHz)

Vertical

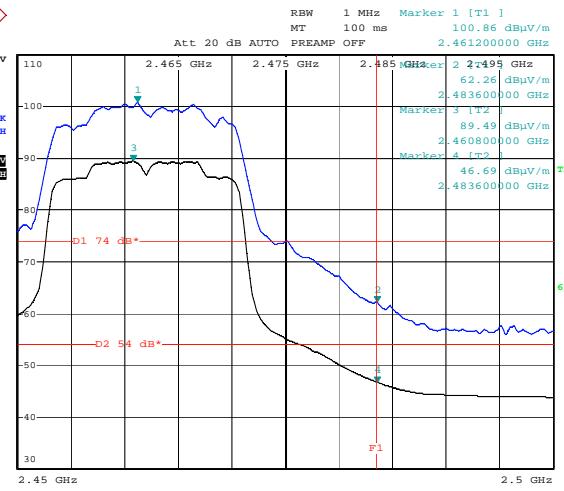




SK TECH CO., LTD.

Page 28 of 39

**Figure 4. Plot of the Band Edge (Radiated)  
802.11n HT40 mode:**


Lowest Channel (2422 MHz)

Horizontal

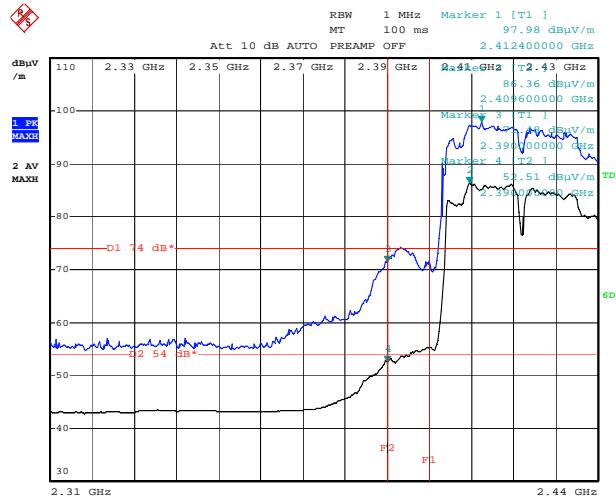


Highest Channel (2452 MHz)

Horizontal

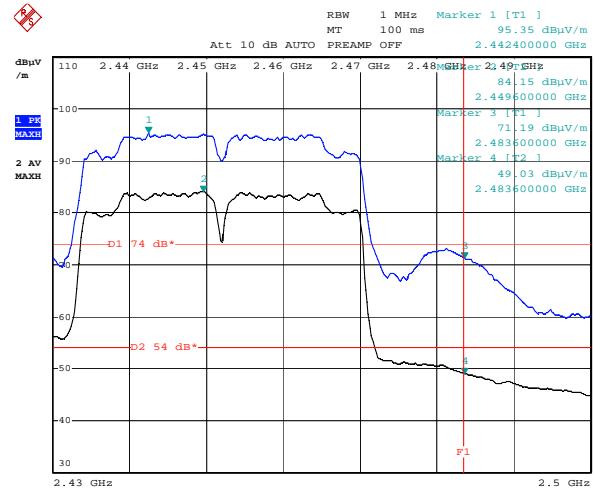


Lowest Channel (2422 MHz)

Vertical

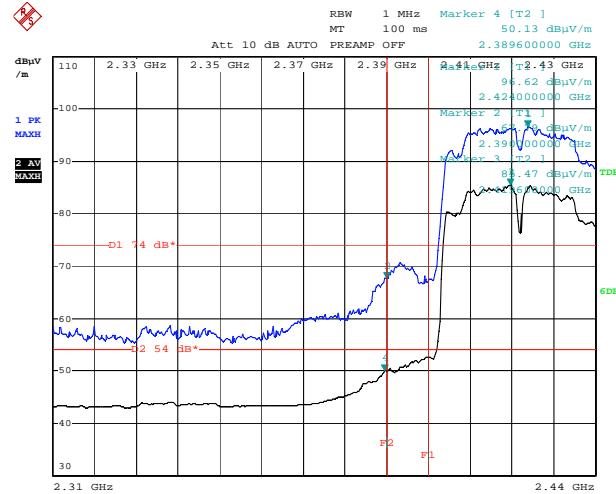

Highest Channel (2452 MHz)

Vertical

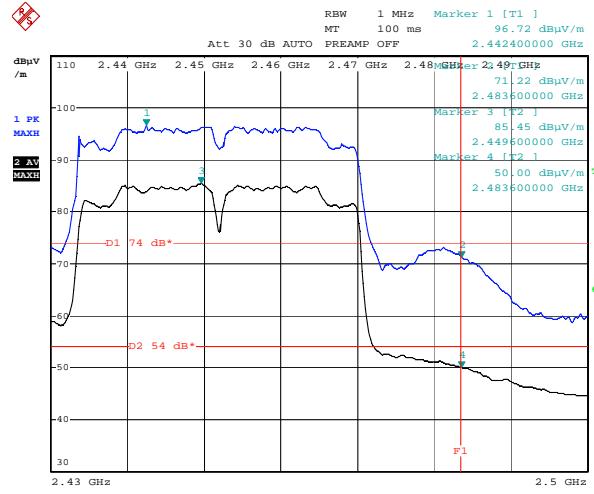





### Figure 5. Spurious RF conducted emissions

#### 802.11b mode:


Lowest Channel (2412 MHz): 30 MHz ~ 7 GHz

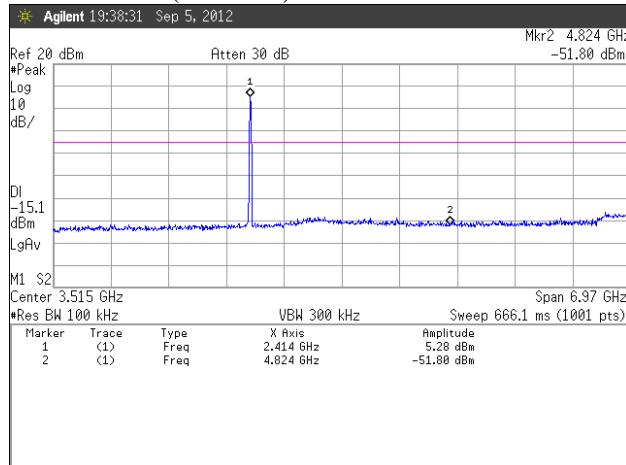


Lowest Channel (2412 MHz): 7 GHz ~ 25 GHz

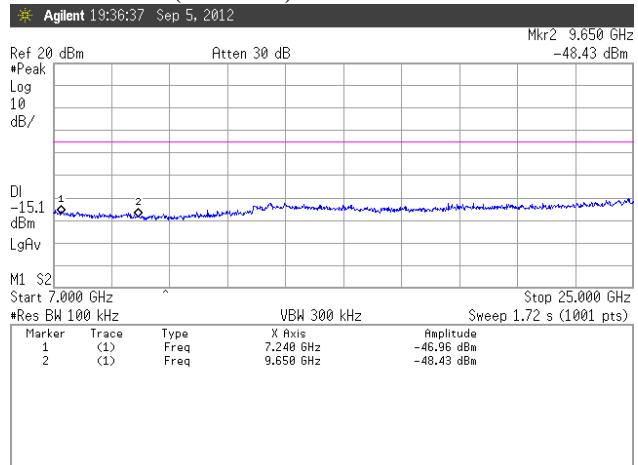


Middle Channel (2437 MHz): 30 MHz ~ 7 GHz

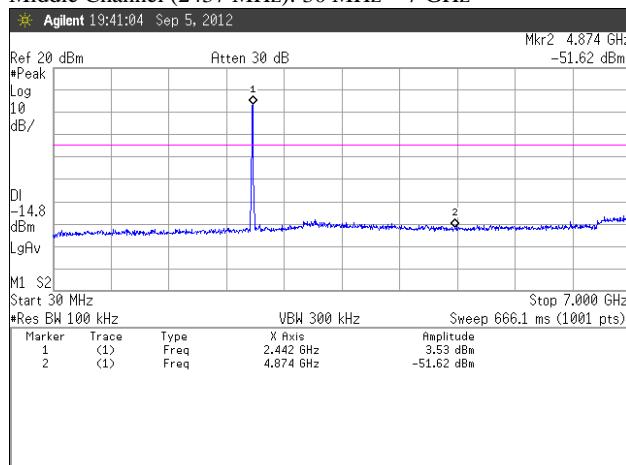


Middle Channel (2437 MHz): 7 GHz ~ 25 GHz

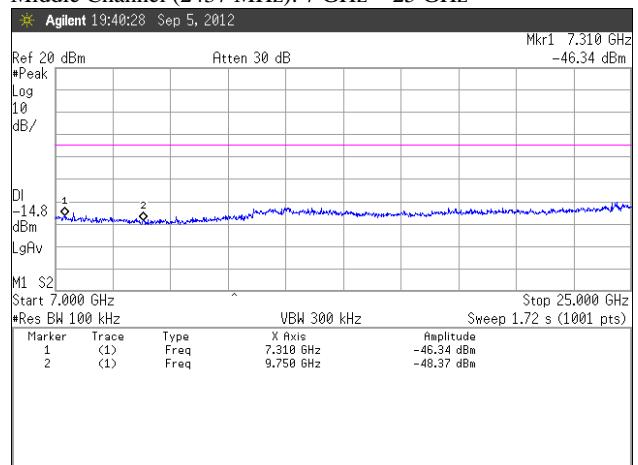

Highest Channel (2462 MHz): 30 MHz ~ 7 GHz

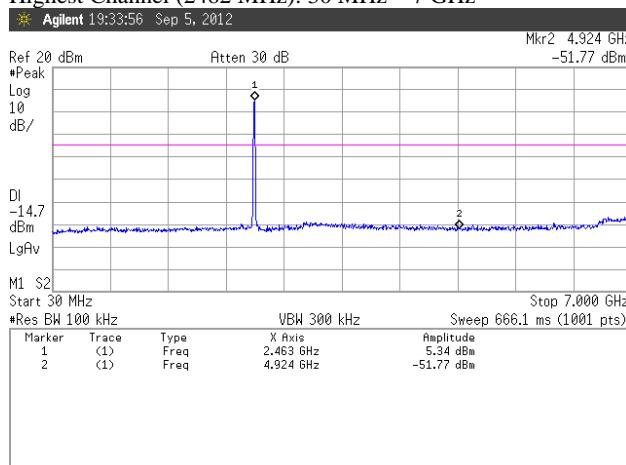

Highest Channel (2462 MHz): 7 GHz ~ 25 GHz

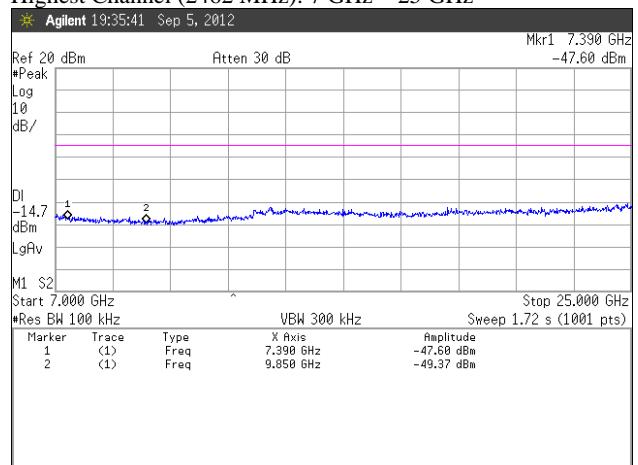




SK TECH CO., LTD.

Page 30 of 39


### Figure 5. Spurious RF conducted emissions (continued)

#### 802.11g mode:


Lowest Channel (2412 MHz): 30 MHz ~ 7 GHz

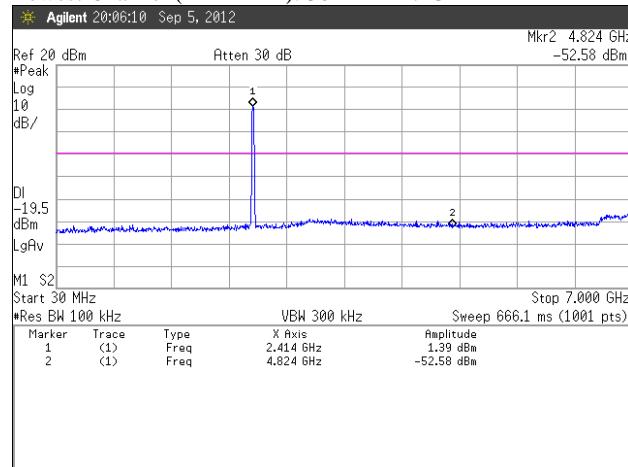


Lowest Channel (2412 MHz): 7 GHz ~ 25 GHz

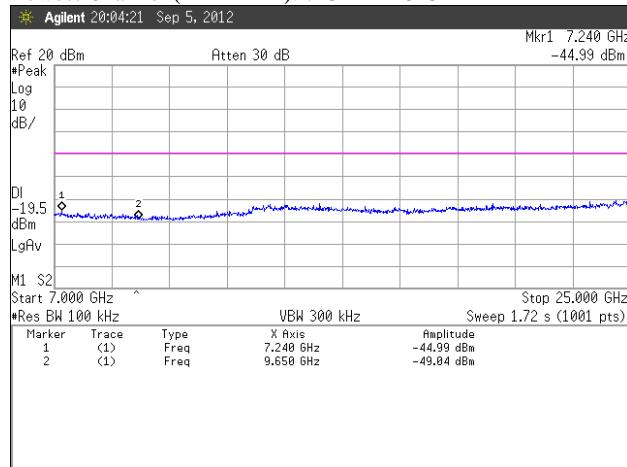


Middle Channel (2437 MHz): 30 MHz ~ 7 GHz

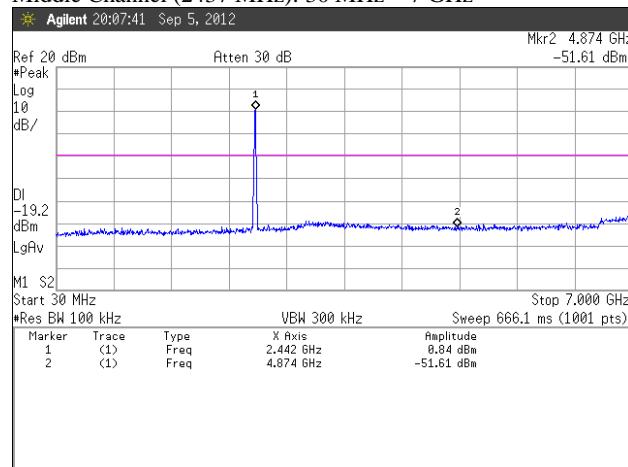


Middle Channel (2437 MHz): 7 GHz ~ 25 GHz






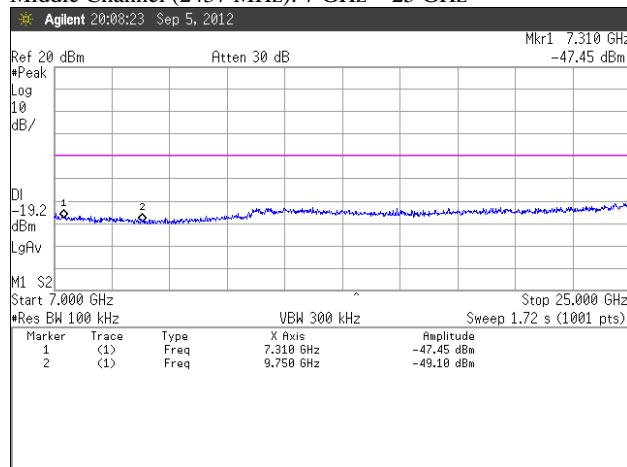


Highest Channel (2462 MHz): 30 MHz ~ 7 GHz

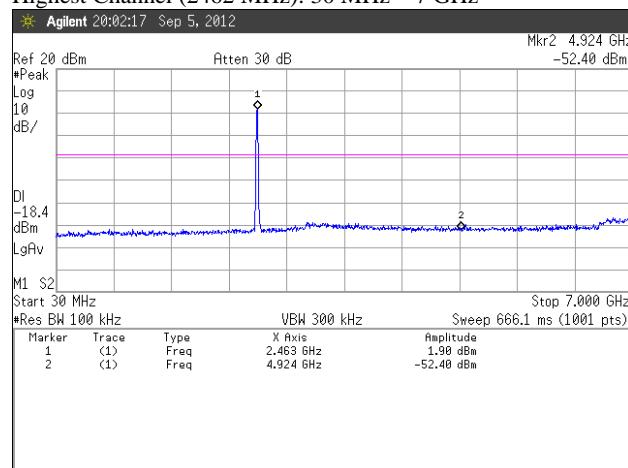

Highest Channel (2462 MHz): 7 GHz ~ 25 GHz

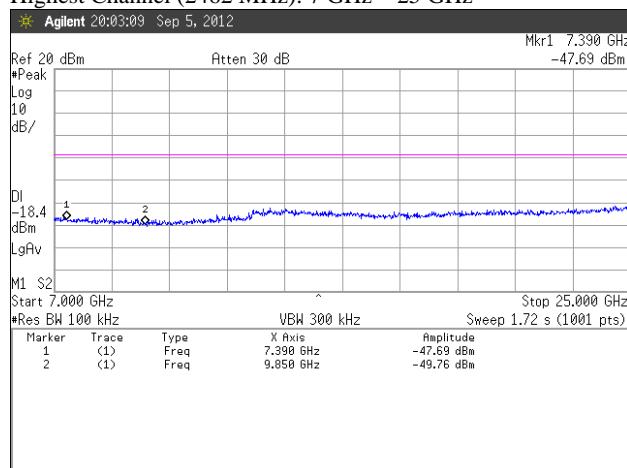

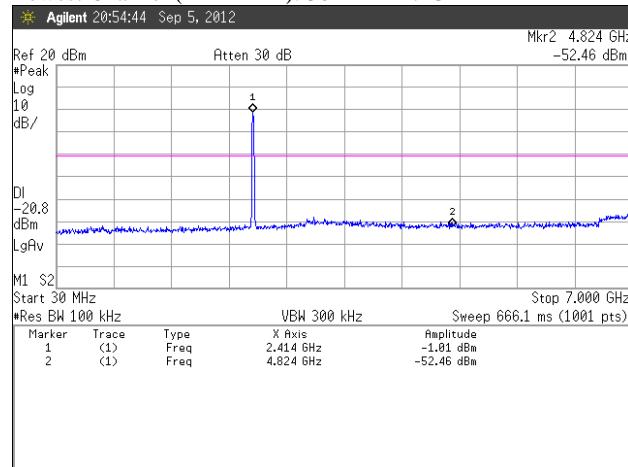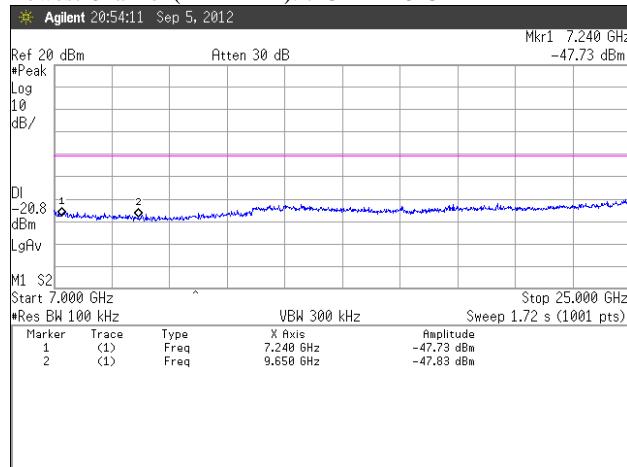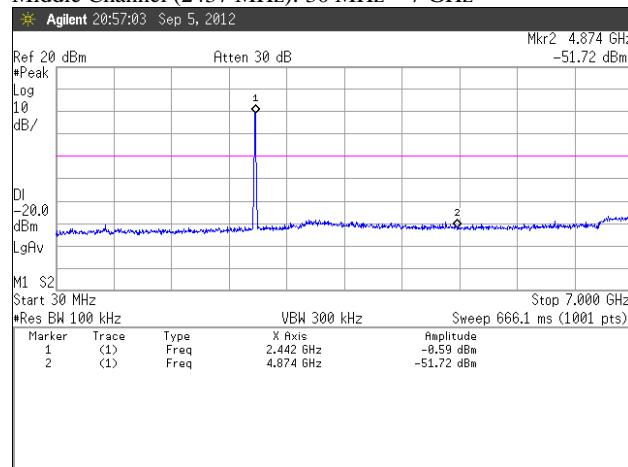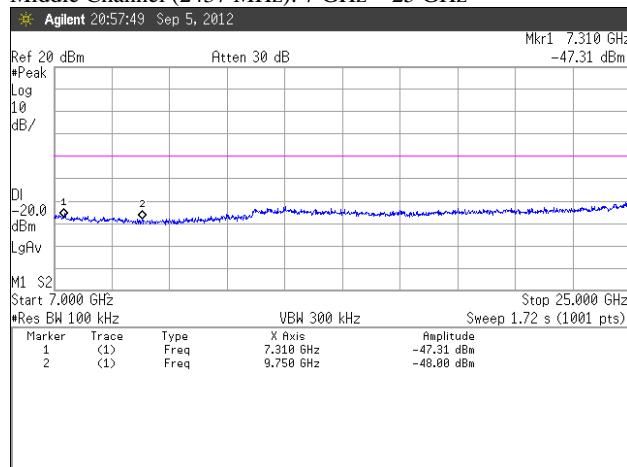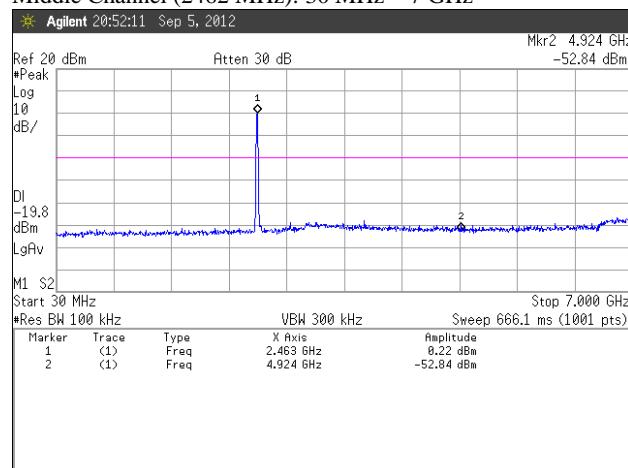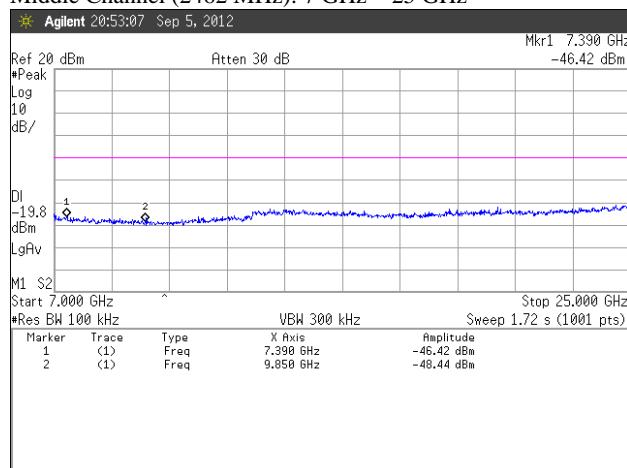
**Figure 5. Spurious RF conducted emissions (continued)**
**802.11n HT20 mode:**
**Lowest Channel (2412 MHz): 30 MHz ~ 7 GHz**

**Lowest Channel (2412 MHz): 7 GHz ~ 25 GHz**

**Middle Channel (2437 MHz): 30 MHz ~ 7 GHz**

**Middle Channel (2437 MHz): 7 GHz ~ 25 GHz**

**Middle Channel (2462 MHz): 30 MHz ~ 7 GHz**

**Middle Channel (2462 MHz): 7 GHz ~ 25 GHz**




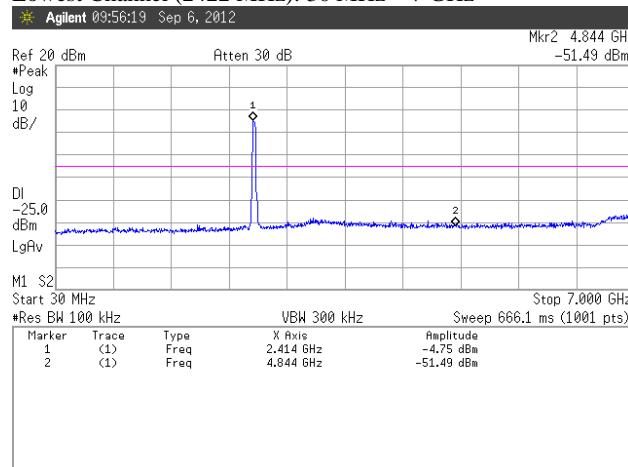
SK TECH CO., LTD.

Page 32 of 39


### Figure 5. Spurious RF conducted emissions (continued)

802.11n HT40 mode:


Lowest Channel (2422 MHz): 30 MHz ~ 7 GHz




Lowest Channel (2422 MHz): 7 GHz ~ 25 GHz

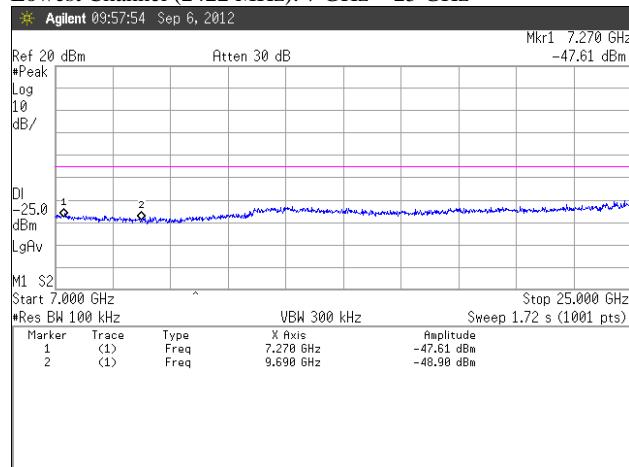


Middle Channel (2437 MHz): 30 MHz ~ 7 GHz

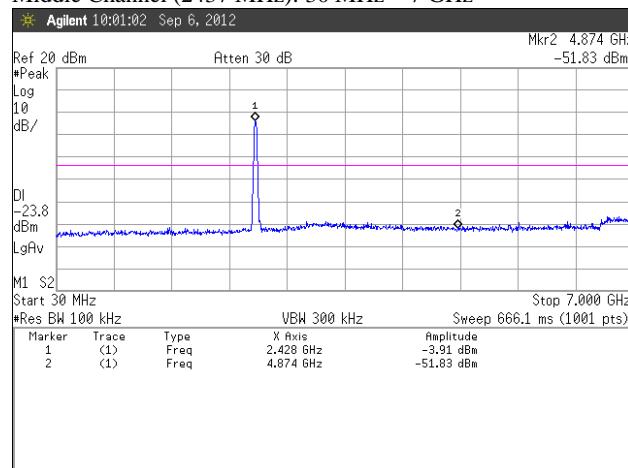


Middle Channel (2437 MHz): 7 GHz ~ 25 GHz

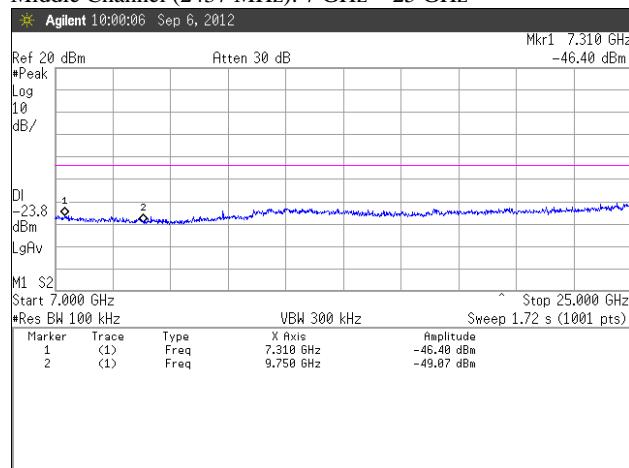

Highest Channel (2452 MHz): 30 MHz ~ 7 GHz

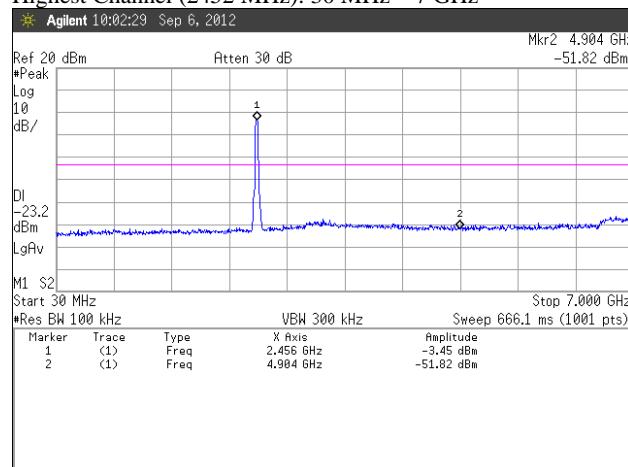

Highest Channel (2452 MHz): 7 GHz ~ 25 GHz

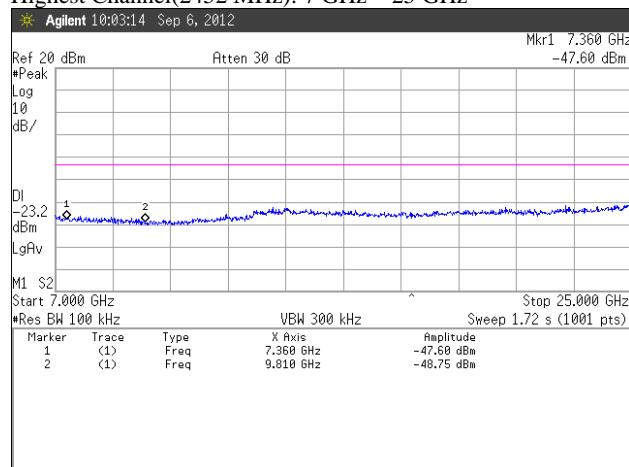



## 5.6 PEAK POWER SPECTRAL DENSITY

### 5.6.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.6.2 Test Procedure(Measurement Procedure PKPSD)

Set the spectrum analyzer as follows:

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Set the span to 5-30 % greater than the EBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
9. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF =  $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .

### 5.6.3 Test Results:

PASS

**Table 4: Measured values of the Peak Power Spectral Density (Conducted)**

Modulation	Operating frequency	Transfer Rate	Measured PSD /100 kHz (dBm)	PSD/ 3kHz (dBm)	Limit (dBm)
802.11b	2412 MHz	11 Mbps	4.86	-10.34	8
	2437 MHz	11 Mbps	5.16	-10.04	8
	2462 MHz	11 Mbps	5.33	-9.87	8
802.11g	2412 MHz	54 Mbps	0.86	-14.34	8
	2437 MHz	54 Mbps	1.42	-13.78	8
	2462 MHz	54 Mbps	1.95	-13.25	8
802.11n HT20	2412 MHz	MCS 7	-0.79	-15.99	8
	2437 MHz	MCS 7	0.01	-15.19	8
	2462 MHz	MCS 7	0.24	-14.96	8
802.11n HT40	2422 MHz	MCS 7	-4.95	-20.15	8
	2437 MHz	MCS 7	-3.77	-18.97	8
	2452 MHz	MCS 7	-3.21	-18.41	8


*NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.*


**SK TECH CO., LTD.**


Page 34 of 39

**Figure 6. Plot of the Peak Power Spectral Density (Conducted)**
**802.11b mode:**


Lowest Channel (2412 MHz)

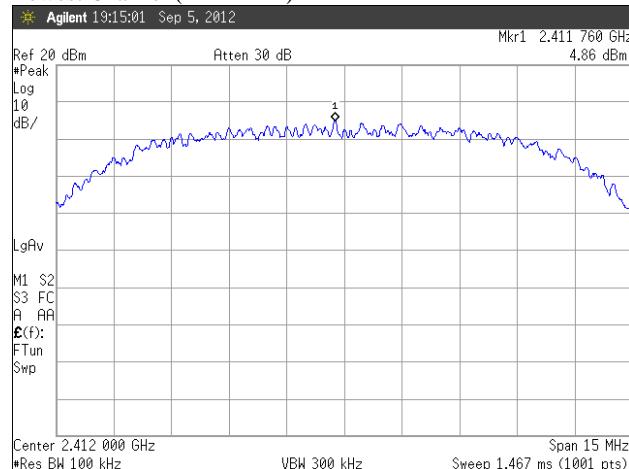
**802.11g mode:**


Lowest Channel (2412 MHz)

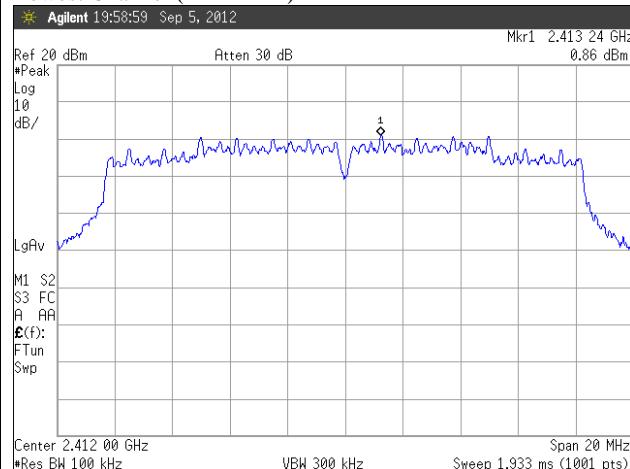


Middle Channel (2437 MHz)

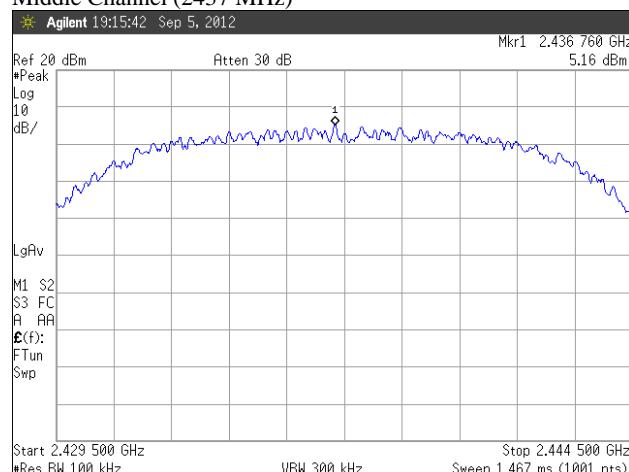


Middle Channel (2437 MHz)

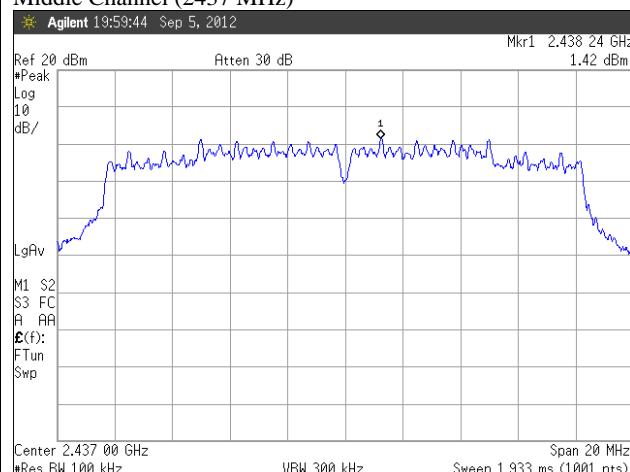

Highest Channel (2462 MHz)






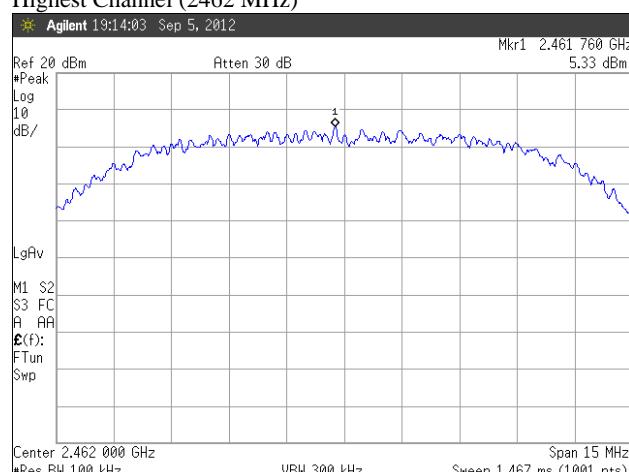


Highest Channel (2462 MHz)

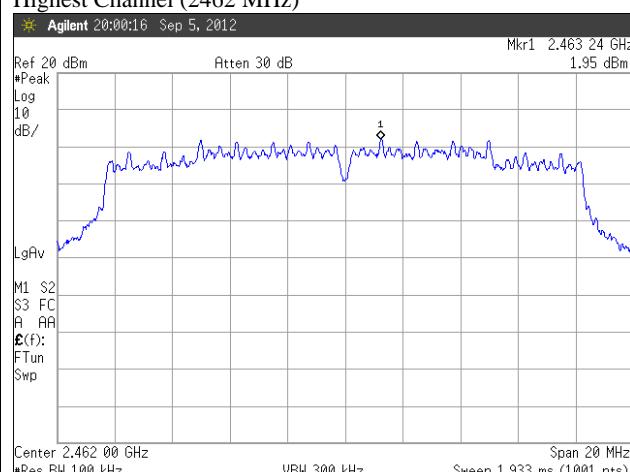


**SK TECH CO., LTD.**

Page 35 of 39

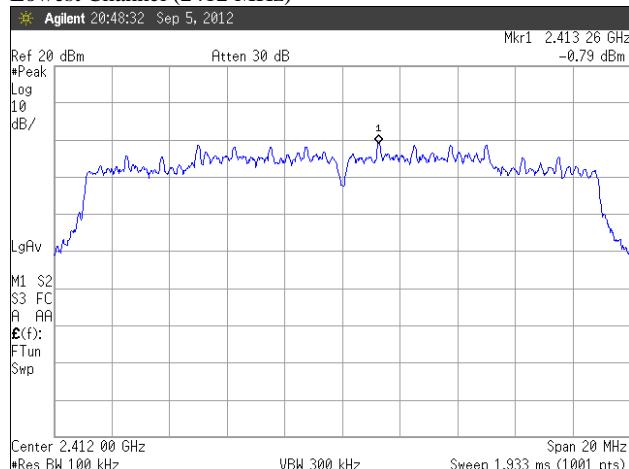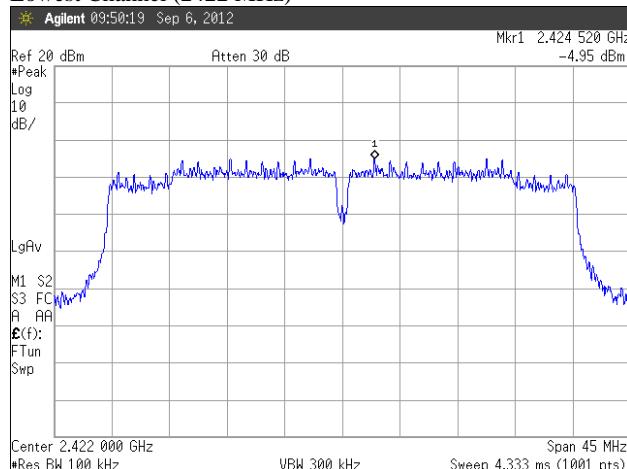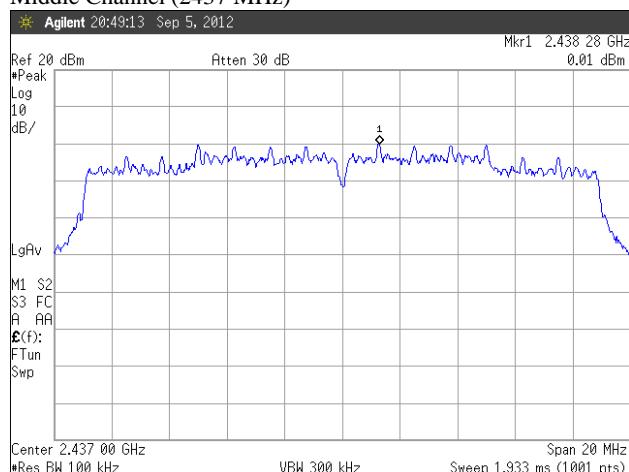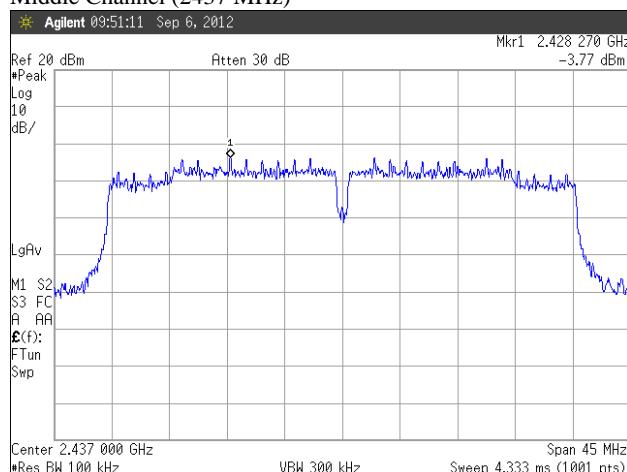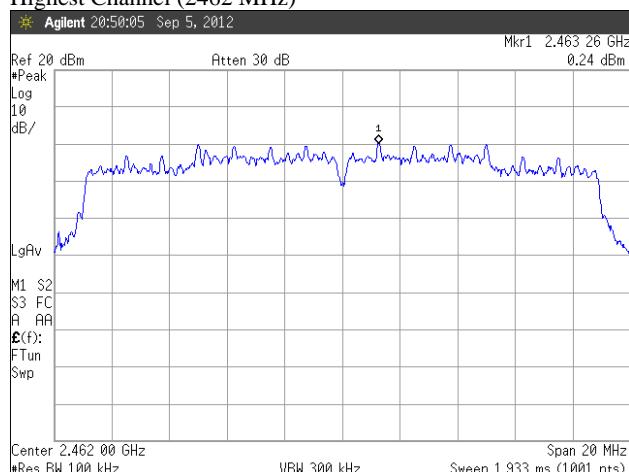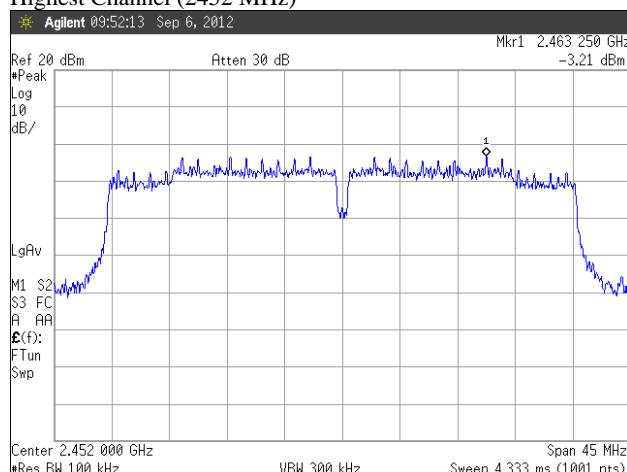**Figure 6. Plot of the Peak Power Spectral Density (Conducted) (continued)**
**802.11n HT20 mode:**
**Lowest Channel (2412 MHz)**

**802.11n HT40 mode:**
**Lowest Channel (2422 MHz)**

**Middle Channel (2437 MHz)**

**Middle Channel (2437 MHz)**

**Highest Channel (2462 MHz)**

**Highest Channel (2452 MHz)**




## 5.7 AC POWER LINE CONDUCTED EMISSIONS

### 5.7.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

### 5.7.2 Test Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 $\Omega$ /50 $\mu$ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.



## 5.7.3 Test Results:

PASS

Table 5: Measured values of the AC Power Line Conducted Emissions

Frequency [MHz]	Reading [dB $\mu$ V]	L / N	CF [dB]	CL [dB]	Actual [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
<b>QUASI-PEAK DATA</b>							
0.185	49.78	N	0.23	0.02	50.03	64.26	14.23
0.245	41.80	N	0.23	0.02	42.05	61.92	19.87
0.615	35.58	L	0.23	0.04	35.85	56.00	20.15
0.680	35.30	N	0.23	0.04	35.57	56.00	20.43
0.740	34.42	N	0.23	0.04	34.69	56.00	21.31
13.465	36.42	L	0.79	0.23	37.44	60.00	22.56
14.215	33.92	N	0.75	0.24	34.91	60.00	25.09
15.815	38.44	L	0.91	0.25	39.60	60.00	20.40
16.805	37.16	N	0.89	0.26	38.31	60.00	21.69
17.915	39.36	L	1.03	0.28	40.67	60.00	19.33
20.880	39.34	L	1.14	0.30	40.78	60.00	19.22
21.750	38.12	N	1.04	0.31	39.47	60.00	20.53
<b>AVERAGE DATA</b>							
0.185	39.40	N	0.23	0.02	39.65	54.26	14.61
0.245	32.66	N	0.23	0.02	32.91	51.92	19.01
0.615	29.47	L	0.23	0.04	29.74	46.00	16.26
0.680	30.25	L	0.23	0.04	30.52	46.00	15.48
0.740	27.58	L	0.23	0.04	27.85	46.00	18.15
11.185	30.36	N	0.58	0.20	31.14	50.00	18.86
13.465	31.56	L	0.79	0.23	32.58	50.00	17.42
15.815	33.60	L	0.91	0.25	34.76	50.00	15.24
16.805	32.41	N	0.89	0.26	33.56	50.00	16.44
17.915	34.72	L	1.03	0.28	36.03	50.00	13.97
20.880	34.25	L	1.14	0.30	35.69	50.00	14.31
21.750	32.75	N	1.04	0.31	34.10	50.00	15.90



Margin (dB) = Limit – Actual

[Actual = Reading + CF + CL]

L/N = LINE / NEUTRAL

CF/CL = Correction Factor and Cable Loss

NOTE: The frequency range was scanned from 150 kHz to 30 MHz. All emissions not reported were more than 20 dB below the specified limit.

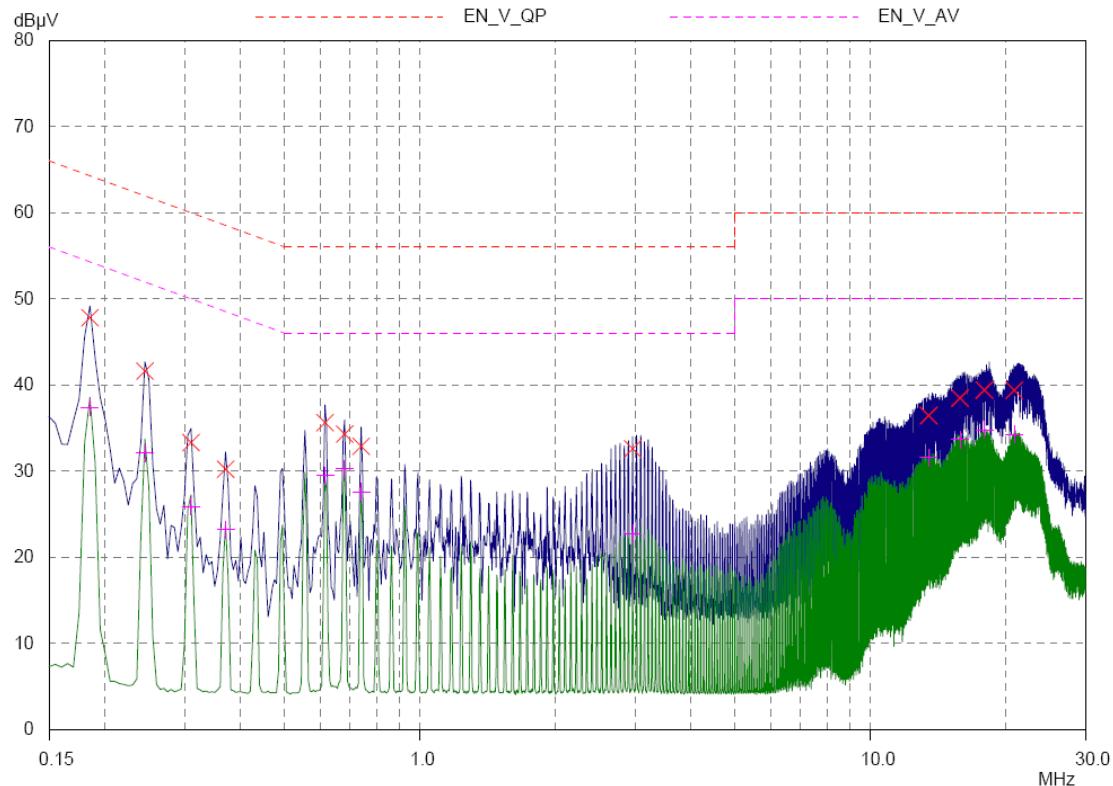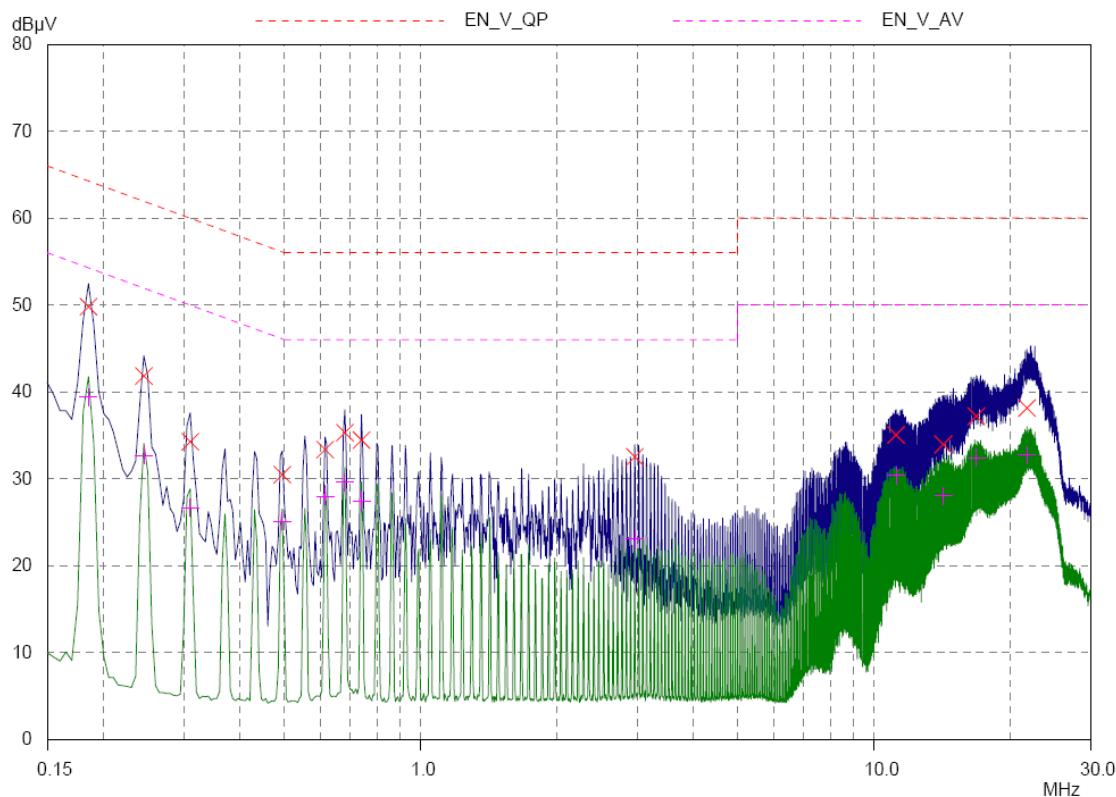**Figure 7. Plot of the AC Power Line Conducted Emissions****Line – PE (Peak and Average detector used)****Neutral – PE (Peak and Average detector used)**



## 5.8 RF Exposure

### 5.8.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm <sup>2</sup> ]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	1.0	30

f = frequency in MHz,

\* = Plane-wave equivalent power density

### MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm<sup>2</sup>]

P = power input to antenna [mW]

$$(\Rightarrow R = \sqrt{PG/4\pi S})$$

G = power gain of the antenna in the direction of interest  
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power = 191.87 [mW](= 22.83 dBm) & Antenna gain = 1.19 (= 0.76 [dBi])	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400)$ $= 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
191.87 mW, at 20 cm from the antenna 0.76 [dBi]	$S = PG/4\pi R^2 = 0.0455 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$

### 5.8.2 RF Exposure Compliance Issue

July 02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f<sub>GHZ</sub> ≈ 25) mW, d < 2.5 cm, (120/f<sub>GHZ</sub> ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f<sub>GHZ</sub> ≈ 370) mW, d < 20 cm], where f<sub>GHZ</sub>: 2.44, d: distance to a person's body

The users manual for end users must include the following information in a prominent location:

*"IMPORTANT NOTE: This device is only sold for use as a Mobile Device, and not ever be used less than 20 cm from the User. To comply with FCC RF exposure compliance requirements, this device should be permanently mounted in a vehicle using a manufacturer or customer supplied mounting plate. This device must be installed to provide a separation distance of at least 20 cm from all persons."*