



STU Standard Technology Union Co., Ltd.

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Telephone: +86 (0) 20 82019555
Fax: +86 (0) 20 82019556
Email: Marketing@stu-lab.com
Website: www.stu-lab.com

Report No.: STUGZEMO120914942RF1
Page: 1 of 32

FCC ID TEST REPORT

Application No.: STUGZEMO120914942RF1

Applicant: Hi-Target Surveying Instrument Co., Ltd

Address 10th Floor, Chuangxin Building, Tian'an Technology Zone, No.555,
the North of Panyu Road, Panyu District, Guangzhou City, China

Equipment Under Test (EUT):

EUT Name: Qstar High Accuracy GIS Data Collection Handheld

Trade Mark: HI-TARGET

Model No.: Qstar5, Qstar6, Qstar8

Serial No.: Not supplied by client

FCC ID: O39ZHDQSTAR

Standards: FCC PART 15C

Date of Receipt: Sep.15, 2012

Date of Test: Sep.15, 2012 to Oct.30, 2012

Test Result :	PASS*
----------------------	-------

Tested By: David Li / Test Engineer..... *David Li*

Reviewed By: Jimmy Yao / EMC Manager... *Jimmy Yao*



VERIFICATION OF COMPLIANCE

Applicant:	Hi-Target Surveying Instrument Co., Ltd
Applicant Address:	10th Floor, Chuangxin Building, Tian'an Technology Zone, No.555, the North of Panyu Road, Panyu District, Guangzhou City, China
Manufacture:	Hi-Target Surveying Instrument Co., Ltd
Manufacture Address:	10th Floor, Chuangxin Building, Tian'an Technology Zone, No.555, the North of Panyu Road, Panyu District, Guangzhou City, China
EUT Name:	Qstar High Accuracy GIS Data Collection Handheld
Trade Mark:	HI-TARGET
Model No.:	Qstar5, Qstar6, Qstar8
Model Difference:	All models are completely same except for model name and positioning software version of GPS module.
FCC ID:	O39ZHDQSTAR
Report Number:	STUGZEMO120914942RF1
Date of Test:	Sep.15, 2012 to Oct.30, 2012

WE HEREBY CERTIFY THAT:

The above equipment was tested by STU Standard Technology Union Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 TABLE OF CARRIER FREQUENCYS	5
1.3 RECEIVER INPUT BANDWIDTH.....	5
1.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE	6
1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	6
1.6 RELATED SUBMITTAL(S) / GRANT (S)	6
1.7 TEST METHODOLOGY	6
1.8 TEST FACILITY	6
1.9 SPECIAL ACCESSORIES	7
1.10 EQUIPMENT MODIFICATIONS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 CONFIGURATION OF TESTED SYSTEM.....	8
2.2 EQUIPMENT USED IN TESTED SYSTEM.....	8
3. SUMMARY OF TEST RESULTS	9
4. DESCRIPTION OF TEST MODES AND ANTENNA REQUIREMENT	9
5. MAXIMUM OUTPUT POWER	10
5.1 MEASUREMENT PROCEDURE.....	10
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	10
5.3 MEASUREMENT EQUIPMENT USED	13
5.4 LIMITS AND MEASUREMENT RESULT.....	13
6. 20 DB BANDWIDTH	14
6.1 MEASUREMENT PROCEDURE.....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.3 MEASUREMENT EQUIPMENT USED	14
6.4 LIMITS AND MEASUREMENT RESULTS	14
7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)	16
7.1 MEASUREMENT PROCEDURE.....	16
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	16
7.3 MEASUREMENT EQUIPMENT USED	16
7.4 LIMITS AND MEASUREMENT RESULT.....	16
8. OUT OF BAND EMISSION	17
8.1 MEASUREMENT PROCEDURE.....	17
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
8.3 MEASUREMENT EQUIPMENT USED	17
8.4 LIMITS AND MEASUREMENT RESULT.....	17
9. BAND EDGE EMISSION	21
9.1 MEASUREMENT PROCEDURE.....	21
9.2 TEST SET-UP	21
9.3 TEST RESULT	21

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

10. NUMBER OF HOPPING FREQUENCY	23
10.1 MEASUREMENT PROCEDURE.....	23
10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	23
10.3 MEASUREMENT EQUIPMENT USED	23
10.4 LIMITS AND MEASUREMENT RESULT.....	23
11. TIME OF OCCUPANCY (DWELL TIME)	25
11.1 MEASUREMENT PROCEDURE	25
11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	25
11.3 MEASUREMENT EQUIPMENT USED	25
11.4 LIMITS AND MEASUREMENT RESULT	25
12. FREQUENCY SEPARATION.....	31
12.1 MEASUREMENT PROCEDURE.....	31
12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION).....	31
12.3 MEASUREMENT EQUIPMENT USED	31
12.4 LIMITS AND MEASUREMENT RESULT.....	31

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT's name is GIS DATA COLLECTOR, which is a short range, lower power equipment. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency:	2402 MHz to 2480 MHz
Output Power:	-6 dBm~4dBm
Modulation Type:	GFSK
Number of channels:	79
Antenna Designation:	Integrated Antenna
Channel Separation:	1MHz
Power Supply:	DC3.7V direct supplied by Lithium Batteries Pack

1.2 TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single or multislots packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, Guangzhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

1.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67,56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75,09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06
01,51,03,55,05,04

1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1 LAP/UAP of the master of the connection

2 Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: O39ZHDQSTAR** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.7 TEST METHODOLOGY

Testing was performed according to the procedures in ANSI C63.4 (2003) and in accordance to the FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.8 TEST FACILITY

All measurement facilities used to collect the measurement data are located at
Guangdong Electronic & Electrical Products Inspection and Supervision Institute (CGEL)

45 Cunnan Street, Shayongnan, Sanyuanli District, Guangzhou, Guangdong, China

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC register No.: 597719

Industry Canada (IC) Assigned No.: 6664A.

China National Accreditation Service for Conformity Assessment (CNAS) No.: L0307.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

1.9 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.


STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

2. SYSTEM TEST CONFIGURATION

2.1 CONFIGURATION OF TESTED SYSTEM



2.2 EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID
1	Qstar High Accuracy GIS Data Collection Handheld	HI-TARGET	Qstar6	O39ZHDQSTAR

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.247	Maximum Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Band Edges	Compliant
§15.247	Spurious Emission	Compliant
§15.247	Frequency Separation	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant

4. DESCRIPTION OF TEST MODES AND ANTENNA REQUIREMENT

1. The EUT has been set to operate continuously on the lowest, middle and highest operation frequency individually.
2. The EUT stays in continuous transmitting mode on the operation frequency being set.
3. For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
It is a permanent fixed antenna, designed as an indispensable part of the EUT. Antenna connections within an enclosure are not readily accessible to the user. It complies with the standard requirement.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

5. MAXIMUM OUTPUT POWER

5.1 MEASUREMENT PROCEDURE

CONDUCTED METHOD


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set SPA Centre Frequency = Operation Frequency, RBW= 3 MHz,
VBW= 3 MHz.
5. Set SPA Trace 1 Max hold, then View.

RADIATED METHOD

According to ANSI C63.4:2003


5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

CONDUCTED METHOD

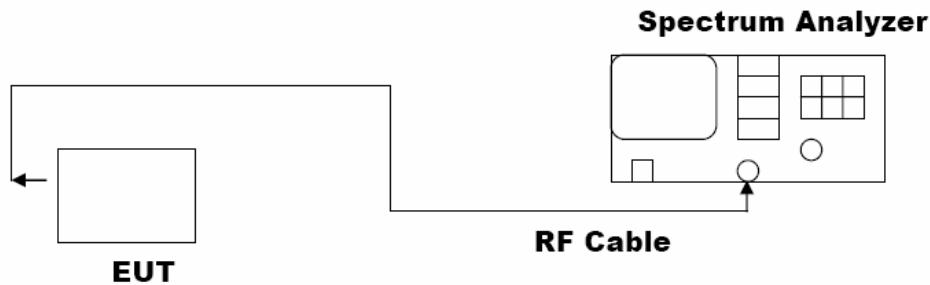

RADIATED EMISSION TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

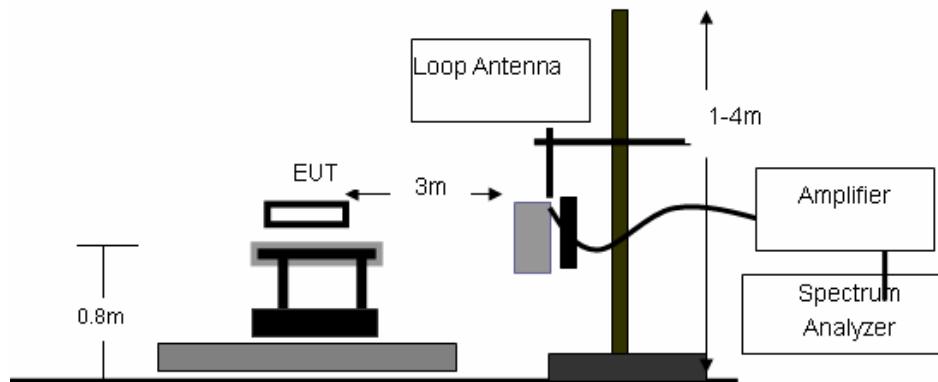


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd


No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

RADIATED MISSION TEST SETUP 30MHz-1000MHz

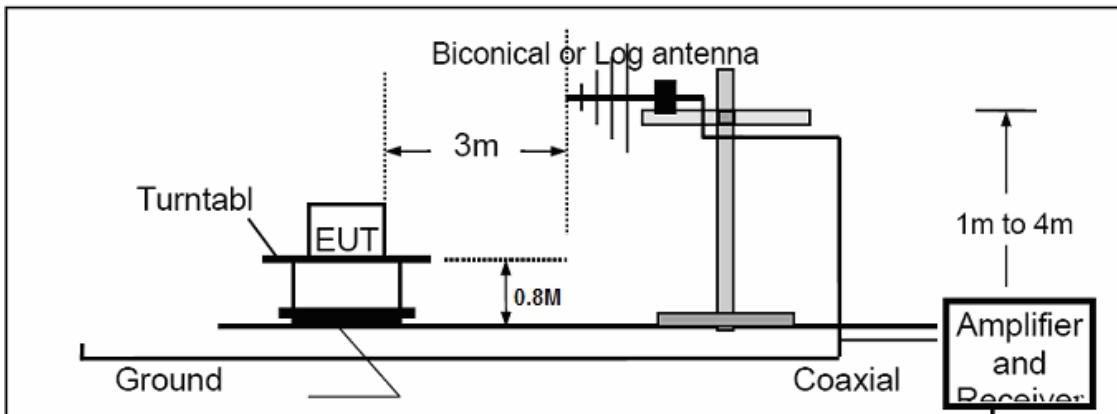


RADIATED MISSION TEST SETUP ABOVE 1000MHz

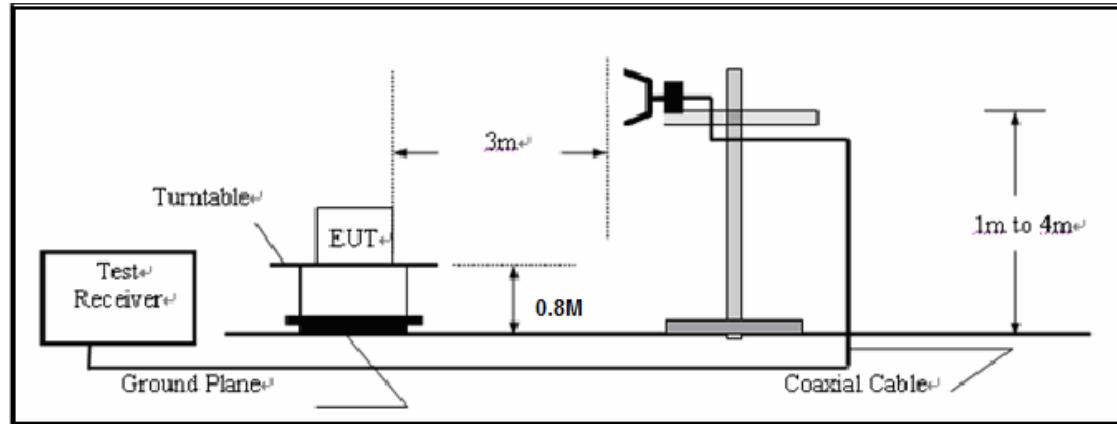

EIRP TEST SETUP

TEST SETUP BELOW 1GHZ



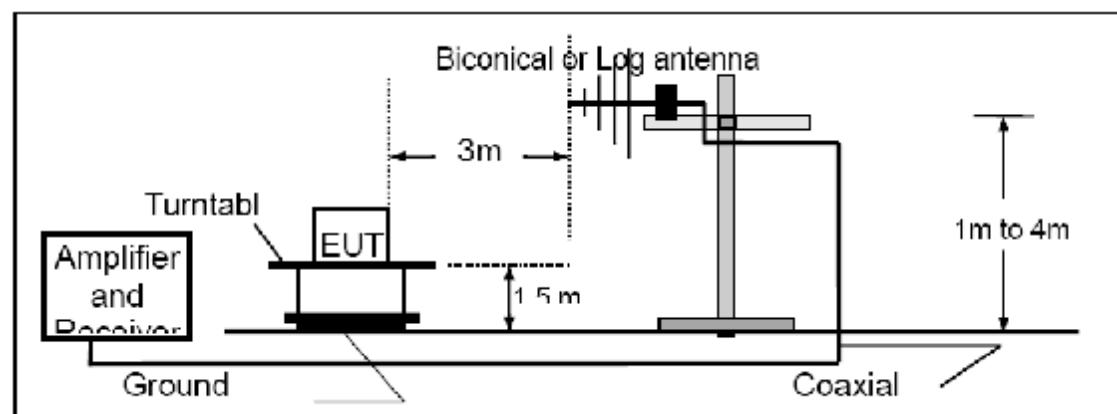


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

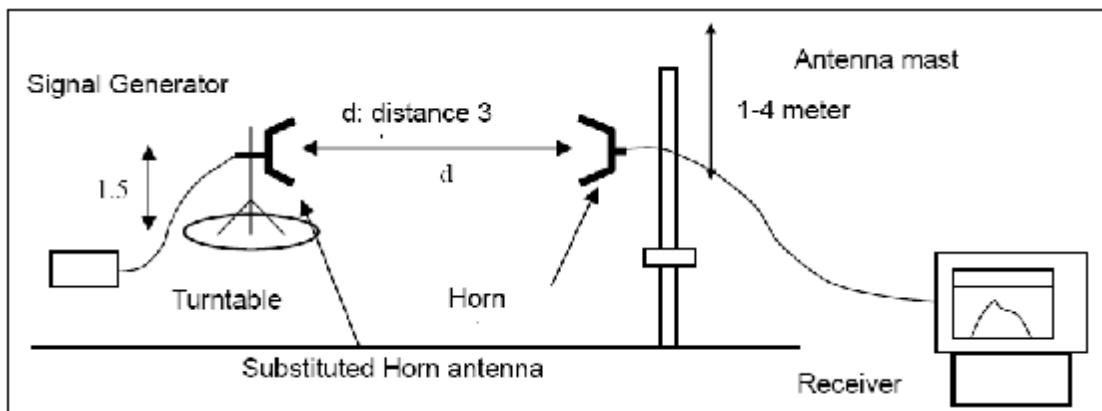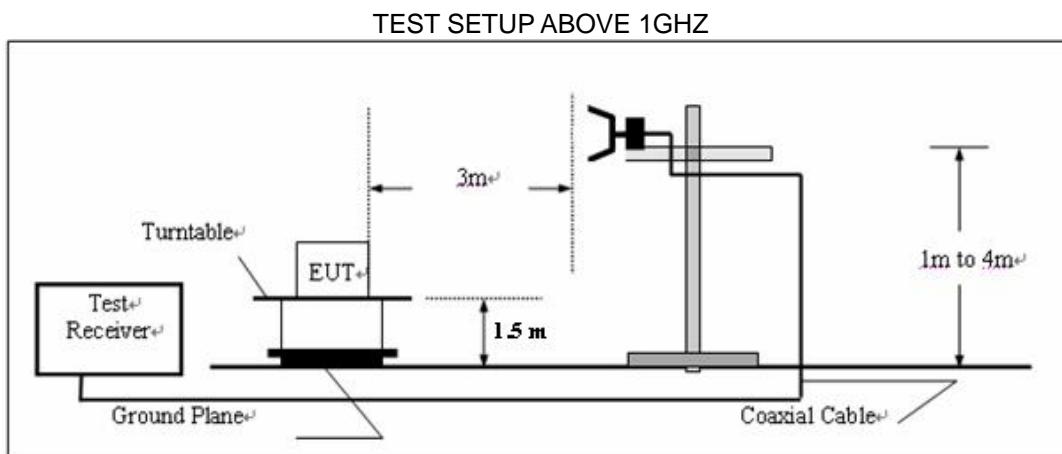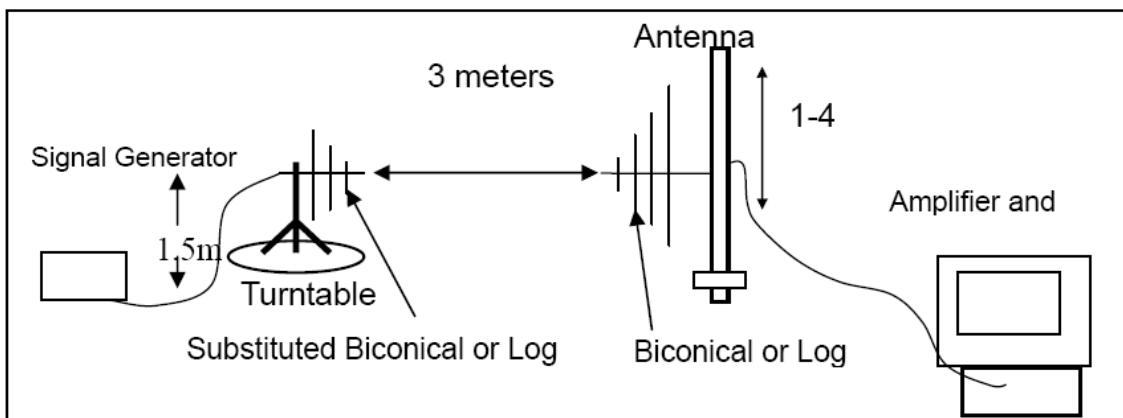

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

5.3 MEASUREMENT EQUIPMENT USED

Test Equipment	Manufacturer	Description	Cal.Date	Cal.Due date
EMI TEST Receiver	R/S	9KHz-18GHz	2012-6-15	2013-6-14
Spectrum Analyzer	Agilent	9KHz-18GHz	2012-6-15	2013-6-14
Power meter	BOOTON	0~18GHz	2012-6-9	2013-6-8
Chamber	ETS	DC~18GHz	2012-4-11	2013-4-10
Antenna	SCHWARZBECK	9kHz~30MHz	2012-6-20	2013-6-19
Antenna	SCHWARZBECK	450MHz~6GHz	2012-6-4	2013-6-3
Antenna	SCHWARZBECK	65MHz~3GHz	2012-6-17	2013-6-16
Antenna	SCHWARZBECK	9kHz~30MHz	2012-7-4	2013-7-3
Antenna	ETS	1GHz~18GHz	2012-7-4	2013-7-3
Antenna	ETS	26MHz~3GHz	2012-7-4	2013-7-3
Temperature & Humidity Chamber	Deli	20-98%RH, -50-150°C	2012-6-18	2013-6-17
Regulated DC Power Supply	ZHAOXIN	--	2012-6-17	2013-6-16
Signal Generator	R&S	--	2012-6-17	2013-6-16

5.4 LIMITS AND MEASUREMENT RESULT

Applicable Limits	Frequency	Measurement Result		
		EIRP (dBm)	Conducted (dBm)	Criteria
30 dBm	2.402GHz	2.65	2.70	PASS
30 dBm	2.441GHz	2.54	2.62	PASS
30 dBm	2.480GHz	2.68	2.75	PASS

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

6. 20 DB BANDWIDTH

6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
 $VBW= 100$ KHz.
4. Set SPA Trace 1 Max hold, then View.

6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 5.2


6.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3

6.4 LIMITS AND MEASUREMENT RESULTS

Applicable Limits	Measurement Result	
	Test Data (MHz)	Criteria
--	Low Channel	1.047
	Middle Channel	1.120
	High Channel	1.103

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

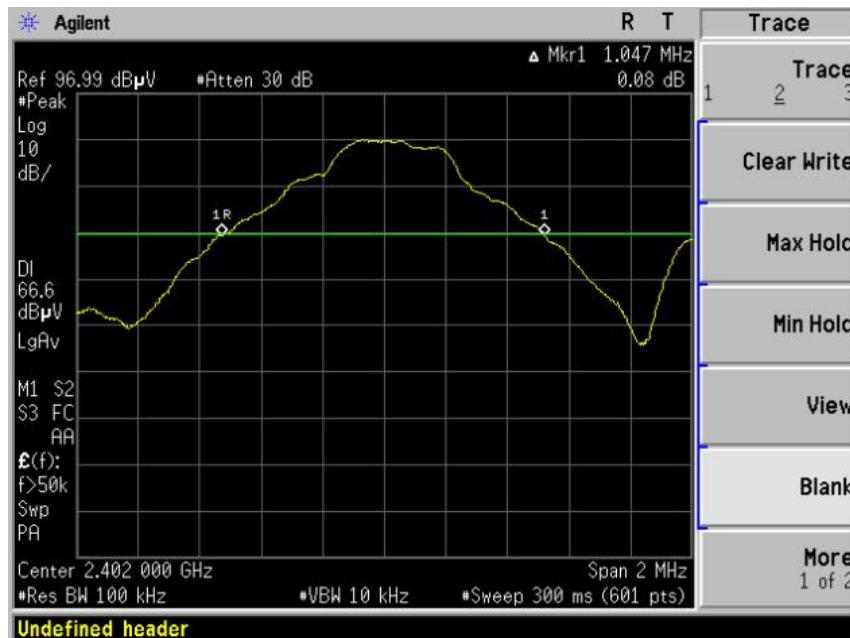


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd


No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

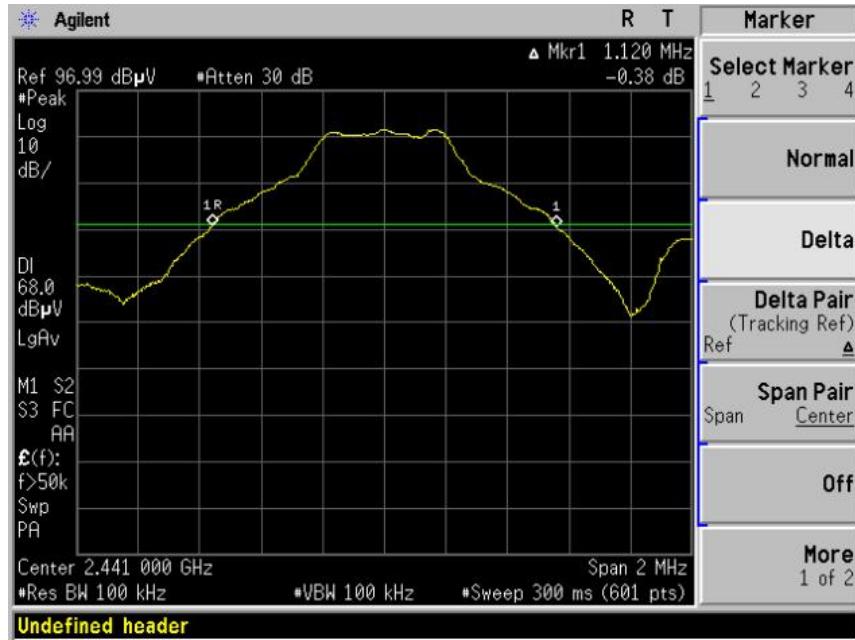

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

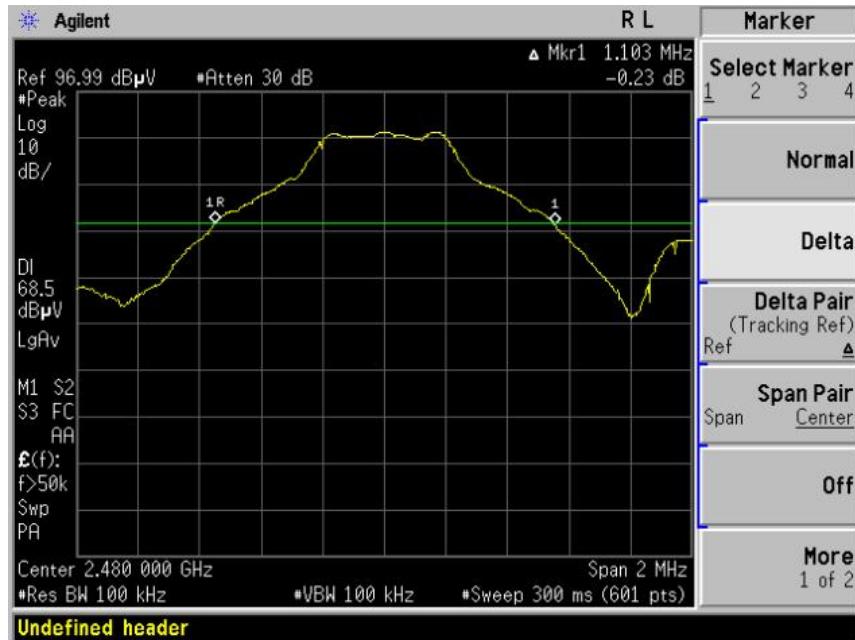

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China


Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

7. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY (N/A)

7.1 MEASUREMENT PROCEDURE

- (1). The EUT was placed on a turn table which is 0.8m above ground plane.
- (2). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (3). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (4). Set SPA Centre Frequency = Operation Frequency, RBW= 3 KHz,
VBW= 10 KHz., Sweep time= Auto
- (5). Set SPA Trace 1 Max hold, then View.

7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

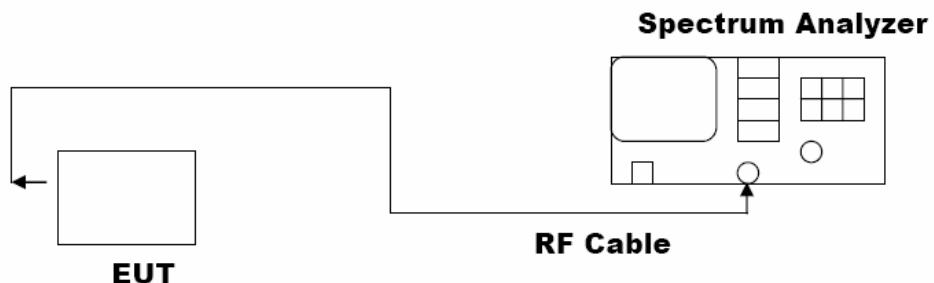

7.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3

7.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (dBm/3KHz)	Criteria	
8 dBm / 3KHz	Low Channel	--	--
	Middle Channel	--	--
	High Channel	--	--

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

8. OUT OF BAND EMISSION

8.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz,
VBW= 100 KHz.
4. Set SPA Trace 1 Max hold, then View.

8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2

1. Conducted test setup
2. Radiated Emission test Setup below 1GHz and Above 1GHz

8.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

8.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS



Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT OF OUT OF BAND EMISSIONS FOR LOW CHANNEL(1Mbps)

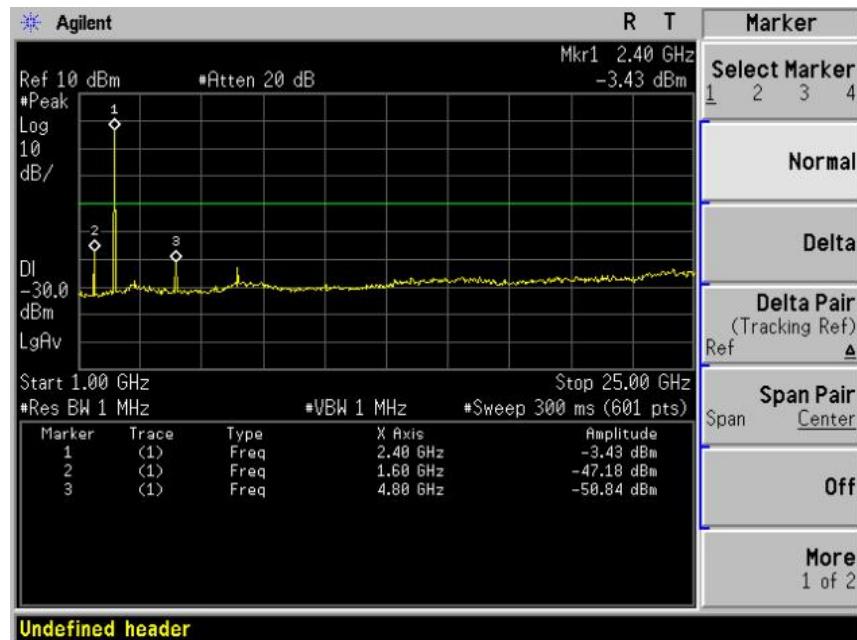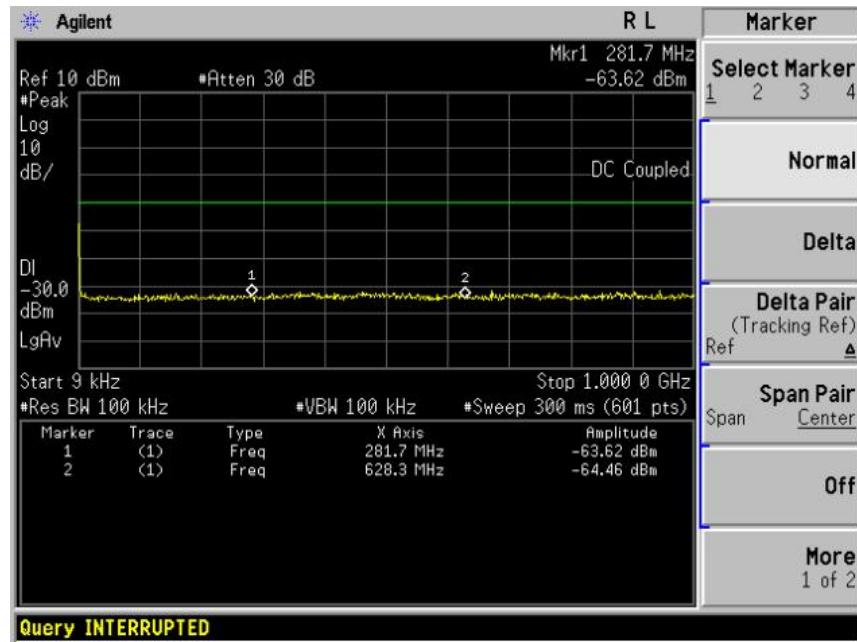



Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, Guangzhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL (1Mbps)

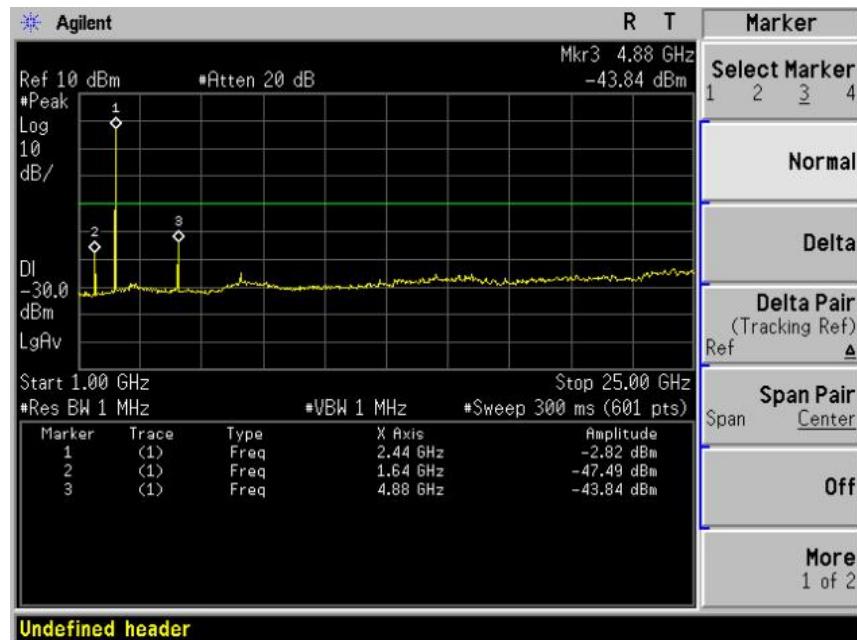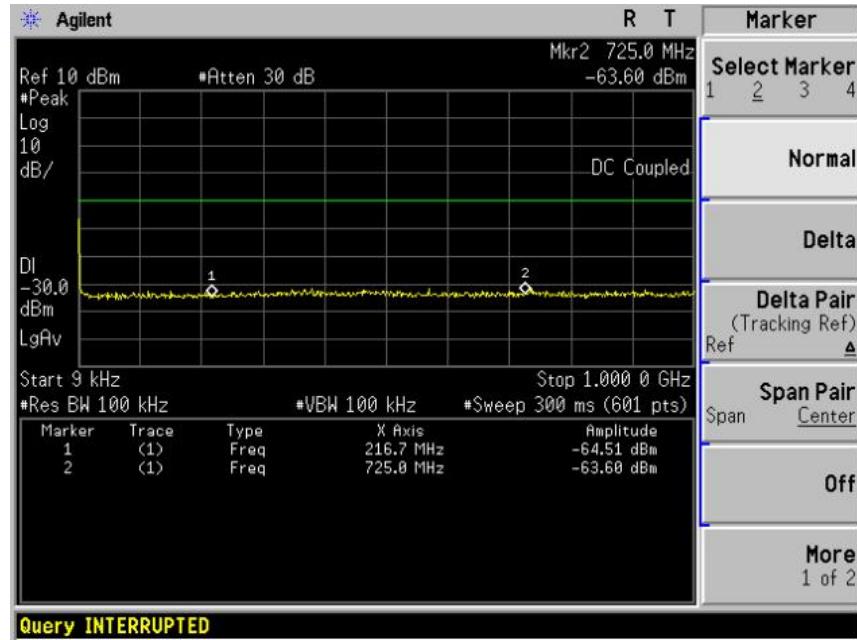



Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, Guangzhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT OF OUT OF BAND EMISSIONS FOR HIGH CHANNEL(1Mbps)

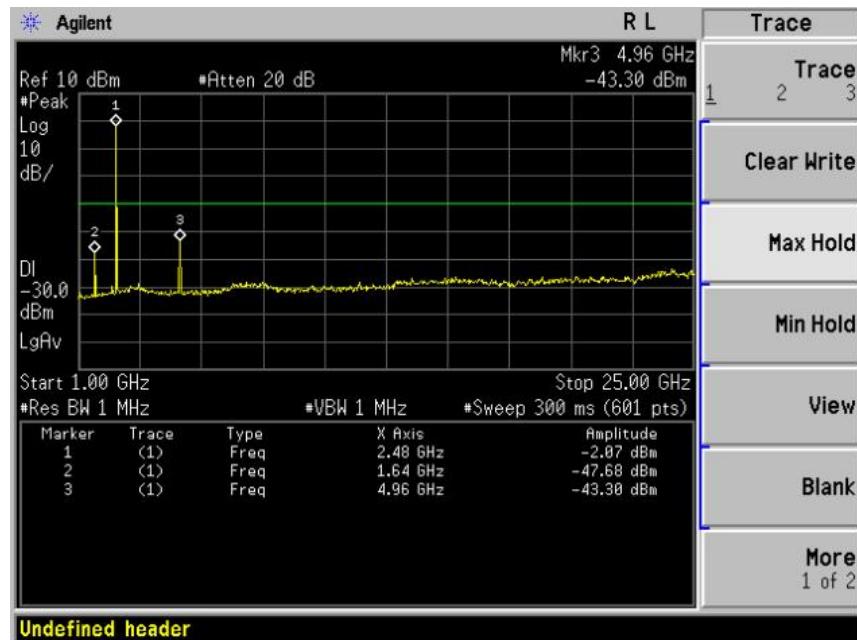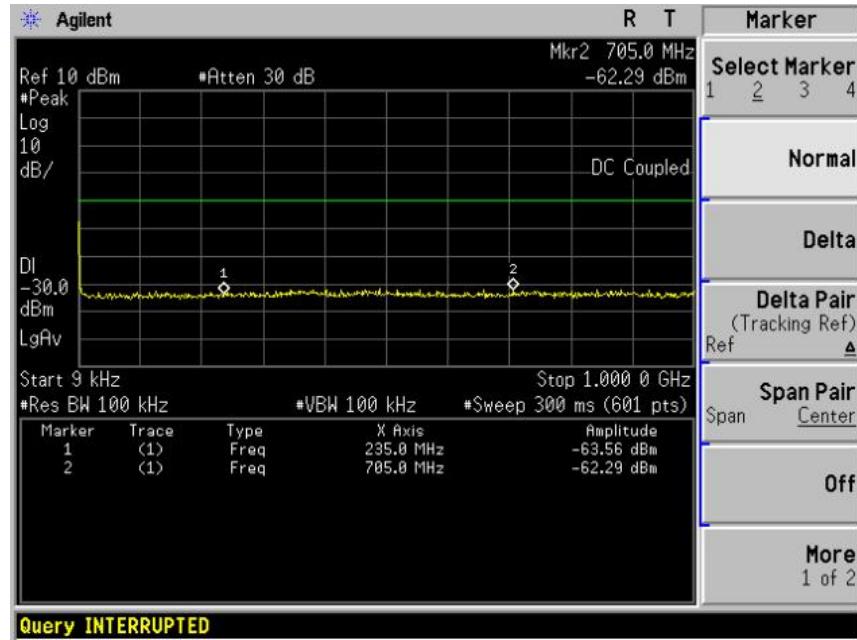

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, Guangzhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

9. BAND EDGE EMISSION

9.1 MEASUREMENT PROCEDURE


1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency, RBW= 1MHz, VBW= 1MHz.
3. The band edges was measured and recorded.

9.2 TEST SET-UP

The Same as described in section 5.2

9.3 TEST RESULT

TEST PLOT OF BAND ELDG FOR BOTTOM CHANNEL (2.402GHz)

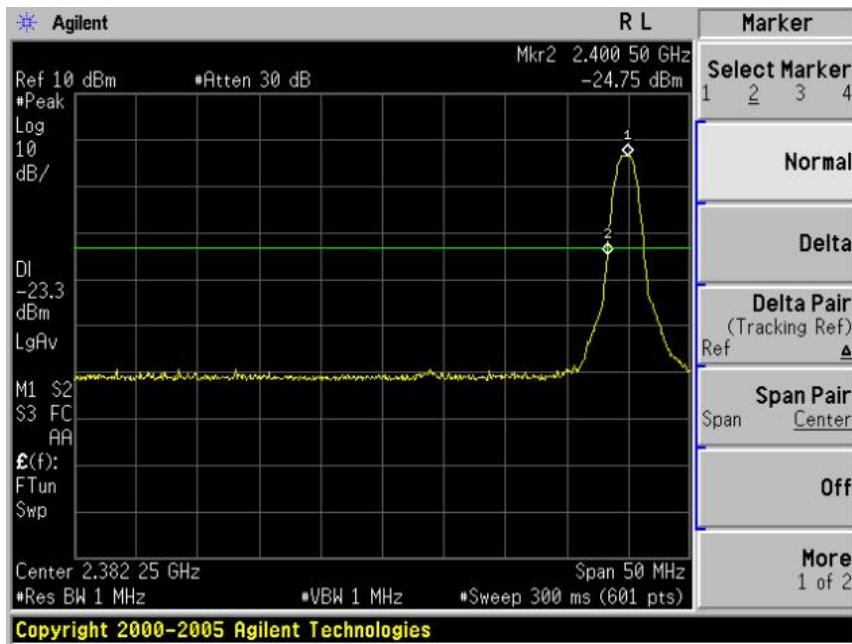


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT OF BAND ELDG FOR TOP CHANNEL (2.480GHz)

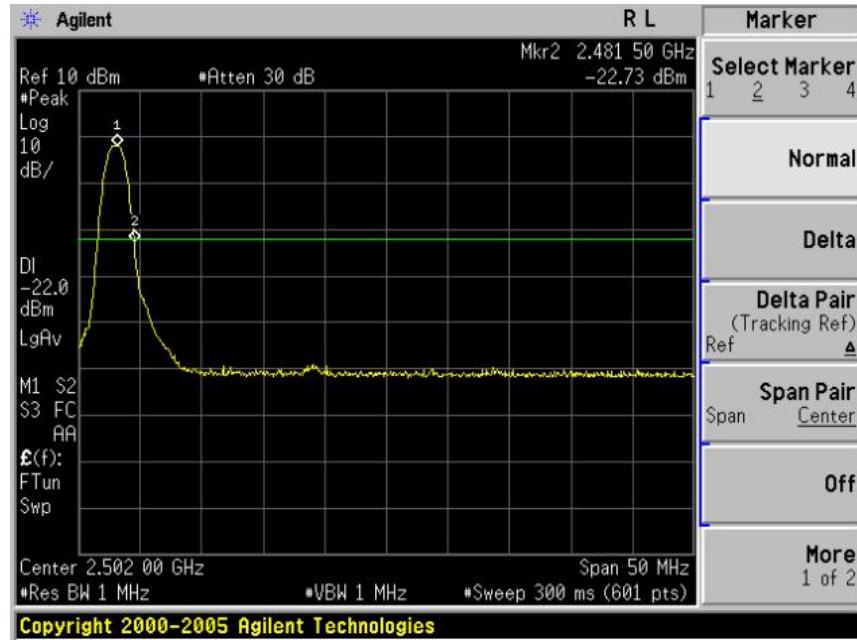

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

10. NUMBER OF HOPPING FREQUENCY

10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW = 100KHZ

10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

1. Conducted Method.


10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

10.4 LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=15	79	PASS

NUMBER OF HOPPING CHANNEL PLOT ON CHANNEL 0~78

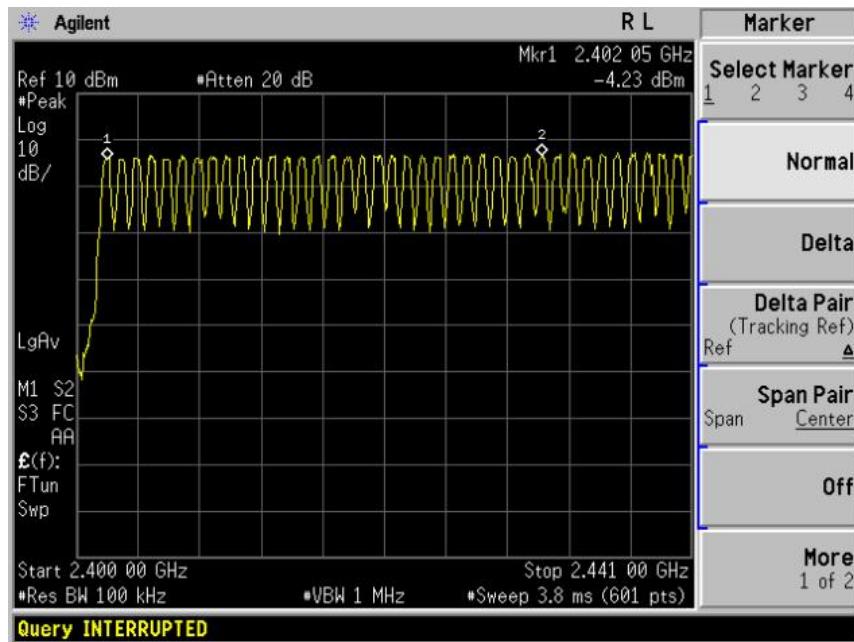


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

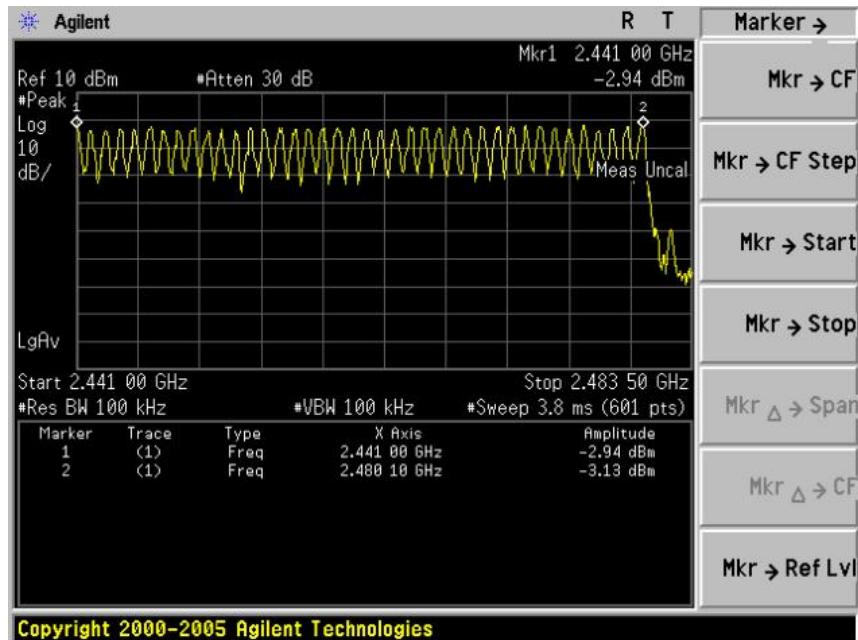

**Note:

Testing complies with the standard requirement of FCC Part 15.247(h) Frequency Hopping Spread Spectrum System Intelligence.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, Guangzhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

11. TIME OF OCCUPANCY (DWELL TIME)

11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Operating frequency
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0 Hz,

11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

Conducted Method

11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

11.4 LIMITS AND MEASUREMENT RESULT

BOTTOM CHANNEL					
Mode	Frequency (MHz)	Spectrum Reading (uS)	Test Result (mS)	Limit (mS)	Pass / Fail
DH1	2402	363.3	116.26	400	Pass
DH3	2402	1627	260.32	400	Pass
DH5	2402	2840	302.93	400	Pass
MIDDLE CHANNEL					
Mode	Frequency (MHz)	Spectrum Reading (uS)	Test Result (mS)	Limit (mS)	Pass / Fail
DH1	2441	370	118.40	400	Pass
DH3	2441	1620	259.20	400	Pass
DH5	2441	2870	306.13	400	Pass
TOP CHANNEL					
Mode	Frequency (MHz)	Spectrum Reading (uS)	Test Result (mS)	Limit (mS)	Pass / Fail
DH1	2480	373.3	119.46	400	Pass
DH3	2480	1620	259.20	400	Pass
DH5	2480	2860	305.08	400	Pass

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com


A Period Time = $79 \times 0.4 = 31.6$ S

DH1 Time Slot: Reading * (1600/2)*31.6/79


DH3 Time Slot: Reading * (1600/4)*31.6/79

DH5 Time Slot: Reading * (1600/6)*31.6/79

TEST PLOT DH1 MODE BOTTOM CHANNEL

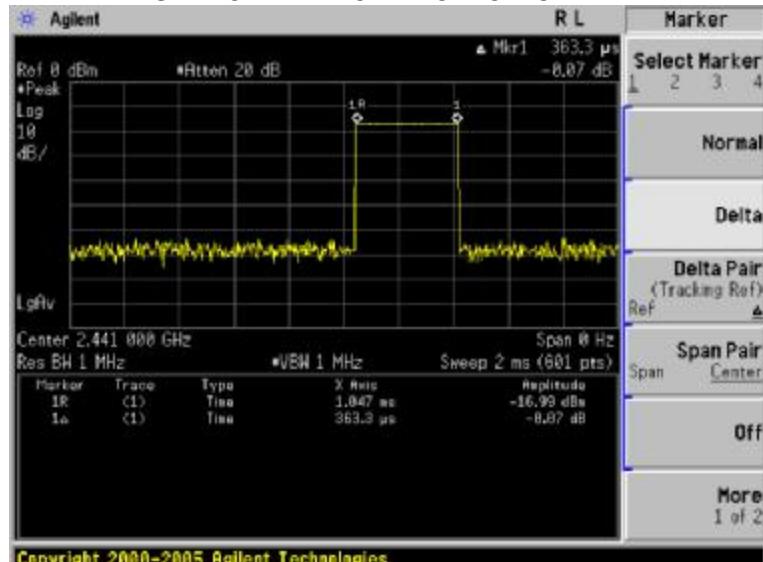

TEST PLOT DH3 MODE BOTTOM CHANNEL

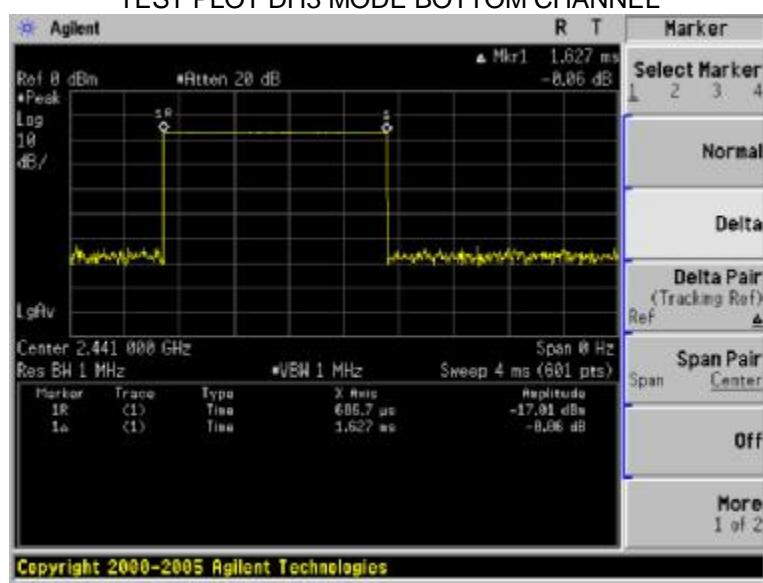


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China


Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT DH5 MODE BOTTOM CHANNEL

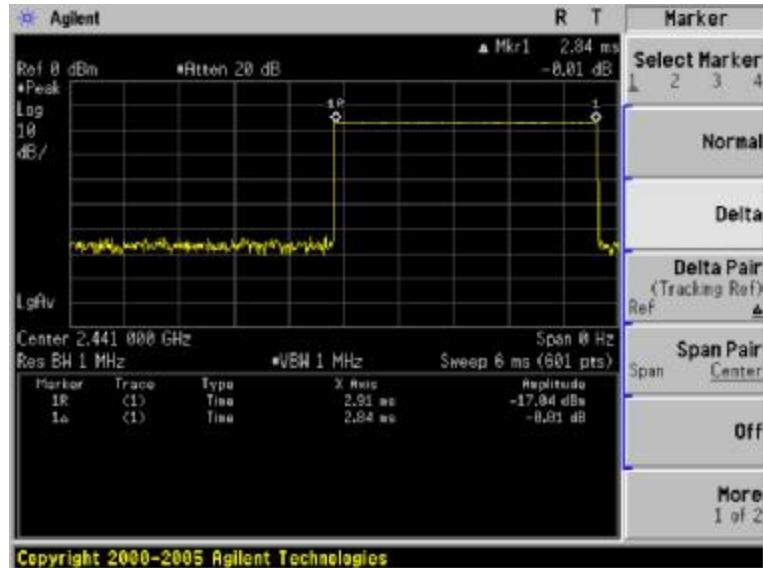

Copyright 2000-2005 Agilent Technologies

TEST PLOT DH1 MODE MIDDLE CHANNEL

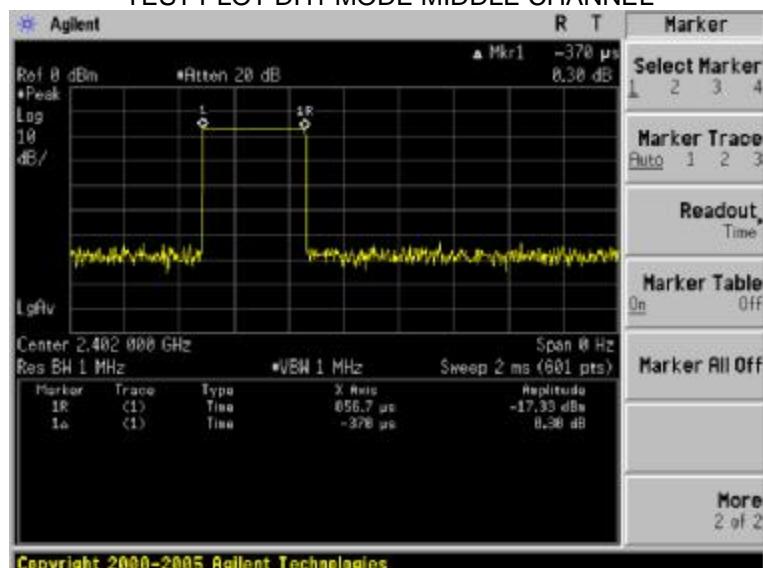

Copyright 2000-2005 Agilent Technologies


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd


No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT DH3 MODE MIDDLE CHANNEL

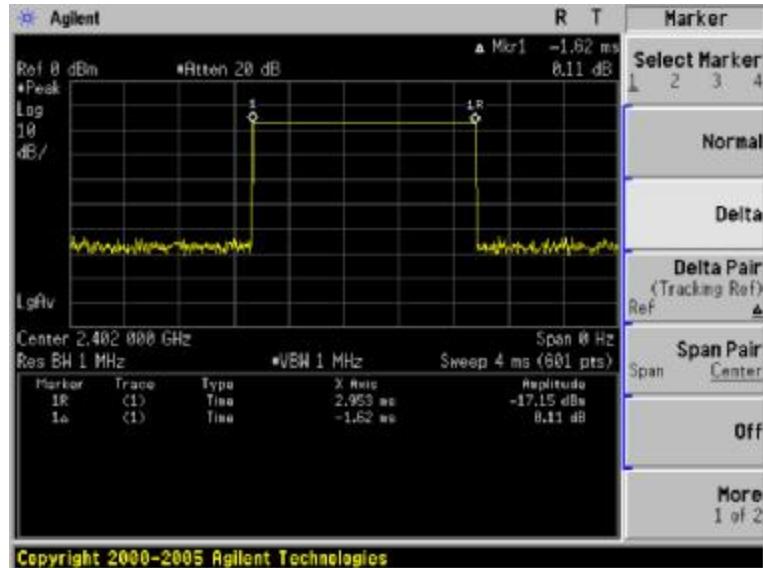

TEST PLOT DH5 MODE MIDDLE CHANNEL

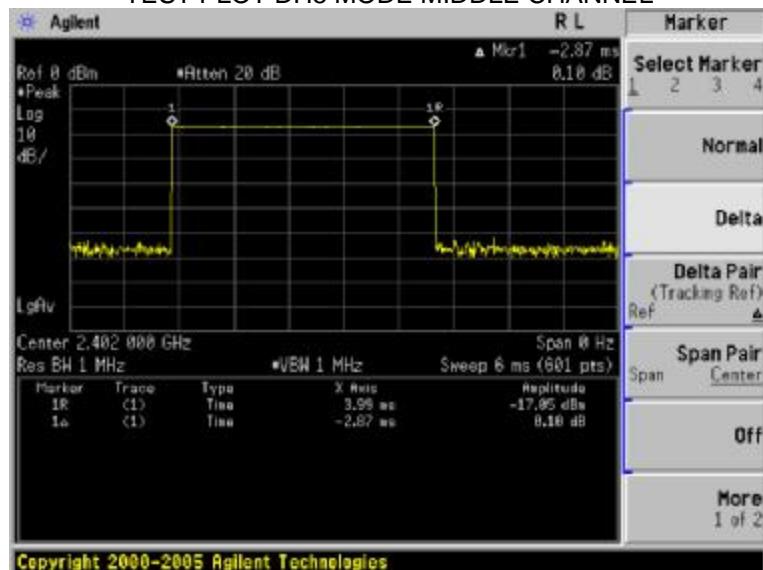


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd


No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT DH1 MODE TOP CHANNEL

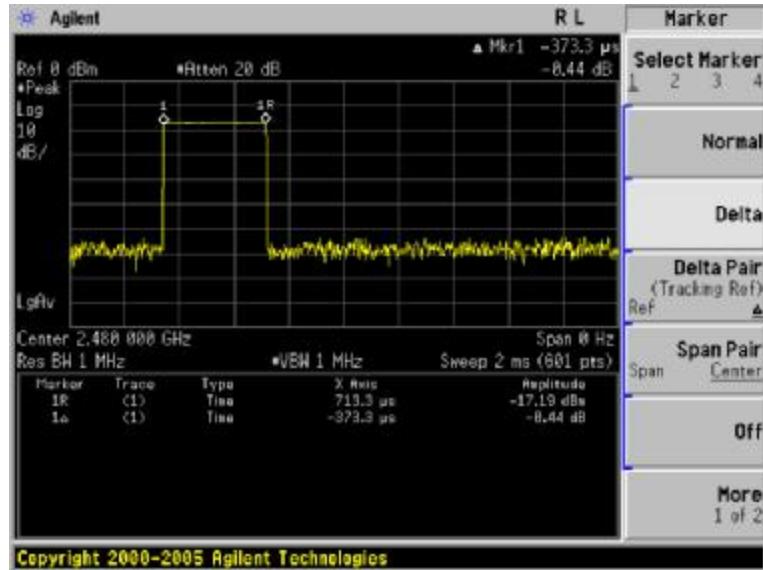

TEST PLOT DH3 MODE TOP CHANNEL

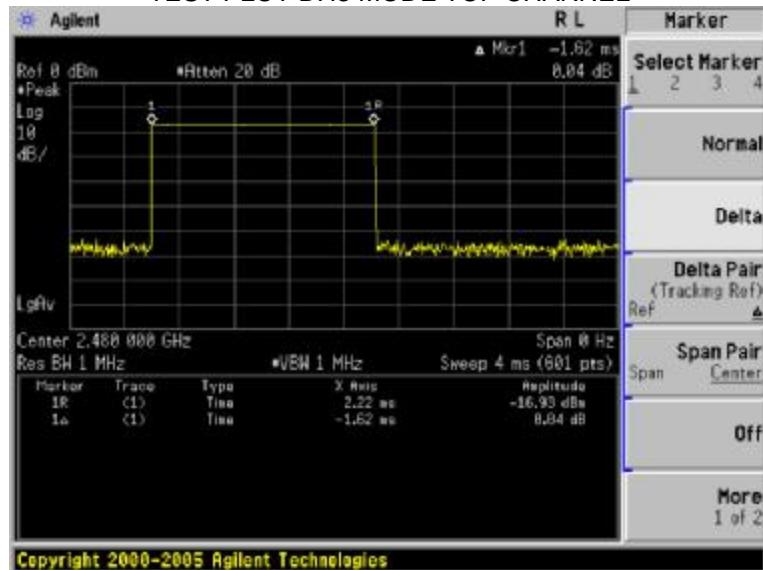


Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

TEST PLOT DH5 MODE TOP CHANNEL

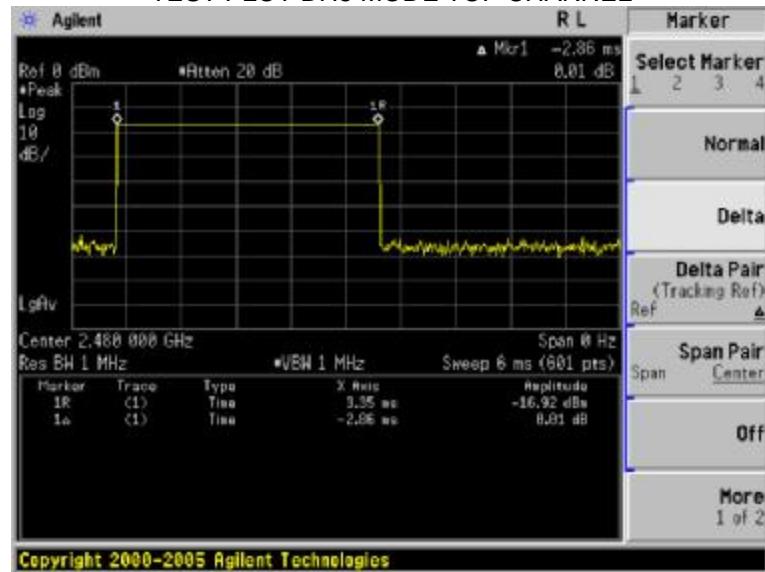

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

12. FREQUENCY SEPARATION

12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set center frequency of spectrum analyzer = Middle of Operating frequency
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 5 MHz,

12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

12.4 LIMITS AND MEASUREMENT RESULT


CHANNEL(1Mbps)	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	Pass
CH39-CH40	1025		

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com

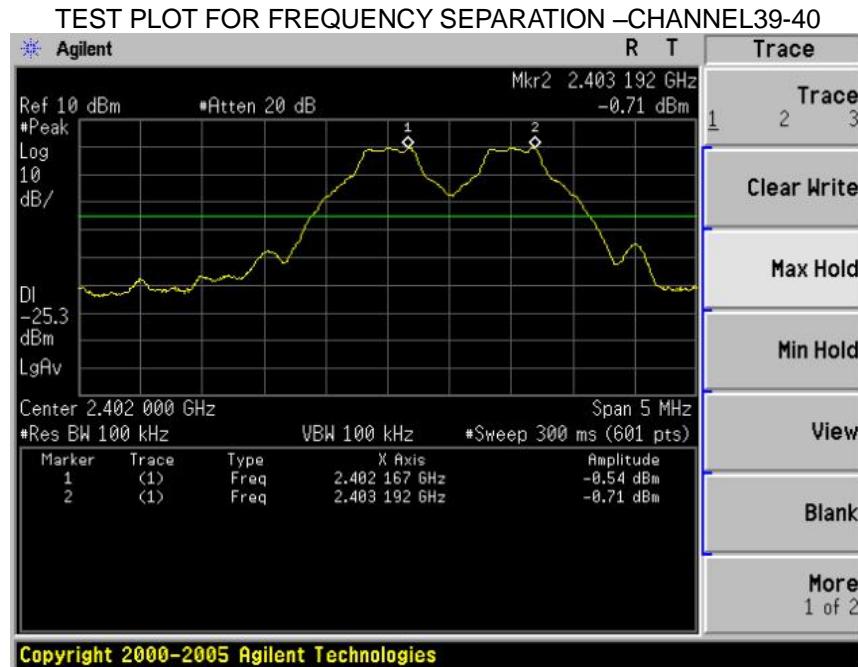

***** END OF REPORT *****

Copyright is owned by Standard Technology Union Co., Ltd and this report shall not be reproduced unless with prior written approval of the issuing company.

STU Standard Technology Union Co., Ltd

No.202, Building A, Yushu Industrial Park, Science City, GuangZhou, Guangdong, China

Tel: +86-20-822019555, Fax: +86-20-82019556, E-mail: marketing@stu-lab.com, website: www.stu-lab.com