

APPLICATION FOR CERTIFICATION

On Behalf of

Philips (China) Investment Co., Ltd.

LED Lamp

Model No. : 9290002618

Brand : Philips

FCC ID : O3M9290002618X

Prepared for

Philips (China) Investment Co., Ltd.

No. 9, Lane 888, Tian Lin Road, 200233, Shanghai, China

Prepared by

Audix Technology (Wujiang) Co., Ltd. EMC Dept.

No. 1289 Jiangxing East Road, the Part of Wujiang Economic Development Zone
Jiangsu China 215200

Tel : +86-512-63403993

Fax : +86-512-63403339

Report Number : ACWE-F1307001A

Date of Test : Jul.02~07, 2014

Date of Report : Jul.16, 2014

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. DESCRIPTION OF VERSION.....	5
2. SUMMARY OF MEASUREMENTS AND RESULTS	6
3. GENERAL INFORMATION.....	7
3.1. Description of Device (EUT).....	7
3.2. Description of Test Facility	8
3.3. Measurement Uncertainty	8
4. CONDUCTED EMISSION MEASUREMENT	9
4.1. Test Equipment.....	9
4.2. Block Diagram of Test Setup.....	9
4.3. Power line Conducted Emission Limit	9
4.4. Test Procedure	10
4.5. Conducted Emission Measurement Results.....	10
5. RADIATED EMISSION MEASUREMENT	17
5.1. Test Equipment.....	17
5.2. Block Diagram of Test Setup.....	17
5.3. Radiated Emission Limits	19
5.4. Test Procedure	19
5.5. Assessment In All Three Orthogonal Planes	20
5.6. Measurement Results	21
5.7. Restricted Bands Measurement Results (For Below 1GHz).....	22
5.8. Restricted Bands Measurement Results (For Above 1GHz)	26
5.9. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205).....	30
6. 6 DB BANDWIDTH MEASUREMENT	38
6.1. Test Equipment.....	38
6.2. Block Diagram of Test Setup.....	38
6.3. Specification Limits (§15.247(a)(2))	38
6.4. Test Procedure	38
6.5. Test Results.....	38
7. MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	41
7.1. Test Equipment.....	41
7.2. Block Diagram of Test Setup.....	41
7.3. Specification Limits (§15.247(b)(3)).....	41
7.4. Test Procedure	41
7.5. Test Results.....	42
8. BAND EDGES MEASUREMENT	43
8.1. Test Equipment.....	43
8.2. Block Diagram of Test Setup.....	43
8.3. Specification Limits (§15.247(d)).....	43
8.4. Test Procedure	43
8.5. Test Results.....	43
9. POWER SPECTRAL DENSITY MEASUREMENT	45
9.1. Test Equipment.....	45
9.2. Block Diagram of Test Setup.....	45
9.3. Specification Limits (§15.247(e)).....	45
9.4. Test Procedure	45
9.5. Test Results.....	45

10. EMISSION LIMITATIONS MEASUREMENT.....	48
10.1. Test Equipment.....	48
10.2. Block Diagram of Test Setup	48
10.3. Specification Limits (§15.247(d))	48
10.4. Test Procedure	48
10.5. Test Results	49
11. DUTY CYCLE	59
11.1. Test Equipment.....	59
11.2. Test Results	59
12. DEVIATION TO TEST SPECIFICATIONS	60

TEST REPORT CERTIFICATION

Applicant : Philips (China) Investment Co., Ltd.
 Manufacturer #1 : Changan Win Channel Electronics Company Limited
 Manufacturer #2 : Arts Electronics Co., Ltd.
 EUT Description : LED Lamp
 FCC ID : 03M9290002618X
 (A) Model No. : 9290002618
 (B) Brand : Philips
 (C) Power Supply : AC 110-130V; 50/60Hz; 6.5W
 (D) Test Voltage : AC 120V, 60Hz

Applicable Standards:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2012
ANSI C63.4-2003
KDB 558074 D01 DTS Meas Guidance v03r02

The device described above was tested by Audix Technology (Wujiang) Co., Ltd. EMC Dept. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C section 15.207, 15.205, 15.209&15.247 limits.

The measurement results are contained in this test report and Audix Technology (Wujiang) Co., Ltd. EMC Dept. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliant with the FCC limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Wujiang) Co., Ltd. EMC Dept.


Date of Test: Jul.02~07, 2014

Date of Report: Jul.16, 2014

Prepared by :


 (Emma Hu/Assistant Administrator)

Reviewer :


 (Danny Sun/Deputy Section Manager)

Approved & Authorized Signer :


 (Ken Lu/ Assistant General Manager)

1. Description of Version

Edition No.	Date of Rev.	Summary	Report No.
0	Mar.14, 2014	Original Report.	ACWE-F1307001
Rev. A	Jul.16, 2014	(1) Add RC latch before driver on power board; (2) Add alternative LED chip.	ACWE- F1307001A

2. SUMMARY OF MEASUREMENTS AND RESULTS

The EUT has been tested according to the applicable standards and test results are referred as below.

Description of Test Item	Standard	Results	Remark
CONDUCTED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.207 And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	Minimum passing margin is 11.18 dB at 0.39 MHz
RADIATED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.209& Section 15.205 And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	Minimum passing margin is 1.09 dB at 59.22MHz
6 dB BANDWIDTH	FCC 47 CFR Part 15 Subpart C/ Section 15.247(a)(2) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	Minimum passing margin is 314.5 kHz at CH 11
MAXIMUM PEAK OUTPUT POWER	FCC 47 CFR Part 15 Subpart C/ Section 15.247(b)(3) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	Minimum passing margin is 26.003dB at CH 26
BAND EDGES	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	---
POWER SPECTRAL DENSITY	FCC 47 CFR Part 15 Subpart C/ Section 15.247(e) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	Minimum passing margin is 24.997dB at CH 26
EMISSION LIMITATIONS	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.4-2003 And KDB 558074 D01 DTS Meas Guidance v03r02	PASS	---

3. GENERAL INFORMATION

3.1. Description of Device (EUT)

Description	:	LED Lamp
Model No.	:	9290002618
FCC ID	:	O3M9290002618X
Brand	:	Philips
Applicant	:	Philips (China) Investment Co., Ltd. No. 9, Lane 888, Tian Lin Road, 200233, Shanghai, China
Manufacturer #1	:	Changan Win Channel Electronics Company Limited No.85, Tong Gu Xia Lu, Shangjiao Community, Changan Town, Dongguan City, Guangdong Province, China
Manufacturer #2	:	Arts Electronics Co., Ltd. Shangxing Lu, Shangjiao Community, Changan Town, Dongguan Guangdong523000 China
Radio Technology	:	IEEE 802.15.4 (ZigBee®)
Antenna Gain	:	-10dBi
Fundamental Range	:	2405 MHz -2480MHz
Tested Frequency	:	2405MHz (CH11) 2450MHz (CH20) 2480MHz (CH26)
Highest Working Frequency	:	2.4GHz
Modulation type	:	O-QPSK
Date of Receipt of Sample	:	Jul.01, 2014
Date of Test	:	Jul.02~07, 2014

3.2. Description of Test Facility

Name of Firm : **Audix Technology (Wujiang) Co., Ltd. EMC Dept.**

Site Location : No. 1289 Jiangxing East Road, the Eastern Part of
Wujiang Economic Development Zone
Jiangsu China 215200

Test Facilities : **No.1 Conducted Shielding Enclosure**

No.1 3m Semi-anechoic Chamber
Date of Validity: May. 23, 2015
FCC Registration No.: 897661
IC Registration No.:5183D-2

RF Fully Chamber

NVLAP Lab Code : 200786-0
(NVLAP is a NATA accredited body under Mutual
Recognition Agreement)
Valid until on Sep.30, 2014

3.3. Measurement Uncertainty

Test Item	Range Frequency	Uncertainty
Conducted Disturbance Measurement	0.15MHz ~ 30MHz	$\pm 2.48\text{dB}$
Radiated Disturbance Measurement (At 3m Chamber)	Below 1GHz	$\pm 3.42\text{dB}$
Radiated Disturbance Measurement (At 3m Chamber)	Above 1GHz	$\pm 4.49\text{dB}$

Remark: Uncertainty = $k_{uc}(y)$

Test Item	Uncertainty
6 dB Bandwidth	$\pm 3.1 \times 10^{-6} \text{ MHz}$
Maximum Peak Output Power	$\pm 0.30\text{dB}$
Band Edges	$\pm 0.302\text{dB}$
Power Spectral Density	$\pm 0.212\text{dB}$
Emission Limitations	$\pm 0.24\text{dB}$


Remark: Uncertainty = $k_{uc}(y)$

4. CONDUCTED EMISSION MEASUREMENT

4.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R & S	ESCI	100352	2014-01-05	2015-01-04
2.	A.M.N	R&S	ESH2-Z5	100153	2014-05-15	2015-05-14
3.	Pulse Limiter	R&S	ESH3-Z2	100605	2013-08-06	2014-08-05
4.	RF Cable	Harbour Industries	RG400	002	2014-03-24	2015-03-23

4.2. Block Diagram of Test Setup

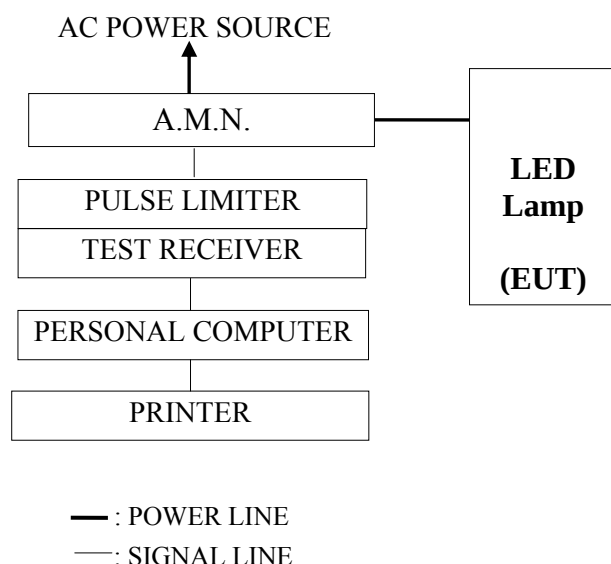

4.3. Power line Conducted Emission Limit

4.3.1. Power line Conducted Emission Limit (FCC Part 15, Section 15.207, Class B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2: The lower limit applies at the band edges.

4.4. Test Procedure

The measuring process is according to ANSI C63.4-2003 and laboratory internal procedure TKC-301-015. (For FCC Part15 Subpart C)

In the conducted emission measurement, the EUT and all peripheral devices were set up on a non-metallic table which was 0.8 meters height above the ground plane, and 0.4 meters far away from the vertical plane. The EUT (installed in PC system) was powered by AC mains through Artificial Mains Network (A.M.N), other peripheral devices were powered by AC mains through the second Line Impedance Stabilization Network (L.I.S.N). For the measurement, the A.M.N measuring port was terminated by a 50Ω measuring equipment and the second L.I.S.N measuring port was terminated by a 50Ω resistive load. All measurements were done on the phase and neutral line of the EUT's power cord. All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver was set at 9 kHz.

The required frequency band (0.15 MHz ~ 30 MHz) was pre-scanned with peak detector, the final measurement was measured with quasi-peak detector and average detector. (If the average limit is met when using a quasi-peak detector, the average detector is necessary).

The emission level is calculated automatically by the test system which uses the following equation:

Emission level (dBμV) = Meter-Reading (dBμV) + A.M.N factor (dB) + Cable loss (dB).

(Cable loss include pulse limiter loss)

4.5. Conducted Emission Measurement Results

4.5.1. Conducted Emission Measurement Results (For FCC Part15 Subpart C)

PASSED.

(All the emissions not reported below are too low against the prescribed limits.)

EUT was performed during this section testing and all the test results are attached in next pages.

Test Date : Jul.02, 2014 Temperature : 23.3 Humidity : 63%

Mode	Test Condition	Reference Test Data No.	
		Neutral	Line
1	CH 11	# 5	# 6
2	CH 20	# 7	# 8
3	CH 26	# 9	# 10

NOTE 1- ' ' means the worst test mode.

NOTE 2- The worst emission is detected at 0.39 MHz with emission level of 36.91 dB (μV) and with AV detector (Limit is 48.09 dB (μV)), when the Neutral of the EUT is connected to AMN.




Audix Technology (Wu Jiang) Co., Ltd
No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
Economic Development Zone, JiangSu, China
Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 5

File: F:\2013Test Data\Report\06\G1306019R1.EM6 (10)

Date: 2014-07-02

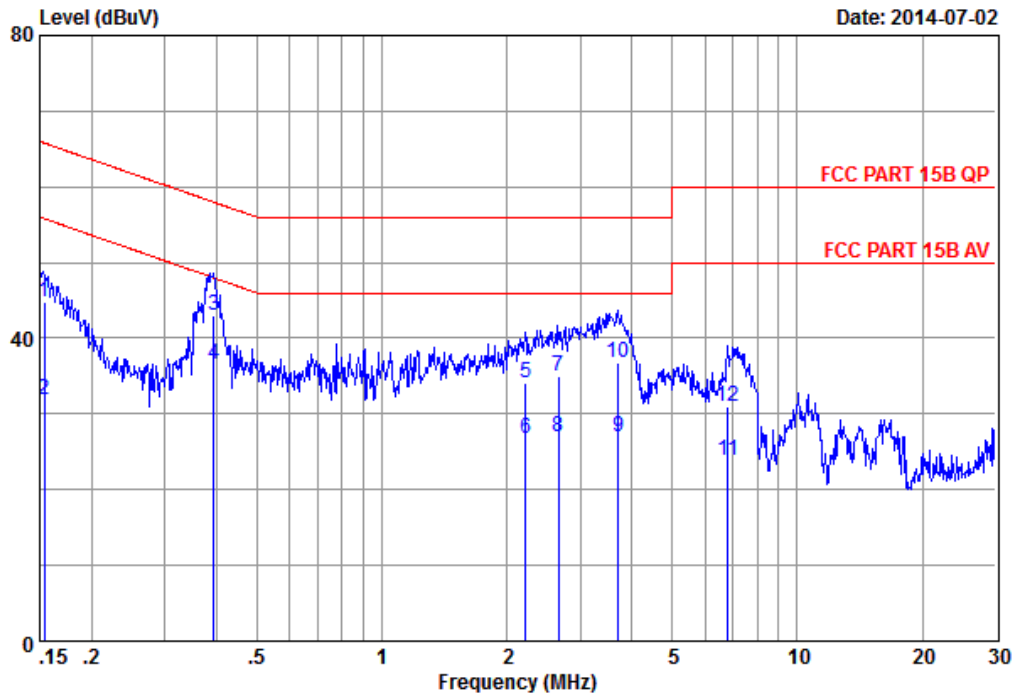

Site no. : No.1 Conducted shielding Enclosure Data no. : 5
AMN/LISN : ESH2-Z5-1405 Phase : NEUTRAL
Limit : FCC PART 15B QP
Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test mode : Transmitting
Memo : CH11

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.13	9.86	34.91	44.90	65.78	20.88	QP
2	0.15	0.13	9.86	21.91	31.90	55.78	23.88	Average
3	0.39	0.14	9.87	32.90	42.91	57.98	15.07	QP
4	0.39	0.14	9.87	26.60	36.61	47.98	11.37	Average
5	2.22	0.21	9.90	23.90	34.01	56.00	21.99	QP
6	2.22	0.21	9.90	16.60	26.71	46.00	19.29	Average
7	2.66	0.22	9.91	24.90	35.03	56.00	20.97	QP
8	2.66	0.22	9.91	16.90	27.03	46.00	18.97	Average
9	3.71	0.25	9.92	16.90	27.07	46.00	18.93	Average
10	3.71	0.25	9.92	26.60	36.77	56.00	19.23	QP
11	6.81	0.32	9.97	13.60	23.89	50.00	26.11	Average
12	6.81	0.32	9.97	20.60	30.89	60.00	29.11	QP

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co., Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 6

File: F:\2013Test Data\Report\06\G1306019R1.EM6 (10)

Date: 2014-07-02

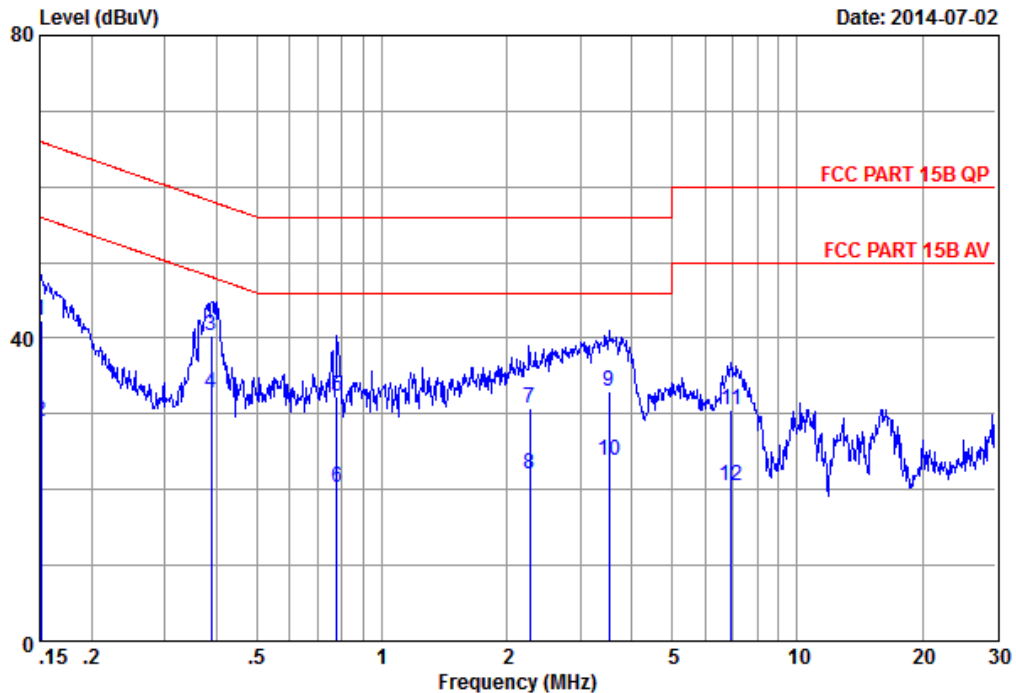

Site no. : No.1 Conducted shielding Enclosure Data no. : 6
 AMN/LISN : ESH2-Z5-1405 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test mode : Transmitting
 Memo : CH11

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.19	9.86	32.30	42.35	65.94	23.59	QP
2	0.15	0.19	9.86	18.90	28.95	55.94	26.99	Average
3	0.39	0.19	9.87	30.20	40.26	58.09	17.83	QP
4	0.39	0.19	9.87	22.60	32.66	48.09	15.43	Average
5	0.78	0.20	9.88	22.20	32.28	56.00	23.72	QP
6	0.78	0.20	9.88	10.20	20.28	46.00	25.72	Average
7	2.27	0.25	9.90	20.60	30.75	56.00	25.25	QP
8	2.27	0.25	9.90	11.90	22.05	46.00	23.95	Average
9	3.53	0.27	9.92	22.90	33.09	56.00	22.91	QP
10	3.53	0.27	9.92	13.60	23.79	46.00	22.21	Average
11	6.92	0.32	9.97	20.20	30.49	60.00	29.51	QP
12	6.92	0.32	9.97	10.20	20.49	50.00	29.51	Average

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co., Ltd
 No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
 Economic Development Zone, JiangSu, China
 Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 7

File: F:\2013Test Data\Report06\G1306019R1.EM6 (10)

Date: 2014-07-02

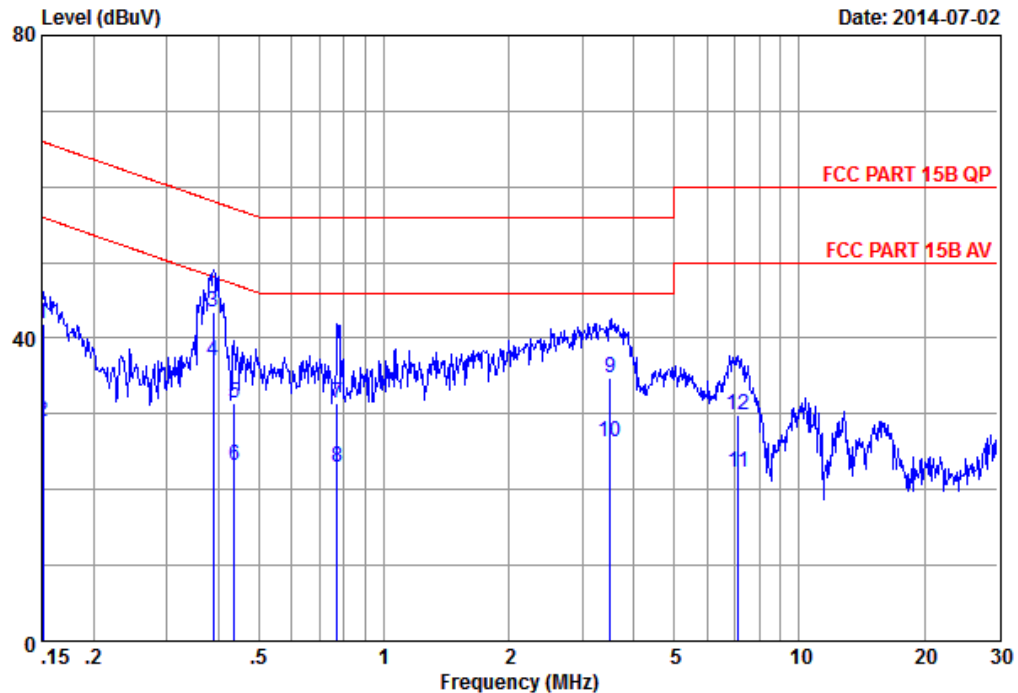

Site no. : No.1 Conducted shielding Enclosure Data no. : 7
 AMN/LISN : ESH2-Z5-1405 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test mode : Transmitting
 Memo : CH20

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.13	9.86	31.91	41.90	65.94	24.04	QP
2	0.15	0.13	9.86	18.91	28.90	55.94	27.04	Average
3	0.39	0.14	9.87	33.50	43.51	58.09	14.58	QP
4	0.39	0.14	9.87	26.90	36.91	48.09	11.18	Average
5	0.44	0.15	9.87	21.49	31.51	57.15	25.64	QP
6	0.44	0.15	9.87	13.09	23.11	47.15	24.04	Average
7	0.77	0.16	9.88	21.40	31.44	56.00	24.56	QP
8	0.77	0.16	9.88	12.90	22.94	46.00	23.06	Average
9	3.51	0.24	9.92	24.50	34.66	56.00	21.34	QP
10	3.51	0.24	9.92	16.10	26.26	46.00	19.74	Average
11	7.13	0.33	9.97	11.90	22.20	50.00	27.80	Average
12	7.13	0.33	9.97	19.50	29.80	60.00	30.20	QP

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co., Ltd
No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
Economic Development Zone, JiangSu, China
Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 8

File: F:\2013Test Data\Report\06\G1306019R1.EM6 (10)

Date: 2014-07-02

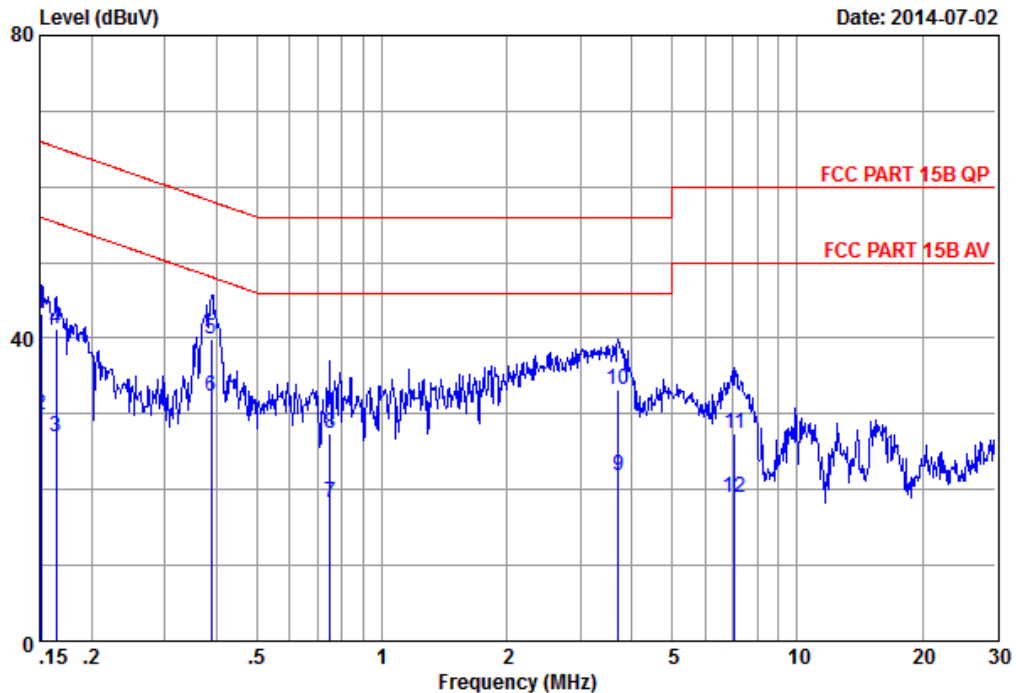

Site no. : No.1 Conducted shielding Enclosure Data no. : 8
AMN/LISN : ESH2-Z5-1405 Phase : LINE
Limit : FCC PART 15B QP
Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test mode : Transmitting
Memo : CH20

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.19	9.86	33.10	43.15	65.94	22.79	QP
2	0.15	0.19	9.86	19.90	29.95	55.94	25.99	Average
3	0.16	0.19	9.86	17.00	27.05	55.26	28.21	Average
4	0.16	0.19	9.86	31.10	41.15	65.26	24.11	QP
5	0.39	0.19	9.87	29.90	39.96	58.09	18.13	QP
6	0.39	0.19	9.87	22.30	32.36	48.09	15.73	Average
7	0.75	0.20	9.88	8.30	18.38	46.00	27.62	Average
8	0.75	0.20	9.88	17.40	27.48	56.00	28.52	QP
9	3.71	0.27	9.92	11.61	21.80	46.00	24.20	Average
10	3.71	0.27	9.92	22.91	33.10	56.00	22.90	QP
11	7.06	0.32	9.97	17.20	27.49	60.00	32.51	QP
12	7.06	0.32	9.97	8.60	18.89	50.00	31.11	Average

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co., Ltd
No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
Economic Development Zone, JiangSu, China
Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 9

File: F:\2013Test Data\Report\06\G1306019R1.EM6 (10)

Date: 2014-07-02

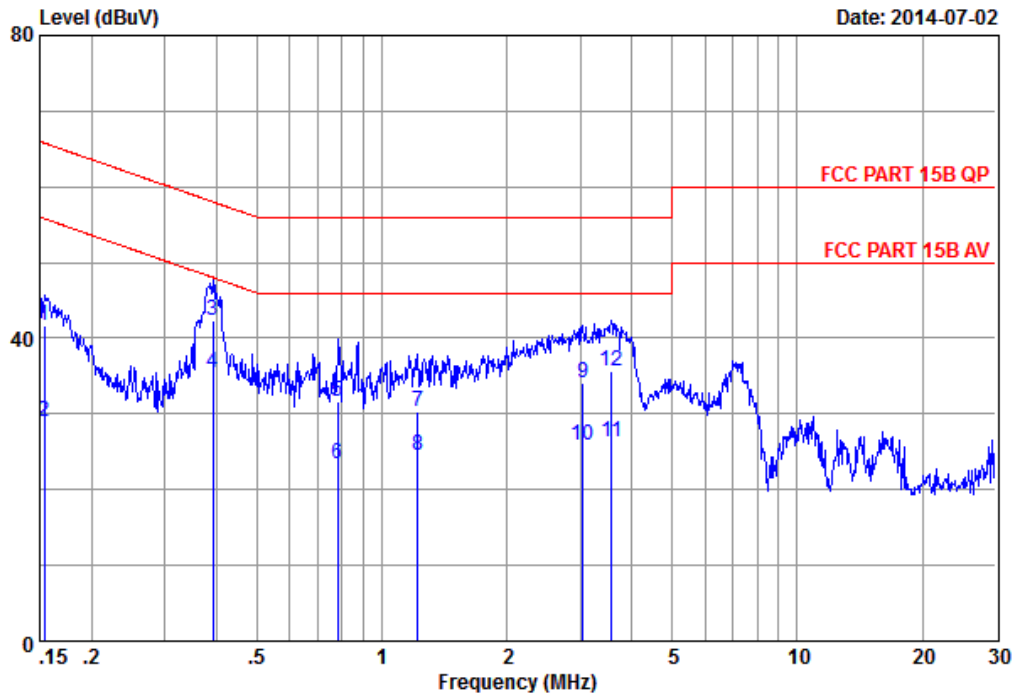

Site no. : No.1 Conducted shielding Enclosure Data no. : 9
AMN/LISN : ESH2-Z5-1405 Phase : NEUTRAL
Limit : FCC PART 15B QP
Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test mode : Transmitting
Memo : CH26

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.13	9.86	31.61	41.60	65.78	24.18	QP
2	0.15	0.13	9.86	18.91	28.90	55.78	26.88	Average
3	0.39	0.14	9.87	32.30	42.31	58.02	15.71	QP
4	0.39	0.14	9.87	25.50	35.51	48.02	12.51	Average
5	0.78	0.16	9.88	21.60	31.64	56.00	24.36	QP
6	0.78	0.16	9.88	13.30	23.34	46.00	22.66	Average
7	1.22	0.18	9.89	20.19	30.26	56.00	25.74	QP
8	1.22	0.18	9.89	14.49	24.56	46.00	21.44	Average
9	3.05	0.23	9.91	23.90	34.04	56.00	21.96	QP
10	3.05	0.23	9.91	15.60	25.74	46.00	20.26	Average
11	3.57	0.24	9.92	16.21	26.37	46.00	19.63	Average
12	3.57	0.24	9.92	25.51	35.67	56.00	20.33	QP

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.




Audix Technology (Wu Jiang) Co., Ltd
No.1289, Jiang Xing East Road, The Eastern Part of WuJiang
Economic Development Zone, JiangSu, China
Tel : (0512) 63403993 Fax: (0512) 63403339

Data: 10

File: F:\2013Test Data\Report\06\G1306019R1.EM6 (10)

Date: 2014-07-02

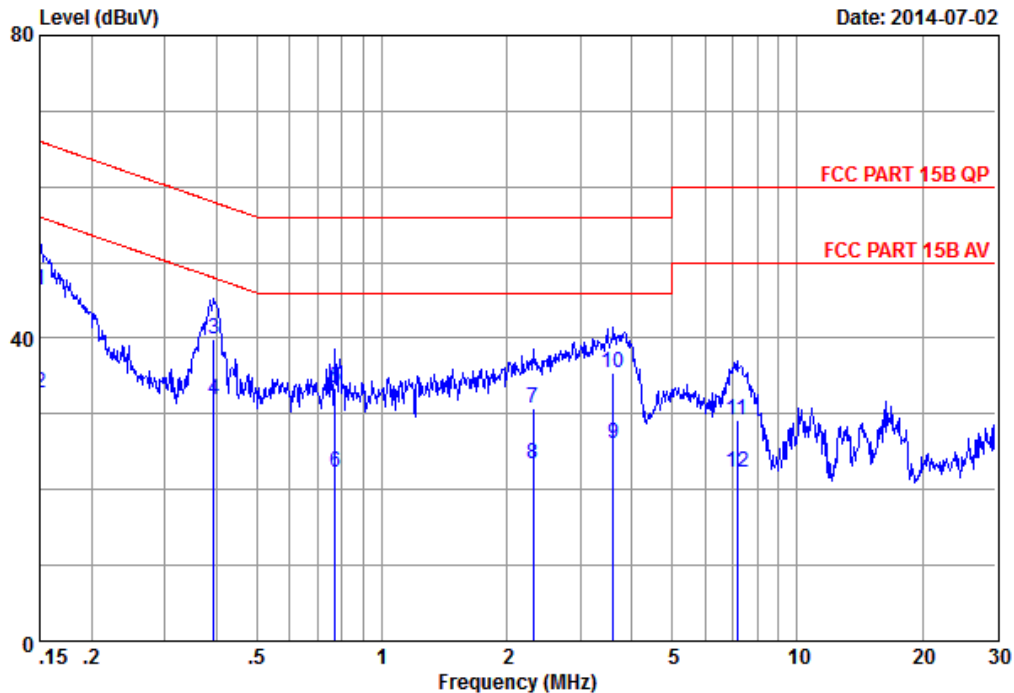

Site no. : No.1 Conducted shielding Enclosure Data no. : 10
AMN/LISN : ESH2-Z5-1405 Phase : LINE
Limit : FCC PART 15B QP
Env. / Ins. : 23.3°C&63%/ESCI Engineer : KM.Tong
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test mode : Transmitting
Memo : CH26

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.19	9.86	36.40	46.45	66.00	19.55	QP
2	0.15	0.19	9.86	22.80	32.85	56.00	23.15	Average
3	0.39	0.19	9.87	29.90	39.96	57.98	18.02	QP
4	0.39	0.19	9.87	21.80	31.86	47.98	16.12	Average
5	0.77	0.20	9.88	23.30	33.38	56.00	22.62	QP
6	0.77	0.20	9.88	12.10	22.18	46.00	23.82	Average
7	2.31	0.25	9.90	20.60	30.75	56.00	25.25	QP
8	2.31	0.25	9.90	13.20	23.35	46.00	22.65	Average
9	3.61	0.27	9.92	15.90	26.09	46.00	19.91	Average
10	3.61	0.27	9.92	25.20	35.39	56.00	20.61	QP
11	7.18	0.32	9.97	18.80	29.09	60.00	30.91	QP
12	7.18	0.32	9.97	12.10	22.39	50.00	27.61	Average

1. Emission Level = AMN Factor + Cable Loss + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

5. RADIATED EMISSION MEASUREMENT


5.1. Test Equipment

The following test equipment was used during the radiated emission measurement:
At 3m Semi-Anechoic Chamber


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Preamplifier	Agilent	8449B	2944A10921	2013-08-14	2014-08-13
2.	Preamplifier	Agilent	8447D	2944A10921	2013-08-14	2014-08-13
3.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22
4.	Test Receiver	R&S	ESCI	100361	2014-01-05	2015-01-04
5.	Bi-log Antenna	Schaffner	CBL6112D	22251	2014-04-09	2015-04-08
6.	Horn Antenna	EMCO	3115	00062960	2014-05-20	2015-05-19
7.	Horn Antenna	EMCO	3116	00062641	2013-06-08	2015-06-07
8.	Test Receiver	R&S	ESCI	100361	2014-01-05	2015-01-04
9.	RF Cable #1	Yuhang CSYH	cable-3m	001(0.5m)	2013-08-13	2014-08-12
10.	RF Cable #2	Yuhang CSYH	cable-3m	002(0.5m)	2013-08-13	2014-08-12
11.	RF Cable #3	Yuhang CSYH	cable-3m	003(3.0m)	2013-08-13	2014-08-12

5.2. Block Diagram of Test Setup


5.2.1. Block Diagram of Test Setup between EUT and simulators

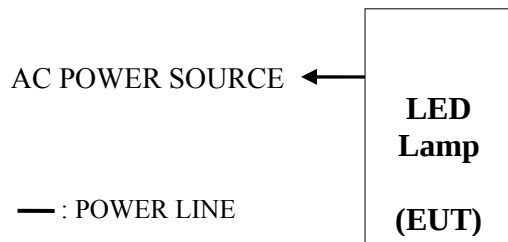

5.2.2. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance:3m) for 30-1000MHz

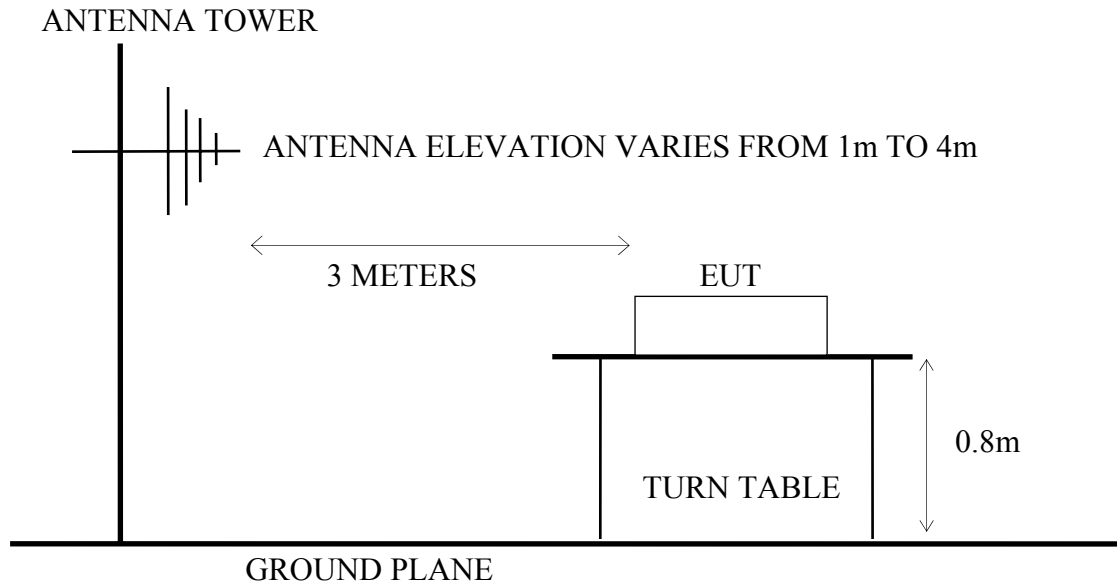

5.2.3. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance: 3m) for above 1GHz

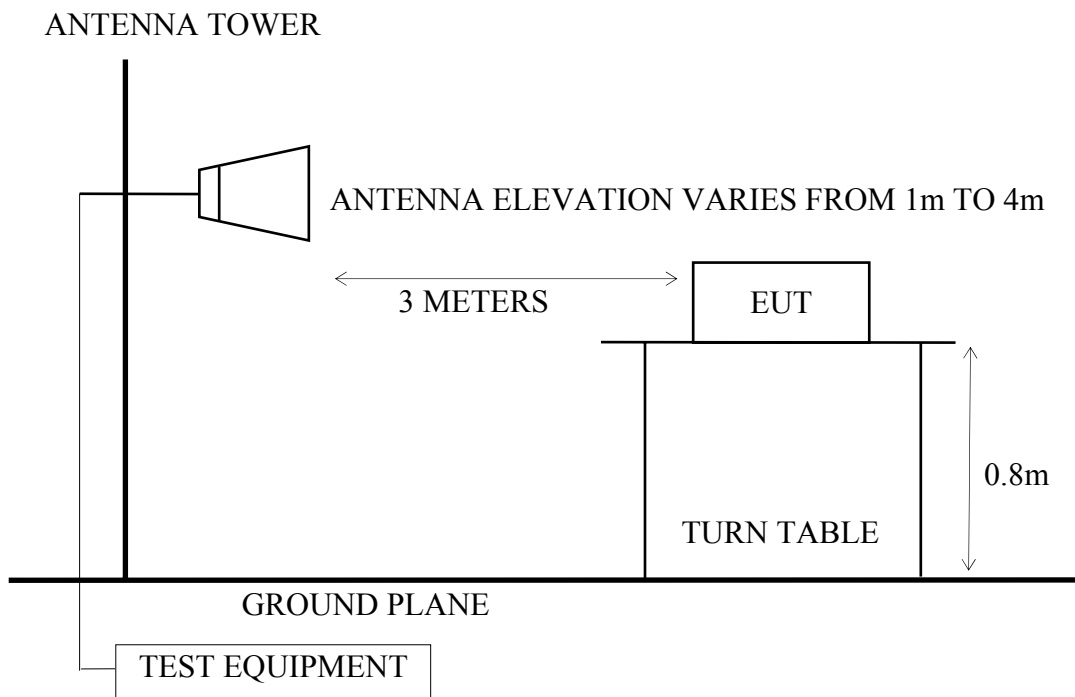

5.3. Radiated Emission Limits

Radiated Emission Limits (FCC Part15 C, section 15.209, CISPR22)

Frequency MHz	Distance Meters	Field Strengths Limits
		dB μ V/m
30 ~ 230	10	30.0
230 ~ 1000	10	37.0
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)

Remark : (1) Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
(2)The tighter limit applies at the edge between two frequency bands.

5.4. Test Procedure

The measuring process is according to ANSI C63.4-2003 and laboratory internal procedure TKC-301-024. (For FCC Part15 Subpart C)

In the radiated disturbance measurement, the EUT and all simulators were set up on a non-metallic turn table which was 0.8 meters above the ground plane. Measurement distance between EUT and receiving antennas was set at 10 meters at 30MHz~1000MHz and 3 meters at above 1GHz. The specified distance is the distance between the antennas and the closest periphery of EUT. During the radiated measurement, the EUT was rotated 360° and receiving antennas were moved from 1 ~ 4 meters for finding maximum emission. Two receiving antennas were used for both horizontal and vertical polarization detection for 30MHz~1GHz, One receiving antennas was used for both horizontal and vertical polarization detection for above 1GHz (the absorbing material was added when testing of above 1GHz was done). All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver (or spectrum analyzer) was set to:

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz
RBW (1 MHz), VBW (1MHz) for Peak detector above 1GHz
RBW (1 MHz), VBW (1MHz) for AV detector above 1GHz

The required frequency band (30 MHz ~ 12000 MHz) was pre-scanned with peak detector; all final measurements were measured with quasi-peak detector below 1GHz, measured with average detector and peak detector above 1GHz.

The emission level is calculated automatically by the test system which uses the following equation :

- For 30-1000MHz measurement:
Emission Level (dB μ V/m) = Meter-Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss (dB)
- For Above 1GHz measurement:
Emission Level (dB μ V/m) = Meter-Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss(dB)
-Pre-amplifier factor (dB)

5.5. Assessment In All Three Orthogonal Planes

After assessment in all three orthogonal planes, when choosing Channel11 test in the radiation, found that YZ plan is the worst mode in Horizontal and XZ plan is the worst mode in Vertical, so in the test of radiation, all with YZ plan(in Horizontal) & XZ plan(in Vertical) model test, refer to the following specific data.

Test Mode:XY Plan

Polarization	Frequency (MHz)	Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2405.60	90.58	28.46	6.40	34.81	90.63	74.00	-16.63	Peak
Vertical	2404.58	88.83	28.46	6.40	34.81	88.88	74.00	-14.88	Peak

Test Mode:XZ Plan

Polarization	Frequency (MHz)	Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2404.55	95.06	28.46	6.40	34.81	95.11	74.00	-21.11	Peak
Vertical	2404.58	98.51	28.46	6.40	34.81	98.56	74.00	-24.56	Peak

Test Mode:YZ Plan

Polarization	Frequency (MHz)	Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)	Remark
Horizontal	2404.58	95.74	28.46	6.40	34.81	95.79	74.00	-21.79	Peak
Vertical	2404.55	93.93	28.46	6.40	34.81	93.98	74.00	-19.98	Peak

5.6. Measurement Results

PASSED

(All the emissions not reported below are too low against the prescribed limits.)

5.6.1. For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 4.6 & 4.7.
(The restricted bands defined in part 15.205(a))

For Frequency range : below 1GHz

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 29	# 30
2.		2450MHz (Channel 20)	# 31	# 32
3.		2480MHz (Channel 26)	# 33	# 34
4.	Receiving		# 35	# 36

For Frequency range : above 1GHz

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 37	# 38
2.		2450MHz (Channel 20)	# 39	# 40
3.		2480MHz (Channel 26)	# 41	# 42
4.	Receiving		# 43	# 44

5.6.2. For Band Edge Emission

The EUT was tested in restricted bands and all the test results are listed in section 4.8. The restricted bands defined in part 15.205(a))

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 21, # 23	# 22, # 24
2.		2480MHz (Channel 26)	# 25, # 27	# 26, # 28

5.7. Restricted Bands Measurement Results (For Below 1GHz)



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :29
Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : HORIZONTAL
Limit : FCC PART 15 CLASS B
Env. / Ins. : 22.8*CS2%/ESCI Engineer : boqiang_li
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test Mode : TX CH11 2405MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	56.19	6.67	0.45	46.91	26.68	40.00	13.32	QP
2	175.50	9.92	0.83	51.07	35.13	43.50	8.37	QP
3	191.02	9.80	1.00	47.81	31.99	43.50	11.51	QP
4	288.99	13.65	1.26	48.32	36.89	46.00	9.11	QP
5	323.91	14.58	1.41	46.90	36.36	46.00	9.64	QP
6	450.98	17.32	1.55	39.70	31.24	46.00	14.76	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :30
Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : VERTICAL
Limit : FCC PART 15 CLASS B
Env. / Ins. : 22.8*CS2%/ESCI Engineer : boqiang_li
EUT : LED Lamp
M/N : 9290002618
Power Rating : 120Vac/60Hz
Test Mode : TX CH11 2405MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	59.22	6.22	0.44	59.19	38.52	40.00	1.48	QP
2	70.74	6.75	0.49	51.78	31.76	40.00	8.24	QP
3	174.53	9.97	0.86	46.60	30.73	43.50	12.77	QP
4	292.87	13.60	1.33	43.61	32.18	46.00	13.82	QP
5	331.67	14.80	1.34	41.03	30.60	46.00	15.40	QP
6	439.34	16.89	1.59	43.63	34.84	46.00	11.16	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :31
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	59.10	6.23	0.44	50.08	29.42	40.00	10.58	QP
2	171.62	10.02	0.86	48.66	32.83	43.50	10.67	QP
3	295.78	13.69	1.34	48.67	37.33	46.00	8.67	QP
4	330.70	14.80	1.34	48.38	37.96	46.00	8.04	QP
5	447.10	17.24	1.56	42.58	34.07	46.00	11.93	QP
6	485.90	17.90	1.60	38.91	30.95	46.00	15.05	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :32
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : VERTICAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	59.22	6.22	0.44	58.99	38.32	40.00	1.68	QP
2	70.74	6.75	0.49	49.62	29.60	40.00	10.40	QP
3	175.50	9.92	0.83	47.08	31.14	43.50	12.36	QP
4	292.87	13.60	1.33	45.59	34.16	46.00	11.84	QP
5	323.91	14.58	1.41	44.70	34.16	46.00	11.84	QP
6	439.34	16.89	1.59	37.90	29.11	46.00	16.89	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :33
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	56.19	6.67	0.45	48.98	28.75	40.00	11.25	QP
2	62.01	6.00	0.44	48.36	27.49	40.00	12.51	QP
3	172.59	10.00	0.87	46.82	30.98	43.50	12.52	QP
4	295.78	13.69	1.34	46.41	35.07	46.00	10.93	QP
5	330.70	14.80	1.34	44.05	33.63	46.00	12.37	QP
6	450.98	17.32	1.55	40.75	32.29	46.00	13.71	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :34
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : VERTICAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	56.19	6.67	0.45	59.14	38.91	40.00	1.09	QP
2	70.74	6.75	0.49	50.90	30.88	40.00	9.12	QP
3	172.59	10.00	0.87	48.33	32.49	43.50	11.01	QP
4	288.02	13.60	1.25	50.07	38.59	46.00	7.41	QP
5	326.82	14.67	1.36	48.79	38.28	46.00	7.72	QP
6	431.58	16.94	1.59	45.32	36.63	46.00	9.37	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :35
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : RX
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	72.68	7.00	0.54	37.39	17.69	40.00	22.31	QP
2	175.50	9.92	0.83	51.57	35.63	43.50	7.87	QP
3	191.02	9.80	1.00	45.79	29.97	43.50	13.53	QP
4	288.02	13.60	1.25	48.63	37.15	46.00	8.85	QP
5	330.70	14.80	1.34	47.31	36.89	46.00	9.11	QP
6	436.43	16.83	1.60	40.09	31.27	46.00	14.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m chamber Data NO. :36
 Dis. / Ant. : 3m 6112D(22251)-1404-3M Ant. pol. : VERTICAL
 Limit : FCC PART 15 CLASS B
 Env. / Ins. : 22.8°C52%/ESCI Engineer : boqiang_li
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating : 120Vac/60Hz
 Test Mode : RX
 Memo :

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	58.13	6.38	0.44	58.68	38.17	40.00	1.83	QP
2	69.77	6.58	0.46	52.02	31.79	40.00	8.21	QP
3	172.59	10.00	0.87	46.68	30.84	43.50	12.66	QP
4	296.75	13.74	1.33	47.97	36.66	46.00	9.34	QP
5	331.67	14.80	1.34	49.44	39.01	46.00	6.99	QP
6	431.58	16.94	1.59	42.49	33.80	46.00	12.20	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

5.8. Restricted Bands Measurement Results (For Above 1GHz)



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH11 2405MHz
Memo :
Data NO. : 37
Ant. pol. : HORIZONTAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4810.00	33.01	9.10	37.97	34.34	45.74	74.00	28.26	Peak
2	7215.00	36.10	11.36	34.96	33.65	48.77	74.00	25.23	Peak
3	8224.00	37.48	12.06	35.97	33.19	52.32	74.00	21.68	Peak
4	9620.00	37.68	13.53	33.79	33.82	51.18	74.00	22.82	Peak
5	11010.00	38.92	14.22	34.19	33.57	53.76	74.00	20.24	Peak
6	12024.87	40.25	14.83	21.25	30.94	45.39	54.00	8.61	Average
7	12025.00	40.25	14.83	33.38	30.94	57.52	74.00	16.48	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel: (0512) 63403993 Fax: (0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH11 2405MHz
Memo :
Data NO. : 38
Ant. pol. : VERTICAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4808.00	33.00	9.10	44.25	34.34	52.01	74.00	21.99	Peak
2	7215.00	36.10	11.36	34.82	33.65	48.63	74.00	25.37	Peak
3	8448.00	37.66	12.23	35.89	33.23	52.55	74.00	21.45	Peak
4	9620.00	37.68	13.53	34.97	33.82	52.36	74.00	21.64	Peak
5	10324.00	37.47	13.52	35.47	33.96	52.50	74.00	21.50	Peak
6	12024.92	40.25	14.83	21.86	30.94	46.00	54.00	8.00	Average
7	12025.00	40.25	14.83	33.16	30.94	57.30	74.00	16.70	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512)63403993 Fax:(0512)63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH20 2450MHz
Memo :

Data NO. : 39
Ant. pol. : HORIZONTAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4900.00	33.15	9.19	35.95	34.33	43.96	74.00	30.04	Peak
2	5970.00	34.19	10.11	36.06	34.66	45.70	74.00	28.30	Peak
3	7350.00	36.53	11.33	34.12	33.57	48.41	74.00	25.59	Peak
4	8602.00	37.74	12.40	35.90	33.26	52.78	74.00	21.22	Peak
5	9800.00	37.64	13.90	34.88	33.96	52.46	74.00	21.54	Peak
6	12249.30	39.80	14.80	21.67	30.38	45.89	54.00	8.11	Average
7	12250.00	39.79	14.80	33.68	30.38	57.89	74.00	16.11	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512)63403993 Fax:(0512)63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH20 2450MHz
Memo :

Data NO. : 40
Ant. pol. : VERTICAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4906.00	33.16	9.19	41.52	34.33	49.54	74.00	24.46	Peak
2	7350.00	36.53	11.33	35.50	33.57	49.79	74.00	24.21	Peak
3	8252.00	37.50	12.05	35.90	33.19	52.26	74.00	21.74	Peak
4	9800.00	37.64	13.90	34.91	33.96	52.49	74.00	21.51	Peak
5	10716.00	38.06	13.83	35.38	33.78	53.49	74.00	20.51	Peak
6	12249.78	39.80	14.80	21.61	30.38	45.83	54.00	8.17	Average
7	12250.00	39.79	14.80	32.63	30.38	56.84	74.00	17.16	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512) 63403993 Fax:(0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH26 2480MHz
Memo :

Data NO. : 41
Ant. pol. : HORIZONTAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4960.00	33.24	9.21	38.01	34.32	46.14	74.00	27.86	Peak
2	6544.00	34.49	10.59	37.33	34.20	48.21	74.00	25.79	Peak
3	7440.00	36.81	11.38	36.16	33.51	50.84	74.00	23.16	Peak
4	8686.00	37.78	12.69	35.79	33.28	52.98	74.00	21.02	Peak
5	9920.00	37.62	13.48	33.92	34.06	50.96	74.00	23.04	Peak
6	12398.32	39.50	14.83	21.32	30.01	45.64	54.00	8.36	Average
7	12400.00	39.50	14.83	32.58	30.01	56.90	74.00	17.10	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512) 63403993 Fax:(0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH26 2480MHz
Memo :

Data NO. : 42
Ant. pol. : VERTICAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4962.00	33.24	9.21	41.14	34.32	49.27	74.00	24.73	Peak
2	6600.00	34.61	10.68	36.14	34.13	47.30	74.00	26.70	Peak
3	7440.00	36.81	11.38	34.48	33.51	49.16	74.00	24.84	Peak
4	8714.00	37.79	12.42	35.88	33.29	52.80	74.00	21.20	Peak
5	9920.00	37.62	13.48	34.61	34.06	51.65	74.00	22.35	Peak
6	12389.62	39.52	14.83	21.04	30.01	45.38	54.00	8.62	Average
7	12400.00	39.50	14.83	33.55	30.01	57.87	74.00	16.13	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512) 63403993 Fax:(0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : RX
Memo :

Data NO. : 43
Ant. pol. : HORIZONTAL
Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5060.00	33.39	9.28	36.48	34.34	44.81	74.00	29.19	Peak
2	6698.00	34.80	10.76	34.82	34.07	46.31	74.00	27.69	Peak
3	7804.00	37.18	11.83	33.94	33.28	49.67	74.00	24.33	Peak
4	9162.00	37.83	12.71	34.88	33.46	51.96	74.00	22.04	Peak
5	10436.00	37.43	13.65	33.59	33.91	50.76	74.00	23.24	Peak
6	11192.00	39.29	14.42	32.62	33.10	53.23	74.00	20.77	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512) 63403993 Fax:(0512) 63403993

Site NO. : 3m Semi-Anechoic Chamber
Dis. / Ant. : 3m 3115-62960-140520
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8°C52%/N9030A
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : RX
Memo :

Data NO. : 44
Ant. pol. : VERTICAL
Engineer : boqiang_li


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4486.00	32.51	8.82	36.53	34.36	43.50	74.00	30.50	Peak
2	6082.00	34.23	10.22	34.99	34.60	44.84	74.00	29.16	Peak
3	7454.00	36.86	11.38	34.70	33.51	49.43	74.00	24.57	Peak
4	8336.00	37.57	12.26	35.20	33.21	51.82	74.00	22.18	Peak
5	10044.00	37.58	13.42	35.24	34.10	52.14	74.00	21.86	Peak
6	11010.00	38.92	14.22	33.94	33.57	53.51	74.00	20.49	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.

5.9. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205)



Audix Technology(Wujiang)Co.,Ltd.
No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
Economic Development Zone,JiangSu,China
Tel:(0512) 63403993 Fax:(0512) 63403993

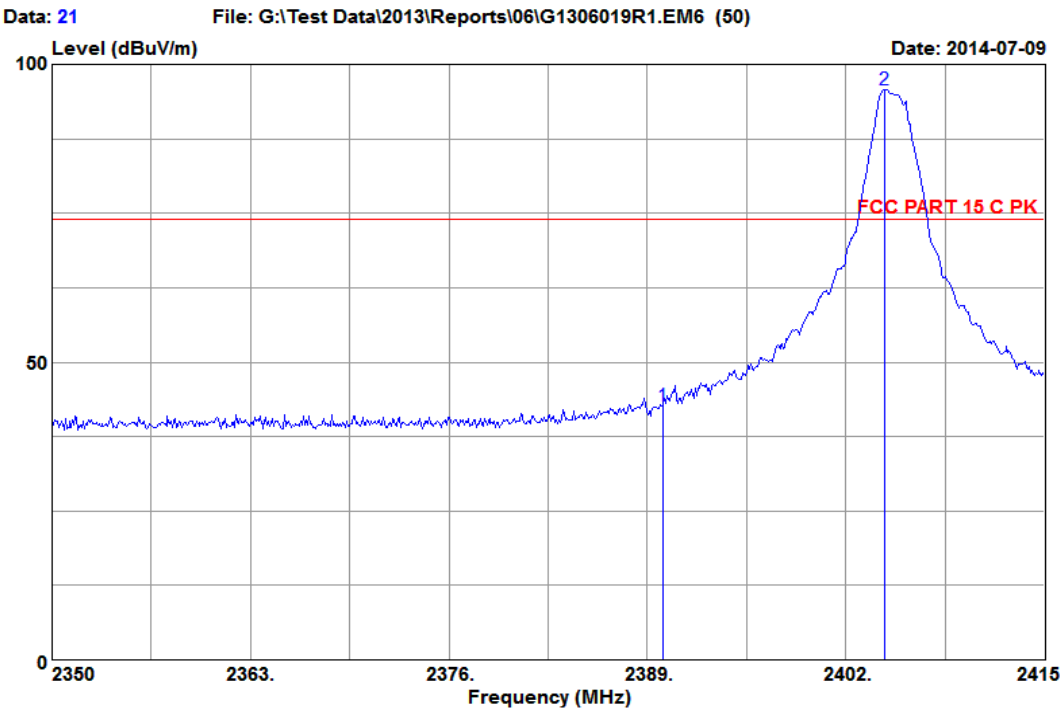

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 21
Dis. / Ant. : 3m 3115-62960-140520 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK
Env. / Ins. : 22.8*C52%/N9030A Engineer : boqiang_li
EUT : LED Lamp
M/N : 9290002618
Power Rating: 120Vac/60Hz
Test Mode : TX CH11 2405MHz
Memo :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.44	6.40	42.55	34.81	42.58	74.00	31.42	Peak
2	2404.57	28.46	6.40	95.69	34.81	95.74	74.00	-21.74	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 22

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

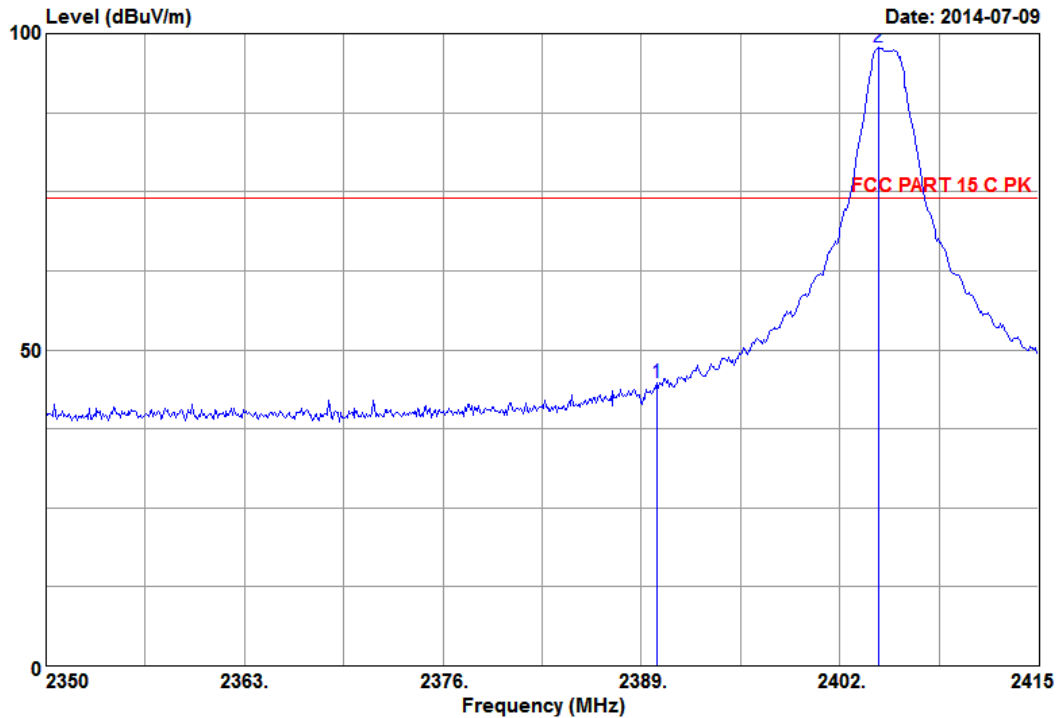

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C PK
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo :

Data NO. : 22
 Ant. pol. : VERTICAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.44	6.40	44.72	34.81	44.75	74.00	29.25	Peak
2	2404.57	28.46	6.40	97.76	34.81	97.81	74.00	-23.81	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 23

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

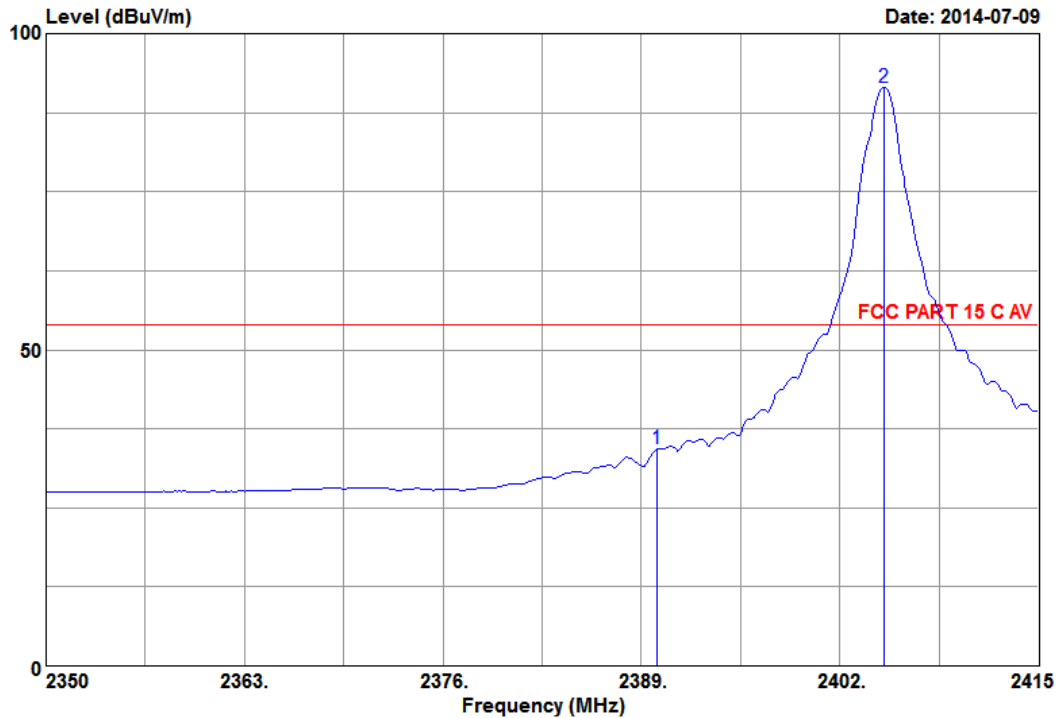

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C AV
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo :

Data NO. : 23
 Ant. pol. : HORIZONTAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.44	6.40	34.26	34.81	34.29	54.00	19.71	Average
2	2404.91	28.46	6.40	91.49	34.81	91.54	54.00	-37.54	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel:(0512) 63403993 Fax:(0512) 63403993

Data: 24

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

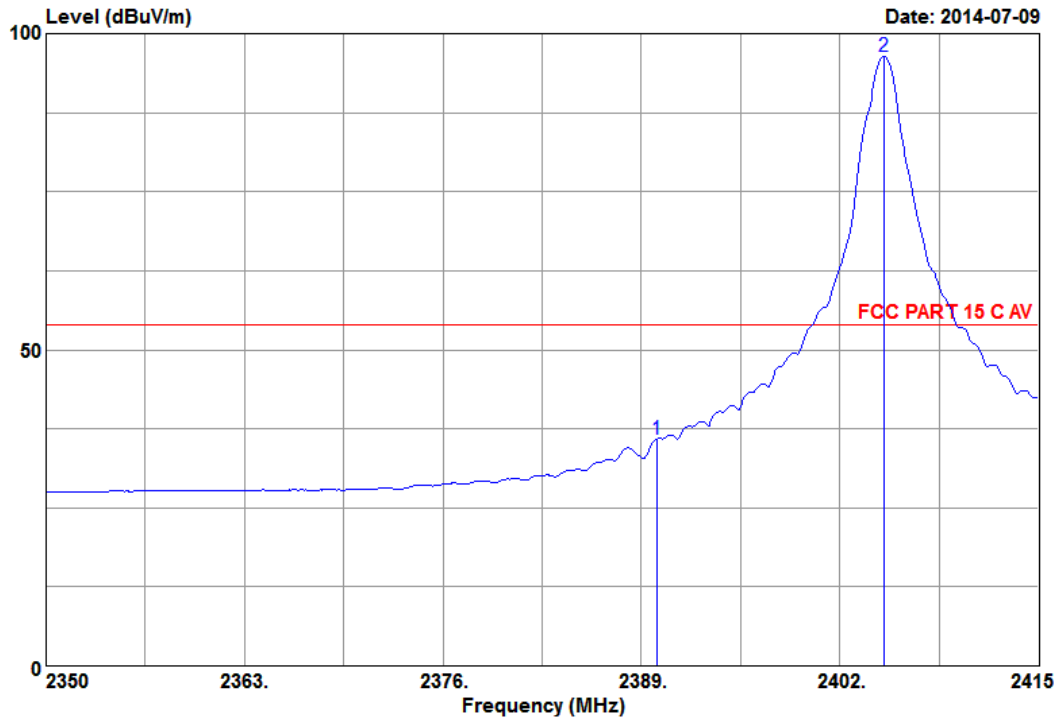

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C AV
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo :

Data NO. : 24
 Ant. pol. : VERTICAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.44	6.40	35.89	34.81	35.92	54.00	18.08	Average
2	2404.91	28.46	6.40	96.32	34.81	96.37	54.00	-42.37	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 25

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

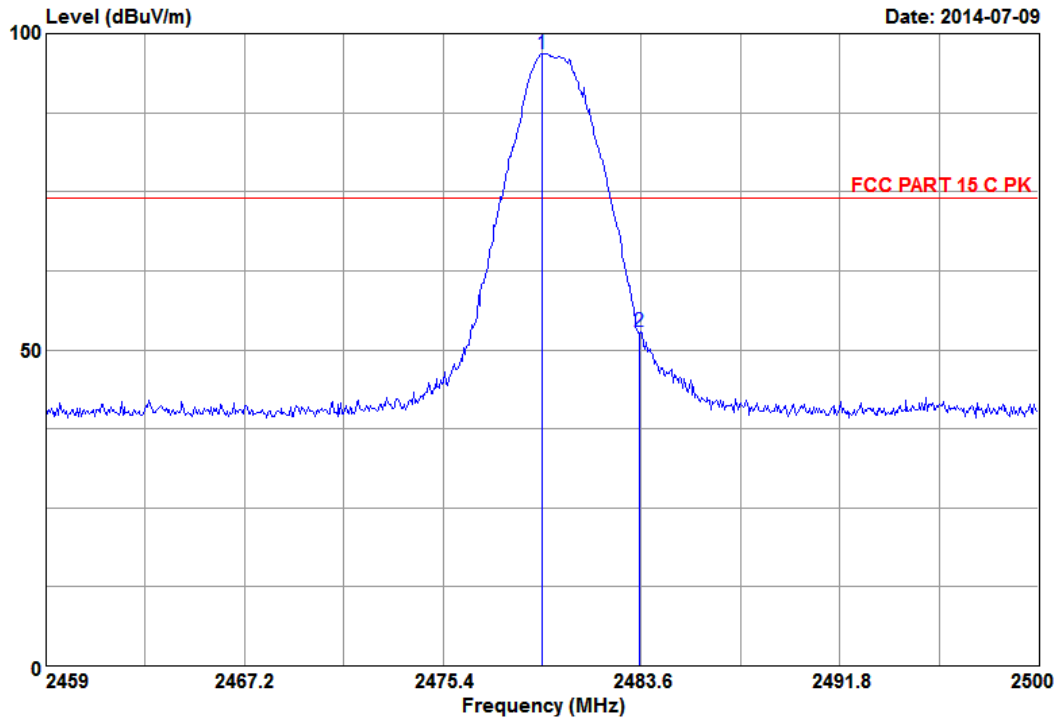

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C PK
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

Data NO. : 25
 Ant. pol. : HORIZONTAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.50	28.57	6.44	96.57	34.79	96.79	74.00	-22.79	Peak
2	2483.50	28.58	6.44	52.62	34.79	52.85	74.00	21.15	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 26

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

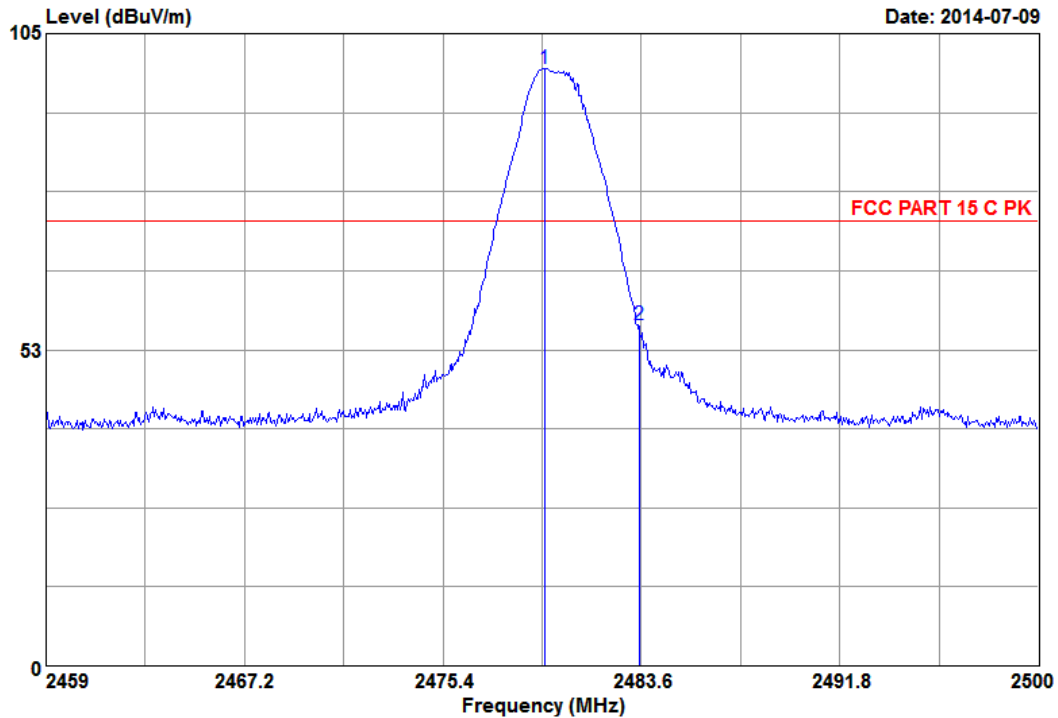

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C PK
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

Data NO. : 26
 Ant. pol. : VERTICAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.60	28.57	6.44	98.92	34.79	99.14	74.00	-25.14	Peak
2	2483.50	28.58	6.44	56.32	34.79	56.55	74.00	17.45	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel:(0512) 63403993 Fax:(0512) 63403993

Data: 27

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

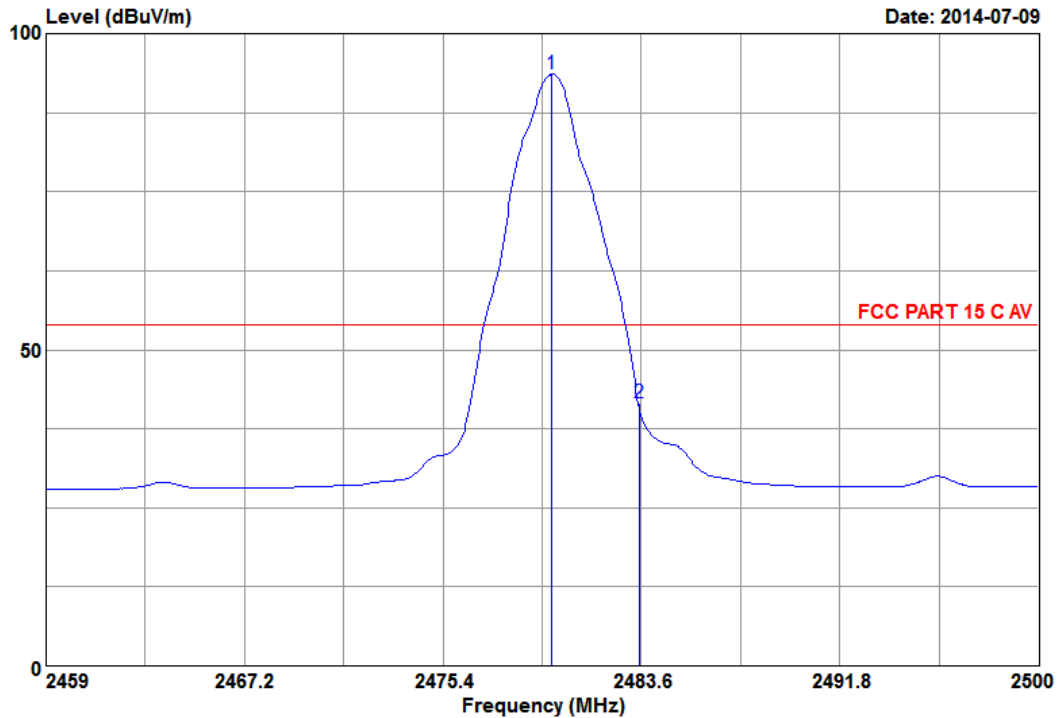

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C AV
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

Data NO. : 27
 Ant. pol. : HORIZONTAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.91	28.57	6.44	93.35	34.79	93.57	54.00	-39.57	Average
2	2483.50	28.58	6.44	41.25	34.79	41.48	54.00	12.52	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.




Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,Jiangsu,China
 Tel:(0512) 63403993 Fax:(0512) 63403993

Data: 28

File: G:\Test Data\2013\Reports\06\G1306019R1.EM6 (50)

Date: 2014-07-09

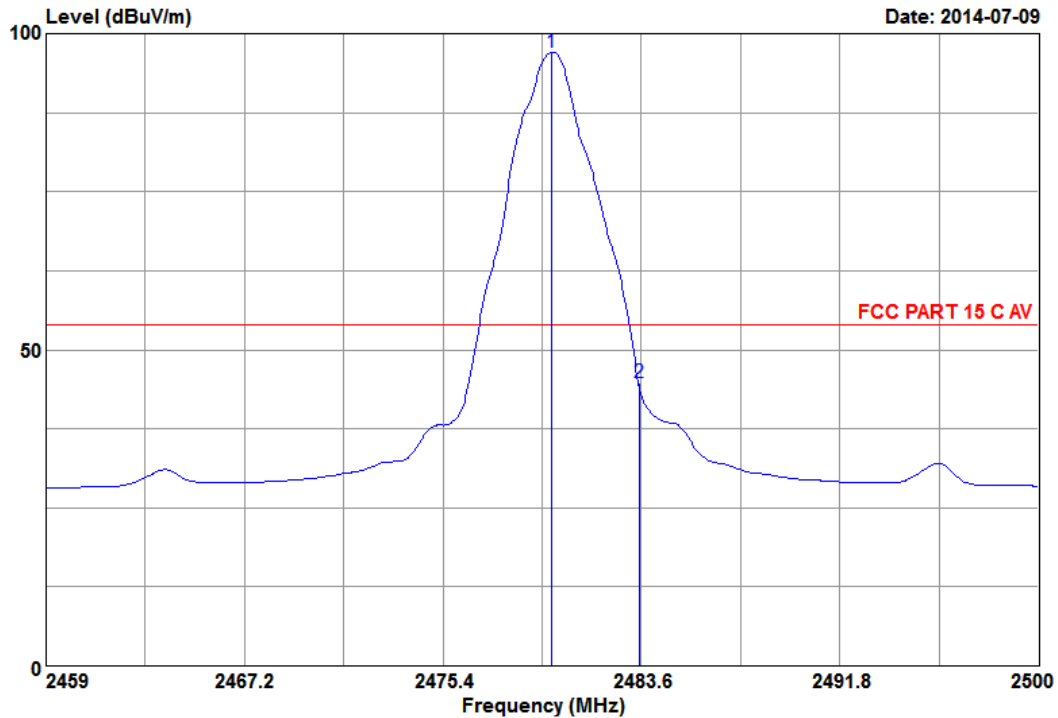

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 3115-62960-140520
 Limit : FCC PART 15 C AV
 Env. / Ins. : 22.8*C52%/N9030A
 EUT : LED Lamp
 M/N : 9290002618
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH26 2480MHz
 Memo :

Data NO. : 28
 Ant. pol. : VERTICAL
 Engineer : boqiang_li

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.91	28.57	6.44	96.89	34.79	97.11	54.00	-43.11	Average
2	2483.50	28.58	6.44	44.61	34.79	44.84	54.00	9.16	Average


Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6 dB BANDWIDTH MEASUREMENT

6.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22

6.2. Block Diagram of Test Setup

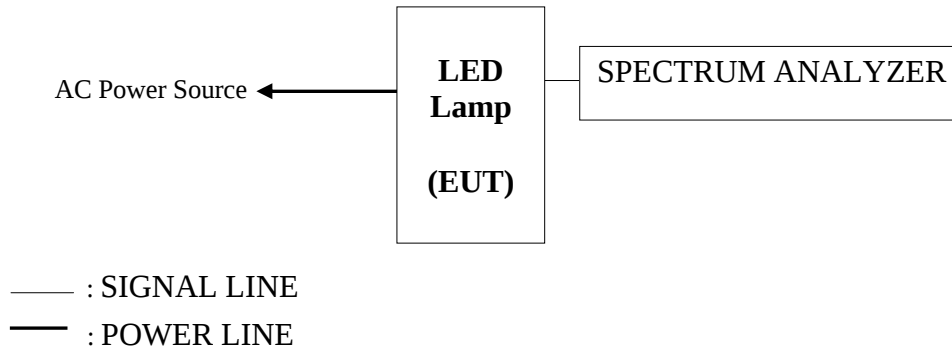

6.3. Specification Limits (§15.247(a)(2))

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

6.4. Test Procedure

The transmitter output was connected to the test receiver / spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB. The measurement guideline was according to KDB558074 v03r02.

6.5. Test Results

PASSED. All the test results are attached in next pages.

Channel	Center Frequency(MHz)	6 DB Bandwidth(kHz)
11	2405	814.5
20	2450	824.2
26	2480	838.8

CH 11



CH 20



CH 26




7. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

7.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2013-06-24	2014-06-23

7.2. Block Diagram of Test Setup

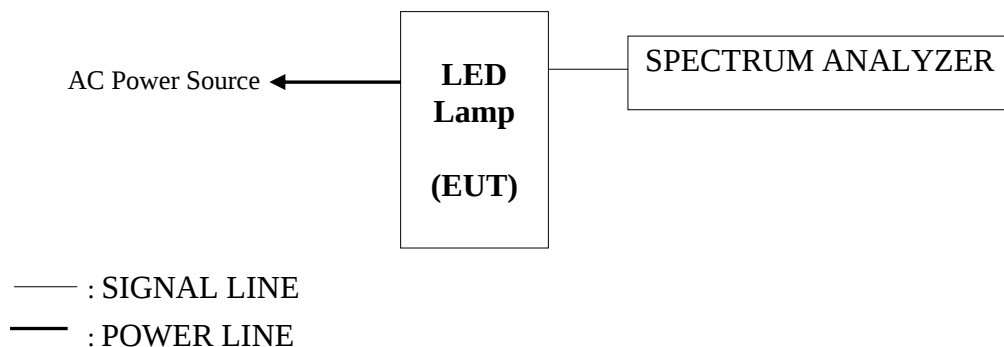

7.3. Specification Limits (§15.247(b)(3))

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

7.4. Test Procedure

- Set the RBW $\geq$ DTS bandwidth.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 3 \times$ RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

7.5. Test Results

PASSED. All the test results are attached in next pages.

Channel	Frequency	Power(dBm)	Limit(dBm)
11	2405	3.785	30
20	2450	3.408	30
26	2480	3.997	30

8. BAND EDGES MEASUREMENT

8.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22

8.2. Block Diagram of Test Setup

The same as section 7.2.

8.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


8.4. Test Procedure

The transmitter output was connected to the test receiver / spectrum analyzer. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.

8.5. Test Results

PASSED. The testing data was attached in the next pages.

CH11

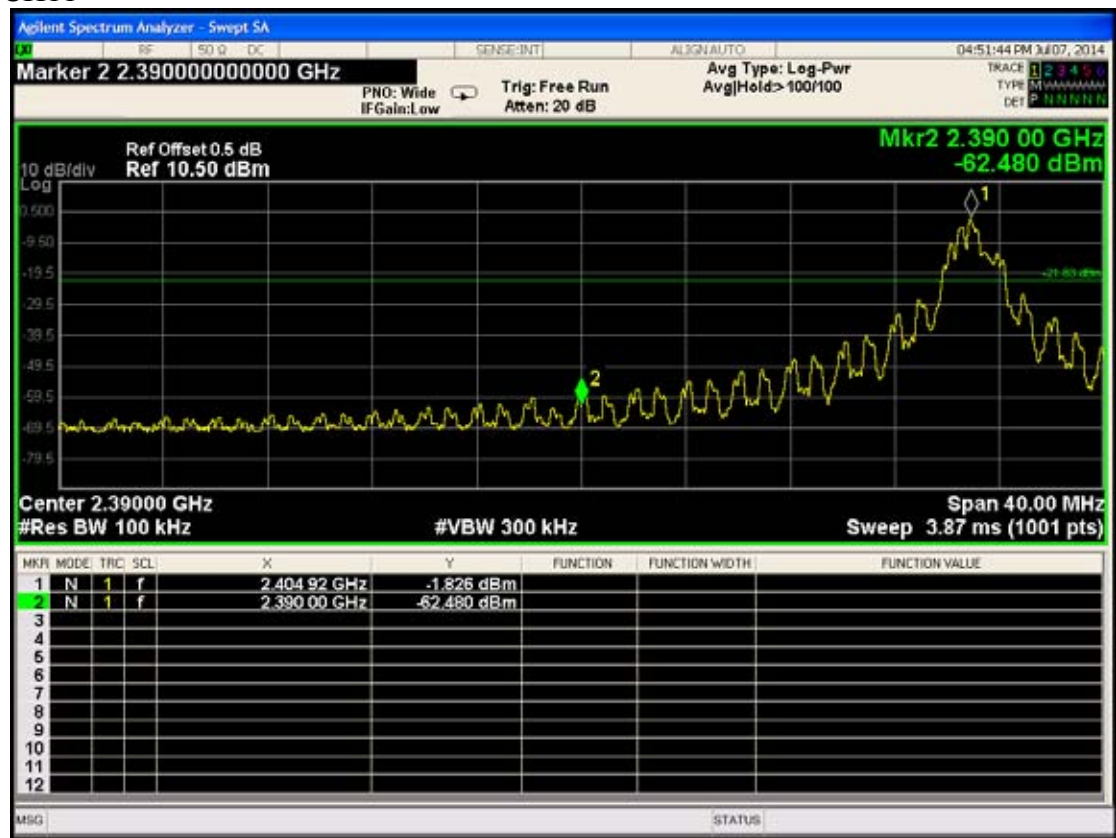

CH26



9. POWER SPECTRAL DENSITY MEASUREMENT

9.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22

9.2. Block Diagram of Test Setup

The same as section 7.2.

9.3. Specification Limits (§15.247(e))

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.4. Test Procedure

- 1.Set the RBW=100kHz, VBW=300kHz, Detector=peak
- 2.Sweep time=auto couple, Trace mode=max hold, allow trace to fully stabilize.
- 3.Use the peak marker function to determine the maximum power level in any 100kHz band segment within the fundamental EBW.
- 4.Scale the observed power level to an equivalent value in 3kHz by adjusting(reducing) the measured power by a bandwidth correction factor(BWCF) where $BWCF=10\log(3\text{kHz}/100\text{kHz})$
Follow KDB558074 v03r02 DTS Meas Guidannce v01 of measurement procedure PKPSD.

9.5. Test Results

PASSED. All the test results are attached in next page.

Channel	Frequency(GHz)	Value(dBm/100kHz)	Value(dBm/3kHz)
11	2.404896	-1.797	-16.997
20	2.449888	-2.003	-17.203
26	2.479888	-1.917	-17.117

CH 11



CH 20



CH 26



10.EMISSION LIMITATIONS MEASUREMENT

10.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22

10.2. Block Diagram of Test Setup

The same as section 7.2.

10.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.4. Test Procedure



The transmitter output was connected to the spectrum analyzer. Set RBW = 100kHz, VBW $\geq$ 300 kHz, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The measurement guideline was according to KDB558074 v03r02.



10.5. Test Results



PASSED. All the test results are attached in next pages.

Channel	Frequency(MHz)	Amplitude(dBm)
11	843.83	-70.555
	2404	-2.037
	4812	-60.330
	9775	-64.601
	13600	-64.286
	19100	-63.006
	23700	-61.806
20	776.90	-71.021
	2448	-2.223
	4900	-62.324
	7350	-67.712
	14445	-65.135
	19200	-62.635
	23910	-62.029
26	900.09	-69.974
	2480	-1.928
	4856	-67.630
	9920	-63.548
	13625	-64.939
	19515	-62.041
	23740	-61.865



CH 11

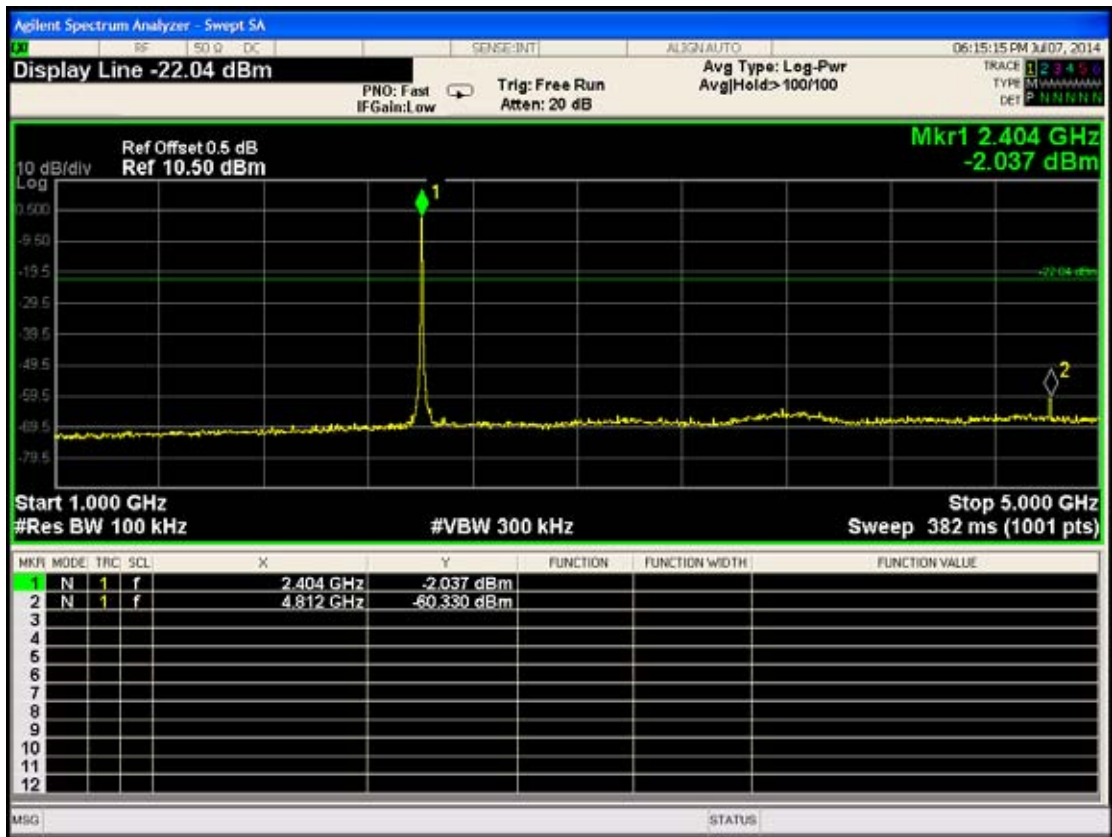
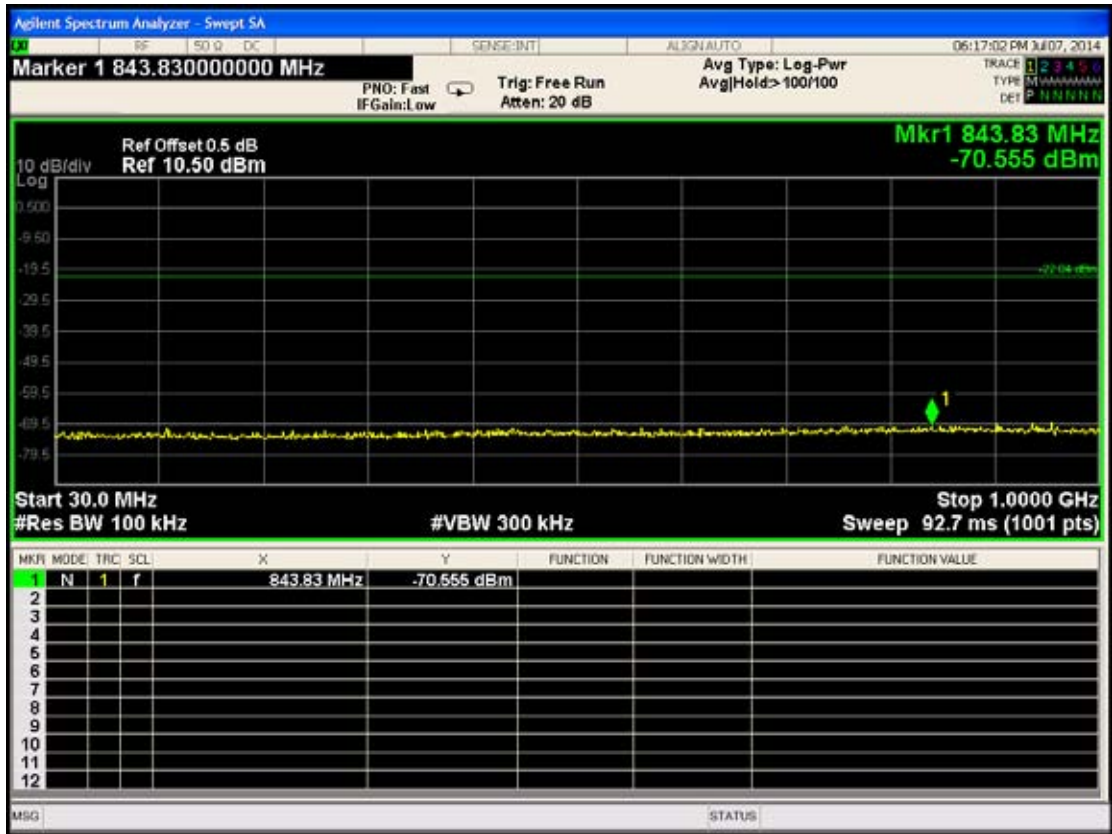


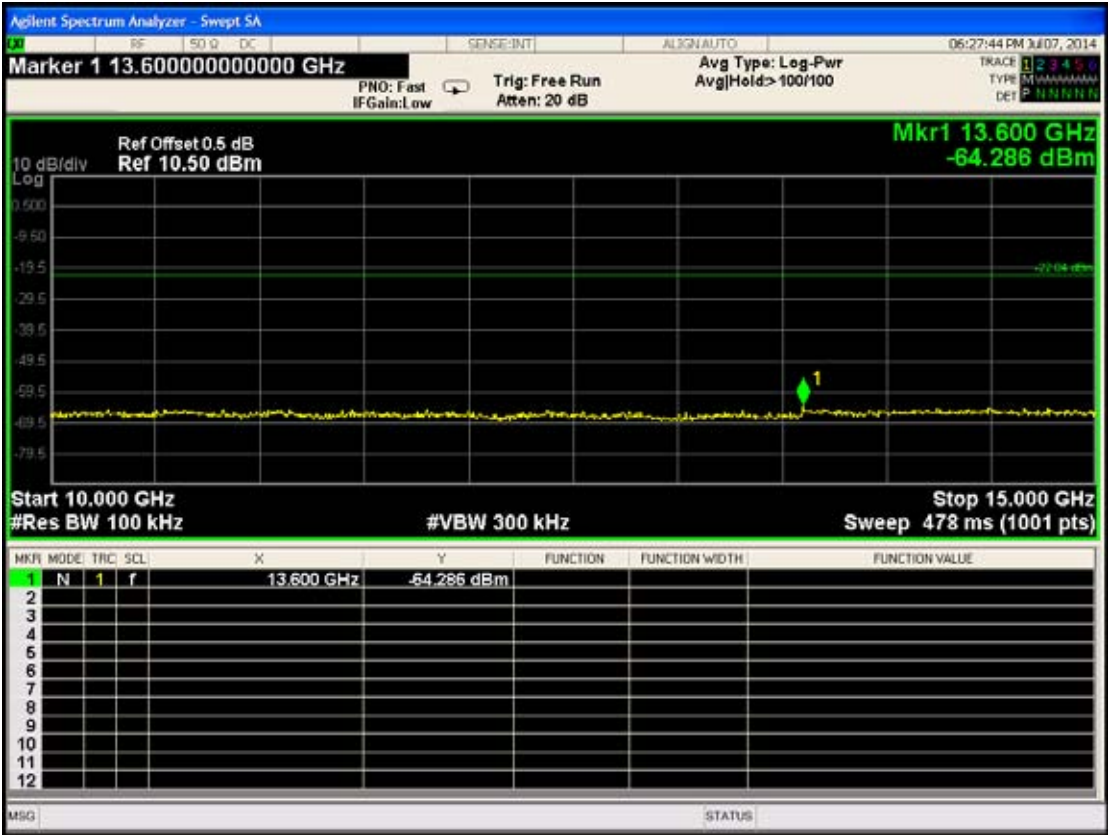
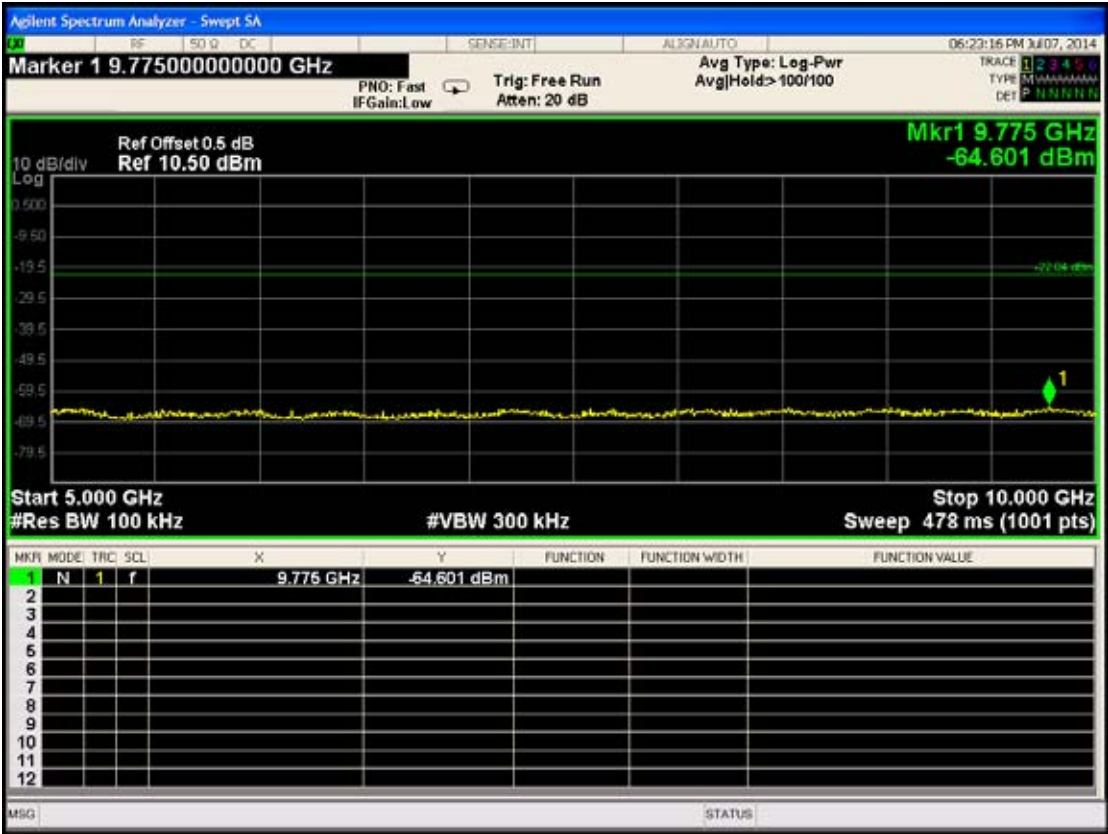


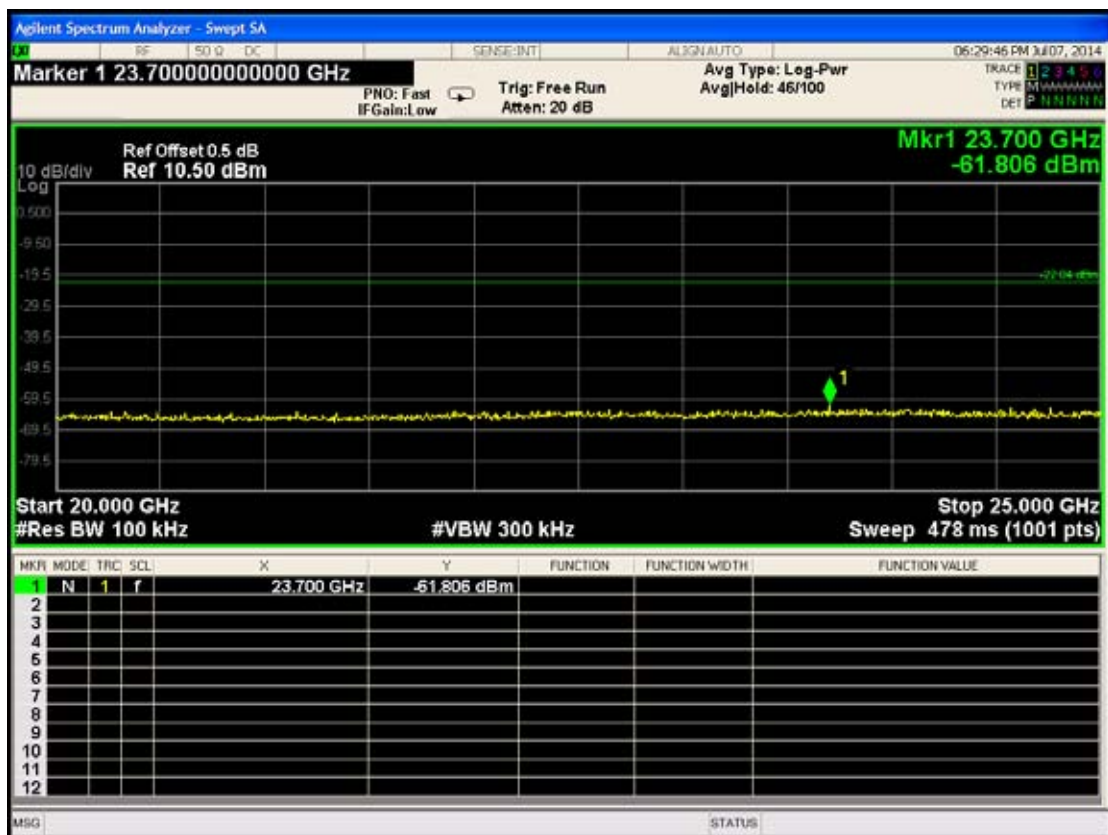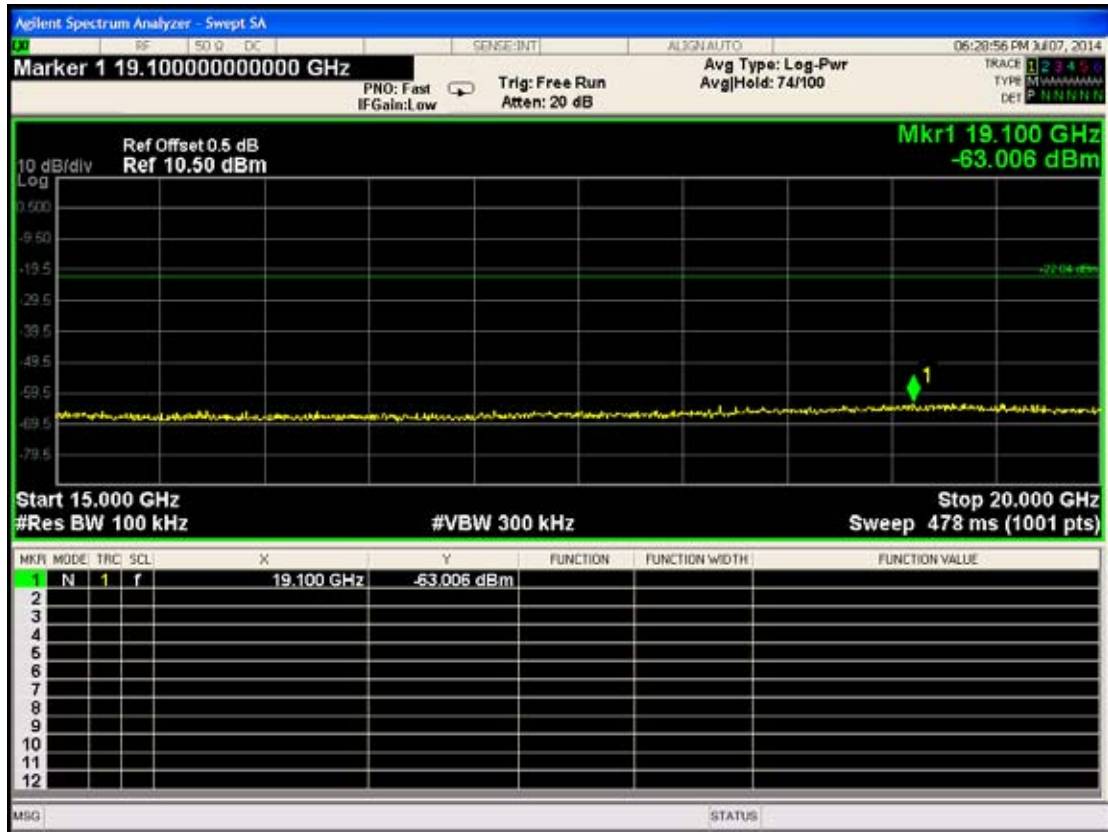



CH 20

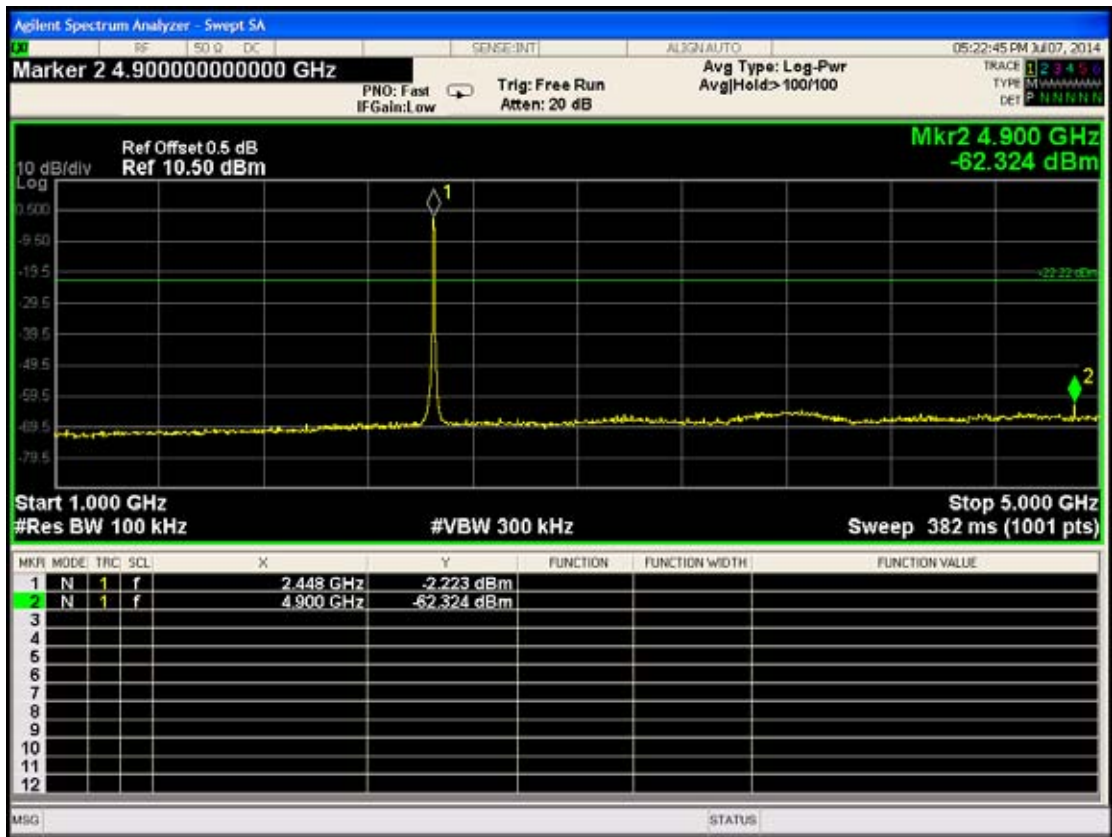
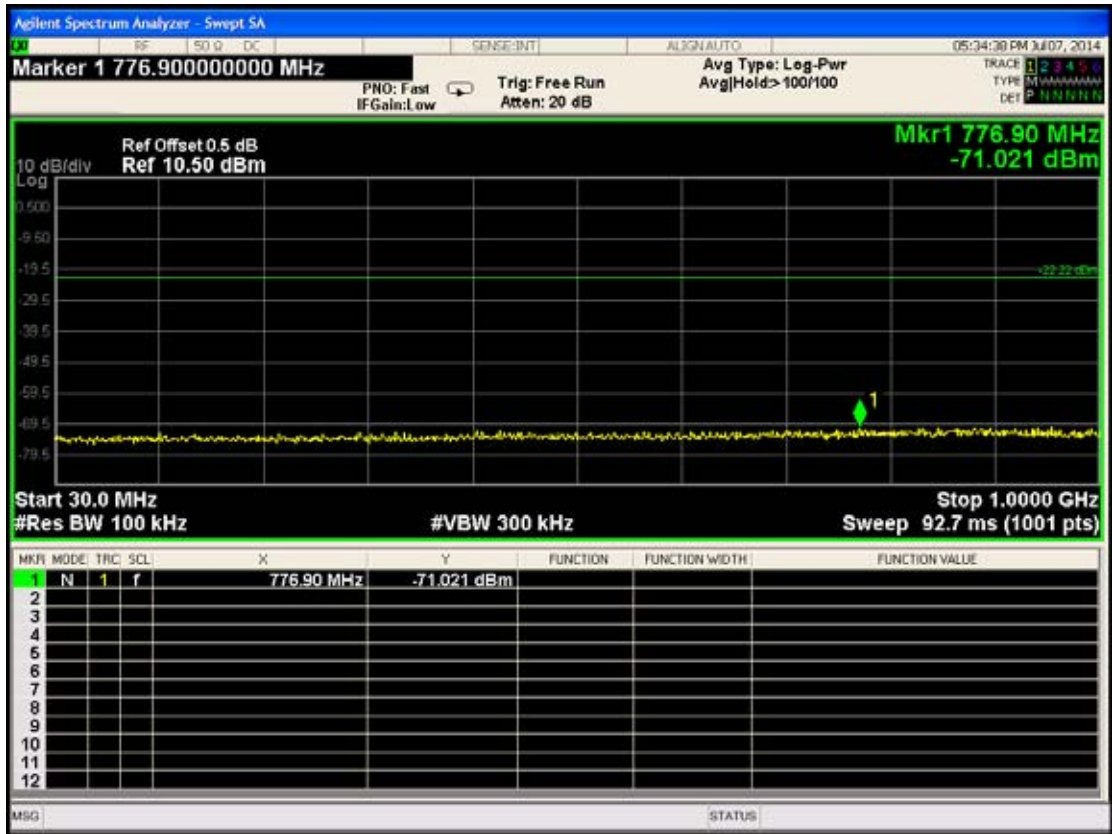


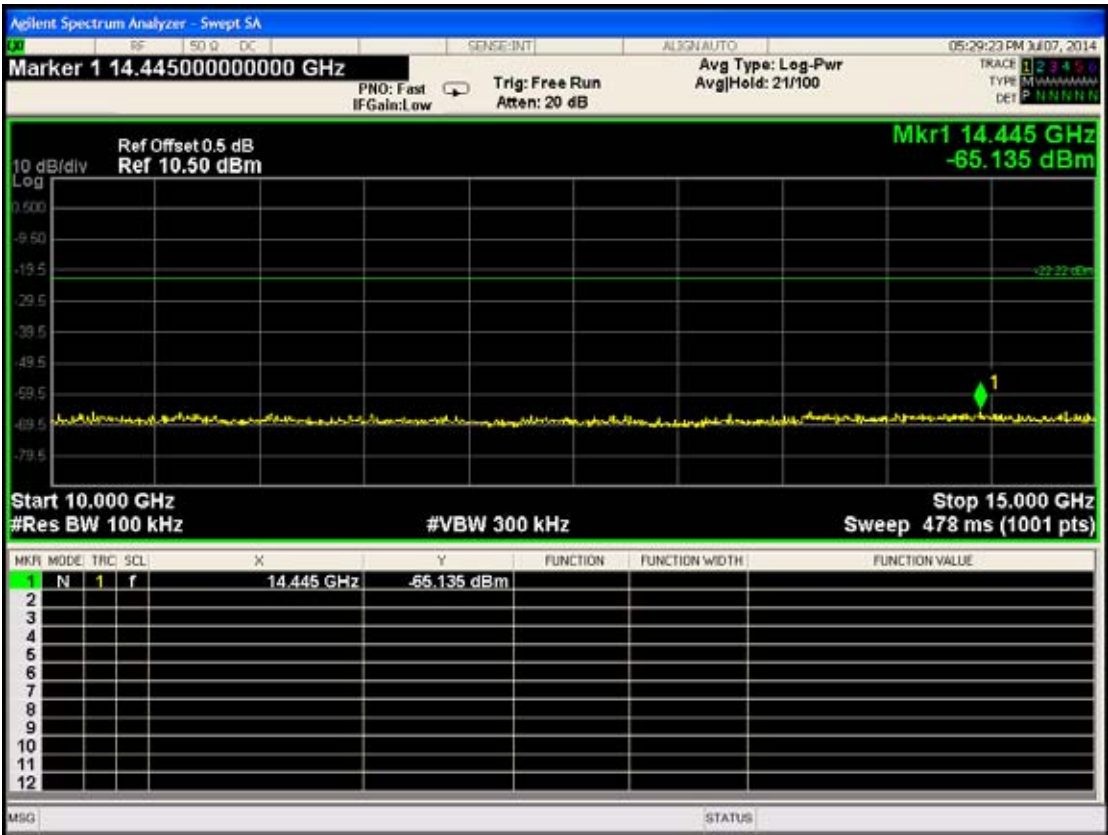
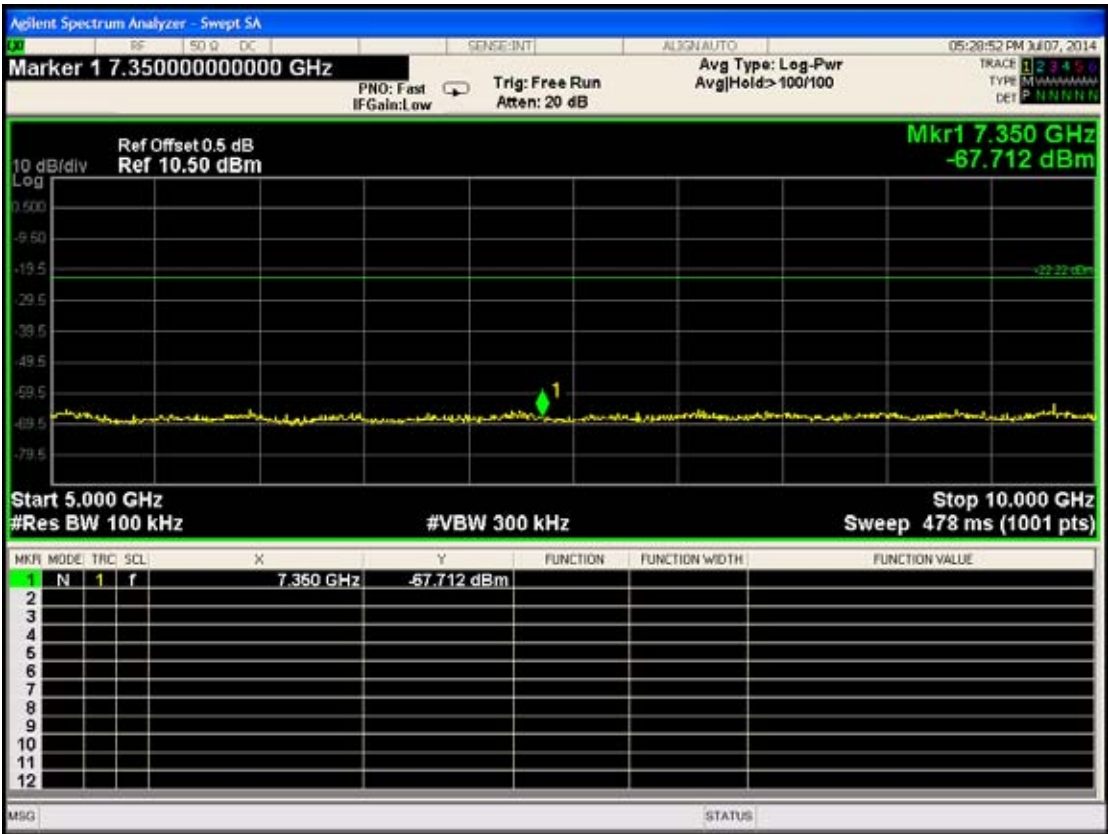


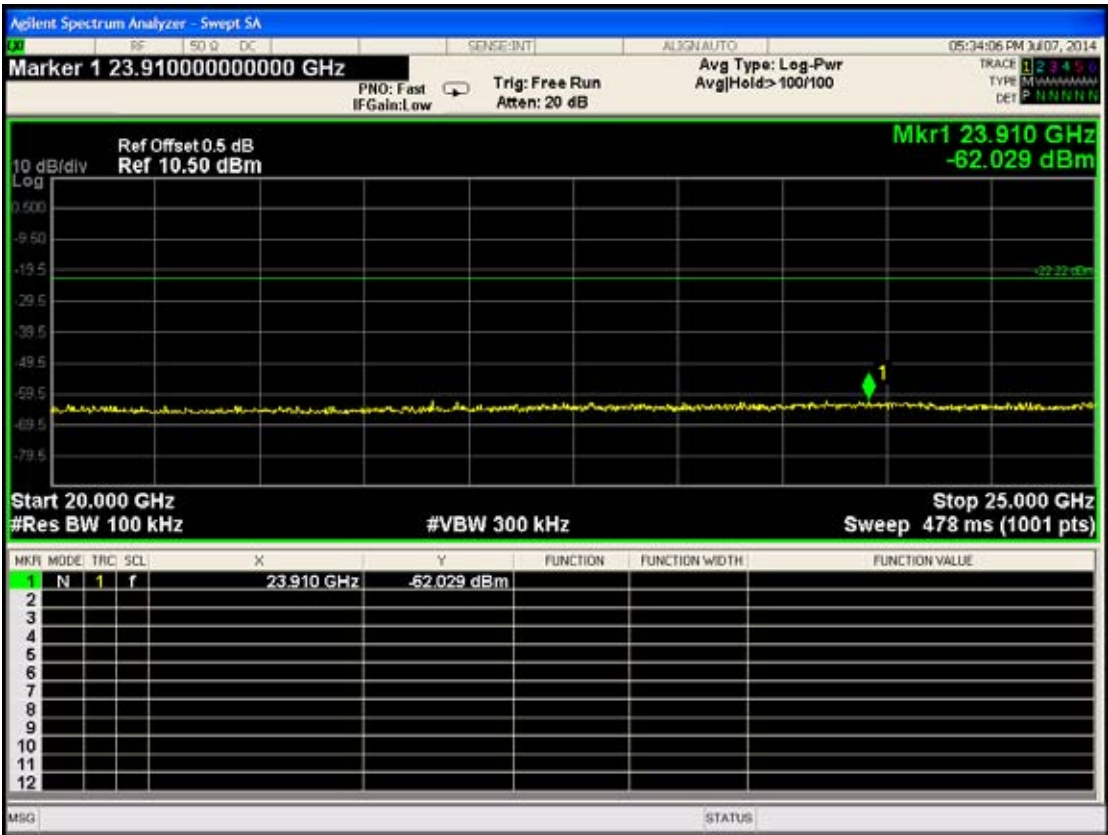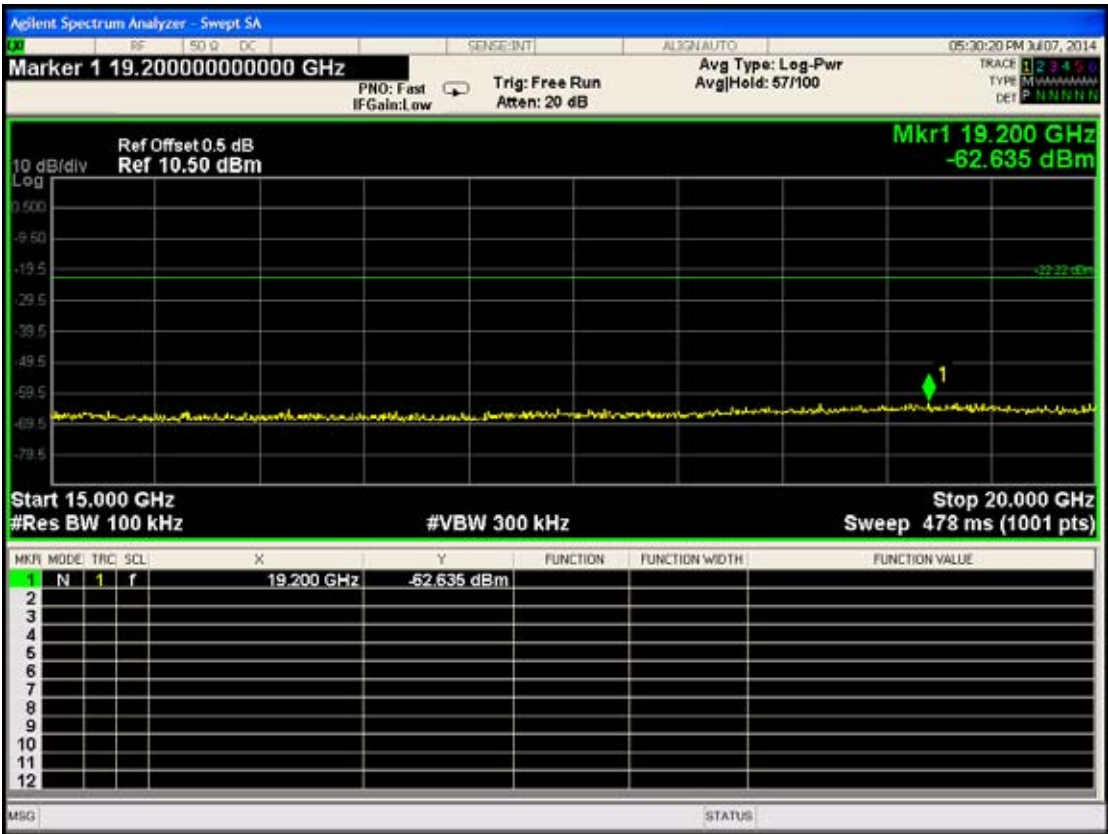

CH 26

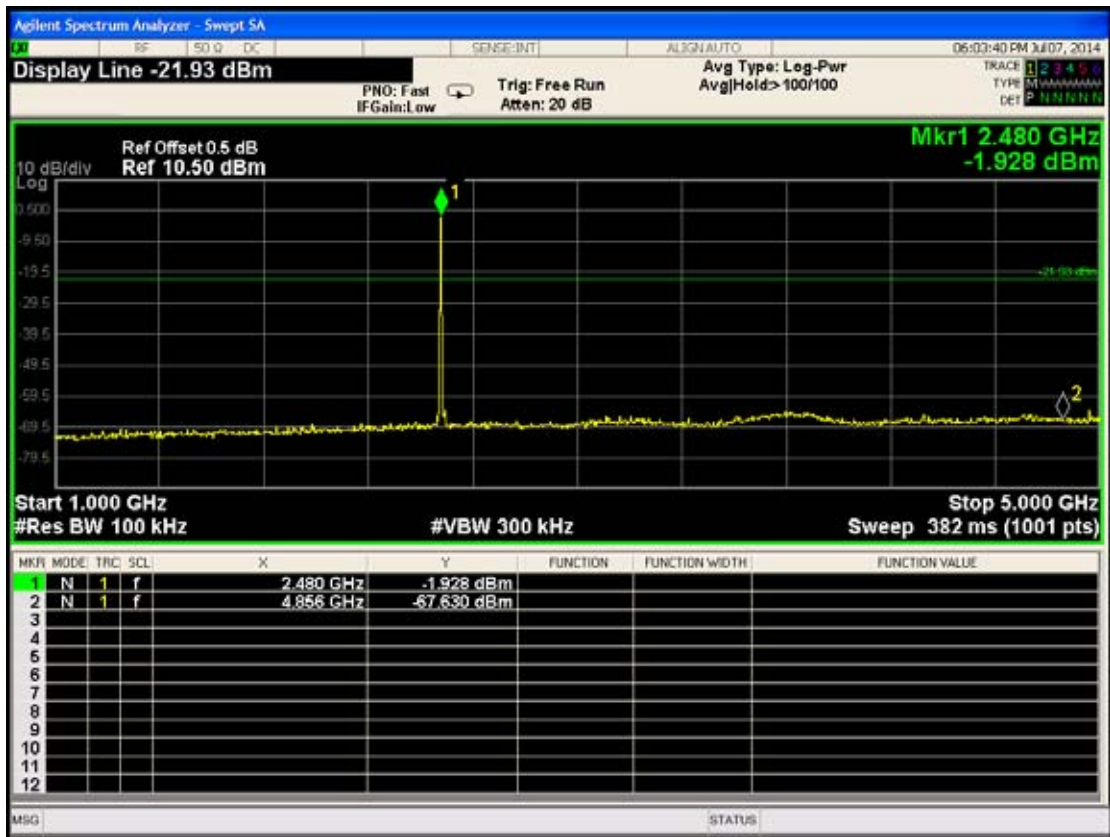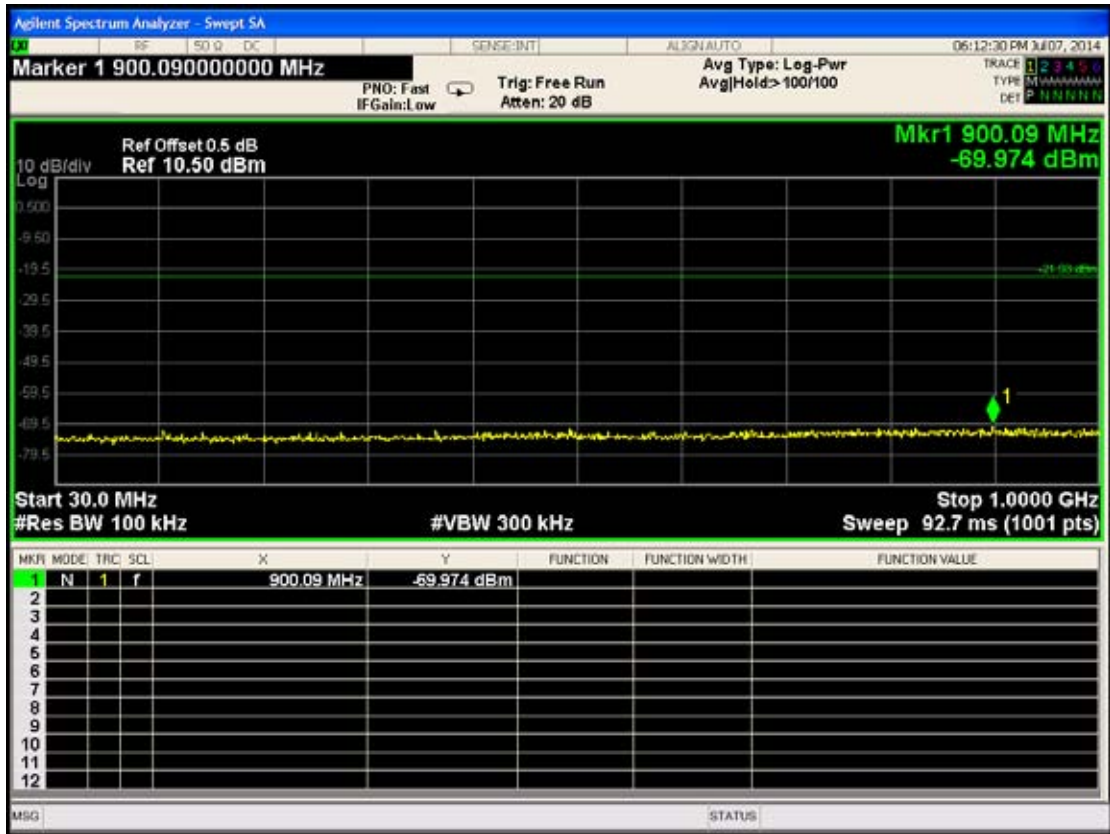

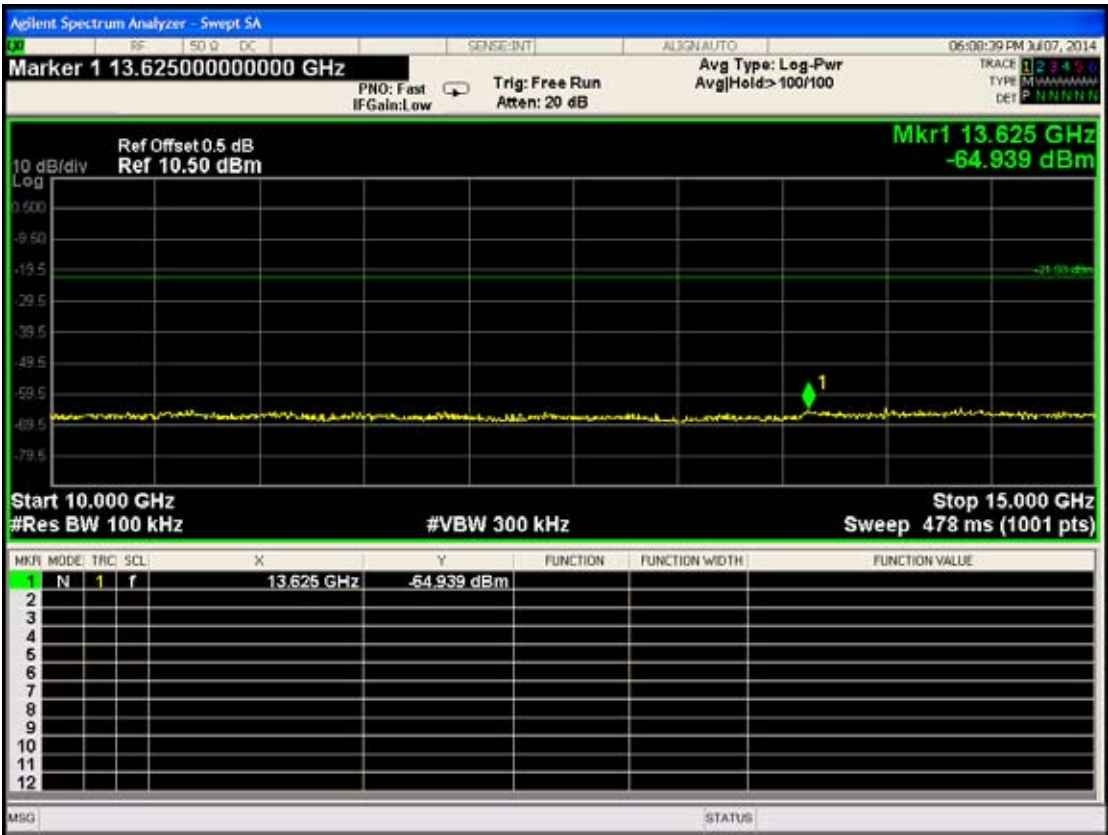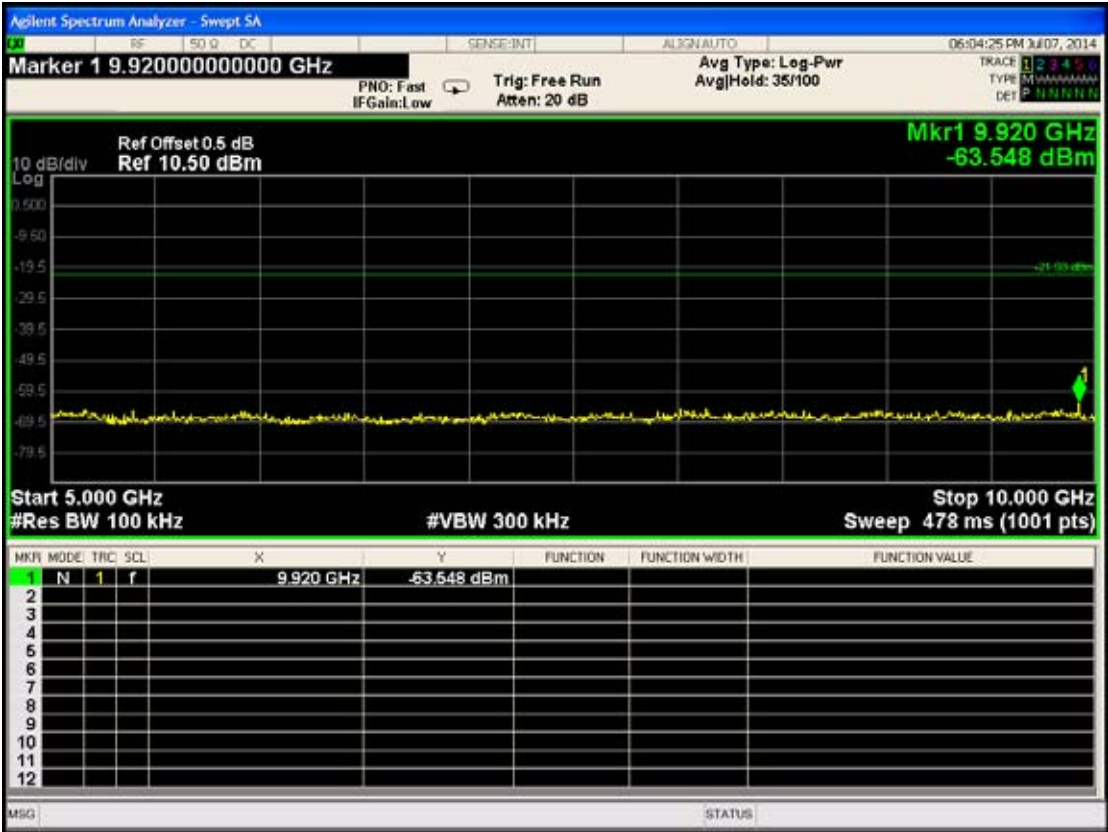

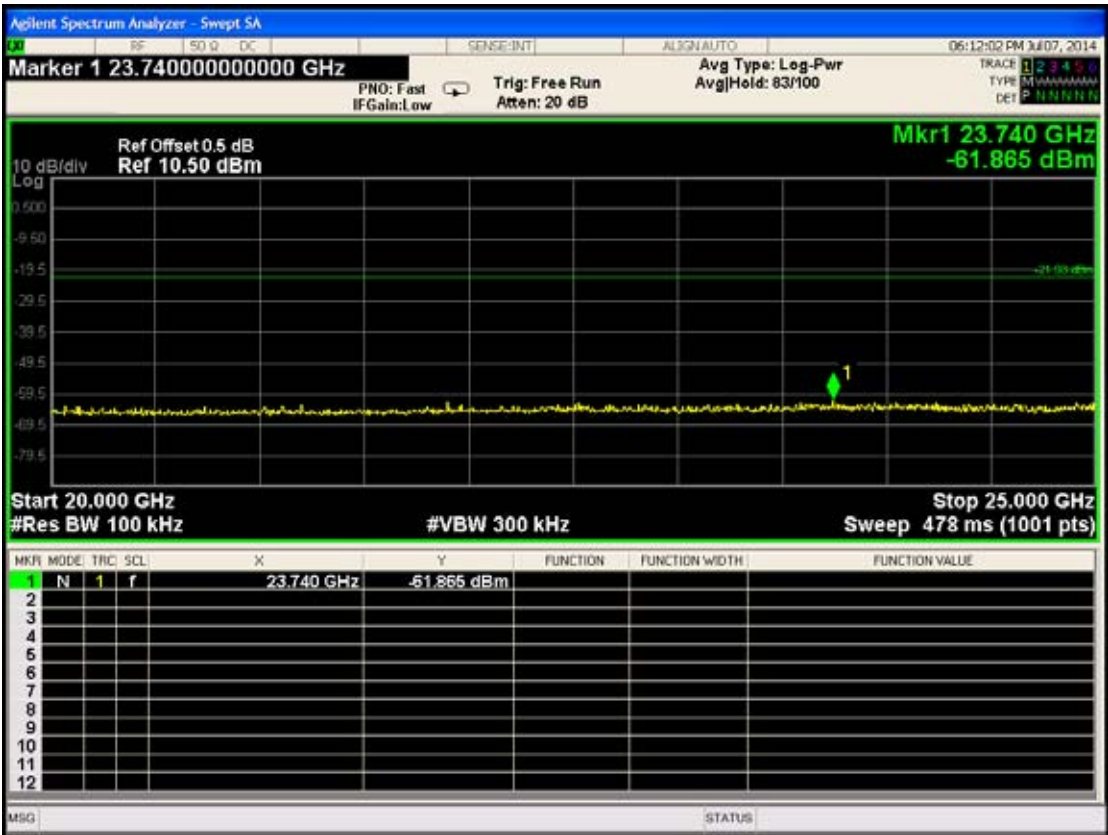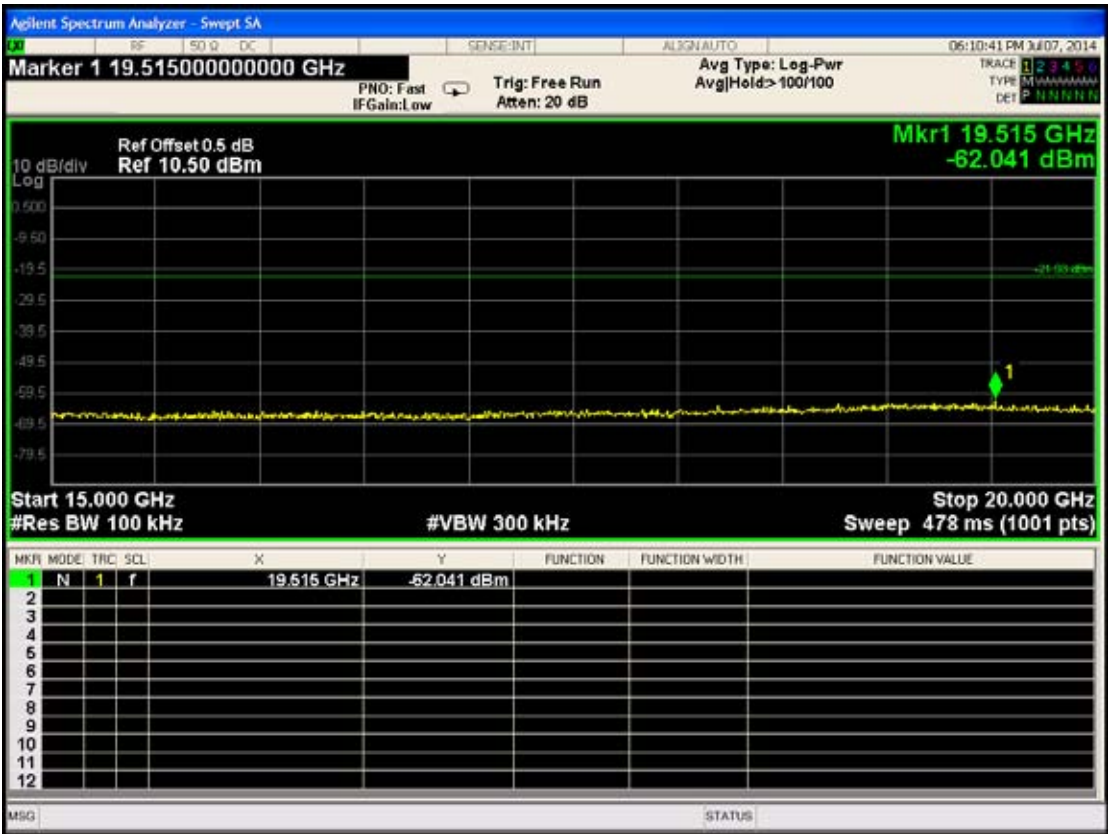

11.DUTY CYCLE

11.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2014-06-23	2015-06-22

11.2. Test Results

The measurement of duty cycle is 100%.

CH20



CH26

12.DEVIATION TO TEST SPECIFICATIONS

【NONE】