

Radiated Emission Data

Operation Mode : Charge

Test Date : Nov. 19, 2003

Temperature : 21 °C

Humidity : 68 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
120.720	H	47.0	-10.9	36.1	43.5	-7.4	180	4.0
144.750	H	43.8	-10.4	33.4	43.5	-10.1	175	4.0
168.780	H	43.9	-9.1	34.8	43.5	-8.7	190	4.0
192.810	H	44.3	-8.0	36.3	43.5	-7.2	180	4.0
367.900	H	42.8	-7.2	35.6	46.0	-10.4	270	4.0
433.700	H	41.9	-5.5	36.4	46.0	-9.6	0	3.5

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

Conducted Emission Data

Operation Mode : Charge

Test Date : Nov. 19, 2003Temperature : 23 °CHumidity: 60 %

Freq. (MHz)	Meter Reading (dBì V)				Factor (dB)	Limit (dBì V)		Result (dBì V)			
	Q.P Value		AVG. Value			Q.P Value	AVG. Value	Q.P Value		AVG. Value	
	N	L1	N	L1				N	L1	N	L1
0.166	38.7	37.1	----	----	0.2	65.2	55.2	38.9	37.3	----	----
0.329	40.6	37.2	----	----	0.3	59.5	49.5	40.9	37.5	----	----
0.416	33.0	30.0	----	----	0.3	57.5	47.5	33.3	30.3	----	----
0.494	38.2	34.1	----	----	0.3	56.1	46.1	38.5	34.4	----	----
0.746	36.5	34.2	----	----	0.3	56.0	46.0	36.8	34.5	----	----
0.910	35.7	32.6	----	----	0.3	56.0	46.0	36.0	32.9	----	----


Note : The expanded uncertainty of the conducted emission tests is 2.45 dB.

CONDUCTION EMISSION TEST

Peak Value

EUT:
Manuf: Charge
Op Cond:
Operator:
Test Spec:
Comment: N

Final Measurement:	Detector:	X QP
	Meas Time:	1sec
	Peaks:	8
	Acc Margin:	25 dB

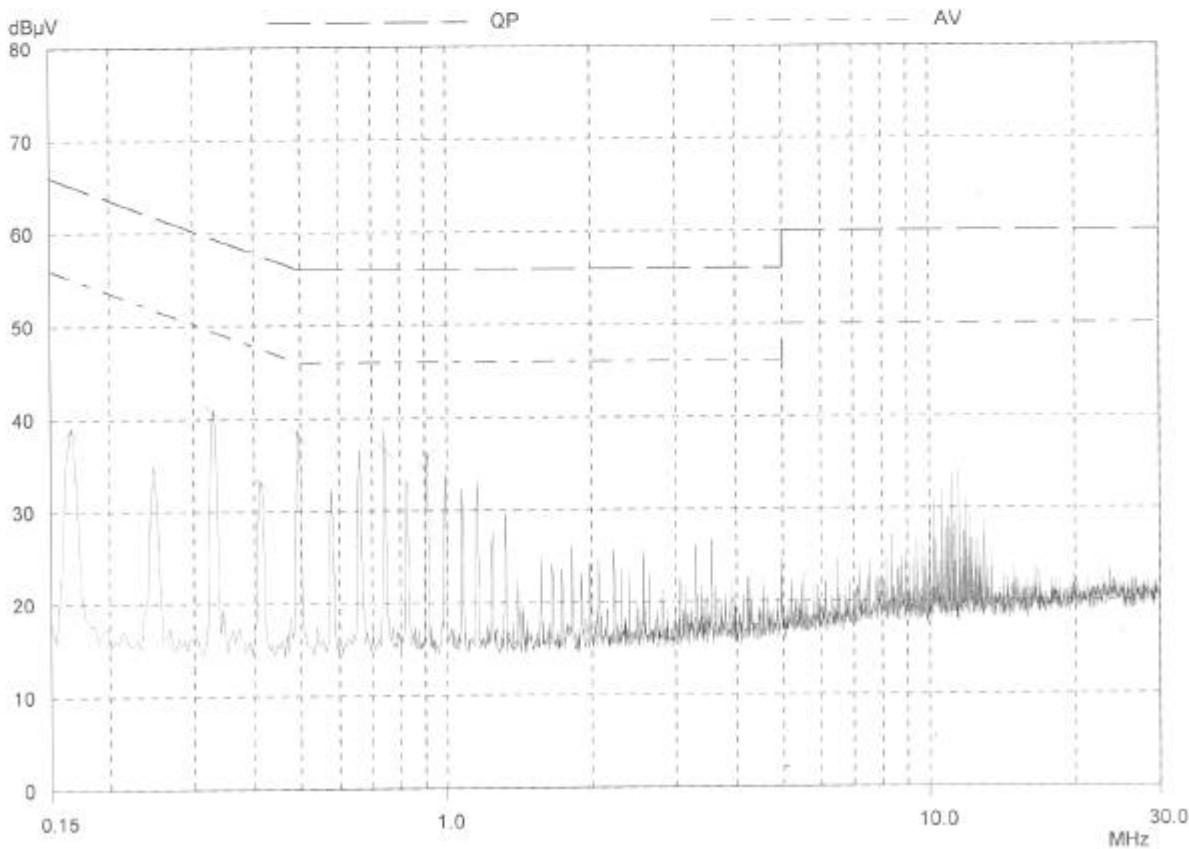

CONDUCTION EMISSION TEST

Peak Value

EUT:
Manuf: Charge
Op Cond:
Operator:
Test Spec:
Comment: L1

Final Measurement: Detector: X QP
Meas Time: 1sec
Peaks: 8
Acc Margin: 25 dB

