

FCC - TEST REPORT

Report Number : **60.790.18.033.01R01** Date of Issue : June 18, 2018

Model : HAC1.2

Product Type : Bicycle Computer

Applicant : DAYTON INDUSTRIAL CO., LTD

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung, New Territories, Hong Kong

Production Facility : KENDY ENTERPRISE LTD

Address : 2-12 Kwai Fat Road, 11-A Kwai Chung, New Territories, Hong Kong

Test Result : ☒ **Positive** ☐ **Negative**

Total pages
including
Appendices : 14

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

1 Table of Contents.....	2
2 Description of Equipment Under Test	3
3 Summary of Test Standards	4
4 Details about the Test Laboratory	5
4.1 Test Equipment Site List	6
4.2 Measurement System Uncertainty	7
5 Summary of Test Results.....	8
6 General Remarks	9
7 Emission Test Results	10
7.1 Radiated Emission.....	10
7.2 20dB & 99% Bandwidth	12
7.3 Antenna Requirement.....	13
8 Appendix A - General Product Information	14

2 Description of Equipment Under Test

Description of the Equipment Under Test

Product:	Bicycle Computer
Model no.:	HAC1.2
FCC ID:	O4GHAC
Rating:	3 VDC (1 x CR2302 battery)
Frequency:	2457MHz
Antenna gain:	0 dBi
Number of operated channel:	1
Modulation:	GFSK

3 Summary of Test Standards

Test Standards
FCC Part 15 Subpart C 10-1-17 Edition Federal Communications Commission, PART 15 — Radio Frequency Devices, Subpart C — Unintentional Radiators

4 Details about the Test Laboratory

Site 1

Company name: TÜV SÜD Hong Kong Ltd.
3/F, West Wing, Lakeside 2,
10 Science Park West Avenue,
Science Park, Shatin, Hong Kong

Site 2

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13 Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2,
Shenzhen 518052, P.R.China
FCC Registration Number: 502708

Emission Tests	
Test Item	Test Site
FCC Part 15 Subpart C	
FCC Title 47 Part 15.205, 15.209 & 15.249 & Radiated Emission	Site 2
FCC Title 47 Part 15.207 Conduct Emission	NIL
FCC Title 47 Part 15.215 20dB & 99% Bandwidth	Site 2
FCC Title 47 Part 15.203 Antenna Requirement	Site 2

4.1 Test Equipment Site List

Radiated emission Test – Site 2

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESR 26	101269	2018-7-14
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2018-7-14
Horn Antenna	Rohde & Schwarz	HF907	102294	2018-7-14
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2018-7-14
Signal Generator	Rohde & Schwarz	SMY01	839369/005	2018-7-7
Attenuator	Agilent	8491A	MY39264334	2018-7-7
3m Semi-anechoic chamber	TDK	9X6X6	----	2020-7-7
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

Bandwidth Test– Site 2

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Generator	Rohde & Schwarz	SMB100A	108272	2018-7-7
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2018-7-7
Vector Signal Generator	Rohde & Schwarz	SMU 200A	105324	2018-7-7
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2018-7-7

4.2 Measurement System Uncertainty

Measurement System Uncertainty Emissions

System Measurement Uncertainty	
Items	Extended Uncertainty
Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz	4.54dB
Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz	Horizontal: 4.83dB; Vertical: 4.91dB;
Uncertainty for Radiated Emission in 3m chamber 1000MHz-25000MHz	Horizontal: 4.89dB; Vertical: 4.88dB;
Uncertainty for Conducted RF test	2.04dB

5 Summary of Test Results

Emission Tests				
FCC Part 15 Subpart C				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
FCC Title 47 Part 15.205,15.209 & 15.249 Radiated Emission	10-11	☒	☐	☐
FCC Title 47 Part 15.207 Conduct Emission (1)	NIL	☐	☐	☒
FCC Title 47 Part 15.215 20dB & 99% Bandwidth	12	☒	☐	☐
FCC Title 47 Part 15.203 Antenna Requirement	13	☒	☐	☐

Remark:

- 1) These requirements do not apply for equipment which employ battery power for operation and which do not operate from the AC power lines.

6 General Remarks

Remarks

NIL

SUMMARY:

- All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

- The Equipment Under Test

■ - **Fulfills** the general approval requirements.


□ - **Does not** fulfill the general approval requirements.

Sample Received Date: May 30, 2018

Testing Start Date: May 31, 2018

Testing End Date: June 12, 2018

Reviewed by:

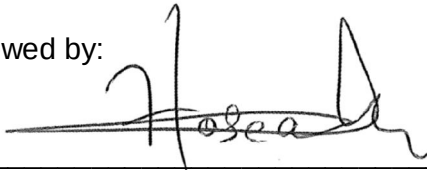

Hosea CHAN
EMC Project Engineer

Prepared by:



Eric LI
EMC Senior Project Engineer

7 Emission Test Results

7.1 Radiated Emission

EUT: HAC1.2
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.249 & 15.209, Antenna: Horizontal
 Comment: 3 VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed

Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
58.183	18.71	40.00	-21.29	Quasi Peak
96.552	11.87	43.50	-31.63	Quasi Peak
180.134	13.26	43.50	-30.24	Quasi Peak
277.727	20.52	46.00	-25.48	Quasi Peak
437.453	22.81	46.00	-23.19	Quasi Peak
869.750	30.48	46.00	-15.52	Quasi Peak
2457.218	84.21	94.00	-9.79	Average
4913.718	43.84*	54.00	-10.16	Peak
8753.593	40.83*	54.00	-13.17	Peak

Remark*: As the peak value were below the average limit, so average value no need to be measured.

Radiated Emission

EUT: HAC1.2
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.249 & 15.209, Antenna: Vertical
 Comment: 3 VDC
 Remark: 9kHz to 25GHz

Test Result	
☒	Passed
☐	Not Passed


Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Detector
42.125	19.99	40.00	-20.01	Quasi Peak
60.932	21.41	40.00	-18.59	Quasi Peak
175.607	11.06	43.50	-32.44	Quasi Peak
274.332	19.77	46.00	-26.23	Quasi Peak
438.908	27.41	46.00	-18.59	Quasi Peak
864.469	33.61	46.00	-12.39	Quasi Peak
1257.125	26.48*	54.00	-27.52	Peak
2456.687	78.96	94.00	-15.04	Average
4914.250	40.94*	54.00	-13.06	Peak
7496.719	39.91*	54.00	-14.09	Peak
10080.000	41.43*	54.00	-12.57	Peak

Remark*: As the peak value were below the average limit, so average value no need to be measured.

7.2 20dB & 99% Bandwidth

EUT: HAC1.2
 Op Condition: Operated, TX Mode (2457MHz)
 Test Specification: FCC15.215
 Comment: 3 VDC

Test Result
☒ Passed
☐ Not Passed

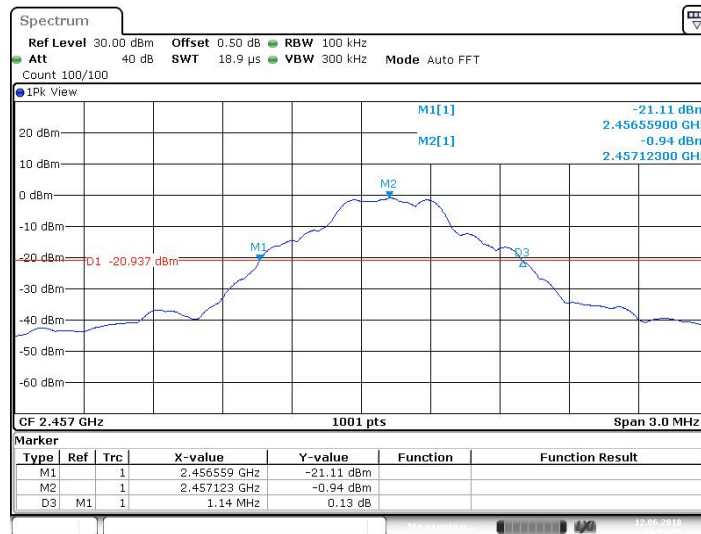

20dB bandwidth
 1140.000 kHz

99% bandwidth
 917.083 kHz

7.3 Antenna Requirement

EUT: HAC1.2
Op Condition: Operated, TX Mode
Test Specification: FCC15.203 (b)
Comment: 3 VDC

Test Result	
☒	Passed
☐	Not Passed

Limit

For intentional device, according to FCC Title 47 Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Connector Construction

The antenna used in this product is integrated antenna on PCB, which in accordance to section 15.203, is considered sufficient to comply with the antenna requirement.

8 Appendix A - General Product Information

Radiofrequency radiation exposure evaluation

According to KDB 447498 D01v06 section 4.3.1, For frequencies between 100 MHz to 6GHz and test separation distances ≤ 50 mm, the Numeric threshold is determined as:

Step a)

[(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)]
· $[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR

>> The fundamental frequency of the EUT is 2402-2480MHz,
the test separation distance is ≤ 50 mm.
(Manufacturer specified the separation distance is: 20mm)

Step a)

>> Numeric threshold (2457MHz), $\text{mW} / 20\text{mm} \cdot \sqrt{2.457\text{GHz}} \leq 3.0$
Numeric threshold (2457MHz) $\leq 38.278\text{mW}$

>>The power of EUT measured (2457MHz) is: $-1.03 \text{ dBm} = 0.789\text{mW}$

Which is smaller than the Numeric threshold.

Therefore, the device is exempt from stand-alone SAR test requirements.

Appendix A - Conducted power

EUT: HAC1.2
Op Condition: Operated, TX Mode (2457MHz)
Comment: 3 VDC
Remark: NA

Test Result
☒ Passed
☐ Not Passed

