

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.209;
RSS-210 issue 8 section 2.5.1, RSS-Gen issue 3

FOR:

Elpas Solutions Ltd.
Proximity BUS Reader
Model:5-LFB00125
FCC ID:O4X5-LFB00125
IC:1467G-5LFB00125

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Support and test equipment	5
6.4	Changes made in EUT	5
6.5	Test configuration	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements	7
7.1	Field strength of emissions	7
7.2	Antenna requirements	14
7.3	Occupied bandwidth test	15
8	APPENDIX A Test equipment and ancillaries used for tests	17
9	APPENDIX B Measurement uncertainties	18
10	APPENDIX C Test laboratory description	19
11	APPENDIX D Specification references	19
12	APPENDIX E Test equipment correction factors	20
13	APPENDIX F Abbreviations and acronyms	25

1 Applicant information

Client name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1421
Fax: +972 3768 1415
E-mail: MErenkrantz@tycoint.com
Contact name: Mr. Meir Erenkrantz

2 Equipment under test attributes

Product name: Proximity BUS Reader
Product type: Transceiver
Model(s): 5-LFB00125
Serial number: Prototype
Hardware version: Rev.6
Software release: V1.7
Receipt date 20-Feb-14

3 Manufacturer information

Manufacturer name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1421
Fax: +972 3768 1415
E-Mail: MErenkrantz@tycoint.com
Contact name: Mr. Meir Erenkrantz

4 Test details

Project ID: 25485
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 19-Feb-14
Test completed: 3-Mar-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.209;
RSS-210 issue 8 section 2.5.1, RSS-Gen issue 3 Table 6

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.209, RSS-Gen section 7.2.5, Field strength of emissions	Pass
FCC section 15.207(a), RSS-Gen, Section 7.2.4, Conducted emission	Not required
FCC section 15.203, RSS-Gen section 7.1.2, Antenna requirement	Pass
RSS-Gen, Section 4.6.1, Occupied bandwidth	Tested

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:ELPRAD_FCC.25485.

	Name and Title	Date	Signature
Tested by:	Mr. V. Einem, test engineer	March 3, 2014	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	April 2, 2014	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	April 2, 2014	

6 EUT description

6.1 General information

The EUT, proximity BUS reader, is an indoor/outdoor surface mounted proximity reader, containing transceiver operating at 125 kHz. The EUT enables the monitoring of general purpose inputs and control of one digital open-collector output. The proximity reader also includes a 2 m long RS-485 power/data cable for interfacing with an Elpas Local Controller or a RF IP Reader.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power and signal	RS-485	JBA	EUT	1	Unshielded	2
Control	Digital out	EUT	Switch	1	Unshielded	2


6.3 Support and test equipment

Description	Manufacturer	Model number	Serial number
Junction Box (JBA)	Visonic	w1304	60477855
RF Reader	Visonic	5-RFB00433	RFB06001E
Switch Box	Elpas	SWX	1234
PC	Dell	Latitude D430	49893604
AC/DC adapter	Dell	LA90PS0-00	68H-0A14
AC/DC adapter to JBA	Power-Win	PW-060A-01Y240	PW 72035700

6.4 Changes made in EUT

No changes were performed in the EUT during testing.

6.5 Test configuration

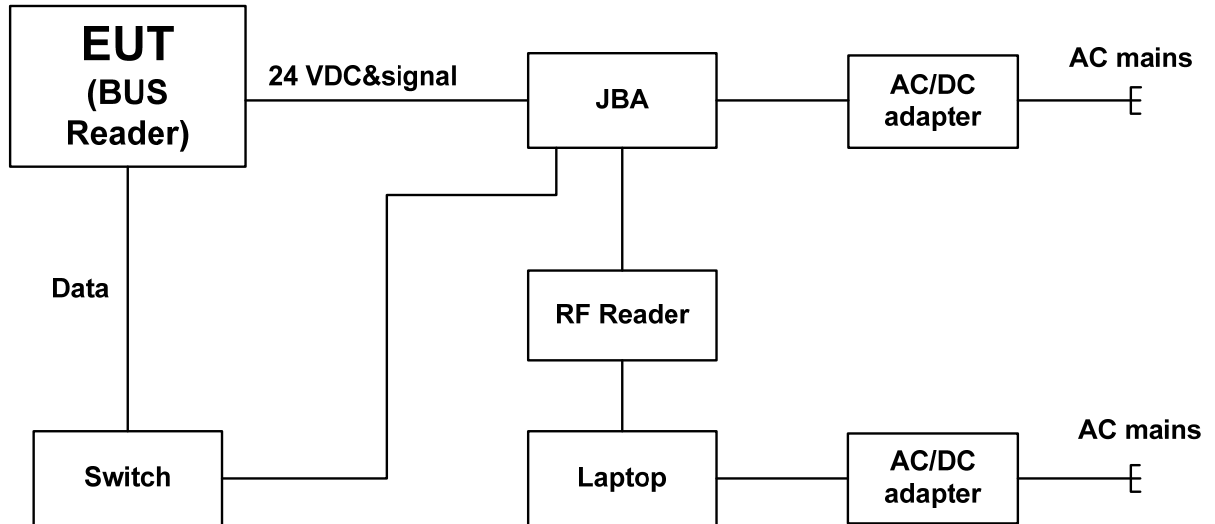

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		19-Feb-14	
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given Table 7.1.1 and Table 7.1.2.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, kHz	Field strength at 3 m, dB(μV/m)
	Average
125	105.69

Table 7.1.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Within restricted bands		
	Peak	Quasi Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**
0.090 – 0.110	NA	108.5 – 106.8**	NA
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**
0.490 – 1.705	NA	73.8 – 63.0**	NA
1.705 – 30.0*		69.5	
30 – 88		40.0	
88 – 216		43.5	
216 – 960		46.0	
960 - 1000		54.0	
1000 – 10 ^m harmonic	74.0	NA	54.0

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

7.1.2 Test procedure for fundamental and spurious emission field strength measurements in 9 kHz to 30 MHz

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The specified frequency range was investigated with a loop antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna was rotated around its vertical axis. The measuring antenna polarization was switched from vertical to horizontal.

7.1.2.3 The worst test results (the lowest margins) were recorded in Table 7.1.3 and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.3 The worst test results (the lowest margins) were recorded in Table 7.1.4 and shown in the associated plots.

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		19-Feb-14	
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz



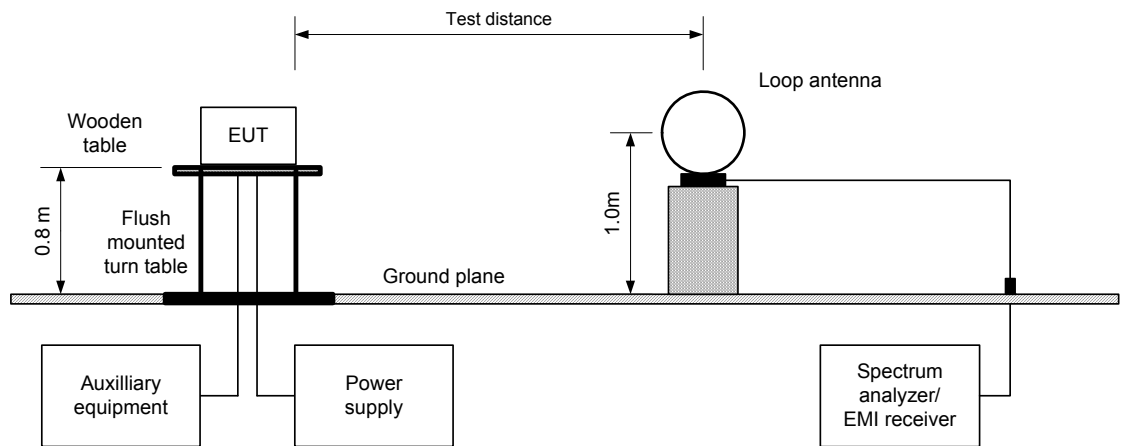


Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

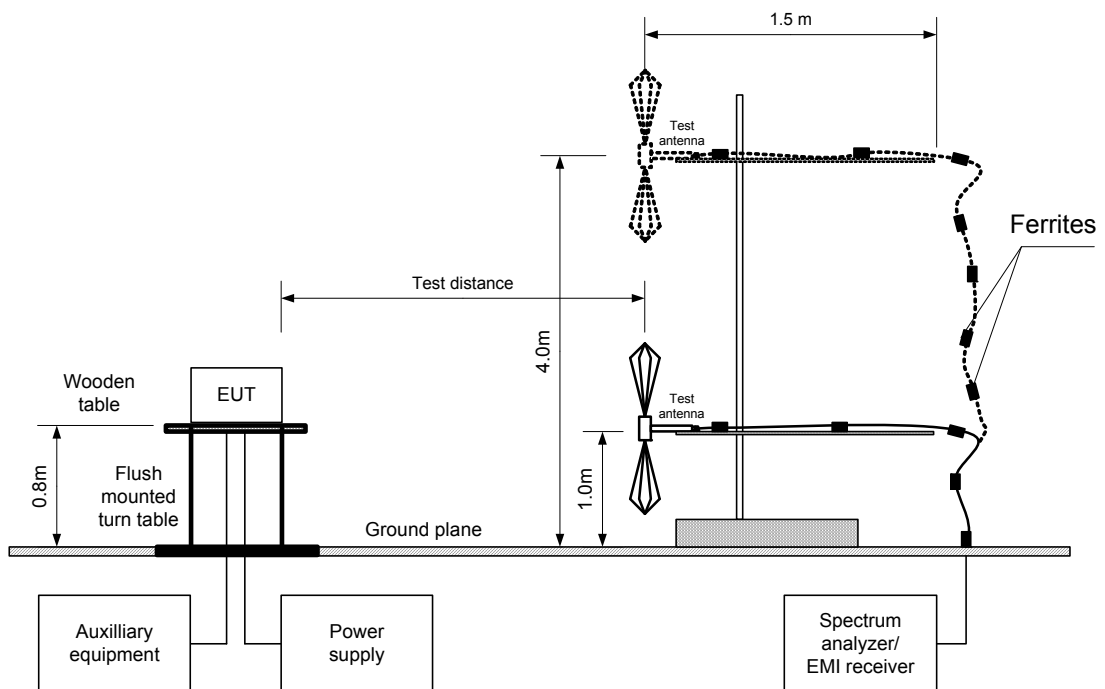



TEST DISTANCE:	3 m
TEST SITE:	Semi Anechoic chamber
EUT POSITION:	Typical (Vertical)
MODULATION:	Unmodulated
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz)

F, kHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
124.625	V	1.1	329.3	96.25	NA	NA	96.25	105.69	-9.44	Pass

******- Margin (dB) = measured result - specification limit.

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date(s):	19-Feb-14		
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

Table 7.1.4 Field strength of spurious emissions

TEST DISTANCE: 3 m
TEST SITE: Semi Anechoic chamber
EUT POSITION: Typical (Vertical)
MODULATION: Unmodulated
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 1 kHz (9 kHz – 150 kHz)
9.0 kHz (150 kHz – 30 MHz)
120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH: ≥ Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
33.92	37.20	29.45	40.0	-10.55	V	1.0	5	Pass
35.16	39.89	30.05	40.0	-9.95	V	1.1	10	
40.01	38.72	31.70	40.0	-8.3	V	1.0	280	
50.01	36.50	33.12	40.0	-6.88	V	1.4	355	
69.98	31.0	24.0	40.0	-16	V	1.0	85	
130.01	31.65	28.29	43.5	-15.21	V	1.0	27	

*- Margin = Measured emission - specification limit.

**-. EUT front panel refer to 0 degrees position of turntable.

Table 7.1.5 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 2871	HL 4353			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		19-Feb-14	
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

Plot 7.1.1 Radiated emission measurements at the fundamental frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

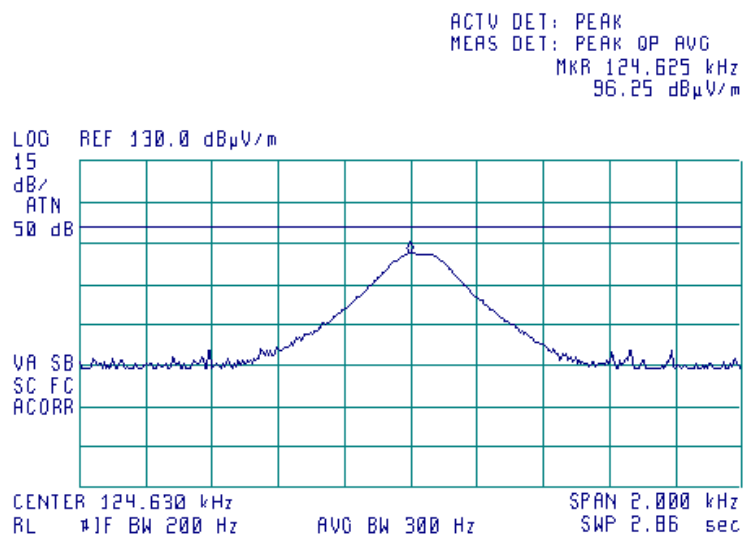

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		19-Feb-14	
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			


Plot 7.1.2 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

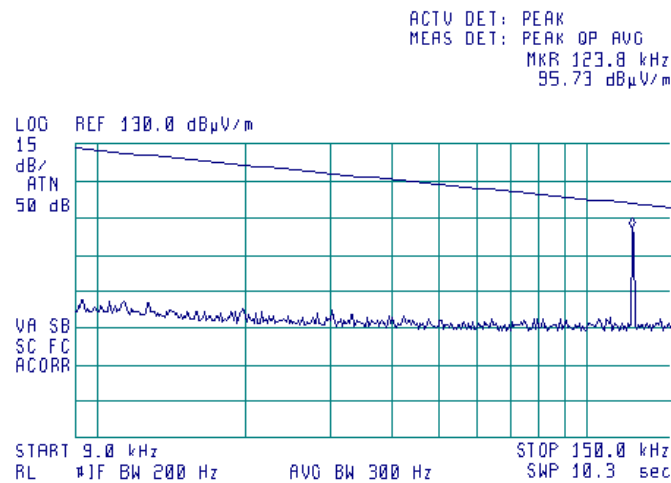

Plot 7.1.3 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

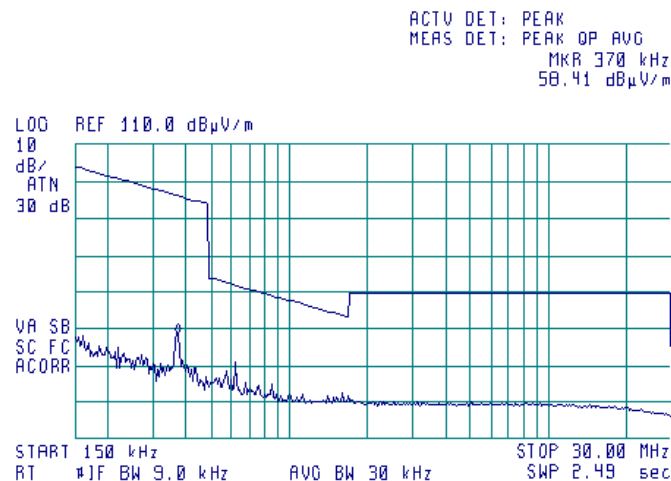




HERMON LABORATORIES

Test specification:		Section 15.209 / RSS-210, Tables 2, 3, Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date(s):		19-Feb-14	
Temperature: 22 °C	Air Pressure: 1024 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			


Plot 7.1.4 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Typical (Vertical)

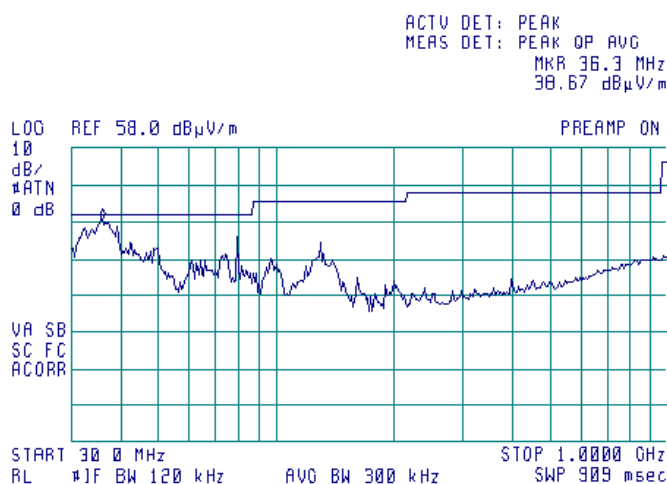

Plot 7.1.5 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Typical (Vertical)

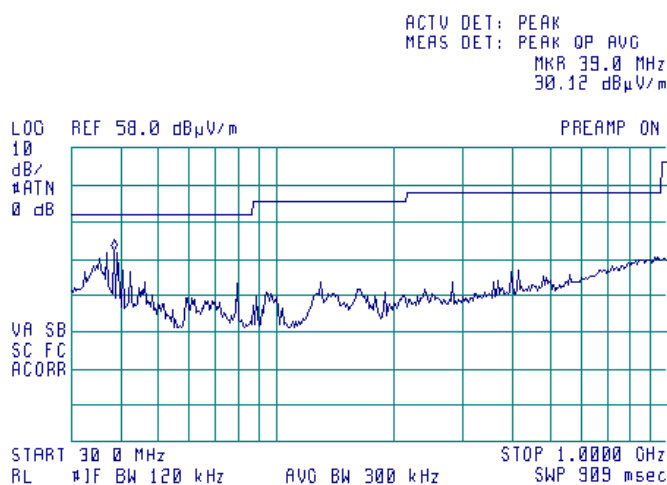

Test specification:	Section 15.203, RSS-Gen section 7.1.2, Antenna requirement		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict: PASS	
Date(s):	3-Mar-14		
Temperature: 23 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

7.2 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.2.1.

Table 7.2.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.2.1 Printed antenna view

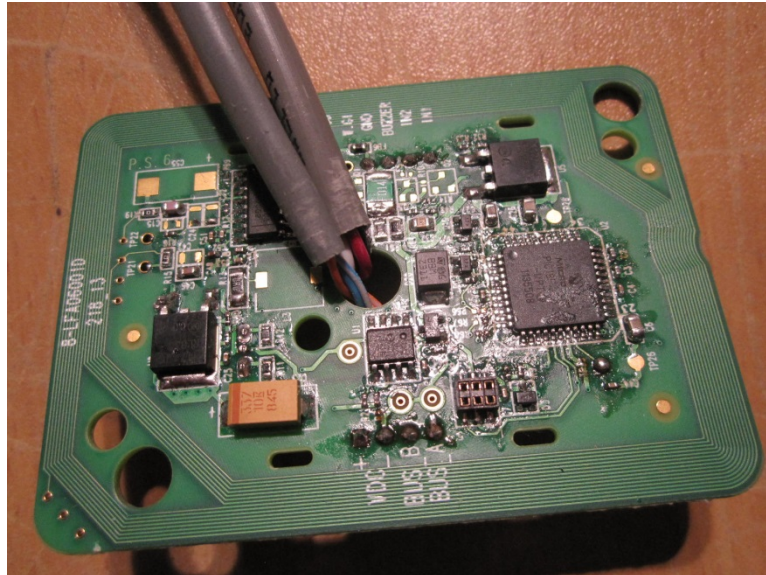

Test specification:		RSS-Gen, Section 4.6.1, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:	Compliance	Verdict: PASS	
Date(s):	3-Mar-14		
Temperature: 23 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth not specified by the standard. Specification test limits are given in Table 7.3.1.

Table 7.3.1 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
125 kHz	99%	NA

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.3.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and the associated plot.

Figure 7.3.1 Occupied bandwidth test setup



Test specification:		RSS-Gen, Section 4.6.1, Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:	Compliance	Verdict: PASS	
Date(s):	3-Mar-14		
Temperature: 23 °C	Air Pressure: 1019 hPa	Relative Humidity: 40 %	Power Supply: 24 VDC
Remarks:			

Table 7.3.2 The 99% dB occupied bandwidth test results

DETECTOR USED: Peak
SWEEP MODE: Max hold
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 1 kHz
VIDEO BANDWIDTH: 3 kHz
MODULATION ENVELOPE REFERENCE POINTS: 99%


Carrier frequency, kHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
125	2.1744	NA	NA	Tested

Reference numbers of test equipment used

HL 3818	HL 4135	HL 4293						
---------	---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Occupied bandwidth test result

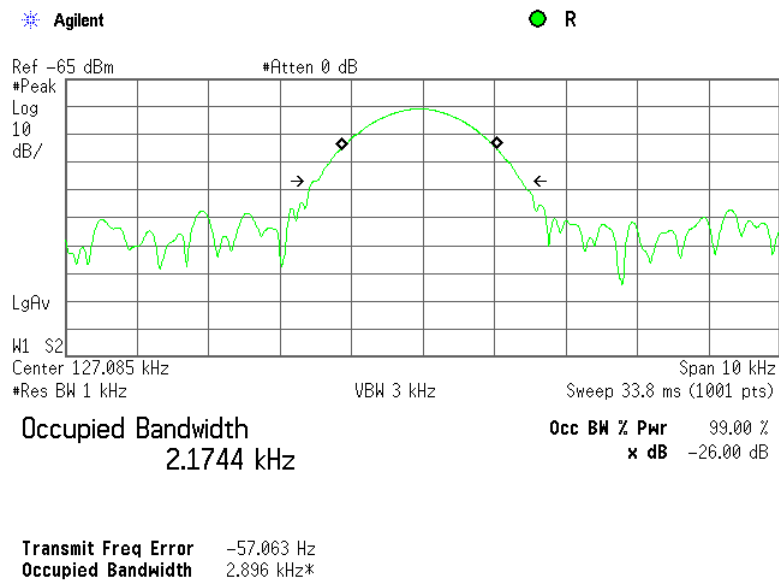

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	21-Jan-14	21-Jan-15
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY48250288	24-Apr-13	24-Apr-14
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000136	09-Apr-13	09-Apr-14
4293	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	18-Nov-13	18-Nov-14
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101003	06-Mar-13	06-Mar-14

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 3 m measuring distance	
Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment

12 APPENDIX E Test equipment correction factors

Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner,
Sucoflex P103, HL 4293

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	4900	2.01	9800	2.94	14700	3.85
100	0.28	5000	2.03	9900	2.95	14800	3.87
200	0.39	5100	2.06	10000	2.98	14900	3.89
300	0.48	5200	2.08	10100	3.01	15000	3.94
400	0.55	5300	2.07	10200	3.04	15100	3.94
500	0.61	5400	2.12	10300	3.04	15200	3.91
600	0.68	5500	2.12	10400	3.04	15300	3.93
700	0.73	5600	2.16	10500	3.07	15400	3.94
800	0.78	5700	2.16	10600	3.10	15500	3.96
900	0.83	5800	2.22	10700	3.11	15600	3.96
1000	0.88	5900	2.24	10800	3.12	15700	3.97
1100	0.92	6000	2.28	10900	3.15	15800	4.00
1200	0.96	6100	2.31	11000	3.22	15900	4.01
1300	1.00	6200	2.32	11100	3.20	16000	4.03
1400	1.04	6300	2.34	11200	3.19	16100	4.02
1500	1.07	6400	2.37	11300	3.21	16200	4.05
1600	1.11	6500	2.38	11400	3.26	16300	4.06
1700	1.15	6600	2.38	11500	3.27	16400	4.08
1800	1.19	6700	2.40	11600	3.27	16500	4.07
1900	1.22	6800	2.42	11700	3.28	16600	4.10
2000	1.25	6900	2.43	11800	3.32	16700	4.14
2100	1.28	7000	2.44	11900	3.34	16800	4.12
2200	1.34	7100	2.48	12000	3.34	16900	4.13
2300	1.35	7200	2.46	12100	3.35	17000	4.13
2400	1.39	7300	2.51	12200	3.39	17100	4.19
2500	1.40	7400	2.53	12300	3.44	17200	4.22
2600	1.44	7500	2.50	12400	3.44	17300	4.20
2700	1.47	7600	2.53	12500	3.43	17400	4.21
2800	1.50	7700	2.63	12600	3.45	17500	4.19
2900	1.54	7800	2.62	12700	3.47	17600	4.22
3000	1.56	7900	2.58	12800	3.51	17700	4.24
3100	1.59	8000	2.64	12900	3.51	17800	4.23
3200	1.62	8100	2.66	13000	3.52	17900	4.26
3300	1.64	8200	2.67	13100	3.56	18000	4.27
3400	1.67	8300	2.63	13200	3.57		
3500	1.69	8400	2.64	13300	3.58		
3600	1.72	8500	2.65	13400	3.60		
3700	1.74	8600	2.68	13500	3.61		
3800	1.78	8700	2.72	13600	3.66		
3900	1.80	8800	2.73	13700	3.68		
4000	1.83	8900	2.74	13800	3.67		
4100	1.84	9000	2.77	13900	3.68		
4200	1.86	9100	2.79	14000	3.73		
4300	1.89	9200	2.82	14100	3.74		
4400	1.92	9300	2.81	14200	3.74		
4500	1.94	9400	2.85	14300	3.76		
4600	1.97	9500	2.89	14400	3.78		
4700	1.97	9600	2.90	14500	3.81		
4800	2.01	9700	2.92	14600	3.83		

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT