

TEST REPORT

**ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231 and subpart B;
RSS-210 issue 8 Annex 1, ICES-003 Issue 5:2012**

FOR:

**Elpas Solutions Ltd.
Lone Worker Active RFID Tag
Models:
5-LW243037-0
5-LW242057-0
FCC ID:O4X5-LW2430370
IC:1467G-5LW2430370**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

| | | |
|-----|---|----|
| 1 | Applicant information..... | 3 |
| 2 | Equipment under test attributes | 3 |
| 3 | Manufacturer information | 3 |
| 4 | Test details | 3 |
| 5 | Tests summary..... | 4 |
| 6 | EUT description..... | 5 |
| 6.1 | General information..... | 5 |
| 6.2 | Test configuration..... | 5 |
| 6.3 | Changes made in EUT | 5 |
| 6.4 | EUT test positions | 6 |
| 6.5 | Transmitter characteristics | 7 |
| 7 | Transmitter tests according to 47CFR part 15 subpart C requirements | 8 |
| 7.1 | Periodic operation requirements | 8 |
| 7.2 | Field strength of emissions..... | 13 |
| 7.3 | Field strength of emissions..... | 26 |
| 7.4 | Occupied bandwidth test..... | 42 |
| 7.5 | Antenna requirements | 45 |
| 8 | Unintentional emissions | 46 |
| 8.1 | Radiated emission measurements | 46 |
| 9 | APPENDIX A Test equipment and ancillaries used for tests..... | 51 |
| 10 | APPENDIX B Measurement uncertainties..... | 52 |
| 11 | APPENDIX C Test laboratory description | 53 |
| 12 | APPENDIX D Specification references | 53 |
| 13 | APPENDIX E Test equipment correction factors..... | 54 |
| 14 | APPENDIX F Abbreviations and acronyms..... | 62 |
| 15 | APPENDIX G Manufacturer's declaration of similarity | 63 |



1 Applicant information

Client name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1422
Fax: +972 3768 1415
E-mail: aelshtein@tycoint.com
Contact name: Mr. Mr. Arick Elshtain

2 Equipment under test attributes

Product name: Lone Worker Active RFID Tag
Product type: Transceiver operating at 433 MHz (Tx) and 125 kHz (Rx)
Model: 5-LW243037-0; HW: 5-LW243037-0
Software release: JS-702986 (HEX); JS-702989 (E^2)
Model: 5-LW242057-0;HW: 5-LW242057-0
Software release: JS-702986 (HEX); JS-702990 (E^2)
Receipt date 26-May-15

3 Manufacturer information

Manufacturer name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1422
Fax: +972 3768 1415
E-Mail: aelshtein@tycoint.com
Contact name: Mr. Mr. Arick Elshtain

4 Test details

Project ID: 27065
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 26-May-15
Test completed: 14-Jul-15
Test specification(s): FCC 47CFR part 15, subpart C, §15.231 and subpart B;
RSS-210 issue 8 Annex 1, RSS-Gen issue 4, ICES-003 issue 5:2012



5 Tests summary

| Test | Status |
|--|--------------|
| FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements | Pass |
| FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions | Pass |
| FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth | Pass |
| FCC Part 15, Section 207 / RSS-Gen, Section 8.8, Conducted emission | Not required |
| FCC Part 15, Section 203 / RSS-Gen, Section 8.3, Antenna requirements | Pass |
| Unintentional emissions | |
| FCC Part 15, Section 107 / ICES-003, Section 6.1 class B, Conducted emission at AC power port | Not required |
| FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2/ ICES-003, Section 6.2 class B, Radiated emission | Pass |

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

| | Name and Title | Date | Signature |
|---------------------|--|-------------------|-----------|
| Tested by: | Mr. S. Samokha, test engineer | | |
| | Mr. V. Einem, test engineer | July 14, 2015 | |
| | Mr. I. Zilberstein, test engineer | | |
| Reviewed by: | Mrs. M. Cherniavsky, certification engineer | September 7, 2015 | |
| Approved by: | Mr. M. Nikishin, EMC and Radio group manager | December 30, 2015 | |



6 EUT description

6.1 General information


The EUT is a Lone Worker active RFID tag that comprises the 433.42 MHz transmitter and the 125 kHz receiver radio modules. The EUT is powered from 3V internal battery.

According to manufacturer's declaration of similarity provided in Appendix G of the test report, the EUT models have the same housing/enclosure, PCB, RF transmitter (433.42 MHz), LF receiver (125 kHz) and front pushbutton, and they vary in the following:

- the EUT model 5-LW243037-0 has also a fall detector and an IR transmitter;
- the EUT model 5-LW242057-0 has also a fall detector but has not an IR transmitter.

The EUT model 5-LW243037-0 was tested as the most populated version covering all variants, for model 5-LW242057-0 the field strength test was performed.

6.2 Test configuration

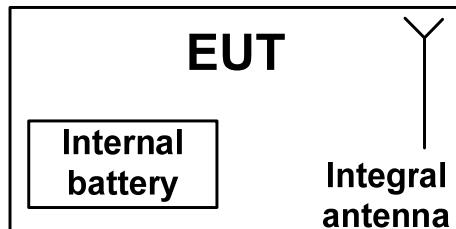

6.3 Changes made in EUT

No changes were implemented in the EUT during the testing.




6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position

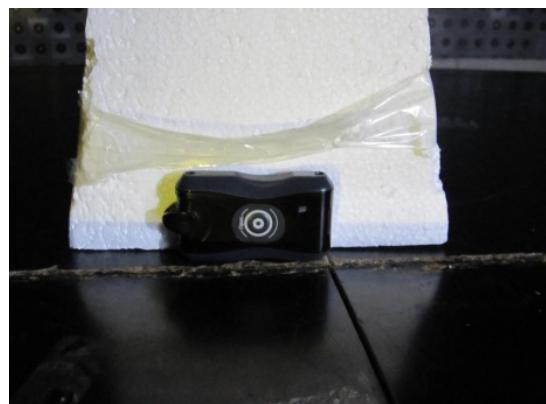

Photograph 6.4.3 EUT in Z-axis orthogonal position





6.5 Transmitter characteristics

| Type of equipment | | | | | | | | |
|--|--|---|-----------------|--------------------------------|--|--|--|--|
| <input checked="" type="checkbox"/> | Stand-alone (Equipment with or without its own control provisions) | | | | | | | |
| | Combined equipment (Equipment where the radio part is fully integrated within another type of equipment) | | | | | | | |
| | Plug-in card (Equipment intended for a variety of host systems) | | | | | | | |
| Operating frequencies | | 433.42 MHz | | | | | | |
| Maximum rated output power | | At transmitter 50 Ω RF output connector | | | dBm | | | |
| | | Field strength at 3 m distance | | | 87.16 dB(µV/m) -peak 47.16 dB(µV/m)-average (5-LW243037-0) 90.74 dB(µV/m) -peak 50.74 dB(µV/m)-average (5-LW242057-0) | | | |
| Is transmitter output power variable? | | X | No | | | | | |
| | | Yes | | continuous variable | | | | |
| | | | | stepped variable with stepsize | dB | | | |
| | | | | minimum RF power | dBm | | | |
| | | maximum RF power | | | | | | |
| Antenna connection | | | | | | | | |
| unique coupling | standard connector | | X | integral | X with temporary RF connector without temporary RF connector | | | |
| Antenna/s technical characteristics | | | | | | | | |
| Type | Manufacturer | | Model number | | | | | |
| Internal | Elpas | | Printed antenna | | | | | |
| Type of modulation | | GFSK | | | | | | |
| Transmitter aggregate data rate/s | | 175 kbps | | | | | | |
| Transmitter power source | | | | | | | | |
| <input checked="" type="checkbox"/> | Battery | Nominal rated voltage | 3.0 VDC | Battery type | Lithium | | | |
| | DC | Nominal rated voltage | VDC | | | | | |
| | AC mains | Nominal rated voltage | VAC | Frequency | | | | |
| Common power source for transmitter and receiver | | | X | yes | no | | | |



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements | | |
| Test procedure: | Supplier declaration | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 07-Jun-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW243037-0 | | | |

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- A manually operated transmitter shall employ switch that will automatically deactivate the transmitter within not more than 5 seconds of being released;
- A transmitter activated automatically shall cease transmission within 5 seconds after activation;
- Periodic transmissions, excluding polling or supervision transmissions, at regular predetermined intervals are not permitted;
- Total duration of polling or supervision transmissions, including data, to determine system integrity in security or safety applications shall not exceed 2 seconds per hour;
- Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in Plot 7.1.1.

7.1.3 Test procedure for measurements of polling / supervision transmission duration

7.1.3.1 The EUT was set up as shown in Figure 7.1.1.

7.1.3.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.3.3 The transmission time was captured and shown in the associated plots.

Figure 7.1.1 Setup for transmitter shut down test






HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements | | |
| Test procedure: | Supplier declaration | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 07-Jun-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW243037-0 | | | |

Table 7.1.1 Periodic operation requirements

| Requirement | Rationale | Verdict |
|---|--------------------------|---------|
| Continuous transmissions are not permitted | Supplier declaration | Comply |
| A manually operated transmitter shall be deactivated within not more than 5 seconds of switch being released | NA | NA |
| Transmitter activated automatically shall cease transmission within 5 seconds | Plot 7.1.1 | Comply |
| Periodic transmissions at regular predetermined intervals are not permitted | Supplier declaration | Comply |
| Total duration of polling or supervision transmissions shall not exceed 2 seconds per hour | Plot 7.1.2 to Plot 7.1.5 | Comply |
| Transmission of set-up information for security systems may exceed the transmission duration limits of 5 seconds, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data. | Supplier declaration | Comply |

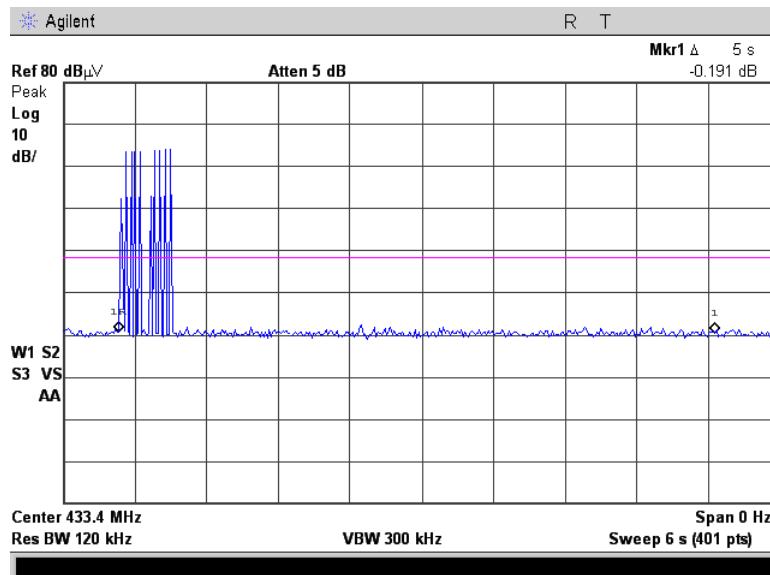
Plot 7.1.1 Transmitter shut down test result




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements | | |
| Test procedure: | Supplier declaration | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 07-Jun-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW243037-0 | | | |

Plot 7.1.2 Polling / supervision transmission duration

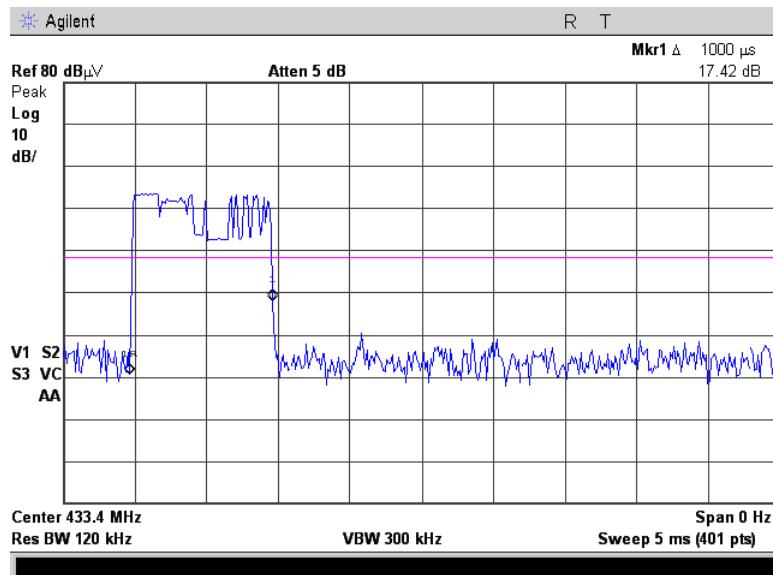

Plot 7.1.3 Polling / supervision transmission period

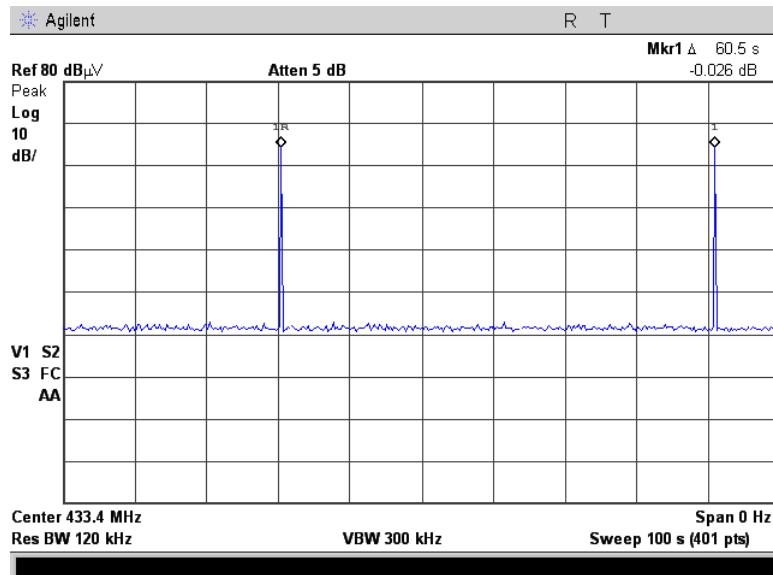





HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements | | |
| Test procedure: | Supplier declaration | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 07-Jun-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW243037-0 | | | |

Plot 7.1.4 Polling / supervision transmission period

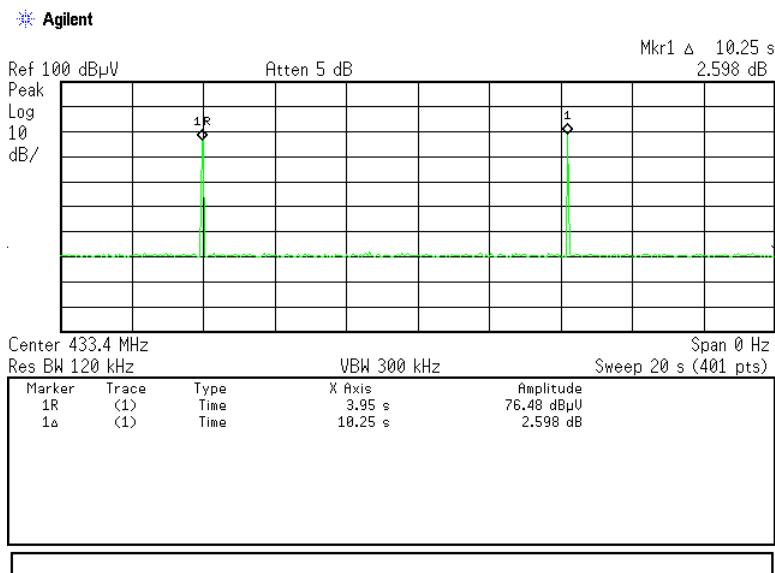

Plot 7.1.5 Number of transmissions within 60 sec period

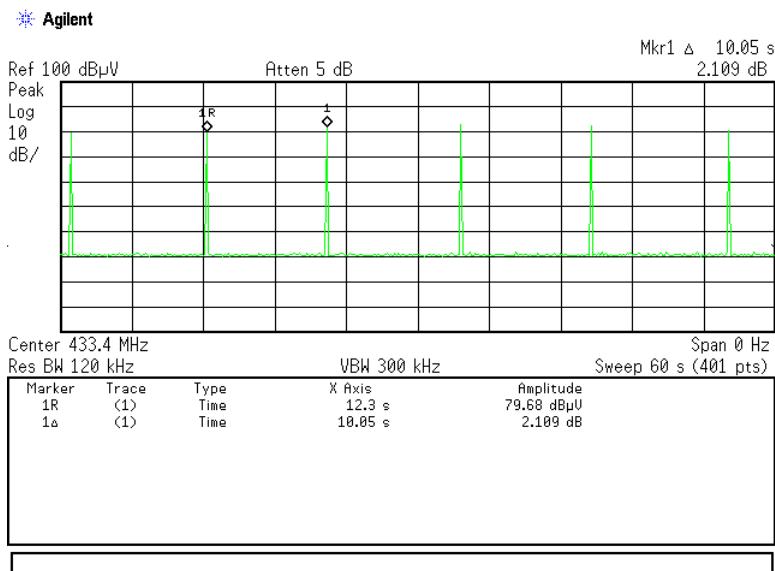



HERMON LABORATORIES

| | | | |
|-----------------------------|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(a) / RSS-210, Section A1.1.1, Periodic operation requirements | | |
| Test procedure: | Supplier declaration | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 07-Jun-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | EUT model 5-LW243037-0 | | |

Table 7.1.2 Total duration of polling / supervision transmissions

| Duration, ms | Repetition period, sec | Maximum number of transmissions within 1 hour | Total duration within 1 hour, ms |
|--------------|------------------------|---|----------------------------------|
| 1.0 | 10.0 | 360 | 360 |

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|--|--|--|--|--|
| HL 0337 | HL 3001 | HL 3433 | | | | | |
|---------|---------|---------|--|--|--|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

| Fundamental frequency, MHz | Field strength at 3 m, dB(µV/m) | |
|----------------------------|---------------------------------|---------|
| | Peak | Average |
| 433.42 | 92.9 | 72.9 |

Table 7.2.2 Radiated spurious emissions limits

| Frequency, MHz | Field strength at 3 m, dB(µV/m) | | | |
|----------------|---------------------------------|-----------------|-----------------|--------------------------|
| | Within restricted bands | | | Outside restricted bands |
| | Peak | Quasi Peak | Average | Peak |
| 0.009 – 0.090 | 148.5 – 128.5 | NA | 128.5 – 108.5** | |
| 0.090 – 0.110 | NA | 108.5 – 106.8** | NA | |
| 0.110 – 0.490 | 126.8 – 113.8 | NA | 106.8 – 93.8** | |
| 0.490 – 1.705 | | 73.8 – 63.0** | | |
| 1.705 – 30.0* | | 69.5 | | |
| 30 – 88 | NA | 40.0 | NA | 72.9*** |
| 88 – 216 | | 43.5 | | 52.9*** |
| 216 – 960 | | 46.0 | | |
| 960 - 1000 | | 54.0 | | |
| Above 1000 | 74.0 | NA | 54.0 | |

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - according to standard section 15.205(c).

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log (56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log (41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |


7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.
- 7.2.3.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

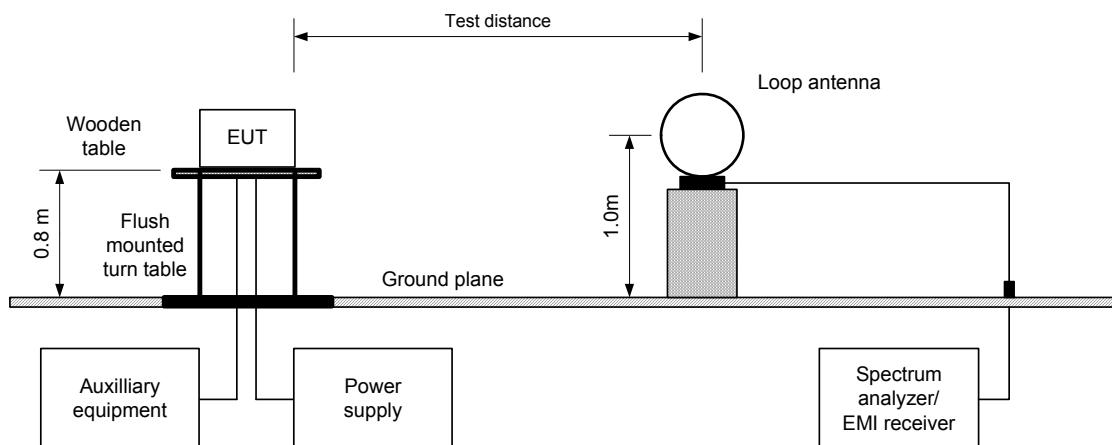




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

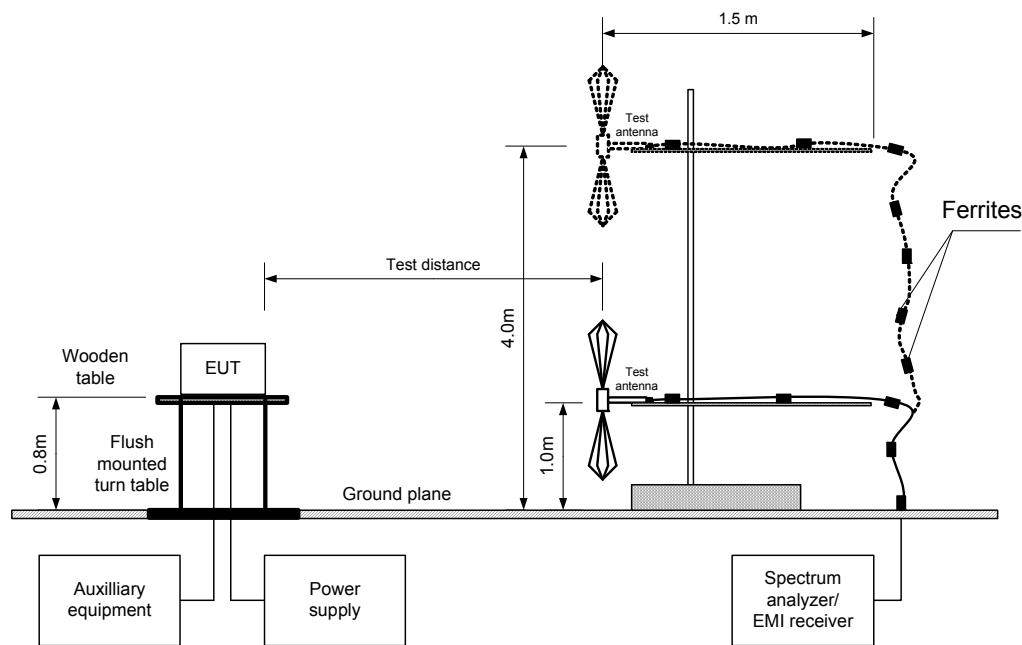



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

| | |
|-------------------------------|--|
| TEST DISTANCE: | 3 m |
| EUT POSITION: | 3 orthogonal (X / Y / Z) |
| MODULATION: | GFSK |
| INVESTIGATED FREQUENCY RANGE: | 0.009 – 4500 MHz |
| DETECTOR USED: | Peak |
| RESOLUTION BANDWIDTH: | 1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) |
| VIDEO BANDWIDTH: | ≥ Resolution bandwidth |
| TEST ANTENNA TYPE: | Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz) |

| F, MHz | Antenna | | Azimuth, degrees* | Peak field strength | | | Average field strength | | | Verdict |
|--------------------------------|---------|-----------|-------------------|---------------------|-----------------|--------------|------------------------|----------------------|-----------------|---------|
| | Pol. | Height, m | | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB** | Measured, dB(µV/m) | Calculated, dB(µV/m) | Limit, dB(µV/m) | |
| Fundamental emission*** | | | | | | | | | | |
| 433.34 | Ver | 1.2 | 190 | 87.16 | 92.9 | -5.74 | 87.16 | 47.16 | 72.9 | -25.74 |
| Spurious emissions | | | | | | | | | | |
| 867.040 | Hor | 1.35 | 20 | 42.23 | 72.9 | -30.67 | 41.68 | 1.68 | 52.9 | -51.22 |
| 1300.360 | Hor | 1.0 | 78 | 42.78 | 74.0 | -31.22 | 42.68 | 2.68 | 54.0 | -51.32 |

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

*** Max value was obtained in Z-axis orthogonal position.

Table 7.2.4 Average factor calculation

| Transmission pulse | | Transmission burst | | Transmission train duration, ms | Average factor, dB |
|--------------------|-----------|--------------------|------------|---------------------------------|--------------------|
| Duration, ms | Period, s | Duration, ms | Period, ms | | |
| 1.0 | 10 | NA | NA | NA | -40.0 |

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|--|--|--|--|
| HL 0521 | HL 1984 | HL 4353 | HL 4722 | | | | |
|---------|---------|---------|---------|--|--|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

| | |
|-------------------------------|--|
| TEST DISTANCE: | 3 m |
| EUT POSITION: | 3 orthogonal (X / Y / Z) |
| MODULATION: | GFSK |
| INVESTIGATED FREQUENCY RANGE: | 0.009 – 1000 MHz |
| DETECTOR USED: | Peak |
| RESOLUTION BANDWIDTH: | 1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth |
| VIDEO BANDWIDTH: | Active loop (9 kHz – 30 MHz) |
| TEST ANTENNA TYPE: | Biconilog (30 MHz – 1000 MHz) |

| Frequency, MHz | Peak emission, dB(µV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------------------------|-------------------------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| | | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| No spurious emissions were found | | | | | | | | |

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|--|--|--|
| HL 0446 | HL 0521 | HL 0604 | HL 4353 | HL 4722 | | | |
|---------|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | | | |
|--|---|--------------------------------|--|---------------------------------|-----------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | | | |
| Test mode: | Compliance | | | | Verdict: PASS |
| Date(s): | 26-May-15 | | | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | | Power Supply: 3V battery | |
| Remarks: EUT model 5 LW243037-0 | | | | | |

Table 7.2.6 Restricted bands according to FCC 15, Section 205

| MHz | MHz | MHz | MHz | MHz | GHz |
|-------------------|---------------------|-----------------------|-----------------|---------------|---------------|
| 0.09 - 0.11 | 8.37625 - 8.38675 | 73 - 74.6 | 399.9 - 410 | 2690 - 2900 | 10.6 - 12.7 |
| 0.495 - 0.505 | 8.41425 - 8.41475 | 74.8 - 75.2 | 608 - 614 | 3260 - 3267 | 13.25 - 13.4 |
| 2.1735 - 2.1905 | 12.290 - 12.293 | 108 - 121.94 | 960 - 1240 | 3332 - 3339 | 14.47 - 14.5 |
| 4.125 - 4.128 | 12.51975 - 12.52025 | 123 - 138 | 1300 - 1427 | 3345.8 - 3358 | 15.35 - 16.2 |
| 4.17725 - 4.17775 | 12.57675 - 12.57725 | 149.9 - 150.05 | 1435 - 1626.5 | 3600 - 4400 | 17.7 - 21.4 |
| 4.20725 - 4.20775 | 13.36 - 13.41 | 156.52475 - 156.52525 | 1645.5 - 1646.5 | 4500 - 5150 | 22.01 - 23.12 |
| 6.215 - 6.218 | 16.420 - 16.423 | 156.7 - 156.9 | 1660 - 1710 | 5350 - 5460 | 23.6 - 24 |
| 6.26775 - 6.26825 | 16.69475 - 16.69525 | 162.0125 - 167.17 | 1718.8 - 1722.2 | 7250 - 7750 | 31.2 - 31.8 |
| 6.31175 - 6.31225 | 16.80425 - 16.80475 | 167.72 - 173.2 | 2200 - 2300 | 8025 - 8500 | 36.43 - 36.5 |
| 8.291 - 8.294 | 25.5 - 25.67 | 240 - 285 | 2310 - 2390 | 9000 - 9200 | |
| 8.362 - 8.366 | 37.5 - 38.25 | 322 - 335.4 | 2483.5 - 2500 | 9300 - 9500 | Above 38.6 |

Table 7.2.7 Restricted bands according to RSS-Gen, Table 3

| MHz | MHz | MHz | MHz | MHz | GHz |
|-------------------|---------------------|-----------------------|-----------------|---------------|---------------|
| 0.09 - 0.11 | 8.291 - 8.294 | 16.80425 - 16.80475 | 399.9 - 410 | 3260 - 3267 | 10.6 - 12.7 |
| 2.1735 - 2.190 | 8.362 - 8.366 | 25.5 - 25.67 | 608 - 614 | 3332 - 3339 | 13.25 - 13.4 |
| 3.020 - 3.026 | 8.37625 - 8.38675 | 37.5 - 38.25 | 960 - 1427 | 3345.8 - 3358 | 14.47 - 14.5 |
| 4.125 - 4.128 | 8.41425 - 8.41475 | 73 - 74.6 | 1435 - 1626.5 | 3500 - 4400 | 15.35 - 16.2 |
| 4.17725 - 4.17775 | 12.290 - 12.293 | 74.8 - 75.2 | 1645.5 - 1646.5 | 4500 - 5150 | 17.7 - 21.4 |
| 4.20725 - 4.20775 | 12.51975 - 12.52025 | 108 - 138 | 1660 - 1710 | 5350 - 5460 | 22.01 - 23.12 |
| 5.677 - 5.683 | 12.57675 - 12.57725 | 156.52475 - 156.52525 | 1718.8 - 1722.2 | 7250 - 7750 | 23.6 - 24.0 |
| 6.215 - 6.218 | 13.36 - 13.41 | 156.7 - 156.9 | 2200 - 2300 | 8025 - 8500 | 31.2 - 31.8 |
| 6.26775 - 6.26825 | 16.42 - 16.423 | 240 - 285 | 2310 - 2390 | 9000 - 9200 | 36.43 - 36.5 |
| 6.31175 - 6.31225 | 16.69475 - 16.69525 | 322 - 335.4 | 2655 - 2900 | 9300 - 9500 | Above 38.6 |



HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: 3 orthogonal (X/ Y/ Z)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.34 MHz
87.16 dB μ V/m

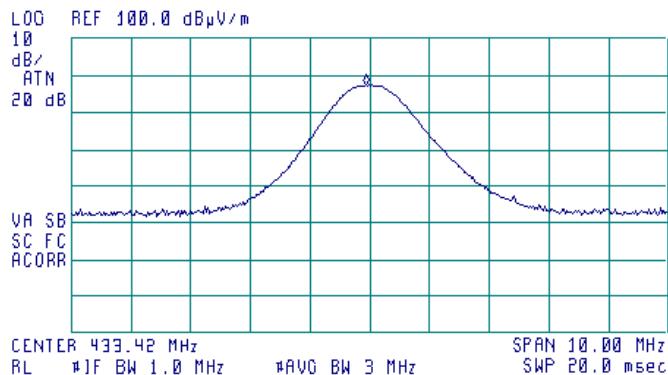


Plot 7.2.2 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: 3 orthogonal (X/ Y/ Z)



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.29 MHz
83.67 dB μ V/m

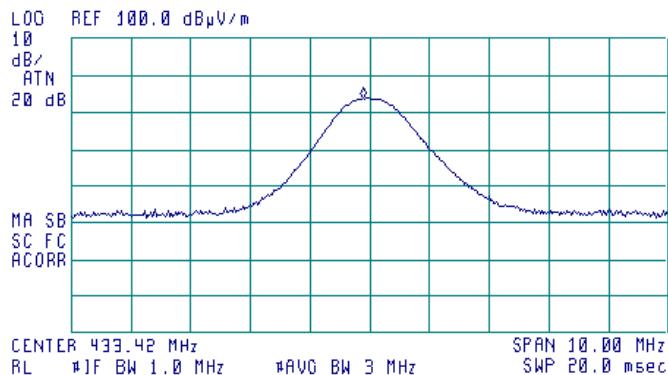




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |


Plot 7.2.3 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

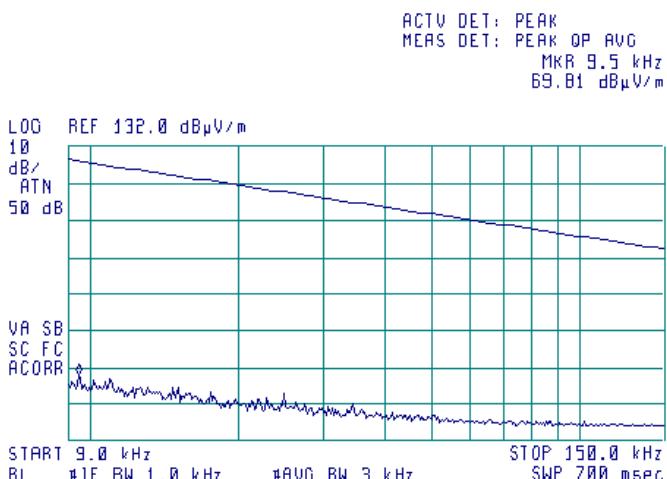

Plot 7.2.4 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

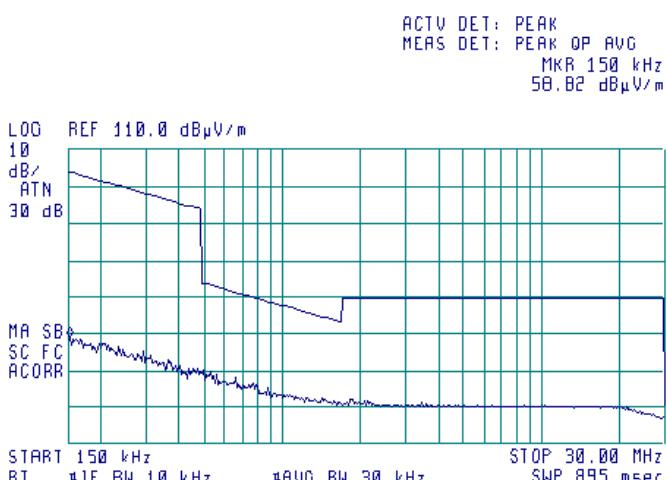




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |


Plot 7.2.5 Radiated emission measurements from 30 to 600 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Z-axis

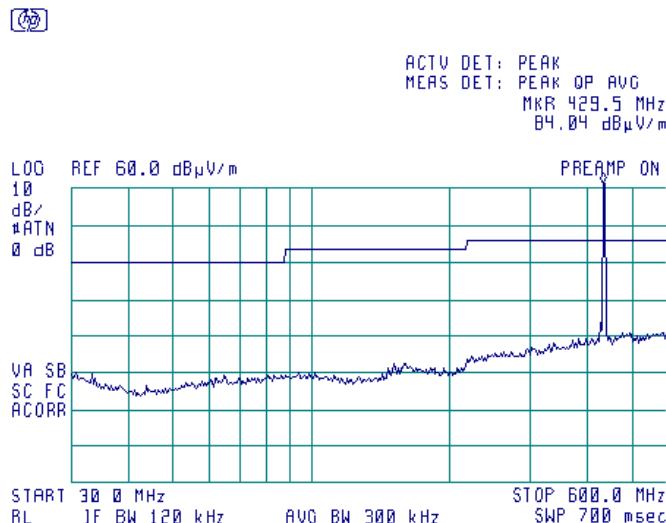

Plot 7.2.6 Radiated emission measurements from 600 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Z-axis

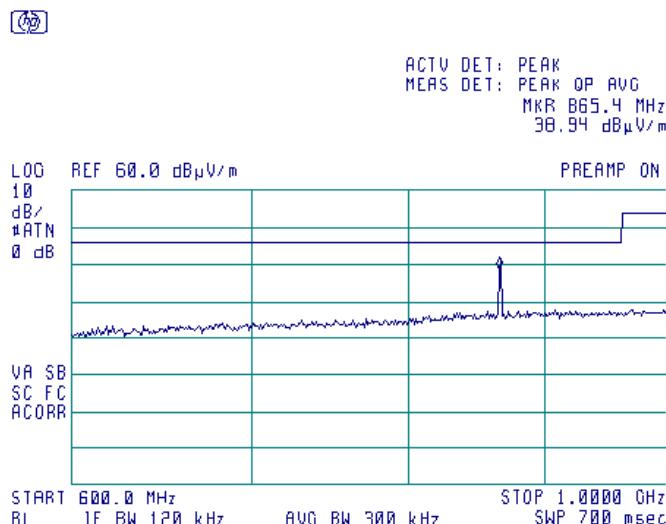



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.2.7 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 4.2B1 GHz
45.92 dB μ V/m

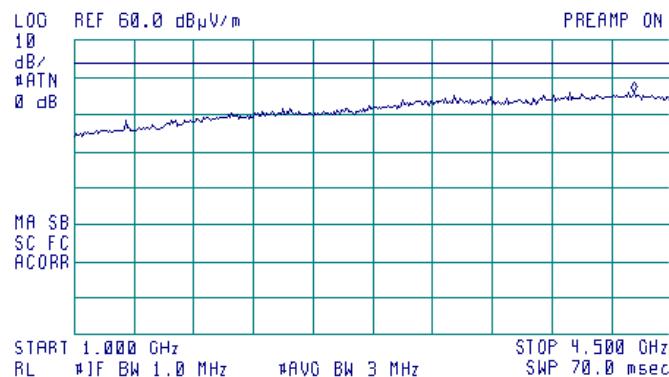



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.2.8 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

208dgr EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 867.045 MHz
41.63 dB μ V/m

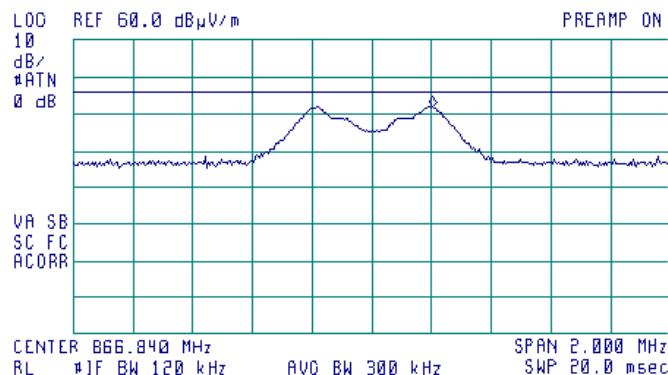

Plot 7.2.9 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Horizontal

EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 867.025 MHz
42.23 dB μ V/m

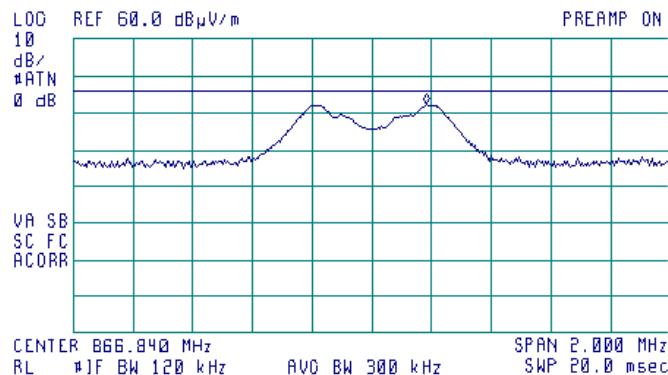



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.2.10 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical

EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1 30009 GHz
41.42 dB μ V/m

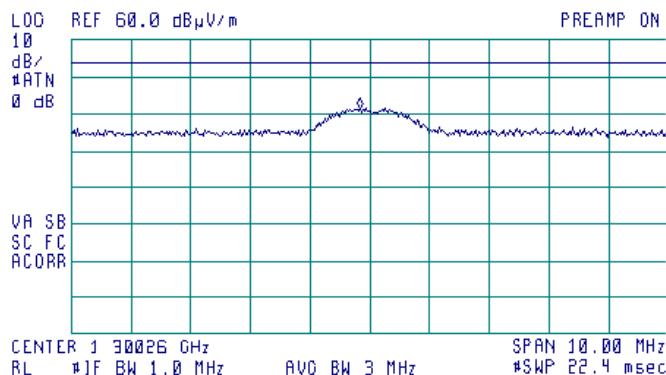

Plot 7.2.11 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber


TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Horizontal

EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1 30036 GHz
42.78 dB μ V/m

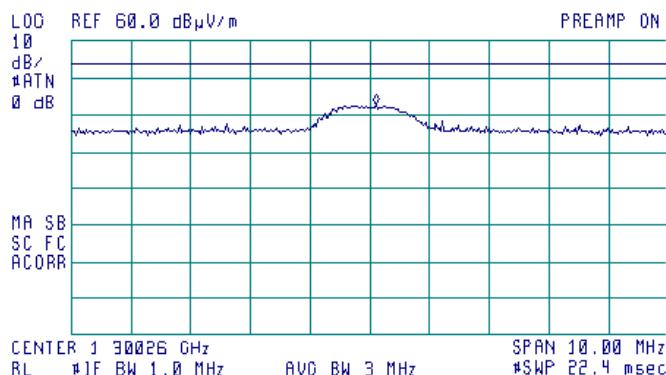





HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1011 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.2.12 Transmission pulse duration

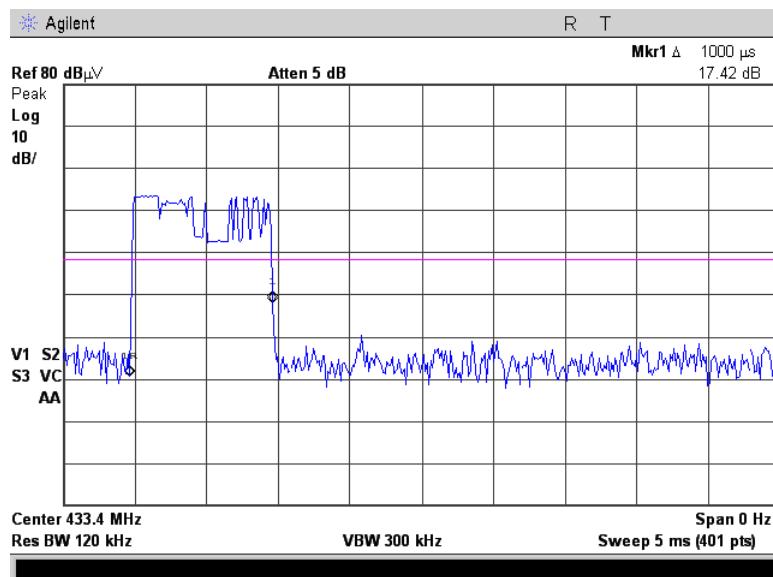

Plot 7.2.13 Transmission pulse period

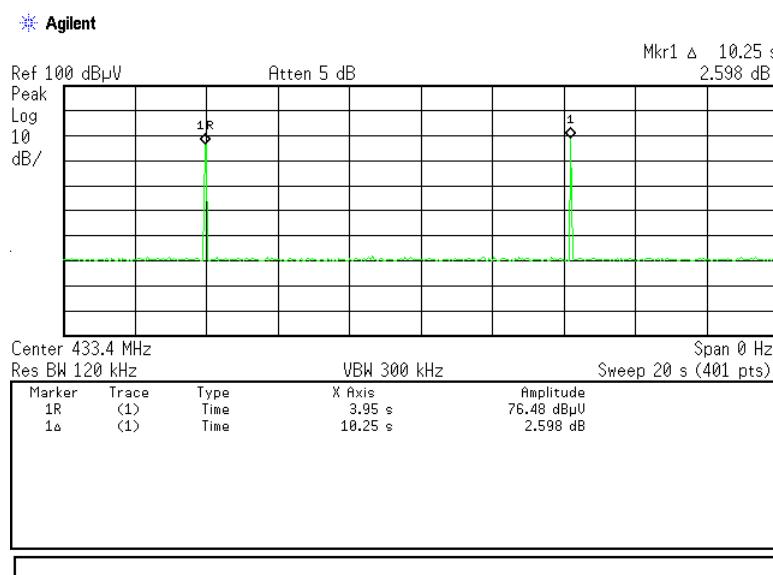



HERMON LABORATORIES

| | | | |
|----------------------------|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: | EUT model 5-LW242057-0 | | |

7.3 Field strength of emissions

7.3.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.3.1 and Table 7.3.2.

Table 7.3.1 Radiated fundamental emission limits

| Fundamental frequency, MHz | Field strength at 3 m, dB(µV/m) | |
|----------------------------|---------------------------------|---------|
| | Peak | Average |
| 433.42 | 92.9 | 72.9 |

Table 7.3.2 Radiated spurious emissions limits

| Frequency, MHz | Field strength at 3 m, dB(µV/m) | | | | |
|----------------|---------------------------------|-----------------|-----------------|--------------------------|---------|
| | Within restricted bands | | | Outside restricted bands | |
| | Peak | Quasi Peak | Average | Peak | Average |
| 0.009 – 0.090 | 148.5 – 128.5 | NA | 128.5 – 108.5** | | |
| 0.090 – 0.110 | NA | 108.5 – 106.8** | NA | | |
| 0.110 – 0.490 | 126.8 – 113.8 | NA | 106.8 – 93.8** | | |
| 0.490 – 1.705 | | 73.8 – 63.0** | | | |
| 1.705 – 30.0* | | 69.5 | | | |
| 30 – 88 | NA | 40.0 | NA | 72.9*** | 52.9*** |
| 88 – 216 | | 43.5 | | | |
| 216 – 960 | | 46.0 | | | |
| 960 - 1000 | | 54.0 | | | |
| Above 1000 | 74.0 | NA | 54.0 | | |

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - according to standard section 15.205(c).

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |


7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.
- 7.3.2.2 The measurements were performed in three EUT orthogonal positions.
- 7.3.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.3.2.4 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.
- 7.3.3.2 The measurements were performed in three EUT orthogonal positions.
- 7.3.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.3.3.4 The worst test results (the lowest margins) were recorded in Table 7.3.3, Table 7.3.5 and shown in the associated plots.

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz

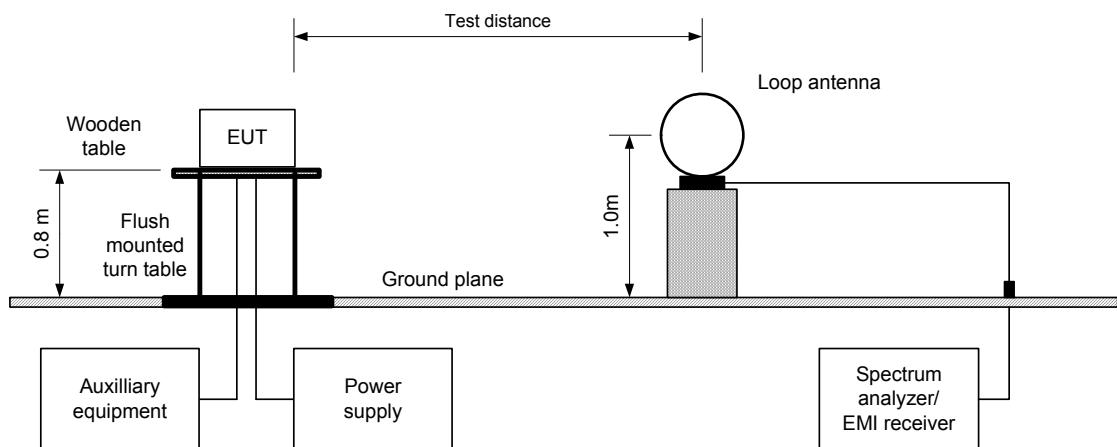




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz

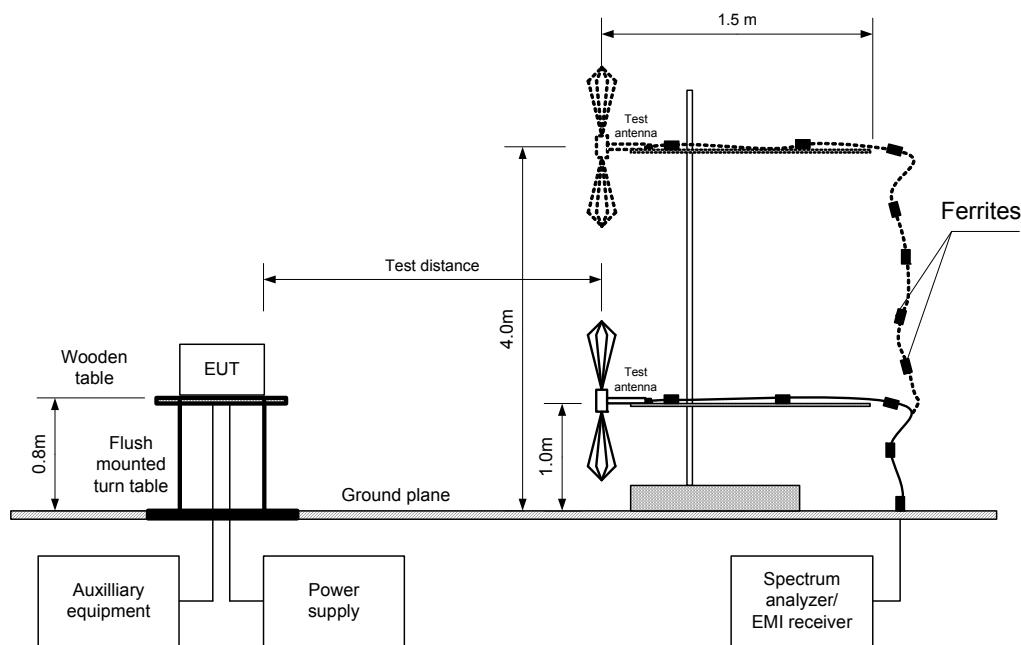



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Table 7.3.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

| | |
|-------------------------------|--|
| TEST DISTANCE: | 3 m |
| EUT POSITION: | 3 orthogonal (X / Y / Z) |
| MODULATION: | GFSK |
| INVESTIGATED FREQUENCY RANGE: | 0.009 – 4500 MHz |
| DETECTOR USED: | Peak |
| RESOLUTION BANDWIDTH: | 1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) |
| VIDEO BANDWIDTH: | ≥ Resolution bandwidth |
| TEST ANTENNA TYPE: | Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz) |

| F, MHz | Antenna | | Azimuth, degrees* | Peak field strength | | | Average field strength | | | Verdict | |
|--------------------------------|---------|-----------|-------------------|---------------------|-----------------|--------------|------------------------|----------------------|-----------------|---------|------|
| | Pol. | Height, m | | Measured, dB(µV/m) | Limit, dB(µV/m) | Margin, dB** | Measured, dB(µV/m) | Calculated, dB(µV/m) | Limit, dB(µV/m) | | |
| Fundamental emission*** | | | | | | | | | | | |
| 433.37 | Ver | 1.3 | 40 | 90.03 | 92.9 | -2.87 | 90.03 | 50.03 | 72.9 | -22.87 | Pass |
| 433.37 | Hor | 1.5 | 0 | 90.74 | 92.9 | -2.16 | 90.74 | 50.74 | 72.9 | -22.16 | Pass |
| Spurious emissions | | | | | | | | | | | |
| 866.833 | Vert | 1.4 | 30 | 37.59 | 72.9 | -35.31 | 37.59 | -2.41 | 52.9 | -55.31 | Pass |
| 1300.435 | Vert | 1.6 | 90 | 43.39 | 74.0 | -30.61 | 43.39 | 3.39 | 54.0 | -50.61 | |
| 4334.100 | Hor | 1.5 | 0 | 53.30 | 74.0 | -20.70 | 53.30 | 13.30 | 54.0 | -40.70 | |

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin, dB =Measured (calculated) value, dB(µV/m)-Limit, dB(µV/m)

*** Max value was obtained in Z-axis orthogonal position.

Table 7.3.4 Average factor calculation

| Transmission pulse | | Transmission burst | | Transmission train duration, ms | Average factor, dB |
|--------------------|-----------|--------------------|------------|---------------------------------|--------------------|
| Duration, ms | Period, s | Duration, ms | Period, ms | | |
| 1.0 | 10 | NA | NA | NA | -40.0 |

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

| | | | | | | |
|---------|---------|---------|---------|--|--|--|
| HL 0521 | HL 1984 | HL 4353 | HL 4722 | | | |
|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Table 7.3.5 Field strength of emissions below 1 GHz within restricted bands

| | |
|-------------------------------|--|
| TEST DISTANCE: | 3 m |
| EUT POSITION: | 3 orthogonal (X / Y / Z) |
| MODULATION: | GFSK |
| INVESTIGATED FREQUENCY RANGE: | 0.009 – 1000 MHz |
| DETECTOR USED: | Peak |
| RESOLUTION BANDWIDTH: | 1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth |
| VIDEO BANDWIDTH: | |
| TEST ANTENNA TYPE: | Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) |

| Frequency, MHz | Peak emission, dB(µV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|----------------------------------|-------------------------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| | | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| No spurious emissions were found | | | | | | | | |

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|---------|--|--|
| HL 0446 | HL 0521 | HL 0604 | HL 1984 | HL 4353 | HL 4722 | | |
|---------|---------|---------|---------|---------|---------|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES

| | | | | | |
|--|---|--------------------------------|--|---------------------------------|-------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | | | |
| Test mode: | Compliance | | | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | | Power Supply: 3V battery | |
| Remarks: EUT model 5-LW242057-0 | | | | | |

Table 7.3.6 Restricted bands according to FCC 15, Section 205

| MHz | MHz | MHz | MHz | MHz | GHz |
|-------------------|---------------------|-----------------------|-----------------|---------------|---------------|
| 0.09 - 0.11 | 8.37625 - 8.38675 | 73 - 74.6 | 399.9 - 410 | 2690 - 2900 | 10.6 - 12.7 |
| 0.495 - 0.505 | 8.41425 - 8.41475 | 74.8 - 75.2 | 608 - 614 | 3260 - 3267 | 13.25 - 13.4 |
| 2.1735 - 2.1905 | 12.290 - 12.293 | 108 - 121.94 | 960 - 1240 | 3332 - 3339 | 14.47 - 14.5 |
| 4.125 - 4.128 | 12.51975 - 12.52025 | 123 - 138 | 1300 - 1427 | 3345.8 - 3358 | 15.35 - 16.2 |
| 4.17725 - 4.17775 | 12.57675 - 12.57725 | 149.9 - 150.05 | 1435 - 1626.5 | 3600 - 4400 | 17.7 - 21.4 |
| 4.20725 - 4.20775 | 13.36 - 13.41 | 156.52475 - 156.52525 | 1645.5 - 1646.5 | 4500 - 5150 | 22.01 - 23.12 |
| 6.215 - 6.218 | 16.420 - 16.423 | 156.7 - 156.9 | 1660 - 1710 | 5350 - 5460 | 23.6 - 24 |
| 6.26775 - 6.26825 | 16.69475 - 16.69525 | 162.0125 - 167.17 | 1718.8 - 1722.2 | 7250 - 7750 | 31.2 - 31.8 |
| 6.31175 - 6.31225 | 16.80425 - 16.80475 | 167.72 - 173.2 | 2200 - 2300 | 8025 - 8500 | 36.43 - 36.5 |
| 8.291 - 8.294 | 25.5 - 25.67 | 240 - 285 | 2310 - 2390 | 9000 - 9200 | |
| 8.362 - 8.366 | 37.5 - 38.25 | 322 - 335.4 | 2483.5 - 2500 | 9300 - 9500 | Above 38.6 |

Table 7.3.7 Restricted bands according to RSS-Gen, Table 3

| MHz | MHz | MHz | MHz | MHz | GHz |
|-------------------|---------------------|-----------------------|-----------------|---------------|---------------|
| 0.09 - 0.11 | 8.291 - 8.294 | 16.80425 - 16.80475 | 399.9 - 410 | 3260 - 3267 | 10.6 - 12.7 |
| 2.1735 - 2.190 | 8.362 - 8.366 | 25.5 - 25.67 | 608 - 614 | 3332 - 3339 | 13.25 - 13.4 |
| 3.020 - 3.026 | 8.37625 - 8.38675 | 37.5 - 38.25 | 960 - 1427 | 3345.8 - 3358 | 14.47 - 14.5 |
| 4.125 - 4.128 | 8.41425 - 8.41475 | 73 - 74.6 | 1435 - 1626.5 | 3500 - 4400 | 15.35 - 16.2 |
| 4.17725 - 4.17775 | 12.290 - 12.293 | 74.8 - 75.2 | 1645.5 - 1646.5 | 4500 - 5150 | 17.7 - 21.4 |
| 4.20725 - 4.20775 | 12.51975 - 12.52025 | 108 - 138 | 1660 - 1710 | 5350 - 5460 | 22.01 - 23.12 |
| 5.677 - 5.683 | 12.57675 - 12.57725 | 156.52475 - 156.52525 | 1718.8 - 1722.2 | 7250 - 7750 | 23.6 - 24.0 |
| 6.215 - 6.218 | 13.36 - 13.41 | 156.7 - 156.9 | 2200 - 2300 | 8025 - 8500 | 31.2 - 31.8 |
| 6.26775 - 6.26825 | 16.42 - 16.423 | 240 - 285 | 2310 - 2390 | 9000 - 9200 | 36.43 - 36.5 |
| 6.31175 - 6.31225 | 16.69475 - 16.69525 | 322 - 335.4 | 2655 - 2900 | 9300 - 9500 | Above 38.6 |



HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433,395 MHz
89.52 dB μ V/m

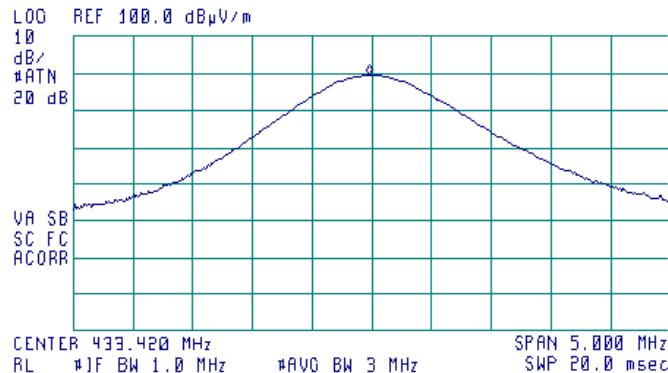


Plot 7.3.2 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433,445 MHz
87.51 dB μ V/m

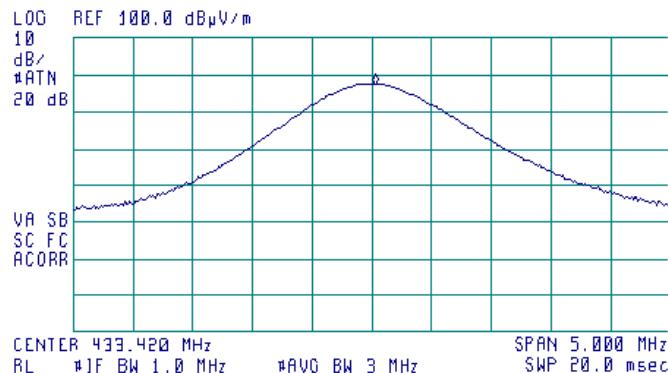



HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.370 MHz
90.03 dB μ V/m

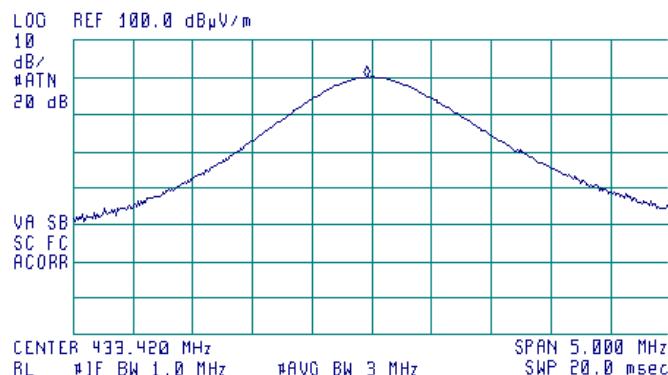


Plot 7.3.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.400 MHz
82.91 dB μ V/m

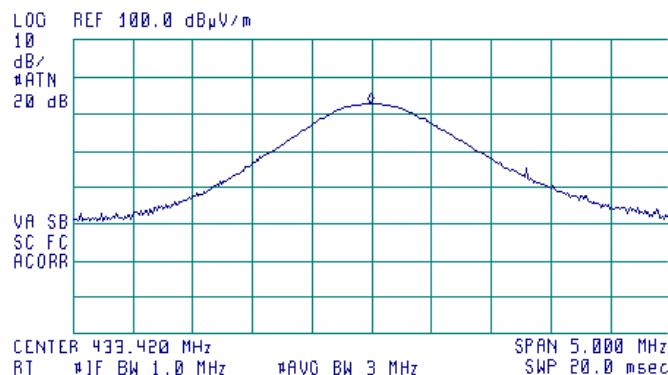



HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.5 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.433 MHz
76.62 dB μ V/m

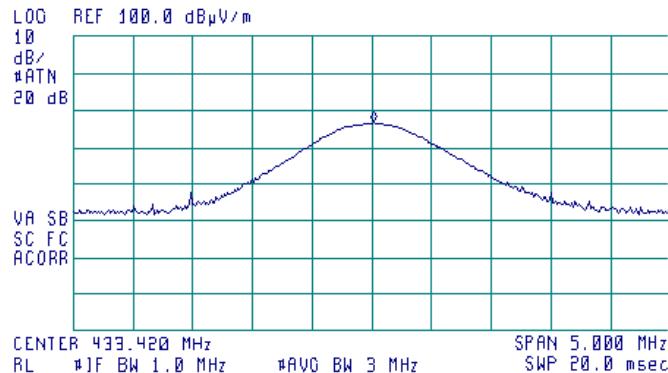


Plot 7.3.6 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 433.370 MHz
90.74 dB μ V/m

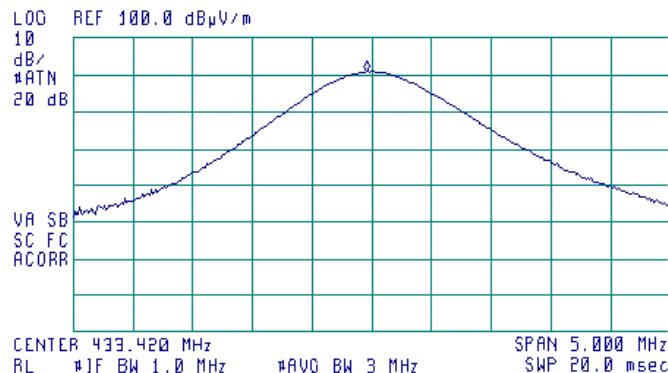



HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-axis




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 9.1 kHz
 71.24 dB μ V/m

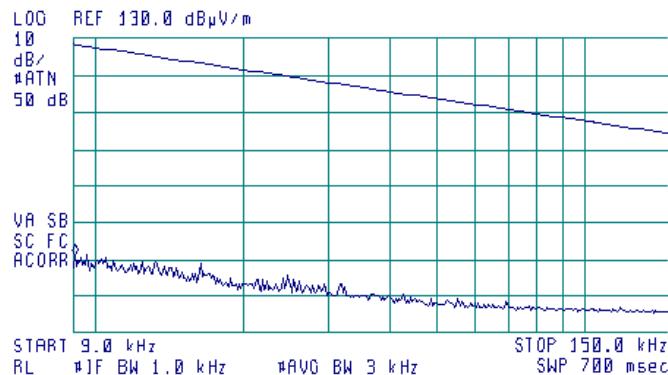**Plot 7.3.8 Radiated emission measurements from 0.15 to 30 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-axis



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 160 kHz
 55.67 dB μ V/m

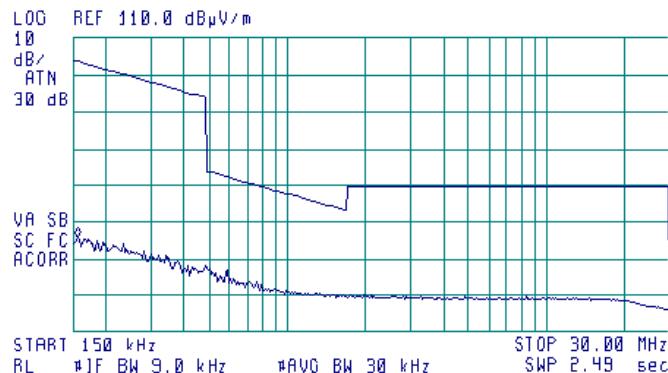




HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.9 Radiated emission measurements from 30 to 600 MHz

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Z-axis

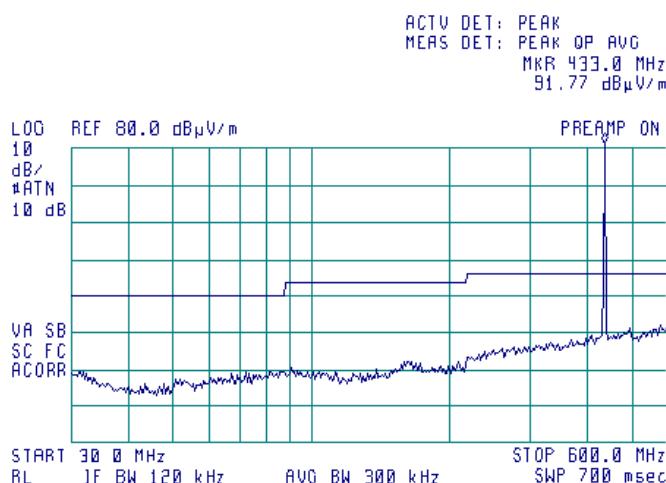**Plot 7.3.10 Radiated emission measurements from 600 to 1000 MHz**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: Z-axis

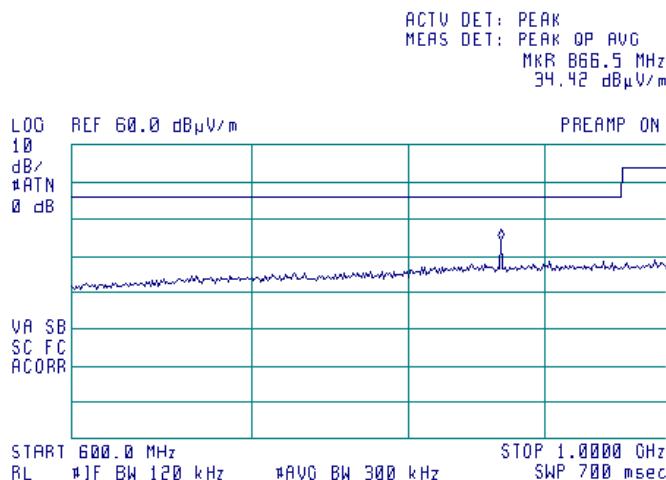




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.11 Radiated emission measurements from 1000 to 4500 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: Z-axis

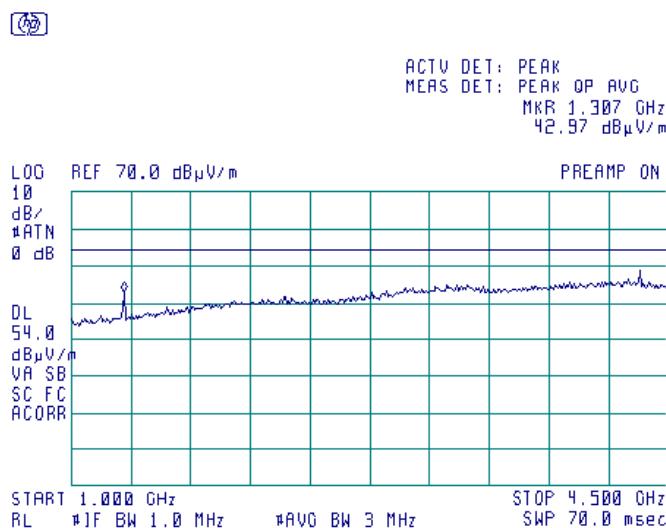




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |


Plot 7.3.12 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

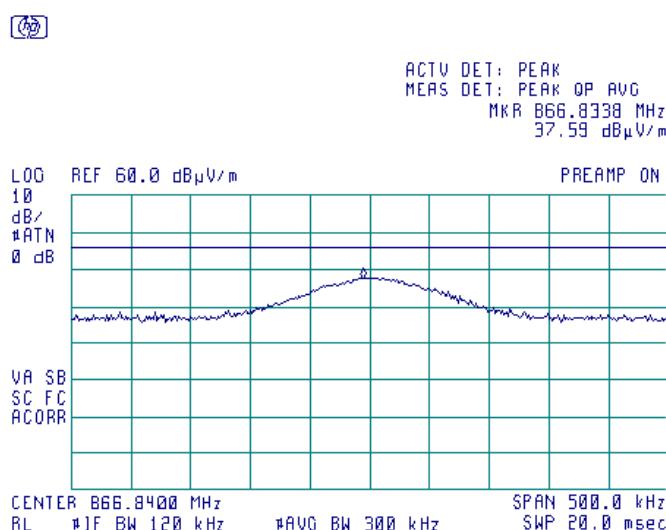

Plot 7.3.13 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

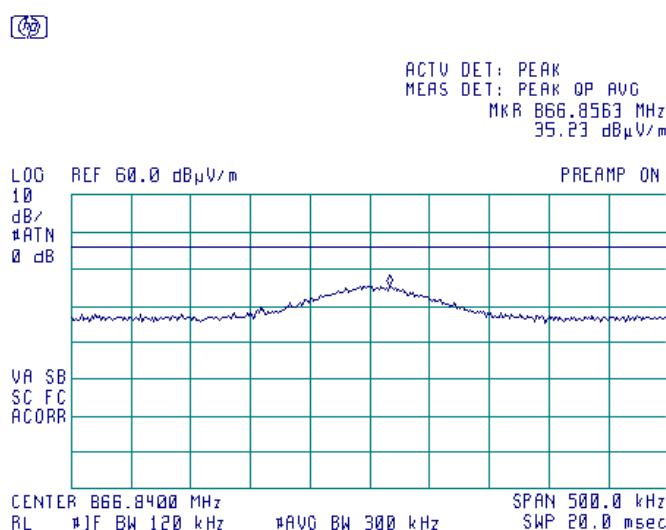




HERMON LABORATORIES


| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.14 Radiated emission measurements at the third harmonic frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: Z-axis

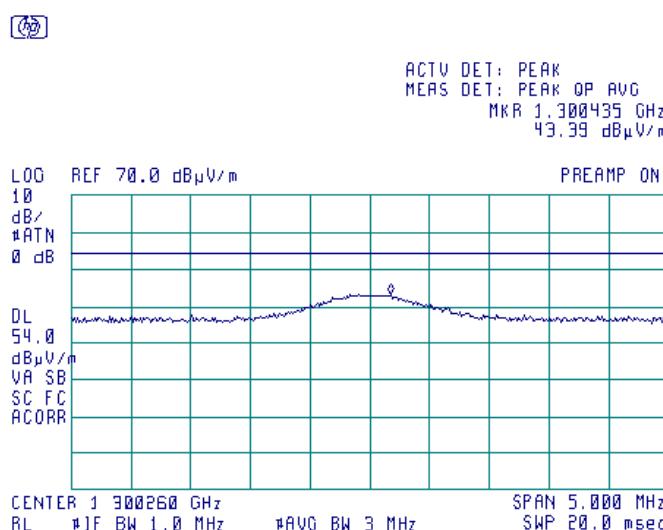**Plot 7.3.15 Radiated emission measurements at the third harmonic frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: Z-axis

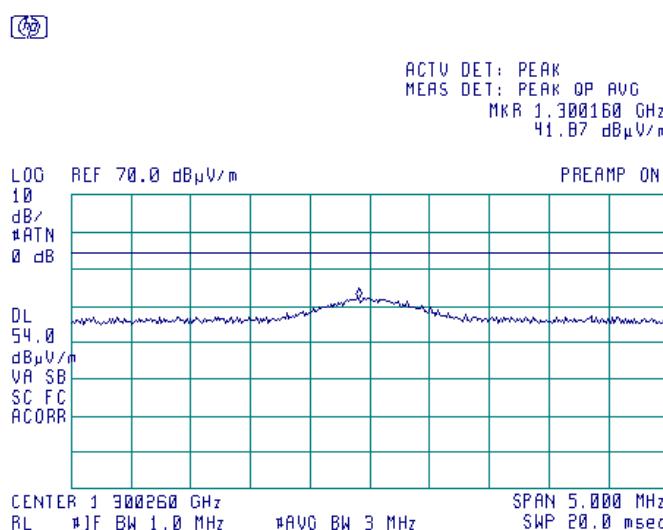




HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |


Plot 7.3.16 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

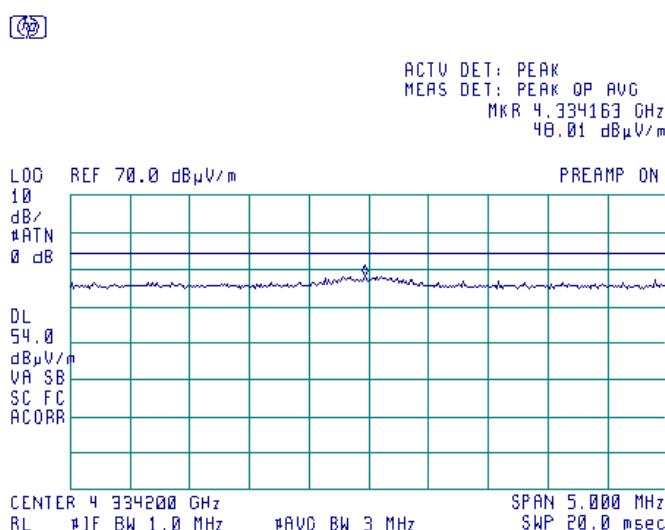

Plot 7.3.17 Radiated emission measurements at the tenth harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

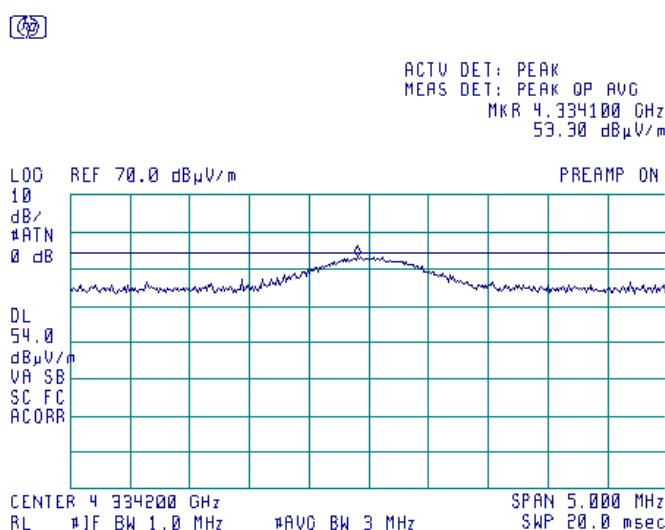





HERMON LABORATORIES

| | | | |
|--|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(b) / RSS-210, Section A1.1.2, Field strength of emissions | | |
| Test procedure: | ANSI C63.4, Section 13.1.4 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 14-Jul-15 | | |
| Temperature: 25 °C | Air Pressure: 1006 hPa | Relative Humidity: 49 % | Power Supply: 3V battery |
| Remarks: EUT model 5-LW242057-0 | | | |

Plot 7.3.18 Transmission pulse duration

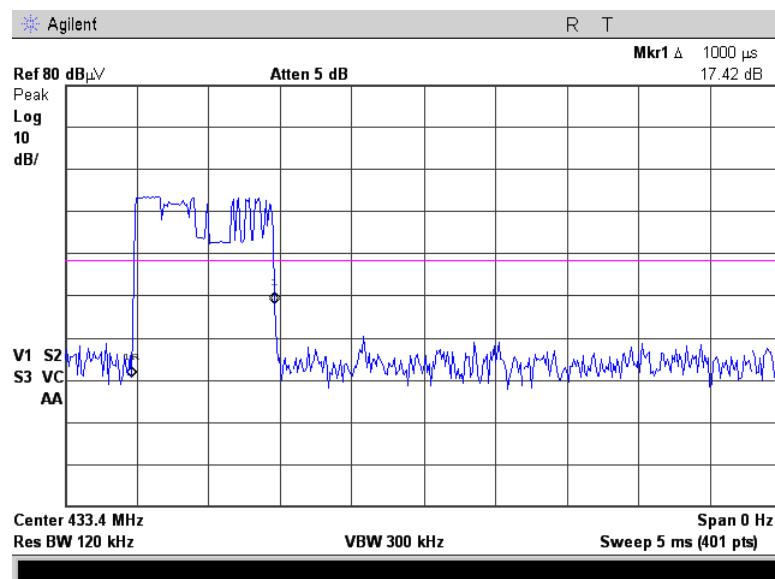

Plot 7.3.19 Transmission pulse period

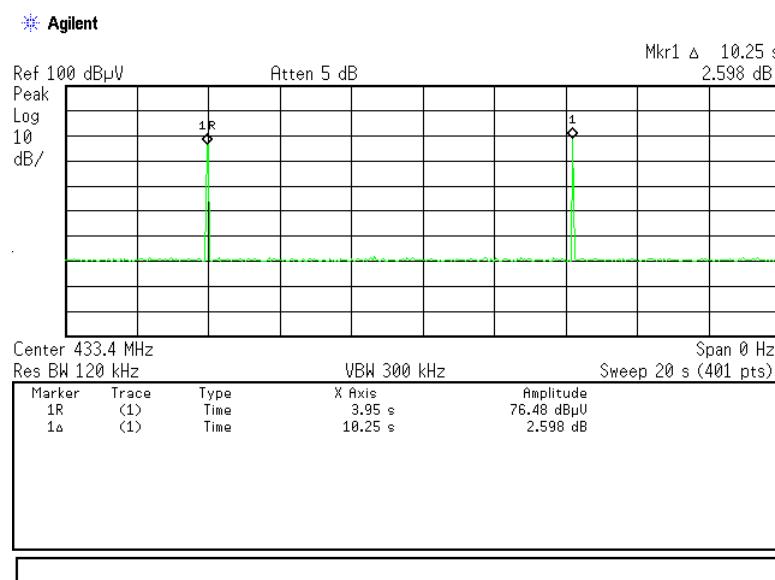



HERMON LABORATORIES

| | | | |
|--|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth | | |
| Test procedure: | ANSI C63.4, Section 13.1.7 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 25-Jun-15 | | |
| Temperature: 24.3 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

7.4 Occupied bandwidth test

7.4.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Occupied bandwidth limits

| Assigned frequency, MHz | Modulation envelope reference points*, dBc | Maximum allowed bandwidth, % of the carrier frequency |
|-------------------------|--|---|
| 70 - 900 | | 0.25 |
| Above 900 | 20.0 | 0.50 |

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2 The EUT was set to transmit modulated carrier.
- 7.4.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.4.2 and associated plot.

Figure 7.4.1 Occupied bandwidth test setup





HERMON LABORATORIES

| | | | |
|--|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth | | |
| Test procedure: | ANSI C63.4, Section 13.1.7 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 25-Jun-15 | | |
| Temperature: 24.3 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Table 7.4.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10 kHz
 VIDEO BANDWIDTH: 30 kHz
 MODULATION: GFSK

MODULATION LEVEL OF REFERENCE POINTS: 20 dBc

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit | | Margin, kHz | Verdict |
|------------------------|-------------------------|----------------------------|--------|-------------|---------|
| | | % of the carrier frequency | kHz | | |
| 433.42 | 310.0 | 0.25 | 1083.5 | -783.5 | Pass |

MODULATION ENVELOPE REFERENCE POINTS: 99 %

| Carrier frequency, MHz | Occupied bandwidth, kHz | Limit | | Margin, kHz | Verdict |
|------------------------|-------------------------|----------------------------|--------|-------------|---------|
| | | % of the carrier frequency | kHz | | |
| 433.42 | 367.5 | 0.25 | 1083.5 | -716.0 | Pass |

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|--|--|--|--|--|--|
| HL 2909 | HL 4273 | | | | | | |
|---------|---------|--|--|--|--|--|--|


Full description is given in Appendix A.




HERMON LABORATORIES

| | | | |
|--|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth | | |
| Test procedure: | ANSI C63.4, Section 13.1.7 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 25-Jun-15 | | |
| Temperature: 24.3 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: EUT model 5 LW243037-0 | | | |

Plot 7.4.1 Occupied bandwidth test result 20 dBc

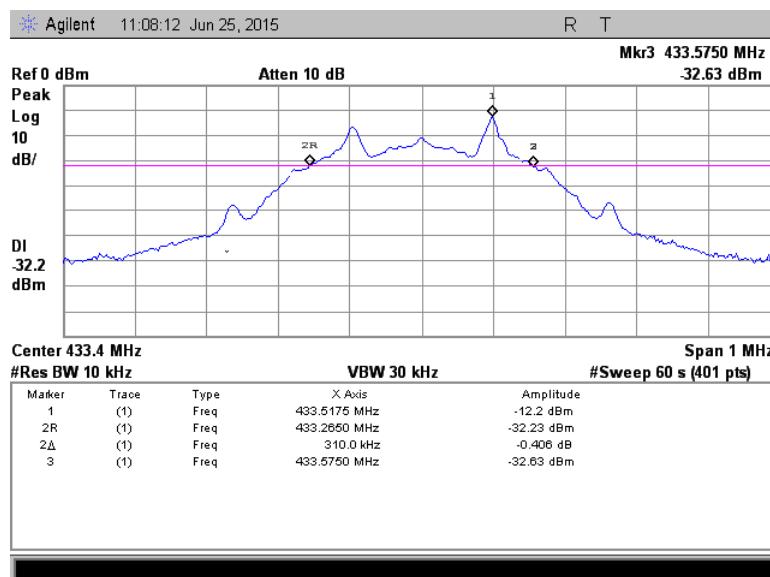

Plot 7.4.2 Occupied bandwidth test result 99%

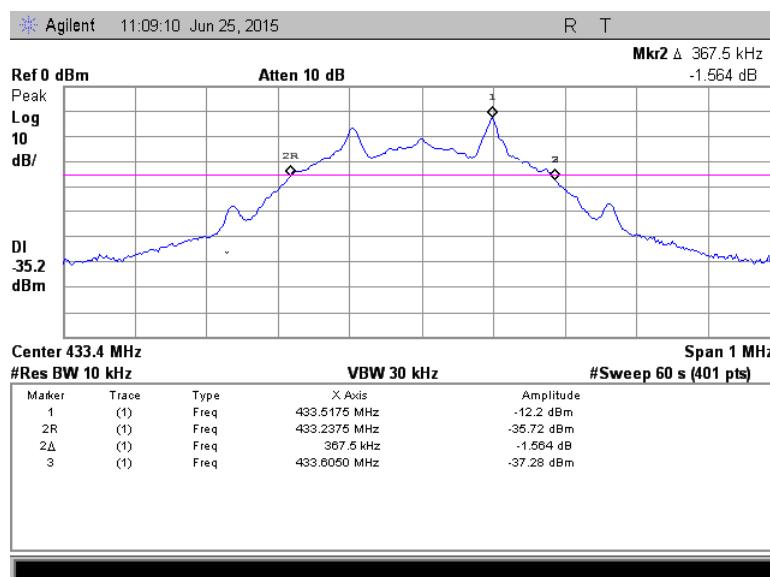



HERMON LABORATORIES

| | | | |
|-----------------------------|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 203 / RSS-Gen, Section 7.1.4, Antenna requirements | | |
| Test procedure: | Visual inspection / supplier declaration | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 25-Jun-15 | | |
| Temperature: 24.3 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | | | |

7.5 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

| Requirement | Rationale | Verdict |
|--|-------------------|---------|
| The transmitter antenna is permanently attached | Visual inspection | Comply |
| The transmitter employs a unique antenna connector | NA | |
| The transmitter requires professional installation | NA | |

Photograph 7.5.1 Antenna assembly

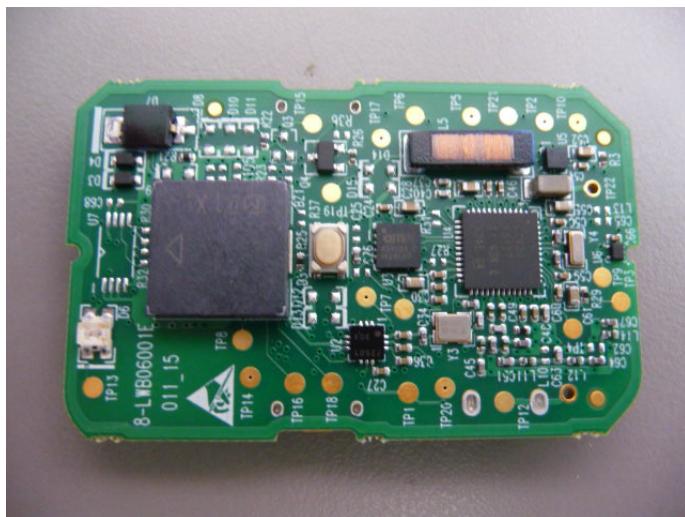



HERMON LABORATORIES

| | | | |
|----------------------------|---|---------------------------------|-------------------------------|
| Test specification: | FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003 Section 6.2, Radiated emission | | |
| Test procedure: | ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | Temperature: 23.2 °C | Air Pressure: 1009 hPa |
| Remarks: | Relative Humidity: 48 % | Power Supply: 3V battery | |

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, in Table 8.1.2.

Table 8.1.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

| Frequency, MHz | Class B limit, dB(µV/m) | | Class A limit, dB(µV/m) | |
|----------------------------------|-------------------------|--------------|-------------------------|--------------|
| | 10 m distance | 3 m distance | 10 m distance | 3 m distance |
| 30 - 88 | 29.5* | 40.0 | 39.0 | 49.5* |
| 88 - 216 | 33.0* | 43.5 | 43.5 | 54.0* |
| 216 - 960 | 35.5* | 46.0 | 46.4 | 56.9* |
| 960 - 5 th harmonic** | 43.5* | 54.0 | 49.5 | 60.0* |

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen, Section 7.1.2

| Frequency, MHz | Field strength limit at 3 m test distance, dB(µV/m) |
|----------------------------------|---|
| 30 - 88 | 40.0 |
| 88 - 216 | 43.5 |
| 216 - 960 | 46.0 |
| 960 - 5 th harmonic** | 54.0 |

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photographs, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.



HERMON LABORATORIES

| | | | |
|-----------------------------|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003 Section 6.2, Radiated emission | | |
| Test procedure: | ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | | | |

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

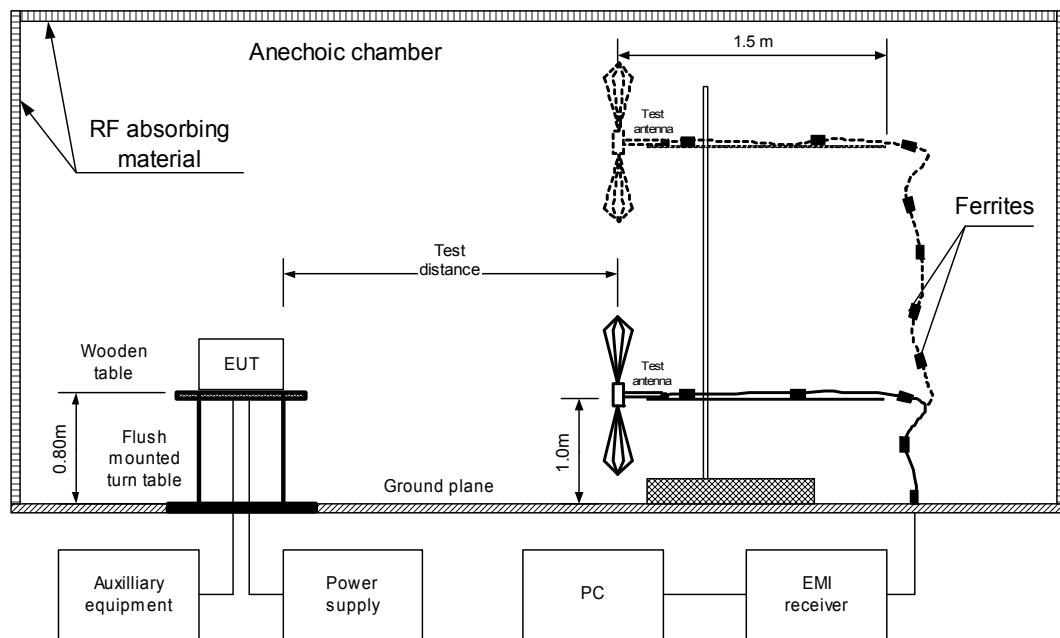





HERMON LABORATORIES

| | | | |
|-----------------------------|--|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003 Section 6.2, Radiated emission | | |
| Test procedure: | ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | | | |

Photograph 8.1.1 Setup for radiated emission measurements

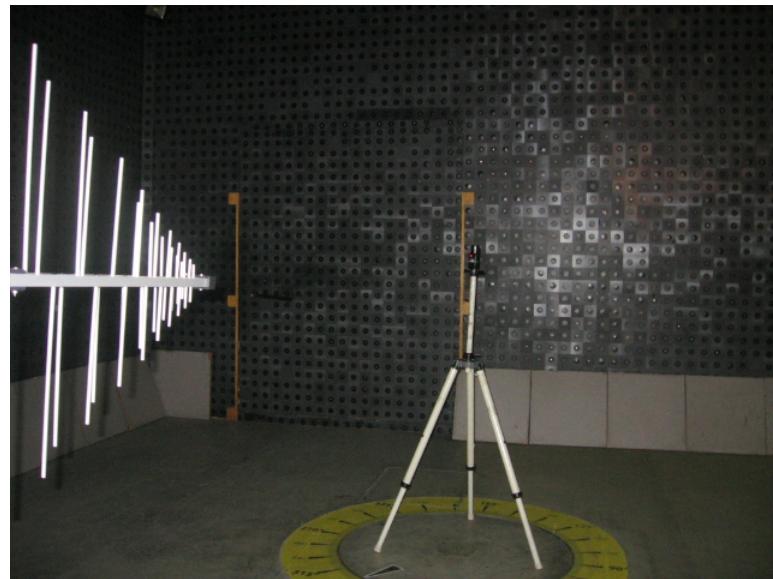

Photograph 8.1.2 Setup for radiated emission measurements

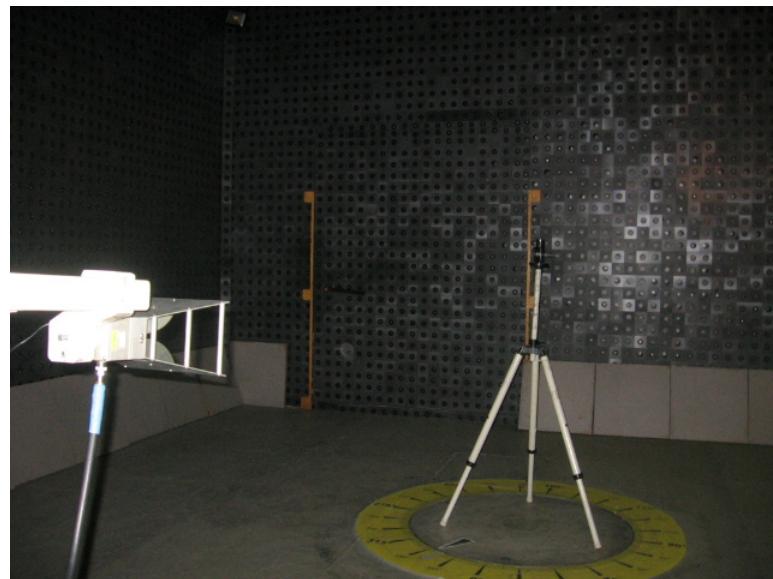



HERMON LABORATORIES

| | | | |
|----------------------------|---|-------------------------|--------------------------|
| Test specification: | FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003 Section 6.2, Radiated emission | | |
| Test procedure: | ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22 | | |
| Test mode: | Compliance | Verdict: PASS | |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | | | |

Table 8.1.3 Spurious emission field strength test results

EUT SET UP:

TABLE-TOP

TEST SITE:

SEMI ANECHOIC CHAMBER

EUT OPERATING MODE:

Stand-by/Receive

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

| Frequency, MHz | Peak emission, dB(µV/m) | Quasi-peak | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|-------------------------|-------------------------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| | | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| No emissions were found | | | | | | | | |

DETECTORS USED:

PEAK / AVERAGE

FREQUENCY RANGE:

1000 MHz – 4000 MHz

RESOLUTION BANDWIDTH:

1000 kHz

| Frequency, MHz | Peak | | | Average | | | Antenna polarization | Antenna height, m | Turn-table position**, degrees | Verdict |
|-------------------------|-----------------------------------|--------------------|----------------|-----------------------------------|--------------------|----------------|-------------------------|-------------------------|--------------------------------------|---------|
| | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | Measured emission, dB(µV/m) | Limit, dB(µV/m) | Margin, dB* | | | | |
| No emissions were found | | | | | | | | | | |

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

| | | | | | | | |
|---------|---------|---------|---------|---------|--|--|--|
| HL 0521 | HL 0604 | HL 4353 | HL 4722 | HL 4933 | | | |
|---------|---------|---------|---------|---------|--|--|--|

Full description is given in Appendix A.



HERMON LABORATORIES


| | | | |
|-----------------------------|---|--------------------------------|---------------------------------|
| Test specification: | FCC Part 15, Section 109 / RSS-Gen, Section 7.1.2 / ICES-003 Section 6.2, Radiated emission | | |
| Test procedure: | ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22 | | |
| Test mode: | Compliance | Verdict: | PASS |
| Date(s): | 26-May-15 | | |
| Temperature: 23.2 °C | Air Pressure: 1009 hPa | Relative Humidity: 48 % | Power Supply: 3V battery |
| Remarks: | | | |

Plot 8.1.1 Radiated emission measurements in 25 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 OPERATIONAL MODE: Standby/Receive
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 980.0 MHz
 28.45 dB μ V/m

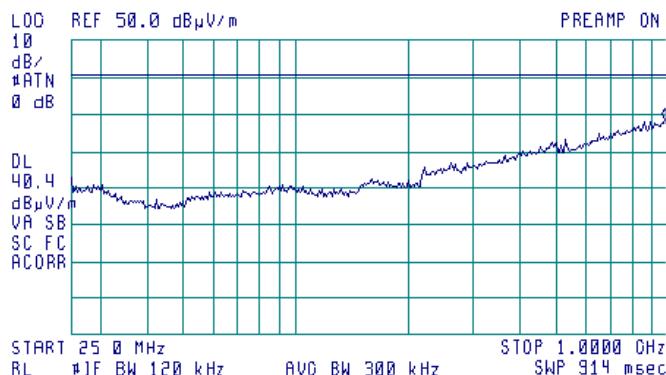**Plot 8.1.2 Radiated emission measurements in 1.0 – 4.0 GHz range**

TEST SITE: Semi anechoic chamber
 OPERATIONAL MODE: Standby/Receive
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 3.879 GHz
 36.03 dB μ V/m

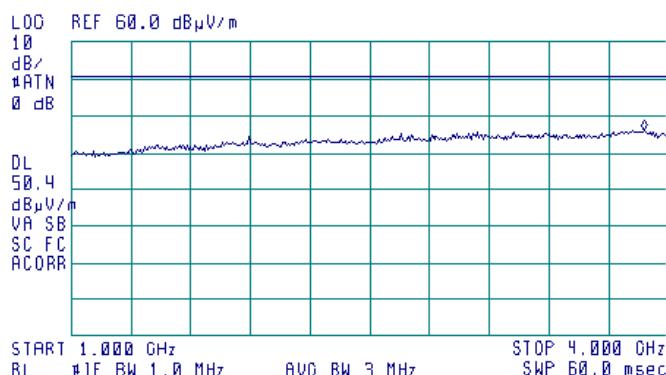



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

| HL No | Description | Manufacturer | Model | Ser. No. | Last Cal./Check | Due Cal./Check |
|-------|---|-----------------------|---------------|-----------------------------------|-----------------|----------------|
| 0337 | Probe Set, Hand held, 5 probes | Electro-Metrics | EHFP-30 | 238 | 14-Jun-15 | 14-Jun-16 |
| 0446 | Antenna, Loop, Active, 10 kHz - 30 MHz | EMCO | 6502 | 2857 | 13-Jan-15 | 13-Jan-16 |
| 0521 | EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz | Hewlett Packard | 8546A | 3617A 00319, 3448A002 53 | 22-Oct-14 | 22-Oct-15 |
| 0604 | Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz | EMCO | 3141 | 9611-1011 | 15-May-15 | 15-May-16 |
| 1984 | Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W | EMC Test Systems | 3115 | 9911-5964 | 17-Apr-15 | 17-Apr-16 |
| 2909 | Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz | Agilent Technologies | E4407B | MY414447 62 | 22-Feb-15 | 22-Feb-16 |
| 3001 | EMC Analyzer, 9 kHz to 3 GHz | Agilent Technologies | E7402A | US394401 80 | 22-Mar-15 | 22-Mar-16 |
| 3433 | Test Cable , DC-18 GHz, 1.5 m, SMA - SMA | Mini-Circuits | CBL-5FT-SMSM+ | 25679 | 11-Mar-15 | 11-Mar-16 |
| 4273 | Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M | Mini-Circuits | CBL-6FT-SMNM+ | 70045 | 28-May-15 | 28-May-16 |
| 4353 | Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M | MegaPhase | NC29-N1N1-244 | 12025101 003 | 15-Mar-15 | 15-Mar-16 |
| 4722 | Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M | MegaPhase | NC29-N1N1-244 | 51228701 001 | 31-Aug-15 | 31-Aug-16 |
| 4933 | Active Horn Antenna, 1 GHz to 18 GHz | Com-Power Corporation | AHA-118 | 701046 | 12-Nov-14 | 12-Nov-15 |



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

| Test description | Expanded uncertainty |
|--|--|
| Radiated emissions at 10 m measuring distance Horizontal polarization | Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB |
| Vertical polarization | Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB |
| Radiated emissions at 3 m measuring distance Horizontal polarization | Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB |
| Vertical polarization | Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB |
| Duty cycle, timing (Tx ON / OFF) and average factor measurements | ± 1.0 % |
| Occupied bandwidth | ± 8.0 % |

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telecification - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

| | |
|-------------------------|---|
| FCC 47CFR part 15: 2014 | Radio Frequency Devices |
| ANSI C63.2: 1996 | American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications |
| ANSI C63.4: 2009 | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| ICES-003 issue 5:2012 | Information Technology Equipment (ITE) – Limits and methods of measurement |



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

| Frequency, MHz | Magnetic antenna factor, dB | Electric antenna factor, dB |
|-------------------|--------------------------------|--------------------------------|
| 0.009 | -32.8 | 18.7 |
| 0.010 | -33.8 | 17.7 |
| 0.020 | -38.3 | 13.2 |
| 0.050 | -41.1 | 10.4 |
| 0.075 | -41.3 | 10.2 |
| 0.100 | -41.6 | 9.9 |
| 0.150 | -41.7 | 9.8 |
| 0.250 | -41.6 | 9.9 |
| 0.500 | -41.8 | 9.8 |
| 0.750 | -41.9 | 9.7 |
| 1.000 | -41.4 | 10.1 |
| 2.000 | -41.5 | 10.0 |
| 3.000 | -41.4 | 10.2 |
| 4.000 | -41.4 | 10.1 |
| 5.000 | -41.5 | 10.1 |
| 10.000 | -41.9 | 9.6 |
| 15.000 | -41.9 | 9.6 |
| 20.000 | -42.2 | 9.3 |
| 25.000 | -42.8 | 8.7 |
| 30.000 | -44.0 | 7.5 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

| Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) | Frequency, MHz | Antenna factor, dB(1/m) |
|----------------|-------------------------|----------------|-------------------------|----------------|-------------------------|
| 26 | 7.8 | 580 | 20.6 | 1320 | 27.8 |
| 28 | 7.8 | 600 | 21.3 | 1340 | 28.3 |
| 30 | 7.8 | 620 | 21.5 | 1360 | 28.2 |
| 40 | 7.2 | 640 | 21.2 | 1380 | 27.9 |
| 60 | 7.1 | 660 | 21.4 | 1400 | 27.9 |
| 70 | 8.5 | 680 | 21.9 | 1420 | 27.9 |
| 80 | 9.4 | 700 | 22.2 | 1440 | 27.8 |
| 90 | 9.8 | 720 | 22.2 | 1460 | 27.8 |
| 100 | 9.7 | 740 | 22.1 | 1480 | 28.0 |
| 110 | 9.3 | 760 | 22.3 | 1500 | 28.5 |
| 120 | 8.8 | 780 | 22.6 | 1520 | 28.9 |
| 130 | 8.7 | 800 | 22.7 | 1540 | 29.6 |
| 140 | 9.2 | 820 | 22.9 | 1560 | 29.8 |
| 150 | 9.8 | 840 | 23.1 | 1580 | 29.6 |
| 160 | 10.2 | 860 | 23.4 | 1600 | 29.5 |
| 170 | 10.4 | 880 | 23.8 | 1620 | 29.3 |
| 180 | 10.4 | 900 | 24.1 | 1640 | 29.2 |
| 190 | 10.3 | 920 | 24.1 | 1660 | 29.4 |
| 200 | 10.6 | 940 | 24.0 | 1680 | 29.6 |
| 220 | 11.6 | 960 | 24.1 | 1700 | 29.8 |
| 240 | 12.4 | 980 | 24.5 | 1720 | 30.3 |
| 260 | 12.8 | 1000 | 24.9 | 1740 | 30.8 |
| 280 | 13.7 | 1020 | 25.0 | 1760 | 31.1 |
| 300 | 14.7 | 1040 | 25.2 | 1780 | 31.0 |
| 320 | 15.2 | 1060 | 25.4 | 1800 | 30.9 |
| 340 | 15.4 | 1080 | 25.6 | 1820 | 30.7 |
| 360 | 16.1 | 1100 | 25.7 | 1840 | 30.6 |
| 380 | 16.4 | 1120 | 26.0 | 1860 | 30.6 |
| 400 | 16.6 | 1140 | 26.4 | 1880 | 30.6 |
| 420 | 16.7 | 1160 | 27.0 | 1900 | 30.6 |
| 440 | 17.0 | 1180 | 27.0 | 1920 | 30.7 |
| 460 | 17.7 | 1200 | 26.7 | 1940 | 30.9 |
| 480 | 18.1 | 1220 | 26.5 | 1960 | 31.2 |
| 500 | 18.5 | 1240 | 26.5 | 1980 | 31.6 |
| 520 | 19.1 | 1260 | 26.5 | 2000 | 32.0 |
| 540 | 19.5 | 1280 | 26.6 | | |
| 560 | 19.8 | 1300 | 27.0 | | |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

| Frequency, MHz | Antenna factor, dB(1/m) |
|-------------------|----------------------------|
| 1000.0 | 24.7 |
| 1500.0 | 25.7 |
| 2000.0 | 27.6 |
| 2500.0 | 28.9 |
| 3000.0 | 31.2 |
| 3500.0 | 32.0 |
| 4000.0 | 32.5 |
| 4500.0 | 32.7 |
| 5000.0 | 33.6 |
| 5500.0 | 35.1 |
| 6000.0 | 35.4 |
| 6500.0 | 34.9 |
| 7000.0 | 36.1 |
| 7500.0 | 37.8 |
| 8000.0 | 38.0 |
| 8500.0 | 38.1 |
| 9000.0 | 39.1 |
| 9500.0 | 38.3 |
| 10000.0 | 38.6 |
| 10500.0 | 38.2 |
| 11000.0 | 38.7 |
| 11500.0 | 39.5 |
| 12000.0 | 40.0 |
| 12500.0 | 40.4 |
| 13000.0 | 40.5 |
| 13500.0 | 41.1 |
| 14000.0 | 41.6 |
| 14500.0 | 41.7 |
| 15000.0 | 38.7 |
| 15500.0 | 38.2 |
| 16000.0 | 38.8 |
| 16500.0 | 40.5 |
| 17000.0 | 42.5 |
| 17500.0 | 45.9 |
| 18000.0 | 49.4 |

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



HERMON LABORATORIES

Antenna factor, HL 4933

**Active Horn Antenna Factor Calibration**

1 GHz to 18 GHz

| Equipment: | ACTIVE HORN ANTENNA | | | | |
|---|------------------------------|--|--------------------|------------------------------|--|
| Model: | AHA-118 | | | | |
| Serial Number: | 701046 | | | | |
| Calibration Distance: | 3 Meter | | | | |
| Polarization: | Horizontal | | | | |
| Calibration Date: | 11/12/2014 | | | | |
| Frequency (GHz) | Preamplifier Gain (dB) | Antenna Factor with pre-amp (dB/m) | Frequency (GHz) | Preamplifier Gain (dB) | Antenna Factor with pre-amp (dB/m) |
| 1 | 40.96 | -16.47 | 10 | 40.94 | -1.97 |
| 1.5 | 41.21 | -14.53 | 10.5 | 40.63 | -1.06 |
| 2 | 41.44 | -13.30 | 11 | 40.74 | -1.50 |
| 2.5 | 41.71 | -12.87 | 11.5 | 40.65 | -0.52 |
| 3 | 41.96 | -12.26 | 12 | 40.76 | -0.15 |
| 3.5 | 42.14 | -11.77 | 12.5 | 41.03 | -0.85 |
| 4 | 42.13 | -10.91 | 13 | 41.37 | -0.81 |
| 4.5 | 41.79 | -9.41 | 13.5 | 41.18 | 0.05 |
| 5 | 41.44 | -7.54 | 14 | 40.98 | 0.36 |
| 5.5 | 40.91 | -6.47 | 14.5 | 40.81 | 1.26 |
| 6 | 40.69 | -5.48 | 15 | 40.65 | 0.25 |
| 6.5 | 40.64 | -5.53 | 15.5 | 40.93 | -1.05 |
| 7 | 40.76 | -4.12 | 16 | 41.31 | -1.44 |
| 7.5 | 40.94 | -3.12 | 16.5 | 40.96 | -0.80 |
| 8 | 40.68 | -1.69 | 17 | 40.64 | -0.02 |
| 8.5 | 40.08 | -1.71 | 17.5 | 40.57 | 1.81 |
| 9 | 40.41 | -1.86 | 18 | 40.08 | 3.63 |
| 9.5 | 41.21 | -2.73 | | | |
| Calibration according to ARP 958 | | | | | |
| Antenna Factor to be added to receiver reading: | | | | | |
| Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m) | | | | | |



HERMON LABORATORIES

Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679
Mini-Circuits, HL 3433

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 10.0 | 0.06 | 9000 | 2.01 |
| 100 | 0.17 | 9500 | 2.06 |
| 500 | 0.41 | 10000 | 2.05 |
| 1000 | 0.58 | 10500 | 2.18 |
| 1500 | 0.72 | 11000 | 2.26 |
| 2000 | 0.86 | 11500 | 2.28 |
| 2500 | 0.96 | 12000 | 2.43 |
| 3000 | 1.04 | 12500 | 2.53 |
| 3500 | 1.13 | 13000 | 2.52 |
| 4000 | 1.23 | 13500 | 2.56 |
| 4500 | 1.31 | 14000 | 2.60 |
| 5000 | 1.41 | 14500 | 2.59 |
| 5500 | 1.49 | 15000 | 2.67 |
| 6000 | 1.55 | 15500 | 2.76 |
| 6500 | 1.63 | 16000 | 2.86 |
| 7000 | 1.71 | 16500 | 2.91 |
| 7500 | 1.78 | 17000 | 2.95 |
| 8000 | 1.86 | 17500 | 3.02 |
| 8500 | 1.92 | 18000 | 3.07 |



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 70045, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4273

| Frequency, MHz | Cable loss, dB |
|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 10 | 0.09 | 4800 | 1.76 | 9800 | 2.70 | 14800 | 3.59 |
| 30 | 0.11 | 4900 | 1.78 | 9900 | 2.71 | 14900 | 3.59 |
| 50 | 0.14 | 5000 | 1.81 | 10000 | 2.73 | 15000 | 3.60 |
| 100 | 0.20 | 5100 | 1.82 | 10100 | 2.75 | 15100 | 3.63 |
| 200 | 0.30 | 5200 | 1.86 | 10200 | 2.76 | 15200 | 3.67 |
| 300 | 0.38 | 5300 | 1.89 | 10300 | 2.79 | 15300 | 3.70 |
| 400 | 0.45 | 5400 | 1.92 | 10400 | 2.81 | 15400 | 3.68 |
| 500 | 0.50 | 5500 | 1.96 | 10500 | 2.82 | 15500 | 3.70 |
| 600 | 0.55 | 5600 | 2.00 | 10600 | 2.83 | 15600 | 3.71 |
| 700 | 0.60 | 5700 | 2.03 | 10700 | 2.87 | 15700 | 3.77 |
| 800 | 0.65 | 5800 | 2.04 | 10800 | 2.87 | 15800 | 3.75 |
| 900 | 0.69 | 5900 | 2.07 | 10900 | 2.88 | 15900 | 3.77 |
| 1000 | 0.73 | 6000 | 2.10 | 11000 | 2.89 | 16000 | 3.79 |
| 1100 | 0.77 | 6100 | 2.10 | 11100 | 2.91 | 16100 | 3.85 |
| 1200 | 0.80 | 6200 | 2.11 | 11200 | 2.92 | 16200 | 3.82 |
| 1300 | 0.84 | 6300 | 2.11 | 11300 | 2.94 | 16300 | 3.83 |
| 1400 | 0.88 | 6400 | 2.14 | 11400 | 2.95 | 16400 | 3.88 |
| 1500 | 0.92 | 6500 | 2.15 | 11500 | 2.98 | 16500 | 3.89 |
| 1600 | 0.95 | 6600 | 2.15 | 11600 | 3.00 | 16600 | 3.92 |
| 1700 | 0.98 | 6700 | 2.16 | 11700 | 3.02 | 16700 | 3.88 |
| 1800 | 1.01 | 6800 | 2.19 | 11800 | 3.04 | 16800 | 3.95 |
| 1900 | 1.04 | 6900 | 2.22 | 11900 | 3.08 | 16900 | 3.91 |
| 2000 | 1.07 | 7000 | 2.24 | 12000 | 3.09 | 17000 | 3.97 |
| 2100 | 1.09 | 7100 | 2.26 | 12100 | 3.12 | 17100 | 3.92 |
| 2200 | 1.13 | 7200 | 2.29 | 12200 | 3.13 | 17200 | 3.94 |
| 2300 | 1.15 | 7300 | 2.32 | 12300 | 3.16 | 17300 | 3.94 |
| 2400 | 1.18 | 7400 | 2.36 | 12400 | 3.17 | 17400 | 3.98 |
| 2500 | 1.21 | 7500 | 2.39 | 12500 | 3.19 | 17500 | 3.93 |
| 2600 | 1.24 | 7600 | 2.41 | 12600 | 3.20 | 17600 | 3.95 |
| 2700 | 1.27 | 7700 | 2.43 | 12700 | 3.21 | 17700 | 3.96 |
| 2800 | 1.30 | 7800 | 2.46 | 12800 | 3.21 | 17800 | 3.97 |
| 2900 | 1.34 | 7900 | 2.49 | 12900 | 3.22 | 17900 | 3.96 |
| 3000 | 1.36 | 8000 | 2.52 | 13000 | 3.22 | 18000 | 3.97 |
| 3100 | 1.38 | 8100 | 2.52 | 13100 | 3.24 | | |
| 3200 | 1.41 | 8200 | 2.54 | 13200 | 3.24 | | |
| 3300 | 1.45 | 8300 | 2.59 | 13300 | 3.27 | | |
| 3400 | 1.46 | 8400 | 2.61 | 13400 | 3.28 | | |
| 3500 | 1.49 | 8500 | 2.60 | 13500 | 3.31 | | |
| 3600 | 1.51 | 8600 | 2.63 | 13600 | 3.31 | | |
| 3700 | 1.55 | 8700 | 2.65 | 13700 | 3.35 | | |
| 3800 | 1.34 | 8800 | 2.65 | 13800 | 3.37 | | |
| 3900 | 1.36 | 8900 | 2.65 | 13900 | 3.40 | | |
| 4000 | 1.38 | 9000 | 2.66 | 14000 | 3.43 | | |
| 4100 | 1.41 | 9100 | 2.66 | 14100 | 3.45 | | |
| 4200 | 1.45 | 9200 | 2.67 | 14200 | 3.46 | | |
| 4300 | 1.46 | 9300 | 2.67 | 14300 | 3.46 | | |
| 4400 | 1.49 | 9400 | 2.67 | 14400 | 3.49 | | |
| 4500 | 1.51 | 9500 | 2.68 | 14500 | 3.50 | | |
| 4600 | 1.55 | 9600 | 2.69 | 14600 | 3.50 | | |
| 4700 | 1.34 | 9700 | 2.69 | 14700 | 3.52 | | |



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 50 | 0.20 | 9000 | 2.71 |
| 100 | 0.27 | 9500 | 2.81 |
| 300 | 0.47 | 10000 | 2.90 |
| 500 | 0.61 | 10500 | 2.97 |
| 1000 | 0.87 | 11000 | 3.06 |
| 1500 | 1.07 | 11500 | 3.13 |
| 2000 | 1.24 | 12000 | 3.20 |
| 2500 | 1.39 | 12500 | 3.26 |
| 3000 | 1.53 | 13000 | 3.34 |
| 3500 | 1.65 | 13500 | 3.39 |
| 4000 | 1.77 | 14000 | 3.47 |
| 4500 | 1.89 | 14500 | 3.54 |
| 5000 | 1.99 | 15000 | 3.62 |
| 5500 | 2.07 | 15500 | 3.69 |
| 6000 | 2.20 | 16000 | 3.76 |
| 6500 | 2.30 | 16500 | 3.83 |
| 7000 | 2.39 | 17000 | 3.86 |
| 7500 | 2.51 | 17500 | 3.94 |
| 8000 | 2.58 | 18000 | 4.02 |
| 8500 | 2.65 | | |



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244, S/N 51228701001
HL 4722

| Frequency, MHz | Cable loss, dB | Frequency, MHz | Cable loss, dB |
|-------------------|-------------------|-------------------|-------------------|
| 50 | 0.22 | 9000 | 2.93 |
| 100 | 0.30 | 9500 | 3.06 |
| 300 | 0.52 | 10000 | 3.16 |
| 500 | 0.66 | 10500 | 3.20 |
| 1000 | 0.93 | 11000 | 3.34 |
| 1500 | 1.15 | 11500 | 3.39 |
| 2000 | 1.33 | 12000 | 3.48 |
| 2500 | 1.49 | 12500 | 3.55 |
| 3000 | 1.64 | 13000 | 3.66 |
| 3500 | 1.77 | 13500 | 3.75 |
| 4000 | 1.90 | 14000 | 3.76 |
| 4500 | 2.03 | 14500 | 3.87 |
| 5000 | 2.17 | 15000 | 3.98 |
| 5500 | 2.30 | 15500 | 4.01 |
| 6000 | 2.39 | 16000 | 4.14 |
| 6500 | 2.51 | 16500 | 4.15 |
| 7000 | 2.59 | 17000 | 4.32 |
| 7500 | 2.67 | 17500 | 4.36 |
| 8000 | 2.76 | 18000 | 4.38 |
| 8500 | 2.84 | | |



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

| | |
|----------|---|
| A | ampere |
| AC | alternating current |
| A/m | ampere per meter |
| AM | amplitude modulation |
| AVRG | average (detector) |
| cm | centimeter |
| dB | decibel |
| dBm | decibel referred to one milliwatt |
| dB(µV) | decibel referred to one microvolt |
| dB(µV/m) | decibel referred to one microvolt per meter |
| dB(µA) | decibel referred to one microampere |
| DC | direct current |
| EIRP | equivalent isotropically radiated power |
| ERP | effective radiated power |
| EUT | equipment under test |
| F | frequency |
| GHz | gigahertz |
| GND | ground |
| H | height |
| HL | Hermon laboratories |
| Hz | hertz |
| k | kilo |
| kHz | kilohertz |
| LO | local oscillator |
| m | meter |
| MHz | megahertz |
| min | minute |
| mm | millimeter |
| ms | millisecond |
| µs | microsecond |
| NA | not applicable |
| NB | narrow band |
| OATS | open area test site |
| Ω | Ohm |
| PM | pulse modulation |
| PS | power supply |
| ppm | part per million (10^{-6}) |
| QP | quasi-peak |
| RE | radiated emission |
| RF | radio frequency |
| rms | root mean square |
| Rx | receive |
| s | second |
| T | temperature |
| Tx | transmit |
| V | volt |
| WB | wideband |

END OF TEST REPORT

15 APPENDIX G Manufacturer's declaration of similarity



From Tyco Security Products

Elpas Solutions Ltd.
23 Habarzel Street
Tel-Aviv 69710, Israel

Tele: +972 3 768 1400
Fax: +972 3 768 1415
www.elpas.com

Declaration of Identity

We, the undersigned,

Company: Elpas Solutions Ltd
Address: 23 Habarzel Street Tel Aviv 69710
Country: Israel
Telephone number: +972 3 7681400
Fax number: +972 3 7681415

declare under our sole responsibility that the following equipment:

5-LW243037-0 and 5-LW242057-0 Variants/ models have the same **housing/enclosure, front button, PCB, RF (GFSK) transceiver (433.42/434.42 MHz), LF receiver (125 kHz)**, and they vary only in that the 5-LW24003037-0 has an IR receiver mounted on its PCB while the 5-LW242057-0 does not have it.

16 September 2015...
(date)

Arick Elshtain..
(printed name)

Elpas Certification Manager.
(position)

END OF DOCUMENT