



ELECTRICAL TESTING
0839.01

Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

**ACCORDING TO: FCC CFR 47 Part 15 subpart C, section 15.231(e) and subpart B
RSS-210 issue 8 Annex 1, ICES-003 Issue 5:2012**

FOR:

**Elpas Solutions Ltd.
Triple Technology Wrist Tag
Models:
5-WTD41102-0,
5-WTD41400-0;
5-WTD41402-0
FCC ID:O4X5-WTD41102-0
IC:1467G-5WTD411020**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	5
6.3	Changes made in EUT	5
6.4	EUT test positions	6
6.5	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	Periodic operation requirements	8
7.2	Field strength of emissions.....	12
7.3	Occupied bandwidth test	25
7.4	Antenna requirements	28
8	Unintentional emissions	29
8.1	Radiated emission measurements	29
9	APPENDIX A Test equipment and ancillaries used for tests.....	33
10	APPENDIX B Measurement uncertainties.....	34
11	APPENDIX C Test laboratory description	35
12	APPENDIX D Specification references	35
13	APPENDIX E Test equipment correction factors.....	36
14	APPENDIX F Abbreviations and acronyms.....	42



1 Applicant information

Client name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1400
Fax: +972 3768 1415
E-mail: aelshtein@tycoint.com
Contact name: Mr. Arick Elshtain

2 Equipment under test attributes

Product name: Triple Technology Wrist Tag
Product type: Transceiver operating at 433.92 MHz
Model(s): 5-WTD41402-0
Serial number: 60576316
Hardware version: 06
Software release: 3.05
Receipt date 26-Aug-14

3 Manufacturer information

Manufacturer name: Elpas Solutions Ltd.
Address: 23 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3768 1400
Fax: +972 3768 1415
E-Mail: aelshtein@tycoint.com
Contact name: Mr. Arick Elshtain

4 Test details

Project ID: 26148
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 26-Aug-14
Test completed: 31-Aug-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.231(e) subpart B;
RSS-210 issue 8 Annex 1, RSS-Gen issue 3, ICES-003 issue 5:2012



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements	Pass
FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions	Pass
FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth	Pass
FCC Part 15, Section 207 / RSS-Gen, Section 7.2.4, Conducted emission	Not required
FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements	Pass
Unintentional emissions	
FCC Part 15, Section 107 / RSS-Gen, Section 7.2.4, Conducted emission at AC power port	Not required
FCC Part 15, Section 109 / RSS-Gen, Section 6.1, ICES-003, Section 6.2 class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. I. Zilberstein, test engineer	August 31, 2014	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	September 4, 2014	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	November 17, 2014	



6 EUT description

6.1 General information


The EUT is a Triple Technology Wrist Tag (Personal Safety Bracelet) that comprises the 433.92 MHz transceiver. The EUT is powered from 3V internal battery.

The EUT has three model numbers: 5-WTD41102-0, 5-WTD41400-0; 5-WTD41402-0 which according to the manufacturer's declaration are electronically and electrically identical. The differences between models are given in the table below.

Part Number	Description	Differences
5-WTD41102-0	Personal Safety Bracelet, IR/RF, 433 MHz, call button, tamper band	Same PCB, with call button, tamper band
5-WTD41400-0	Personal Safety Bracelet, IR/RF, 433 MHz, green button, no band	Same PCB, with green button, no band, plastic band slits
5-WTD41402-0	Personal Safety Bracelet, IR/RF, 433 MHz, green button, tamper band	Same PCB, with green button, tamper band

The tamper band is the band with conducting wire. The EUT model number 5-WTD41402-0 was tested as the maximum configurated device.

6.2 Test configuration

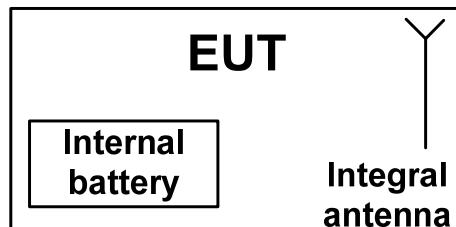

6.3 Changes made in EUT

No changes were implemented in the EUT during the testing.



6.4 EUT test positions

Photograph 6.4.1 EUT in X-axis orthogonal position



Photograph 6.4.2 EUT in Y-axis orthogonal position



Photograph 6.4.3 EUT in Z-axis orthogonal position





6.5 Transmitter characteristics

Type of equipment								
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)							
<input type="checkbox"/>	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
<input type="checkbox"/>	Plug-in card (Equipment intended for a variety of host systems)							
Operating frequency		433.92 MHz						
Maximum rated output power		At transmitter 50 Ω RF output connector			dBm			
		Field strength at 3 m distance			72.7 dB(µV/m)-peak 38.7 dB(µV/m)-average			
Is transmitter output power variable?		X	No					
		Yes	continuous variable					
			stepped variable with stepsize	dB				
			minimum RF power	dBm				
			maximum RF power	dBm				
Antenna connection								
unique coupling	standard connector		X	integral	X with temporary RF connector without temporary RF connector			
Antenna/s technical characteristics								
Type	Manufacturer		Model number					
Internal	Elpas		Printed antenna					
Transmitter aggregate data rate/s		19.2 kbps						
Type of modulation		ASK						
Transmitter power source								
<input checked="" type="checkbox"/>	Battery	Nominal rated voltage	3.0 VDC	Battery type	Lithium			
<input type="checkbox"/>	DC	Nominal rated voltage	VDC					
<input type="checkbox"/>	AC mains	Nominal rated voltage	VAC	Frequency				
Common power source for transmitter and receiver			X	yes	no			



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Periodic operation requirements

7.1.1 General

The EUT was verified for compliance with periodic operation requirements listed below:

- Continuous transmissions such as voice, video and the radio control of toys are not permitted;
- Duration of each transmission shall not be greater than 1 second;
- Silent period between transmissions shall be at least 30 times the duration of the transmission;
- Silent period between transmissions shall be in no case less than 10 seconds.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 7.1.1.

7.1.2 Test procedure for transmitter shut down test

7.1.2.1 The EUT was set up as shown in Figure 7.1.1.

7.1.2.2 The spectrum analyzer center frequency was adjusted to the EUT carrier, span set to zero and video triggered for transmission.

7.1.2.3 The transmitter was activated either manually or automatically. Once manually operated transmitter was activated, the switch was immediately released.

7.1.2.4 The transmission time was captured and shown in the associated plots. The test results were recorded in Table 7.1.2.

Figure 7.1.1 Setup for transmitter shut down test





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

Table 7.1.1 Periodic operation requirements


Requirement	Rationale	Verdict
Continuous transmissions are not permitted	Supplier declaration	Comply
Duration of each transmission shall not be greater than 1 second	Plot 7.1.1	Comply
Silent period between transmissions shall be at least 30 times the duration of the transmission	Plot 7.1.2	Comply
Silent period between transmissions shall be in no case less than 10 seconds	Plot 7.1.2	Comply




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 Transmitter pulse duration

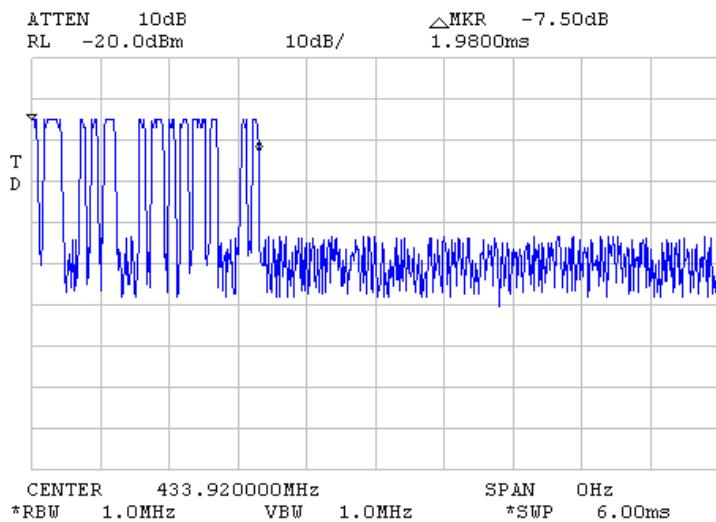

Plot 7.1.2 Transmission pulse period

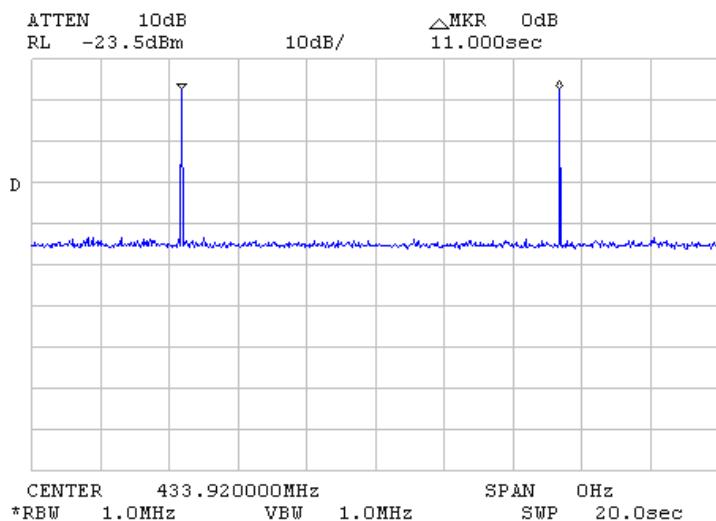



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Periodic operation requirements		
Test procedure:	Supplier declaration		
Test mode:	Compliance		Verdict: PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa		Relative Humidity: 55 %
Power Supply: Battery			
Remarks:			

Table 7.1.2 Total duration of transmissions

Pulse duration, ms		Pulse period, ms		Total transmission duration, ms	Silent period between transmissions, s	Silent period between transmissions limit, s	Margin, s	Verdict
Preamble	Data	Preamble	Data					
NA	NA	NA	NA	1.98	11	10	1	

Reference numbers of test equipment used

HL 1424							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

7.2 Field strength of emissions

7.2.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.2.1 and Table 7.2.2.

Table 7.2.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(µV/m)	
	Peak	Average
433.92	90.8	70.8

Table 7.2.2 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(µV/m)				
	Within restricted bands			Outside restricted bands	
	Peak	Quasi Peak	Average	Peak	Average
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**		
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705		73.8 – 63.0**			
1.705 – 30.0*		69.5			
30 – 88	NA	40.0	NA	70.8	50.8
88 – 216		43.5			
216 – 960		46.0			
960 - 1000		54.0			
Above 1000	74.0	NA	54.0		

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

Note 1: The fundamental emission limit in dB(µV/m) was calculated as follows:

$$Lim_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) \text{ - within } 130 - 174 \text{ MHz band;}$$

$$Lim_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) \text{ - within } 260 - 470 \text{ MHz band,}$$



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


7.2.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- 7.2.2.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.2.2.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

7.2.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.2.3.1 The EUT was set up as shown in Figure 7.2.2, energized and the performance check was conducted.
- 7.2.3.2 The measurements were performed in three EUT orthogonal positions.
- 7.2.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.2.3.4 The worst test results (the lowest margins) were recorded in Table 7.2.3, Table 7.2.5 and shown in the associated plots.

Figure 7.2.1 Setup for spurious emission field strength measurements below 30 MHz

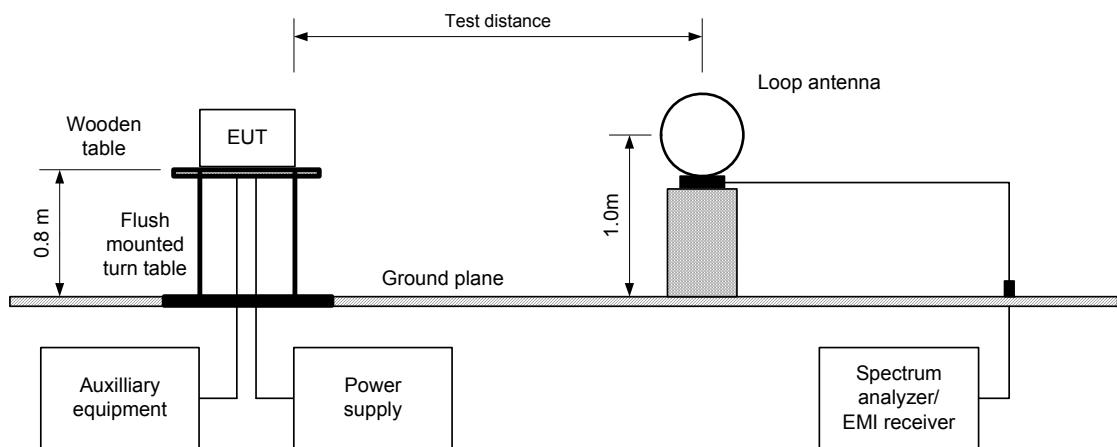




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Figure 7.2.2 Setup for spurious emission field strength measurements above 30 MHz

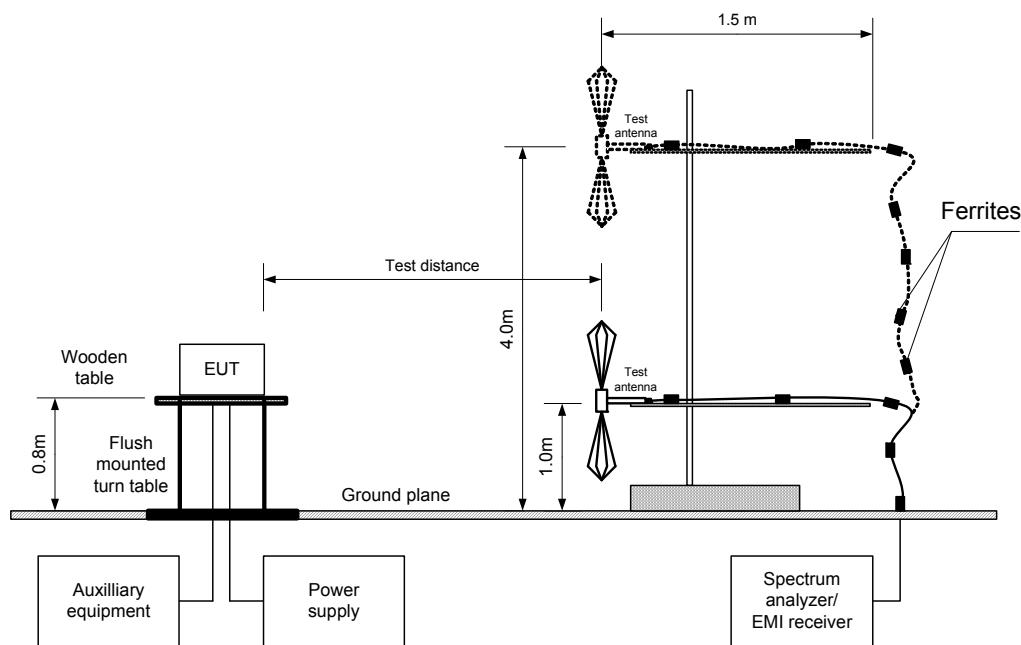



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14	Temperature: 26.9 °C	Air Pressure: 1006 hPa
Remarks:		Relative Humidity: 50 %	Power Supply: Battery

Table 7.2.3 Field strength of fundamental emission, spurious emissions outside restricted bands and within restricted bands at frequencies above 1 GHz

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal (X / Y / Z)
MODULATION:	ASK
BIT RATE:	19.2 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 - 4500 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength			Verdict
	Pol.	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**		Calculated, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	
Fundamental emission***											
433.921	V	1.3	360	72.71	90.82	-18.11	34	38.71	70.82	-32.11	Pass
433.921	H	1.0	166	71.40	90.82	-19.42	34	37.40	70.82	-33.42	Pass
Spurious emissions											
867.846	V	1.3	0	36.29	70.82	-34.53	34	2.29	50.82	-48.53	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = dB below (negative if above) specification limit.

*** Max value was obtained in X-axis orthogonal position.

Table 7.2.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period,s		
NA	NA	1.98	11	NA	-34

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Reference numbers of test equipment used

HL 1915	HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551
HL 4575	HL 4603	HL 4604					

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14	Temperature: 26.9 °C	Air Pressure: 1006 hPa
Remarks:	Relative Humidity: 50 % Power Supply: Battery		

Table 7.2.5 Field strength of emissions below 1 GHz within restricted bands

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal (X / Y / Z)
MODULATION:	ASK
BIT RATE:	19.2 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) ≥ Resolution bandwidth
VIDEO BANDWIDTH:	Active loop (9 kHz – 30 MHz)
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
No emissions were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 1915	HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551
HL 4575	HL 4604						

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions				
Test procedure:	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance			Verdict:	PASS
Date(s):	26-Aug-14				
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery		
Remarks:					

Table 7.2.6 Restricted bands according to FCC 15, Section 205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.290 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.420 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.2.7 Restricted bands according to RSS-210, Section 2.7

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.190	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.290 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24.0
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi Anechoic Chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 EUT POSITION: X-axis

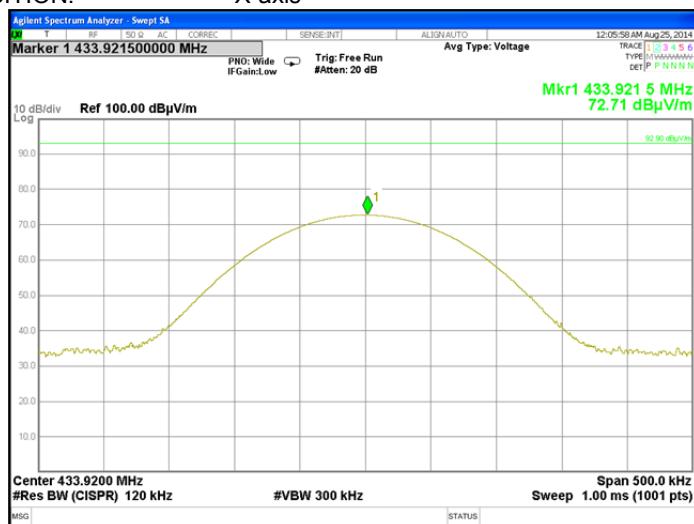**Plot 7.2.2 Radiated emission measurements at the fundamental frequency**

TEST SITE: Semi Anechoic Chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 EUT POSITION: X-axis

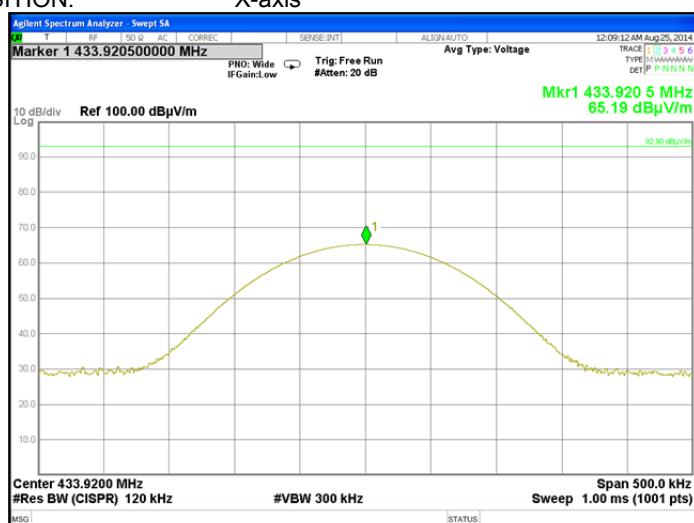



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.3 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi Anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Y-axis



Plot 7.2.4 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi Anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.5 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi Anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: Z-axis

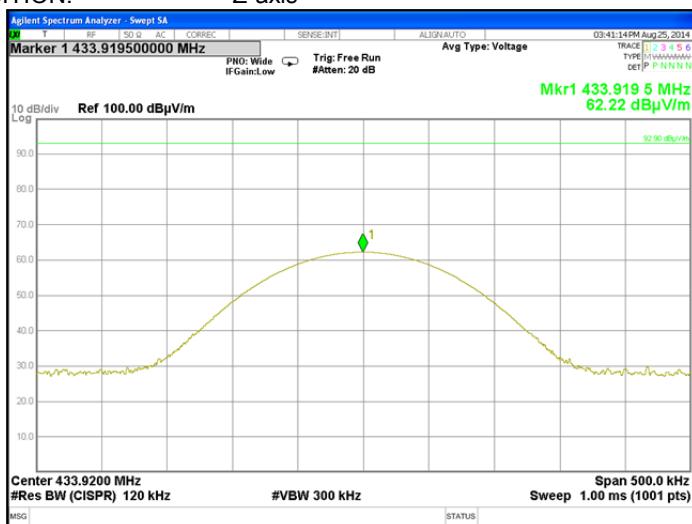

Plot 7.2.6 Radiated emission measurements at the fundamental frequency

TEST SITE: Semi Anechoic Chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis






HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.2.7 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

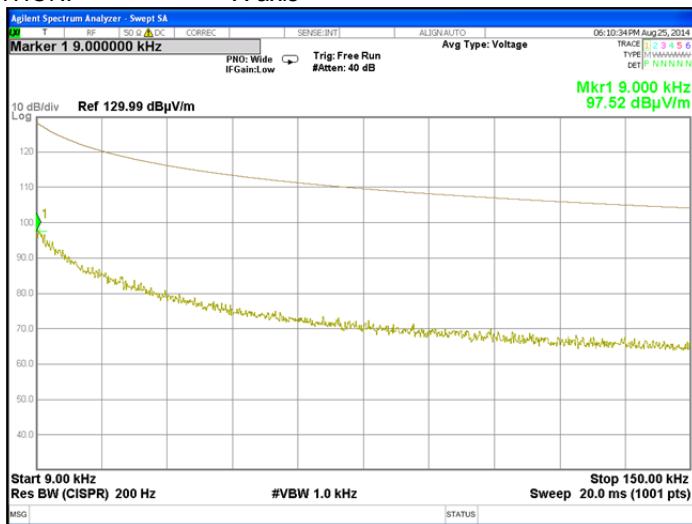

Plot 7.2.8 Radiated emission measurements from 0.15 to 30 MHz

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

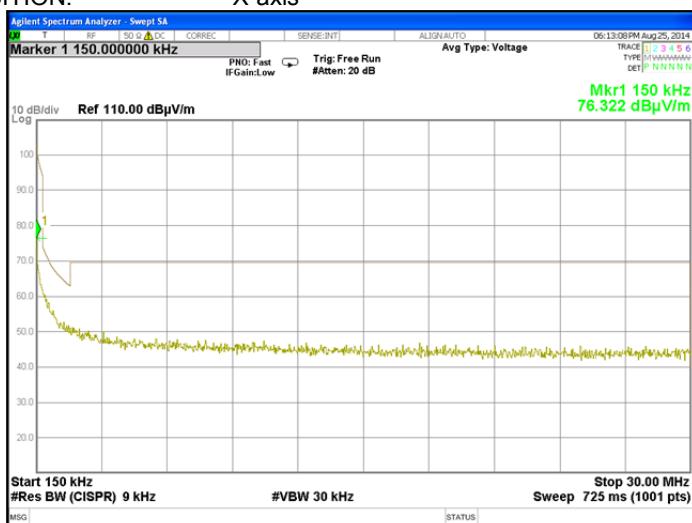




HERMON LABORATORIES


Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.9 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: X-axis

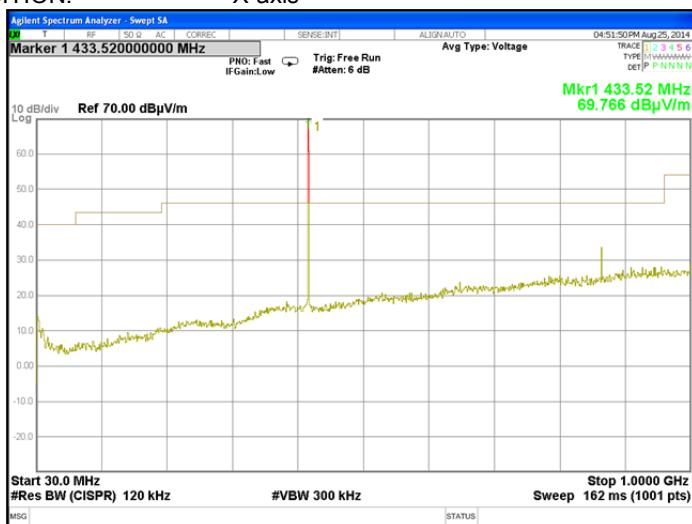**Plot 7.2.10 Radiated emission measurements from 1000 to 4500 MHz**

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 EUT POSITION: X-axis

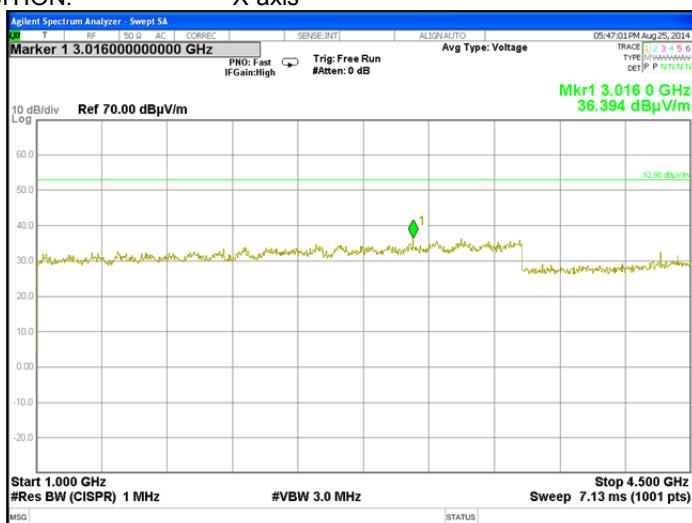




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			


Plot 7.2.11 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

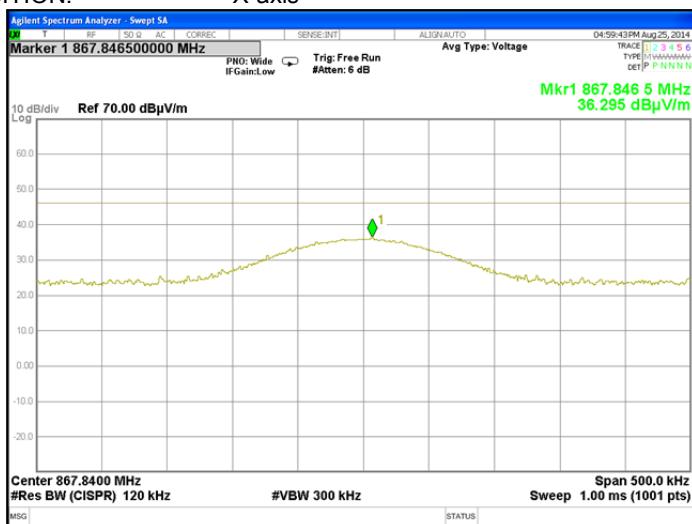

Plot 7.2.12 Radiated emission measurements at the second harmonic frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis

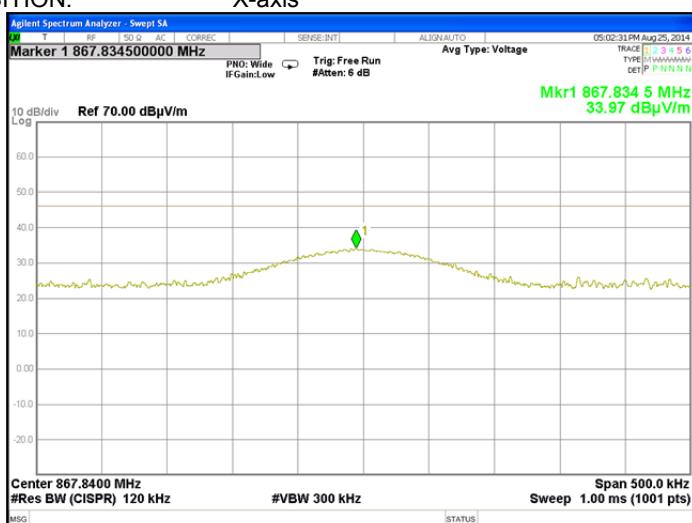





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(e) / RSS-210, Section A1.1.5, Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	26-Aug-14		
Temperature: 26.9 °C	Air Pressure: 1006 hPa	Relative Humidity: 50 %	Power Supply: Battery
Remarks:			

Plot 7.2.13 Transmission pulse duration

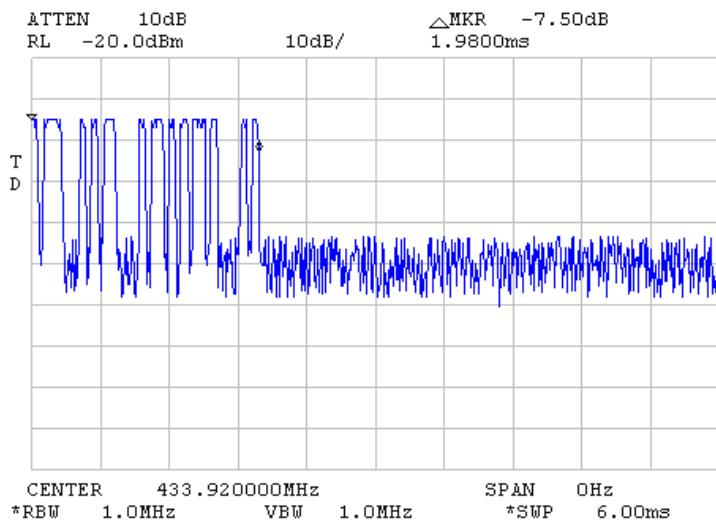

Plot 7.2.14 Transmission pulse period

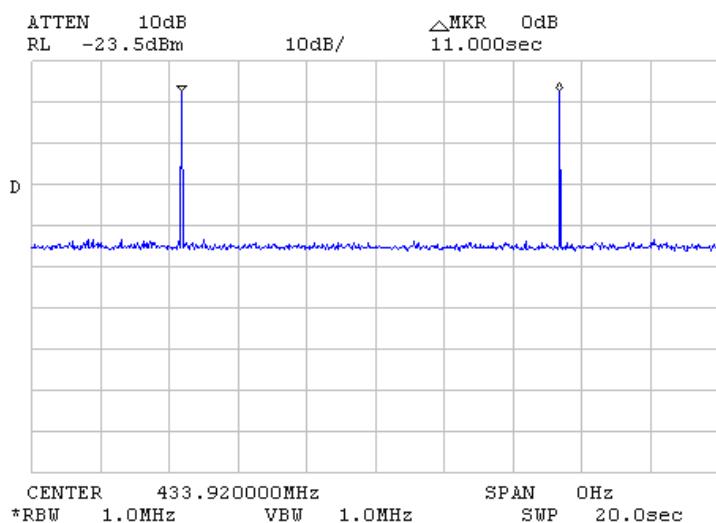



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Maximum allowed bandwidth, % of the carrier frequency
70 - 900	20.0 dBc*/99% BW	0.25
Above 900		0.50

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was set to transmit modulated carrier.
- 7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict: PASS	
Date(s):	31-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Occupied bandwidth test results

DETECTOR USED: Peak hold
 RESOLUTION BANDWIDTH: 10kHz
 VIDEO BANDWIDTH: 30kHz
 MODULATION: ASK
 MODULATING SIGNAL: PRBS
 BIT RATE: 19.2 kbps
 MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.9	47.342	0.25	1084.75	-1037.41	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99 %

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
433.9	191.0972	0.25	1084.75	-893.653	Pass

Reference numbers of test equipment used

HL 2909							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 231(c) / RSS-210, Section A1.1.3, Occupied bandwidth		
Test procedure:	ANSI C63.4, Section 13.1.7		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 25 °C	Air Pressure: 1006 hPa	Relative Humidity: 43 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Occupied bandwidth test result

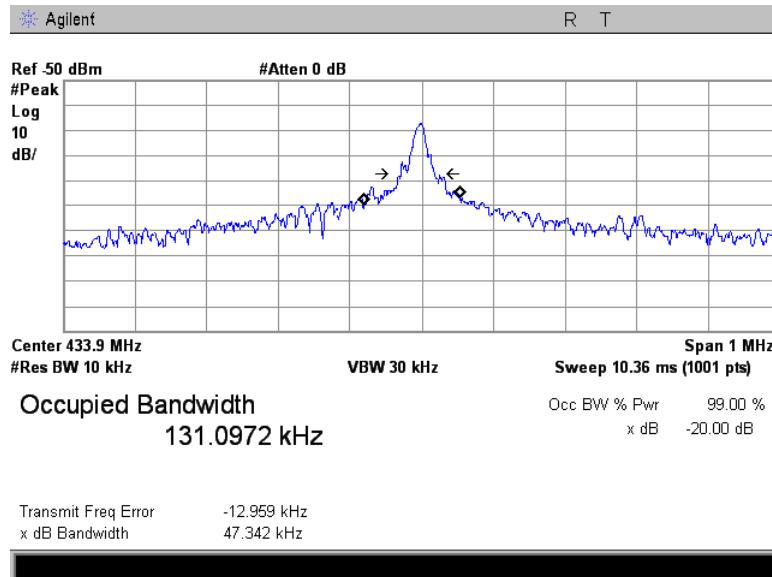



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 203 / RSS-Gen, Section 7.1.2, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

7.4 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly

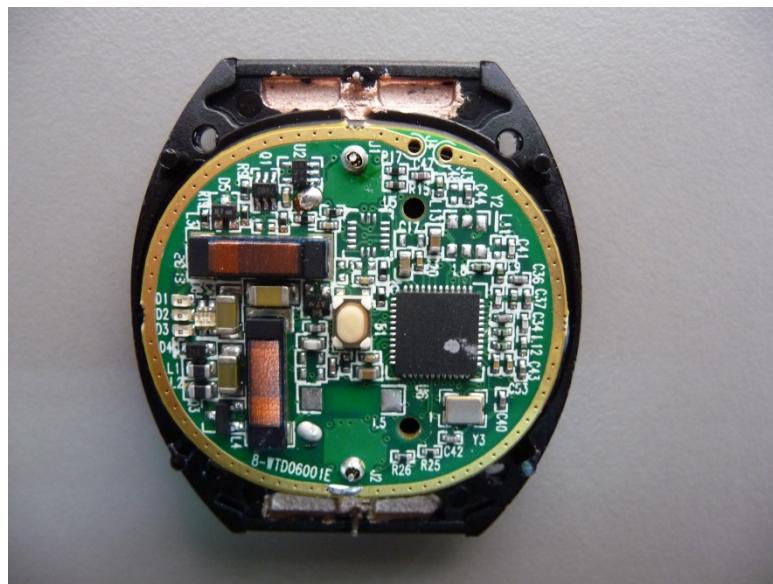



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict: PASS	
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, Table 8.1.2.

Table 8.1.1 Radiated emission limits according to FCC Part 15, Section 109 and ICES-003, Section 6.2

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen, Section 6.1

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 rd harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were provided in the associated tables and plots.



HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

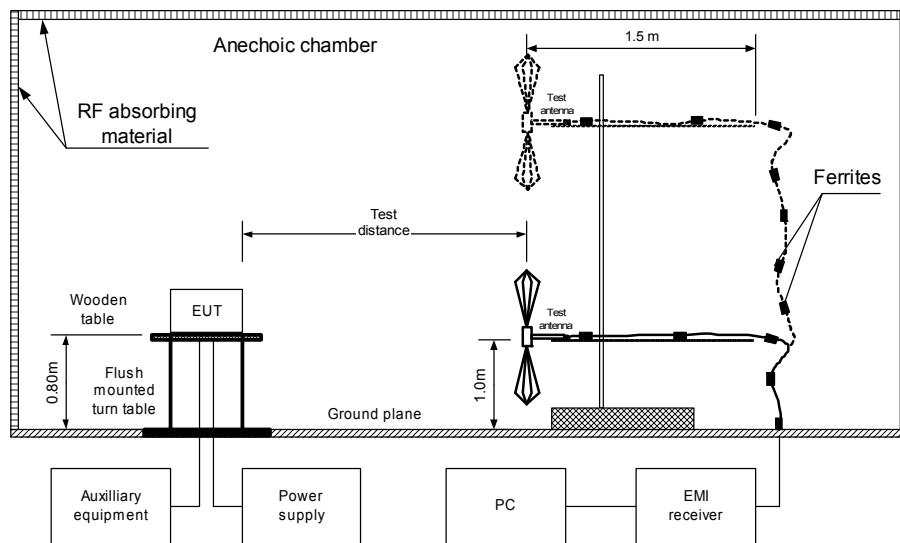

Photograph 8.1.1 Setup for spurious emission field strength measurements from 30 to 1000 MHz





HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict: PASS	
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

Table 8.1.3 Radiated disturbance test results

EUT SET UP:

TABLE-TOP

TEST SITE:

ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / QUASI-PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emission was found								

DETECTORS USED:

PEAK / AVERAGE

FREQUENCY RANGE:

1000 MHz – 4500 MHz

RESOLUTION BANDWIDTH:

1000 kHz

Frequency, MHz	Measured emission, dB(µV/m)	Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Peak Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)				
No emissions were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 4295	HL 4535	HL 4541	HL 4542	HL 4543	HL 4549	HL 4551	HL 4575
HL 4604							

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	FCC Part 15, Section 109 / ICES-003 Class B, RSS-Gen, Section 6.1, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4 / RSS-Gen, Section 4.10 / CISPR 22		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Aug-14		
Temperature: 24 °C	Air Pressure: 1005 hPa	Relative Humidity: 55 %	Power Supply: Battery
Remarks:			

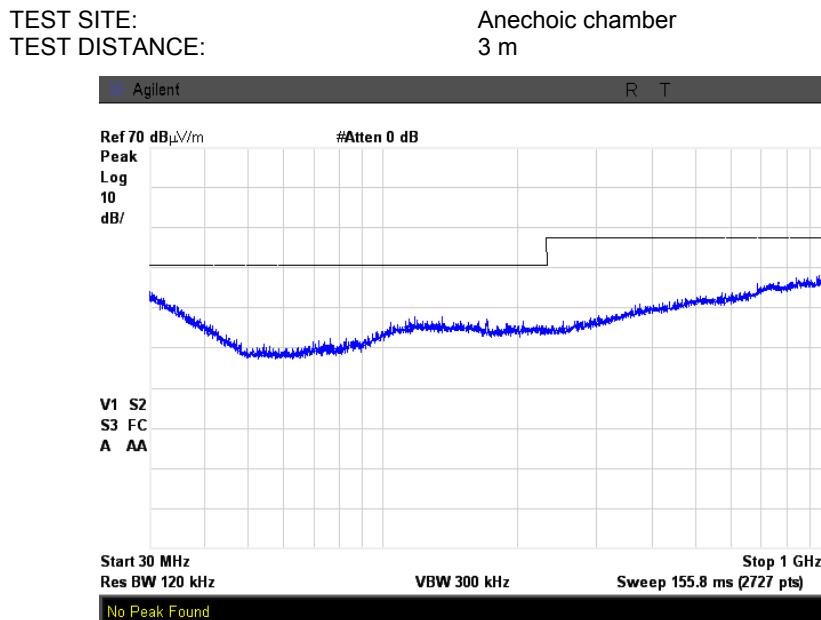Plot 8.1.1 Radiated disturbance measurements in 30 - 1000 MHz range, vertical and horizontal antenna polarization**Plot 8.1.2 Radiated disturbance measurements in 1000 – 4500 MHz range, vertical and horizontal antenna polarization**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m

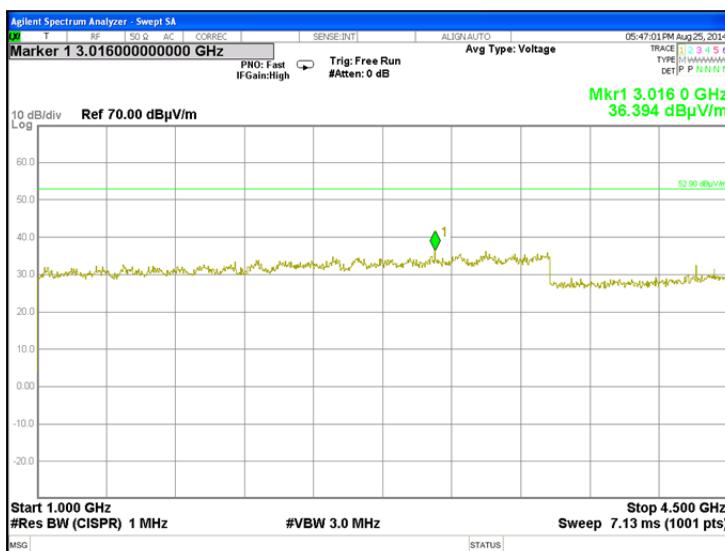



HERMON LABORATORIES

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	10-Oct-13	10-Oct-14
1915	Antenna, Loop, Active Receiving, 1 kHz - 30 MHz	EMC Test Systems	6507	1457	09-Jan-14	09-Jan-15
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
4295	Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA	Huber-Suhner	Sucoflex P103	NA	04-Dec-13	04-Dec-14
4535	Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	01-Jan-14	01-Jan-15
4541	Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type	Suhner Switzerland	214-U	NA	01-Jan-14	01-Jan-15
4542	Amplifier, 9 kHz to 1 GHz, 32 dB gain	Sonoma Instrument	310	0002A056 39	31-Dec-13	31-Dec-14
4543	Broadband preamplifier, 0.5 to 18 GHz, 35 dB gain	Schwarzbeck mess-elektronik	BBV 9718	9718-134	29-Dec-13	29-Dec-14
4549	Cable RF, 6.8 m, N/N - type, up to 3 GHz	Suhner Switzerland	NA	07262	29-Dec-13	29-Dec-14
4551	Cable RF, 6.6 m, N/N - type, up to 18 GHz	Suhner Switzerland	Sucoflex 104E	22200/4E	29-Dec-13	29-Dec-14
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	29-Apr-14	29-Apr-15
4603	Horn Antenna, 1 - 18 GHz	Schwarzbeck mess-elektronik	BBHA 9120 D	9120D-611	12-Jun-14	12-Jun-15
4604	Biconilog Antenna, 26 - 2000 MHz	EMCO	3142B	9909-1421	22-May-14	22-May-15



HERMON LABORATORIES

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2013	Radio Frequency Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment
ICES-003 issue 5:2012	Information Technology Equipment (ITE) – Limits and methods of measurement



HERMON LABORATORIES

13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
EMC Test Systems
Model 6507, S/N 1457, HL 1915

Frequency, kHz	Measured antenna factor, dB _S /m
10	-22.3
20	-27.5
50	-31.2
75	-31.8
100	-32.1
150	-32.3
250	-32.5
500	-32.8
750	-33.0
1000	-33.1
2000	-33.4
3000	-33.7
4000	-34.0
5000	-34.2
10000	-35.2
15000	-35.3
20000	-36.0
25000	-37.6
30000	-36.0

The antenna factor shall be added to receiver reading in dB_µV to obtain field strength in dB_µA/m.



HERMON LABORATORIES

Antenna factor

Horn antenna

Schwarzbeck mess-elektronik, Model BBHA 9120 D, serial number: 9120D-611, HL 4603

Frequency, MHz	Measured antenna factor, dB/m
1000	25.2
1500	25.7
2000	26.1
2500	27.5
3000	28.3
3500	29.0
4000	30.0
4500	30.8
5000	31.9
5500	32.2
6000	33.1
6500	34.6
7000	35.9
7500	36.6
8000	37.2
8500	36.6
9000	36.9
9500	37.5
10000	38.4
10500	39.5
11000	40.3
11500	40.0
12000	39.2
12500	38.7
13000	39.6
13500	40.8
14000	41.6
14500	42.1
15000	41.2
15500	39.1
16000	38.5
16500	39.9
17000	41.0
17500	44.1
18000	55.6

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

**Antenna factor
Biconilog Antenna, 26 - 2000 MHz
EMCO, Model 3142B, serial number: 9909-1421, HL 4604**

Frequency, MHz	Measured, dB/m
30	17.9
35	14.8
40	12.1
45	10.0
50	8.7
60	8.1
70	7.3
80	6.6
90	7.6
100	7.9
120	7.0
140	7.7
160	9.6
180	10.0
200	10.2
250	12.7
300	13.4
400	16.7
500	18.2
600	20.2
700	22.0
800	22.7
900	24.1
1000	25.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m



HERMON LABORATORIES

Cable loss
**Microwave Cable Assembly, 18.0 GHz, 3.4 m, SMA/SMA, Huber-Suhner, S/N 4295,
Sucoflex P103, HL 4295**

Frequency, MHz	Cable loss, dB						
10	0.11	5000	2.09	10200	2.97	15400	3.63
30	0.18	5100	2.12	10300	3.01	15500	3.65
50	0.23	5200	2.13	10400	3.00	15600	3.63
100	0.31	5300	2.16	10500	3.05	15700	3.64
200	0.38	5400	2.19	10600	3.09	15800	3.64
300	0.43	5500	2.21	10700	3.05	15900	3.66
400	0.52	5600	2.21	10800	3.09	16000	3.71
500	0.60	5700	2.24	10900	3.10	16100	3.67
600	0.67	5800	2.24	11000	3.08	16200	3.71
700	0.72	5900	2.25	11100	3.11	16300	3.70
800	0.78	6000	2.27	11200	3.12	16400	3.71
900	0.83	6100	2.25	11300	3.12	16500	3.72
1000	0.89	6200	2.29	11400	3.20	16600	3.84
1100	0.94	6300	2.34	11500	3.16	16700	3.78
1200	0.98	6400	2.37	11600	3.16	16800	3.85
1300	1.03	6500	2.33	11700	3.20	16900	3.88
1400	1.06	6600	2.34	11800	3.19	17000	3.85
1500	1.11	6700	2.39	11900	3.21	17100	3.88
1600	1.14	6800	2.46	12000	3.28	17200	3.92
1700	1.19	6900	2.45	12100	3.23	17300	3.90
1800	1.22	7000	2.44	12200	3.26	17400	4.00
1900	1.26	7100	2.43	12300	3.30	17500	4.02
2000	1.30	7200	2.44	12400	3.25	17600	4.00
2100	1.34	7300	2.51	12500	3.26	17700	3.96
2200	1.37	7400	2.54	12600	3.30	17800	4.01
2300	1.40	7500	2.49	12700	3.26	17900	4.02
2400	1.44	7600	2.52	12800	3.34	18000	4.08
2500	1.47	7700	2.59	12900	3.37		
2600	1.50	7800	2.57	13000	3.30		
2700	1.55	7900	2.55	13100	3.35		
2800	1.58	8000	2.57	13200	3.31		
2900	1.60	8100	2.58	13300	3.33		
3000	1.63	8200	2.64	13400	3.42		
3100	1.64	8300	2.70	13500	3.43		
3200	1.67	8400	2.65	13600	3.40		
3300	1.69	8500	2.66	13700	3.47		
3400	1.73	8600	2.68	13800	3.45		
3500	1.74	8700	2.70	13900	3.43		
3600	1.76	8800	2.74	14000	3.52		
3700	1.79	8900	2.74	14100	3.51		
3800	1.82	9000	2.76	14200	3.54		
3900	1.85	9100	2.82	14300	3.55		
4000	1.87	9200	2.79	14400	3.52		
4100	1.90	9300	2.82	14500	3.52		
4200	1.92	9400	2.83	14600	3.56		
4300	1.93	9500	2.83	14700	3.55		
4400	1.94	9600	2.86	14800	3.55		
4500	1.97	9700	2.93	14900	3.59		
4600	1.99	9800	2.89	15000	3.56		
4700	2.01	9900	2.91	15100	3.59		
4800	2.02	10000	2.94	15200	3.59		
4900	2.04	10100	2.94	15300	3.59		



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, 6.5 GHz, 5.0 m, N/M type-N/M type
Suhner Switzerland, HL 4535

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.10	1700	1.79	4400	3.53
15	0.13	1800	1.86	4500	3.60
20	0.15	1900	1.93	4600	3.72
30	0.18	2000	2.00	4700	3.80
40	0.21	2100	2.06	4800	3.87
50	0.24	2200	2.13	4900	3.94
60	0.26	2300	2.19	5000	3.99
70	0.29	2400	2.25	5100	4.06
80	0.31	2500	2.32	5200	4.12
90	0.33	2600	2.38	5300	4.17
100	0.35	2700	2.45	5400	4.25
150	0.43	2800	2.51	5500	4.31
200	0.50	2900	2.57	5600	4.40
300	0.63	3000	2.64	5700	4.47
400	0.74	3100	2.73	5800	4.54
500	0.85	3200	2.79	5900	4.64
600	0.94	3300	2.86	6000	4.73
700	1.03	3400	2.91	6100	4.79
800	1.12	3500	2.97	6200	4.89
900	1.20	3600	3.02	6300	5.00
1000	1.28	3700	3.07	6400	5.06
1100	1.35	3800	3.14	6500	5.13
1200	1.43	3900	3.20		
1300	1.50	4000	3.25		
1400	1.58	4100	3.32		
1500	1.65	4200	3.38		
1600	1.72	4300	3.46		



HERMON LABORATORIES

Cable loss
Microwave Cable Assembly, 4.0 GHz, 1.0 m, N/M type-N/M type
Suhner Switzerland, HL 4541

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.02	1700	0.45
15	0.03	1800	0.46
20	0.03	1900	0.48
30	0.04	2000	0.49
40	0.04	2100	0.52
50	0.05	2200	0.54
60	0.06	2300	0.55
70	0.06	2400	0.56
80	0.07	2500	0.58
90	0.07	2600	0.59
100	0.08	2700	0.61
150	0.10	2800	0.63
200	0.12	2900	0.64
300	0.15	3000	0.67
400	0.18	3100	0.70
500	0.20	3200	0.74
600	0.23	3300	0.77
700	0.25	3400	0.80
800	0.28	3500	0.82
900	0.30	3600	0.86
1000	0.31	3700	0.88
1100	0.33	3800	0.94
1200	0.35	3900	0.95
1300	0.37	4000	0.99
1400	0.39		
1500	0.41		
1600	0.43		



HERMON LABORATORIES

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT