



FCC PART 15.247


TEST REPORT

For

Skyrocket Toys LLC

12910 Culver Blvd, Suite F, Los Angeles, CA 90066, U.S.A

FCC ID: O5301603TX24G

| | |
|---|--|
| Report Type: Original Report | Product Type: Skyviper Hover Racer Remote |
| Test Engineer: <u>Emily Wang</u>  | |
| Report Number: <u>RDG160706010-00B</u> | |
| Report Date: <u>2016-08-02</u> | |
| Reviewed By: Dean Liu RF Engineer |  |
| Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY..... | 4 |
| SYSTEM TEST CONFIGURATION | 5 |
| DESCRIPTION OF TEST CONFIGURATION | 5 |
| EUT EXERCISE SOFTWARE | 5 |
| EQUIPMENT MODIFICATIONS | 5 |
| EXTERNAL CABLE..... | 5 |
| BLOCK DIAGRAM OF TEST SETUP | 5 |
| SUMMARY OF TEST RESULTS | 6 |
| FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE | 7 |
| APPLICABLE STANDARD | 7 |
| FCC §15.203 - ANTENNA REQUIREMENT | 8 |
| APPLICABLE STANDARD | 8 |
| ANTENNA CONNECTOR CONSTRUCTION | 8 |
| FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS. | 9 |
| APPLICABLE STANDARD | 9 |
| MEASUREMENT UNCERTAINTY | 9 |
| EUT SETUP | 9 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 10 |
| TEST PROCEDURE | 10 |
| TEST EQUIPMENT LIST AND DETAILS..... | 11 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 11 |
| TEST RESULTS SUMMARY | 11 |
| TEST DATA | 11 |
| FCC §15.247(a) (1) - CHANNEL SEPARATION TEST | 15 |
| APPLICABLE STANDARD | 15 |
| TEST EQUIPMENT LIST AND DETAILS..... | 15 |
| TEST PROCEDURE | 15 |
| TEST DATA | 15 |
| FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING | 17 |
| APPLICABLE STANDARD | 17 |
| TEST PROCEDURE | 17 |
| TEST EQUIPMENT LIST AND DETAILS..... | 17 |
| TEST DATA | 17 |
| FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST | 20 |
| APPLICABLE STANDARD | 20 |
| TEST PROCEDURE | 20 |
| TEST EQUIPMENT LIST AND DETAILS..... | 20 |
| TEST DATA | 20 |
| FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME) | 22 |

| | |
|--|-----------|
| APPLICABLE STANDARD | 22 |
| TEST PROCEDURE | 22 |
| TEST EQUIPMENT LIST AND DETAILS..... | 22 |
| TEST DATA | 22 |
| FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT..... | 24 |
| APPLICABLE STANDARD | 24 |
| TEST PROCEDURE | 24 |
| TEST EQUIPMENT LIST AND DETAILS..... | 24 |
| TEST DATA | 24 |
| FCC §15.247(d) - BAND EDGES TESTING | 27 |
| APPLICABLE STANDARD | 27 |
| TEST PROCEDURE | 27 |
| TEST EQUIPMENT LIST AND DETAILS..... | 27 |
| TEST DATA | 27 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Skyrocket Toys LLC*'s product, model number: 01603(FCC ID: O5301603TX24G) (the "EUT") in this report was a *Skyviper Hover Racer Remote*, which was measured approximately: which was measured approximately: 14.3 cm (L) x 10.4 cm (W) x 4.5 cm (H), DC 4.5V battery.

Note: The series product, model 01603, 01600, 01647, 01719, 01720 are electrically identical, the difference them is the model name, we selected 01603 for fully testing, the details was explained in the declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 160706010 (Assigned by BACL, Dongguan). The EUT was received on 2016-07-07.

Objective

This report is prepared on behalf of *Skyrocket Toys LLC* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the part of a system with FCC ID: O5301603RX24G
FCC Part 15C DTS submissions with FCC ID: O5301603TX24G

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode with maximum power output, which was provided by the manufacturer, 15 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2410 | 8 | 2446 |
| 1 | 2413 | 9 | 2452 |
| 2 | 2416 | 10 | 2456 |
| 3 | 2421 | 11 | 2461 |
| 4 | 2426 | 12 | 2466 |
| 5 | 2431 | 13 | 2469 |
| 6 | 2436 | 14 | 2472 |
| 7 | 2441 | / | / |

EUT was tested with channel 0, 9 and 14.

EUT Exercise Software

The software nRFgo was used during the test


Equipment Modifications

No modification was made to the EUT.

External Cable

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-----------|----|
| / | / | / | / | / | / |

Block Diagram of Test Setup

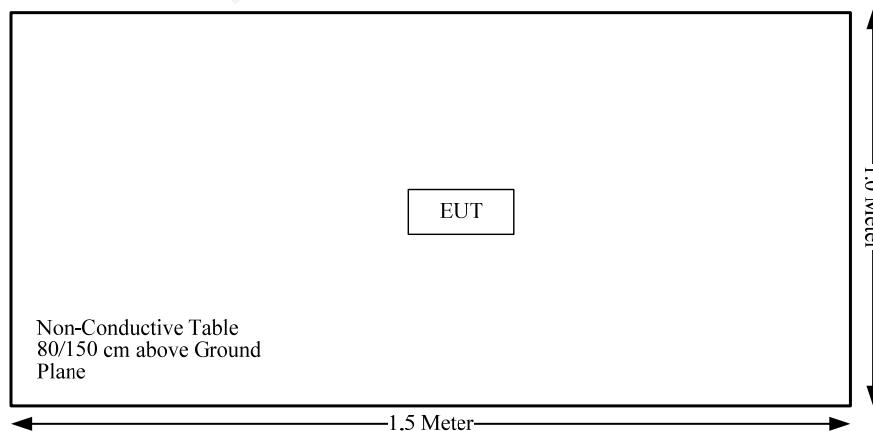

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|-------------------------------------|----------------------------------|----------------|
| FCC §15.247 (i) & §1.1310 & §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | Conducted Emissions | Not Applicable |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliance |
| §15.247 (a)(1) | 20 dB Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation Test | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel Test | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band Edges | Compliance |

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max tune-up conducted power is 2dBm (1.6 mW).

$[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}] = 1.6 / 5 * (\sqrt{2.472}) = 0.5 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


30M~200MHz: 4.55 dB for Horizontal, 4.57 dB for Vertical; 200M~1GHz: 4.66 dB for Horizontal, 4.56 dB for Vertical; measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.


Table 1 – Values of U_{cisp}

| Measurement | U_{cisp} |
|--|-------------------|
| Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz) | 6.3 dB |
| Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz) | 5.2 dB |
| Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz) | 5.5 dB |

EUT Setup

Below 1GHz:

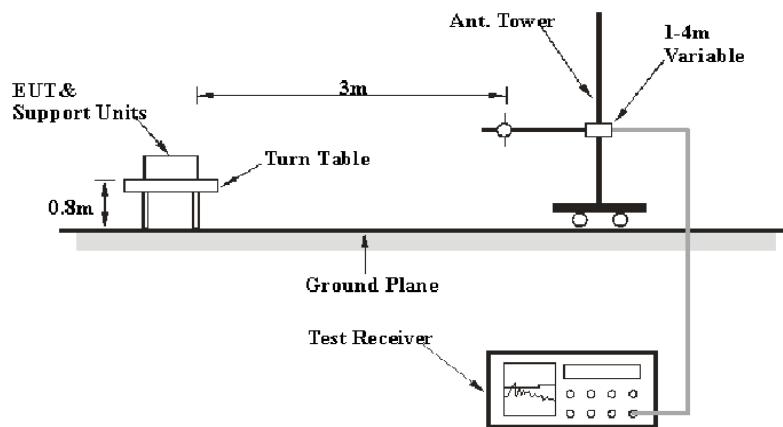

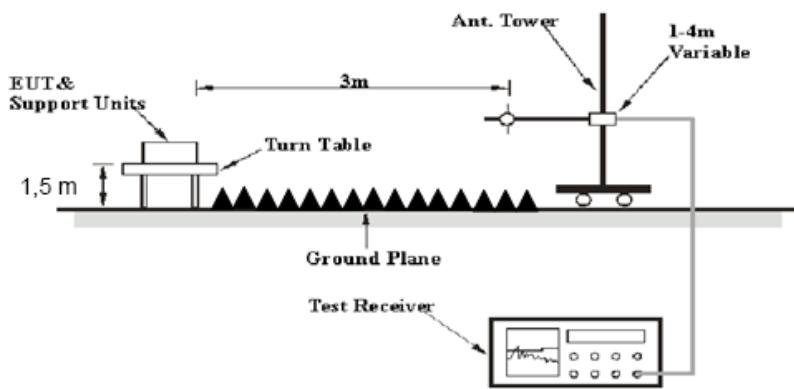Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| | 1MHz | 10 Hz | / | AV |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|-----------------|--------------------|------------------|----------------------|
| R&S | EMI Test Receiver | ESCI | 100224 | 2015-08-03 | 2016-08-02 |
| Sunol Sciences | Antenna | JB3 | A060611-3 | 2014-11-06 | 2017-11-05 |
| HP | Amplifier | 8447E | 2434A02181 | 2015-09-01 | 2016-09-01 |
| Agilent | Spectrum Analyzer | E4440A | SG43360054 | 2015-11-23 | 2016-11-22 |
| ETS-Lindgren | Horn Antenna | 3115 | 9808-5557 | 2015-09-06 | 2018-09-06 |
| Mini-Circuit | Amplifier | ZVA-213-S+ | 054201245 | 2016-02-19 | 2017-02-19 |
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| Ducommun Technologies | Horn Antenna | ARH-4223-02 | 1007726-01 1304 | 2014-06-16 | 2017-06-15 |
| Quinstar | Amplifier | QLW-18405536-JO | 15964001001 | 2015-09-06 | 2016-09-06 |
| N/A | Coaxial Cable | 14m | N/A | 2016-05-06 | 2017-05-06 |
| N/A | Coaxial Cable | 8m | N/A | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247.


Test Data

Environmental Conditions


| | |
|--------------------|----------|
| Temperature: | 28.4 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 99.7 kPa |

* The testing was performed by Emily Wang on 2016-07-09.

Test Mode: Transmitting

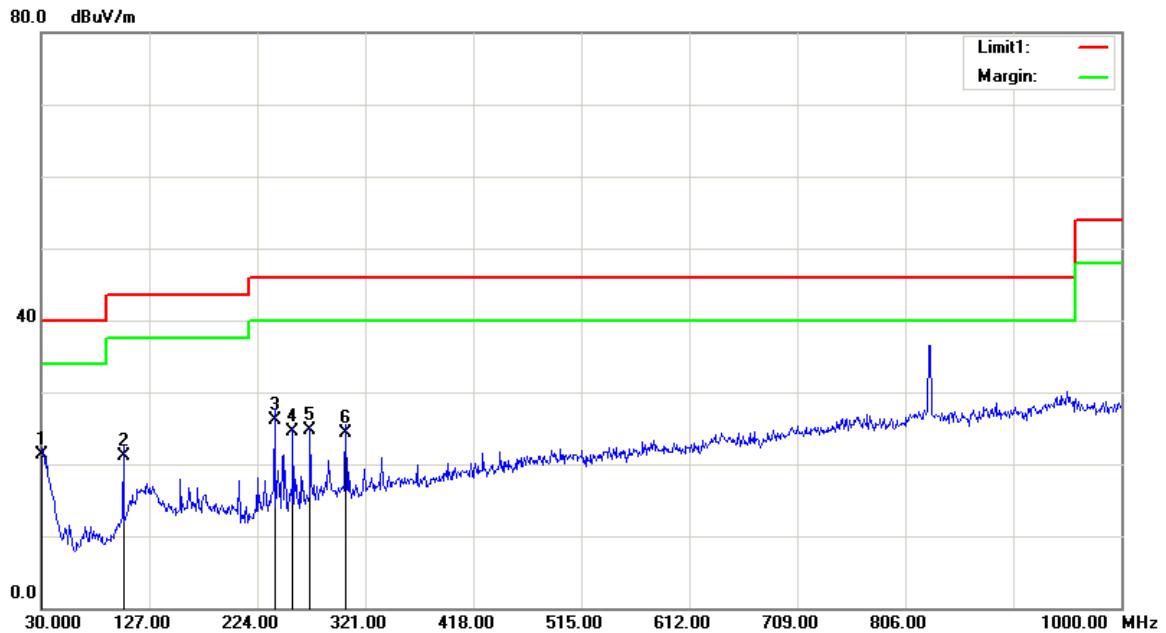1) Below 1GHz**Horizontal**

| Frequency (MHz) | Receiver Reading (dB μ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 30.9700 | 21.08 | QP | 0.22 | 21.30 | 40.00 | 18.70 |
| 103.7200 | 29.80 | QP | -8.60 | 21.20 | 43.50 | 22.30 |
| 239.5200 | 33.80 | QP | -7.60 | 26.20 | 46.00 | 19.80 |
| 256.0100 | 32.15 | QP | -7.65 | 24.50 | 46.00 | 21.50 |
| 271.5300 | 30.73 | QP | -6.03 | 24.70 | 46.00 | 21.30 |
| 303.5400 | 30.10 | QP | -5.70 | 24.40 | 46.00 | 21.60 |

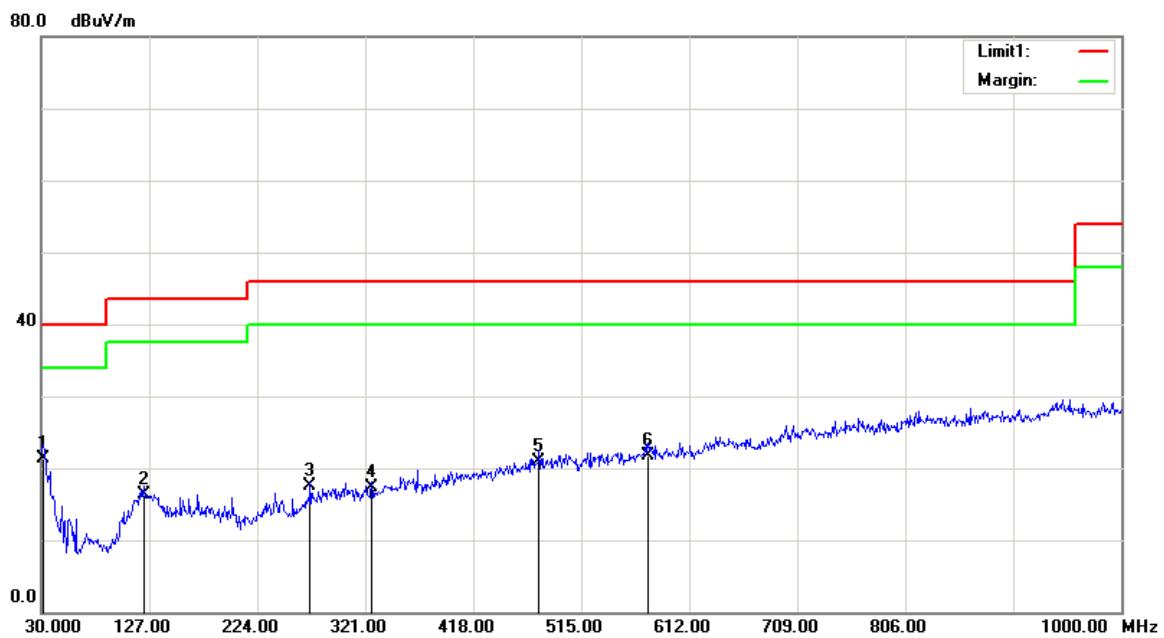Vertical

| Frequency (MHz) | Receiver Reading (dB μ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 31.9400 | 21.80 | QP | -0.50 | 21.30 | 40.00 | 18.70 |
| 122.1500 | 21.91 | QP | -5.51 | 16.40 | 43.50 | 27.10 |
| 271.5300 | 23.53 | QP | -6.03 | 17.50 | 46.00 | 28.50 |
| 326.8200 | 22.63 | QP | -5.33 | 17.30 | 46.00 | 28.70 |
| 477.1700 | 22.65 | QP | -1.75 | 20.90 | 46.00 | 25.10 |
| 575.1400 | 22.24 | QP | -0.44 | 21.80 | 46.00 | 24.20 |

2) 1-25GHz:

| Frequency (MHz) | Receiver | | Rx Antenna | | Cable loss (dB) | Amplifier Gain (dB) | Corrected Amplitude (dB μ V/m) | FCC 15.247 | |
|--------------------------|-------------------------|----------|----------------|----------------|-----------------------|---------------------------|--|-------------------------|----------------|
| | Reading (dB μ V) | Detector | Polar (H/V) | Factor (dB) | | | | Limit (dB μ V/m) | Margin (dB) |
| Low Channel: 2410 MHz | | | | | | | | | |
| 2410 | 64.27 | PK | H | 25.67 | 3.68 | 0.00 | 93.62 | N/A | N/A |
| 2410 | 51.56 | AV | H | 25.67 | 3.68 | 0.00 | 80.91 | N/A | N/A |
| 2410 | 57.97 | PK | V | 25.67 | 3.68 | 0.00 | 87.32 | N/A | N/A |
| 2410 | 44.7 | AV | V | 25.67 | 3.68 | 0.00 | 74.05 | N/A | N/A |
| 2400 | 25.96 | PK | H | 25.64 | 3.65 | 0.00 | 55.25 | 74.00 | 18.75 |
| 2400 | 13.42 | AV | H | 25.64 | 3.65 | 0.00 | 42.71 | 54.00 | 11.29 |
| 4820 | 45.81 | PK | H | 30.63 | 5.03 | 27.41 | 54.06 | 74.00 | 19.94 |
| 4820 | 31.56 | AV | H | 30.63 | 5.03 | 27.41 | 39.81 | 54.00 | 14.19 |
| 7230 | 33.17 | PK | H | 34.15 | 6.64 | 25.90 | 48.06 | 74.00 | 25.94 |
| 7230 | 20.31 | AV | H | 34.15 | 6.64 | 25.90 | 35.20 | 54.00 | 18.80 |
| 3271 | 33.14 | PK | H | 28.07 | 5.82 | 27.31 | 39.72 | 74.00 | 34.28 |
| 3271 | 20.69 | AV | H | 28.07 | 5.82 | 27.31 | 27.27 | 54.00 | 26.73 |
| Middle Channel: 2452 MHz | | | | | | | | | |
| 2452 | 65.06 | PK | H | 25.78 | 3.78 | 0.00 | 94.62 | N/A | N/A |
| 2452 | 51.84 | AV | H | 25.78 | 3.78 | 0.00 | 81.40 | N/A | N/A |
| 2452 | 58.35 | PK | V | 25.78 | 3.78 | 0.00 | 87.91 | N/A | N/A |
| 2452 | 45.23 | AV | V | 25.78 | 3.78 | 0.00 | 74.79 | N/A | N/A |
| 4904 | 46.23 | PK | H | 30.85 | 5.31 | 27.43 | 54.96 | 74.00 | 19.04 |
| 4904 | 31.92 | AV | H | 30.85 | 5.31 | 27.43 | 40.65 | 54.00 | 13.35 |
| 7356 | 33.53 | PK | H | 34.45 | 6.79 | 25.87 | 48.90 | 74.00 | 25.10 |
| 7356 | 20.64 | AV | H | 34.45 | 6.79 | 25.87 | 36.01 | 54.00 | 17.99 |
| 3152 | 33.52 | PK | H | 27.69 | 6.94 | 27.41 | 40.74 | 74.00 | 33.26 |
| 3152 | 21.06 | AV | H | 27.69 | 6.94 | 27.41 | 28.28 | 54.00 | 25.72 |
| 3659 | 34.01 | PK | H | 29.15 | 4.55 | 27.30 | 40.41 | 74.00 | 33.59 |
| 3659 | 21.62 | AV | H | 29.15 | 4.55 | 27.30 | 28.02 | 54.00 | 25.98 |
| High Channel: 2472 MHz | | | | | | | | | |
| 2472 | 64.89 | PK | H | 25.83 | 3.71 | 0.00 | 94.43 | N/A | N/A |
| 2472 | 51.91 | AV | H | 25.83 | 3.71 | 0.00 | 81.45 | N/A | N/A |
| 2472 | 58.61 | PK | V | 25.83 | 3.71 | 0.00 | 88.15 | N/A | N/A |
| 2472 | 45.63 | AV | V | 25.83 | 3.71 | 0.00 | 75.17 | N/A | N/A |
| 2483.5 | 25.85 | PK | H | 25.86 | 3.67 | 0.00 | 55.38 | 74.00 | 18.62 |
| 2483.5 | 13.93 | AV | H | 25.86 | 3.67 | 0.00 | 43.46 | 54.00 | 10.54 |
| 4944 | 46.13 | PK | H | 30.95 | 5.36 | 27.43 | 55.01 | 74.00 | 18.99 |
| 4944 | 31.89 | AV | H | 30.95 | 5.36 | 27.43 | 40.77 | 54.00 | 13.23 |
| 7416 | 33.51 | PK | H | 34.60 | 6.86 | 25.90 | 49.07 | 74.00 | 24.93 |
| 7416 | 20.66 | AV | H | 34.60 | 6.86 | 25.90 | 36.22 | 54.00 | 17.78 |
| 3198 | 33.45 | PK | H | 27.83 | 6.12 | 27.37 | 40.03 | 74.00 | 33.97 |
| 3198 | 21.03 | AV | H | 27.83 | 6.12 | 27.37 | 27.61 | 54.00 | 26.39 |

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 32.1 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.4 kPa |

* The testing was performed by Emily Wang on 2016-08-01.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

| Frequency | Channel Separation | Limit |
|-----------|--------------------|-------|
| MHz | MHz | MHz |
| 2469 | | |
| 2472 | 2.972 | 0.709 |

Note: Limit = $(2/3) \times 20\text{dB}$ bandwidth



Date: 1.AUG.2016 14:18:55

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 32.1 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.4 kPa |

* The testing was performed by Emily Wang on 2016-08-01.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low | 2412 | 1.036 |
| Middle | 2452 | 1.064 |
| High | 2472 | 1.064 |

Low Channel

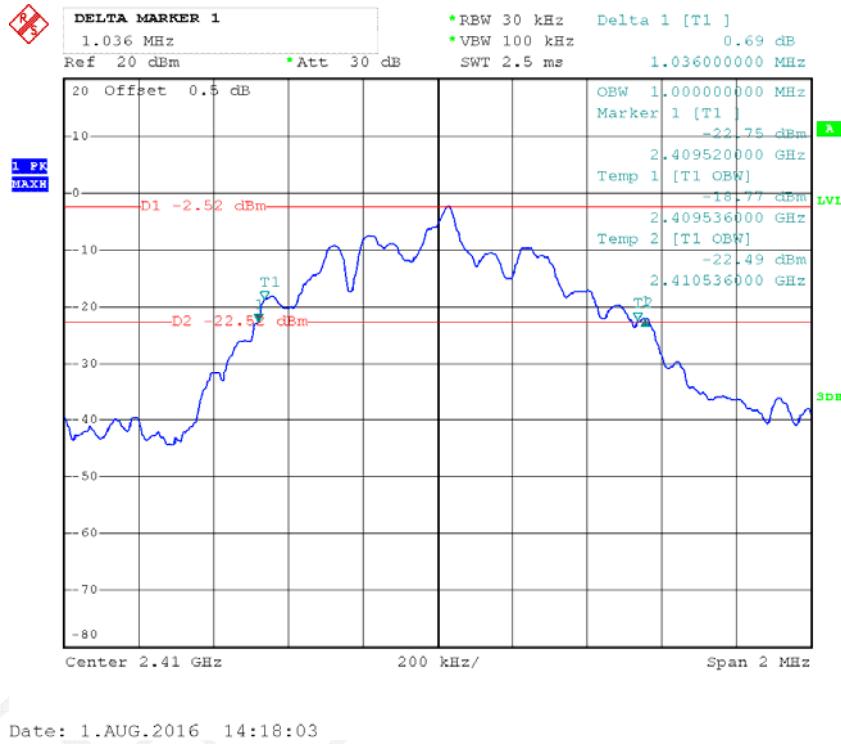


Middle Channel

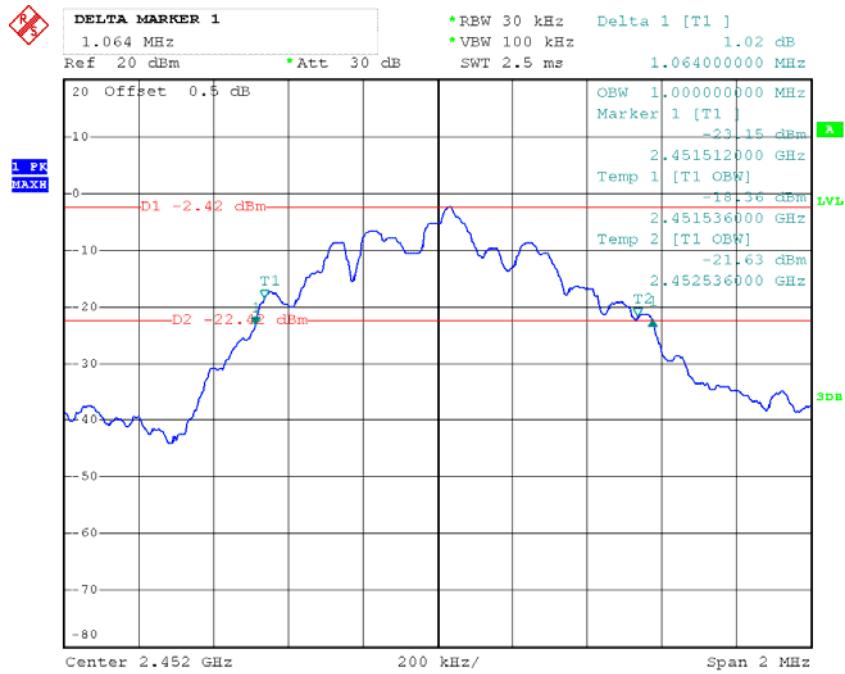

Date: 1.AUG.2016 14:19:55

High Channel

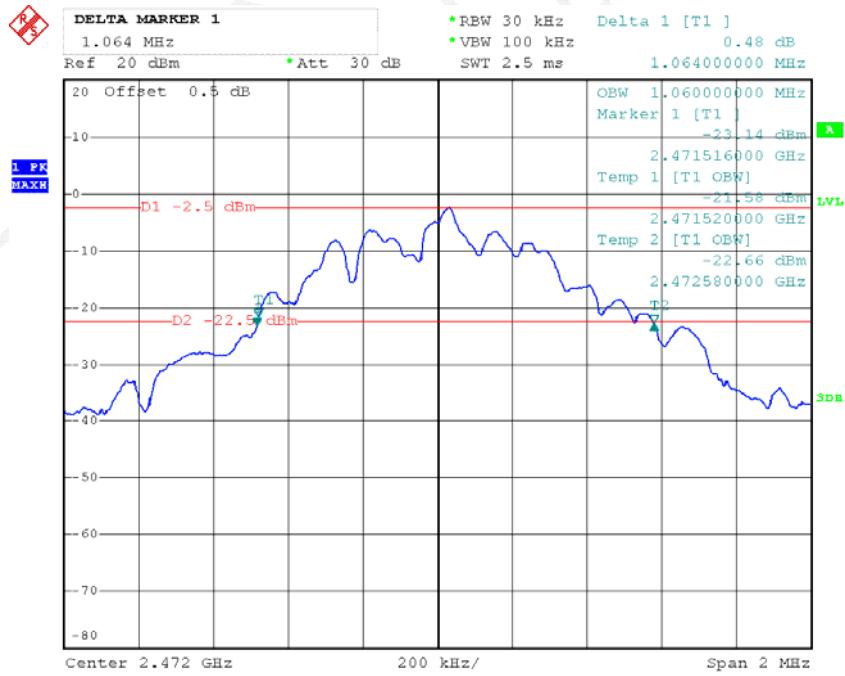

Date: 1.AUG.2016 14:18:51

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 32.1 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.4 kPa |

* The testing was performed by Emily Wang on 2016-08-01.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

| Frequency Range (MHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 2400-2483.5 | 15 | ≥15 |

Number of Hopping Channels

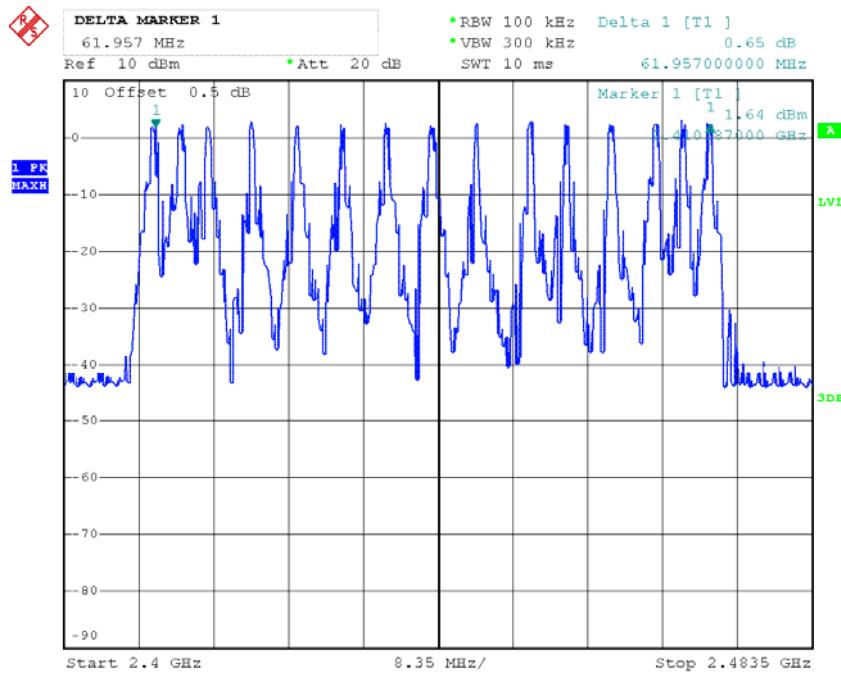

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels *hopping NO. * 0.4s

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

| | |
|---------------------------|-------------------|
| Temperature: | 31.4 - 32.1 °C |
| Relative Humidity: | 51 - 52 % |
| ATM Pressure: | 100.3 – 100.4 kPa |

* The testing was performed by Emily Wang from 2016-07-29 to 2016-08-01.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

| Channel | Pulse Width (ms) | Hopping Rate (pulse/s) | Dwell Time (s) | Limit (s) | Result |
|---------|------------------|------------------------|----------------|-----------|------------|
| Low | 0.19 | 200 | 0.015 | 0.4 | Compliance |

Dwell Time= time slot length * hope rate/ number of hopping channels *hopping NO. * 0.4s

Note: hopping rate = 200 pulse/s, which was declared by applicant.

Pulse Width

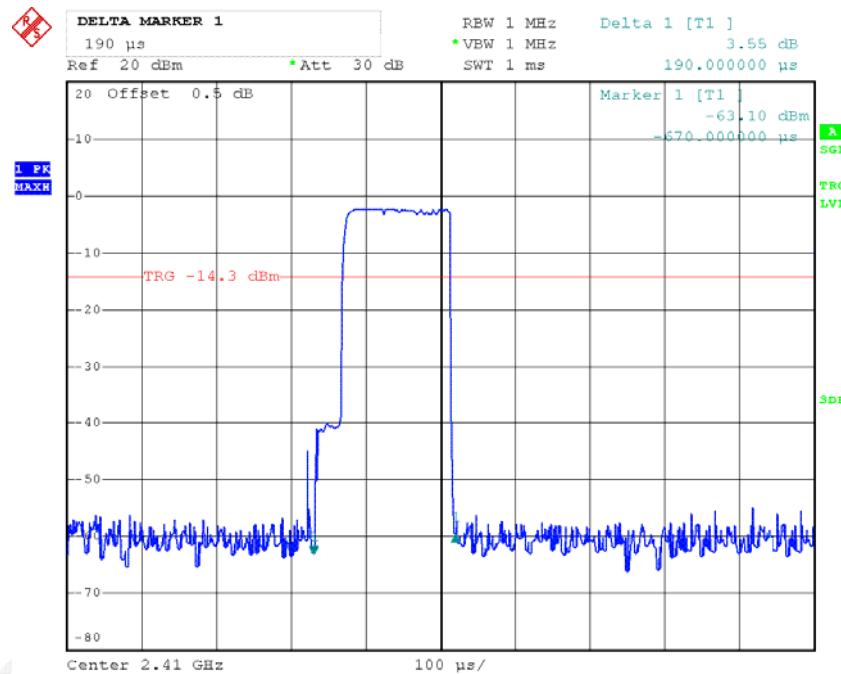

Date: 1.AUG.2016 14:18:56

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 32.1 °C |
| Relative Humidity: | 54 % |
| ATM Pressure: | 99.7 kPa |


* The testing was performed by Emily Wang on 2016-07-12.

Test Result: Compliance.


Test Mode: Transmitting

| Frequency (MHz) | Peak Output power (dBm) | Limit (dBm) |
|-----------------|-------------------------|-------------|
| 2412 | 1.57 | 21 |
| 2452 | 1.78 | 21 |
| 2472 | 1.72 | 21 |


Note: The data above was tested in conducted mode.

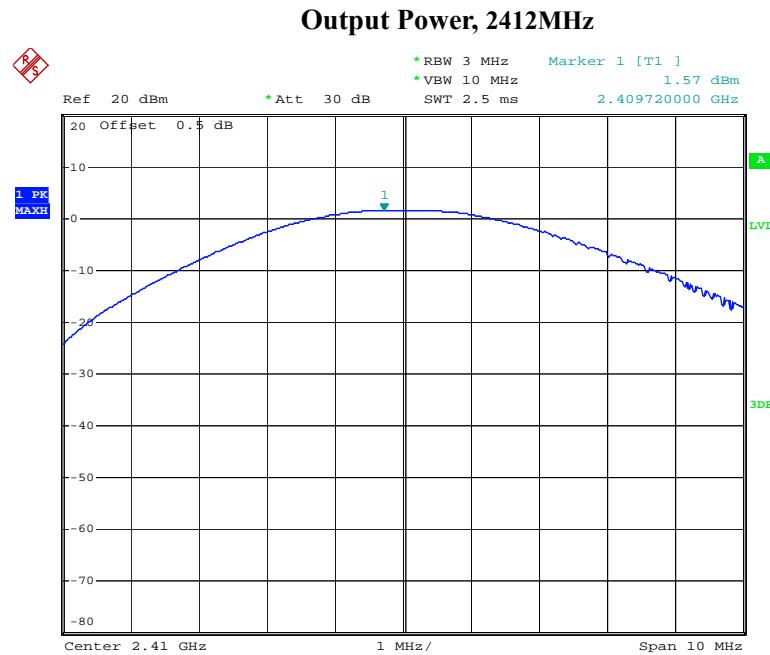

Date: 12.JUL.2016 17:49:53

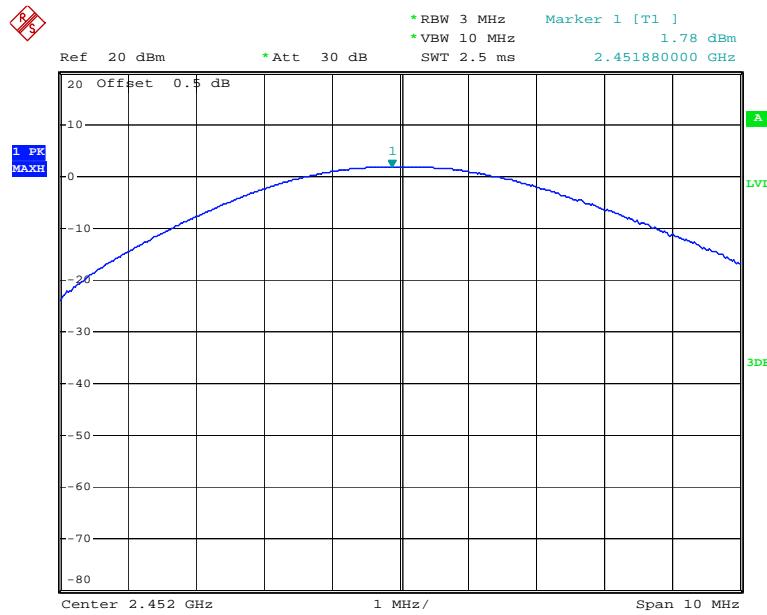Output Power, 2452MHz

Date: 12.JUL.2016 17:51:47

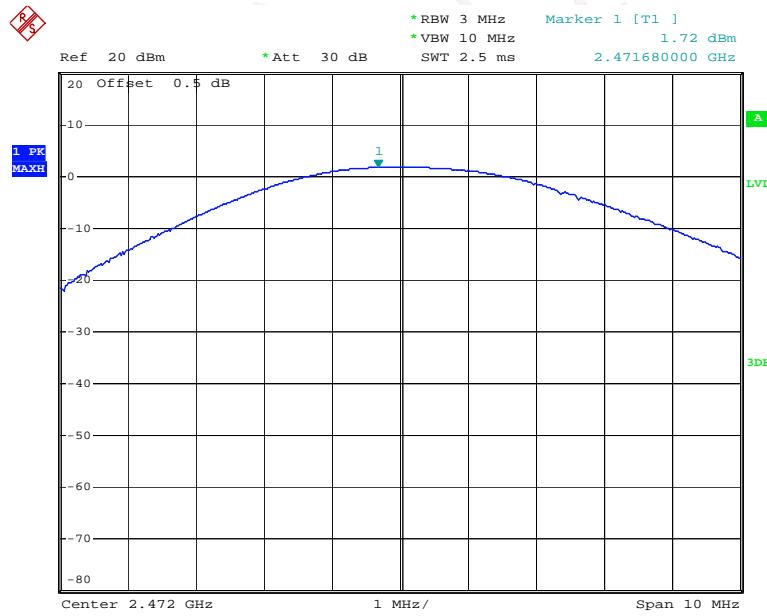Output Power, 2472MHz

Date: 12.JUL.2016 17:54:23

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S | Spectrum Analyzer | FSP 38 | 100478 | 2015-11-23 | 2016-11-22 |
| N/A | Coaxial Cable | 0.1m | N/A | 2016-05-06 | 2017-05-06 |
| E-Microwave | DC Blocking | EMDCB-00036 | 0E01201047 | 2016-05-06 | 2017-05-06 |


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 32.1 °C |
| Relative Humidity: | 51 % |
| ATM Pressure: | 100.4 kPa |

* The testing was performed by Emily Wang on 2016-08-01.

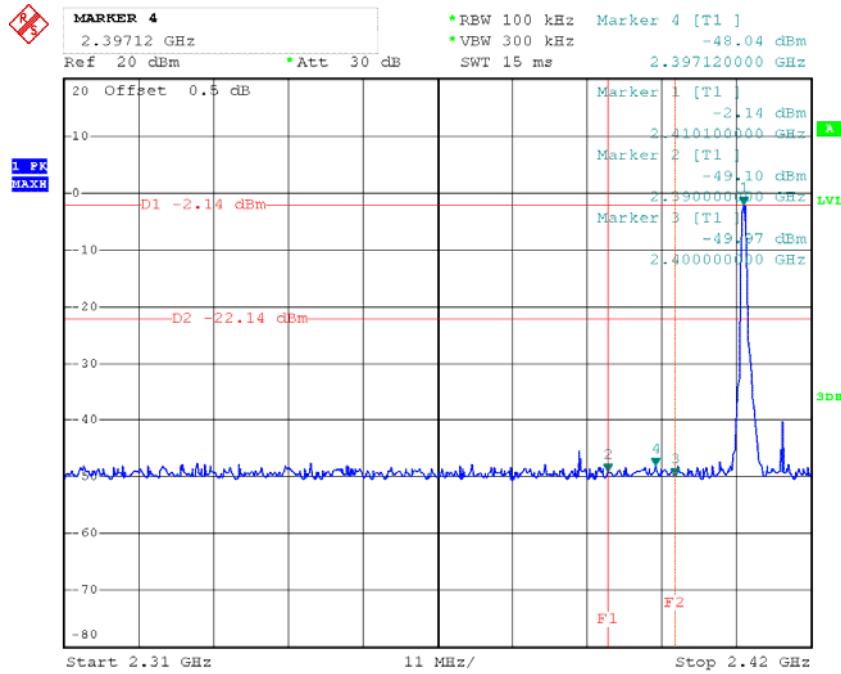Test Result: Compliance**Band Edge, Left Side**

Date: 1.AUG.2016 14:20:23

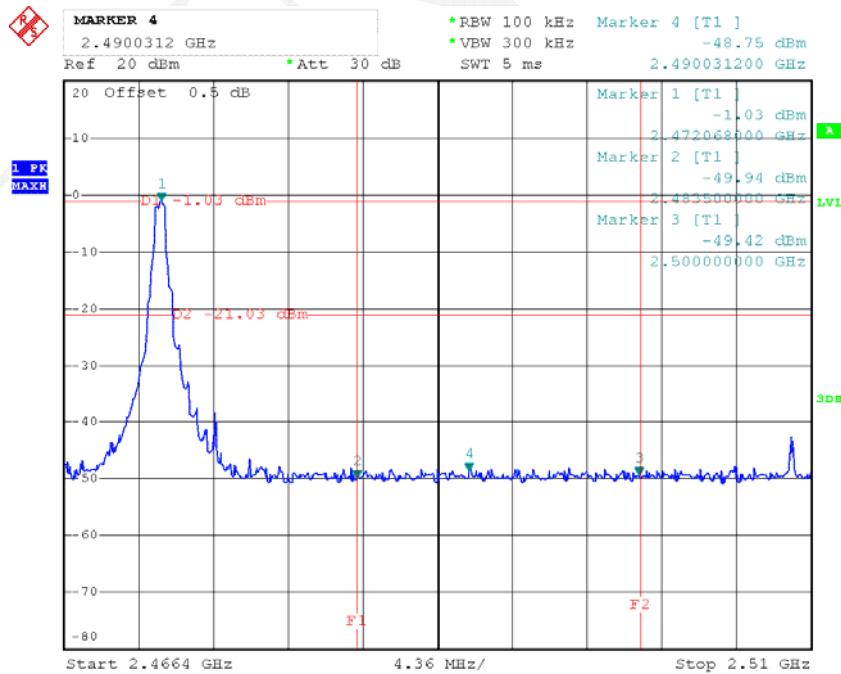Band Edge, Right Side

Date: 1.AUG.2016 14:20:23

******* END OF REPORT *******