

## FCC PART 15.249

## TEST REPORT

For

### Skyrocket Toys LLC

12910 Culver Blvd, Suite F, Los Angeles, CA 90066, U.S.A

**FCC ID: O5301942RX24G**

|                                        |                                                                                                                                                                                                                                                                                     |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Name:</b><br>DASH Nano Drone                                                                                                                                                                                                                                             |
| <b>Report Number:</b> RDG180409012-00B |                                                                                                                                                                                                                                                                                     |
| <b>Report Date:</b> 2018-04-26         |                                                                                                                                                                                                                                                                                     |
| <b>Reviewed By:</b>                    | <i>Jerry Zhang</i>                                                                                                                                                                                                                                                                  |
| <b>Test Laboratory:</b>                | Jerry Zhang<br>EMC Manager<br>Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” .

## **TABLE OF CONTENTS**

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                  | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....         | 3         |
| OBJECTIVE .....                                                  | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                               | 3         |
| TEST METHODOLOGY .....                                           | 3         |
| MEASUREMENT UNCERTAINTY.....                                     | 3         |
| TEST FACILITY .....                                              | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                            | <b>5</b>  |
| JUSTIFICATION .....                                              | 5         |
| EUT EXERCISE SOFTWARE .....                                      | 5         |
| EQUIPMENT MODIFICATIONS .....                                    | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                         | 5         |
| SUPPORT CABLE LIST AND DETAILS .....                             | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                             | <b>7</b>  |
| <b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>                     | <b>8</b>  |
| APPLICABLE STANDARD .....                                        | 8         |
| ANTENNA CONNECTOR CONSTRUCTION .....                             | 8         |
| <b>FCC §15.207 (A)– AC LINE CONDUCTED EMISSIONS .....</b>        | <b>9</b>  |
| APPLICABLE STANDARD .....                                        | 9         |
| EUT SETUP .....                                                  | 9         |
| EMI TEST RECEIVER SETUP.....                                     | 9         |
| TEST PROCEDURE .....                                             | 10        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                   | 10        |
| TEST EQUIPMENT LIST AND DETAILS.....                             | 10        |
| TEST DATA .....                                                  | 11        |
| <b>FCC§15.205, §15.209&amp;§15.249- RADIATED EMISSIONS .....</b> | <b>13</b> |
| APPLICABLE STANDARD .....                                        | 13        |
| EUT SETUP .....                                                  | 13        |
| TEST EQUIPMENT SETUP .....                                       | 14        |
| TEST PROCEDURE .....                                             | 14        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                   | 14        |
| TEST EQUIPMENT LIST AND DETAILS.....                             | 15        |
| TEST DATA .....                                                  | 15        |
| <b>FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....</b>             | <b>21</b> |
| APPLICABLE STANDARD .....                                        | 21        |
| TEST PROCEDURE .....                                             | 21        |
| TEST EQUIPMENT LIST AND DETAILS.....                             | 21        |
| TEST DATA .....                                                  | 21        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                                           |
|-----------------------------|-------------------------------------------|
| <b>EUT Name:</b>            | DASH Nano Drone                           |
| <b>EUT Model:</b>           | 01942                                     |
| <b>FCC ID:</b>              | O5301942RX24G                             |
| <b>Rated Input Voltage:</b> | DC 3.7V from battery                      |
| <b>External Dimension:</b>  | Length (49 mm)*Width (49 mm)*High (21 mm) |
| <b>Serial Number:</b>       | 180409012                                 |
| <b>EUT Received Date:</b>   | 2018.04.17                                |

### Objective

This type approval report is prepared on behalf of **Skyrocket Toys LLC** in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

### Related Submittal(s)/Grant(s)

Submitted with the part of a system with FCC ID: O5301942TX24G.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

| Parameter                         | Measurement Uncertainty                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                                                                         |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical<br>200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical<br>1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB |
| Temperature                       | ±1℃                                                                                                                                                          |
| Humidity                          | ±5%                                                                                                                                                          |
| DC and low frequency voltages     | ±0.4%                                                                                                                                                        |
| Duty Cycle                        | 1%                                                                                                                                                           |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)                                                                                                                                  |

### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The device employs 65 channels as below list:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2408            | 34      | 2440            |
| 2       | 2410            | 35      | 2441            |
| ~       | ~               | ~       | ~               |
| ~       | ~               | 64      | 2471            |
| 32      | 2439            | 65      | 2472            |
| 33      | 2440            |         |                 |

EUT was tested with Channel 1, 33, and 65

### EUT Exercise Software

No software was used in test, the device was configured to engineer mode by manufacturer, test channel switched by keys.

### Equipment Modifications

No modifications were made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description | Model          | Serial Number |
|--------------|-------------|----------------|---------------|
| POSH         | Adapter     | TPA-46050150UU | N/A           |

### Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From           | To  |
|-------------------|----------------|--------------|------------|----------------|-----|
| Power Cable       | No             | No           | 0.57       | USB of Adapter | EUT |

Block Diagram of Test Setup

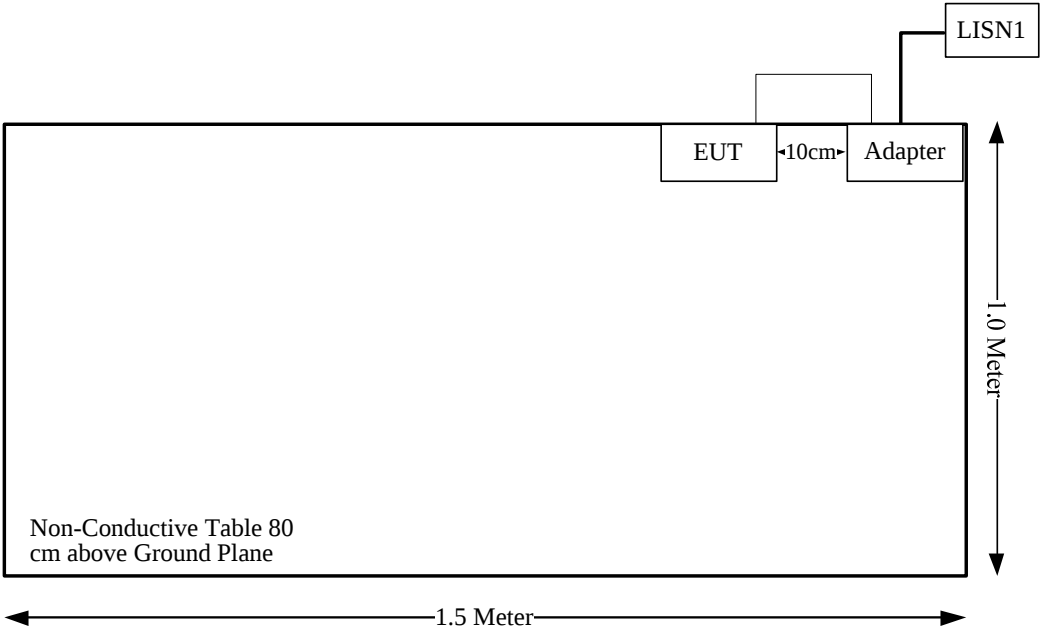

**SUMMARY OF TEST RESULTS**

| FCC Rules                | Description of Test  | Result     |
|--------------------------|----------------------|------------|
| §15.203                  | Antenna Requirement  | Compliance |
| §15.207(a)               | Conduction Emissions | Compliance |
| 15.205, §15.209, §15.249 | Radiated Emissions   | Compliance |
| §15.215 (c)              | 20 dB Bandwidth      | Compliance |

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **Antenna Connector Construction**

The EUT has one monopole antenna arrangement, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a)– AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a)

### EUT Setup

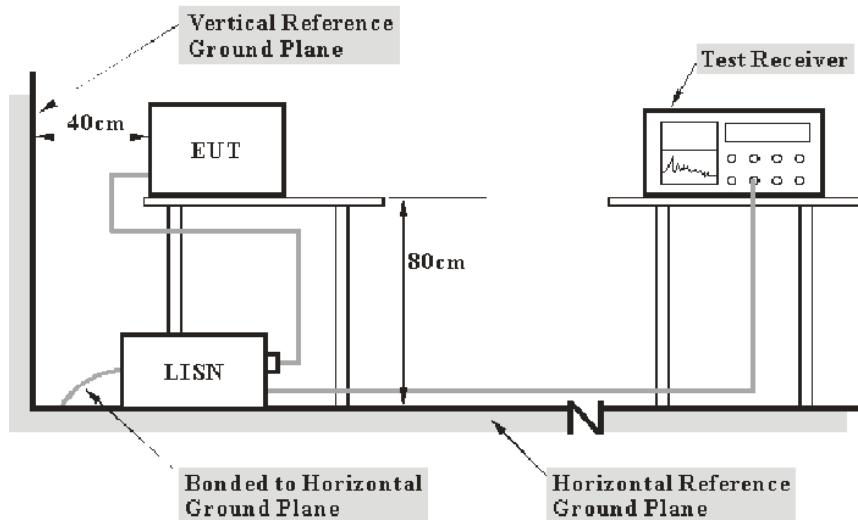

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer | Description        | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------|---------------|------------------|----------------------|
| R&S          | EMI Test Receiver  | ESCS 30   | 830245/006    | 2017-12-11       | 2018-12-11           |
| N/A          | Coaxial Cable      | C-NJNJ-50 | C-0200-01     | 2017-09-05       | 2018-09-05           |
| R&S          | Test Software      | EMC32     | Version8.53.0 | N/A              | N/A                  |
| R&S          | Two-line V-network | ENV 216   | 101614        | 2017-12-08       | 2018-12-08           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.2 °C   |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 101.2 kPa |

The testing was performed by Alex You on 2018-04-17.


**Test Mode:** Transmitting

**AC120V, 60 Hz, Line:**

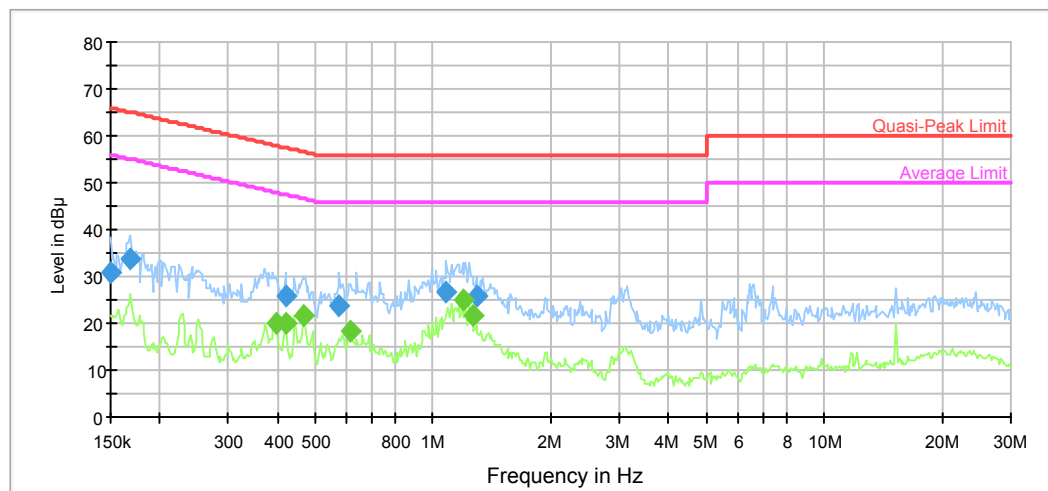

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.150000        | 30.8             | 9.000           | L1   | 11.2       | 35.2        | 66.0         | Compliance |
| 0.169044        | 33.6             | 9.000           | L1   | 10.9       | 31.4        | 65.0         | Compliance |
| 0.419276        | 25.7             | 9.000           | L1   | 10.0       | 31.8        | 57.5         | Compliance |
| 0.576662        | 23.6             | 9.000           | L1   | 9.8        | 32.4        | 56.0         | Compliance |
| 1.082190        | 26.5             | 9.000           | L1   | 9.8        | 29.5        | 56.0         | Compliance |
| 1.289541        | 26.0             | 9.000           | L1   | 9.8        | 30.0        | 56.0         | Compliance |

| Frequency (MHz) | Average (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|------------|
| 0.396530        | 19.8           | 9.000           | L1   | 10.0       | 28.1        | 47.9         | Compliance |
| 0.419276        | 20.2           | 9.000           | L1   | 10.0       | 27.3        | 47.5         | Compliance |
| 0.468757        | 21.6           | 9.000           | L1   | 9.9        | 24.9        | 46.5         | Compliance |
| 0.614619        | 18.4           | 9.000           | L1   | 9.8        | 27.6        | 46.0         | Compliance |
| 1.190776        | 24.8           | 9.000           | L1   | 9.8        | 21.2        | 46.0         | Compliance |
| 1.259081        | 21.5           | 9.000           | L1   | 9.8        | 24.5        | 46.0         | Compliance |

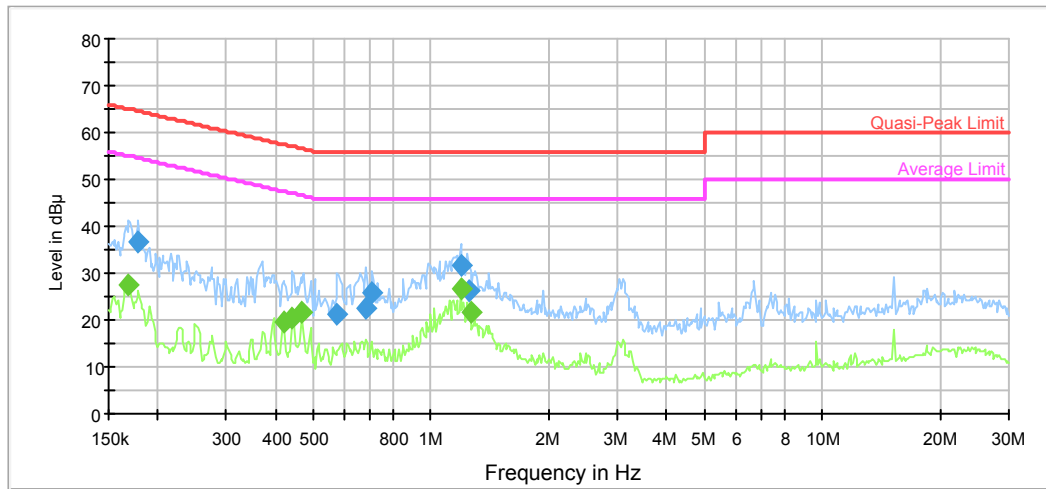**AC120V, 60 Hz, Neutral:**

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.178741        | 36.8             | 9.000           | N    | 10.8       | 27.7        | 64.5         | Compliance |
| 0.576662        | 21.2             | 9.000           | N    | 9.8        | 34.8        | 56.0         | Compliance |
| 0.681699        | 22.6             | 9.000           | N    | 9.8        | 33.4        | 56.0         | Compliance |
| 0.709407        | 26.0             | 9.000           | N    | 9.8        | 30.0        | 56.0         | Compliance |
| 1.190776        | 31.8             | 9.000           | N    | 9.8        | 24.2        | 56.0         | Compliance |
| 1.249088        | 26.4             | 9.000           | N    | 9.8        | 29.6        | 56.0         | Compliance |

| Frequency (MHz) | Average (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|------------|
| 0.169044        | 27.3           | 9.000           | N    | 10.9       | 27.7        | 55.0         | Compliance |
| 0.419276        | 19.8           | 9.000           | N    | 10.0       | 27.7        | 47.5         | Compliance |
| 0.443327        | 20.3           | 9.000           | N    | 9.9        | 26.7        | 47.0         | Compliance |
| 0.468757        | 21.6           | 9.000           | N    | 9.9        | 24.9        | 46.5         | Compliance |
| 1.190776        | 26.8           | 9.000           | N    | 9.8        | 19.2        | 46.0         | Compliance |
| 1.259081        | 21.5           | 9.000           | N    | 9.8        | 24.5        | 46.0         | Compliance |

**FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS****Applicable Standard**

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--------------------------------------------------|------------------------------------------------|
| 902–928 MHz           | 50                                               | 500                                            |
| 2400–2483.5 MHz       | 50                                               | 500                                            |
| 5725–5875 MHz         | 50                                               | 500                                            |
| 24.0–24.25 GHz        | 250                                              | 2500                                           |

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

**EUT Setup**

Below 1 GHz:

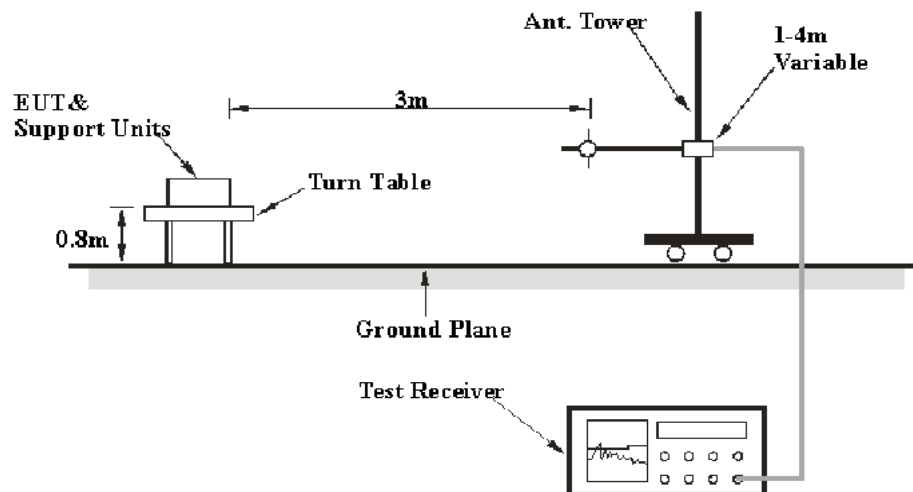

Above 1 GHz:

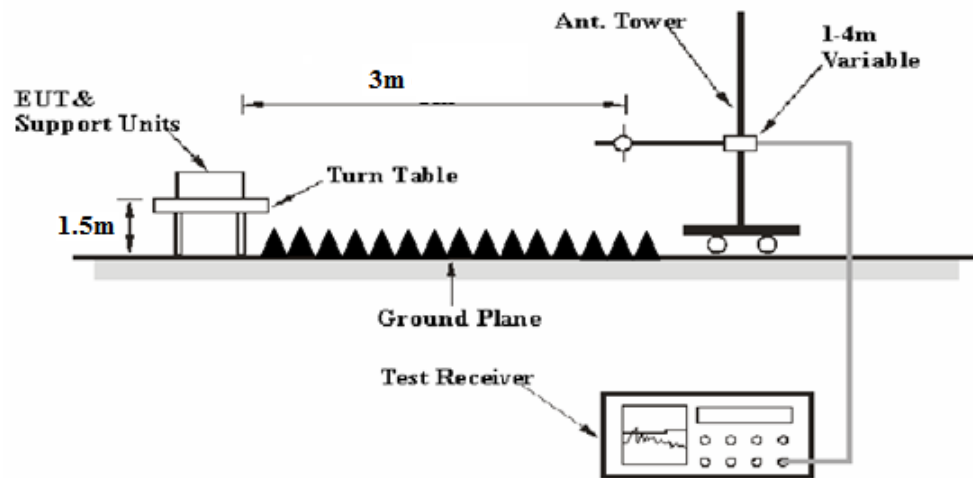

The radiated emission tests were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

### Test Equipment Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 10 Hz     | /       | AV       |

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak detection mode above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

| Manufacturer          | Description       | Model                  | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|------------------------|--------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver | ESCI                   | 100224             | 2017-12-11       | 2018-12-11           |
| Sunol Sciences        | Antenna           | JB3                    | A060611-1          | 2017-11-10       | 2018-11-10           |
| HP                    | Amplifier         | 8447D                  | 2727A05902         | 2017-09-05       | 2018-09-05           |
| ETS-Lindgren          | Horn Antenna      | 3115                   | 000 527 35         | 2016-01-05       | 2019-01-04           |
| MITEQ                 | Amplifier         | AFS42-00101800-25-S-42 | 2001271            | 2017-09-05       | 2018-09-05           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02            | 1007726-01<br>1304 | 2016-11-18       | 2019-11-18           |
| Quinstar              | Amplifier         | QLW-18405536-JO        | 15964001001        | 2017-06-27       | 2018-06-27           |
| E-Microwave           | Band-stop Filters | OBSF-2400-2483.5-S     | OE01601525         | 2017-06-16       | 2018-06-16           |
| Micro-tronics         | High Pass Filter  | HPM50111               | S/N-G217           | 2017-06-16       | 2018-06-16           |
| Unknown               | Coaxial Cable     | C-NJNJ-50              | C-0400-02          | 2017-09-05       | 2018-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50              | C-0075-02          | 2017-09-05       | 2018-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50              | C-2200-01          | 2017-09-05       | 2018-09-05           |
| Unknown               | Coaxial Cable     | C-SJSJ-50              | C-0800-01          | 2017-09-05       | 2018-09-05           |
| Unknown               | Coaxial Cable     | C-2.4J2.4J-50          | C-0700-02          | 2017-06-27       | 2018-06-27           |
| Farad                 | Test Software     | EZ-EMC                 | V1.1.4.2           | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24.6 °C   |
| <b>Relative Humidity:</b> | 49 %      |
| <b>ATM Pressure:</b>      | 100.8 kPa |

The testing was performed by Sunny Cen and Blake Yang on 2018-04-20.


Test Mode: Transmitting

1) 30MHz-1GHz(Worst Case at Middle Channel)

Horizontal:

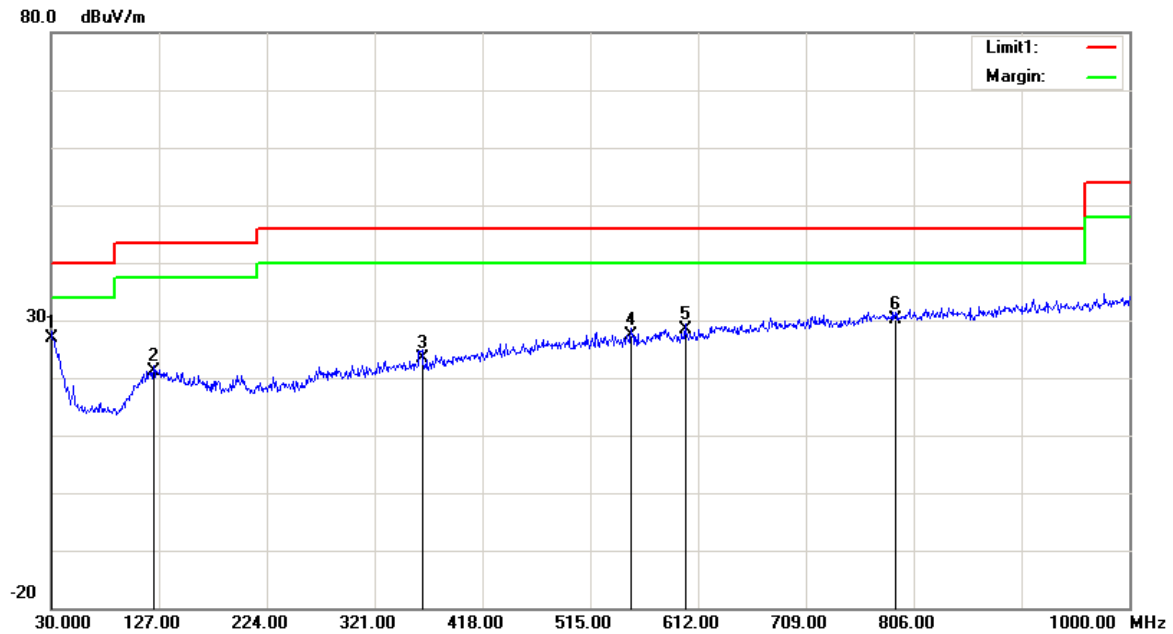

| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 30.0000         | 25.26                   | QP       | 1.54                     | 26.80               | 40.00          | 13.20       |
| 122.1500        | 25.92                   | QP       | -4.82                    | 21.10               | 43.50          | 22.40       |
| 363.6800        | 26.19                   | QP       | -2.79                    | 23.40               | 46.00          | 22.60       |
| 551.8600        | 27.28                   | QP       | 0.22                     | 27.50               | 46.00          | 18.50       |
| 600.3600        | 27.43                   | QP       | 0.87                     | 28.30               | 46.00          | 17.70       |
| 789.5100        | 25.57                   | QP       | 4.53                     | 30.10               | 46.00          | 15.90       |

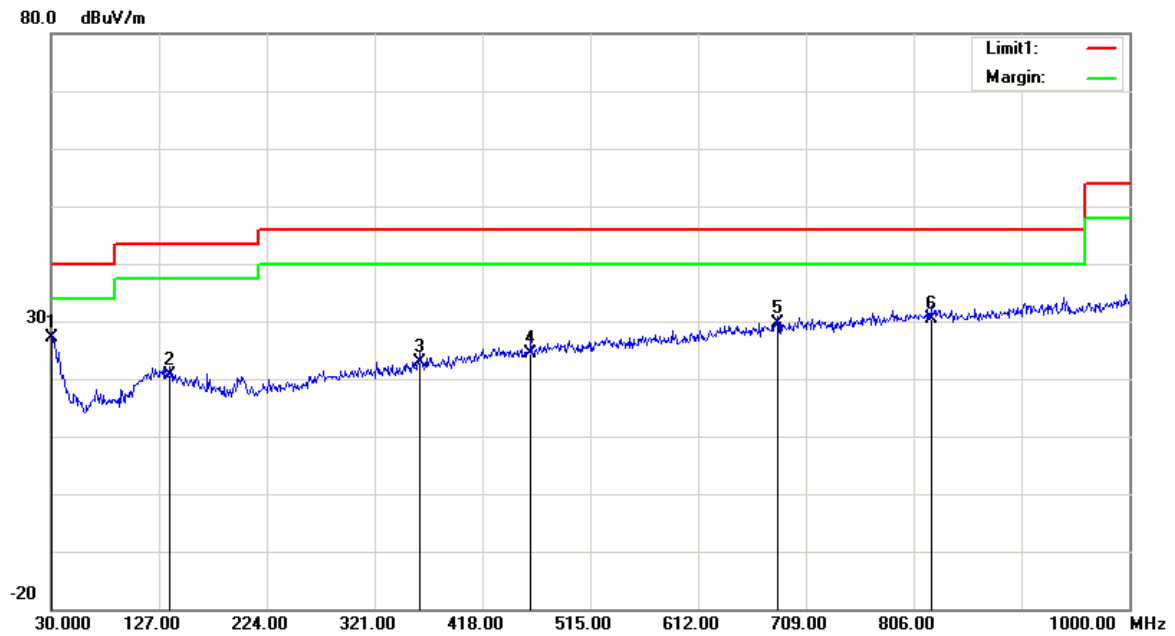**Vertical:**




| Frequency (MHz) | Receiver Reading (dBuV) | Detector | Correction Factor (dB/m) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|-------------------------|----------|--------------------------|---------------------|----------------|-------------|
| 30.9700         | 26.29                   | QP       | 0.81                     | 27.10               | 40.00          | 12.90       |
| 136.7000        | 25.99                   | QP       | -5.39                    | 20.60               | 43.50          | 22.90       |
| 361.7400        | 25.62                   | QP       | -2.82                    | 22.80               | 46.00          | 23.20       |
| 461.6500        | 25.30                   | QP       | -0.80                    | 24.50               | 46.00          | 21.50       |
| 683.7800        | 26.89                   | QP       | 2.71                     | 29.60               | 46.00          | 16.40       |
| 821.5200        | 25.32                   | QP       | 5.18                     | 30.50               | 46.00          | 15.50       |

**2) 1GHz-25GHz:**




| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2408 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2408.00                  | 52.14             | PK       | H              | 28.12            | 1.80                  | 0.00                      | 82.06                              | 113.98            | 31.92          |
| 2408.00                  | 26.42             | AV       | H              | 28.12            | 1.80                  | 0.00                      | 56.34                              | 93.98             | 37.64          |
| 2408.00                  | 54.26             | PK       | V              | 28.12            | 1.80                  | 0.00                      | 84.18                              | 113.98            | 29.80          |
| 2408.00                  | 28.52             | AV       | V              | 28.12            | 1.80                  | 0.00                      | 58.44                              | 93.98             | 35.54          |
| 2400.00                  | 27.85             | PK       | V              | 28.10            | 1.80                  | 0.00                      | 57.75                              | 74.00             | 16.25          |
| 2400.00                  | 15.81             | AV       | V              | 28.10            | 1.80                  | 0.00                      | 45.71                              | 54.00             | 8.29           |
| 4816.00                  | 53.74             | PK       | V              | 32.93            | 3.18                  | 37.20                     | 52.65                              | 74.00             | 21.35          |
| 4816.00                  | 33.72             | AV       | V              | 32.93            | 3.18                  | 37.20                     | 32.63                              | 54.00             | 21.37          |
| 7224.00                  | 54.15             | PK       | V              | 35.78            | 4.79                  | 37.25                     | 57.47                              | 74.00             | 16.53          |
| 7224.00                  | 34.57             | AV       | V              | 35.78            | 4.79                  | 37.25                     | 37.89                              | 54.00             | 16.11          |
| Middle Channel: 2440 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2440.00                  | 53.42             | PK       | H              | 28.18            | 1.82                  | 0.00                      | 83.42                              | 113.98            | 30.56          |
| 2440.00                  | 27.42             | AV       | H              | 28.18            | 1.82                  | 0.00                      | 57.42                              | 93.98             | 36.56          |
| 2440.00                  | 54.75             | PK       | V              | 28.18            | 1.82                  | 0.00                      | 84.75                              | 113.98            | 29.23          |
| 2440.00                  | 28.64             | AV       | V              | 28.18            | 1.82                  | 0.00                      | 58.64                              | 93.98             | 35.34          |
| 4880.00                  | 55.33             | PK       | V              | 33.06            | 3.27                  | 37.21                     | 54.45                              | 74.00             | 19.55          |
| 4880.00                  | 35.45             | AV       | V              | 33.06            | 3.27                  | 37.21                     | 34.57                              | 54.00             | 19.43          |
| 7320.00                  | 53.74             | PK       | V              | 36.03            | 4.62                  | 37.37                     | 57.02                              | 74.00             | 16.98          |
| 7320.00                  | 33.45             | AV       | V              | 36.03            | 4.62                  | 37.37                     | 36.73                              | 54.00             | 17.27          |
| High Channel: 2472 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2472.00                  | 53.73             | PK       | H              | 28.24            | 1.84                  | 0.00                      | 83.81                              | 113.98            | 30.17          |
| 2472.00                  | 27.45             | AV       | H              | 28.24            | 1.84                  | 0.00                      | 57.53                              | 93.98             | 36.45          |
| 2472.00                  | 55.61             | PK       | V              | 28.24            | 1.84                  | 0.00                      | 85.69                              | 113.98            | 28.29          |
| 2472.00                  | 29.43             | AV       | V              | 28.24            | 1.84                  | 0.00                      | 59.51                              | 93.98             | 34.47          |
| 2483.50                  | 24.27             | PK       | V              | 28.27            | 1.84                  | 0.00                      | 54.38                              | 74.00             | 19.62          |
| 2483.50                  | 15.96             | AV       | V              | 28.27            | 1.84                  | 0.00                      | 46.07                              | 54.00             | 7.93           |
| 4944.00                  | 52.72             | PK       | V              | 33.19            | 3.25                  | 37.24                     | 51.92                              | 74.00             | 22.08          |
| 4944.00                  | 32.44             | AV       | V              | 33.19            | 3.25                  | 37.24                     | 31.64                              | 54.00             | 22.36          |
| 7416.00                  | 51.37             | PK       | V              | 36.28            | 4.46                  | 37.49                     | 54.62                              | 74.00             | 19.38          |
| 7416.00                  | 31.67             | AV       | V              | 36.28            | 4.46                  | 37.49                     | 34.92                              | 54.00             | 19.08          |

# Test plots at Low Channel Horizontal

Fundamental  
Test with Band  
Rejection Filter

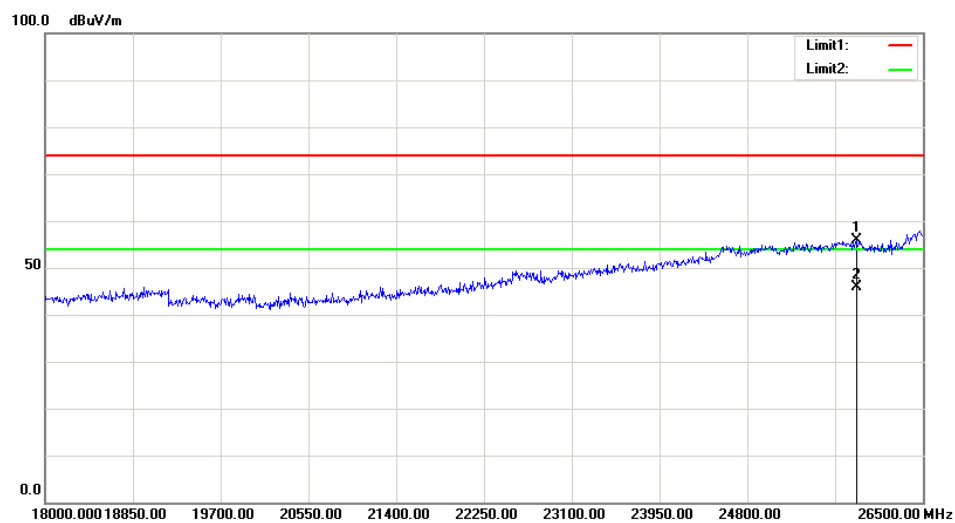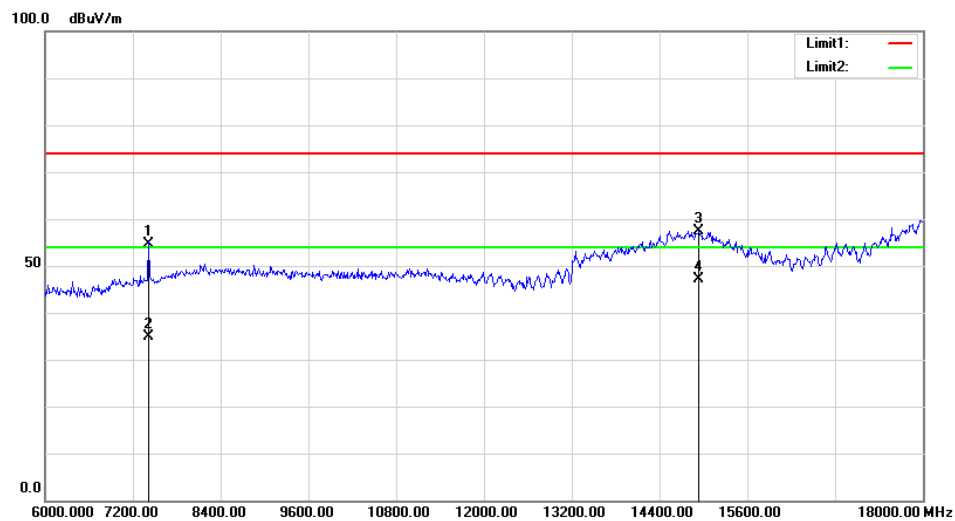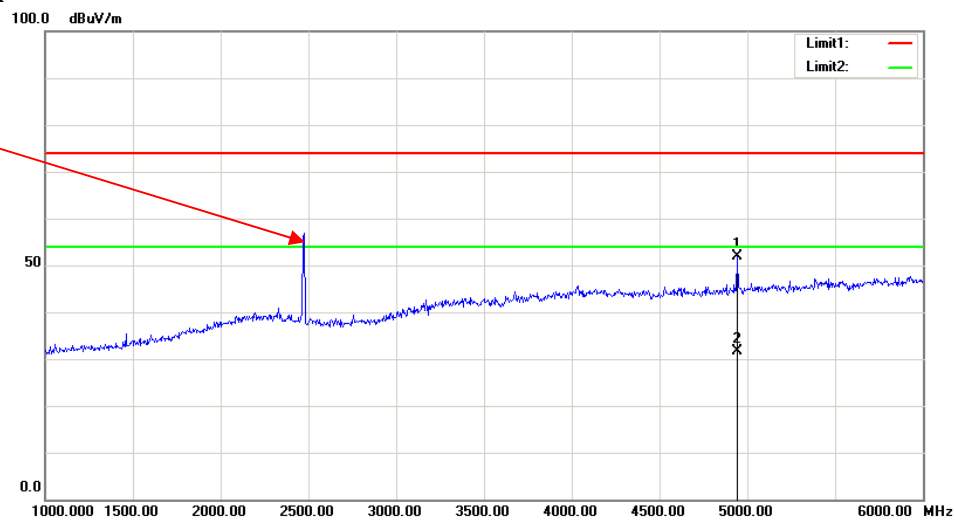

# Vertical

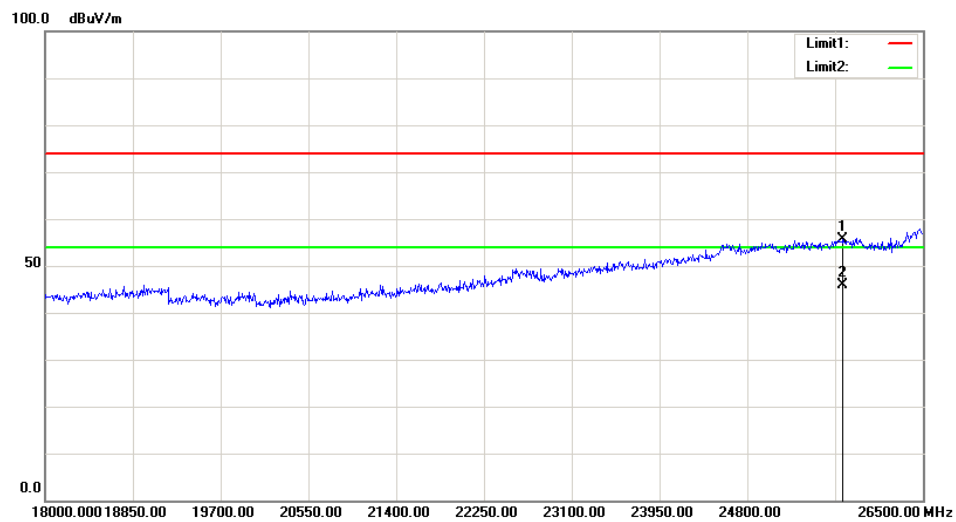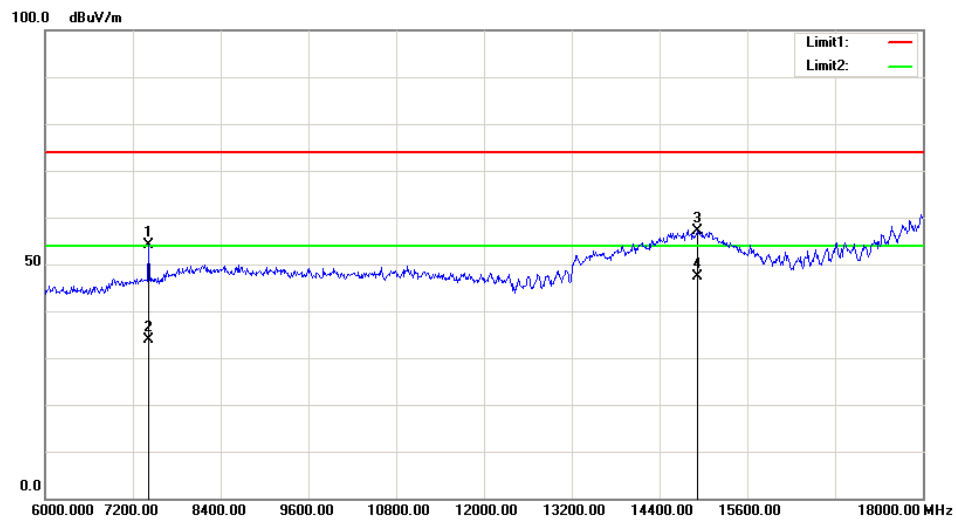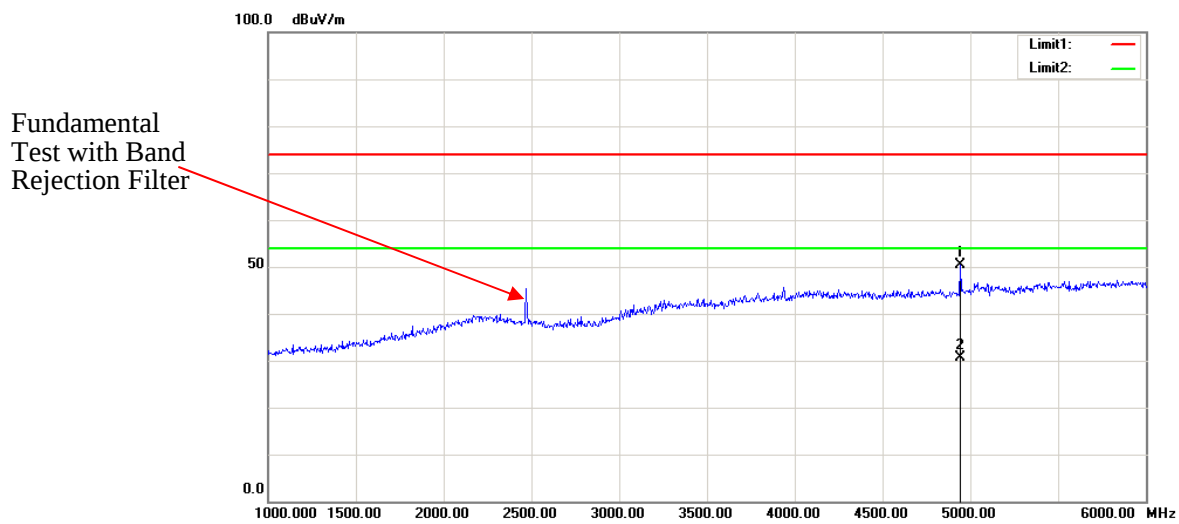

**FCC §15.215(c) – 20 dB BANDWIDTH TESTING****Applicable Standard**

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2018-01-04       | 2019-01-04           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25.6 °C   |
| Relative Humidity: | 50 %      |
| ATM Pressure:      | 100.8 kPa |

*The testing was performed by Andy Huang on 2018-04-20.*


**Test Result:** Compliant.

Please refer to following tables and plots

Test Mode: Transmitting


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low     | 2408            | 1.163                 |
| Middle  | 2440            | 1.096                 |
| High    | 2472            | 1.106                 |

## Low Channel

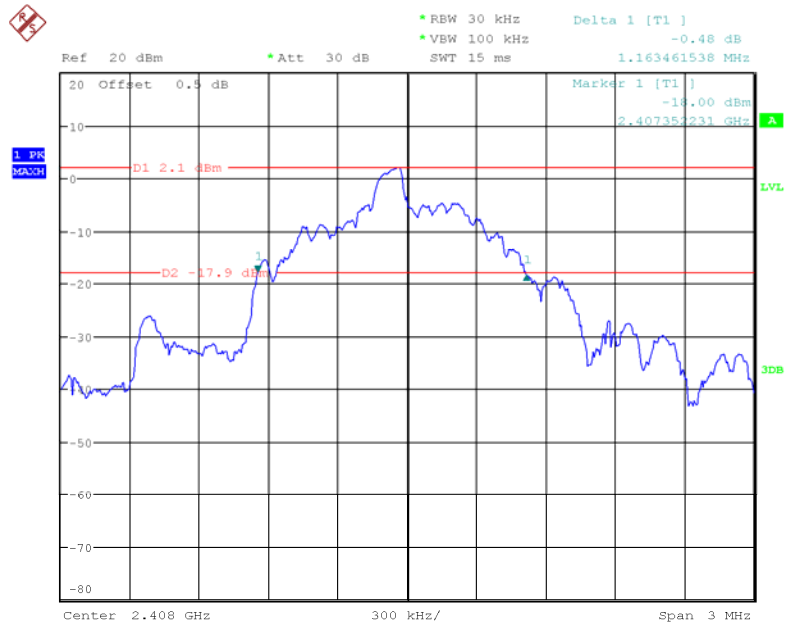


Date: 20.APR.2018 21:55:26

### Middle Channel

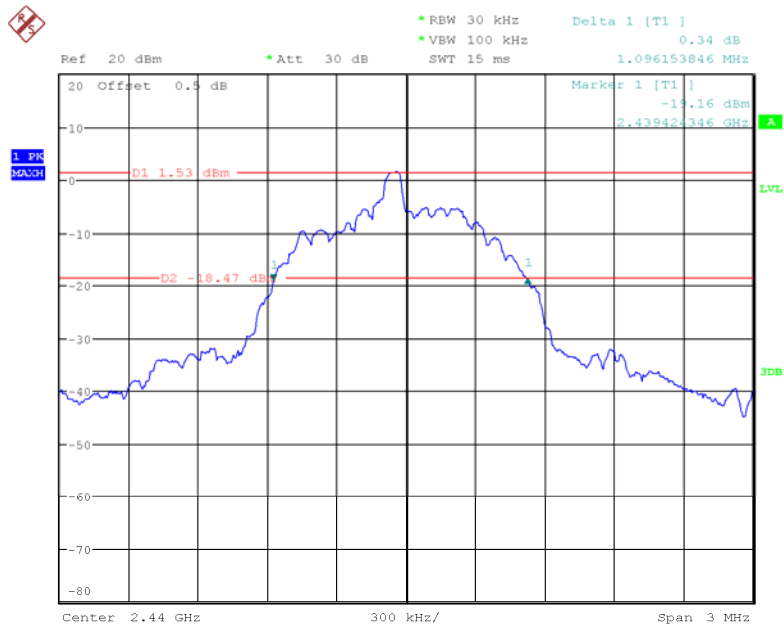

Date: 20.APR.2018 22:00:20

### High Channel

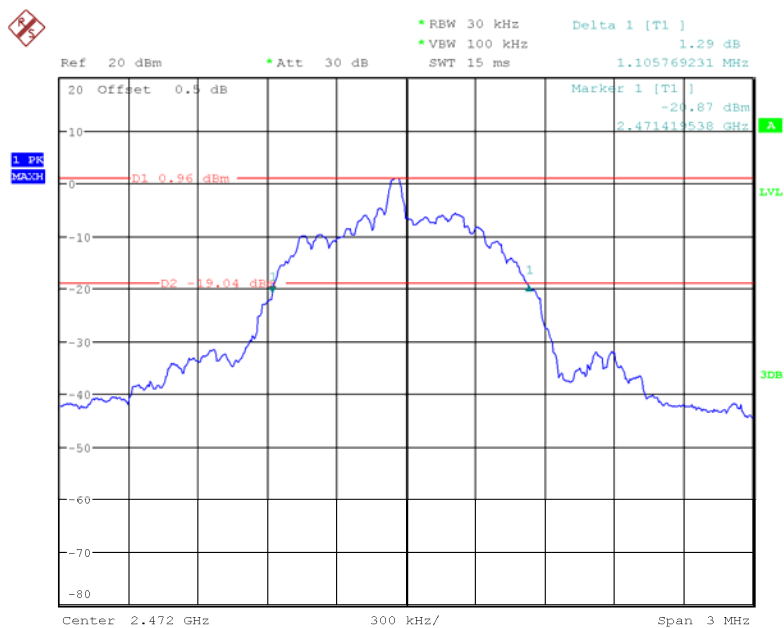

Date: 20.APR.2018 22:07:03

\*\*\*\*\* END OF REPORT \*\*\*\*\*