

# RF TEST REPORT



Report No.: 16070174-FCC-R2

Supersede Report No.: N/A

Applicant	SWAGTEK	
Product Name	4.5 inch Smart Phone	
Model No.	X4.5 LITE	
Serial No.	SPARK , UM450	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	Feb 25 to March 27 , 2016	
Issue Date	April 08, 2016	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
Winnie Zhang Test Engineer	David Huang Checked By	
<p>This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070174-FCC-R2
Page	3 of 59

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION .....	11
6.3 20DB BANDWIDTH.....	15
6.4 PEAK OUTPUT POWER.....	19
6.5 NUMBER OF HOPPING CHANNEL.....	23
6.6 TIME OF OCCUPANCY (DWELL TIME) .....	25
6.7 BAND EDGE.....	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.9 RADIATED SPURIOUS EMISSIONS .....	43
ANNEX A. TEST INSTRUMENT.....	48
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	49
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	58
ANNEX E. DECLARATION OF SIMILARITY .....	59

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070174-FCC-R2	NONE	Original	March 28, 2016
16070174-FCC-R2	V1	Change product name	April 08, 2016

## 2. Customer information

Applicant Name	SWAGTEK
Applicant Add	10205 NW19th Street, STE101, Miami, Florida, 33172, United States
Manufacturer	SWAGTEK
Manufacturer Add	10205 NW19th Street, STE101, Miami, Florida, 33172, United States

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

#### 4. Equipment under Test (EUT) Information

Description of EUT: 4.5 inch Smart Phone

Main Model: X4.5 LITE

Serial Model: SPARK , UM450

Date EUT received: Feb 24 , 2016

Test Date(s): Feb 25 to March 27 , 2016

Equipment Category : DSS

GSM850: -1.5 dBi

PCS1900: 1.2dBi

UMTS-FDD Band V:-1.2dBi

UMTS-FDD Band IV:1.8 dBi

Antenna Gain: UMTS-FDD Band II: 1.9dBi

Bluetooth/BLE: 2.1dBi

WIFI:2.5dBi

GPS:1.5dBi

GSM / GPRS: GMSK

UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Type of Modulation: Bluetooth: GFSK, π /4DQPSK, 8DPSK

BLE: GFSK

GPS:BPSK

Test Report	16070174-FCC-R2
Page	7 of 59

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz  
 PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz  
 UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz  
 UMTS-FDD Band IV TX: 1712.4 ~ 1752.6 MHz;  
 RX : 2112.4 ~ 2152.6 MHz

RF Operating Frequency (ies): UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;  
 RX: 1932.4 ~ 1987.6 MHz  
 WIFI: 802.11b/g/n(20M): 2412-2462 MHz  
 WIFI: 802.11n(40M): 2422-2452 MHz  
 Bluetooth& BLE: 2402-2480 MHz  
 GPS RX: 1575.42 MHz

Max. Output Power: 2.550dBm

GSM 850: 124CH  
 PCS1900: 299CH  
 UMTS-FDD Band V : 102CH  
 UMTS-FDD Band IV: 202CH  
 UMTS-FDD Band II : 277CH  
 WIFI : 802.11b/g/n(20M): 11CH  
 WIFI : 802.11n(40M): 7CH  
 Bluetooth: 79CH  
 BLE: 40CH  
 GPS: 1CH

Port: Power Port, Earphone Port, USB Port

Adapter:  
 Model: N/A  
 Input: AC 100-240V; 50/60Hz; 0.2A

Input Power: Output: DC 5.0V, 700mA

Battery:  
 Model: N/A  
 Capacity: 1700mAh  
 Related Voltage: 3.7V

Trade Name : LOGIC , ISWAG , UNONU

GPRS Multi-slot class 8/10/12

Test Report	16070174-FCC-R2
Page	8 of 59

---

FCC ID: O55-45012

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is 2.1dBi for Bluetooth/BLE, the gain is 2.5dBi for WIFI, the gain is 1.5dBi for GPS.

A permanently attached PIFA antenna for GSM/PCS and UMTS, the gain is -1.5dBi for GSM850, 1.2dBi for PCS1900,-1.2dBi for UMTS-FDD Band V, 1.9dBi for UMTS-FDD Band II.


**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	March 07, 2016
Tested By :	Winnie Zhang

### Requirement(s):

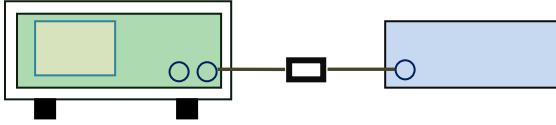Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) <math>\geq</math> 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>		

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

### Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.649	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.679	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.650	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.001	0.859	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.861	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.861	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.858	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.859	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.860	Pass
	Adjacency Channel	2479			

## Test Plots

### Channel Separation measurement result

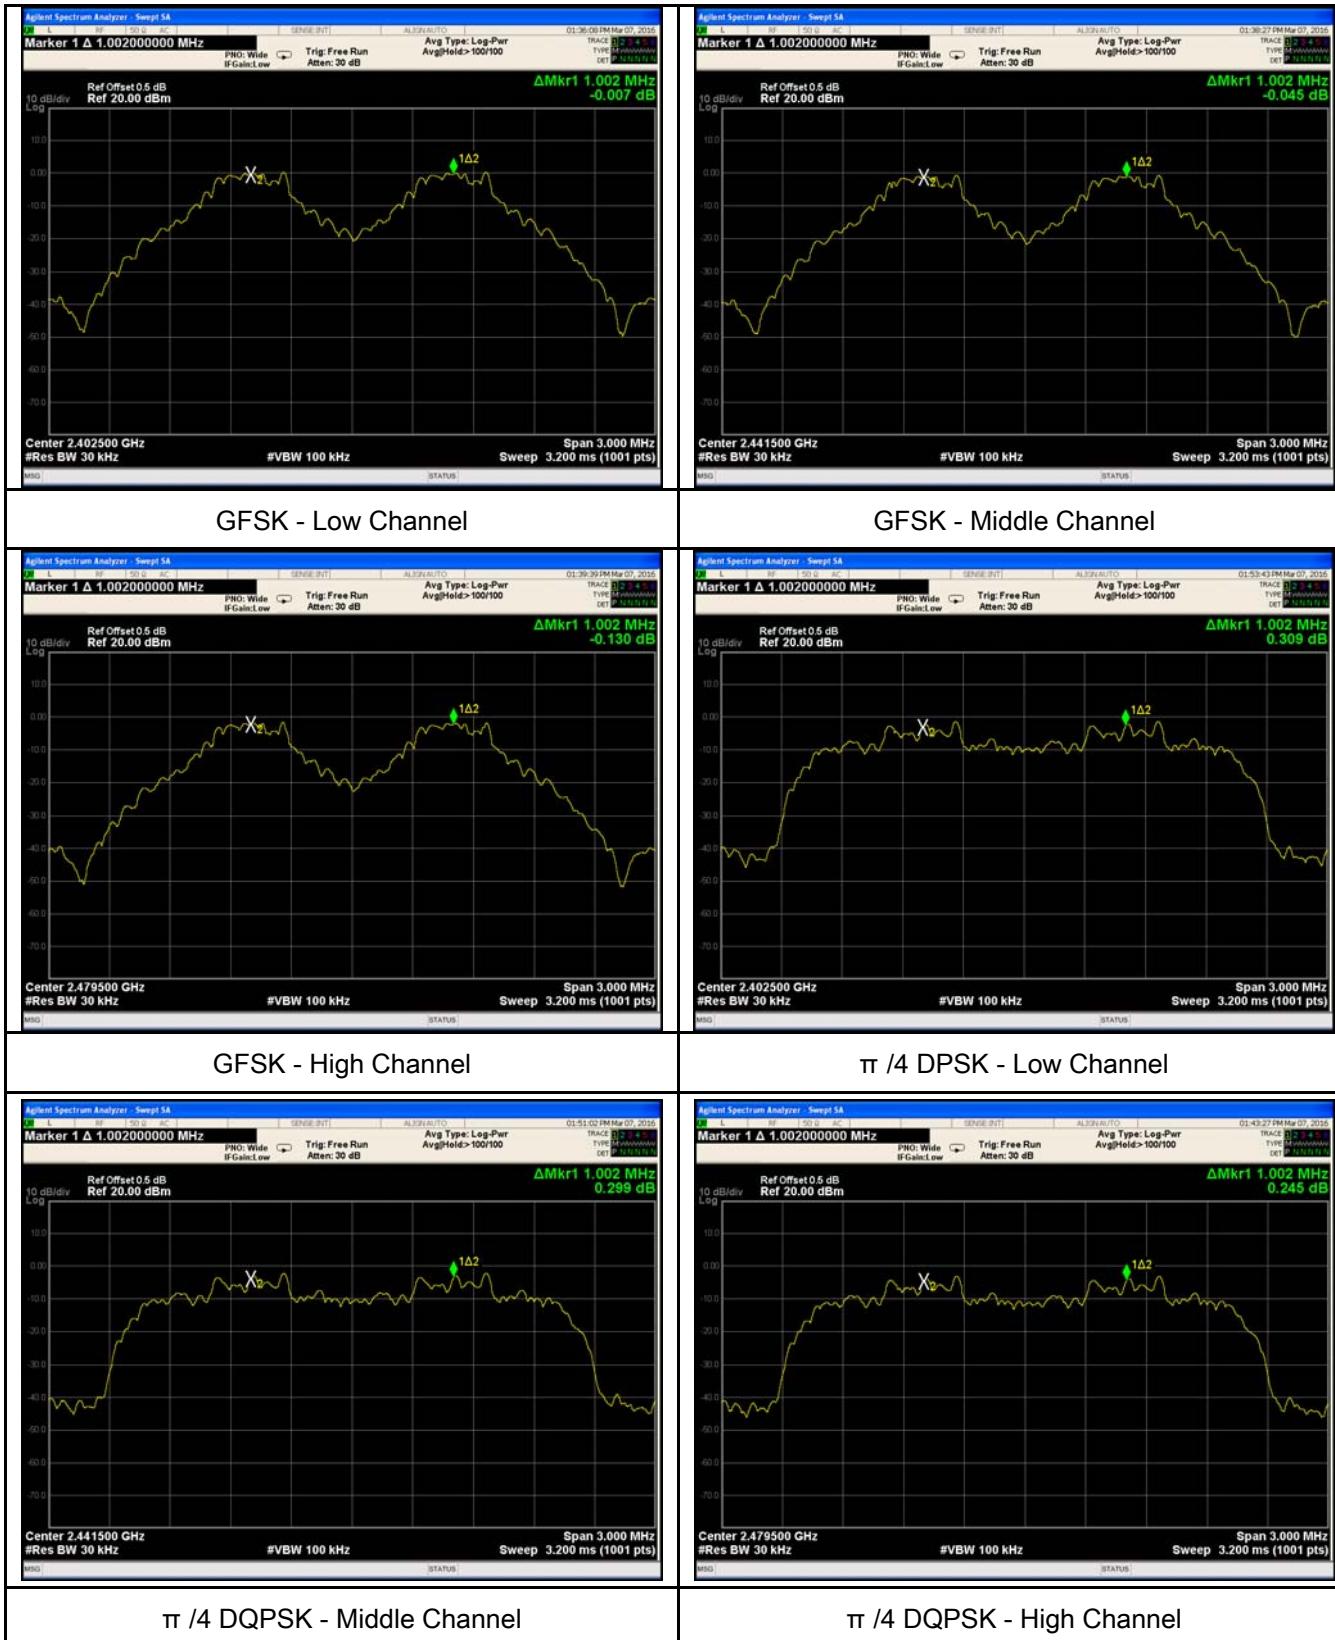




### 6.3 20dB Bandwidth

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	March 14, 2016
Tested By :	Winnie Zhang

#### Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


#### Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.973	0.8879
	Mid	2441	1.019	0.8876
	High	2480	0.975	0.8876
$\pi/4$ DQPSK	Low	2402	1.288	1.1661
	Mid	2441	1.291	1.1681
	High	2480	1.292	1.1698
8-DPSK	Low	2402	1.287	1.1684
	Mid	2441	1.288	1.1707
	High	2480	1.290	1.1733

## Test Plots



### 20dB Bandwidth measurement result

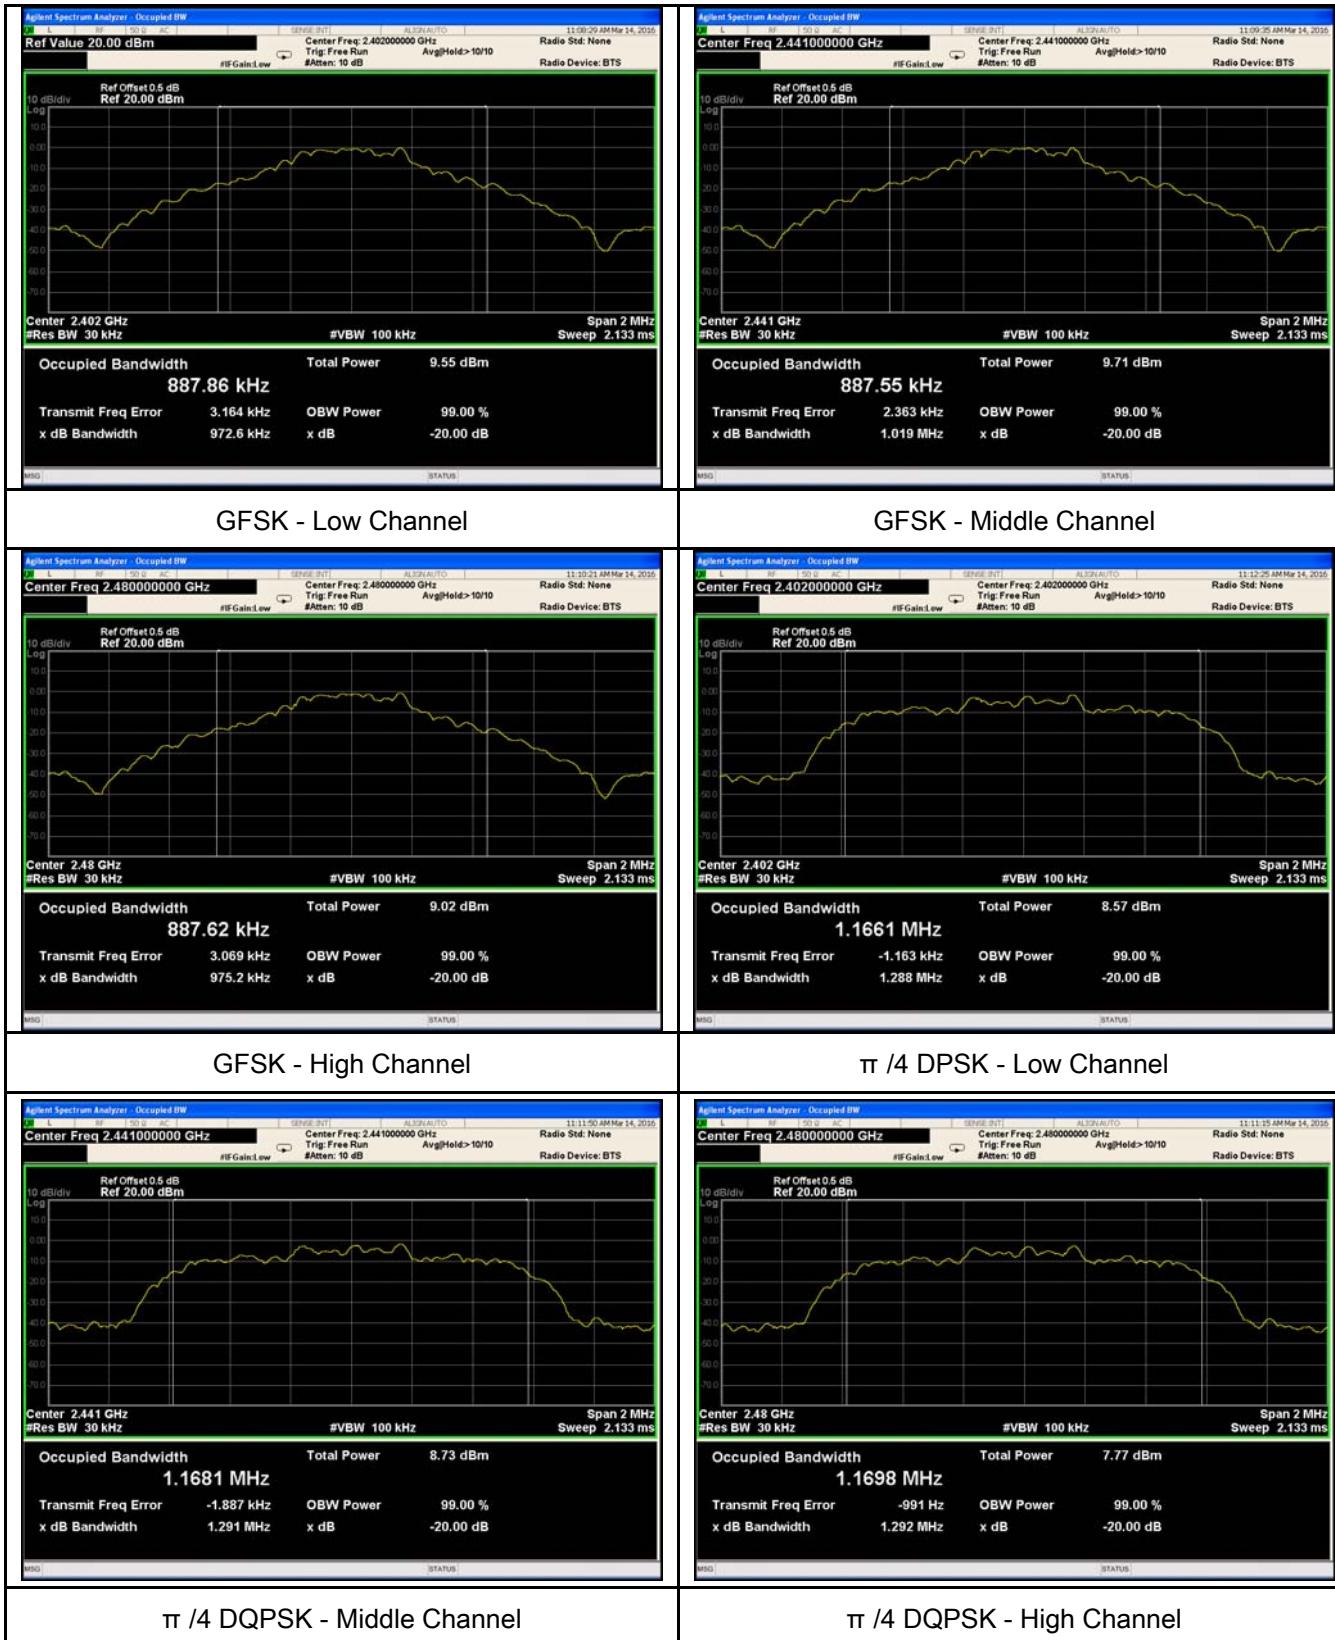

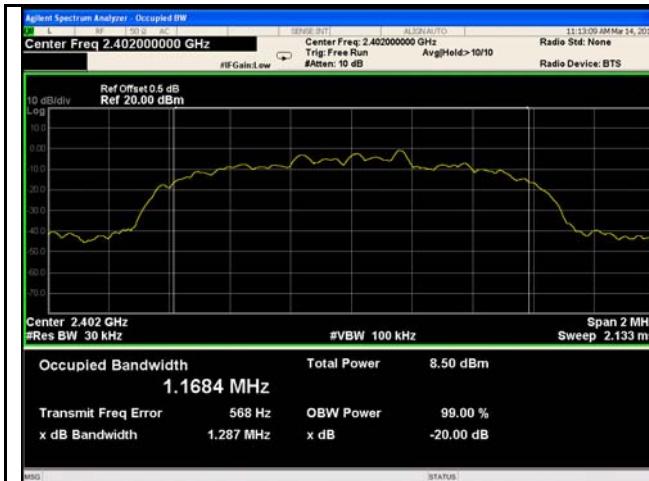

8DPSK - Low Channel


8DPSK - Middle Channel

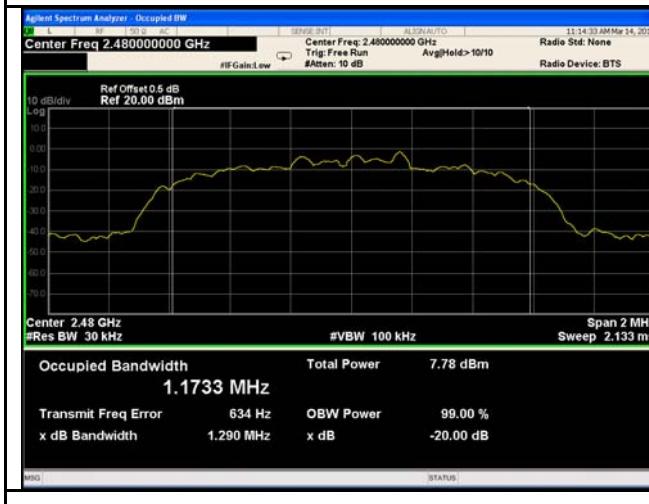

## 6.4 Peak Output Power

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	March 14, 2016
Tested By :	Winnie Zhang

### Requirement(s):

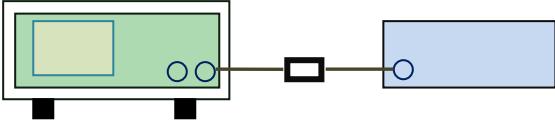Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq$ 75 channels: $\leq$ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq$ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq$ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq$ 50 channels: $\leq$ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq$ 25 & $<$ 50 channels: $\leq$ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq$ 1 Watt	<input type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>	

	<p>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A


#### Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	2.267	1000	Pass
		Mid	2441	2.550	125	Pass
		High	2480	1.455	1000	Pass
	$\pi/4$ DQPSK	Low	2402	2.230	125	Pass
		Mid	2441	2.429	125	Pass
		High	2480	1.423	125	Pass
	8-DPSK	Low	2402	2.356	125	Pass
		Mid	2441	2.547	125	Pass
		High	2480	1.525	125	Pass

## Test Plots


### Output Power measurement result

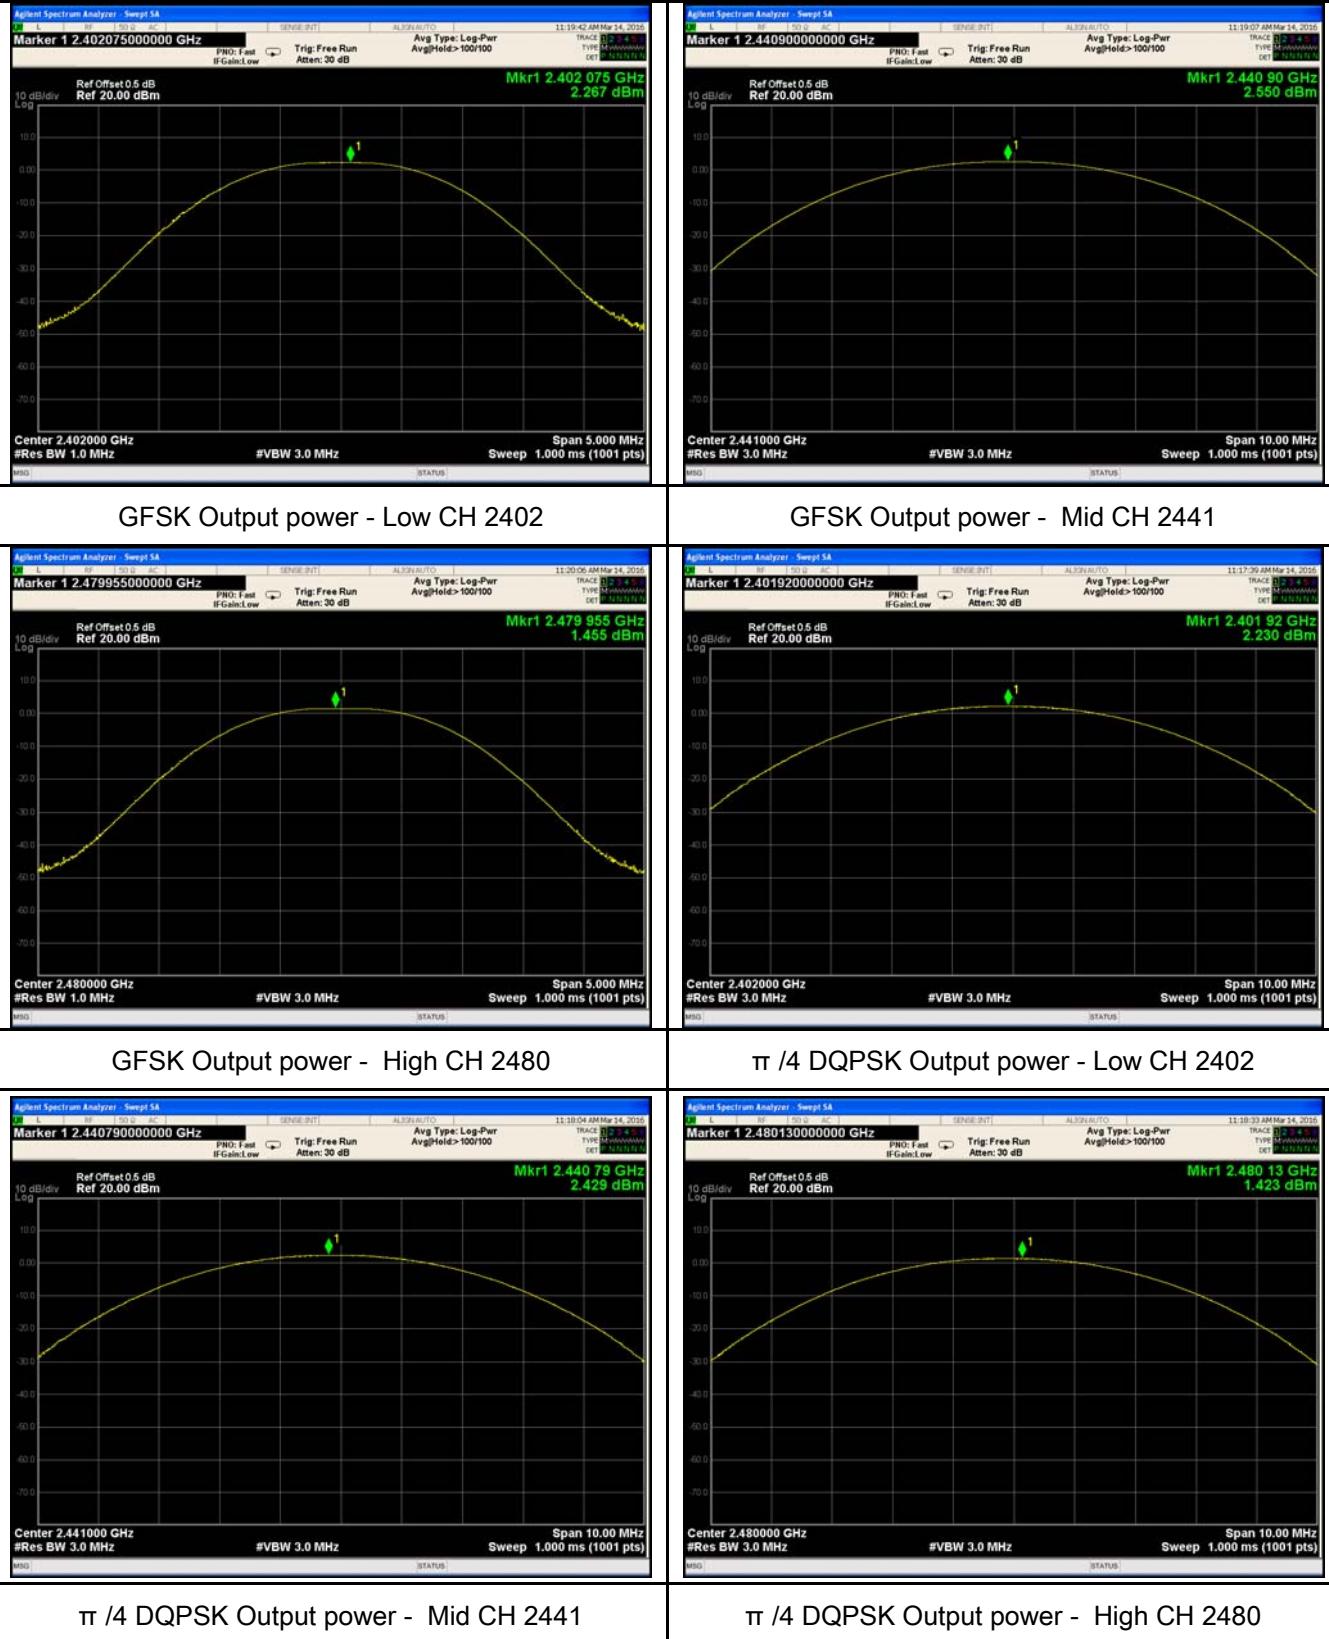

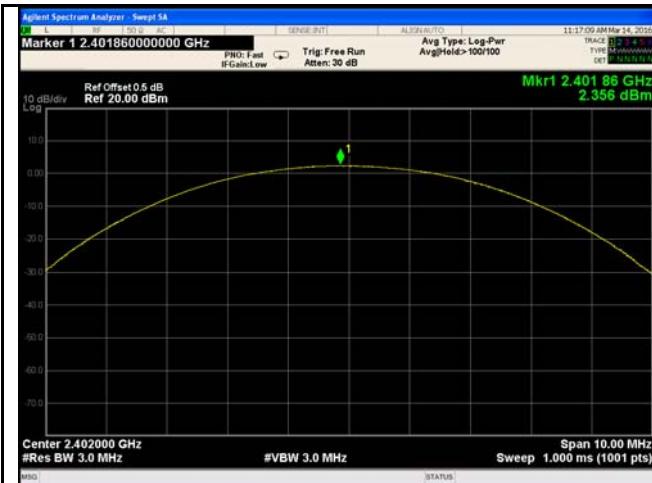

8DPSK Output power - Low CH 2402

8DPSK Output power - Mid CH 2441

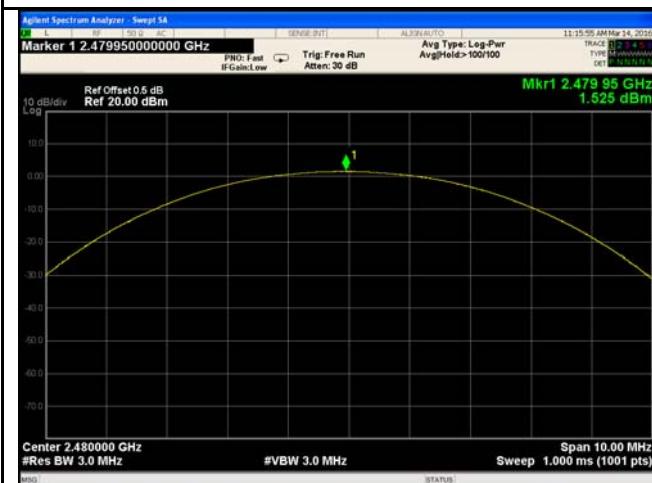


8DPSK Output power - High CH 2480

## 6.5 Number of Hopping Channel

Temperature	23°C
Relative Humidity	56%
Atmospheric Pressure	1014mbar
Test date :	March 14, 2016
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW <math>\geq</math> 1% of the span</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail
Test Data	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	N/A
Test Plot	<input checked="" type="checkbox"/>	Yes (See below)	<input type="checkbox"/>	N/A

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result



## 6.6 Time of Occupancy (Dwell Time)

Temperature	24°C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	March 07, 2016
Tested By :	Winnie Zhang

### Requirement(s):

Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


**Dwell Time measurement result**


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.876	306.773	400	Pass
		Mid	2.876	306.773	400	Pass
		High	2.867	305.813	400	Pass
	$\pi/4$ DQPSK	Low	2.876	306.773	400	Pass
		Mid	2.876	306.773	400	Pass
		High	2.876	306.773	400	Pass
	8-DPSK	Low	2.876	306.773	400	Pass
		Mid	2.876	306.773	400	Pass
		High	2.876	306.773	400	Pass

Note: Dwell time=Pulse Time (ms)  $\times (1600 \div 6 \div 79) \times 31.6$

## Test Plots


### Dwell Time measurement result

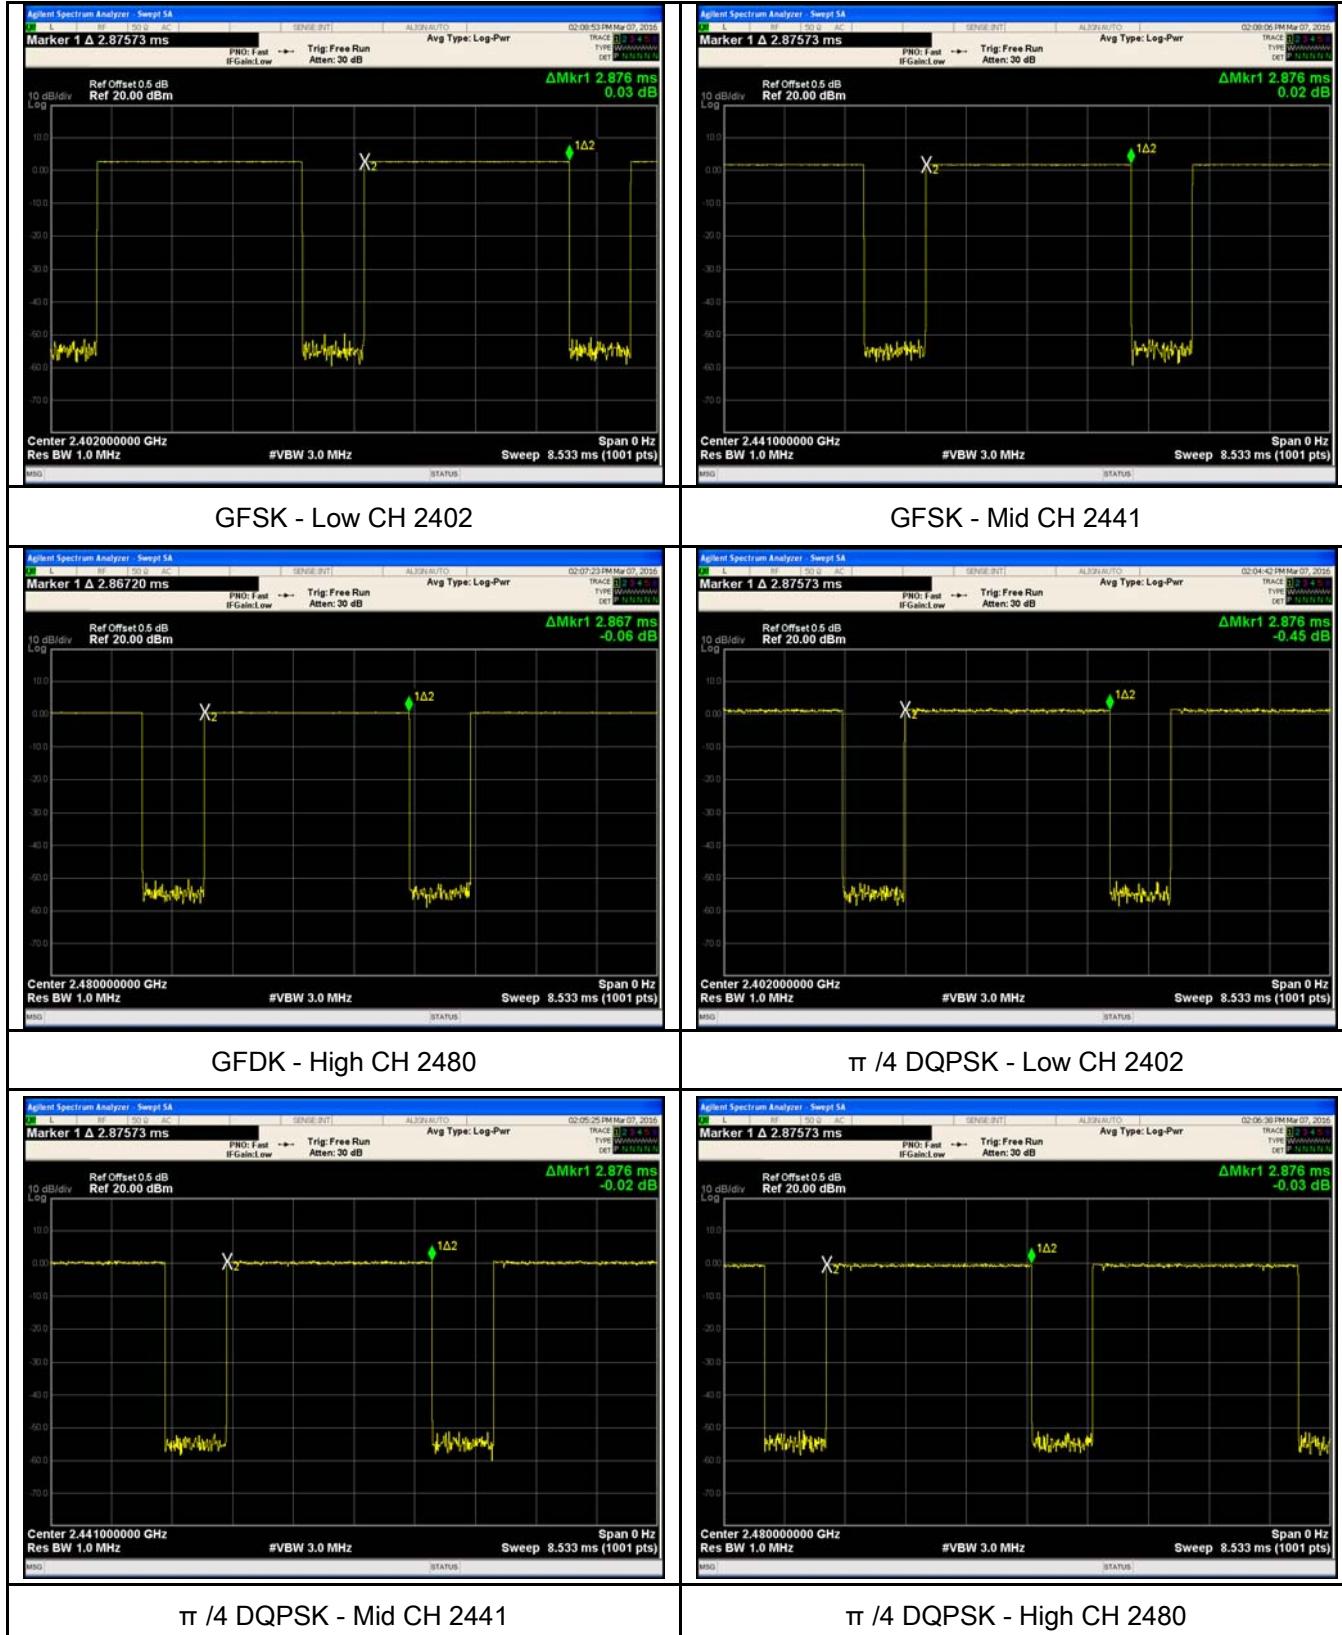

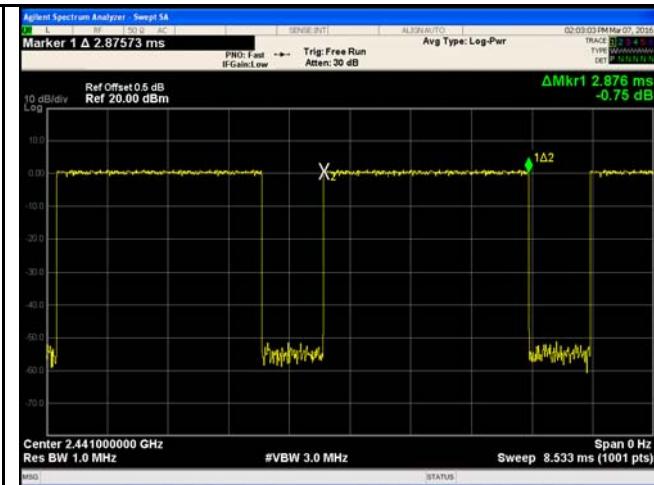

8DPSK - Low CH 2402

8DPSK - Mid CH 2441

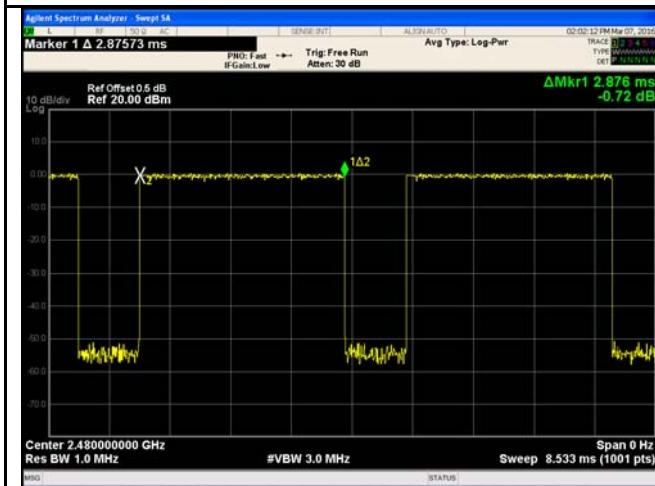


8DPSK - High CH 2480

## 6.7 Band Edge

Temperature	23°C
Relative Humidity	51%
Atmospheric Pressure	1018mbar
Test date :	March 18, 2016
Tested By :	Winnie Zhang

### Requirement(s):

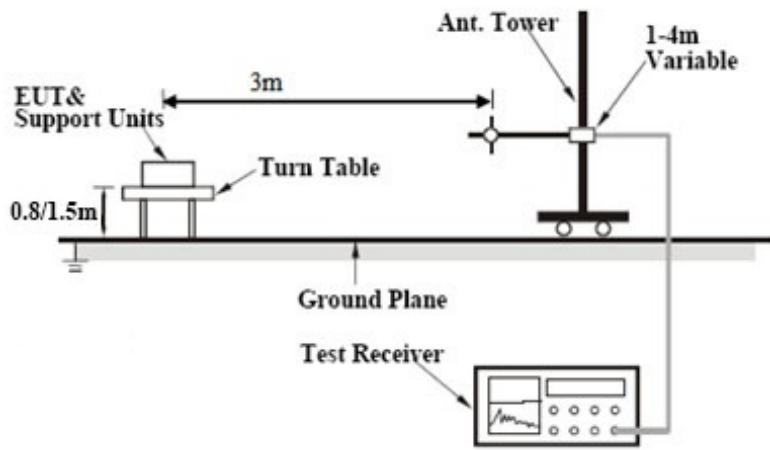Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An EUT &amp; Support Units is positioned on a Turn Table, which is placed on a Ground Plane. The distance between the EUT and the turn table is 0.8/1.5m. The turn table is connected to an Ant. Tower. The Ant. Tower is a vertical mast with a height of 1-4m, mounted on a base. A Test Receiver is connected to the base of the Ant. Tower. The distance between the EUT and the Ant. Tower is 3m.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>		





	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data     Yes       N/A



Test Plot     Yes (See below)       N/A


## Test Plots

### GFSK Mode:

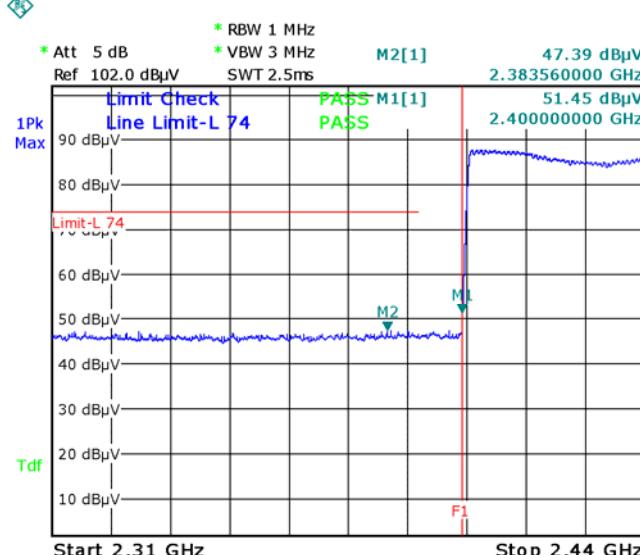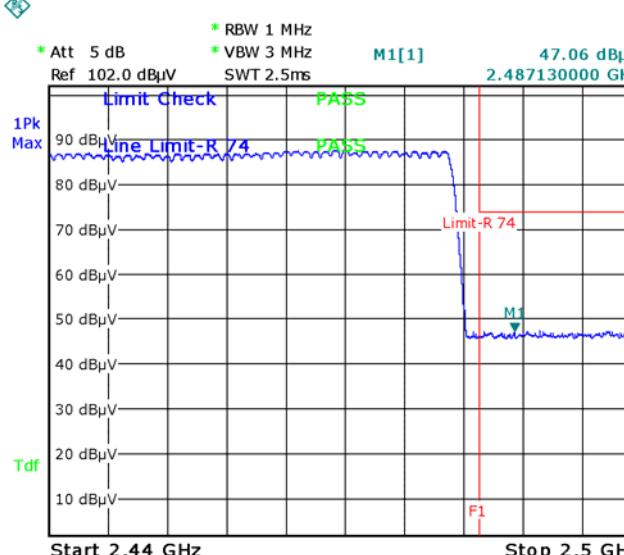
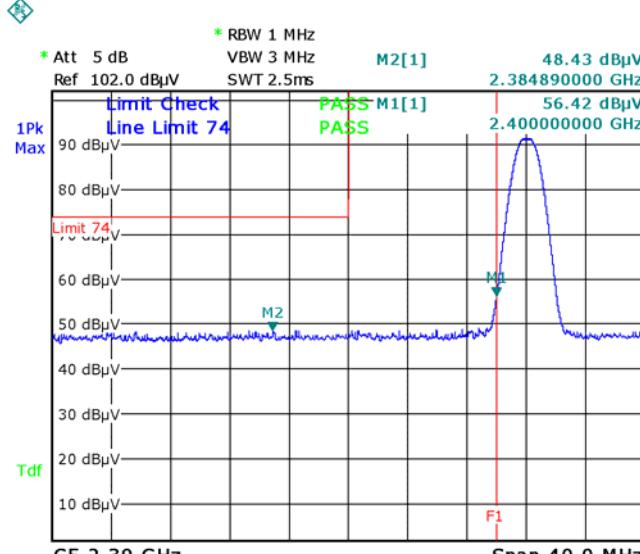
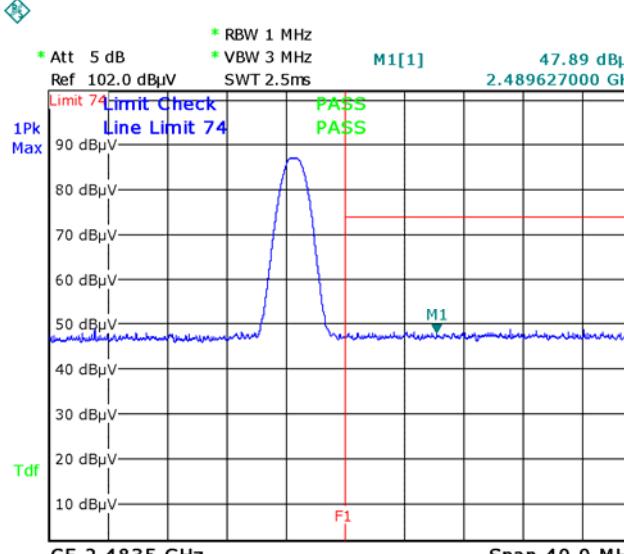
 <p>Plot 1: GFSK Mode Left Side-PK. The plot shows a signal spectrum with a central frequency of 2.31 GHz and a stop frequency of 2.44 GHz. The plot includes a red vertical line for the limit and a blue line for the signal. The plot is labeled "PASS" for both M1 and M2. The plot is titled "M2[1]" with a power of 47.39 dB<math>\mu</math>V and a frequency of 2.383560000 GHz.</p> <p>Date: 14.MAR.2016 14:38:32</p>	 <p>Plot 2: GFSK Mode Right Side-PK. The plot shows a signal spectrum with a central frequency of 2.44 GHz and a stop frequency of 2.5 GHz. The plot includes a red vertical line for the limit and a blue line for the signal. The plot is labeled "PASS" for both M1 and M2. The plot is titled "M1[1]" with a power of 47.06 dB<math>\mu</math>V and a frequency of 2.487130000 GHz.</p> <p>Date: 14.MAR.2016 14:44:34</p>
<p style="text-align: center;">GFSK-Hopping Left Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2400MHz</p>	<p style="text-align: center;">GFSK-Hopping Right Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p style="text-align: center;">GFSK-Hopping Left Side-AV</p>	<p style="text-align: center;">GFSK-Hopping Right Side-AV</p>
 <p>Plot 3: GFSK Mode Left Side-AV. The plot shows a signal spectrum with a central frequency of 2.39 GHz and a stop frequency of 2.44 GHz. The plot includes a red vertical line for the limit and a blue line for the signal. The plot is labeled "PASS" for both M1 and M2. The plot is titled "M2[1]" with a power of 48.43 dB<math>\mu</math>V and a frequency of 2.384890000 GHz.</p> <p>Date: 17.MAR.2016 09:24:34</p>	 <p>Plot 4: GFSK Mode Right Side-AV. The plot shows a signal spectrum with a central frequency of 2.4835 GHz and a stop frequency of 2.5 GHz. The plot includes a red vertical line for the limit and a blue line for the signal. The plot is labeled "PASS" for both M1 and M2. The plot is titled "M1[1]" with a power of 47.89 dB<math>\mu</math>V and a frequency of 2.489627000 GHz.</p> <p>Date: 17.MAR.2016 09:52:12</p>
<p style="text-align: center;">GFSK-Left Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2400MHz</p>	<p style="text-align: center;">GFSK-Right Side-PK</p> <p style="text-align: center;">Note: F1 is frequency 2483.5MHz</p>

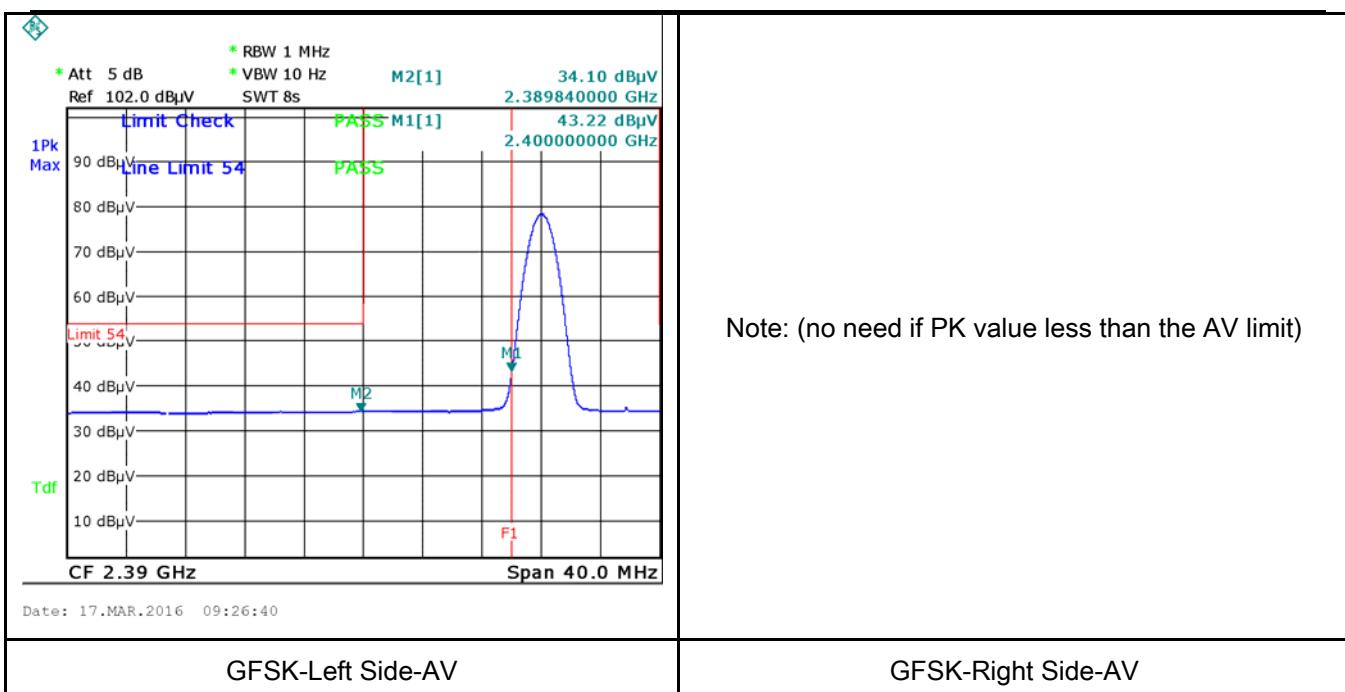


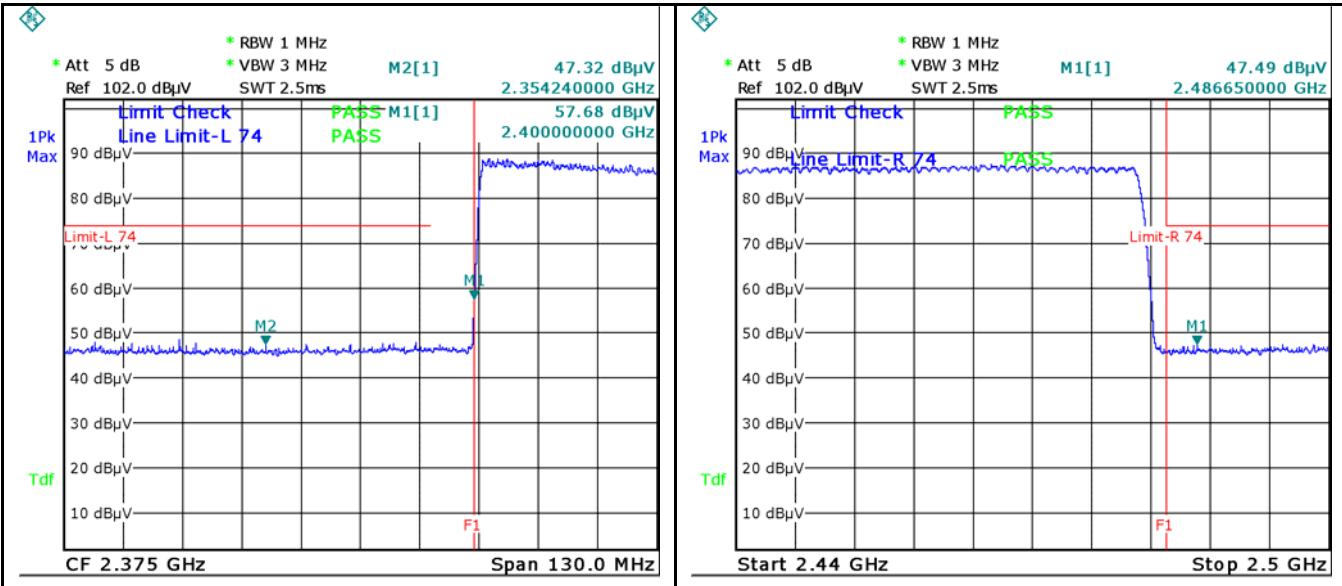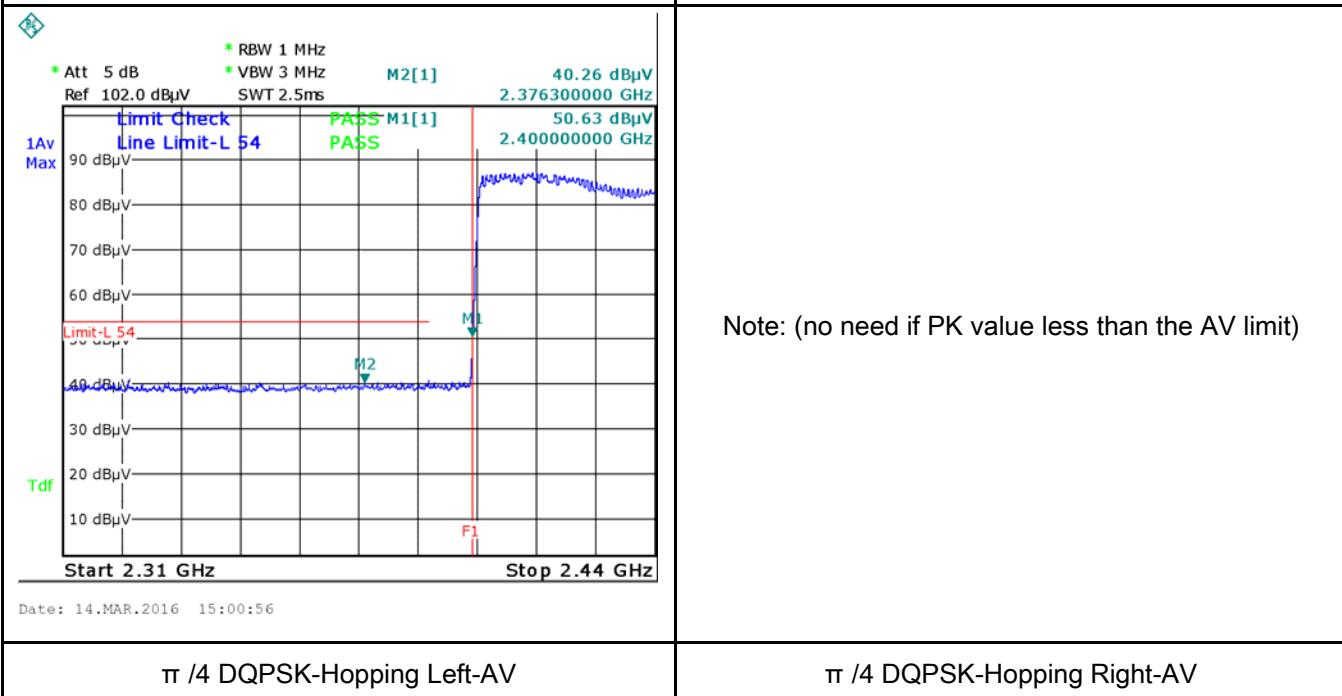**π/4 DQPSK Mode:**

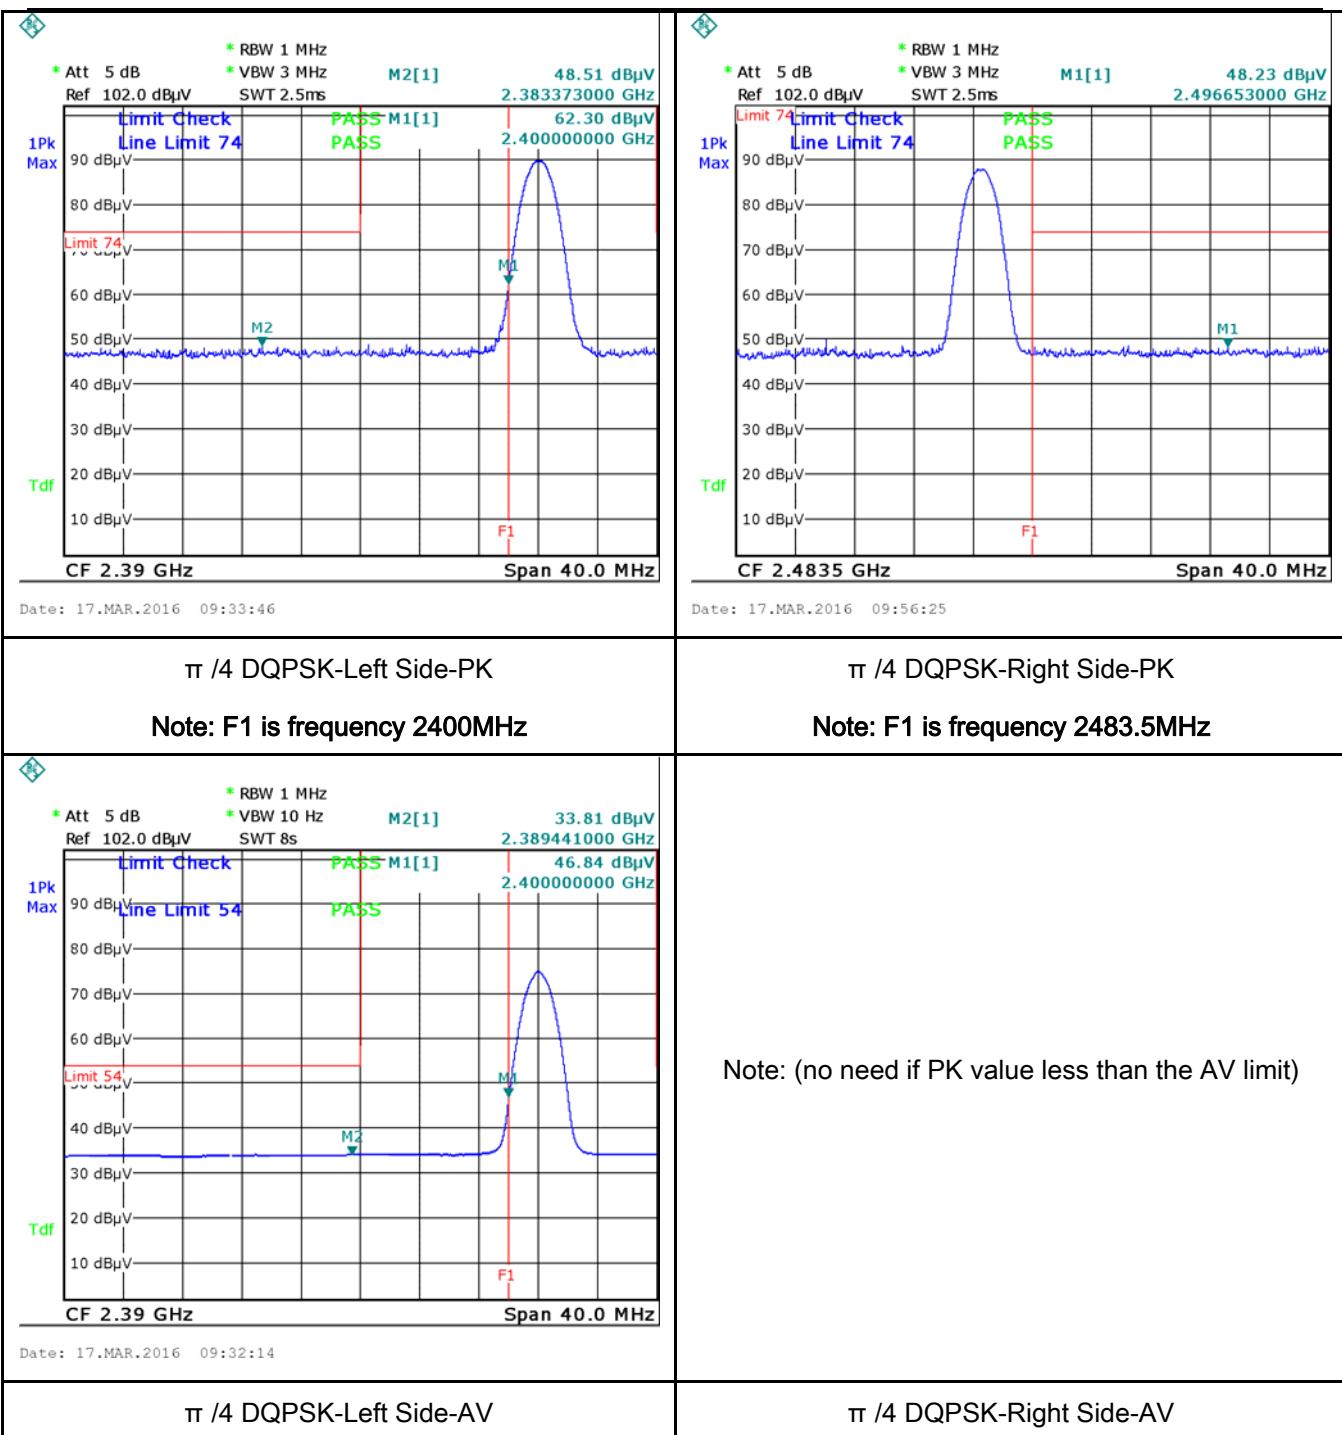**π/4 DQPSK-Hopping Left Side-PK**
**Note: F1 is frequency 2400MHz**
**π/4 DQPSK-Hopping Right Side-PK**
**Note: F1 is frequency 2483.5MHz**

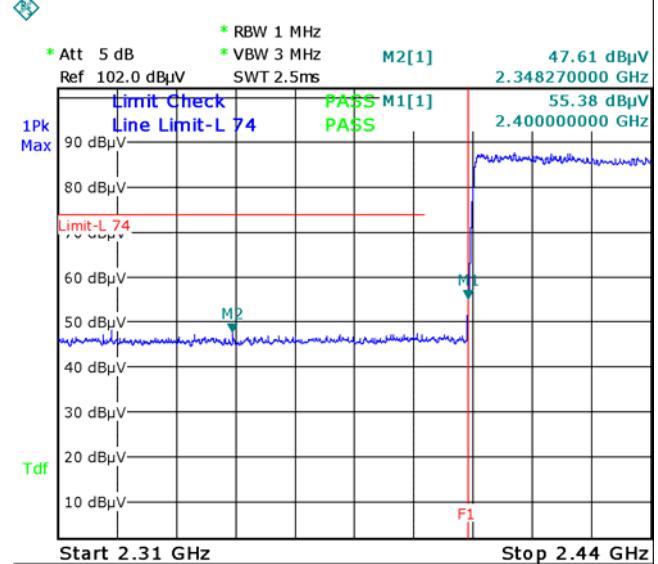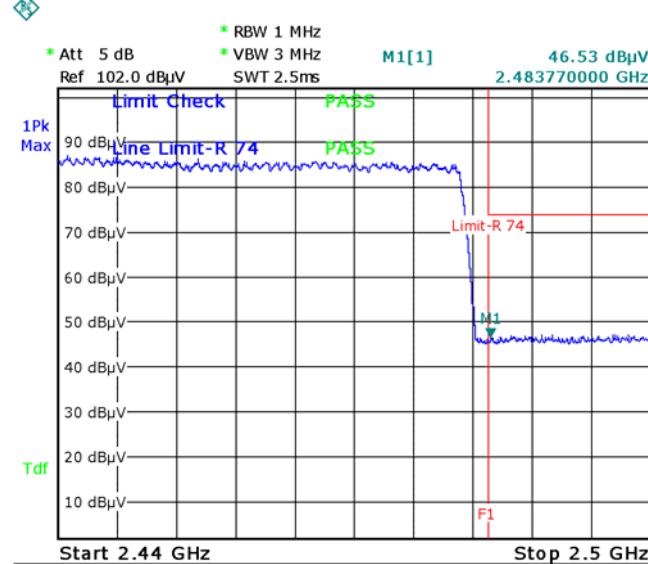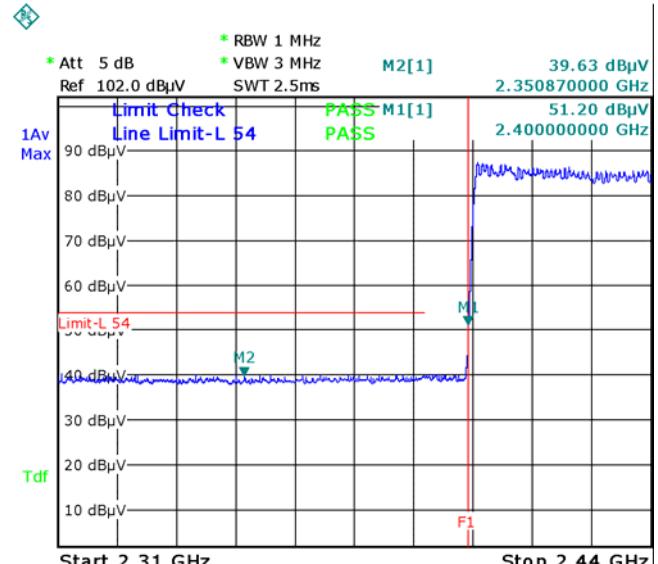


### 8-DPSK Mode:

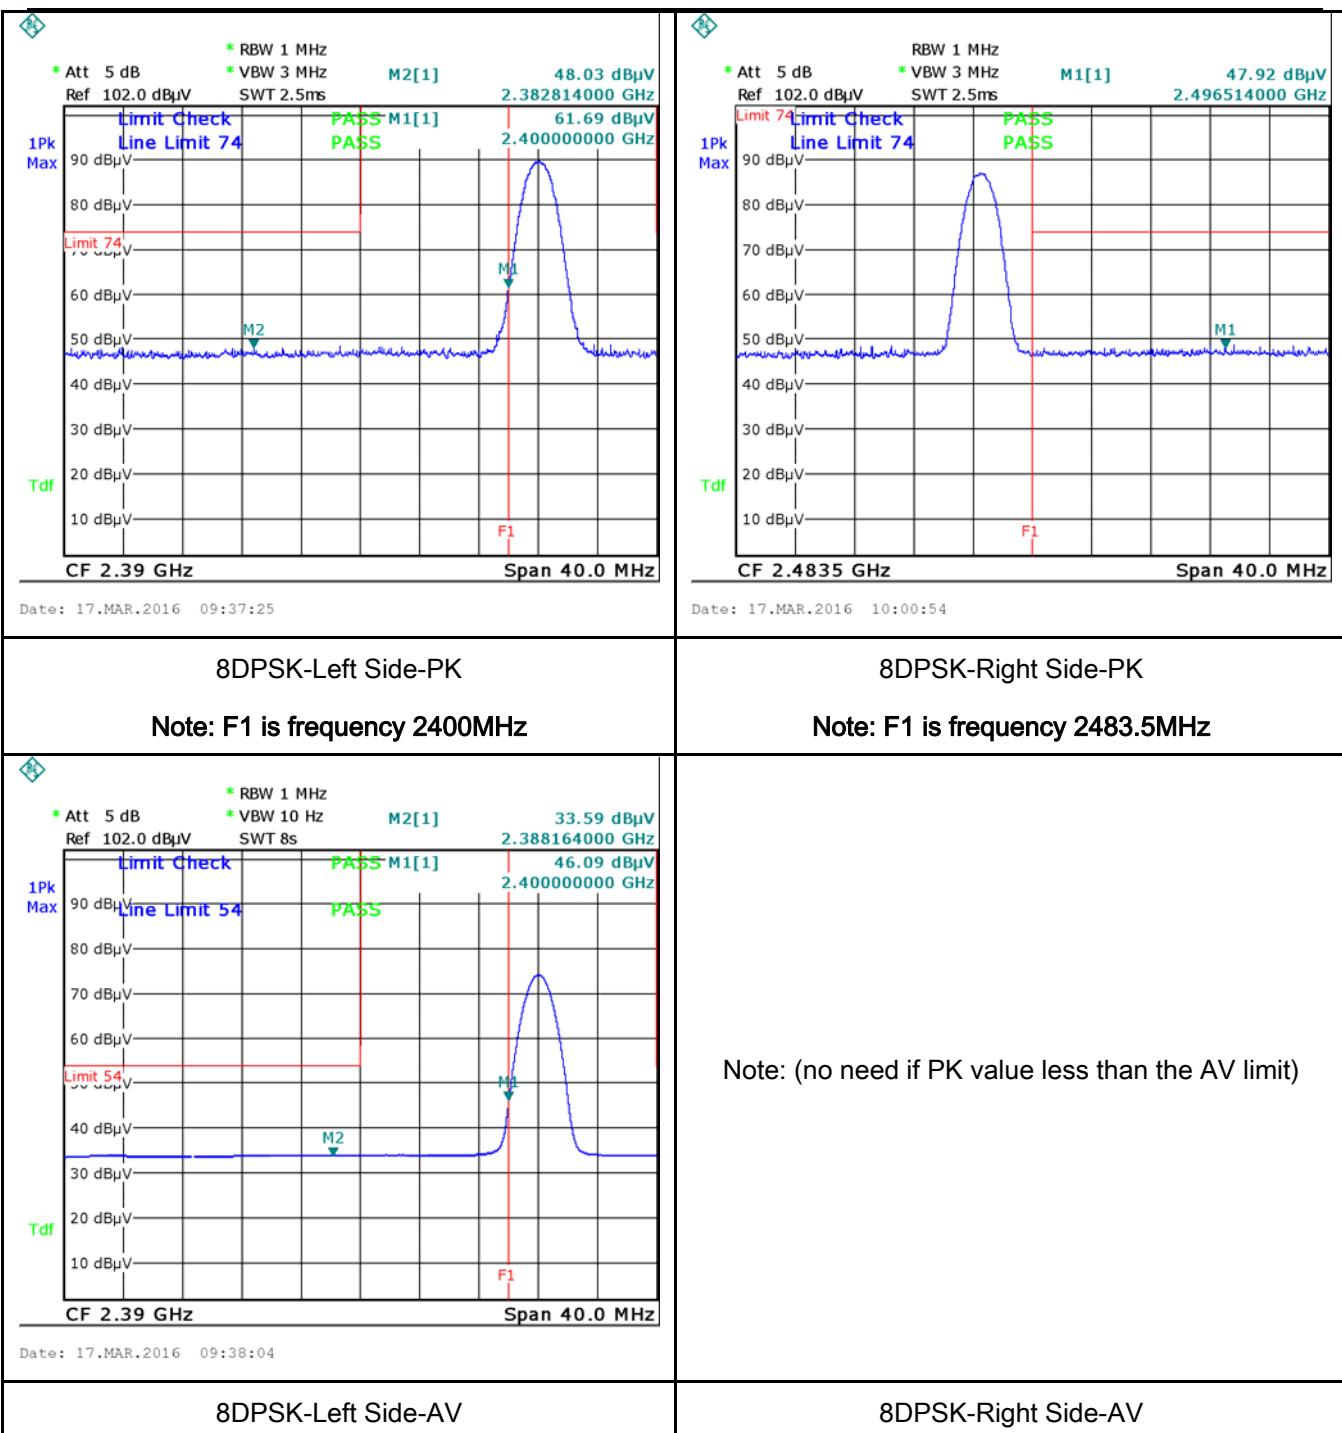
 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dB<math>\mu</math>V * VBW 3 MHz SWT 2.5ms</p> <p>M2[1] 47.61 dB<math>\mu</math>V 2.348270000 GHz</p> <p>Limit Check: PASS M1[1] PASS Line Limit-L 74</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 14.MAR.2016 15:05:52</p>	 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dB<math>\mu</math>V * VBW 3 MHz SWT 2.5ms</p> <p>M1[1] 46.53 dB<math>\mu</math>V 2.483770000 GHz</p> <p>Limit Check: PASS Line Limit-R 74</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 14.MAR.2016 15:11:07</p>
<p>8DPSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>8DPSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>1Av Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dB<math>\mu</math>V * VBW 3 MHz SWT 2.5ms</p> <p>M2[1] 39.63 dB<math>\mu</math>V 2.350870000 GHz</p> <p>Limit Check: PASS M1[1] PASS Line Limit-L 54</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 14.MAR.2016 15:08:13</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>8DPSK-Hopping Left-AV</p>	<p>8DPSK-Hopping Right-AV</p>



## 6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	52%
Atmospheric Pressure	1010mbar
Test date :	March 10, 2016
Tested By :	Winnie Zhang

### Requirement(s):

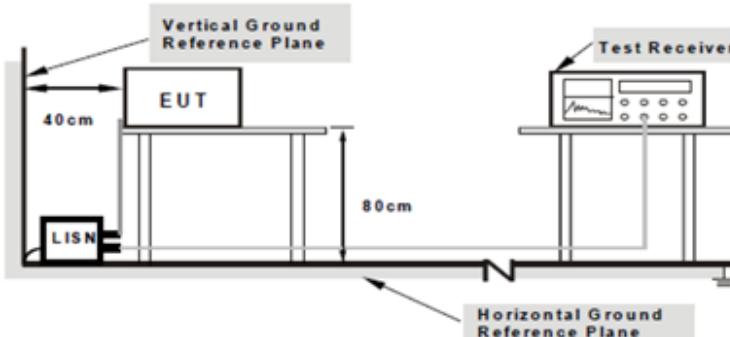
Spec	Item	Requirement	Applicable														
47CFR§15. 207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB $\mu$ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB $\mu$ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p><b>Note:</b> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A

**Test Mode:** Bluetooth Mode

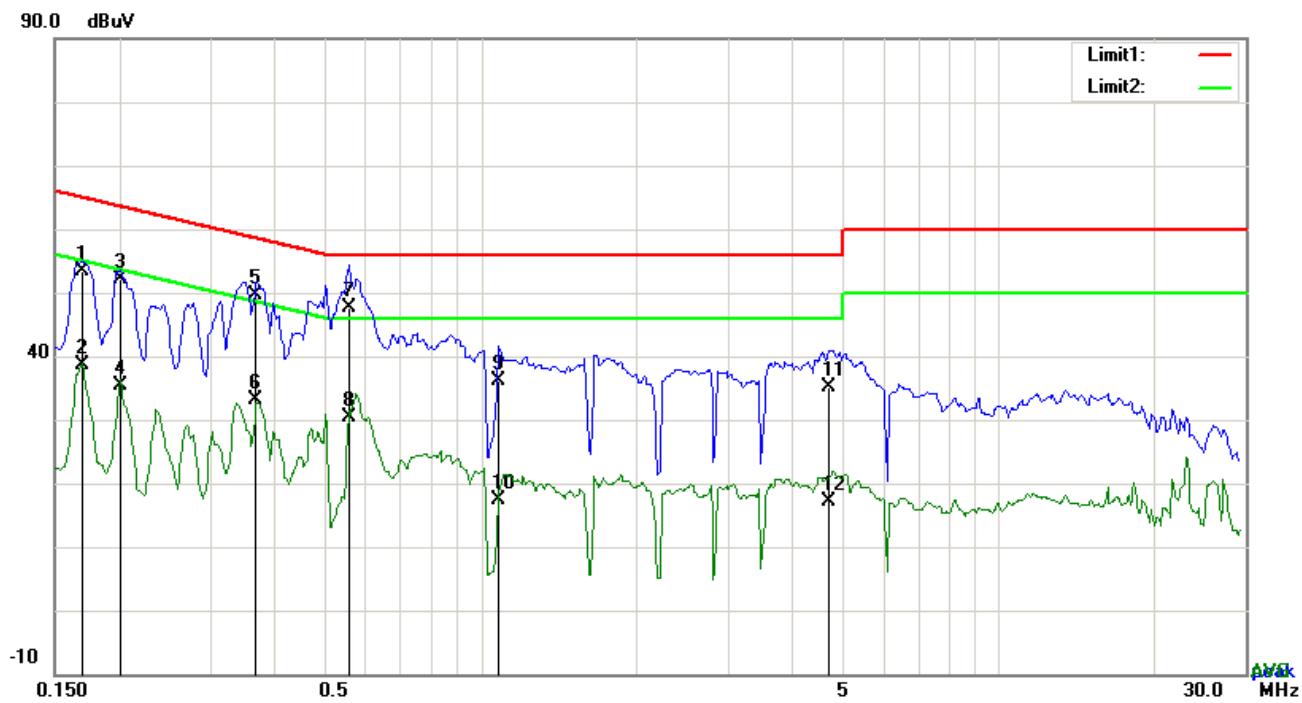


**Test Data**

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1695	40.17	QP	13.13	53.30	64.98	-11.68
2	L1	0.1695	25.45	AVG	13.13	38.58	54.98	-16.40
3	L1	0.2007	39.21	QP	13.01	52.22	63.58	-11.36
4	L1	0.2007	22.36	AVG	13.01	35.37	53.58	-18.21
5	L1	0.3684	37.21	QP	12.39	49.60	58.54	-8.94
6	L1	0.3684	20.84	AVG	12.39	33.23	48.54	-15.31
7	L1	0.5556	35.73	QP	11.84	47.57	56.00	-8.43
8	L1	0.5556	18.48	AVG	11.84	30.32	46.00	-15.68
9	L1	1.0821	24.83	QP	11.40	36.23	56.00	-19.77
10	L1	1.0821	6.10	AVG	11.40	17.50	46.00	-28.50
11	L1	4.7082	23.62	QP	11.40	35.02	56.00	-20.98
12	L1	4.7082	5.73	AVG	11.40	17.13	46.00	-28.87

**Test Mode:** Bluetooth Mode

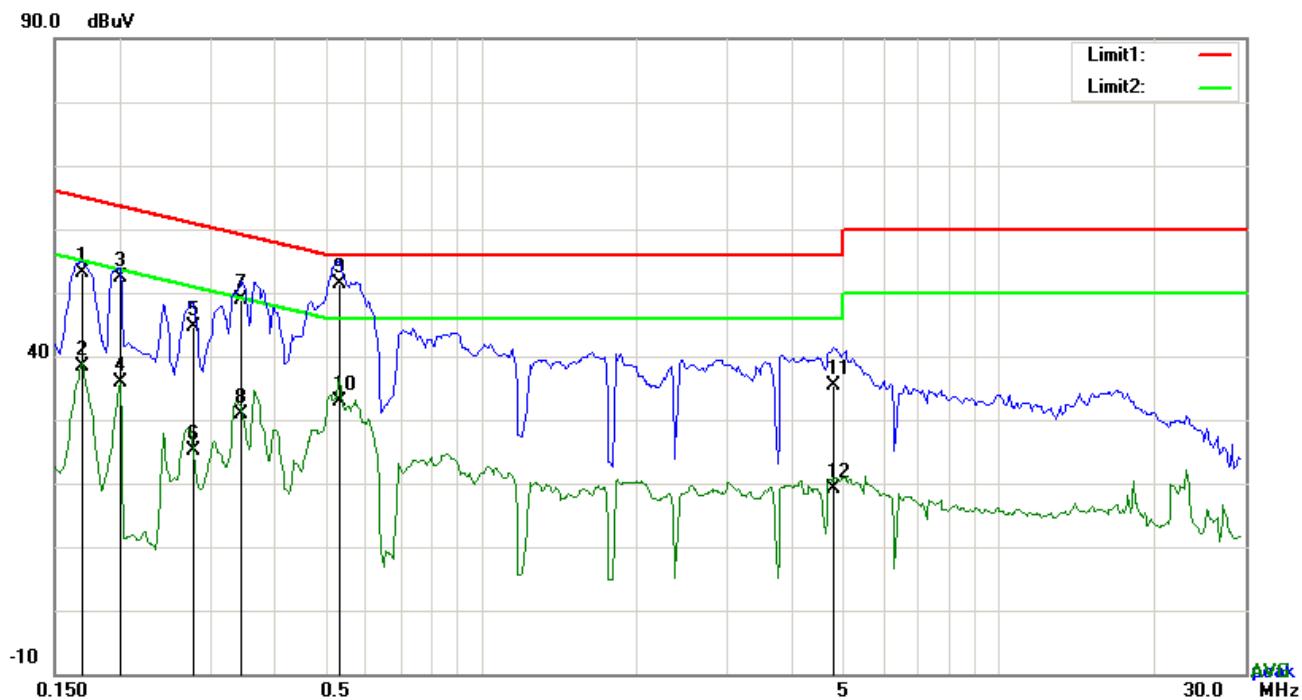


**Test Data**

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1695	40.03	QP	13.13	53.16	64.98	-11.82
2	N	0.1695	25.19	AVG	13.13	38.32	54.98	-16.66
3	N	0.2007	39.30	QP	13.01	52.31	63.58	-11.27
4	N	0.2007	22.86	AVG	13.01	35.87	53.58	-17.71
5	N	0.2787	32.00	QP	12.72	44.72	60.85	-16.13
6	N	0.2787	12.40	AVG	12.72	25.12	50.85	-25.73
7	N	0.3450	36.36	QP	12.48	48.84	59.08	-10.24
8	N	0.3450	18.49	AVG	12.48	30.97	49.08	-18.11
9	N	0.5322	39.39	QP	11.87	51.26	56.00	-4.74
10	N	0.5322	21.11	AVG	11.87	32.98	46.00	-13.02
11	N	4.8174	23.46	QP	11.88	35.34	56.00	-20.66
12	N	4.8174	7.18	AVG	11.88	19.06	46.00	-26.94

**Test Mode:** Bluetooth Mode

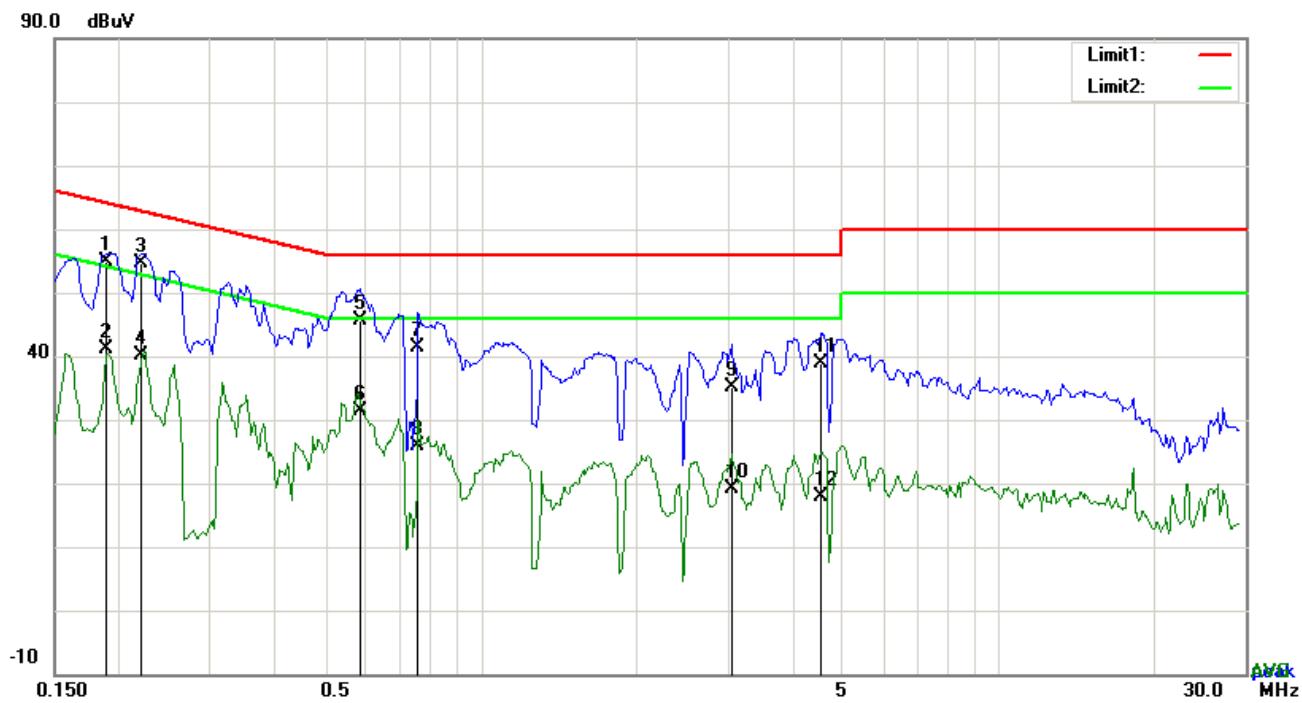


### Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1890	41.93	QP	13.06	54.99	64.08	-9.09
2	L1	0.1890	28.01	AVG	13.06	41.07	54.08	-13.01
3	L1	0.2202	41.75	QP	12.94	54.69	62.81	-8.12
4	L1	0.2202	27.23	AVG	12.94	40.17	52.81	-12.64
5	L1	0.5829	33.91	QP	11.82	45.73	56.00	-10.27
6	L1	0.5829	19.52	AVG	11.82	31.34	46.00	-14.66
7	L1	0.7584	29.84	QP	11.64	41.48	56.00	-14.52
8	L1	0.7584	14.30	AVG	11.64	25.94	46.00	-20.06
9	L1	3.0468	23.63	QP	11.40	35.03	56.00	-20.97
10	L1	3.0468	7.73	AVG	11.40	19.13	46.00	-26.87
11	L1	4.5483	27.47	QP	11.40	38.87	56.00	-17.13
12	L1	4.5483	6.56	AVG	11.40	17.96	46.00	-28.04

**Test Mode:** Bluetooth Mode

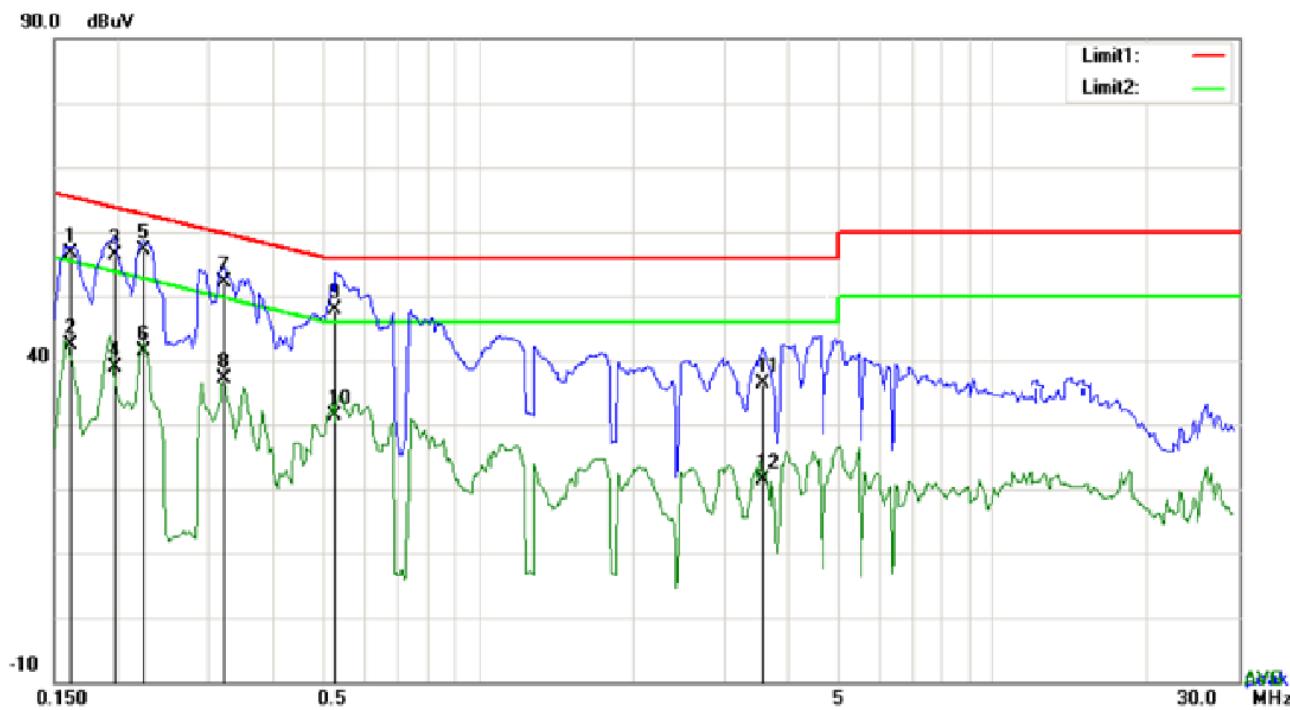

**Test Data**


Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1617	43.44	QP	13.16	56.60	65.38	-8.78
2	N	0.1617	29.27	AVG	13.16	42.43	55.38	-12.95
3	N	0.1968	43.24	QP	13.03	56.27	63.74	-7.47
4	N	0.1968	25.97	AVG	13.03	39.00	53.74	-14.74
5	N	0.2241	44.21	QP	12.92	57.13	62.67	-5.54
6	N	0.2241	28.52	AVG	12.92	41.44	52.67	-11.23
7	N	0.3216	39.45	QP	12.56	52.01	59.67	-7.66
8	N	0.3216	24.54	AVG	12.56	37.10	49.67	-12.57
9	N	0.5283	36.04	QP	11.87	47.91	56.00	-8.09
10	N	0.5283	19.61	AVG	11.87	31.48	46.00	-14.52
11	N	3.5733	24.59	QP	11.72	36.31	56.00	-19.69
12	N	3.5733	9.73	AVG	11.72	21.45	46.00	-24.55

## 6.9 Radiated Spurious Emissions

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1011mbar
Test date :	March 11, 2016
Tested By :	Winnie Zhang

### Requirement(s):

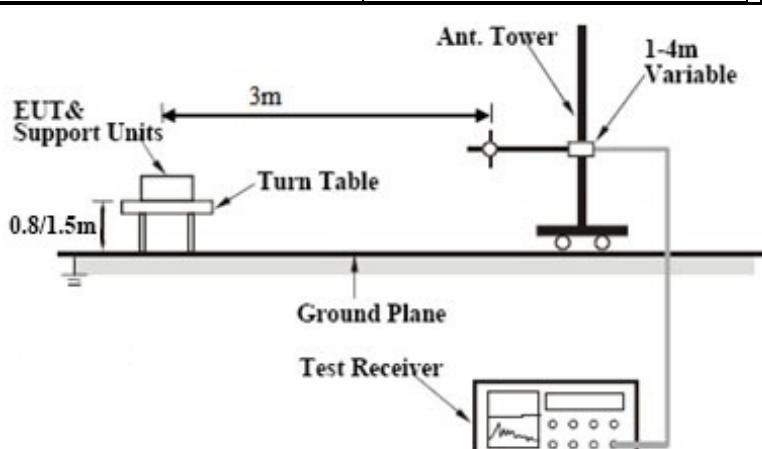Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu$ V/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu$ V/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. It shows a 'Turn Table' on a 'Ground Plane' with a 'EUT &amp; Support Units' mounted on it. A '3m' horizontal distance is marked between the EUT and a 'Ant. Tower'. The 'Ant. Tower' is a vertical mast with a '1-4m Variable' height adjustment. A 'Test Receiver' is connected to the tower, with its signal processed through a 'Detector' and 'Oscilloscope'.</p>												
Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</li> </ol>												


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

**Test Data**     Yes       N/A

**Test Plot**     Yes (See below)       N/A

Test Mode: Bluetooth Mode

Below 1GHz

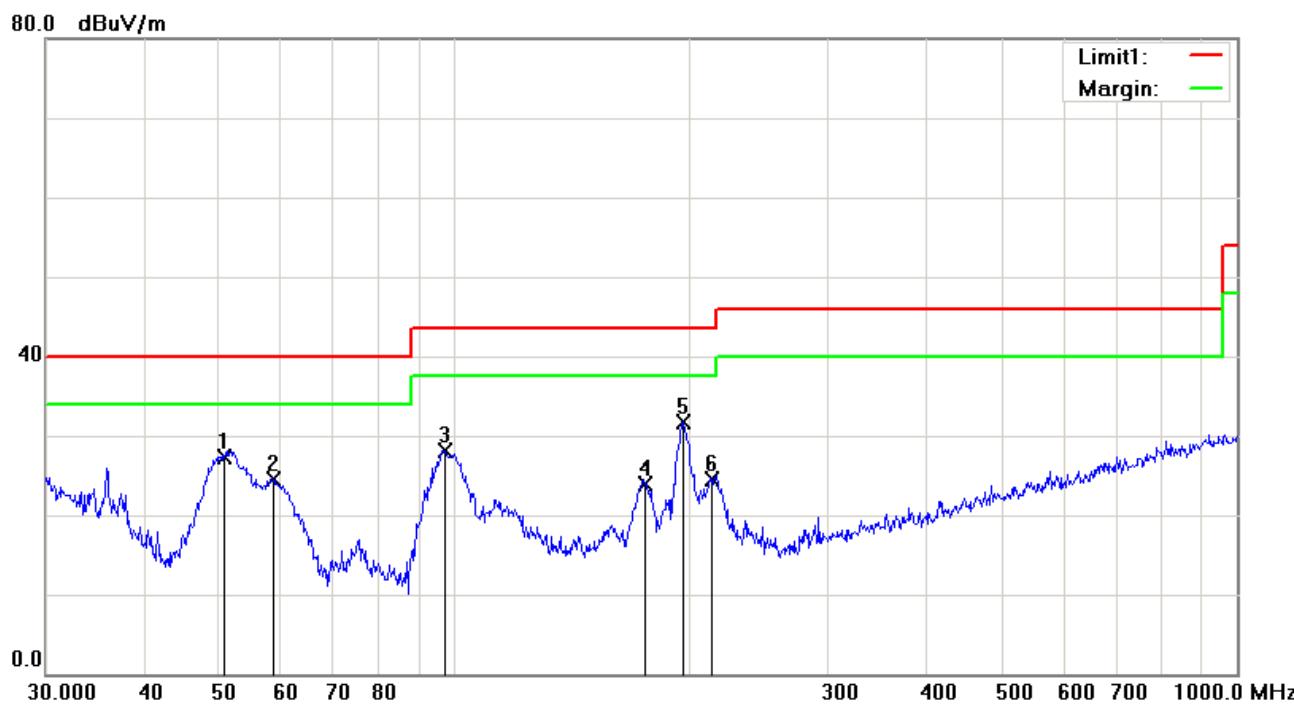


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )
1	H	50.7637	40.47	peak	-13.26	27.21	40.00	-12.79	100	199
2	H	58.6126	38.69	peak	-14.20	24.49	40.00	-15.51	100	184
3	H	97.1148	39.64	peak	-11.57	28.07	43.50	-15.43	100	184
4	H	175.0368	33.48	peak	-9.49	23.99	43.50	-19.51	100	229
5	H	195.8220	40.69	peak	-8.94	31.75	43.50	-11.75	100	124
6	H	213.0151	33.33	peak	-8.86	24.47	43.50	-19.03	100	263

### Below 1GHz

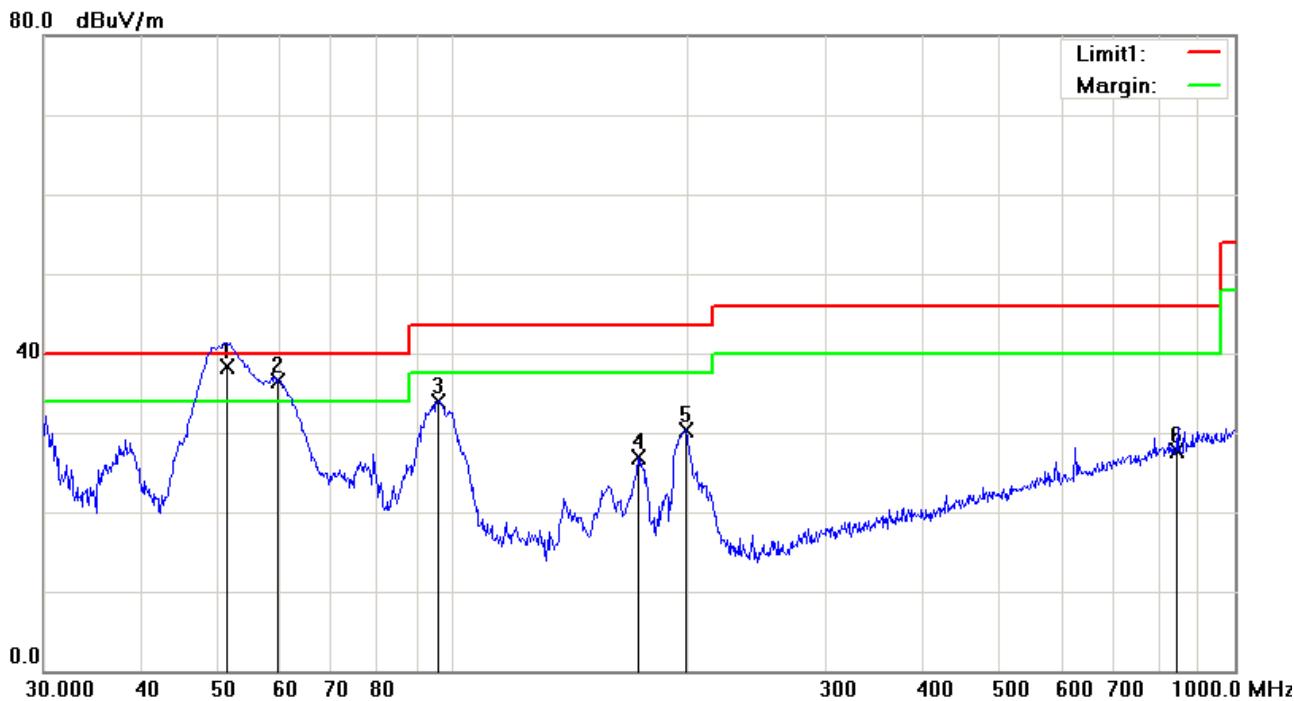

### Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readin g (dBuV/ m)	Detector	Corrected (dB/m)	Result (dBuV/m )	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	51.4807	51.57	QP	-13.35	38.22	40.00	-1.78	100	179
2	V	59.8588	50.79	peak	-14.34	36.45	40.00	-3.55	100	119
3	V	95.7622	45.90	peak	-11.93	33.97	43.50	-9.53	100	190
4	V	172.5988	36.14	peak	-9.31	26.83	43.50	-16.67	100	70
5	V	198.5880	39.14	peak	-8.81	30.33	43.50	-13.17	100	220
6	V	842.1296	24.10	peak	3.70	27.80	46.00	-18.20	100	111

**Above 1GHz**

Test Mode:	Transmitting Mode
------------	-------------------

**Mode: GFSK (Worst Case)**
**Low Channel (2402 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	33.98	AV	V	33.83	6.86	31.72	42.95	54	-11.05
4804	32.17	AV	H	33.83	6.86	31.72	41.14	54	-12.86
4804	46.98	PK	V	33.83	6.86	31.72	55.95	74	-18.05
4804	45.25	PK	H	33.83	6.86	31.72	54.22	74	-19.78

**Middle Channel (2441 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882	32.12	AV	V	33.86	6.82	31.82	40.98	54	-13.02
4882	31.37	AV	H	33.86	6.82	31.82	40.23	54	-13.77
4882	46.08	PK	V	33.86	6.82	31.82	54.94	74	-19.06
4882	45.98	PK	H	33.86	6.82	31.82	54.84	74	-19.16

**High Channel (2480 MHz)**

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	35.27	AV	V	33.9	6.76	31.92	44.01	54	-9.99
4960	36.68	AV	H	33.9	6.76	31.92	45.42	54	-8.58
4960	46.32	PK	V	33.9	6.76	31.92	55.06	74	-18.94
4960	46.19	PK	H	33.9	6.76	31.92	54.93	74	-19.07

**Note:**


- 1, The testing has been conformed to  $10 * 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	!! CONT
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo

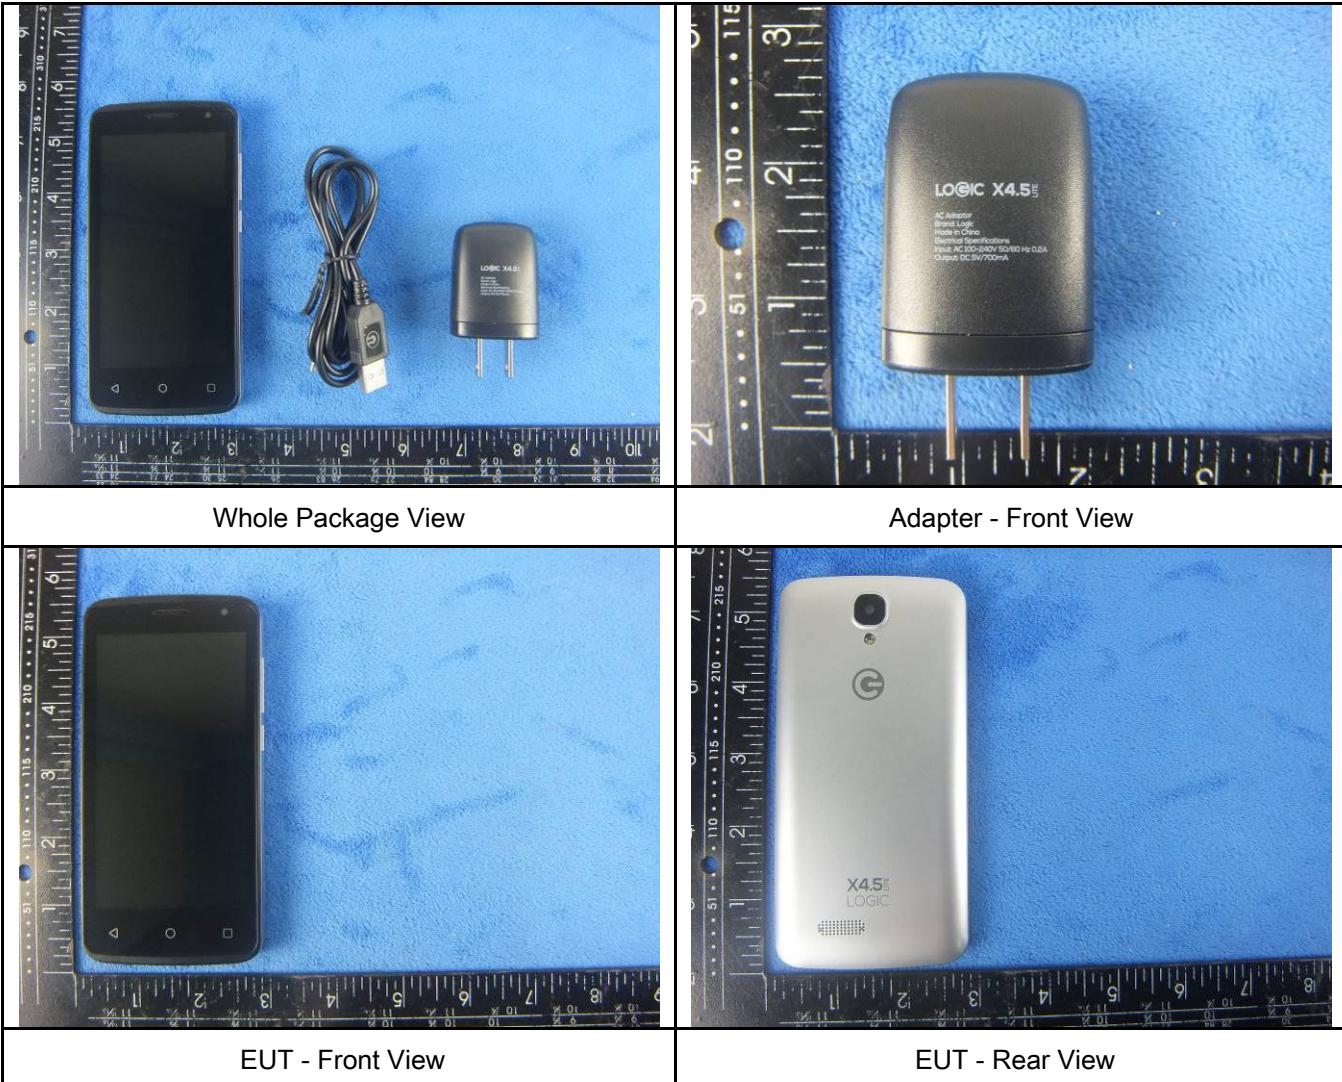




EUT - Top View



EUT - Bottom View

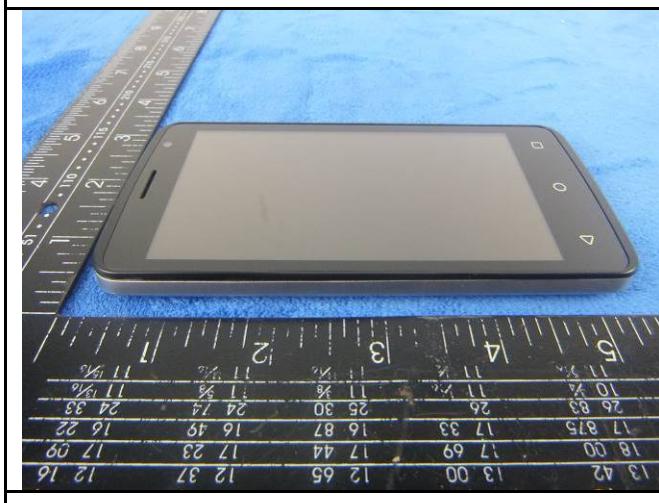


EUT - Left View



EUT - Right View

**Annex B.ii. Photograph: EUT Internal Photo**



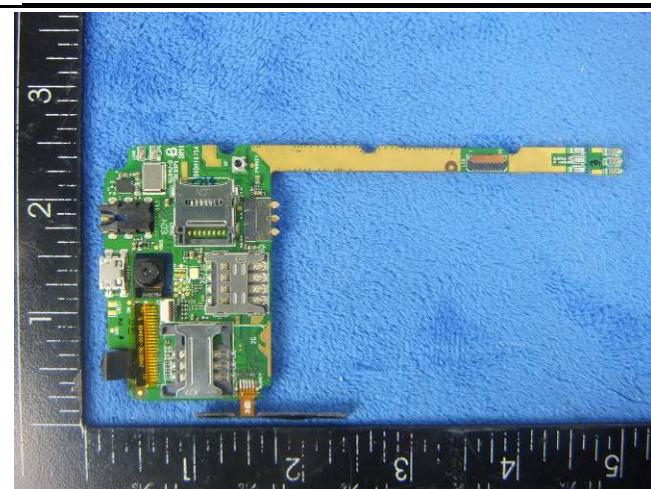

Mainboard without Shielding - Rear View




LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD Antenna View

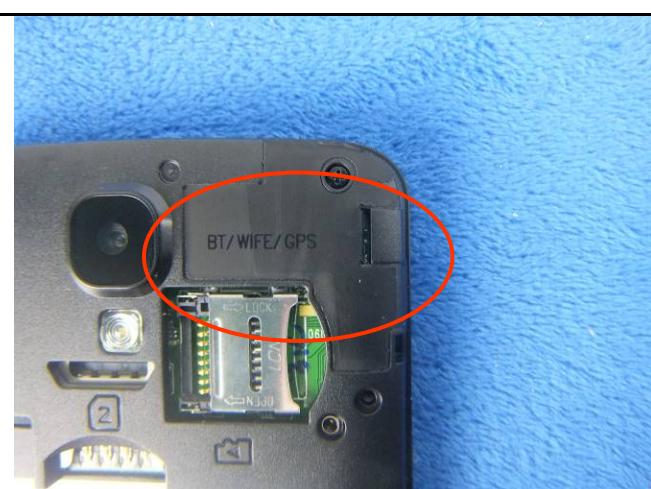

BT/BLE/WIFI/GPS - Antenna View


**Annex B.iii. Photograph: Test Setup Photo**

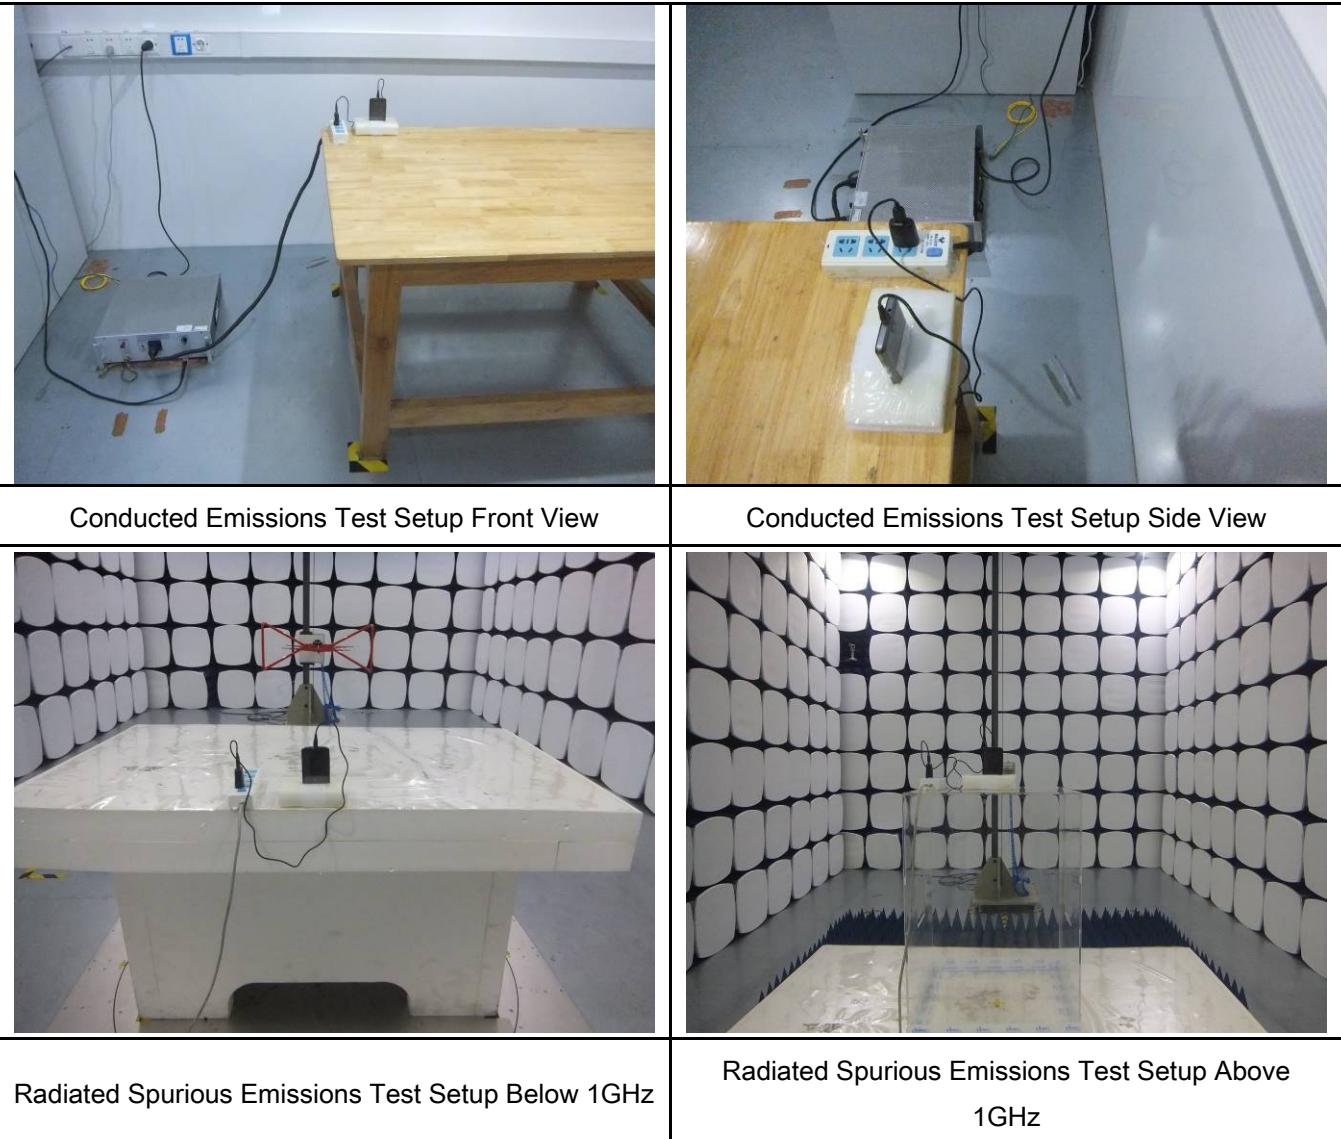


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

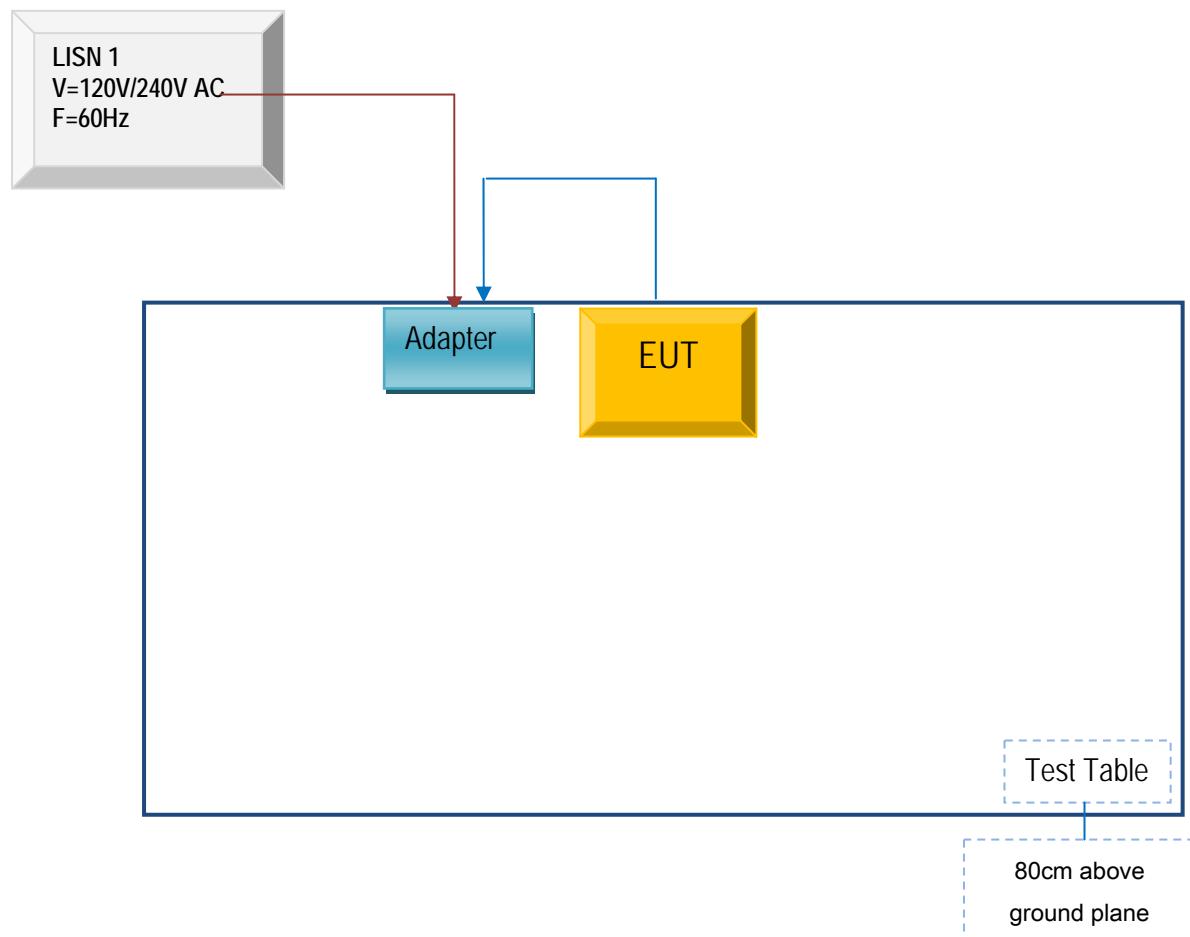

Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .

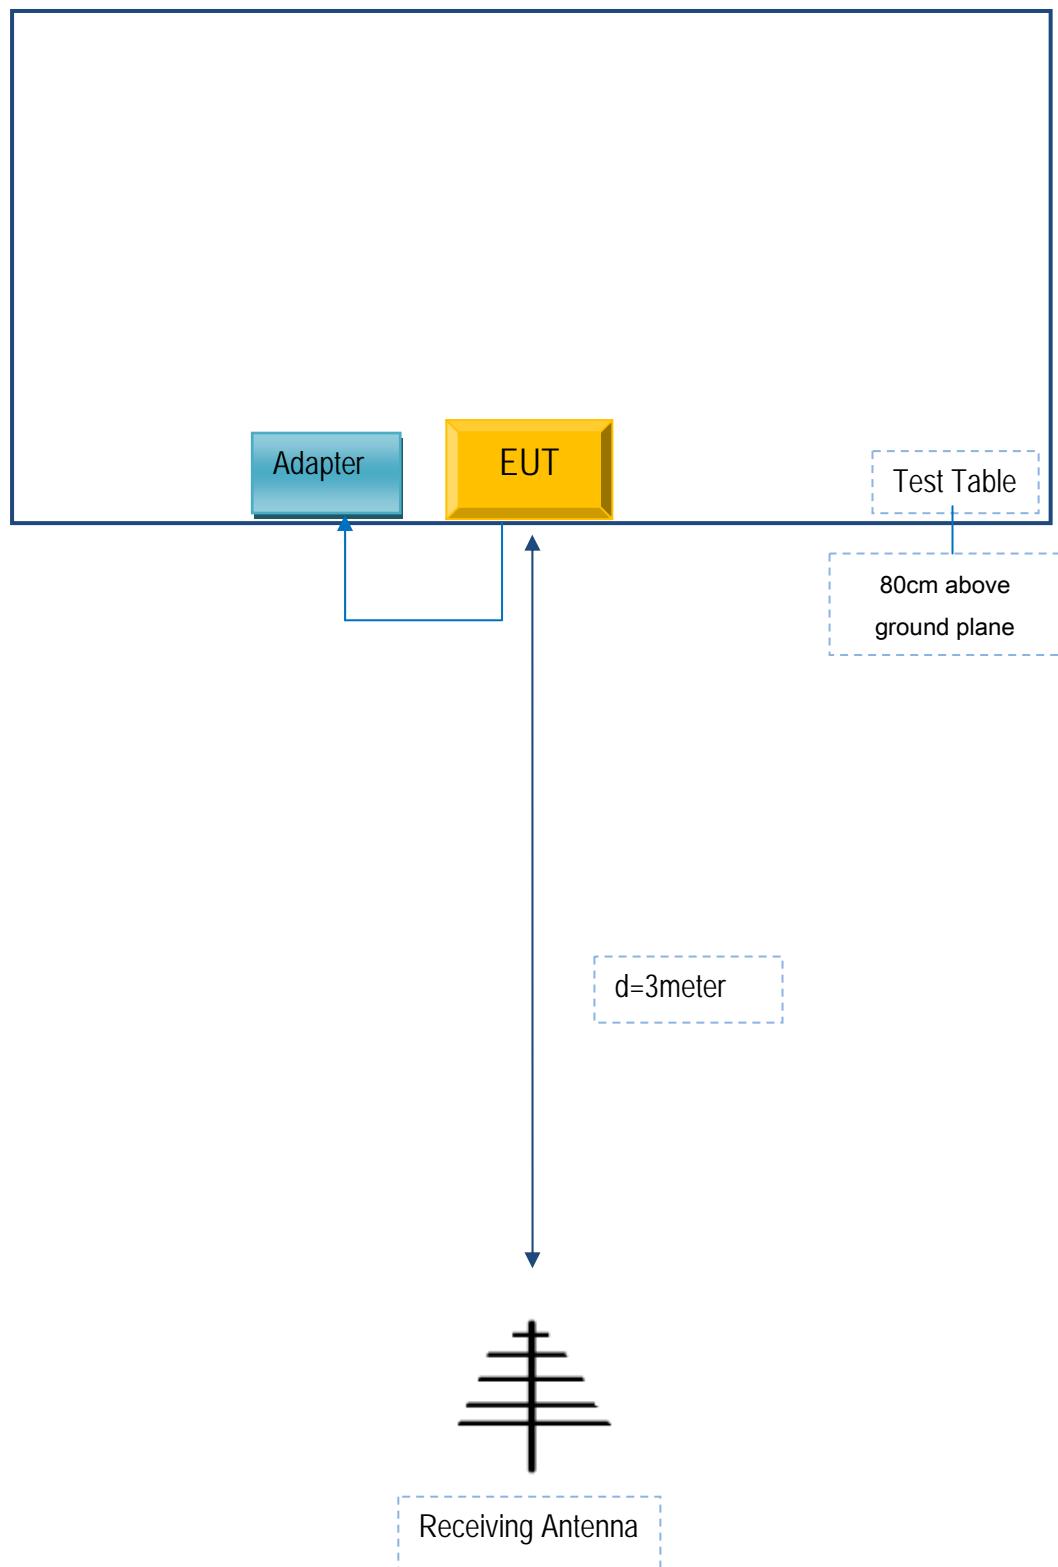

Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

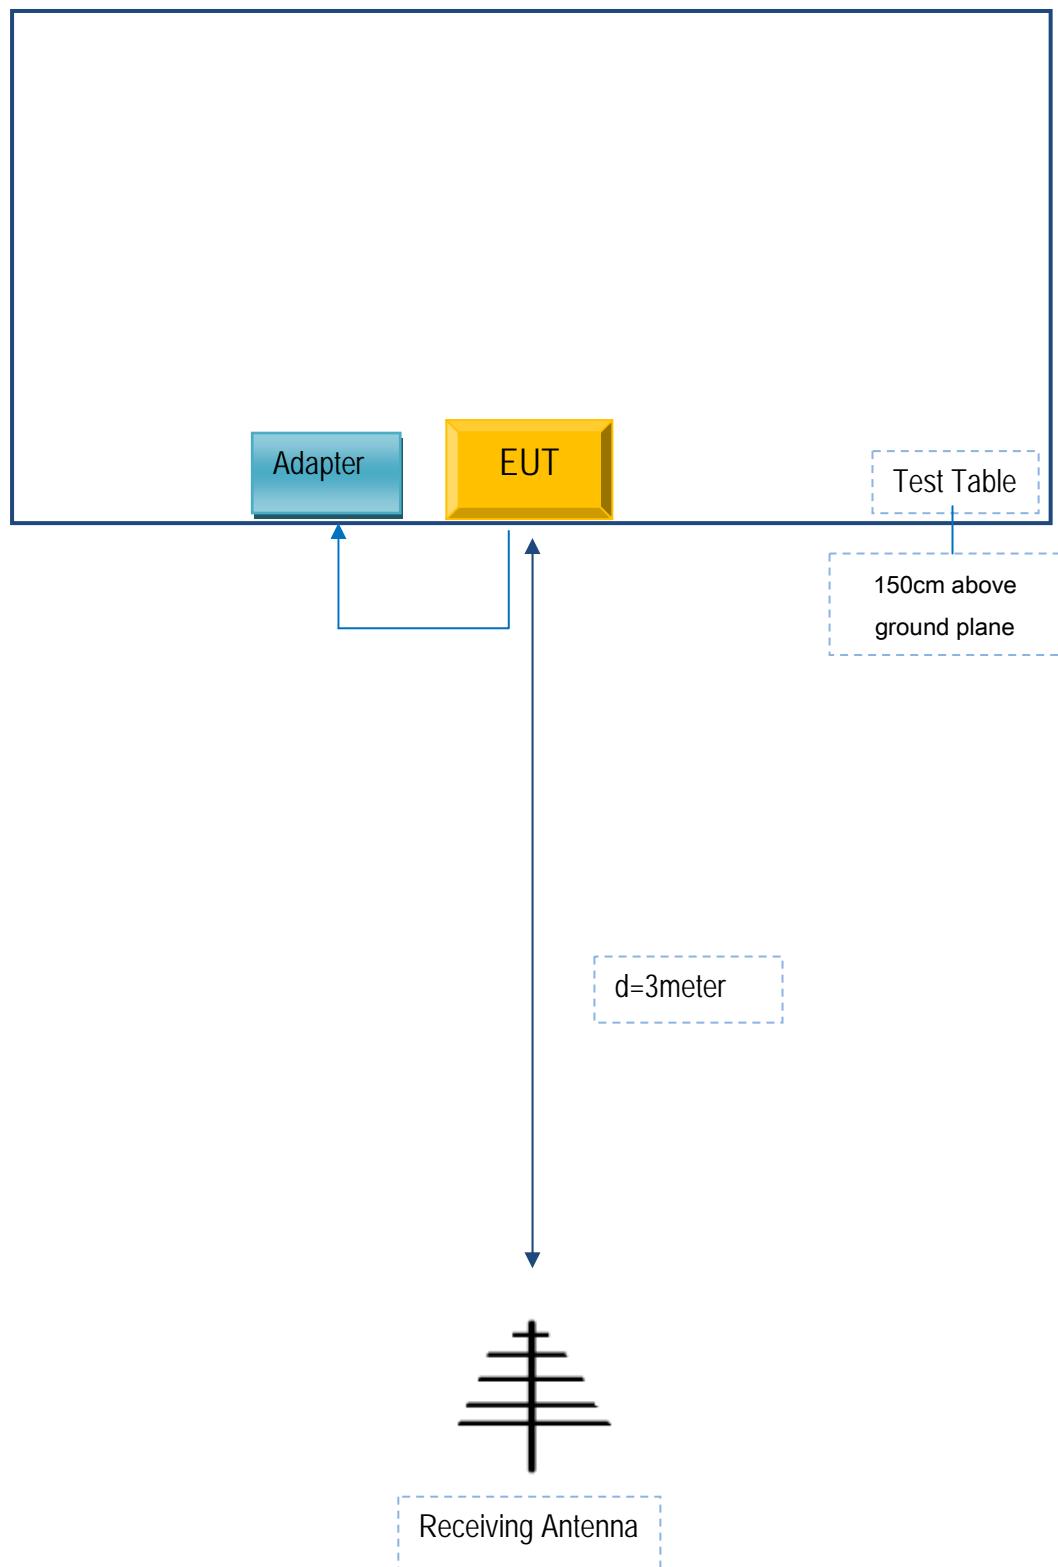

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
SWAGTEK	Adapter	N/A	N/A

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	JX1502736

Test Report	16070174-FCC-R2
Page	58 of 59

## Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

## Annex E. DECLARATION OF SIMILARITY

Swagtek  
ADD: 10205 NW 19th Street, STE101, Miami, FL, 33172, USA  
Tel: 305 421 9938      Fax: 305 471 9011

### DECLARATION OF SIMILARITY

Date: 2016-2-26

Dear Sir or Madam:


We, Swagtek, hereby declare that product: 4.5" Smart Phone, model X4.5 LITE is electrically identical with the models: Spark and UM450, which was tested by Siemic with the same electromagnetic emissions and electromagnetic compatibility characteristics. The results of which are featured in Siemic projects: 16070174.

A description of the difference between the three models and those that are declared similar are as follows:

They are the same product, and just have the different model name, the rest are the same.

Please contact me should there be need for any additional clarification or information.

Best Regards,



Charles Cheng  
Manager