

FCC RF Test Report

(U-NII)

Report No.: JYTSZ-R12-2500768

Applicant: SWAGTEK

Address of Applicant: 10205 NW 19th Street, STE 101, Miami, FL33172.USA

Equipment Under Test (EUT)

Product Name: 4G Tablet

Model No.: T10L PLUS, Grad, Slate

Trade Mark: LOGIC, ISWAG, UNONU

FCC ID: O551001923

Applicable Standards: FCC CFR Title 47 Part 15E (\$15.407)

Date of Sample Receipt: 21 May, 2025

Date of Test: 22 May, to 25 Jun., 2025

Date of Report Issued: 25 Jun., 2025

Test Result: PASS

Tested by:

Yi-ba Zhang

Project Engineer

Date:

25 Jun., 2025

Reviewed by:

W. Peng

Senior Engineer

Date:

25 Jun., 2025

Approved by:

James Wei
Manager

Date:

25 Jun., 2025

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	25 Jun., 2025	Original

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	8
4.1 Test Channel	8
4.2 Test Setup	8
4.3 Test Procedure	10
5 Test Results.....	11
5.1 Summary	11
5.1.1 Clause and Data Summary.....	11
5.1.2 Test Limit.....	12
5.2 Unwanted Emissions.....	13

3 General Information

3.1 Client Information

Applicant:	SWAGTEK
Address:	10205 NW 19th Street,STE 101,Miami, FL33172.USA
Manufacturer/Factory:	SWAGTEK
Address:	10205 NW 19th Street,STE 101,Miami, FL33172.USA

3.2 General Description of E.U.T.

Product Name:	4G Tablet
Model No.:	T10L PLUS, Grad, Slate
Operation Frequency:	Band 1: 5150 MHz - 5250 MHz Band 4: 5725 MHz - 5850 MHz
Channel Numbers:	Band 1: 4 , Band 4: 5 (802.11a, n-HT20, ac-VHT20) Band 1, 4: 2 (802.11n-HT40, ac-VHT40) Band 1, 4: 1 (802.11ac-VHT80)
Modulation Technology: (IEEE 802.11a/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Modulation Technology: (IEEE 802.11ac)	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Antenna Type:	Internal Antenna
Antenna Gain:	5.2G Wi-Fi: -2.12 dBi (declare by applicant) 5.8G Wi-Fi: -1.25 dBi (declare by applicant)
Antenna Transmit Mode:	SISO (1TX, 1RX)
Power Supply:	Rechargeable Li-ion Battery DC3.8V, 5000mAh
AC Adapter:	Model: YD2.0AN-003 Input: AC100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 2.0A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	All the model are the same circuit and RF module,except the model names.

3.3 Test Mode and Environment

Test Mode:	
Transmitting mode:	Keep the EUT in continuous transmitting with modulation
Per-scan all kind of data rate, the follow list were the worst case:	
Mode	Data rate
802.11a	6.0 Mbps
802.11n-HT20	6.5 Mbps
802.11n-HT40	13.5 Mbps
802.11ac-VHT20	6.5 Mbps
802.11ac-VHT40	13.5 Mbps
802.11ac-VHT80	29.3 Mbps
Remark: For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11a, n, ac modulation mode, found 802.11a modulation mode was worse case mode. The report only reflects the test data of worst mode.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.80Vdc, Extreme: Low 3.50Vdc, High 4.35Vdc
Test Engineer:	Robin Gu(Radiated measurement)

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	±4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	±5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	±4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	5.34 dB
Radiated Emission (30MHz ~ 1000MHz) (10m SAC)	±4.3 dB
Radiated Emission (30MHz ~ 1GHz) (3m FAR)	3.39 dB
Radiated Emission (1GHz ~ 18GHz) (3m FAR)	5.15 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.30 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	01-03-2025	01-02-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-03-2025	01-02-2026
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-16-2024	12-15-2025
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-16-2024	12-15-2025
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	09-09-2024	09-08-2025
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-15-2025	01-14-2026
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-15-2025	01-14-2026
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-15-2025	01-14-2026
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-01-2024	06-30-2025
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-01-2024	06-30-2027
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	06-16-2024	06-15-2025
				06-14-2025	06-13-2026
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	12-25-2024	12-24-2025
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	12-25-2024	12-24-2025
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	04-21-2025	04-20-2026
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	04-21-2025	04-20-2026
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	12-16-2024	12-15-2025
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	12-16-2024	12-15-2025
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-16-2024	12-15-2025
Spectrum Analyzer	KEYSIGHT	N9020B	WXJ081-1	06-11-2024	06-10-2025
				06-09-2025	06-08-2026
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	07-30-2024	07-29-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	07-30-2024	07-29-2025
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	07-30-2024	07-29-2025
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

4 Measurement Setup and Procedure

4.1 Test Channel


According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:


Operation frequency: 5150 MHz – 5250 MHz						
Modulation mode	Lowest channel		Middle channel		Highest channel	
	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a, n-HT20, ac-VHT20	36	5180	40	5200	48	5240
802.11n-HT40, ac-VHT40	38	5190	/	/	46	5230
802.11ac-VHT80	/	/	42	5210	/	/

Operation frequency: 5725 MHz – 5850 MHz						
Modulation mode	Lowest channel		Middle channel		Highest channel	
	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a, n-HT20, ac-VHT20	149	5745	157	5785	165	5825
802.11n-HT40, ac-VHT40	151	5755	/	/	159	5795
802.11ac-VHT80	/	/	155	5775	/	/

4.2 Test Setup

1) Radiated emission measurement:

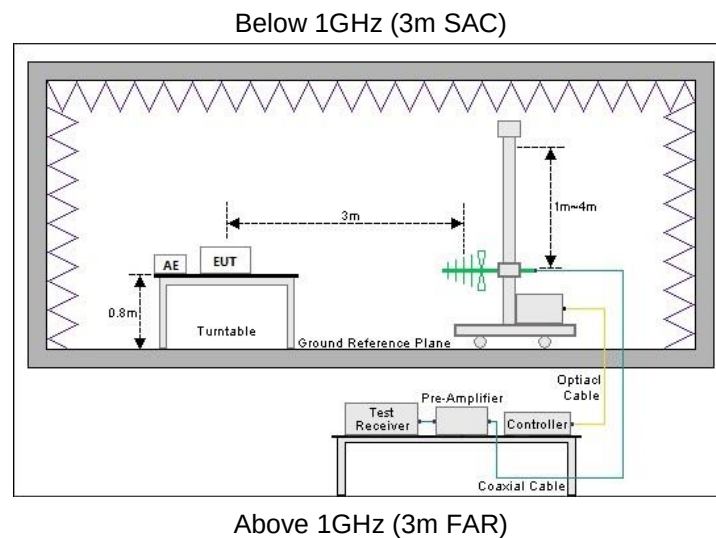

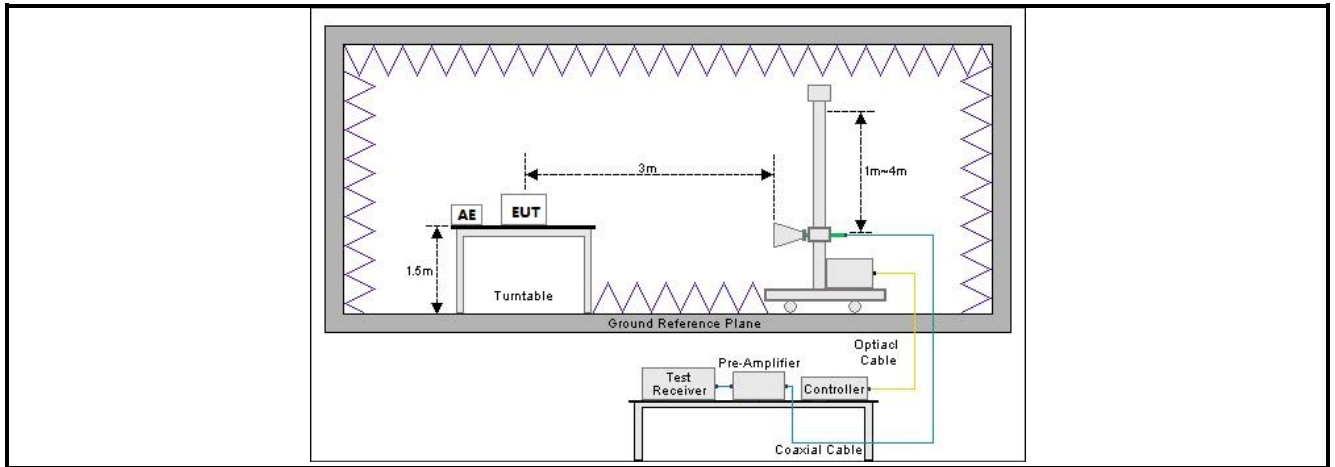

4.3 Test Procedure

Test method	Test step
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m . 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

This report was amended on FCC ID: O551001923 follow FCC Class II Permissive Change. The original report: JYTSZ-R12-2500284, issued by JianYan Testing Group Shenzhen Co., Ltd. The differences between them as below: Update the 234G and BT&WIFI antenna, update the screen and screen backlight, update the battery, speaker, USB Cable and the adapter.

So need to retest spurious radiation.

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
AC Power Line Conducted Emission	15.207 15.407 (b)(9)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
Duty Cycle	ANSI C63.10-2013	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
Conducted Peak Output Power Power Spectral Density	15.407 (a)(1)(iv), (a)(3)(i)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
26dB Emission Bandwidth 99% Occupied Bandwidth	15.407 (a)(12)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
6dB Emission Bandwidth	15.407 (e)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
Unwanted Emissions	15.205 15.209 15.407 (b)(1), (4), (9), (10)	See Section 5.3	Pass
Frequency Stability	15.407 (g)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
Dynamic frequency selection	15.407 (h)(2)	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.	Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284.
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 1.0dB (provided by the customer). 4. Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500284 issued by JianYan Testing Group Shenzhen Co., Ltd.			

Test Method:

ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

5.1.2 Test Limit

Unwanted Emissions


- (1) **For transmitters operating in the 5.15-5.25 GHz band:** All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of ?27 dBm/MHz.
- (4) **For transmitters operating solely in the 5.725-5.850 GHz band:** All emissions shall be limited to a level of ?27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. The provisions of § 15.205 apply to intentional radiators operating under this section:

Frequency (MHz)	Limit (dBμV/m)		Detector
	@ 3m	@ 10m	
30 – 88	40.0	30.0	Quasi-peak
88 – 216	43.5	33.5	Quasi-peak
216 – 960	46.0	36.0	Quasi-peak
960 – 1000	54.0	44.0	Quasi-peak
Note: The more stringent limit applies at transition frequencies.			
Frequency	Limit (dBμV/m) @ 3m		
	Average	Peake	
Above 1 GHz	54.0	74.0	
Note: The measurement bandwidth shall be 1 MHz or greater.			

5.2 Unwanted Emissions

Below 1GHz:

Product Name:	4G Tablet	Product Model:	T10L PLUS
Test By:	Kiran Zeng	Test mode:	5G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

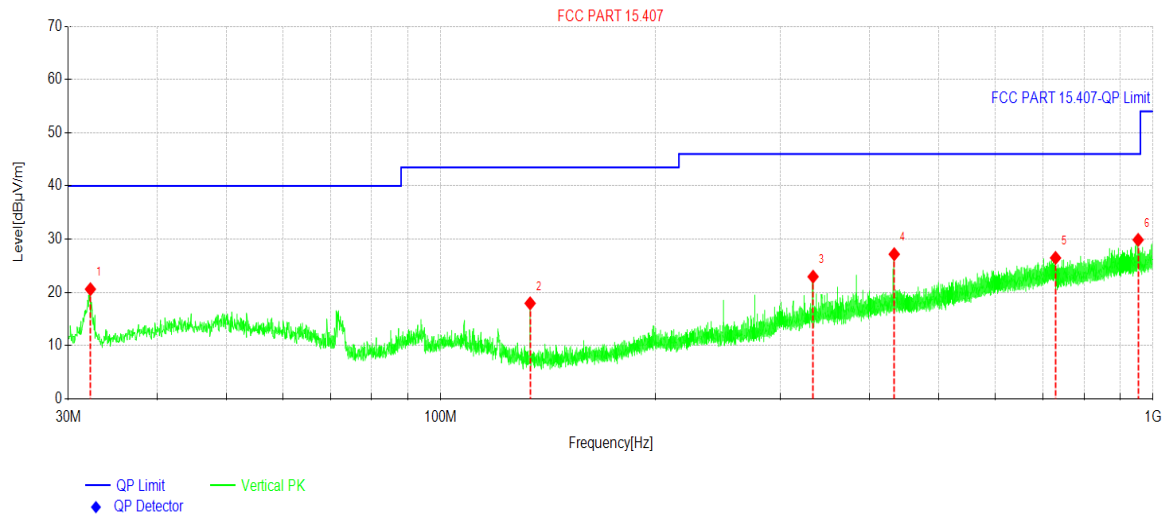


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	32.2311	36.22	-15.61	20.61	40.00	19.39	PK	Vertical
2	133.552	35.71	-17.76	17.95	43.50	25.55	PK	Vertical
3	333.285	34.69	-11.73	22.96	46.00	23.04	PK	Vertical
4	433.249	37.00	-9.83	27.17	46.00	18.83	PK	Vertical
5	729.793	31.11	-4.63	26.48	46.00	19.52	PK	Vertical
6	953.146	31.67	-1.80	29.87	46.00	16.13	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	4G Tablet	Product Model:	T10L PLUS
Test By:	Kiran Zeng	Test mode:	5G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

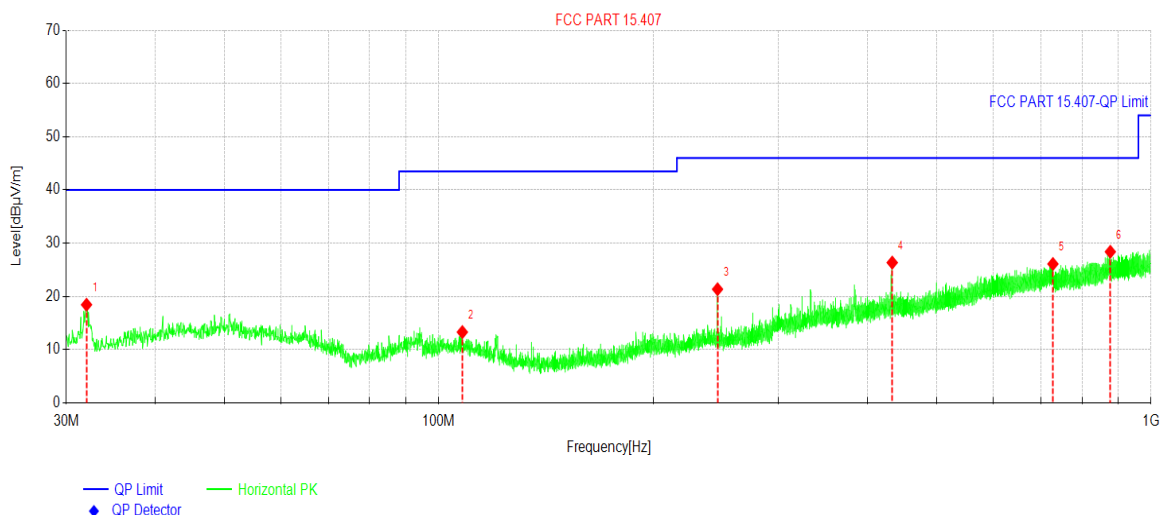

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	32.0371	34.08	-15.64	18.44	40.00	21.56	PK	Horizontal
2	107.943	27.52	-14.22	13.30	43.50	30.20	PK	Horizontal
3	246.320	35.02	-13.67	21.35	46.00	24.65	PK	Horizontal
4	433.297	36.18	-9.83	26.35	46.00	19.65	PK	Horizontal
5	728.337	30.79	-4.69	26.10	46.00	19.90	PK	Horizontal
6	876.852	31.07	-2.69	28.38	46.00	17.62	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	41.26	20.12	61.38	74.00	12.62	Vertical
10360.00	46.77	1.40	48.17	68.20	20.03	Vertical
5150.00	37.71	20.12	57.83	74.00	16.17	Horizontal
10360.00	45.70	1.40	47.10	68.20	21.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	26.24	20.12	46.36	54.00	7.64	Vertical
5150.00	24.16	20.12	44.28	54.00	9.72	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	45.64	2.45	48.09	68.20	20.11	Vertical
10400.00	45.69	2.45	48.14	68.20	20.06	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	35.33	19.93	55.26	74.00	18.74	Vertical
10480.00	45.55	2.74	48.29	68.20	19.91	Vertical
5350.00	35.24	19.93	55.17	74.00	18.83	Horizontal
10480.00	45.65	2.74	48.39	68.20	19.81	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	23.79	19.93	43.72	54.00	10.28	Vertical
5350.00	23.73	19.93	43.66	54.00	10.34	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	42.38	20.12	62.50	74.00	11.50	Vertical
10360.00	45.69	1.40	47.09	68.20	21.11	Vertical
5150.00	37.23	20.12	57.35	74.00	16.65	Horizontal
10360.00	45.62	1.40	47.02	68.20	21.18	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	25.54	20.12	45.66	54.00	8.34	Vertical
5150.00	24.11	20.12	44.23	54.00	9.77	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	45.68	2.45	48.13	68.20	20.07	Vertical
10400.00	45.59	2.45	48.04	68.20	20.16	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	35.11	19.93	55.04	74.00	18.96	Vertical
10480.00	45.66	2.74	48.40	68.20	19.80	Vertical
5350.00	36.67	19.93	56.60	74.00	17.40	Horizontal
10480.00	45.66	2.74	48.40	68.20	19.80	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	23.68	19.93	43.61	54.00	10.39	Vertical
5350.00	23.81	19.93	43.74	54.00	10.26	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	46.88	20.12	67.00	74.00	7.00	Vertical
10380.00	45.65	1.96	47.61	68.20	20.59	Vertical
5150.00	40.28	20.12	60.40	74.00	13.60	Horizontal
10380.00	45.66	1.96	47.62	68.20	20.58	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	29.30	20.12	49.42	54.00	4.58	Vertical
5150.00	25.71	20.12	45.83	54.00	8.17	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	36.00	19.93	55.93	74.00	18.07	Vertical
10460.00	45.66	1.64	47.30	68.20	20.90	Vertical
5350.00	34.37	19.93	54.30	74.00	19.70	Horizontal
10460.00	45.54	1.64	47.18	68.20	21.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	23.63	19.93	43.56	54.00	10.44	Vertical
5350.00	23.75	19.93	43.68	54.00	10.32	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	42.25	20.12	62.37	74.00	11.63	Vertical
10360.00	45.72	1.40	47.12	68.20	21.08	Vertical
5150.00	36.82	20.12	56.94	74.00	17.06	Horizontal
10360.00	45.54	1.40	46.94	68.20	21.26	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	25.53	20.12	45.65	54.00	8.35	Vertical
5150.00	23.62	20.12	43.74	54.00	10.26	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	45.52	2.45	47.97	68.20	20.23	Vertical
10400.00	45.74	2.45	48.19	68.20	20.01	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	35.09	19.93	55.02	74.00	18.98	Vertical
10480.00	45.63	2.74	48.37	68.20	19.83	Vertical
5350.00	36.22	19.93	56.15	74.00	17.85	Horizontal
10480.00	45.72	2.74	48.46	68.20	19.74	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	23.37	19.93	43.30	54.00	10.70	Vertical
5350.00	23.60	19.93	43.53	54.00	10.47	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	46.59	20.12	66.71	74.00	7.29	Vertical
10380.00	45.71	1.96	47.67	68.20	20.53	Vertical
5150.00	40.07	20.12	60.19	74.00	13.81	Horizontal
10380.00	45.75	1.96	47.71	68.20	20.49	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	29.00	20.12	49.12	54.00	4.88	Vertical
5150.00	25.25	20.12	45.37	54.00	8.63	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	35.95	19.93	55.88	74.00	18.12	Vertical
10460.00	45.69	1.64	47.33	68.20	20.87	Vertical
5350.00	33.99	19.93	53.92	74.00	20.08	Horizontal
10460.00	45.46	1.64	47.10	68.20	21.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	23.47	19.93	43.40	54.00	10.60	Vertical
5350.00	23.65	19.93	43.58	54.00	10.42	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT80						
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	44.42	20.12	64.54	74.00	9.46	Vertical
5350.00	35.05	19.93	54.98	74.00	19.02	Vertical
10420.00	45.60	1.92	47.52	68.20	20.68	Vertical
5150.00	38.15	20.12	58.27	74.00	15.73	Horizontal
5350.00	35.28	19.93	55.21	74.00	18.79	Horizontal
10420.00	45.60	1.92	47.52	68.20	20.68	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	30.03	20.12	50.15	54.00	3.85	Vertical
5350.00	23.85	19.93	43.78	54.00	10.22	Vertical
5150.00	25.78	20.12	45.90	54.00	8.1	Horizontal
5350.00	23.91	19.93	43.84	54.00	10.16	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	34.43	20.81	55.24	68.20	12.96	Vertical
5700.00	35.16	21.58	56.74	105.20	48.46	Vertical
5720.00	46.26	21.35	67.61	110.80	43.19	Vertical
5725.00	52.12	21.29	73.41	122.20	48.79	Vertical
11490.00	46.48	2.44	48.92	74.00	25.08	Vertical
5650.00	34.65	20.81	55.46	68.20	12.74	Horizontal
5700.00	34.68	21.58	56.26	105.20	48.94	Horizontal
5720.00	39.10	21.35	60.45	110.80	50.35	Horizontal
5725.00	45.61	21.29	66.90	122.20	55.30	Horizontal
11490.00	45.90	2.44	48.34	74.00	25.66	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	36.06	2.44	38.50	54.00	15.50	Vertical
11490.00	36.61	2.44	39.05	54.00	14.95	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	45.59	2.74	48.33	74.00	25.67	Vertical
11570.00	45.42	2.74	48.16	74.00	25.84	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	35.58	2.74	38.32	54.00	15.68	Vertical
11570.00	36.37	2.74	39.11	54.00	14.89	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	39.94	21.10	61.04	122.20	61.16	Vertical
5855.00	34.75	21.15	55.90	110.80	54.90	Vertical
5875.00	33.56	21.36	54.92	105.20	50.28	Vertical
5925.00	33.89	21.70	55.59	68.20	12.61	Vertical
11650.00	45.52	2.00	47.52	74.00	26.48	Vertical
5850.00	38.45	21.10	59.55	122.20	62.65	Horizontal
5855.00	34.31	21.15	55.46	110.80	55.34	Horizontal
5875.00	35.27	21.36	56.63	105.20	48.57	Horizontal
5925.00	34.82	21.70	56.52	68.20	11.68	Horizontal
11650.00	45.60	2.00	47.60	74.00	26.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	35.72	2.00	37.72	54.00	16.28	Vertical
11650.00	36.31	2.00	38.31	54.00	15.69	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	36.58	20.81	57.39	68.20	10.81	Vertical
5700.00	36.21	21.58	57.79	105.20	47.41	Vertical
5720.00	45.87	21.35	67.22	110.80	43.58	Vertical
5725.00	52.88	21.29	74.17	122.20	48.03	Vertical
11490.00	45.69	2.44	48.13	74.00	25.87	Vertical
5650.00	34.78	20.81	55.59	68.20	12.61	Horizontal
5700.00	34.41	21.58	55.99	105.20	49.21	Horizontal
5720.00	42.76	21.35	64.11	110.80	46.69	Horizontal
5725.00	50.42	21.29	71.71	122.20	50.49	Horizontal
11490.00	45.50	2.44	47.94	74.00	26.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	35.44	2.44	37.88	54.00	16.12	Vertical
11490.00	36.09	2.44	38.53	54.00	15.47	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	45.64	2.74	48.38	74.00	25.62	Vertical
11570.00	45.47	2.74	48.21	74.00	25.79	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	35.24	2.74	37.98	54.00	16.02	Vertical
11570.00	36.08	2.74	38.82	54.00	15.18	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	41.38	21.10	62.48	122.20	59.72	Vertical
5855.00	36.65	21.15	57.80	110.80	53.00	Vertical
5875.00	33.67	21.36	55.03	105.20	50.17	Vertical
5925.00	34.13	21.70	55.83	68.20	12.37	Vertical
11650.00	45.69	2.00	47.69	74.00	26.31	Vertical
5850.00	39.94	21.10	61.04	122.20	61.16	Horizontal
5855.00	35.89	21.15	57.04	110.80	53.76	Horizontal
5875.00	34.50	21.36	55.86	105.20	49.34	Horizontal
5925.00	33.57	21.70	55.27	68.20	12.93	Horizontal
11650.00	45.65	2.00	47.65	74.00	26.35	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	35.40	2.00	37.40	54.00	16.60	Vertical
11650.00	36.02	2.00	38.02	54.00	15.98	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	35.09	20.81	55.90	68.20	12.30	Vertical
5700.00	34.62	21.58	56.20	105.20	49.00	Vertical
5720.00	52.71	21.35	74.06	110.80	36.74	Vertical
5725.00	54.29	21.29	75.58	122.20	46.62	Vertical
11510.00	45.66	2.60	48.26	74.00	25.74	Vertical
5650.00	34.34	20.81	55.15	68.20	13.05	Horizontal
5700.00	34.79	21.58	56.37	105.20	48.83	Horizontal
5720.00	51.92	21.35	73.27	110.80	37.53	Horizontal
5725.00	50.02	21.29	71.31	122.20	50.89	Horizontal
11510.00	45.46	2.60	48.06	74.00	25.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	35.68	2.60	38.28	54.00	15.72	Vertical
11510.00	36.23	2.60	38.83	54.00	15.17	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	34.34	21.10	55.44	122.20	66.76	Vertical
5855.00	33.93	21.15	55.08	110.80	55.72	Vertical
5875.00	34.04	21.36	55.40	105.20	49.80	Vertical
5925.00	33.96	21.70	55.66	68.20	12.54	Vertical
11590.00	45.48	2.73	48.21	74.00	25.79	Vertical
5850.00	34.78	21.10	55.88	122.20	66.32	Horizontal
5855.00	34.60	21.15	55.75	110.80	55.05	Horizontal
5875.00	33.98	21.36	55.34	105.20	49.86	Horizontal
5925.00	34.40	21.70	56.10	68.20	12.10	Horizontal
11590.00	45.68	2.73	48.41	74.00	25.59	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	35.66	2.73	38.39	54.00	15.61	Vertical
11590.00	36.30	2.73	39.03	54.00	14.97	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 8802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	36.10	20.81	56.91	68.20	11.29	Vertical
5700.00	35.77	21.58	57.35	105.20	47.85	Vertical
5720.00	45.38	21.35	66.73	110.80	44.07	Vertical
5725.00	52.42	21.29	73.71	122.20	48.49	Vertical
11490.00	45.68	2.44	48.12	74.00	25.88	Vertical
5650.00	34.29	20.81	55.10	68.20	13.10	Horizontal
5700.00	34.34	21.58	55.92	105.20	49.28	Horizontal
5720.00	42.27	21.35	63.62	110.80	47.18	Horizontal
5725.00	50.25	21.29	71.54	122.20	50.66	Horizontal
11490.00	45.31	2.44	47.75	74.00	26.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	35.60	2.44	38.04	54.00	15.96	Vertical
11490.00	36.26	2.44	38.70	54.00	15.30	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	45.73	2.74	48.47	74.00	25.53	Vertical
11570.00	45.43	2.74	48.17	74.00	25.83	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	35.06	2.74	37.80	54.00	16.20	Vertical
11570.00	36.15	2.74	38.89	54.00	15.11	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	40.97	21.10	62.07	122.20	60.13	Vertical
5855.00	36.24	21.15	57.39	110.80	53.41	Vertical
5875.00	33.50	21.36	54.86	105.20	50.34	Vertical
5925.00	34.01	21.70	55.71	68.20	12.49	Vertical
11650.00	45.71	2.00	47.71	74.00	26.29	Vertical
5850.00	39.50	21.10	60.60	122.20	61.60	Horizontal
5855.00	35.84	21.15	56.99	110.80	53.81	Horizontal
5875.00	34.17	21.36	55.53	105.20	49.67	Horizontal
5925.00	33.28	21.70	54.98	68.20	13.22	Horizontal
11650.00	45.72	2.00	47.72	74.00	26.28	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	35.54	2.00	37.54	54.00	16.46	Vertical
11650.00	35.90	2.00	37.90	54.00	16.10	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	34.68	20.81	55.49	68.20	12.71	Vertical
5700.00	34.17	21.58	55.75	105.20	49.45	Vertical
5720.00	52.64	21.35	73.99	110.80	36.81	Vertical
5725.00	54.02	21.29	75.31	122.20	46.89	Vertical
11510.00	45.56	2.60	48.16	74.00	25.84	Vertical
5650.00	34.33	20.81	55.14	68.20	13.06	Horizontal
5700.00	34.59	21.58	56.17	105.20	49.03	Horizontal
5720.00	51.44	21.35	72.79	110.80	38.01	Horizontal
5725.00	49.66	21.29	70.95	122.20	51.25	Horizontal
11510.00	45.35	2.60	47.95	74.00	26.05	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	35.60	2.60	38.20	54.00	15.80	Vertical
11510.00	36.40	2.60	39.00	54.00	15.00	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	34.21	21.10	55.31	122.20	66.89	Vertical
5855.00	33.70	21.15	54.85	110.80	55.95	Vertical
5875.00	33.76	21.36	55.12	105.20	50.08	Vertical
5925.00	33.60	21.70	55.30	68.20	12.90	Vertical
11590.00	45.62	2.73	48.35	74.00	25.65	Vertical
5850.00	34.77	21.10	55.87	122.20	66.33	Horizontal
5855.00	34.46	21.15	55.61	110.80	55.19	Horizontal
5875.00	33.56	21.36	54.92	105.20	50.28	Horizontal
5925.00	34.31	21.70	56.01	68.20	12.19	Horizontal
11590.00	45.50	2.73	48.23	74.00	25.77	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	35.78	2.73	38.51	54.00	15.49	Vertical
11590.00	36.42	2.73	39.15	54.00	14.85	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT80						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	35.58	20.81	56.39	68.20	11.81	Vertical
5700.00	37.77	21.58	59.35	105.20	45.85	Vertical
5720.00	47.48	21.35	68.83	110.80	41.97	Vertical
5725.00	49.17	21.29	70.46	122.20	51.74	Vertical
5850.00	35.56	21.10	56.66	122.20	65.54	Vertical
5855.00	35.56	21.15	56.71	110.80	54.09	Vertical
5875.00	33.99	21.36	55.35	105.20	49.85	Vertical
5925.00	34.6	21.70	56.30	68.20	11.90	Vertical
11550.00	45.57	2.74	48.31	74.00	25.69	Vertical
5650.00	34.57	20.81	55.38	68.20	12.82	Horizontal
5700.00	36.95	21.58	58.53	105.20	46.67	Horizontal
5720.00	44.22	21.35	65.57	110.80	45.23	Horizontal
5725.00	44.27	21.29	65.56	122.20	56.64	Horizontal
5850.00	35.85	21.10	56.95	122.20	65.25	Horizontal
5855.00	36.79	21.15	57.94	110.80	52.86	Horizontal
5875.00	34.78	21.36	56.14	105.20	49.06	Horizontal
5925.00	33.44	21.70	55.14	68.20	13.06	Horizontal
11550.00	45.48	2.74	48.22	74.00	25.78	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11550.00	35.62	2.74	38.36	54.00	15.64	Vertical
11550.00	36.31	2.74	39.05	54.00	14.95	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----