

# FCC RF Test Report

## (2.4G Wi-Fi)

**Report No.:** JYTSZ-R12-2500765

**Applicant:** SWAGTEK

**Address of Applicant:** 10205 NW 19th Street, STE 101, Miami, FL33172.USA

**Equipment Under Test (EUT)**

Product Name: 4G Tablet

Model No.: T10L PLUS, Grad, Slate

Trade Mark: LOGIC, ISWAG, UNONU

**FCC ID:** O551001923

**Applicable Standards:** FCC CFR Title 47 Part 15C (§15.247)

**Date of Sample Receipt:** 21 May, 2025

**Date of Test:** 22 May, to 25 Jun., 2025

**Date of Report Issued:** 25 Jun., 2025

**Test Result:** PASS

**Project by:** \_\_\_\_\_

**Date:** 25 Jun., 2025

**Reviewed by:** \_\_\_\_\_

**Date:** 25 Jun., 2025

**Approved by:** \_\_\_\_\_

**Date:** 25 Jun., 2025

**Manager**

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | 25 Jun., 2025 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |
|             |               |             |

## 2 Contents

Page

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>Cover Page .....</b>                                           | <b>1</b>  |
| <b>1 Version .....</b>                                            | <b>2</b>  |
| <b>2 Contents.....</b>                                            | <b>3</b>  |
| <b>3 General Information.....</b>                                 | <b>4</b>  |
| 3.1 Client Information .....                                      | 4         |
| 3.2 General Description of E.U.T. ....                            | 4         |
| 3.3 Test Mode and Environment .....                               | 5         |
| 3.4 Description of Test Auxiliary Equipment .....                 | 5         |
| 3.5 Measurement Uncertainty .....                                 | 5         |
| 3.6 Additions to, Deviations, or Exclusions from the Method ..... | 5         |
| 3.7 Laboratory Facility .....                                     | 6         |
| 3.8 Laboratory Location.....                                      | 6         |
| 3.9 Test Instruments List .....                                   | 6         |
| <b>4 Measurement Setup and Procedure .....</b>                    | <b>8</b>  |
| 4.1 Test Channel .....                                            | 8         |
| 4.2 Test Setup .....                                              | 8         |
| 4.3 Test Procedure .....                                          | 10        |
| <b>5 Test Results.....</b>                                        | <b>11</b> |
| 5.1 Summary .....                                                 | 11        |
| 5.1.1 Clause and Data Summary.....                                | 11        |
| 5.1.2 Test Limit.....                                             | 12        |
| 5.2 Emissions in Restricted Frequency Bands.....                  | 13        |
| 5.3 Emissions in Non-restricted Frequency Bands .....             | 29        |

## 3 General Information

### 3.1 Client Information

|                       |                                                 |
|-----------------------|-------------------------------------------------|
| Applicant:            | SWAGTEK                                         |
| Address:              | 10205 NW 19th Street,STE 101,Miami, FL33172.USA |
| Manufacturer/Factory: | SWAGTEK                                         |
| Address:              | 10205 NW 19th Street,STE 101,Miami, FL33172.USA |

### 3.2 General Description of E.U.T.

|                                                  |                                                                                 |
|--------------------------------------------------|---------------------------------------------------------------------------------|
| Product Name:                                    | 4G Tablet                                                                       |
| Model No.:                                       | T10L PLUS, Grad, Slate                                                          |
| Operation Frequency:                             | 2412 MHz - 2462 MHz (802.11b, g, n-HT20)<br>2422 MHz - 2452 MHz (802.11n-HT40)  |
| Channel Numbers:                                 | 11 (802.11b, g, n-HT20)<br>7 (802.11n-HT40, ax-HE40)                            |
| Channel Separation:                              | 5MHz                                                                            |
| Modulation Technology:<br>(IEEE 802.11b)         | DSSS-DBPSK, DQPSK, CCK                                                          |
| Modulation Technology:<br>(IEEE 802.11g/802.11n) | OFDM-BPSK, QPSK, 16QAM, 64QAM                                                   |
| Antenna Type:                                    | Internal Antenna                                                                |
| Antenna Gain:                                    | 0.4 dBi (declare by applicant)                                                  |
| Antenna Transmit Mode:                           | SISO (1TX, 1RX)                                                                 |
| Power Supply:                                    | Rechargeable Li-ion Battery DC3.8V, 5000mAh                                     |
| AC Adapter:                                      | Model: YD2.0AN-003<br>Input: AC100-240V, 50/60Hz, 0.2A<br>Output: DC 5.0V, 2.0A |
| Test Sample Condition:                           | The test samples were provided in good working order with no visible defects.   |
| Remark:                                          | All the model are the same circuit and RF module,except the model names.        |

### 3.3 Test Mode and Environment

| <b>Test Mode:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Transmitting mode:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Keep the EUT in continuous transmitting with modulation |
| <b>Per-scan all kind of data rate, the follow list were the worst case:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                         |
| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Data rate                                               |
| 802.11b                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1Mbps                                                   |
| 802.11g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6Mbps                                                   |
| 802.11n-HT20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 6.5Mbps                                                 |
| 802.11n-HT40                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 13.5Mbps                                                |
| <b>Remark:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                         |
| <ol style="list-style-type: none"> <li>For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11b, g, n, ax modulation mode, found 802.11b modulation mode was worse case mode. The report only reflects the test data of worst mode.</li> <li>Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.</li> </ol> |                                                         |
| <b>Operating Environment:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                         |
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 15°C ~ 35°C                                             |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 20 % ~ 75 % RH                                          |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1008 mbar                                               |
| Voltage:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Nominal: 3.80Vdc, Extreme: Low 3.50Vdc, High 4.35Vdc    |
| Test Engineer:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Robin Gu(Radiated measurement)                          |

### 3.4 Description of Test Auxiliary Equipment

|                                                 |
|-------------------------------------------------|
| The EUT has been tested as an independent unit. |
|-------------------------------------------------|

### 3.5 Measurement Uncertainty

| Parameter                                                                                                                                                                                                                                                                                                            | Expanded Uncertainty<br>(Confidence of 95%(U = 2Uc(y))) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Radiated Emission (30MHz ~ 200MHz) (3m SAC)                                                                                                                                                                                                                                                                          | ±4.6 dB                                                 |
| Radiated Emission (200MHz ~ 1000MHz) (3m SAC)                                                                                                                                                                                                                                                                        | ±5.8 dB                                                 |
| Radiated Emission (1GHz ~ 6GHz) (3m SAC)                                                                                                                                                                                                                                                                             | ±4.5 dB                                                 |
| Radiated Emission (6GHz ~ 18GHz) (3m SAC)                                                                                                                                                                                                                                                                            | 4.7 dB                                                  |
| Radiated Emission (18GHz ~ 40GHz) (3m SAC)                                                                                                                                                                                                                                                                           | 5.34 dB                                                 |
| Radiated Emission (30MHz ~ 1000MHz) (10m SAC)                                                                                                                                                                                                                                                                        | ±4.3 dB                                                 |
| Radiated Emission (30MHz ~ 1GHz) (3m FAR)                                                                                                                                                                                                                                                                            | 3.39 dB                                                 |
| Radiated Emission (1GHz ~ 18GHz) (3m FAR)                                                                                                                                                                                                                                                                            | 5.15 dB                                                 |
| Radiated Emission (18GHz ~ 40GHz) (3m FAR)                                                                                                                                                                                                                                                                           | 5.30 dB                                                 |
| <b>Note:</b> All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance. |                                                         |

### 3.6 Additions to, Deviations, or Exclusions from the Method

|    |
|----|
| No |
|----|

## 3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

## 3.9 Test Instruments List

| Radiated Emission(3m SAC):    |                 |                 |                  |                      |                          |
|-------------------------------|-----------------|-----------------|------------------|----------------------|--------------------------|
| Test Equipment                | Manufacturer    | Model No.       | Manage No.       | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC                        | ETS             | 9m*6m*6m        | WXJ001-1         | 04-14-2021           | 04-13-2026               |
| Loop Antenna                  | Schwarzbeck     | FMZB 1519 B     | WXJ002-4         | 01-03-2025           | 01-02-2026               |
| BiConiLog Antenna             | Schwarzbeck     | VULB9163        | WXJ002           | 01-03-2025           | 01-02-2026               |
| Horn Antenna                  | Schwarzbeck     | BBHA9120D       | WXJ002-2         | 01-03-2025           | 01-02-2026               |
| Horn Antenna                  | Schwarzbeck     | BBHA9170        | WXJ002-5         | 12-25-2024           | 12-24-2025               |
| Pre-amplifier (30MHz ~ 1GHz)  | Schwarzbeck     | BBV9743B        | WXJ001-2         | 12-16-2024           | 12-15-2025               |
| Pre-amplifier (1GHz ~ 18GHz)  | SKET            | LNPA_0118G-50   | WXJ001-3         | 12-16-2024           | 12-15-2025               |
| Pre-amplifier (18GHz ~ 40GHz) | RF System       | TRLA-180400G45B | WXJ002-7         | 12-16-2024           | 12-15-2025               |
| EMI Test Receiver             | Rohde & Schwarz | ESRP7           | WXJ003-1         | 12-16-2024           | 12-15-2025               |
| Spectrum Analyzer             | Rohde & Schwarz | FSP 30          | WXJ004           | 12-16-2024           | 12-15-2025               |
| Spectrum Analyzer             | KEYSIGHT        | N9010B          | WXJ004-2         | 09-09-2024           | 09-08-2025               |
| Coaxial Cable (30MHz ~ 1GHz)  | JYTSZ           | JYT3M-1G-NN-8M  | WXG001-4         | 01-15-2025           | 01-14-2026               |
| Coaxial Cable (1GHz ~ 18GHz)  | JYTSZ           | JYT3M-18G-NN-8M | WXG001-5         | 01-15-2025           | 01-14-2026               |
| Coaxial Cable (18GHz ~ 40GHz) | JYTSZ           | JYT3M-40G-SS-8M | WXG001-7         | 01-15-2025           | 01-14-2026               |
| Band Reject Filter Group      | Tonscend        | JS0806-F        | WXJ089           | N/A                  |                          |
| Test Software                 | Tonscend        | TS+             | Version: 3.0.0.1 |                      |                          |

| Radiated Emission(3m FAR):    |                 |                 |                |                      |                          |
|-------------------------------|-----------------|-----------------|----------------|----------------------|--------------------------|
| Test Equipment                | Manufacturer    | Model No.       | Manage No.     | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m FAR                        | YUNYI           | 9m*6m*6m        | WXJ097         | 06-15-2023           | 06-14-2028               |
| BiConiLog Antenna             | Schwarzbeck     | VULB9163        | WXJ097-2       | 07-01-2024           | 06-30-2025               |
| Biconical Antenna             | Schwarzbeck     | VUBA9117        | WXJ002-1       | 07-01-2024           | 06-30-2027               |
| Horn Antenna                  | Schwarzbeck     | BBHA9120D       | WXJ097-3       | 06-16-2024           | 06-15-2025               |
|                               |                 |                 |                | 06-14-2025           | 06-13-2026               |
| Horn Antenna                  | Schwarzbeck     | BBHA9120D       | WXJ002-3       | 12-25-2024           | 12-24-2025               |
| Horn Antenna                  | Schwarzbeck     | BBHA9170        | WXJ002-5       | 12-25-2024           | 12-24-2025               |
| Horn Antenna                  | Schwarzbeck     | BBHA9170        | WXJ002-6       | 12-25-2024           | 12-24-2025               |
| Pre-amplifier (30MHz ~ 1GHz)  | YUNYI           | PAM-310N        | WXJ097-5       | 04-21-2025           | 04-20-2026               |
| Pre-amplifier (1GHz ~ 18GHz)  | YUNYI           | PAM-118N        | WXJ097-6       | 04-21-2025           | 04-20-2026               |
| Pre-amplifier (18GHz ~ 40GHz) | RF System       | TRLA-180400G45B | WXJ002-7       | 12-16-2024           | 12-15-2025               |
| EMI Test Receiver             | Rohde & Schwarz | ESCI3           | WXJ003         | 12-16-2024           | 12-15-2025               |
| Spectrum Analyzer             | Rohde & Schwarz | FSP 30          | WXJ004         | 12-16-2024           | 12-15-2025               |
| Spectrum Analyzer             | KEYSIGHT        | N9020B          | WXJ081-1       | 06-11-2024           | 06-10-2025               |
|                               |                 |                 |                | 06-09-2025           | 06-08-2026               |
| Coaxial Cable (30MHz ~ 1GHz)  | JYTSZ           | JYT3M-1G-NN-13M | WXG097-1       | 07-30-2024           | 07-29-2025               |
| Coaxial Cable (1GHz ~ 18GHz)  | JYTSZ           | JYT3M-18G-NN-8M | WXG097-2       | 07-30-2024           | 07-29-2025               |
| Coaxial Cable (18GHz ~ 40GHz) | JYTSZ           | JYT3M-40G-SS-8M | WXG097-3       | 07-30-2024           | 07-29-2025               |
| High Band Reject Filter Group | Tonscend        | JS0806-F        | WXJ089         | N/A                  |                          |
| Low Band Reject Filter Group  | Tonscend        | JS0806-F        | WXJ097-4       | N/A                  |                          |
| Test Software                 | Tonscend        | TS+             | Version: 5.0.0 |                      |                          |

## 4 Measurement Setup and Procedure

### 4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:


| 802.11b, 802.11g, 802.11n-HT20 |                 |                |                 |                 |                 |
|--------------------------------|-----------------|----------------|-----------------|-----------------|-----------------|
| Lowest channel                 |                 | Middle channel |                 | Highest channel |                 |
| Channel No.                    | Frequency (MHz) | Channel No.    | Frequency (MHz) | Channel No.     | Frequency (MHz) |
| 1                              | 2412            | 6              | 2437            | 11              | 2462            |

| 802.11n-HT40   |                 |                |                 |                 |                 |
|----------------|-----------------|----------------|-----------------|-----------------|-----------------|
| Lowest channel |                 | Middle channel |                 | Highest channel |                 |
| Channel No.    | Frequency (MHz) | Channel No.    | Frequency (MHz) | Channel No.     | Frequency (MHz) |
| 3              | 2422            | 6              | 2437            | 9               | 2452            |

### 4.2 Test Setup

#### 1) Conducted emission measurement:

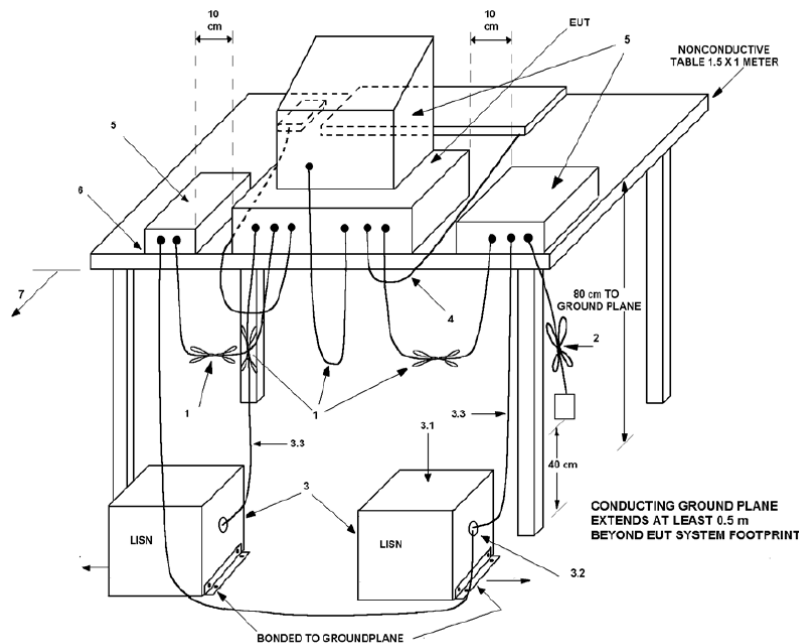


**Note:** The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.


#### 2) Radiated emission measurement:

Below 1GHz (3m SAC)



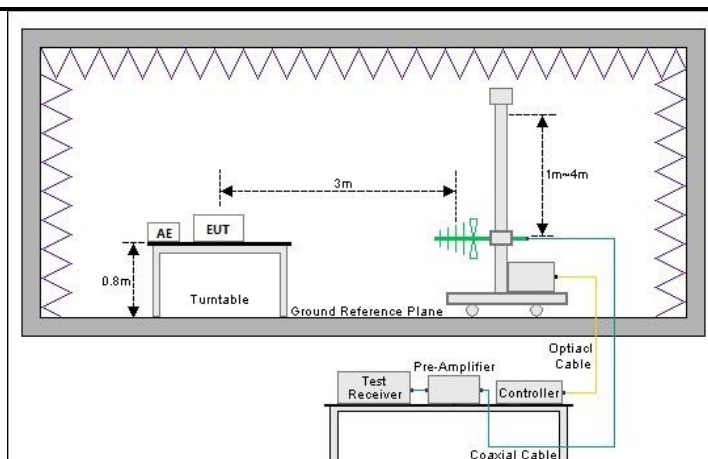

Above 1GHz (3m FAR)

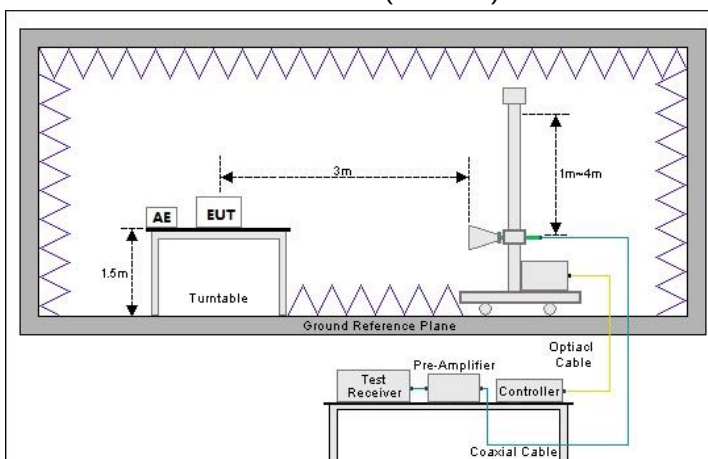

## 4.3 Test Procedure

| Test method       | Test step                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated emission | <p><b>For below 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m .</li> <li>2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> <p><b>For above 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> |

## 5 Test Results

### 5.1 Summary

#### 5.1.1 Clause and Data Summary

This report was amended on FCC ID: O551001923 follow FCC Class II Permissive Change. The original report: JYTSZ-R12-2500281, issued by JianYan Testing Group Shenzhen Co., Ltd. The differences between them as below: Update the 234G and BT&WIFI antenna, update the screen and screen backlight, update the battery, speaker, USB Cable and the adapter.  
So need to retest spurious radiation.


| Test items                                                                                                                                                                                                                                                                                                                                                                              | Standard clause                                                | Test data                                                          | Result                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Antenna Requirement                                                                                                                                                                                                                                                                                                                                                                     | 15.203<br>15.247 (b)(4)                                        | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| AC Power Line Conducted Emission                                                                                                                                                                                                                                                                                                                                                        | 15.207                                                         | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| Duty Cycle                                                                                                                                                                                                                                                                                                                                                                              | ANSI C63.10-2013                                               | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| Conducted Output Power                                                                                                                                                                                                                                                                                                                                                                  | 15.247 (b)(3)                                                  | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| 6dB Emission Bandwidth<br>99% Occupied Bandwidth                                                                                                                                                                                                                                                                                                                                        | 15.247 (a)(2)                                                  | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| Power Spectral Density                                                                                                                                                                                                                                                                                                                                                                  | 15.247 (e)                                                     | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| Band-edge Emission<br>Conduction Spurious Emission                                                                                                                                                                                                                                                                                                                                      | 15.247 (d)                                                     | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. | Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281. |
| Emissions in Restricted Frequency Bands                                                                                                                                                                                                                                                                                                                                                 | 15.205<br>15.247 (d)                                           | See Section 5.3                                                    | Pass                                                               |
| Emissions in Non-restricted Frequency Bands                                                                                                                                                                                                                                                                                                                                             | 15.209<br>15.247(d)                                            | See Section 5.4                                                    | Pass                                                               |
| <b>Remark:</b><br>1. Pass: The EUT complies with the essential requirements in the standard.<br>2. N/A: Not Applicable.<br>3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).<br>4. Please refer to FCC ID: O551001923, report No.: JYTSZ-R12-2500281 issued by JianYan Testing Group Shenzhen Co., Ltd. |                                                                |                                                                    |                                                                    |
| <b>Test Method:</b>                                                                                                                                                                                                                                                                                                                                                                     | ANSI C63.10-2013<br>KDB 558074 D01 15.247 Meas Guidance v05r02 |                                                                    |                                                                    |

### 5.1.2 Test Limit

| Test items                                  | Limit                                                             |                     |       |
|---------------------------------------------|-------------------------------------------------------------------|---------------------|-------|
| Emissions in Restricted Frequency Bands     | Frequency (MHz)                                                   | Limit (dBμV/m)      |       |
|                                             |                                                                   | @ 3m                | @ 10m |
|                                             | 30 – 88                                                           | 40.0                | 30.0  |
|                                             | 88 – 216                                                          | 43.5                | 33.5  |
|                                             | 216 – 960                                                         | 46.0                | 36.0  |
|                                             | 960 – 1000                                                        | 54.0                | 44.0  |
|                                             | Note: The more stringent limit applies at transition frequencies. |                     |       |
|                                             | Frequency                                                         | Limit (dBμV/m) @ 3m |       |
|                                             |                                                                   | Average             | Peake |
|                                             | Above 1 GHz                                                       | 54.0                | 74.0  |
| Emissions in Non-restricted Frequency Bands | Note: The measurement bandwidth shall be 1 MHz or greater.        |                     |       |

## 5.2 Emissions in Restricted Frequency Bands

|               |                |                |                 |
|---------------|----------------|----------------|-----------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu       | Test mode:     | 802.11b Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Vertical        |
| Test Voltage: | DC 3.8V        |                |                 |

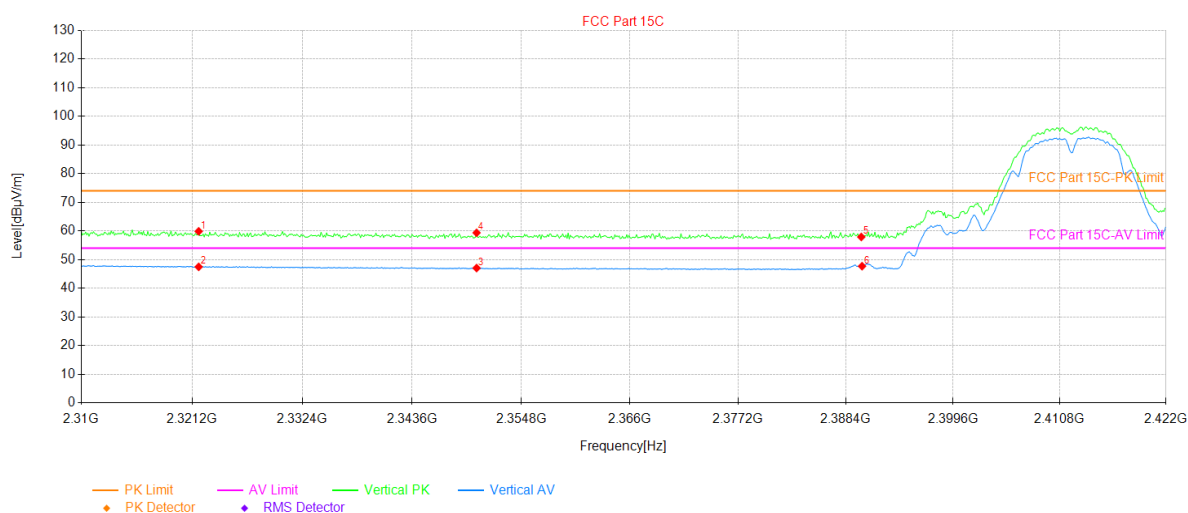


| Suspected Data List |             |                |               |                |                |             |           |          |         |          |
|---------------------|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
| 1                   | 2321.87     | 23.46          | 36.37         | 59.83          | 74.00          | 14.17       | 319       | PK       | PASS    | Vertical |
| 2                   | 2321.87     | 11.08          | 36.37         | 47.45          | 54.00          | 6.55        | 282       | AV       | PASS    | Vertical |
| 3                   | 2350.21     | 11.06          | 35.97         | 47.03          | 54.00          | 6.97        | 58        | AV       | PASS    | Vertical |
| 4                   | 2350.21     | 23.36          | 35.97         | 59.33          | 74.00          | 14.67       | 129       | PK       | PASS    | Vertical |
| 5                   | 2390.00     | 21.96          | 35.93         | 57.89          | 74.00          | 16.11       | 21        | PK       | PASS    | Vertical |
| 6                   | 2390.08     | 11.75          | 35.93         | 47.68          | 54.00          | 6.32        | 21        | AV       | PASS    | Vertical |

### Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                |                |                 |
|---------------|----------------|----------------|-----------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu       | Test mode:     | 802.11b Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Horizontal      |
| Test Voltage: | DC 3.8V        |                |                 |

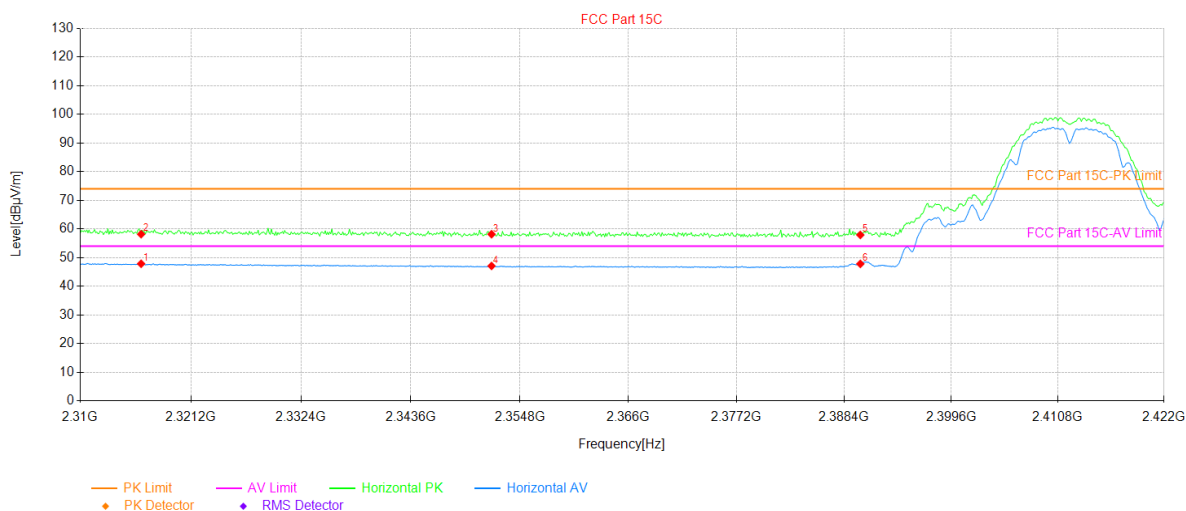


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2316.16     | 11.36          | 36.47         | 47.83          | 54.00          | 6.17        | 287       | AV       | PASS    | Horizontal |
| 2   | 2316.16     | 21.68          | 36.47         | 58.15          | 74.00          | 15.85       | 357       | PK       | PASS    | Horizontal |
| 3   | 2351.89     | 22.16          | 35.97         | 58.13          | 74.00          | 15.87       | 160       | PK       | PASS    | Horizontal |
| 4   | 2351.89     | 11.10          | 35.97         | 47.07          | 54.00          | 6.93        | 316       | AV       | PASS    | Horizontal |
| 5   | 2390.08     | 21.96          | 35.93         | 57.89          | 74.00          | 16.11       | 327       | PK       | PASS    | Horizontal |
| 6   | 2390.08     | 11.86          | 35.93         | 47.79          | 54.00          | 6.21        | 353       | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                 |
|---------------|-----------------|----------------|-----------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu        | Test mode:     | 802.11b Tx mode |
| Test Channel: | Highest channel | Polarization:  | Vertical        |
| Test Voltage: | DC 3.8V         |                |                 |

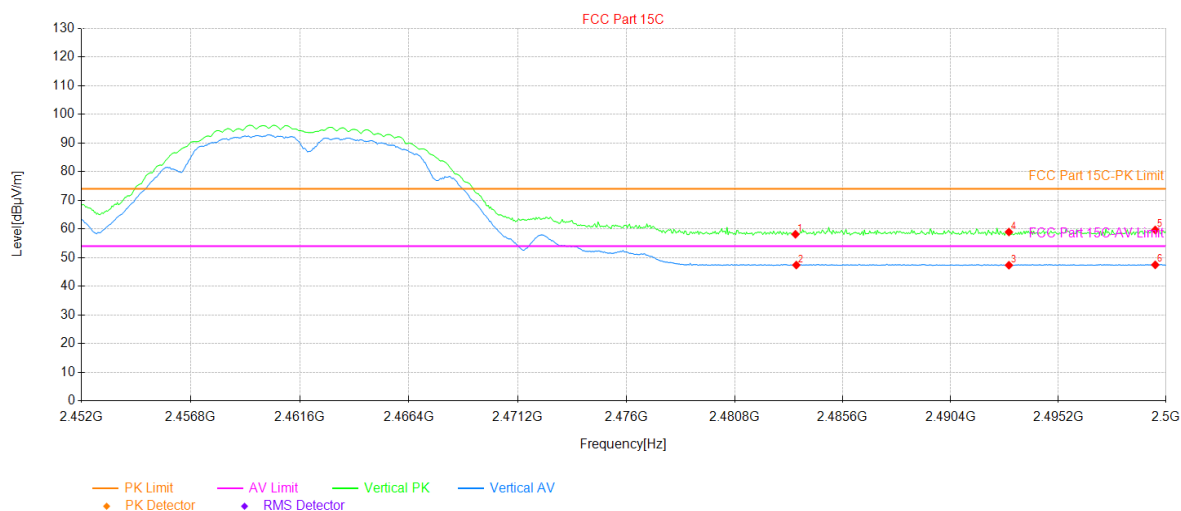


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2483.50     | 21.38          | 36.74         | 58.12          | 74.00          | 15.88       | 218       | PK       | PASS    | Vertical |
| 2   | 2483.54     | 10.64          | 36.74         | 47.38          | 54.00          | 6.62        | 300       | AV       | PASS    | Vertical |
| 3   | 2492.99     | 10.56          | 36.76         | 47.32          | 54.00          | 6.68        | 177       | AV       | PASS    | Vertical |
| 4   | 2492.99     | 22.14          | 36.76         | 58.90          | 74.00          | 15.10       | 270       | PK       | PASS    | Vertical |
| 5   | 2499.52     | 22.85          | 36.78         | 59.63          | 74.00          | 14.37       | 267       | PK       | PASS    | Vertical |
| 6   | 2499.52     | 10.68          | 36.78         | 47.46          | 54.00          | 6.54        | 214       | AV       | PASS    | Vertical |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                 |
|---------------|-----------------|----------------|-----------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu        | Test mode:     | 802.11b Tx mode |
| Test Channel: | Highest channel | Polarization:  | Horizontal      |
| Test Voltage: | DC 3.8V         |                |                 |

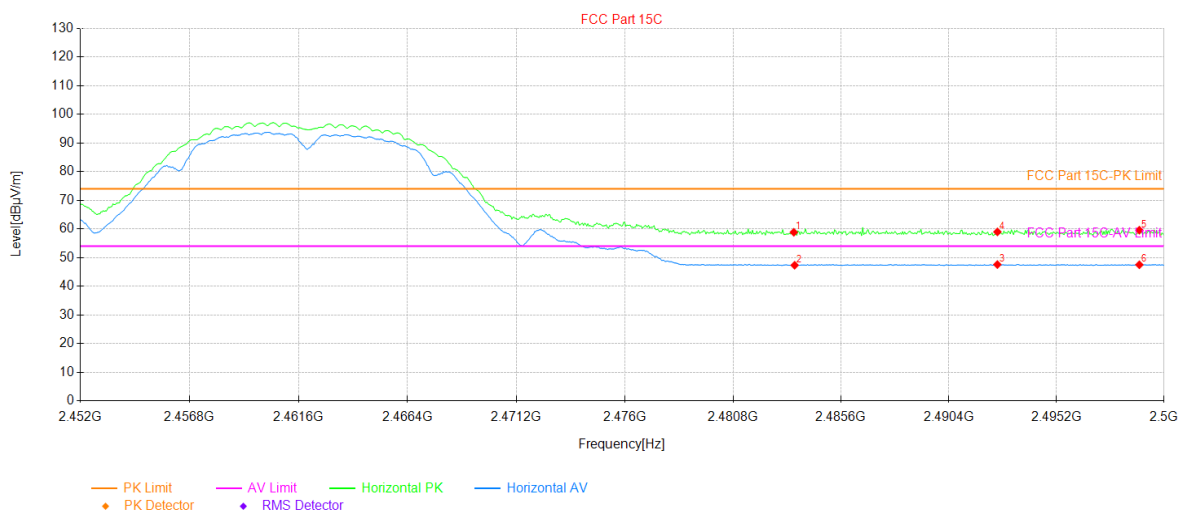

## Suspected Data List


| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2483.50     | 22.07          | 36.74         | 58.81          | 74.00          | 15.19       | 251       | PK       | PASS    | Horizontal |
| 2   | 2483.54     | 10.58          | 36.74         | 47.32          | 54.00          | 6.68        | 2         | AV       | PASS    | Horizontal |
| 3   | 2492.56     | 10.80          | 36.76         | 47.56          | 54.00          | 6.44        | 236       | AV       | PASS    | Horizontal |
| 4   | 2492.56     | 22.20          | 36.76         | 58.96          | 74.00          | 15.04       | 68        | PK       | PASS    | Horizontal |
| 5   | 2498.90     | 22.77          | 36.77         | 59.54          | 74.00          | 14.46       | 165       | PK       | PASS    | Horizontal |
| 6   | 2498.90     | 10.72          | 36.77         | 47.49          | 54.00          | 6.51        | 116       | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



|               |                |                |                 |
|---------------|----------------|----------------|-----------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu       | Test mode:     | 802.11g Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Vertical        |
| Test Voltage: | DC 3.8V        |                |                 |

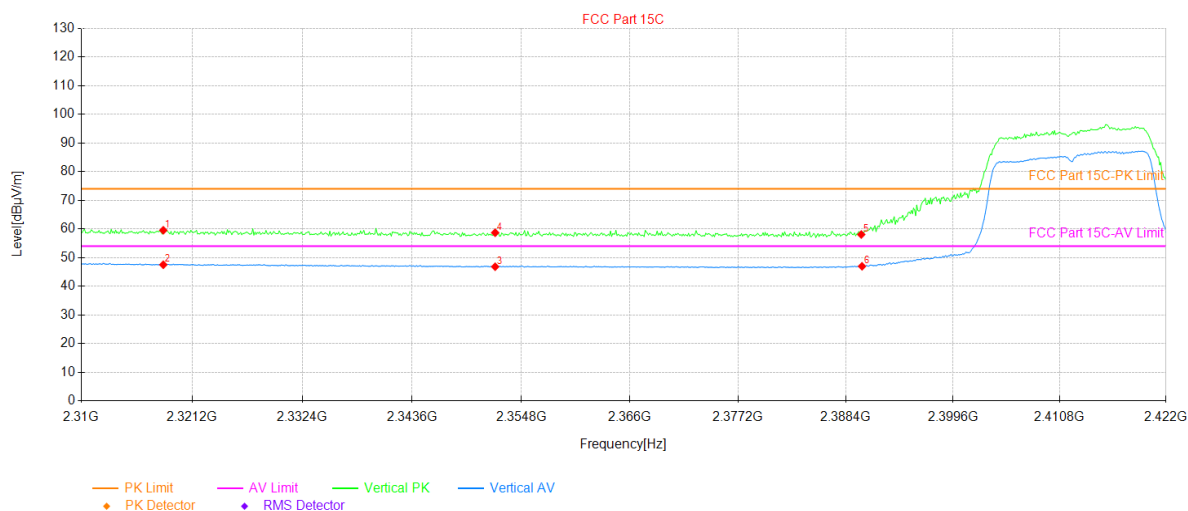


### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2318.29     | 23.08          | 36.44         | 59.52          | 74.00          | 14.48       | 75        | PK       | PASS    | Vertical |
| 2   | 2318.29     | 11.04          | 36.44         | 47.48          | 54.00          | 6.52        | 300       | AV       | PASS    | Vertical |
| 3   | 2352.11     | 10.83          | 35.97         | 46.80          | 54.00          | 7.20        | 98        | AV       | PASS    | Vertical |
| 4   | 2352.11     | 22.69          | 35.97         | 58.66          | 74.00          | 15.34       | 322       | PK       | PASS    | Vertical |
| 5   | 2390.00     | 22.11          | 35.93         | 58.04          | 74.00          | 15.96       | 277       | PK       | PASS    | Vertical |
| 6   | 2390.08     | 11.02          | 35.93         | 46.95          | 54.00          | 7.05        | 23        | AV       | PASS    | Vertical |

### Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                |                |                 |
|---------------|----------------|----------------|-----------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu       | Test mode:     | 802.11g Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Horizontal      |
| Test Voltage: | DC 3.8V        |                |                 |

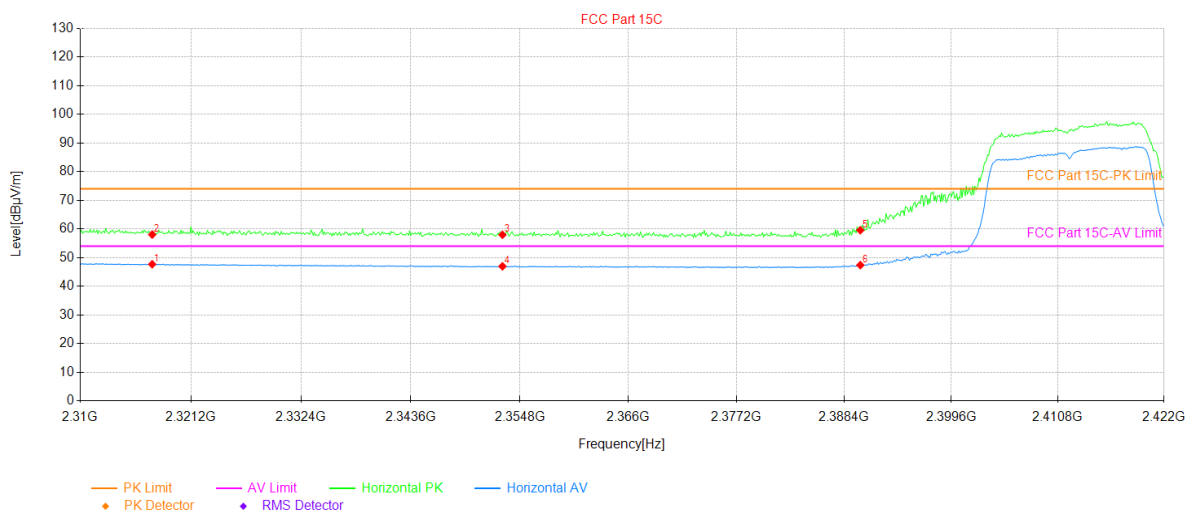


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2317.28     | 11.21          | 36.45         | 47.66          | 54.00          | 6.34        | 83        | AV       | PASS    | Horizontal |
| 2   | 2317.28     | 21.56          | 36.45         | 58.01          | 74.00          | 15.99       | 246       | PK       | PASS    | Horizontal |
| 3   | 2353.01     | 21.97          | 35.97         | 57.94          | 74.00          | 16.06       | 49        | PK       | PASS    | Horizontal |
| 4   | 2353.01     | 10.97          | 35.97         | 46.94          | 54.00          | 7.06        | 298       | AV       | PASS    | Horizontal |
| 5   | 2390.08     | 23.61          | 35.93         | 59.54          | 74.00          | 14.46       | 127       | PK       | PASS    | Horizontal |
| 6   | 2390.08     | 11.44          | 35.93         | 47.37          | 54.00          | 6.63        | 127       | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                 |
|---------------|-----------------|----------------|-----------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu        | Test mode:     | 802.11g Tx mode |
| Test Channel: | Highest channel | Polarization:  | Vertical        |
| Test Voltage: | DC 3.8V         |                |                 |

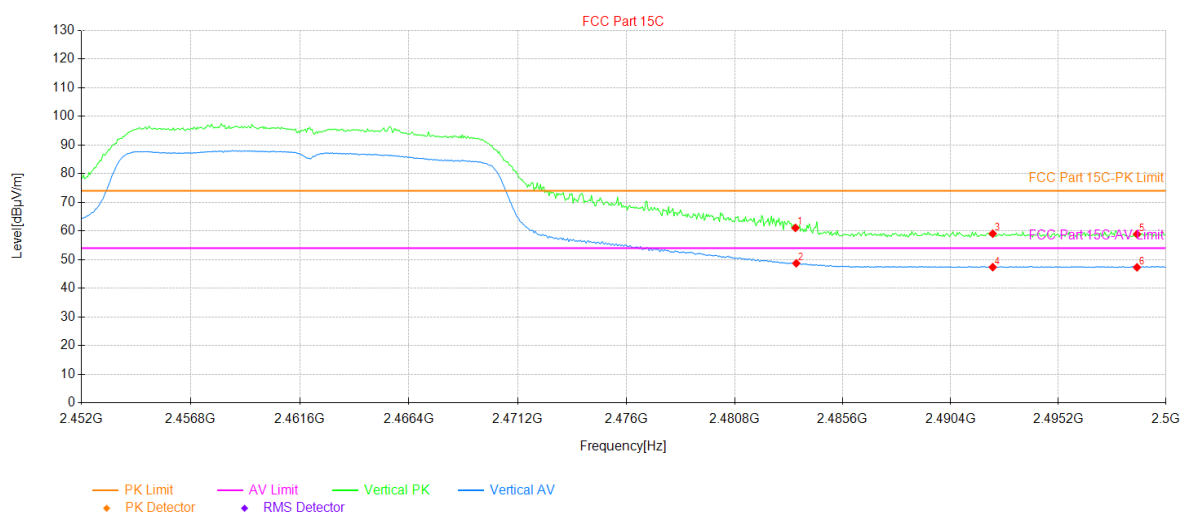


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2483.50     | 24.30          | 36.74         | 61.04          | 74.00          | 12.96       | 206       | PK       | PASS    | Vertical |
| 2   | 2483.54     | 11.95          | 36.74         | 48.69          | 54.00          | 5.31        | 206       | AV       | PASS    | Vertical |
| 3   | 2492.27     | 22.25          | 36.77         | 59.02          | 74.00          | 14.98       | 285       | PK       | PASS    | Vertical |
| 4   | 2492.27     | 10.57          | 36.77         | 47.34          | 54.00          | 6.66        | 68        | AV       | PASS    | Vertical |
| 5   | 2498.70     | 22.09          | 36.77         | 58.86          | 74.00          | 15.14       | 356       | PK       | PASS    | Vertical |
| 6   | 2498.70     | 10.51          | 36.77         | 47.28          | 54.00          | 6.72        | 270       | AV       | PASS    | Vertical |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                 |
|---------------|-----------------|----------------|-----------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS       |
| Test By:      | Robin Gu        | Test mode:     | 802.11g Tx mode |
| Test Channel: | Highest channel | Polarization:  | Horizontal      |
| Test Voltage: | DC 3.8V         |                |                 |

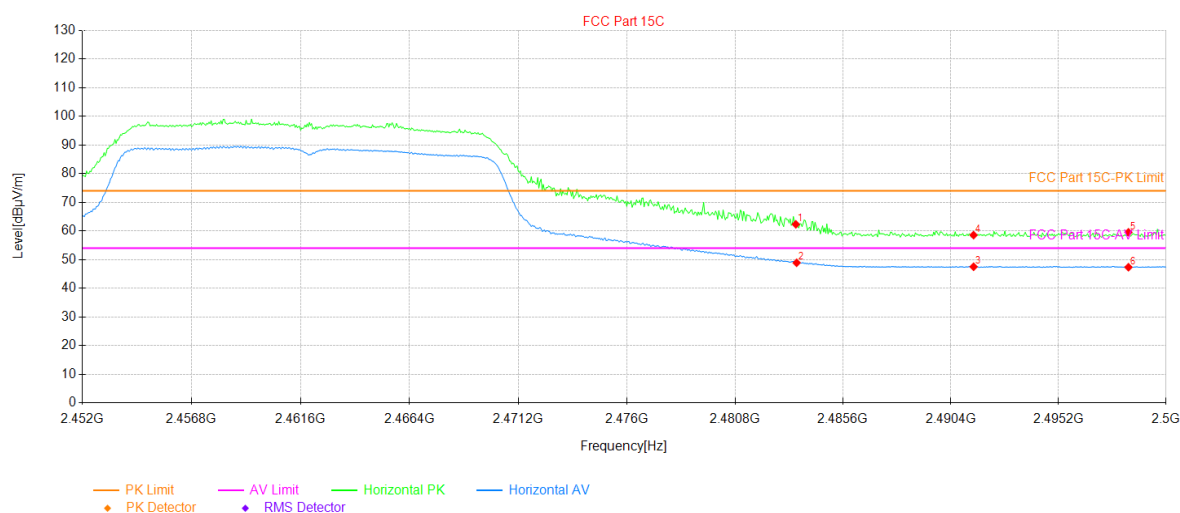


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2483.50     | 25.55          | 36.74         | 62.29          | 74.00          | 11.71       | 19        | PK       | PASS    | Horizontal |
| 2   | 2483.54     | 12.13          | 36.74         | 48.87          | 54.00          | 5.13        | 27        | AV       | PASS    | Horizontal |
| 3   | 2491.41     | 10.73          | 36.76         | 47.49          | 54.00          | 6.51        | 262       | AV       | PASS    | Horizontal |
| 4   | 2491.41     | 21.77          | 36.76         | 58.53          | 74.00          | 15.47       | 251       | PK       | PASS    | Horizontal |
| 5   | 2498.32     | 22.75          | 36.77         | 59.52          | 74.00          | 14.48       | 310       | PK       | PASS    | Horizontal |
| 6   | 2498.32     | 10.56          | 36.77         | 47.33          | 54.00          | 6.67        | 2         | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                |                |                      |
|---------------|----------------|----------------|----------------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu       | Test mode:     | 802.11n-HT20 Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Vertical             |
| Test Voltage: | DC 3.8V        |                |                      |

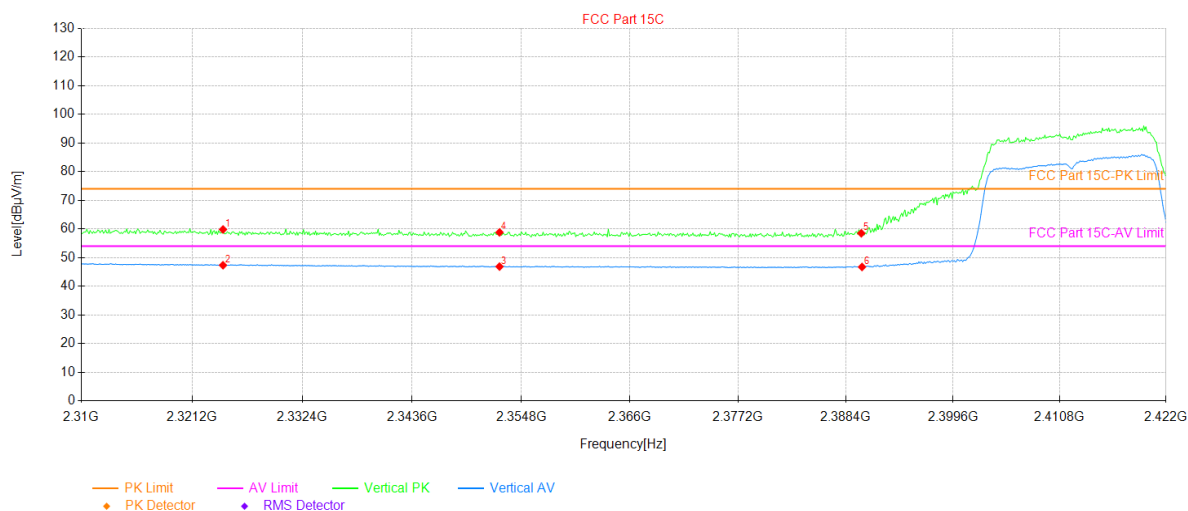


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2324.34     | 23.46          | 36.33         | 59.79          | 74.00          | 14.21       | 72        | PK       | PASS    | Vertical |
| 2   | 2324.34     | 10.99          | 36.33         | 47.32          | 54.00          | 6.68        | 349       | AV       | PASS    | Vertical |
| 3   | 2352.56     | 10.87          | 35.97         | 46.84          | 54.00          | 7.16        | 128       | AV       | PASS    | Vertical |
| 4   | 2352.56     | 22.81          | 35.97         | 58.78          | 74.00          | 15.22       | 184       | PK       | PASS    | Vertical |
| 5   | 2390.00     | 22.54          | 35.93         | 58.47          | 74.00          | 15.53       | 76        | PK       | PASS    | Vertical |
| 6   | 2390.08     | 10.79          | 35.93         | 46.72          | 54.00          | 7.28        | 266       | AV       | PASS    | Vertical |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                |                |                      |
|---------------|----------------|----------------|----------------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu       | Test mode:     | 802.11n-HT20 Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Horizontal           |
| Test Voltage: | DC 3.8V        |                |                      |

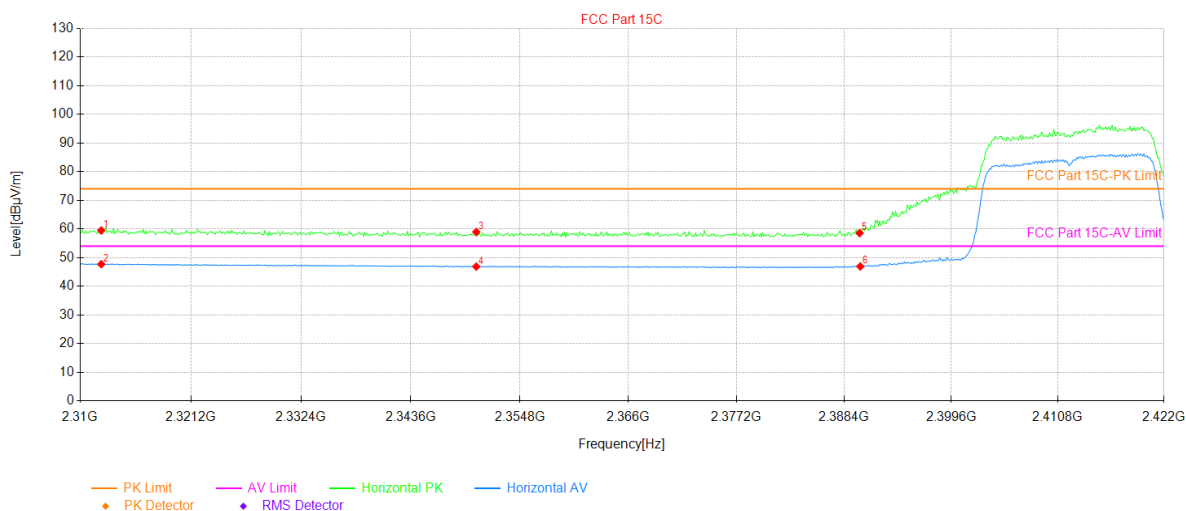


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2312.13     | 22.90          | 36.54         | 59.44          | 74.00          | 14.56       | 83        | PK       | PASS    | Horizontal |
| 2   | 2312.13     | 11.14          | 36.54         | 47.68          | 54.00          | 6.32        | 170       | AV       | PASS    | Horizontal |
| 3   | 2350.32     | 22.93          | 35.97         | 58.90          | 74.00          | 15.10       | 125       | PK       | PASS    | Horizontal |
| 4   | 2350.32     | 10.87          | 35.97         | 46.84          | 54.00          | 7.16        | 61        | AV       | PASS    | Horizontal |
| 5   | 2390.00     | 22.61          | 35.93         | 58.54          | 74.00          | 15.46       | 360       | PK       | PASS    | Horizontal |
| 6   | 2390.08     | 10.96          | 35.93         | 46.89          | 54.00          | 7.11        | 117       | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                      |
|---------------|-----------------|----------------|----------------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu        | Test mode:     | 802.11n-HT20 Tx mode |
| Test Channel: | Highest channel | Polarization:  | Vertical             |
| Test Voltage: | DC 3.8V         |                |                      |

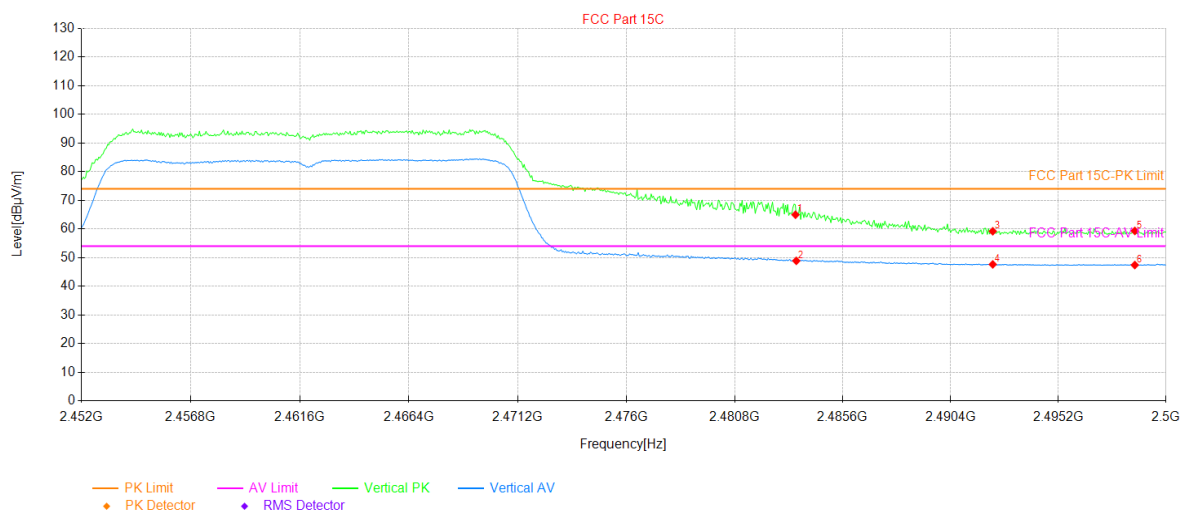


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2483.50     | 28.20          | 36.74         | 64.94          | 74.00          | 9.06        | 42        | PK       | PASS    | Vertical |
| 2   | 2483.54     | 12.11          | 36.74         | 48.85          | 54.00          | 5.15        | 218       | AV       | PASS    | Vertical |
| 3   | 2492.27     | 22.39          | 36.77         | 59.16          | 74.00          | 14.84       | 120       | PK       | PASS    | Vertical |
| 4   | 2492.27     | 10.84          | 36.77         | 47.61          | 54.00          | 6.39        | 206       | AV       | PASS    | Vertical |
| 5   | 2498.61     | 22.52          | 36.77         | 59.29          | 74.00          | 14.71       | 46        | PK       | PASS    | Vertical |
| 6   | 2498.61     | 10.62          | 36.77         | 47.39          | 54.00          | 6.61        | 154       | AV       | PASS    | Vertical |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                      |
|---------------|-----------------|----------------|----------------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu        | Test mode:     | 802.11n-HT20 Tx mode |
| Test Channel: | Highest channel | Polarization:  | Horizontal           |
| Test Voltage: | DC 3.8V         |                |                      |

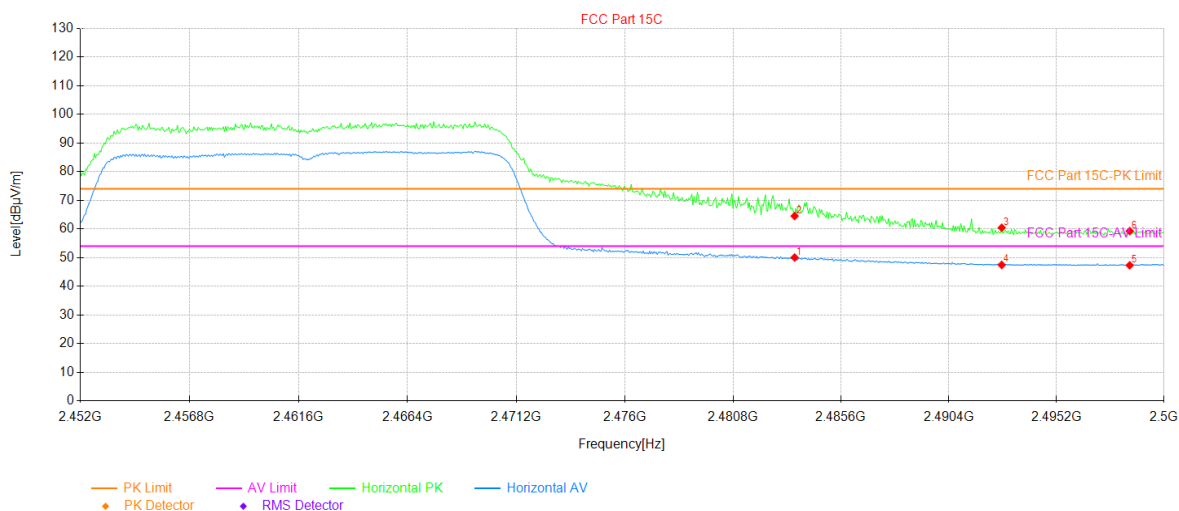


| Suspected Data List |             |                |               |                |                |             |           |          |         |            |
|---------------------|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
| 1                   | 2483.54     | 13.27          | 36.74         | 50.01          | 54.00          | 3.99        | 23        | AV       | PASS    | Horizontal |
| 2                   | 2483.54     | 27.74          | 36.74         | 64.48          | 74.00          | 9.52        | 2         | PK       | PASS    | Horizontal |
| 3                   | 2492.75     | 23.62          | 36.76         | 60.38          | 74.00          | 13.62       | 23        | PK       | PASS    | Horizontal |
| 4                   | 2492.75     | 10.68          | 36.76         | 47.44          | 54.00          | 6.56        | 347       | AV       | PASS    | Horizontal |
| 5                   | 2498.46     | 10.53          | 36.77         | 47.30          | 54.00          | 6.70        | 235       | AV       | PASS    | Horizontal |
| 6                   | 2498.46     | 22.47          | 36.77         | 59.24          | 74.00          | 14.76       | 52        | PK       | PASS    | Horizontal |

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



|               |                |                |                      |
|---------------|----------------|----------------|----------------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu       | Test mode:     | 802.11n-HT40 Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Vertical             |
| Test Voltage: | DC 3.8V        |                |                      |

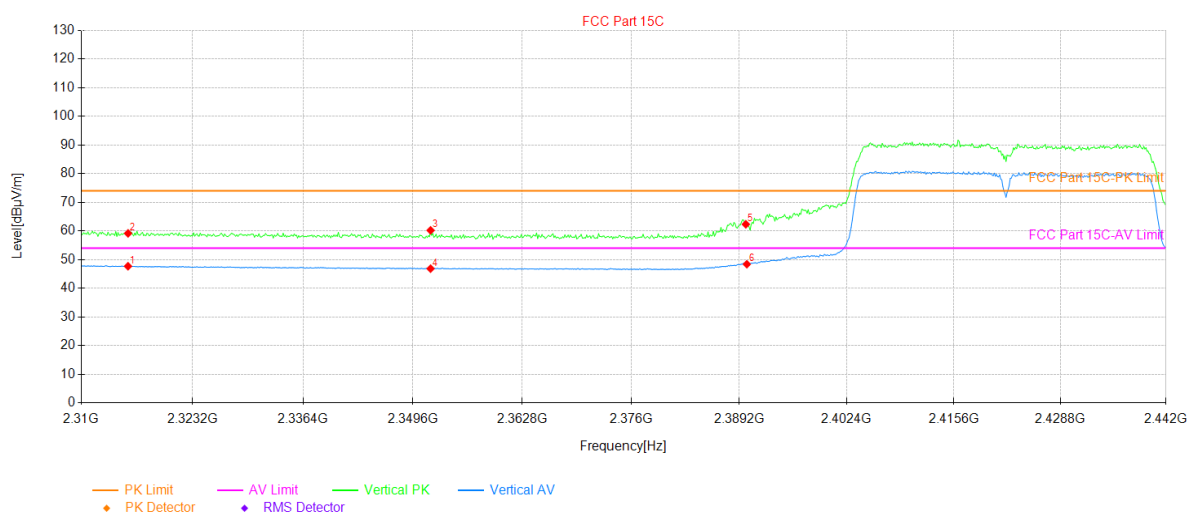


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2315.54     | 11.19          | 36.48         | 47.67          | 54.00          | 6.33        | 293       | AV       | PASS    | Vertical |
| 2   | 2315.54     | 22.65          | 36.48         | 59.13          | 74.00          | 14.87       | 169       | PK       | PASS    | Vertical |
| 3   | 2351.71     | 24.21          | 35.97         | 60.18          | 74.00          | 13.82       | 65        | PK       | PASS    | Vertical |
| 4   | 2351.71     | 10.86          | 35.97         | 46.83          | 54.00          | 7.17        | 68        | AV       | PASS    | Vertical |
| 5   | 2390.00     | 26.38          | 35.93         | 62.31          | 74.00          | 11.69       | 31        | PK       | PASS    | Vertical |
| 6   | 2390.12     | 12.45          | 35.93         | 48.38          | 54.00          | 5.62        | 304       | AV       | PASS    | Vertical |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                |                |                      |
|---------------|----------------|----------------|----------------------|
| Product Name: | 4G Tablet      | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu       | Test mode:     | 802.11n-HT40 Tx mode |
| Test Channel: | Lowest channel | Polarization:  | Horizontal           |
| Test Voltage: | DC 3.8V        |                |                      |

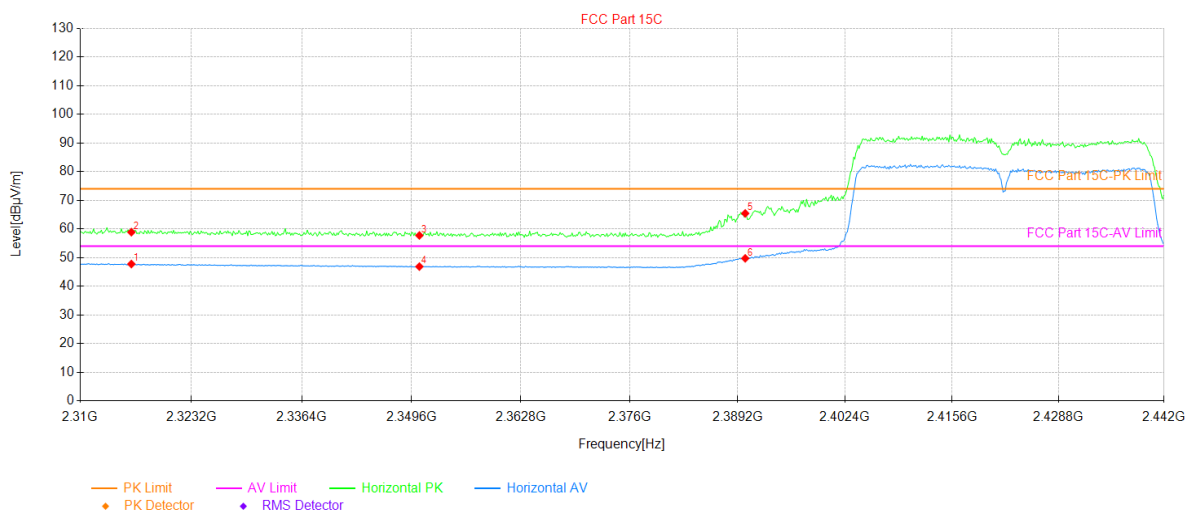


## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2316.07     | 11.28          | 36.47         | 47.75          | 54.00          | 6.25        | 46        | AV       | PASS    | Horizontal |
| 2   | 2316.07     | 22.39          | 36.47         | 58.86          | 74.00          | 15.14       | 308       | PK       | PASS    | Horizontal |
| 3   | 2350.52     | 21.74          | 35.97         | 57.71          | 74.00          | 16.29       | 241       | PK       | PASS    | Horizontal |
| 4   | 2350.52     | 10.88          | 35.97         | 46.85          | 54.00          | 7.15        | 267       | AV       | PASS    | Horizontal |
| 5   | 2390.12     | 29.46          | 35.93         | 65.39          | 74.00          | 8.61        | 124       | PK       | PASS    | Horizontal |
| 6   | 2390.12     | 13.79          | 35.93         | 49.72          | 54.00          | 4.28        | 124       | AV       | PASS    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                      |
|---------------|-----------------|----------------|----------------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu        | Test mode:     | 802.11n-HT40 Tx mode |
| Test Channel: | Highest channel | Polarization:  | Vertical             |
| Test Voltage: | DC 3.8V         |                |                      |

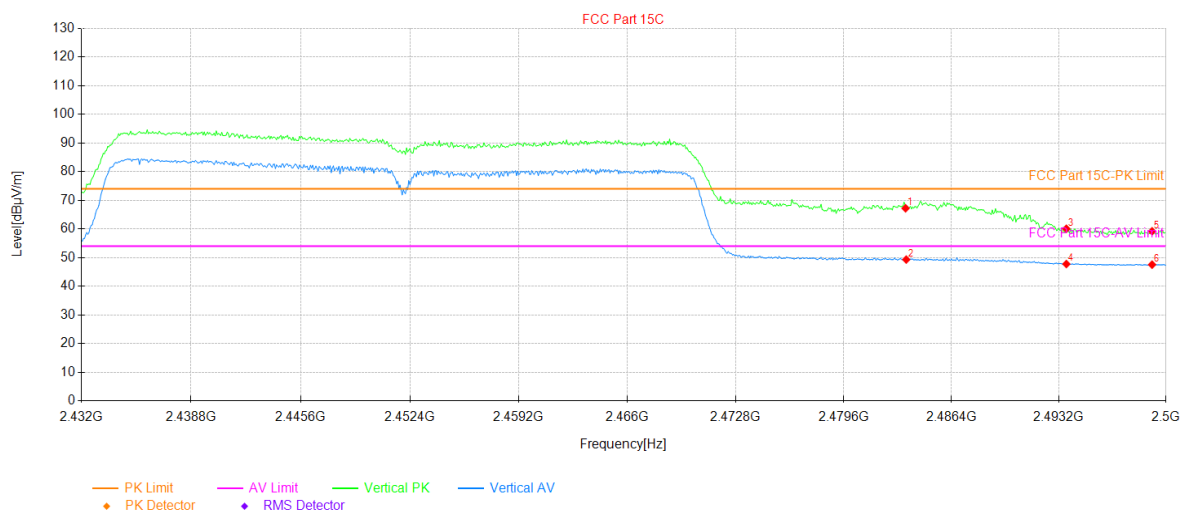


### Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|----------|
| 1   | 2483.50     | 30.45          | 36.74         | 67.19          | 74.00          | 6.81        | 221       | PK       | PASS    | Vertical |
| 2   | 2483.54     | 12.55          | 36.74         | 49.29          | 54.00          | 4.71        | 195       | AV       | PASS    | Vertical |
| 3   | 2493.68     | 23.27          | 36.76         | 60.03          | 74.00          | 13.97       | 23        | PK       | PASS    | Vertical |
| 4   | 2493.68     | 10.98          | 36.76         | 47.74          | 54.00          | 6.26        | 207       | AV       | PASS    | Vertical |
| 5   | 2499.12     | 22.39          | 36.77         | 59.16          | 74.00          | 14.84       | 91        | PK       | PASS    | Vertical |
| 6   | 2499.12     | 10.76          | 36.77         | 47.53          | 54.00          | 6.47        | 99        | AV       | PASS    | Vertical |

### Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

|               |                 |                |                      |
|---------------|-----------------|----------------|----------------------|
| Product Name: | 4G Tablet       | Product Model: | T10L PLUS            |
| Test By:      | Robin Gu        | Test mode:     | 802.11n-HT40 Tx mode |
| Test Channel: | Highest channel | Polarization:  | Horizontal           |
| Test Voltage: | DC 3.8V         |                |                      |

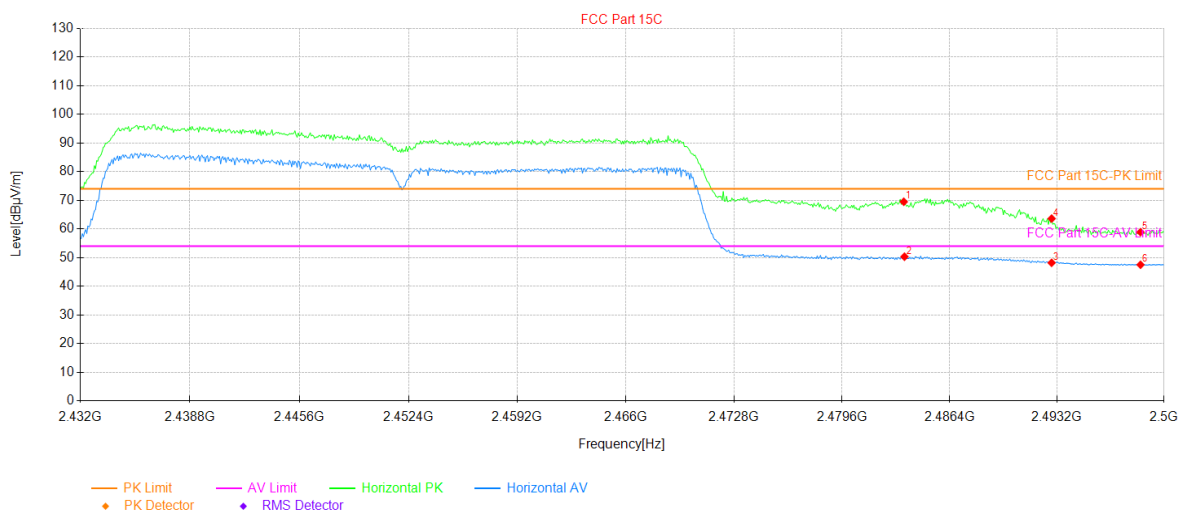

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Angle [°] | Detector | Verdict | Polarity   |
|-----|-------------|----------------|---------------|----------------|----------------|-------------|-----------|----------|---------|------------|
| 1   | 2483.50     | 32.73          | 36.74         | 69.47          | 74.00          | 4.53        | 19        | PK       | PASS    | Horizontal |
| 2   | 2483.54     | 13.55          | 36.74         | 50.29          | 54.00          | 3.71        | 19        | AV       | PASS    | Horizontal |
| 3   | 2492.86     | 11.41          | 36.76         | 48.17          | 54.00          | 5.83        | 23        | AV       | PASS    | Horizontal |
| 4   | 2492.86     | 26.82          | 36.76         | 63.58          | 74.00          | 10.42       | 31        | PK       | PASS    | Horizontal |
| 5   | 2498.50     | 22.09          | 36.77         | 58.86          | 74.00          | 15.14       | 19        | PK       | PASS    | Horizontal |
| 6   | 2498.50     | 10.71          | 36.77         | 47.48          | 54.00          | 6.52        | 27        | AV       | PASS    | Horizontal |


## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

## 5.3 Emissions in Non-restricted Frequency Bands

Below 1GHz:

|                 |                |                |                 |
|-----------------|----------------|----------------|-----------------|
| Product Name:   | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:        | Kiran Zeng     | Test mode:     | 2.4G Wi-Fi mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization:  | Vertical        |
| Test Voltage:   | DC 3.8V        |                |                 |

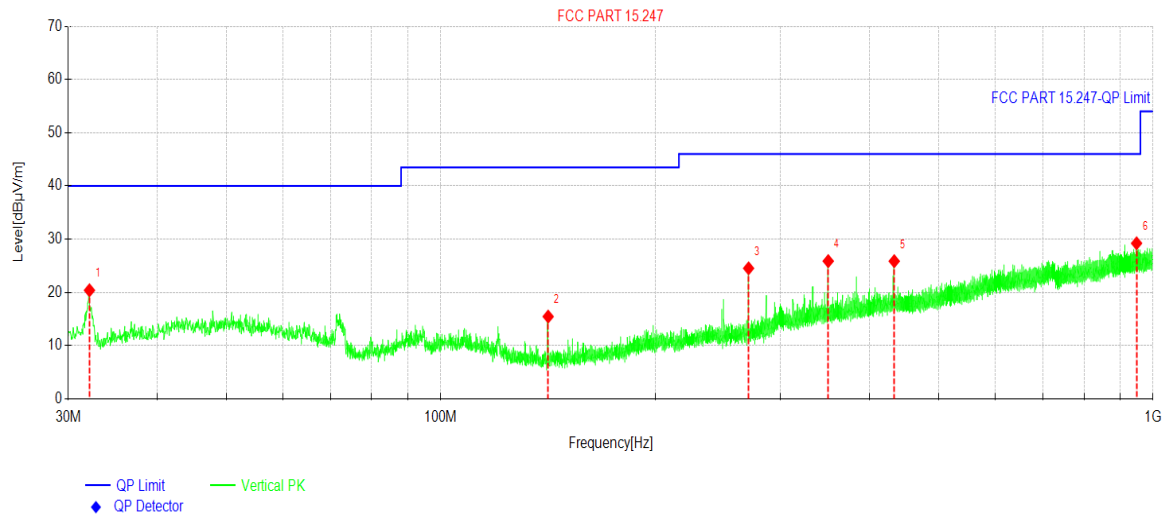


| Suspected Data List |             |                  |             |                |                |             |       |          |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity |
| 1                   | 32.1341     | 36.03            | -15.63      | 20.40          | 40.00          | 19.60       | PK    | Vertical |
| 2                   | 141.555     | 33.45            | -17.99      | 15.46          | 43.50          | 28.04       | PK    | Vertical |
| 3                   | 270.572     | 37.96            | -13.43      | 24.53          | 46.00          | 21.47       | PK    | Vertical |
| 4                   | 350.019     | 37.16            | -11.28      | 25.88          | 46.00          | 20.12       | PK    | Vertical |
| 5                   | 433.249     | 35.70            | -9.83       | 25.87          | 46.00          | 20.13       | PK    | Vertical |
| 6                   | 948.296     | 31.15            | -1.92       | 29.23          | 46.00          | 16.77       | PK    | Vertical |

### Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

|                 |                |                |                 |
|-----------------|----------------|----------------|-----------------|
| Product Name:   | 4G Tablet      | Product Model: | T10L PLUS       |
| Test By:        | Kiran Zeng     | Test mode:     | 2.4G Wi-Fi mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization:  | Horizontal      |
| Test Voltage:   | DC 3.8V        |                |                 |

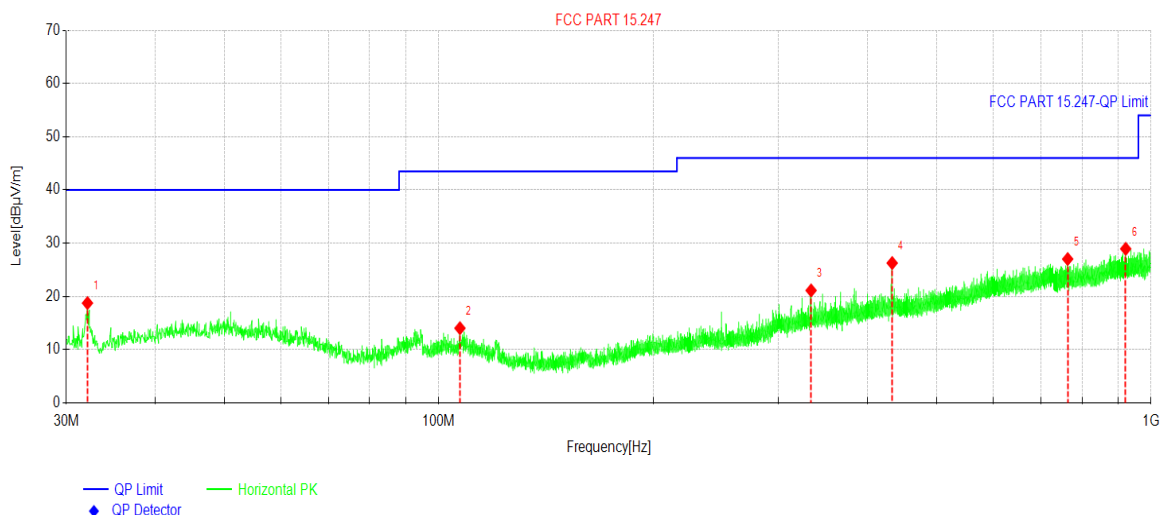

## Suspected Data List

| NO. | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity   |
|-----|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| 1   | 32.1341     | 34.38            | -15.63      | 18.75          | 40.00          | 21.25       | PK    | Horizontal |
| 2   | 107.118     | 28.33            | -14.30      | 14.03          | 43.50          | 29.47       | PK    | Horizontal |
| 3   | 333.285     | 32.85            | -11.73      | 21.12          | 46.00          | 24.88       | PK    | Horizontal |
| 4   | 433.200     | 36.10            | -9.83       | 26.27          | 46.00          | 19.73       | PK    | Horizontal |
| 5   | 763.890     | 31.00            | -3.98       | 27.02          | 46.00          | 18.98       | PK    | Horizontal |
| 6   | 921.523     | 31.03            | -2.09       | 28.94          | 46.00          | 17.06       | PK    | Horizontal |

## Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

## Above 1GHz

| 802.11b                                                                                                                                                                               |                   |             |                |                |             |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|----------------|----------------|-------------|--------------|
| Test channel: Lowest channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 55.25             | -7.92       | 47.33          | 74.00          | 26.67       | Vertical     |
| 4824.00                                                                                                                                                                               | 54.37             | -7.92       | 46.45          | 74.00          | 27.55       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 46.23             | -7.92       | 38.31          | 54.00          | 15.69       | Vertical     |
| 4824.00                                                                                                                                                                               | 45.32             | -7.92       | 37.40          | 54.00          | 16.60       | Horizontal   |
| Test channel: Middle channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 55.19             | -7.55       | 47.64          | 74.00          | 26.36       | Vertical     |
| 4874.00                                                                                                                                                                               | 54.23             | -7.55       | 46.68          | 74.00          | 27.32       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 46.18             | -7.55       | 38.63          | 54.00          | 15.37       | Vertical     |
| 4874.00                                                                                                                                                                               | 45.27             | -7.55       | 37.72          | 54.00          | 16.28       | Horizontal   |
| Test channel: Highest channel                                                                                                                                                         |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 55.16             | -7.21       | 47.95          | 74.00          | 26.05       | Vertical     |
| 4924.00                                                                                                                                                                               | 54.17             | -7.21       | 46.96          | 74.00          | 27.04       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 46.08             | -7.21       | 38.87          | 54.00          | 15.13       | Vertical     |
| 4924.00                                                                                                                                                                               | 45.31             | -7.21       | 38.10          | 54.00          | 15.90       | Horizontal   |
| <b>Remark:</b><br>1. Level = Reading + Factor.<br>2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. |                   |             |                |                |             |              |

| 802.11g                                                                                                                                                                               |                   |             |                |                |             |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|----------------|----------------|-------------|--------------|
| Test channel: Lowest channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 55.29             | -7.82       | 47.47          | 74.00          | 26.53       | Vertical     |
| 4824.00                                                                                                                                                                               | 54.20             | -7.82       | 46.38          | 74.00          | 27.62       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 46.42             | -7.82       | 38.60          | 54.00          | 15.40       | Vertical     |
| 4824.00                                                                                                                                                                               | 45.27             | -7.82       | 37.45          | 54.00          | 16.55       | Horizontal   |
| Test channel: Middle channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 55.44             | -7.50       | 47.94          | 74.00          | 26.06       | Vertical     |
| 4874.00                                                                                                                                                                               | 54.34             | -7.50       | 46.84          | 74.00          | 27.16       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 46.29             | -7.50       | 38.79          | 54.00          | 15.21       | Vertical     |
| 4874.00                                                                                                                                                                               | 45.31             | -7.50       | 37.81          | 54.00          | 16.19       | Horizontal   |
| Test channel: Highest channel                                                                                                                                                         |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 55.26             | -7.21       | 48.05          | 74.00          | 25.95       | Vertical     |
| 4924.00                                                                                                                                                                               | 54.31             | -7.21       | 47.10          | 74.00          | 26.90       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 46.40             | -7.21       | 39.19          | 54.00          | 14.81       | Vertical     |
| 4924.00                                                                                                                                                                               | 45.28             | -7.21       | 38.07          | 54.00          | 15.93       | Horizontal   |
| <b>Remark:</b><br>1. Level = Reading + Factor.<br>2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. |                   |             |                |                |             |              |



| 802.11n-HT20                                                                                                                                                                          |                   |             |                |                |             |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|----------------|----------------|-------------|--------------|
| Test channel: Lowest channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 55.07             | -7.82       | 47.25          | 74.00          | 26.75       | Vertical     |
| 4824.00                                                                                                                                                                               | 54.19             | -7.82       | 46.37          | 74.00          | 27.63       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4824.00                                                                                                                                                                               | 46.29             | -7.82       | 38.47          | 54.00          | 15.53       | Vertical     |
| 4824.00                                                                                                                                                                               | 45.28             | -7.82       | 37.46          | 54.00          | 16.54       | Horizontal   |
| Test channel: Middle channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 55.44             | -7.50       | 47.94          | 74.00          | 26.06       | Vertical     |
| 4874.00                                                                                                                                                                               | 54.23             | -7.50       | 46.73          | 74.00          | 27.27       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 46.42             | -7.50       | 38.92          | 54.00          | 15.08       | Vertical     |
| 4874.00                                                                                                                                                                               | 45.27             | -7.50       | 37.77          | 54.00          | 16.23       | Horizontal   |
| Test channel: Highest channel                                                                                                                                                         |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 55.42             | -7.21       | 48.21          | 74.00          | 25.79       | Vertical     |
| 4924.00                                                                                                                                                                               | 54.30             | -7.21       | 47.09          | 74.00          | 26.91       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4924.00                                                                                                                                                                               | 46.03             | -7.21       | 38.82          | 54.00          | 15.18       | Vertical     |
| 4924.00                                                                                                                                                                               | 45.17             | -7.21       | 37.96          | 54.00          | 16.04       | Horizontal   |
| <b>Remark:</b><br>1. Level = Reading + Factor.<br>2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. |                   |             |                |                |             |              |

| 802.11n-HT40                                                                                                                                                                          |                   |             |                |                |             |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------|----------------|----------------|-------------|--------------|
| Test channel: Lowest channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4844.00                                                                                                                                                                               | 55.43             | -7.65       | 47.78          | 74.00          | 26.22       | Vertical     |
| 4844.00                                                                                                                                                                               | 54.22             | -7.65       | 46.57          | 74.00          | 27.43       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4844.00                                                                                                                                                                               | 46.37             | -7.65       | 38.72          | 54.00          | 15.28       | Vertical     |
| 4844.00                                                                                                                                                                               | 45.12             | -7.65       | 37.47          | 54.00          | 16.53       | Horizontal   |
| Test channel: Middle channel                                                                                                                                                          |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 55.09             | -7.50       | 47.59          | 74.00          | 26.41       | Vertical     |
| 4874.00                                                                                                                                                                               | 54.33             | -7.50       | 46.83          | 74.00          | 27.17       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4874.00                                                                                                                                                                               | 46.31             | -7.50       | 38.81          | 54.00          | 15.19       | Vertical     |
| 4874.00                                                                                                                                                                               | 45.23             | -7.50       | 37.73          | 54.00          | 16.27       | Horizontal   |
| Test channel: Highest channel                                                                                                                                                         |                   |             |                |                |             |              |
| Detector: Peak Value                                                                                                                                                                  |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4904.00                                                                                                                                                                               | 55.07             | -7.35       | 47.72          | 74.00          | 26.28       | Vertical     |
| 4904.00                                                                                                                                                                               | 54.18             | -7.35       | 46.83          | 74.00          | 27.17       | Horizontal   |
| Detector: Average Value                                                                                                                                                               |                   |             |                |                |             |              |
| Frequency (MHz)                                                                                                                                                                       | Read Level (dBμV) | Factor (dB) | Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Polarization |
| 4904.00                                                                                                                                                                               | 46.23             | -7.35       | 38.88          | 54.00          | 15.12       | Vertical     |
| 4904.00                                                                                                                                                                               | 45.17             | -7.35       | 37.82          | 54.00          | 16.18       | Horizontal   |
| <b>Remark:</b><br>1. Level = Reading + Factor.<br>2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. |                   |             |                |                |             |              |

-----End of report-----