

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: O552402723

Product: 4G Feature Phone

Trade Mark: LOGIC , UNONU, iSWAG

Model No.: B7 Pro

Family Model: U7 Max

Report No.: S23102401507006

Issue Date: Dec 22 , 2023

Prepared for

SWAGTEK

10205 NW 19th Street STE101Miami, FL 33172

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name	SWAGTEK
Address	10205 NW 19th Street STE101Miami, FL 33172
Manufacturer's Name	SWAGTEK
Address	10205 NW 19th Street STE101Miami, FL 33172
Product name.....	4G Feature Phone
Model and/or type reference ...:	B7 Pro
Trade Mark.....	LOGIC , UNONU, iSWAG
Family Model.....	U7 Max
Test Sample Number.....	S231024015006
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure	ANSI C63.26:2015
	ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests Oct. 24, 2023 ~ Dec 22 , 2023

Date of Issue Dec 22 , 2023

Test Result..... **Pass**

Prepared By : Mary Hu
(Project Engineer)

Reviewed : Aaron Cheng
By : Aaron Cheng
(Supervisor)

Approved : Alex Li
By : Alex Li
(Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION	6
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
1.3 TEST METHODOLOGY.....	8
1.4 TEST FACILITY.....	8
MEASUREMENT UNCERTAINTY	8
1.5 SPECIAL ACCESSORIES.....	8
1.6 WORST-CASE CONFIGURATION AND MODE.....	8
1.7 SUMMARY OF TEST RESULTS	9
2.1 EUT CONFIGURATION.....	10
2.2 EUT EXERCISE	10
2.3 CONFIGURATION OF EUT SYSTEM.....	10
2.4 TEST SETUP	11
3.TEST AND MEASUREMENT EQUIPMENT	12
4. OUTPUT POWER.....	14
4.1 OUTPUT POWER MEASUREMENT	14
5. OCCUPIED BANDWIDTH.....	16
6. BANDEDGE AND EMISSION MASK	17
7. OUT OF BAND EMISSIONS.....	19
7.1 MEASUREMENT METHOD	19
8. RADIATED MEASUREMENT	20
8.1. RADIATED POWER (ERP & EIRP).....	20

8.2 LTE BAND 2	21
8.3 LTE BAND 4	24
8.4 LTE BAND 5	27
8.5 LTE BAND 7	29
8.6 LTE BAND 12	31
8.7 LTE BAND 13	33
8.8 LTE BAND 17	35
8.9 LTE BAND 66	37
8.10 LTE BAND 71	41
9. SPURIOUS RADIATION EMISSION	43
9.1 LTE BAND 2	45
9.2 LTE BAND 4	47
9.3 LTE BAND 5	49
9.4 LTE BAND 7	51
9.5 LTE BAND 12	53
9.6 LTE BAND 13	55
9.7 LTE BAND 17	57
9.8 LTE BAND 66	59
9.9 LTE BAND 71	61
10. FREQUENCY STABILITY	63
10.1 LTE BAND 2	64
10.2 LTE BAND 4	66
10.3 LTE BAND 5	68
10.4 LTE BAND 7	70
10.5 LTE BAND 12	72
10.6 LTE BAND 13	74
10.7 LTE BAND 17	76
10.8 LTE BAND 66	78
10.9 LTE BAND 71	80

11. PEAK-TO-AVERAGE RATIO	82
11.1 Description of the PAR Measurement	82
11.2 Measuring Instruments	82
11.3 Test Procedures.....	82
11.4 Test Setup.....	83

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	4G Feature Phone
Trade Mark	LOGIC , UNONU, iSWAG
Model Name	B7 Pro
Family Model	U7 Max
Model Difference	All models are the same circuit and RF module, except the model name.
FCC ID:	O552402723
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2,4,5,7,12,13,17, 66 TDD Band 71
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 13 Uplink: 777MHz-787MHz, Downlink: 746MHz-756MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz; LTE FDD Band 66 Uplink: 1710MHz-1780MHz, Downlink: 2110MHz-2200MHz; LTE TDD Band 71 Uplink: 663MHz-698MHz, Downlink: 617MHz-652MHz;
Type of Modulation:	QPSK/16QAM/64QAM(Only Downlink)
Power Class	Class 3
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 1.75 dBi, Band 4: 1.58 dBi, Band 5: -1.28 dBi, Band 7: 0.88 dBi, Band 12: -1.38 dBi, Band 13: -1.38 dBi, Band 17: -1.38 dBi, Band 66: 1.58 dBi Band 71: -1.62 dBi
Adapter	Model:GLY-B05100U Input: AC100-240V, 50-60Hz 0.2A Output: DC 5.0V $\overline{\text{---}}$ 1000mA
Battery	DC 3.8V, 2000mAh, 7.6Wh
Power supply	DC 3.8V from battery or DC 5V from adapter
Extreme Vol. Limits:	DC 3.23V to DC 4.37V (Nominal DC 3.8V) (Note 1)

HW Version	MM3138_MB_V1.0
FW Version	N/A
SW Version	L_B7PRO_IS
** Note1: The High Voltage DC 4.37V and Low Voltage 3.23V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: O552402723** filing to comply with the FCC Part 22H&24E&27&90S.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2/4/5/7/12/13/17/66/71

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.7 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03r01			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(g), (h), (m) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(g), (h), (m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	4G Feature Phone	B7 Pro	FCC ID: O552402723	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

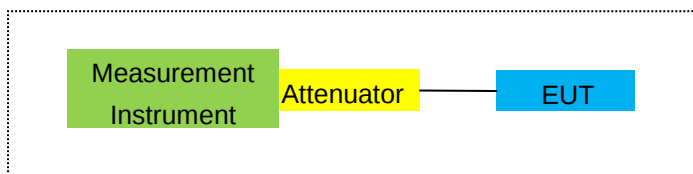

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

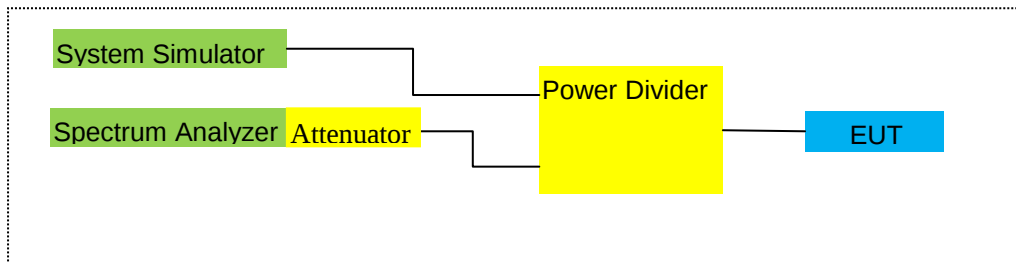

For Frequency Stability

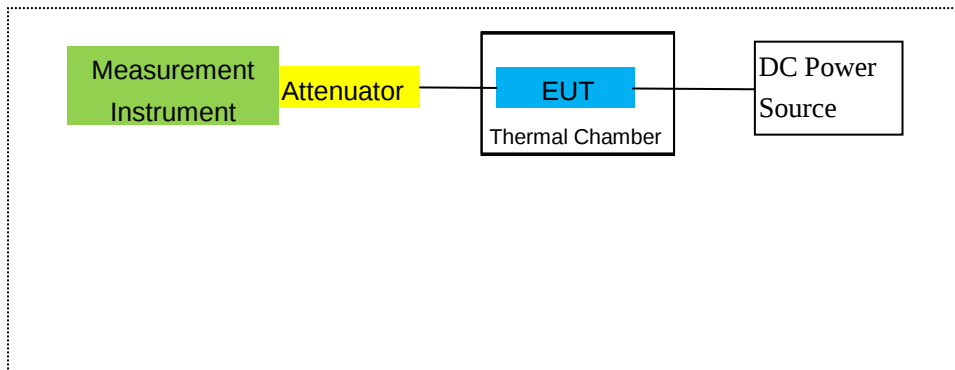

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2023.05.29	2024.05.28	1 year
2	Test Receiver	R&S	ESPI	101318	2023.03.27	2024.03.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.15	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2023.05.06	2026.05.05	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2022.03.31	2025.03.30	3 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.03.31	2025.03.30	3 year
7	Amplifier	EM	EM-30180	060538	2023.05.29	2024.05.28	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2023.03.27	2024.03.26	1 year
9	Power Meter	R&S	NRVS	100696	2023.05.29	2024.05.28	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2023.05.29	2024.05.28	1 year
11	Test Cable	N/A	R-01	N/A	2022.06.17	2025.06.16	3 year
12	Test Cable	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	Test Cable	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year
15	LISN	R&S	ENV216	101313	2023.03.27	2024.03.26	1 year
16	LISN	EMCO	3816/2	00042990	2023.03.27	2024.03.26	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2023.03.27	2024.03.26	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2023.03.27	2024.03.26	1 year
19	Test Cable	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
20	Test Cable	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
21	Test Cable	N/A	C03	N/A	2023.05.06	2026.05.05	3 year
22	Spectrum Analyzer	agilent	e4440a	us44300399	2023.03.27	2024.03.26	1 year
23	test receiver	R&S	ESCI	a0304218	2023.03.27	2024.03.26	1 year
24	Communication Tester	R&S	CMU200	A0304247	2023.05.29	2024.05.28	1 year
25	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2023.03.27	2024.03.26	1 year

26	DC Power Source	N/A	PS-6005D	20170402923	2023.05.06	2026.05.05	3 year
----	-----------------	-----	----------	-------------	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

☐

Band 2/4/5/7/12/13/17/66/71

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53, and §90.691

FCC: §22.359

LIMITS

FCC: §22.917, §24.238, §27.53

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

(c)(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

Band 2/4/5/7/12/13/17/66/71

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53 and §90.691

LIMITS

1. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.
2. The Band 7/41 emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

☐

- ☐ Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- ☐ Band 2/4/5/7/12/13/17/66/71

☐

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §90.635

LIMITS:

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

☐ Band 2/4/5/7/12/13/17/66/71

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Factor (dBi)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
							(mW)		
1.4MHz Band QPSK	6/0	1850.7	15.58	3.76	8.90	20.72	118.03	Horizontal	Pass
		1880	15.17	3.91	8.90	20.16	103.75	Horizontal	Pass
		1909.3	15.50	3.93	8.90	20.47	111.43	Horizontal	Pass
3.0MHz Band QPSK	15/0	1851.5	15.22	3.77	8.90	20.35	108.39	Horizontal	Pass
		1880	15.15	3.91	8.90	20.14	103.28	Horizontal	Pass
		1908.5	15.29	3.94	8.90	20.25	105.93	Horizontal	Pass
5.0MHz Band QPSK	25/0	1852.5	15.89	3.77	8.90	21.02	126.47	Horizontal	Pass
		1880	15.26	3.91	8.90	20.25	105.93	Horizontal	Pass
		1907.5	17.38	3.94	8.90	22.34	171.40	Horizontal	Pass
10.0MHz Band QPSK	50/0	1855	16.80	3.79	8.90	21.91	155.24	Horizontal	Pass
		1880	17.44	3.95	8.90	22.39	173.38	Horizontal	Pass
		1905	16.79	3.97	8.90	21.72	148.59	Horizontal	Pass
15.0MHz Band QPSK	75/0	1857.5	14.98	3.79	8.90	20.09	102.09	Horizontal	Pass
		1880	17.28	3.95	8.90	22.23	167.11	Horizontal	Pass
		1902.5	15.17	3.97	8.90	20.1	102.33	Horizontal	Pass
20.0MHz Band QPSK	100/0	1860	17.42	3.81	8.90	22.51	178.24	Horizontal	Pass
		1880	16.12	3.96	8.90	21.06	127.64	Horizontal	Pass
		1900	17.00	4.00	8.90	21.9	154.88	Horizontal	Pass
1.4MHz Band QPSK	6/0	1850.7	15.75	3.76	8.90	20.89	122.74	Vertical	Pass
		1880	15.15	3.91	8.90	20.14	103.28	Vertical	Pass
		1909.3	16.84	3.93	8.90	21.81	151.71	Vertical	Pass
3.0MHz Band QPSK	15/0	1851.5	15.64	3.77	8.90	20.77	119.40	Vertical	Pass
		1880	16.75	3.91	8.90	21.74	149.28	Vertical	Pass
		1908.5	15.35	3.94	8.90	20.31	107.40	Vertical	Pass
5.0MHz Band QPSK	25/0	1852.5	16.28	3.77	8.90	21.41	138.36	Vertical	Pass
		1880	15.48	3.91	8.90	20.47	111.43	Vertical	Pass
		1907.5	16.91	3.94	8.90	21.87	153.82	Vertical	Pass
10.0MHz Band QPSK	50/0	1855	15.20	3.79	8.90	20.31	107.40	Vertical	Pass
		1880	15.41	3.95	8.90	20.36	108.64	Vertical	Pass
		1905	15.53	3.97	8.90	20.46	111.17	Vertical	Pass

15.0MHz	75/0	1857.5	15.30	3.79	8.90	20.41	109.90	Vertical	Pass
Band		1880	16.78	3.95	8.90	21.73	148.94	Vertical	Pass
QPSK		1902.5	16.41	3.97	8.90	21.34	136.14	Vertical	Pass
20.0MHz	100/0	1860	18.18	3.81	8.90	23.27	212.32	Vertical	Pass
Band		1880	16.07	3.96	8.90	21.01	126.18	Vertical	Pass
QPSK		1900	17.23	4.00	8.90	22.13	163.31	Vertical	Pass

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Factor (dBi)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
1.4MHz Band 16 QAM	6/0	1850.7	14.60	3.76	8.90	21.29	134.65	Horizontal	Pass
		1880	15.75	3.91	8.90	20.23	105.49	Horizontal	Pass
		1909.3	15.45	3.93	8.90	21.43	138.98	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1851.5	15.29	3.77	8.90	21.06	127.61	Horizontal	Pass
		1880	14.95	3.91	8.90	22.09	161.87	Horizontal	Pass
		1908.5	14.55	3.94	8.90	21.07	127.90	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1852.5	15.14	3.77	8.90	22.69	185.70	Horizontal	Pass
		1880	15.50	3.91	8.90	21.82	151.89	Horizontal	Pass
		1907.5	14.00	3.94	8.90	20.95	124.33	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1855	15.35	3.79	8.90	22.35	171.92	Horizontal	Pass
		1880	14.05	3.95	8.90	22.11	162.52	Horizontal	Pass
		1905	15.36	3.97	8.90	22.08	161.25	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1857.5	13.68	3.79	8.90	22.17	164.66	Horizontal	Pass
		1880	15.77	3.95	8.90	21.67	146.83	Horizontal	Pass
		1902.5	15.65	3.97	8.90	22.45	175.73	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1860	13.84	3.81	8.90	21.27	133.85	Horizontal	Pass
		1880	16.17	3.96	8.90	21.15	130.24	Horizontal	Pass
		1900	14.55	4.00	8.90	20.21	105.03	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1850.7	14.61	3.76	8.90	21.84	152.91	Vertical	Pass
		1880	15.84	3.91	8.90	21.45	139.63	Vertical	Pass
		1909.3	15.13	3.93	8.90	20.99	125.73	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1851.5	13.77	3.77	8.90	22.13	163.25	Vertical	Pass
		1880	14.83	3.91	8.90	21.16	130.54	Vertical	Pass
		1908.5	14.56	3.94	8.90	22.16	164.29	Vertical	Pass
5.0MHz	25/0	1852.5	13.76	3.77	8.90	22.84	192.37	Vertical	Pass

Band 16 QAM		1880	15.05	3.91	8.90	21.31	135.31	Vertical	Pass
		1907.5	15.69	3.94	8.90	21.08	128.22	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1855	13.98	3.79	8.90	22.92	195.87	Vertical	Pass
		1880	15.57	3.95	8.90	21.33	135.70	Vertical	Pass
		1905	15.12	3.97	8.90	21.89	154.62	Vertical	Pass
15.0MHz Band 16 QAM	75/0	1857.5	13.85	3.79	8.90	20.66	116.34	Vertical	Pass
		1880	14.87	3.95	8.90	21.89	154.39	Vertical	Pass
		1902.5	13.66	3.97	8.90	22.44	175.59	Vertical	Pass
20.0MHz Band 16 QAM	100/0	1860	14.29	3.81	8.90	22.95	197.24	Vertical	Pass
		1880	14.90	3.96	8.90	22.08	161.25	Vertical	Pass
		1900	13.78	4.00	8.90	22.08	161.60	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4										
Mode	RB/RB SIZE	Frequency	Result						Conclusion	
			SG Level	Cable Loss	Antenna Factor	Max. EIRP	Max. EIRP	Polarization Of Max. ERP		
						(dBm)	(dBm)			(dBm)
						(dBm)	(mW)			
1.4MHz Band QPSK	6/0	1710.7	16.82	3.12	8.90	22.6	181.97	Horizontal	Pass	
		1732.5	13.88	3.27	8.90	19.51	89.33	Horizontal	Pass	
		1754.3	16.33	3.29	8.90	21.94	156.31	Horizontal	Pass	
3.0MHz Band QPSK	15/0	1711.5	14.43	3.13	8.90	20.2	104.71	Horizontal	Pass	
		1732.5	15.69	3.27	8.90	21.32	135.52	Horizontal	Pass	
		1753.5	16.62	3.30	8.90	22.22	166.72	Horizontal	Pass	
5.0MHz Band QPSK	25/0	1712.5	15.90	3.13	8.90	21.67	146.89	Horizontal	Pass	
		1732.5	17.10	3.27	8.90	22.73	187.50	Horizontal	Pass	
		1752.5	14.82	3.30	8.90	20.42	110.15	Horizontal	Pass	
10.0MHz Band QPSK	50/0	1715	16.38	3.15	8.90	22.13	163.31	Horizontal	Pass	
		1732.5	16.70	3.31	8.90	22.29	169.43	Horizontal	Pass	
		1750	17.65	3.33	8.90	23.22	209.89	Horizontal	Pass	
15.0MHz Band QPSK	75/0	1717.5	16.91	3.15	8.90	22.66	184.50	Horizontal	Pass	
		1732.5	16.51	3.31	8.90	22.1	162.18	Horizontal	Pass	
		1747.5	17.29	3.33	8.90	22.86	193.20	Horizontal	Pass	
20.0MHz Band QPSK	100/0	1720	15.87	3.17	8.90	21.6	144.54	Horizontal	Pass	
		1732.5	16.92	3.32	8.90	22.5	177.83	Horizontal	Pass	
		1745	15.89	3.36	8.90	21.43	139.00	Horizontal	Pass	
1.4MHz Band QPSK	6/0	1710.7	18.34	3.12	8.90	24.12	258.23	Vertical	Pass	
		1732.5	16.08	3.27	8.90	21.71	148.25	Vertical	Pass	
		1754.3	14.80	3.29	8.90	20.41	109.90	Vertical	Pass	
3.0MHz Band QPSK	15/0	1711.5	17.55	3.13	8.90	23.32	214.78	Vertical	Pass	
		1732.5	17.64	3.27	8.90	23.27	212.32	Vertical	Pass	
		1753.5	17.72	3.30	8.90	23.32	214.78	Vertical	Pass	
5.0MHz Band QPSK	25/0	1712.5	15.49	3.13	8.90	21.26	133.66	Vertical	Pass	
		1732.5	16.41	3.27	8.90	22.04	159.96	Vertical	Pass	
		1752.5	15.60	3.30	8.90	21.2	131.83	Vertical	Pass	
10.0MHz Band QPSK	50/0	1715	13.20	3.15	8.90	18.95	78.52	Vertical	Pass	
		1732.5	17.70	3.31	8.90	23.29	213.30	Vertical	Pass	
		1750	16.47	3.33	8.90	22.04	159.96	Vertical	Pass	

15.0MHz	75/0	1717.5	17.75	3.15	8.90	23.5	223.87	Vertical	Pass
Band		1732.5	16.38	3.31	8.90	21.97	157.40	Vertical	Pass
QPSK		1747.5	15.80	3.33	8.90	21.37	137.09	Vertical	Pass
20.0MHz	100/0	1720	17.41	3.17	8.90	23.14	206.06	Vertical	Pass
Band		1732.5	18.55	3.32	8.90	24.13	258.82	Vertical	Pass
QPSK		1745	16.56	3.36	8.90	22.1	162.18	Vertical	Pass

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss (dBm)	Antenna Factor (dBi)	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)			Average	Average		
						(dBm)	(mW)		
1.4MHz Band 16 QAM	6/0	1710.7	15.11	3.12	8.90	20.89	122.74	Horizontal	Pass
		1732.5	17.43	3.27	8.90	23.06	202.30	Horizontal	Pass
		1754.3	16.73	3.29	8.90	22.34	171.40	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1711.5	16.20	3.13	8.90	21.97	157.40	Horizontal	Pass
		1732.5	16.01	3.27	8.90	21.64	145.88	Horizontal	Pass
		1753.5	16.74	3.30	8.90	22.34	171.40	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1712.5	14.62	3.13	8.90	20.39	109.40	Horizontal	Pass
		1732.5	14.27	3.27	8.90	19.9	97.72	Horizontal	Pass
		1752.5	15.91	3.30	8.90	21.51	141.58	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1715	16.24	3.15	8.90	21.99	158.12	Horizontal	Pass
		1732.5	16.35	3.31	8.90	21.94	156.31	Horizontal	Pass
		1750	15.81	3.33	8.90	21.38	137.40	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1717.5	16.38	3.15	8.90	22.13	163.31	Horizontal	Pass
		1732.5	17.06	3.31	8.90	22.65	184.08	Horizontal	Pass
		1747.5	16.23	3.33	8.90	21.8	151.36	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1720	15.35	3.17	8.90	21.08	128.23	Horizontal	Pass
		1732.5	17.37	3.32	8.90	22.95	197.24	Horizontal	Pass
		1745	16.27	3.36	8.90	21.81	151.71	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1710.7	16.69	3.12	8.90	22.47	176.60	Vertical	Pass
		1732.5	16.59	3.27	8.90	22.22	166.72	Vertical	Pass
		1754.3	16.11	3.29	8.90	21.72	148.59	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1711.5	15.59	3.13	8.90	21.36	136.77	Vertical	Pass
		1732.5	15.63	3.27	8.90	21.26	133.66	Vertical	Pass
		1753.5	16.45	3.30	8.90	22.05	160.32	Vertical	Pass
5.0MHz	25/0	1712.5	16.16	3.13	8.90	21.93	155.96	Vertical	Pass

Band 16 QAM		1732.5	17.50	3.27	8.90	23.13	205.59	Vertical	Pass
		1752.5	15.14	3.30	8.90	20.74	118.58	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1715	14.84	3.15	8.90	20.59	114.55	Vertical	Pass
		1732.5	16.68	3.31	8.90	22.27	168.66	Vertical	Pass
		1750	17.07	3.33	8.90	22.64	183.65	Vertical	Pass
15.0MHz Band 16 QAM	75/0	1717.5	15.63	3.15	8.90	21.38	137.40	Vertical	Pass
		1732.5	16.36	3.31	8.90	21.95	156.68	Vertical	Pass
		1747.5	17.40	3.33	8.90	22.97	198.15	Vertical	Pass
20.0MHz Band 16 QAM	100/0	1720	16.78	3.17	8.90	22.51	178.24	Vertical	Pass
		1732.5	17.70	3.32	8.90	23.28	212.81	Vertical	Pass
		1745	16.14	3.36	8.90	21.68	147.23	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusi on
			SG Level	Cable Loss (dBm)	Anten na Factor (dB)	Correction	Max. ERP	Max. ERP	Polarization Of Max. ERP	
						(dB)	Average	Average		
							(dBm)	(mW)		
1.4MHz Band QPSK	6/0	824.7	21.64	2.01	5.30	2.15	22.78	189.67	Horizontal	Pass
		836.5	19.95	2.01	5.30	2.15	21.09	128.53	Horizontal	Pass
		848.3	20.16	2.02	5.70	2.15	21.69	147.57	Horizontal	Pass
3.0MHz Band QPSK	15/0	825.5	21.25	2.01	5.30	2.15	22.39	173.38	Horizontal	Pass
		836.5	20.65	2.01	5.30	2.15	21.79	151.01	Horizontal	Pass
		847.5	20.62	2.02	5.70	2.15	22.15	164.06	Horizontal	Pass
5.0MHz Band QPSK	25/0	826.5	20.20	2.01	5.30	2.15	21.34	136.14	Horizontal	Pass
		836.5	20.48	2.01	5.30	2.15	21.62	145.21	Horizontal	Pass
		846.5	20.79	2.02	5.70	2.15	22.32	170.61	Horizontal	Pass
10.0MHz Band QPSK	50/0	829	22.01	2.01	5.30	2.15	23.15	206.54	Horizontal	Pass
		836.5	21.97	2.01	5.30	2.15	23.11	204.64	Horizontal	Pass
		844	21.24	2.02	5.70	2.15	22.77	189.23	Horizontal	Pass
1.4MHz Band QPSK	6/0	824.7	21.15	2.01	5.30	2.15	22.29	169.43	Vertical	Pass
		836.5	19.99	2.01	5.30	2.15	21.13	129.72	Vertical	Pass
		848.3	21.62	2.02	5.70	2.15	23.15	206.54	Vertical	Pass
3.0MHz Band QPSK	15/0	825.5	21.05	2.01	5.30	2.15	22.19	165.58	Vertical	Pass
		836.5	20.06	2.01	5.30	2.15	21.2	131.83	Vertical	Pass
		847.5	20.76	2.02	5.70	2.15	22.29	169.43	Vertical	Pass
5.0MHz Band QPSK	25/0	826.5	20.77	2.01	5.30	2.15	21.91	155.24	Vertical	Pass
		836.5	20.42	2.01	5.30	2.15	21.56	143.22	Vertical	Pass
		846.5	19.82	2.02	5.70	2.15	21.35	136.46	Vertical	Pass
10.0MHz Band QPSK	50/0	829	20.22	2.01	5.30	2.15	21.36	136.77	Vertical	Pass
		836.5	22.22	2.01	5.30	2.15	23.36	216.77	Vertical	Pass
		844	20.82	2.02	5.70	2.15	22.35	171.79	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclu sion
			SG Level	Cable Loss (dBm)	Antenna Factor (dB)	Correction	Max. ERP	Max. ERP	Polarization Of Max. ERP	
			(dBm)			(dB)	Average	Average		
							(dBm)	(mW)		
1.4MHz Band 16 QAM	6/0	824.7	21.14	2.01	5.30	2.15	22.28	169.04	Horizontal	Pass
		836.5	20.09	2.01	5.30	2.15	21.23	132.74	Horizontal	Pass
		848.3	19.51	2.02	5.70	2.15	21.04	127.06	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	825.5	21.40	2.01	5.30	2.15	22.54	179.47	Horizontal	Pass
		836.5	19.22	2.01	5.30	2.15	20.36	108.64	Horizontal	Pass
		847.5	21.10	2.02	5.70	2.15	22.63	183.23	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	826.5	19.63	2.01	5.30	2.15	20.77	119.40	Horizontal	Pass
		836.5	21.92	2.01	5.30	2.15	23.06	202.30	Horizontal	Pass
		846.5	21.07	2.02	5.70	2.15	22.6	181.97	Horizontal	Pass
10.0MHz z Band 16 QAM	50/0	829	20.46	2.01	5.30	2.15	21.6	144.54	Horizontal	Pass
		836.5	19.82	2.01	5.30	2.15	20.96	124.74	Horizontal	Pass
		844	19.71	2.02	5.70	2.15	21.24	133.05	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	824.7	19.29	2.01	5.30	2.15	20.43	110.41	Vertical	Pass
		836.5	21.83	2.01	5.30	2.15	22.97	198.15	Vertical	Pass
		848.3	21.16	2.02	5.70	2.15	22.69	185.78	Vertical	Pass
3.0MHz Band 16 QAM	15/0	825.5	20.60	2.01	5.30	2.15	21.74	149.28	Vertical	Pass
		836.5	21.18	2.01	5.30	2.15	22.32	170.61	Vertical	Pass
		847.5	19.36	2.02	5.70	2.15	20.89	122.74	Vertical	Pass
5.0MHz Band 16 QAM	25/0	826.5	20.21	2.01	5.30	2.15	21.35	136.46	Vertical	Pass
		836.5	21.37	2.01	5.30	2.15	22.51	178.24	Vertical	Pass
		846.5	18.80	2.02	5.70	2.15	20.33	107.89	Vertical	Pass
10.0MHz z Band 16 QAM	50/0	829	21.05	2.01	5.30	2.15	22.19	165.58	Vertical	Pass
		836.5	21.50	2.01	5.30	2.15	22.64	183.65	Vertical	Pass
		844	21.86	2.02	5.70	2.15	23.39	218.27	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Antenna Factor	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)	(dBm)	(dB)	Average (dBm)	Average (mW)		
5.0MHz Band QPSK	25/0	2502.5	16.98	4.54	9.00	21.44	139.32	Horizontal	Pass
		2535	16.37	4.69	9.00	20.68	116.95	Horizontal	Pass
		2567.5	16.50	4.71	9.00	20.79	119.95	Horizontal	Pass
10.0MHz Band QPSK	50/0	2505	17.46	4.55	9.00	21.91	155.24	Horizontal	Pass
		2535	17.09	4.69	9.00	21.4	138.04	Horizontal	Pass
		2565	18.42	4.72	9.00	22.7	186.21	Horizontal	Pass
15.0MHz Band QPSK	75/0	2507.5	17.21	4.55	9.00	21.66	146.55	Horizontal	Pass
		2535	15.32	4.69	9.00	19.63	91.83	Horizontal	Pass
		2562.5	17.39	4.72	9.00	21.67	146.89	Horizontal	Pass
20.0MHz Band QPSK	100/0	2510	16.35	4.57	9.00	20.78	119.67	Horizontal	Pass
		2535	17.15	4.73	9.00	21.42	138.68	Horizontal	Pass
		2560	17.15	4.75	9.00	21.4	138.04	Horizontal	Pass
5.0MHz Band QPSK	25/0	2502.5	18.56	4.54	9.00	23.02	200.45	Vertical	Pass
		2535	17.59	4.69	9.00	21.9	154.88	Vertical	Pass
		2567.5	17.46	4.71	9.00	21.75	149.62	Vertical	Pass
10.0MHz Band QPSK	50/0	2505	17.50	4.55	9.00	21.95	156.68	Vertical	Pass
		2535	17.28	4.69	9.00	21.59	144.21	Vertical	Pass
		2565	17.59	4.72	9.00	21.87	153.82	Vertical	Pass
15.0MHz Band QPSK	75/0	2507.5	17.47	4.55	9.00	21.92	155.60	Vertical	Pass
		2535	17.89	4.69	9.00	22.2	165.96	Vertical	Pass
		2562.5	16.71	4.72	9.00	20.99	125.60	Vertical	Pass
20.0MHz Band QPSK	100/0	2510	18.90	4.57	9.00	23.33	215.28	Vertical	Pass
		2535	17.37	4.73	9.00	21.64	145.88	Vertical	Pass
		2560	18.10	4.75	9.00	22.35	171.79	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Antenna Factor	Max. EIRP	Max. EIRP	Polarization	
			(dBm)	(dBm)	(dB)	Average	Average	Of Max. ERP	
						(dBm)	(mW)		
5.0MHz Band 16 QAM	25/0	2502.5	15.53	4.54	9.00	19.99	99.77	Horizontal	Pass
		2535	14.42	4.69	9.00	18.73	74.64	Horizontal	Pass
		2567.5	15.33	4.71	9.00	19.62	91.62	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	2505	16.11	4.55	9.00	20.56	113.76	Horizontal	Pass
		2535	17.18	4.69	9.00	21.49	140.93	Horizontal	Pass
		2565	15.90	4.72	9.00	20.18	104.23	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	2507.5	17.24	4.55	9.00	21.69	147.57	Horizontal	Pass
		2535	17.17	4.69	9.00	21.48	140.60	Horizontal	Pass
		2562.5	17.83	4.72	9.00	22.11	162.55	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	2510	16.09	4.57	9.00	20.52	112.72	Horizontal	Pass
		2535	18.38	4.73	9.00	22.65	184.08	Horizontal	Pass
		2560	16.24	4.75	9.00	20.49	111.94	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	2502.5	15.71	4.54	9.00	20.17	103.99	Vertical	Pass
		2535	16.14	4.69	9.00	20.45	110.92	Vertical	Pass
		2567.5	17.26	4.71	9.00	21.55	142.89	Vertical	Pass
10.0MHz Band 16 QAM	50/0	2505	16.10	4.55	9.00	20.55	113.50	Vertical	Pass
		2535	17.04	4.69	9.00	20.04	136.46	Vertical	Pass
		2565	14.54	4.72	9.00	18.82	76.21	Vertical	Pass
15.0MHz Band 16 QAM	75/0	2507.5	16.54	4.55	9.00	20.99	125.60	Vertical	Pass
		2535	17.11	4.69	9.00	21.42	138.68	Vertical	Pass
		2562.5	15.96	4.72	9.00	20.24	105.68	Vertical	Pass
20.0MHz Band 16 QAM	100/0	2510	#REF!	4.57	9.00	21.35	136.46	Vertical	Pass
		2535	18.74	4.73	9.00	23.01	199.99	Vertical	Pass
		2560	16.04	4.75	9.00	20.29	106.91	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	699.7	19.11	1.91	5.60	2.15	20.65	116.14	Horizontal	Pass
		707.5	19.86	1.91	5.70	2.15	21.5	141.25	Horizontal	Pass
		715.3	20.11	1.93	5.80	2.15	21.83	152.41	Horizontal	Pass
3.0MHz Band QPSK	15/0	700.5	20.55	1.91	5.60	2.15	22.09	161.81	Horizontal	Pass
		707.5	20.32	1.91	5.70	2.15	21.96	157.04	Horizontal	Pass
		714.5	18.89	1.93	5.80	2.15	20.61	115.08	Horizontal	Pass
5.0MHz Band QPSK	25/0	701.5	20.32	1.91	5.60	2.15	21.86	153.46	Horizontal	Pass
		707.5	20.95	1.91	5.70	2.15	22.59	181.55	Horizontal	Pass
		713.5	19.47	1.92	5.80	2.15	21.2	131.83	Horizontal	Pass
10.0MHz Band QPSK	50/0	704	20.65	1.91	5.60	2.15	22.19	165.58	Horizontal	Pass
		707.5	19.88	1.91	5.70	2.15	21.52	141.91	Horizontal	Pass
		711	19.28	1.92	5.80	2.15	21.01	126.18	Horizontal	Pass
1.4MHz Band QPSK	6/0	699.7	20.53	1.91	5.60	2.15	22.07	161.06	Vertical	Pass
		707.5	21.42	1.91	5.70	2.15	23.06	202.30	Vertical	Pass
		715.3	20.24	1.93	5.80	2.15	21.96	157.04	Vertical	Pass
3.0MHz Band QPSK	15/0	700.5	21.18	1.91	5.60	2.15	22.72	187.07	Vertical	Pass
		707.5	20.90	1.91	5.70	2.15	22.54	179.47	Vertical	Pass
		714.5	21.10	1.93	5.80	2.15	22.82	191.43	Vertical	Pass
5.0MHz Band QPSK	25/0	701.5	19.87	1.91	5.60	2.15	21.41	138.36	Vertical	Pass
		707.5	19.26	1.91	5.70	2.15	20.9	123.03	Vertical	Pass
		713.5	20.49	1.92	5.80	2.15	22.22	166.72	Vertical	Pass
10.0MHz Band QPSK	50/0	704	20.50	1.91	5.60	2.15	22.04	159.96	Vertical	Pass
		707.5	20.65	1.91	5.70	2.15	22.29	169.43	Vertical	Pass
		711	21.91	1.92	5.80	2.15	23.64	231.21	Vertical	Pass

Radiated Power (ERP) for Band 12										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	699.7	20.74	1.91	5.60	2.15	22.28	169.04	Horizontal	Pass
		707.5	19.59	1.91	5.70	2.15	21.23	132.74	Horizontal	Pass
		715.3	19.32	1.93	5.80	2.15	21.04	127.06	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	700.5	21.00	1.91	5.60	2.15	22.54	179.47	Horizontal	Pass
		707.5	18.72	1.91	5.70	2.15	20.36	108.64	Horizontal	Pass
		714.5	20.91	1.93	5.80	2.15	22.63	183.23	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	701.5	19.23	1.91	5.60	2.15	20.77	119.40	Horizontal	Pass
		707.5	21.42	1.91	5.70	2.15	23.06	202.30	Horizontal	Pass
		713.5	20.87	1.92	5.80	2.15	22.6	181.97	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	704	20.06	1.91	5.60	2.15	21.6	144.54	Horizontal	Pass
		707.5	19.32	1.91	5.70	2.15	20.96	124.74	Horizontal	Pass
		711	19.51	1.92	5.80	2.15	21.24	133.05	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	699.7	18.89	1.91	5.60	2.15	20.43	110.41	Vertical	Pass
		707.5	21.33	1.91	5.70	2.15	22.97	198.15	Vertical	Pass
		715.3	20.97	1.93	5.80	2.15	22.69	185.78	Vertical	Pass
3.0MHz Band 16 QAM	15/0	700.5	20.20	1.91	5.60	2.15	21.74	149.28	Vertical	Pass
		707.5	20.68	1.91	5.70	2.15	22.32	170.61	Vertical	Pass
		714.5	19.17	1.93	5.80	2.15	20.89	122.74	Vertical	Pass
5.0MHz Band 16 QAM	25/0	701.5	18.17	1.91	5.60	2.15	19.71	93.54	Vertical	Pass
		707.5	20.87	1.91	5.70	2.15	22.51	178.24	Vertical	Pass
		713.5	18.60	1.92	5.80	2.15	20.33	107.89	Vertical	Pass
10.0MHz Band 16 QAM	50/0	704	20.65	1.91	5.60	2.15	22.19	165.58	Vertical	Pass
		707.5	21.00	1.91	5.70	2.15	22.64	183.65	Vertical	Pass
		711	21.66	1.92	5.80	2.15	23.39	218.27	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

ERP(dBm)=EIRP-2.15

8.7 LTE BAND 13

Radiated Power (ERP) for Band 13										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	25/0	779.5	19.61	1.91	5.80	2.15	21.35	136.46	Horizontal	Pass
		782	20.81	1.91	5.60	2.15	22.35	171.79	Horizontal	Pass
		784.5	20.82	1.92	5.70	2.15	22.45	175.79	Horizontal	Pass
10.0MHz Band QPSK	782	782	19.79	1.92	5.70	2.15	21.42	138.68	Horizontal	Pass
5.0MHz Band QPSK	25/0	779.5	19.17	1.91	5.80	2.15	20.91	123.31	Vertical	Pass
		782	20.73	1.91	5.60	2.15	22.27	168.66	Vertical	Pass
		784.5	19.50	1.92	5.70	2.15	21.13	129.72	Vertical	Pass
10.0MHz Band QPSK	50/0	782	21.15	1.91	5.60	2.15	22.69	185.78	Vertical	Pass

Radiated Power (ERP) for Band 13										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	25/0	779.5	20.64	1.91	5.80	2.15	22.38	172.98	Horizontal	Pass
		782	21.04	1.91	5.60	2.15	22.58	181.13	Horizontal	Pass
		784.5	20.90	1.92	5.70	2.15	22.53	179.06	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	782	20.61	1.91	5.80	2.15	22.35	171.79	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	779.5	18.72	1.91	5.80	2.15	20.46	111.17	Vertical	Pass
		782	19.78	1.91	5.60	2.15	21.32	135.52	Vertical	Pass
		784.5	18.97	1.92	5.70	2.15	20.6	114.82	Vertical	Pass
10.0MHz Band 16 QAM	50/0	782	21.67	1.91	5.60	2.15	23.21	209.41	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.8 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Factor (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	25/0	706.5	18.79	1.91	5.60	2.15	20.33	107.89	Vertical	Pass
		710	18.52	1.91	5.70	2.15	20.16	103.75	Vertical	Pass
		713.5	18.59	1.92	5.80	2.15	20.32	107.65	Vertical	Pass
10.0MHz Band QPSK	50/0	709	18.54	1.91	5.60	2.15	20.08	101.86	Vertical	Pass
		710	18.79	1.91	5.70	2.15	20.43	110.41	Vertical	Pass
		711	18.46	1.92	5.80	2.15	20.19	104.47	Vertical	Pass
5.0MHz Band QPSK	25/0	706.5	18.81	1.91	5.60	2.15	20.35	108.39	Horizontal	Pass
		710	18.54	1.91	5.70	2.15	20.18	104.23	Horizontal	Pass
		713.5	18.73	1.92	5.80	2.15	20.46	111.17	Horizontal	Pass
10.0MHz Band QPSK	50/0	709	18.84	1.91	5.60	2.15	20.38	109.14	Horizontal	Pass
		710	18.72	1.91	5.70	2.15	20.36	108.64	Horizontal	Pass
		711	19.68	1.92	5.80	2.15	21.41	138.36	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Factor (dB)	Correction (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	25/0	706.5	16.81	1.91	5.6	2.15	20.44	110.66	Vertical	Pass
		710	16.39	1.91	5.7	2.15	20.53	112.98	Vertical	Pass
		713.5	17.43	1.92	5.8	2.15	20.75	118.85	Vertical	Pass
10.0MHz Band 16 QAM	50/0	709	15.91	1.91	5.6	2.15	20.23	105.44	Vertical	Pass
		710	15.84	1.91	5.7	2.15	21.77	150.31	Vertical	Pass
		711	15.59	1.92	5.8	2.15	22.25	167.88	Vertical	Pass
5.0MHz Band 16 QAM	25/0	706.5	17.52	1.91	5.6	2.15	22.18	165.20	Horizontal	Pass
		710	17.46	1.91	5.7	2.15	21.25	133.35	Horizontal	Pass
		713.5	16.25	1.92	5.8	2.15	20.53	112.98	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	709	17.30	1.91	5.6	2.15	21.52	141.91	Horizontal	Pass
		710	17.57	1.91	5.7	2.15	20.43	110.41	Horizontal	Pass
		711	16.65	1.92	5.8	2.15	22.49	177.42	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Factor (dB)+ SG Level (dBm)- Cable Loss(dBm)

8.9 LTE BAND 66

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	1710.7	18.76	3.76	8.90	23.9	245.47	Horizontal	Pass
		1745	19.12	3.91	8.90	24.11	257.63	Horizontal	Pass
		1779.3	18.17	3.93	8.90	23.14	206.06	Horizontal	Pass
3.0MHz Band QPSK	15/0	1711.5	18.09	3.77	8.90	23.22	209.89	Horizontal	Pass
		1745	18.95	3.91	8.90	23.94	247.74	Horizontal	Pass
		1778.5	19.28	3.94	8.90	24.24	265.46	Horizontal	Pass
5.0MHz Band QPSK	25/0	1712.5	17.72	3.77	8.90	22.85	192.75	Horizontal	Pass
		1745	18.45	3.91	8.90	23.44	220.80	Horizontal	Pass
		1777.5	18.43	3.94	8.90	23.39	218.27	Horizontal	Pass
10.0MHz Band QPSK	50/0	1715	17.71	3.79	8.90	22.82	191.43	Horizontal	Pass
		1745	19.65	3.95	8.90	24.6	288.40	Horizontal	Pass
		1775	18.96	3.97	8.90	23.89	244.91	Horizontal	Pass
15.0MHz Band QPSK	75/0	1717.5	18.49	3.79	8.90	23.6	229.09	Horizontal	Pass
		1745	17.86	3.95	8.90	22.81	190.99	Horizontal	Pass
		1772.5	19.12	3.97	8.90	24.05	254.10	Horizontal	Pass
20.0MHz Band QPSK	100/0	1720	18.44	3.81	8.90	23.53	225.42	Horizontal	Pass
		1745	18.39	3.96	8.90	23.33	215.28	Horizontal	Pass
		1770	18.68	4	8.90	23.58	228.03	Horizontal	Pass
1.4MHz Band QPSK	6/0	1710.7	19.27	3.76	8.90	24.41	276.06	Vertical	Pass
		1745	18.74	3.91	8.90	23.73	236.05	Vertical	Pass
		1779.3	19.85	3.93	8.90	24.82	303.39	Vertical	Pass
3.0MHz Band QPSK	15/0	1711.5	18.11	3.77	8.90	23.24	210.86	Vertical	Pass
		1745	19.38	3.91	8.90	24.37	273.53	Vertical	Pass
		1778.5	18.92	3.94	8.90	23.88	244.34	Vertical	Pass
5.0MHz Band QPSK	25/0	1712.5	18.81	3.77	8.90	23.94	247.74	Vertical	Pass
		1745	18.84	3.91	8.90	23.83	241.55	Vertical	Pass
		1777.5	18.85	3.94	8.90	23.81	240.44	Vertical	Pass
10.0MHz Band QPSK	50/0	1715	18.30	3.79	8.90	23.41	219.28	Vertical	Pass
		1745	19.00	3.95	8.90	23.95	248.31	Vertical	Pass
		1775	18.92	3.97	8.90	23.85	242.66	Vertical	Pass

15.0MHz	75/0	1717.5	19.05	3.79	8.90	24.16	260.62	Vertical	Pass
Band		1745	19.16	3.95	8.90	24.11	257.63	Vertical	Pass
QPSK		1772.5	18.37	3.97	8.90	23.3	213.80	Vertical	Pass
20.0MHz	100/0	1720	19.23	3.81	8.90	24.32	270.40	Vertical	Pass
Band		1745	19.97	3.96	8.90	24.91	309.74	Vertical	Pass
QPSK		1770	19.94	4	8.90	24.84	304.79	Vertical	Pass

Radiated Power (EIRP) for Band 66									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Factor (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1710.7	17.53	3.76	8.90	22.67	184.93	Horizontal	Pass
		1745	16.20	3.91	8.90	21.19	131.52	Horizontal	Pass
		1779.3	15.17	3.93	8.90	20.14	103.28	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1711.5	16.48	3.77	8.90	21.61	144.88	Horizontal	Pass
		1745	16.61	3.91	8.90	21.6	144.54	Horizontal	Pass
		1778.5	16.92	3.94	8.90	21.88	154.17	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1712.5	17.26	3.77	8.90	22.39	173.38	Horizontal	Pass
		1745	15.49	3.91	8.90	20.48	111.69	Horizontal	Pass
		1777.5	15.87	3.94	8.90	20.83	121.06	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1715	17.57	3.79	8.90	22.68	185.35	Horizontal	Pass
		1745	16.86	3.95	8.90	21.81	151.71	Horizontal	Pass
		1775	17.28	3.97	8.90	22.21	166.34	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1717.5	16.35	3.79	8.90	21.46	139.96	Horizontal	Pass
		1745	16.86	3.95	8.90	21.81	151.71	Horizontal	Pass
		1772.5	17.23	3.97	8.90	22.16	164.44	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1720	16.79	3.81	8.90	21.88	154.17	Horizontal	Pass
		1745	17.36	3.96	8.90	22.3	169.82	Horizontal	Pass
		1770	16.21	4	8.90	21.11	129.12	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1710.7	15.88	3.76	8.90	21.02	126.47	Vertical	Pass
		1745	17.59	3.91	8.90	22.58	181.13	Vertical	Pass
		1779.3	17.21	3.93	8.90	22.18	165.20	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1711.5	17.16	3.77	8.90	22.29	169.43	Vertical	Pass
		1745	16.93	3.91	8.90	21.92	155.60	Vertical	Pass
		1778.5	17.08	3.94	8.90	22.04	159.96	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1712.5	17.24	3.77	8.90	22.37	172.58	Vertical	Pass
		1745	17.73	3.91	8.90	22.72	187.07	Vertical	Pass
		1777.5	17.60	3.94	8.90	22.56	180.30	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1715	17.01	3.79	8.90	22.12	162.93	Vertical	Pass
		1745	16.47	3.95	8.90	21.42	138.68	Vertical	Pass
		1775	17.04	3.97	8.90	21.97	157.40	Vertical	Pass
15.0MHz Band 16 QAM	75/0	1717.5	17.26	3.79	8.90	22.37	172.58	Vertical	Pass
		1745	17.55	3.95	8.90	22.5	177.83	Vertical	Pass
		1772.5	17.00	3.97	8.90	21.93	155.96	Vertical	Pass

20.0MHz	100/0	1720	17.21	3.81	8.90	22.3	169.82	Vertical	Pass
Band 16		1745	18.11	3.96	8.90	23.05	201.84	Vertical	Pass
QAM		1770	18.06	4	8.90	22.96	197.70	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

8.10 LTE BAND 71

Radiated Power (ERP) for Band 71										
Mode	RB/RB SIZE	Frequency	Result							Conclusi on
			SG Level	Cable Loss (dBm)	Factor (dB)	Correction	Max. ERP	Max. ERP	Polarization Of Max. ERP	
			(dBm)			(dB)	Average	Average		
							(dBm)	(mW)		
5.0MHz Band QPSK	25/0	665.5	5.43	1.91	19.68	2.15	21.05	127.35	Horizontal	Pass
		680.5	4.52	1.91	19.77	2.15	20.23	105.44	Horizontal	Pass
		695.5	5.83	1.93	19.82	2.15	21.57	143.55	Horizontal	Pass
10.0MH z Band QPSK	50/0	668	4.72	1.91	19.70	2.15	20.36	108.64	Horizontal	Pass
		680.5	4.77	1.91	19.77	2.15	20.48	111.69	Horizontal	Pass
		693	5.54	1.93	19.81	2.15	21.27	133.97	Horizontal	Pass
15.0MH z Band QPSK	75/0	670.5	5.99	1.91	19.71	2.15	21.64	145.88	Horizontal	Pass
		680.5	4.84	1.91	19.77	2.15	20.55	113.50	Horizontal	Pass
		690.5	5.63	1.92	19.79	2.15	21.35	136.46	Horizontal	Pass
20.0MH z Band QPSK	100/0	673	6.07	1.91	19.73	2.15	21.74	149.28	Horizontal	Pass
		683	5.32	1.91	19.77	2.15	21.03	126.77	Horizontal	Pass
		688	4.79	1.92	19.78	2.15	20.5	112.20	Horizontal	Pass
5.0MHz Band QPSK	25/0	665.5	5.71	1.91	19.68	2.15	21.33	135.83	Vertical	Pass
		680.5	5.78	1.91	19.77	2.15	21.49	140.93	Vertical	Pass
		695.5	5.84	1.93	19.82	2.15	21.58	143.88	Vertical	Pass
15.0MH z Band QPSK	50/0	668	6.74	1.91	19.70	2.15	22.38	172.98	Vertical	Pass
		680.5	6.49	1.91	19.77	2.15	22.2	165.96	Vertical	Pass
		693	5.76	1.93	19.81	2.15	21.49	140.93	Vertical	Pass
15.0MH z Band QPSK	75/0	670.5	5.88	1.91	19.71	2.15	21.53	142.23	Vertical	Pass
		680.5	6.88	1.91	19.77	2.15	22.59	181.55	Vertical	Pass
		690.5	5.71	1.92	19.79	2.15	21.43	139.00	Vertical	Pass
20MHz Band QPSK	100/0	673	5.47	1.91	19.73	2.15	21.14	130.02	Vertical	Pass
		683	7.30	1.91	19.77	2.15	23.01	199.99	Vertical	Pass
		688	7.35	1.92	19.78	2.15	23.06	202.30	Vertical	Pass

Radiated Power (ERP) for Band 71										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss (dBm)	Factor (dB)	Correction	Max. ERP	Max. ERP	Polarization Of Max. ERP	
			(dBm)			(dB)	Average	Average		
							(dBm)	(mW)		
5.0MHz Band 16 QAM	25/0	665.5	6.45	1.91	19.68	2.15	22.07	161.06	Horizontal	Pass
		680.5	6.87	1.91	19.77	2.15	22.58	181.13	Horizontal	Pass
		695.5	5.34	1.93	19.82	2.15	21.08	128.23	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	668	6.64	1.91	19.70	2.15	22.28	169.04	Horizontal	Pass
		680.5	6.27	1.91	19.77	2.15	21.98	157.76	Horizontal	Pass
		693	6.16	1.93	19.81	2.15	21.89	154.53	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	670.5	5.64	1.91	19.71	2.15	21.29	134.59	Horizontal	Pass
		680.5	5.64	1.91	19.77	2.15	21.35	136.46	Horizontal	Pass
		690.5	5.38	1.92	19.79	2.15	21.1	128.82	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	673	4.96	1.91	19.73	2.15	20.63	115.61	Horizontal	Pass
		683	6.04	1.91	19.77	2.15	21.75	149.62	Horizontal	Pass
		688	5.85	1.92	19.78	2.15	21.56	143.22	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	665.5	6.70	1.91	19.68	2.15	22.32	170.61	Vertical	Pass
		680.5	7.12	1.91	19.77	2.15	22.83	191.87	Vertical	Pass
		695.5	6.14	1.93	19.82	2.15	21.88	154.17	Vertical	Pass
10.0MHz Band 16 QAM	50/0	668	5.34	1.91	19.70	2.15	20.98	125.31	Vertical	Pass
		680.5	5.11	1.91	19.77	2.15	20.82	120.78	Vertical	Pass
		693	4.98	1.93	19.81	2.15	20.71	117.76	Vertical	Pass
15.0MHz Band 16 QAM	75/0	670.5	7.01	1.91	19.71	2.15	22.66	184.50	Vertical	Pass
		680.5	5.03	1.91	19.77	2.15	20.74	118.58	Vertical	Pass
		690.5	6.54	1.92	19.79	2.15	22.26	168.27	Vertical	Pass
20.0MHz Band 16 QAM	100/0	673	7.66	1.91	19.73	2.15	23.33	215.28	Vertical	Pass
		683	5.61	1.91	19.77	2.15	21.32	135.52	Vertical	Pass
		688	6.14	1.92	19.78	2.15	21.85	153.11	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53 and §90.691

LIMIT

§22.917 (e) and §24.238 and §90.691 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 2/4/5/7/12/13/17/66/71

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-54.40	4.04	33.51	-24.93	-13	-11.93	Horizontal
3701.4	-53.49	4.04	33.51	-24.02	-13	-11.02	Vertical
5552.1	-55.90	5.24	35.84	-25.30	-13	-12.30	Vertical
5552.1	-57.42	5.24	35.84	-26.82	-13	-13.82	Horizontal
Test Results for Mid Channel 1880MHz							
3760	-47.00	4.04	33.56	-17.48	-13	-4.48	Horizontal
3760	-52.09	4.04	33.56	-22.57	-13	-9.57	Vertical
5640	-53.12	5.24	35.91	-22.45	-13	-9.45	Vertical
5640	-52.12	5.24	35.91	-21.45	-13	-8.45	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-47.02	4.04	34.00	-17.06	-13	-4.06	Horizontal
3818.6	-54.21	4.04	34.00	-24.25	-13	-11.25	Vertical
5727.9	-52.73	5.24	36.04	-21.93	-13	-8.93	Vertical
5727.9	-50.34	5.24	36.04	-19.54	-13	-6.54	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720	-50.05	4.07	33.54	-20.58	-13	-7.58	Horizontal
3720	-52.72	4.07	33.54	-23.25	-13	-10.25	Vertical
5580	-55.13	5.28	35.86	-24.55	-13	-11.55	Vertical
5580	-57.50	5.28	35.86	-26.92	-13	-13.92	Horizontal
Test Results for Mid Channel 1880MHz							
3760	-45.33	4.04	33.56	-15.81	-13	-2.81	Horizontal
3760	-48.82	4.04	33.56	-19.30	-13	-6.30	Vertical
5640	-54.63	5.24	35.91	-23.96	-13	-10.96	Vertical
5640	-53.68	5.24	35.91	-23.01	-13	-10.01	Horizontal
Test Results for High Channel 1900MHz							
3800	-50.87	4.04	34.00	-20.91	-13	-7.91	Horizontal
3800	-51.09	4.04	34.00	-21.13	-13	-8.13	Vertical
5700	-55.24	5.24	36.04	-24.44	-13	-11.44	Vertical
5700	-54.53	5.24	36.04	-23.73	-13	-10.73	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-54.11	4.02	29.80	-28.33	-13	-15.33	Horizontal
3421.4	-64.65	4.02	29.80	-38.87	-13	-25.87	Vertical
5132.1	-60.90	5.24	35.84	-30.30	-13	-17.30	Vertical
5132.1	-67.45	5.24	35.84	-36.85	-13	-23.85	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465	-3.34	4.03	30.00	22.63	-13	35.63	Horizontal
3465	-61.44	4.03	30.00	-35.47	-13	-22.47	Vertical
5197.5	-65.15	5.25	35.86	-34.54	-13	-21.54	Vertical
5197.5	-64.94	5.25	35.86	-34.33	-13	-21.33	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-3.33	4.05	30.01	22.63	-13	35.63	Horizontal
3508.6	-66.42	4.05	30.01	-40.46	-13	-27.46	Vertical
5262.9	-62.07	5.26	35.86	-31.47	-13	-18.47	Vertical
5262.9	-65.31	5.26	35.86	-34.71	-13	-21.71	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440	-46.46	4.02	29.80	-20.68	-13	-7.68	Horizontal
3440	-49.55	4.02	29.80	-23.77	-13	-10.77	Vertical
5160	-51.93	5.24	35.84	-21.33	-13	-8.33	Vertical
5160	-53.90	5.24	35.84	-23.30	-13	-10.30	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465	-41.49	4.03	30.00	-15.52	-13	-2.52	Horizontal
3465	-45.28	4.03	30.00	-19.31	-13	-6.31	Vertical
5197.5	-51.07	5.25	35.86	-20.46	-13	-7.46	Vertical
5197.5	-50.43	5.25	35.86	-19.82	-13	-6.82	Horizontal
Test Results for High Channel 1745MHz							
2490	-47.88	2.91	27.68	-23.11	-13	-10.11	Horizontal
3490	-47.58	2.91	27.68	-22.81	-13	-9.81	Vertical
5235	-52.08	5.26	35.86	-21.48	-13	-8.48	Vertical
5235	-51.15	5.26	35.86	-20.55	-13	-7.55	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-41.76	2.78	27.50	-17.04	-13	-4.04	Horizontal
1649.4	-49.62	2.78	27.50	-24.90	-13	-11.90	Vertical
2474.1	-47.17	2.90	27.80	-22.27	-13	-9.27	Vertical
2474.1	-46.68	2.90	27.80	-21.78	-13	-8.78	Horizontal
Test Results For Mid Channel 836.5MHz							
1673	-44.02	2.78	27.48	-19.32	-13	-6.32	Horizontal
1673	-43.93	2.78	27.48	-19.23	-13	-6.23	Vertical
2509.5	-43.89	2.91	27.70	-19.10	-13	-6.10	Vertical
2509.5	-43.90	2.91	27.70	-19.11	-13	-6.11	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-45.32	2.78	27.43	-20.67	-13	-7.67	Horizontal
1696.6	-47.79	2.78	27.43	-23.14	-13	-10.14	Vertical
2544.9	-44.05	2.92	27.74	-19.23	-13	-6.23	Vertical
2544.9	-43.22	2.92	27.74	-18.40	-13	-5.40	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658	-44.56	2.78	27.50	-19.84	-13	-6.84	Horizontal
1658	-43.12	2.78	27.50	-18.40	-13	-5.40	Vertical
2487	-46.71	2.90	27.80	-21.81	-13	-8.81	Vertical
2487	-46.72	2.90	27.80	-21.82	-13	-8.82	Horizontal
Test Results for Mid Channel 836.5MHz							
1673	-46.19	2.78	27.48	-21.49	-13	-8.49	Horizontal
1673	-46.08	2.78	27.48	-21.38	-13	-8.38	Vertical
2509.5	-48.74	2.91	27.70	-23.95	-13	-10.95	Vertical
2509.5	-43.92	2.91	27.70	-19.13	-13	-6.13	Horizontal
Test Results for High Channel 844MHz							
1688	-47.45	2.78	27.43	-22.80	-13	-9.80	Horizontal
1688	-43.00	2.78	27.43	-18.35	-13	-5.35	Vertical
2532	-43.90	2.92	27.74	-19.08	-13	-6.08	Vertical
2532	-42.10	2.92	27.74	-17.28	-13	-4.28	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005	-64.45	5.23	35.81	-33.87	-25	-8.87	Horizontal
5005	-60.68	5.23	35.81	-30.10	-25	-5.10	Vertical
7507.5	-67.70	5.67	36.85	-36.52	-25	-11.52	Vertical
7507.5	-64.74	5.67	36.85	-33.56	-25	-8.56	Horizontal
Test Results for Mid Channel 2535MHz							
5070	-61.88	5.23	35.82	-31.29	-25	-6.29	Horizontal
5070	-65.01	5.23	35.82	-34.42	-25	-9.42	Vertical
7605	-64.94	5.67	36.85	-33.76	-25	-8.76	Vertical
7605	-65.59	5.67	36.85	-34.41	-25	-9.41	Horizontal
Test Results for High Channel 2567.5MHz							
5135	-66.47	5.24	35.83	-35.88	-25	-10.88	Horizontal
5135	-62.18	5.24	35.83	-31.59	-25	-6.59	Vertical
7702.5	-64.93	5.68	36.87	-33.74	-25	-8.74	Vertical
7702.5	-68.25	5.68	36.87	-37.06	-25	-12.06	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020	-65.18	5.23	35.82	-34.59	-25	-9.59	Horizontal
5020	-62.57	5.23	35.82	-31.98	-25	-6.98	Vertical
7530	-65.51	5.67	36.86	-34.32	-25	-9.32	Vertical
7530	-61.18	5.67	36.86	-29.99	-25	-4.99	Horizontal
Test Results for Mid Channel 2535MHz							
5070	-62.39	5.23	35.82	-31.80	-25	-6.80	Horizontal
5070	-62.21	5.23	35.82	-31.62	-25	-6.62	Vertical
7605	-64.47	5.67	36.85	-33.29	-25	-8.29	Vertical
7605	-65.96	5.67	36.85	-34.78	-25	-9.78	Horizontal
Test Results for High Channel 2560MHz							
5120	-61.14	5.24	35.83	-30.55	-25	-5.55	Horizontal
5120	-64.44	5.24	35.83	-33.85	-25	-8.85	Vertical
7680	-65.49	5.70	36.88	-34.31	-25	-9.31	Vertical
7680	-65.59	5.70	36.88	-34.41	-25	-9.41	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-42.33	2.60	27.2	-17.73	-13	-4.73	Horizontal
1399.4	-42.09	2.60	27.2	-17.49	-13	-4.49	Vertical
2099.1	-43.50	2.85	27.54	-18.81	-13	-5.81	Vertical
2099.1	-40.32	2.85	27.54	-15.63	-13	-2.63	Horizontal
Test Results For Mid Channel 707.5MHz							
1415	-43.50	2.61	27.28	-18.83	-13	-5.83	Horizontal
1415	-42.86	2.61	27.28	-18.19	-13	-5.19	Vertical
2122.5	-40.13	2.87	27.59	-15.41	-13	-2.41	Vertical
2122.5	-46.22	2.87	27.59	-21.50	-13	-8.50	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-44.77	2.63	27.28	-20.12	-13	-7.12	Horizontal
1430.6	-49.15	2.63	27.28	-24.50	-13	-11.50	Vertical
2145.9	-45.86	2.88	27.60	-21.14	-13	-8.14	Vertical
2145.9	-43.94	2.88	27.60	-19.22	-13	-6.22	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408	-40.31	2.61	27.26	-15.66	-13	-2.66	Horizontal
1408	-46.68	2.61	27.26	-22.03	-13	-9.03	Vertical
2112	-44.88	2.87	27.58	-20.17	-13	-7.17	Vertical
2112	-45.85	2.87	27.58	-21.14	-13	-8.14	Horizontal
Test Results for Mid Channel 707.5MHz							
1415	-42.86	2.61	27.28	-18.19	-13	-5.19	Horizontal
1415	-47.55	2.61	27.28	-22.88	-13	-9.88	Vertical
2122.5	-45.32	2.87	27.59	-20.60	-13	-7.60	Vertical
2122.5	-43.71	2.87	27.59	-18.99	-13	-5.99	Horizontal
Test Results for High Channel 711MHz							
1422	-48.48	2.62	27.28	-23.82	-13	-10.82	Horizontal
1422	-40.06	2.62	27.28	-15.40	-13	-2.40	Vertical
2133	-46.60	2.87	27.60	-21.87	-13	-8.87	Vertical
2133	-45.27	2.87	27.60	-20.54	-13	-7.54	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 13

QPSK EIRP POWER FOR LTE BAND 13 (5MHZ BANDWIDTH)

Test Results for Low Channel 779.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1559	-50.07	2.61	27.28	-25.40	-13	-12.40	Horizontal
1559	-48.93	2.61	27.28	-24.26	-13	-11.26	Vertical
2338.5	-49.73	2.87	27.59	-25.01	-13	-12.01	Vertical
2338.5	-48.57	2.87	27.59	-23.85	-13	-10.85	Horizontal
Test Results For Mid Channel 782MHz							
1564	-49.10	2.62	27.30	-24.42	-13	-11.42	Horizontal
1564	-51.82	2.62	27.30	-27.14	-13	-14.14	Vertical
2346	-51.99	2.87	27.62	-27.24	-13	-14.24	Vertical
2346	-54.49	2.87	27.62	-29.74	-13	-16.74	Horizontal
Test Results for High Channel 784.5MHz							
1569	-53.05	2.66	27.28	-28.43	-13	-15.43	Horizontal
1569	-52.35	2.66	27.28	-27.73	-13	-14.73	Vertical
2353.5	-49.69	2.88	27.60	-24.97	-13	-11.97	Vertical
2353.5	-49.21	2.88	27.60	-24.49	-13	-11.49	Horizontal

QPSK EIRP POWER FOR LTE BAND 13 (10MHZ BANDWIDTH)

Test Results for Channel 782MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1564	-51.95	2.62	27.30	-27.27	-13	-14.27	Horizontal
1564	-50.16	2.62	27.30	-25.48	-13	-12.48	Vertical
2346	-51.13	2.87	27.62	-26.38	-13	-13.38	Vertical
2346	-54.35	2.87	27.62	-29.60	-13	-16.60	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.7 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413	-52.07	2.61	27.28	-27.40	-13	-14.40	Horizontal
1413	-49.26	2.61	27.28	-24.59	-13	-11.59	Vertical
2119.5	-51.23	2.87	27.59	-26.51	-13	-13.51	Vertical
2119.5	-50.83	2.87	27.59	-26.11	-13	-13.11	Horizontal
Test Results For Mid Channel 710MHz							
1420	-50.88	2.62	27.30	-26.20	-13	-13.20	Horizontal
1420	-50.80	2.62	27.30	-26.12	-13	-13.12	Vertical
2130	-51.72	2.87	27.62	-26.97	-13	-13.97	Vertical
2130	-48.16	2.87	27.62	-23.41	-13	-10.41	Horizontal
Test Results for High Channel 713.5MHz							
1427	-46.94	2.66	27.28	-22.32	-13	-9.32	Horizontal
1427	-47.00	2.66	27.28	-22.38	-13	-9.38	Vertical
2140.5	-49.54	2.88	27.60	-24.82	-13	-11.82	Vertical
2140.5	-53.61	2.88	27.60	-28.89	-13	-15.89	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Factor(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418	-52.51	2.62	27.30	-27.83	-13	-14.83	Horizontal
1418	-49.80	2.62	27.30	-25.12	-13	-12.12	Vertical
2127	-51.23	2.87	27.62	-26.48	-13	-13.48	Vertical
2127	-53.63	2.87	27.62	-28.88	-13	-15.88	Horizontal
Test Results for Mid Channel 710MHz							
1420	-52.67	2.62	27.30	-27.99	-13	-14.99	Horizontal
1420	-48.97	2.62	27.30	-24.29	-13	-11.29	Vertical
2130	-53.67	2.87	27.62	-28.92	-13	-15.92	Vertical
2130	-50.56	2.87	27.62	-25.81	-13	-12.81	Horizontal
Test Results for High Channel 711MHz							
1422	-49.43	2.62	27.30	-24.75	-13	-11.75	Horizontal
1422	-49.24	2.62	27.30	-24.56	-13	-11.56	Vertical
2133	-50.50	2.87	27.62	-25.75	-13	-12.75	Vertical
2133	-52.80	2.87	27.62	-28.05	-13	-15.05	Horizontal

Note: Spurious Emission Level = Spectrum Analyzer Read Value + Cable Loss+ Antenna Factor + 11.74

. Margin = Spurious Emission Level - Limit

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.8 LTE BAND 66

QPSK EIRP POWER FOR LTE BAND 66 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-53.28	2.61	27.28	-28.61	-13	-15.61	Horizontal
3421.4	-58.61	2.61	27.28	-33.94	-13	-20.94	Vertical
5132.1	-59.86	2.87	27.59	-35.14	-13	-22.14	Vertical
5132.1	-47.78	2.87	27.59	-23.06	-13	-10.06	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-51.67	2.62	27.3	-26.99	-13	-13.99	Horizontal
3490	-60.74	2.62	27.3	-36.06	-13	-23.06	Vertical
5337.9	-59.08	2.87	27.62	-34.33	-13	-21.33	Vertical
5337.9	-57.46	2.87	27.62	-32.71	-13	-19.71	Horizontal
Test Results for High Channel 1779.3MHz							
3558.6	-58.40	2.66	27.28	-33.78	-13	-20.78	Horizontal
3558.6	-52.47	2.66	27.28	-27.85	-13	-14.85	Vertical
5337.9	-53.36	2.88	27.6	-28.64	-13	-15.64	Vertical
5337.9	-57.84	2.88	27.6	-33.12	-13	-20.12	Horizontal

QPSK EIRP POWER FOR LTE BAND 66 (20MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440	-50.70	2.62	27.3	-26.02	-13	-13.02	Horizontal
3440	-56.36	2.62	27.3	-31.68	-13	-18.68	Vertical
5160	-58.71	2.87	27.62	-33.96	-13	-20.96	Vertical
5160	-55.66	2.87	27.62	-30.91	-13	-17.91	Horizontal
Test Results for Mid Channel 1745MHz							
3490	-55.33	2.62	27.3	-30.65	-13	-17.65	Horizontal
3490	-53.17	2.62	27.3	-28.49	-13	-15.49	Vertical
5337.9	-59.14	2.87	27.62	-34.39	-13	-21.39	Vertical
5337.9	-56.22	2.87	27.62	-31.47	-13	-18.47	Horizontal
Test Results for High Channel 1770MHz							
3540	-56.12	2.62	27.3	-31.44	-13	-18.44	Horizontal
3540	-54.71	2.62	27.3	-30.03	-13	-17.03	Vertical
5310	-52.94	2.87	27.62	-28.19	-13	-15.19	Vertical
5310	-50.67	2.87	27.62	-25.92	-13	-12.92	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.9 LTE BAND 71

QPSK EIRP POWER FOR LTE BAND 71 (5MHZ BANDWIDTH)

Test Results for Low Channel 665.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1331	-52.88	2.61	27.28	-28.21	-13	-15.21	Horizontal
1331	-50.41	2.61	27.28	-25.74	-13	-12.74	Vertical
1996.5	-51.04	2.87	27.59	-26.32	-13	-13.32	Vertical
1996.5	-52.79	2.87	27.59	-28.07	-13	-15.07	Horizontal
Test Results for Mid Channel 680.5MHz							
1361	-52.21	2.62	27.30	-27.53	-13	-14.53	Horizontal
1361	-49.90	2.62	27.30	-25.22	-13	-12.22	Vertical
2041.5	-51.66	2.87	27.62	-26.91	-13	-13.91	Vertical
2041.5	-50.58	2.87	27.62	-25.83	-13	-12.83	Horizontal
Test Results for High Channel 695.5MHz							
1391	-48.66	2.66	27.28	-24.04	-13	-11.04	Horizontal
1391	-49.70	2.66	27.28	-25.08	-13	-12.08	Vertical
2086.5	-51.32	2.88	27.60	-26.60	-13	-13.60	Vertical
2086.5	-53.32	2.88	27.60	-28.60	-13	-15.60	Horizontal

QPSK EIRP POWER FOR LTE BAND 71 (20MHZ BANDWIDTH)

Test Results for Low Channel 673MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1346	-53.23	2.62	27.30	-28.55	-13	-15.55	Horizontal
1346	-49.92	2.62	27.30	-25.24	-13	-12.24	Vertical
2019	-51.43	2.87	27.62	-26.68	-13	-13.68	Vertical
2019	-53.04	2.87	27.62	-28.29	-13	-15.29	Horizontal
Test Results for Mid Channel 683MHz							
1366	-51.51	2.62	27.30	-26.83	-13	-13.83	Horizontal
1366	-49.53	2.62	27.30	-24.85	-13	-11.85	Vertical
2049	-52.88	2.87	27.62	-28.13	-13	-15.13	Vertical
2049	-50.88	2.87	27.62	-26.13	-13	-13.13	Horizontal
Test Results for High Channel 688MHz							
1376	-49.28	2.62	27.30	-24.60	-13	-11.60	Horizontal
1376	-49.26	2.62	27.30	-24.58	-13	-11.58	Vertical
2064	-51.79	2.87	27.62	-27.04	-13	-14.04	Vertical
2064	-54.16	2.87	27.62	-29.41	-13	-16.41	Horizontal

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54, §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- ☐ Temp. = -30° to $+50^{\circ}\text{C}$
- ☐ Voltage = low voltage, DC 3.23V, Normal, DC 3.8V and High voltage, DC 4.37V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2/4/5/7/12/13/17/66/71

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1880	0	0.00000	2.5
3.8	1880	2	0.00106	2.5
4.37	1880	6	0.00319	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	13	0.00691	2.5
Extreme (50C)	1880	11	0.00585	2.5
Extreme (40C)	1880	22	0.01170	2.5
Extreme (30C)	1880	5	0.00266	2.5
Extreme (10C)	1880	22	0.01170	2.5
Extreme (0C)	1880	21	0.01117	2.5
Extreme (-10C)	1880	4	0.00213	2.5
Extreme (-20C)	1880	0	0.00000	2.5
Extreme (-30C)	1880	2	0.00106	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1880	8	0.00426	2.5
3.8	1880	0	0.00000	2.5
4.37	1880	23	0.01223	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	0	0.00000	2.5
Extreme (50C)	1880	5	0.00266	2.5
Extreme (40C)	1880	10	0.00532	2.5
Extreme (30C)	1880	11	0.00585	2.5
Extreme (10C)	1880	16	0.00851	2.5
Extreme (0C)	1880	5	0.00266	2.5
Extreme (-10C)	1880	6	0.00319	2.5
Extreme (-20C)	1880	24	0.01277	2.5
Extreme (-30C)	1880	9	0.00479	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1732.5	8	0.00462	2.5
3.8	1732.5	19	0.01097	2.5
4.37	1732.5	6	0.00346	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	7	0.00404	2.5
Extreme (50C)	1732.5	22	0.01270	2.5
Extreme (40C)	1732.5	6	0.00346	2.5
Extreme (30C)	1732.5	3	0.00173	2.5
Extreme (10C)	1732.5	20	0.01154	2.5
Extreme (0C)	1732.5	7	0.00404	2.5
Extreme (-10C)	1732.5	10	0.00577	2.5
Extreme (-20C)	1732.5	23	0.01328	2.5
Extreme (-30C)	1732.5	21	0.01212	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1732.5	22	0.01270	2.5
3.8	1732.5	2	0.00115	2.5
4.37	1732.5	11	0.00635	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	17	0.00981	2.5
Extreme (50C)	1732.5	9	0.00519	2.5
Extreme (40C)	1732.5	3	0.00173	2.5
Extreme (30C)	1732.5	14	0.00808	2.5
Extreme (10C)	1732.5	8	0.00462	2.5
Extreme (0C)	1732.5	9	0.00519	2.5
Extreme (-10C)	1732.5	2	0.00115	2.5
Extreme (-20C)	1732.5	17	0.00981	2.5
Extreme (-30C)	1732.5	21	0.01212	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	836.5	6	0.00717	2.5
3.8	836.5	1	0.00120	2.5
4.37	836.5	5	0.00598	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	24	0.02869	2.5
Extreme (50C)	836.5	6	0.00717	2.5
Extreme (40C)	836.5	15	0.01793	2.5
Extreme (30C)	836.5	7	0.00837	2.5
Extreme (10C)	836.5	23	0.02750	2.5
Extreme (0C)	836.5	25	0.02989	2.5
Extreme (-10C)	836.5	1	0.00120	2.5
Extreme (-20C)	836.5	4	0.00478	2.5
Extreme (-30C)	836.5	8	0.00956	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	836.5	17	0.02032	2.5
3.8	836.5	22	0.02630	2.5
4.37	836.5	5	0.00598	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	14	0.01674	2.5
Extreme (50C)	836.5	20	0.02391	2.5
Extreme (40C)	836.5	12	0.01435	2.5
Extreme (30C)	836.5	2	0.00239	2.5
Extreme (10C)	836.5	16	0.01913	2.5
Extreme (0C)	836.5	15	0.01793	2.5
Extreme (-10C)	836.5	4	0.00478	2.5
Extreme (-20C)	836.5	5	0.00598	2.5
Extreme (-30C)	836.5	10	0.01195	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	2535	17	0.00671	2.5
3.8	2535	8	0.00316	2.5
4.37	2535	25	0.00986	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	5	0.00197	2.5
Extreme (50C)	2535	18	0.00710	2.5
Extreme (40C)	2535	16	0.00631	2.5
Extreme (30C)	2535	5	0.00197	2.5
Extreme (10C)	2535	11	0.00434	2.5
Extreme (0C)	2535	16	0.00631	2.5
Extreme (-10C)	2535	14	0.00552	2.5
Extreme (-20C)	2535	16	0.00631	2.5
Extreme (-30C)	2535	27	0.01065	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	2535	9	0.00355	2.5
3.8	2535	3	0.00118	2.5
4.37	2535	15	0.00592	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	16	0.00631	2.5
Extreme (50C)	2535	8	0.00316	2.5
Extreme (40C)	2535	25	0.00986	2.5
Extreme (30C)	2535	22	0.00868	2.5
Extreme (10C)	2535	8	0.00316	2.5
Extreme (0C)	2535	17	0.00671	2.5
Extreme (-10C)	2535	1	0.00039	2.5
Extreme (-20C)	2535	23	0.00907	2.5
Extreme (-30C)	2535	19	0.00750	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

Band 12 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	707.5	22	0.03110	2.5
3.8	707.5	13	0.01837	2.5
4.37	707.5	20	0.02827	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	12	0.01696	2.5
Extreme (50C)	707.5	18	0.02544	2.5
Extreme (40C)	707.5	10	0.01413	2.5
Extreme (30C)	707.5	2	0.00283	2.5
Extreme (10C)	707.5	3	0.00424	2.5
Extreme (0C)	707.5	11	0.01555	2.5
Extreme (-10C)	707.5	25	0.03534	2.5
Extreme (-20C)	707.5	18	0.02544	2.5
Extreme (-30C)	707.5	11	0.01555	2.5

Band 12 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	707.5	24	0.03392	2.5
3.8	707.5	7	0.00989	2.5
4.37	707.5	3	0.00424	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	707.5	1	0.00141	2.5
Extreme (50C)	707.5	19	0.02686	2.5
Extreme (40C)	707.5	6	0.00848	2.5
Extreme (30C)	707.5	24	0.03392	2.5
Extreme (10C)	707.5	19	0.02686	2.5
Extreme (0C)	707.5	17	0.02403	2.5
Extreme (-10C)	707.5	7	0.00989	2.5
Extreme (-20C)	707.5	20	0.02827	2.5
Extreme (-30C)	707.5	8	0.01131	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 13

Band 13 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	782.0	14	0.01790	2.5
3.8	782.0	7	0.00895	2.5
4.37	782.0	5	0.00639	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	782.0	2	0.00256	2.5
Extreme (50C)	782.0	17	0.02174	2.5
Extreme (40C)	782.0	5	0.00639	2.5
Extreme (30C)	782.0	4	0.00512	2.5
Extreme (10C)	782.0	17	0.02174	2.5
Extreme (0C)	782.0	15	0.01918	2.5
Extreme (-10C)	782.0	2	0.00256	2.5
Extreme (-20C)	782.0	16	0.02046	2.5
Extreme (-30C)	782.0	2	0.00256	2.5

Band 13 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	782.0	15	0.01918	2.5
3.8	782.0	5	0.00639	2.5
4.37	782.0	4	0.00512	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	782.0	25	0.03197	2.5
Extreme (50C)	782.0	11	0.01407	2.5
Extreme (40C)	782.0	22	0.02813	2.5
Extreme (30C)	782.0	4	0.00512	2.5
Extreme (10C)	782.0	21	0.02685	2.5
Extreme (0C)	782.0	19	0.02430	2.5
Extreme (-10C)	782.0	20	0.02558	2.5
Extreme (-20C)	782.0	1	0.00128	2.5
Extreme (-30C)	782.0	5	0.00639	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 17

Band 17 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	710	27	0.03803	2.5
3.8	710	13	0.01831	2.5
4.37	710	5	0.00704	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710	22	0.03099	2.5
Extreme (50C)	710	7	0.00986	2.5
Extreme (40C)	710	1	0.00141	2.5
Extreme (30C)	710	1	0.00141	2.5
Extreme (10C)	710	20	0.02817	2.5
Extreme (0C)	710	15	0.02113	2.5
Extreme (-10C)	710	13	0.01831	2.5
Extreme (-20C)	710	21	0.02958	2.5
Extreme (-30C)	710	16	0.02254	2.5

Band 17 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	710	7	0.00986	2.5
3.8	710	11	0.01549	2.5
4.37	710	7	0.00986	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710	19	0.02676	2.5
Extreme (50C)	710	4	0.00563	2.5
Extreme (40C)	710	26	0.03662	2.5
Extreme (30C)	710	20	0.02817	2.5
Extreme (10C)	710	10	0.01408	2.5
Extreme (0C)	710	13	0.01831	2.5
Extreme (-10C)	710	9	0.01268	2.5
Extreme (-20C)	710	13	0.01831	2.5
Extreme (-30C)	710	21	0.02958	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.8 LTE BAND 66

Band 66 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1745	1	0.00057	2.5
3.8	1745	25	0.01433	2.5
4.37	1745	11	0.00630	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1745	21	0.01203	2.5
Extreme (50C)	1745	18	0.01032	2.5
Extreme (40C)	1745	8	0.00458	2.5
Extreme (30C)	1745	15	0.00860	2.5
Extreme (10C)	1745	4	0.00229	2.5
Extreme (0C)	1745	25	0.01433	2.5
Extreme (-10C)	1745	0	0.00000	2.5
Extreme (-20C)	1745	25	0.01433	2.5
Extreme (-30C)	1745	16	0.00917	2.5

Band 66 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	1745	11	0.00630	2.5
3.8	1745	18	0.01032	2.5
4.37	1745	2	0.00115	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1745	26	0.01490	2.5
Extreme (50C)	1745	22	0.01261	2.5
Extreme (40C)	1745	8	0.00458	2.5
Extreme (30C)	1745	17	0.00974	2.5
Extreme (10C)	1745	6	0.00344	2.5
Extreme (0C)	1745	3	0.00172	2.5
Extreme (-10C)	1745	21	0.01203	2.5
Extreme (-20C)	1745	27	0.01547	2.5
Extreme (-30C)	1745	15	0.00860	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.9 LTE BAND 71

Band 71 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	683	8	0.01171	2.5
3.8	683	13	0.01903	2.5
4.37	683	12	0.01757	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	683	5	0.00732	2.5
Extreme (50C)	683	17	0.02489	2.5
Extreme (40C)	683	5	0.00732	2.5
Extreme (30C)	683	12	0.01757	2.5
Extreme (10C)	683	22	0.03221	2.5
Extreme (0C)	683	3	0.00439	2.5
Extreme (-10C)	683	11	0.01611	2.5
Extreme (-20C)	683	5	0.00732	2.5
Extreme (-30C)	683	26	0.03807	2.5

Band 71 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.23	683	8	0.01171	2.5
3.8	683	9	0.01318	2.5
4.37	683	6	0.00878	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	683	16	0.02343	2.5
Extreme (50C)	683	11	0.01611	2.5
Extreme (40C)	683	8	0.01171	2.5
Extreme (30C)	683	9	0.01318	2.5
Extreme (10C)	683	26	0.03807	2.5
Extreme (0C)	683	10	0.01464	2.5
Extreme (-10C)	683	19	0.02782	2.5
Extreme (-20C)	683	1	0.00146	2.5
Extreme (-30C)	683	15	0.02196	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

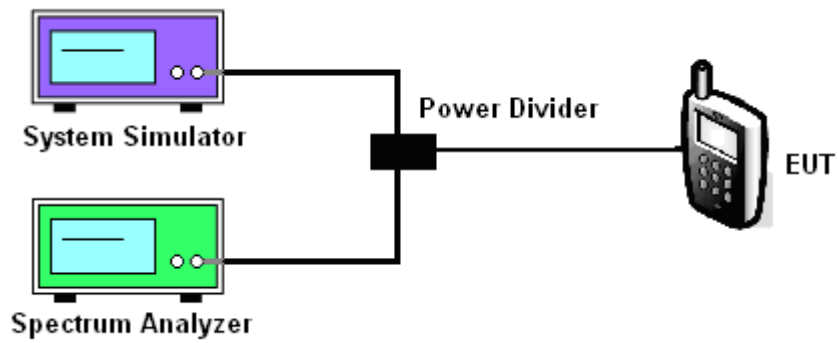

MODES TESTED

LTE Band 2/4/5/7/12/13/17/66/71

Test data reference attachment.

-----END OF REPORT-----