

FCC PART 15.247

TEST REPORT

For

SWAGTEK

10205 NW 19th Street, STE101, Miami, FL 33172, USA

FCC ID: O5550416

Report Type: Original Report	Product Type: 3G MOBILE PHONE
Test Engineer: David Lee	<i>David Lee</i>
Report Number: RSZ160525007-00C	
Report Date: 2016-06-10	
Reviewed By: Candy Li RF Engineer	<i>Candy Li</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE	10
APPLICABLE STANDARD	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP.....	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED FACTOR & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	19
APPLICABLE STANDARD	19
MEASUREMENT UNCERTAINTY.....	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	22
TEST DATA	22
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST EQUIPMENT LIST AND DETAILS.....	43
TEST DATA	44
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	46
FCC §15.247(e) - POWER SPECTRAL DENSITY	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SWAGTEK's product, model number: LOGIC X5 LITE2 (FCC ID: O5550416) or the "EUT" in this report was a 3G MOBILE PHONE, which was measured approximately: 14.6 cm (L) × 7.4 cm (W) × 1.0 cm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V from adapter.

Adapter Information:

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5.0V, 1.0 A

Note: The series product, model LOGIC X5 LITE2, iSWAG Mynt and UNONU UW503, they are electrically identical and the difference between them is only the model number. Model LOGIC X5 LITE2 was selected for fully testing, which was explained in the attached product similarity declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 1602346 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2016-05-25.*

Objective

This report is prepared on behalf of SWAGTEK in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS and Part 22H & 24E submissions with FCC ID: O5550416.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10-2013.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13.

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

EUT was tested with Channel 1, 5 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Wifi test in the engineer mode and the worst case configuration are listed as below:

802.11b: Data rate: 1 Mbps, Power level: 14

802.11g: Data rate: 6 Mbps, Power level: 12

802.11n-HT20: Data rate: MCS0, Power level: 11

802.11n-HT40: Data rate: MCS0, Power level: 12

Pre-scan with all the data rates, the above data rate is the worst case for Wifi test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-Shielding Detachable Earphone Cable	1.2	EUT	Earphone
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

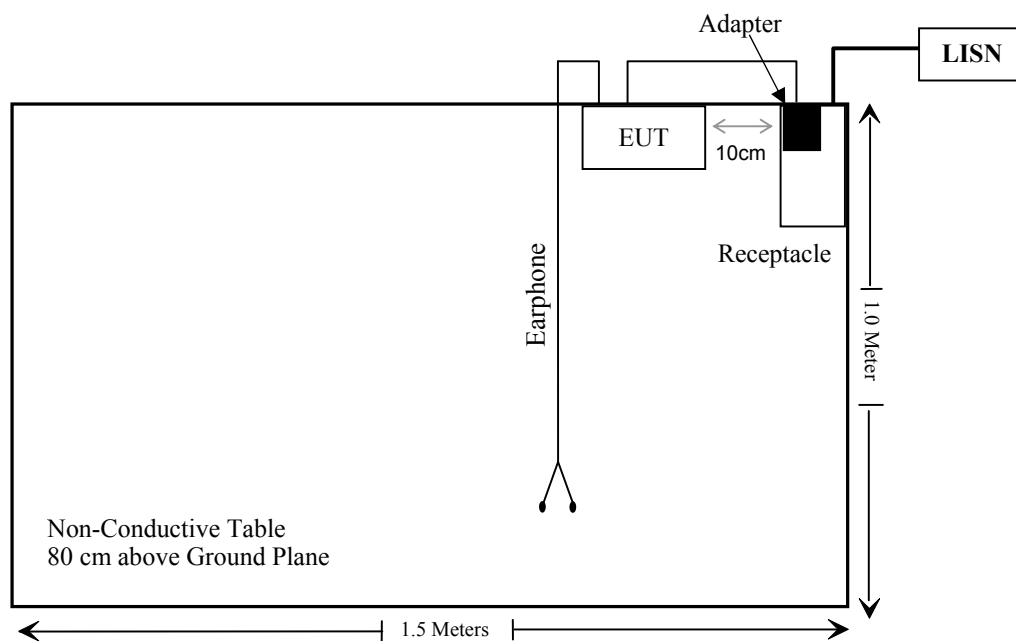

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2480	-6.00	0.25	5	0.1	3.0	Yes
Wi-Fi	2472	9.00	7.94	5	2.5	3.0	Yes

Result: No SAR test is required

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Expanded Measurement uncertainty
AC Mains	3.34 dB (k=2, 95% level of confidence)
CAT 3	3.72 dB (k=2, 95% level of confidence)
CAT 5	3.74 dB (k=2, 95% level of confidence)
CAT 6	4.54 dB (k=2, 95% level of confidence)

EUT Setup

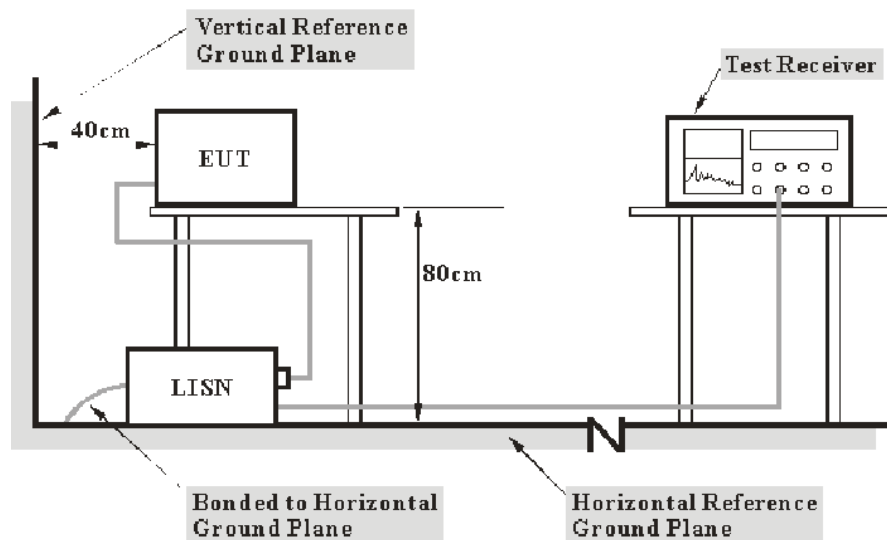

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2015-06-01	2016-05-31
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2015-12-15	2016-12-14
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2016-05-14	2017-05-14
Rohde & Schwarz	CE Test software	EMC 32	V8.53	NCR	NCR
Ducommun technologies	Conducted Emission Cable	RG-214	CB031	2015-06-15	2016-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as below:

11.2 dB at 0.205500 MHz in the Neutral conducted for Wi-Fi Mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	23.4 °C
Relative Humidity:	55.6 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2016-05-31.

EUT operation mode: Charging & Transmitting

Wi-Fi Mode:**AC 120V/60 Hz, Line**


EMI Auto Test L

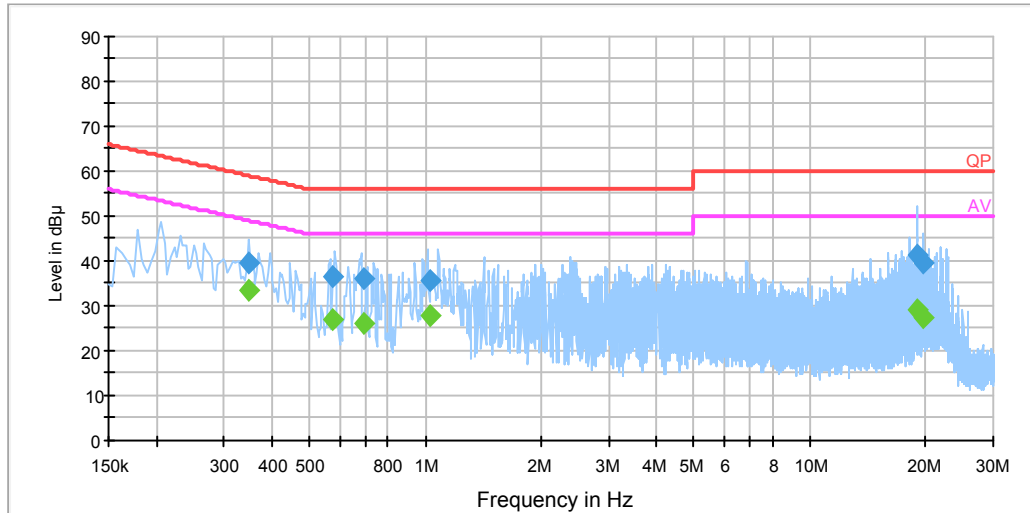

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.348810	39.8	19.9	59.0	19.2	QP
0.573270	36.3	19.9	56.0	19.7	QP
0.691770	36.0	19.9	56.0	20.0	QP
1.026790	35.8	20.0	56.0	20.2	QP
19.001090	41.5	20.1	60.0	18.5	QP
19.733690	39.4	20.1	60.0	20.6	QP
0.348810	33.5	19.9	49.0	15.5	Ave.
0.573270	27.1	19.9	46.0	18.9	Ave.
0.691770	26.0	19.9	46.0	20.0	Ave.
1.026790	27.8	20.0	46.0	18.2	Ave.
19.001090	29.3	20.1	50.0	20.7	Ave.
19.733690	27.6	20.1	50.0	22.4	Ave.

AC 120V/60 Hz, Neutral


EMI Auto Test N

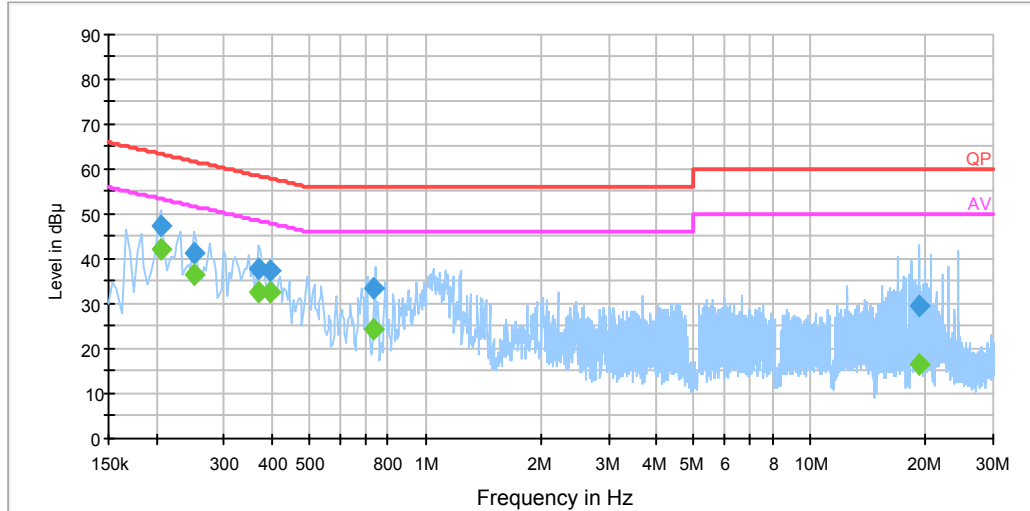

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.205500	47.3	20.0	63.4	16.1	QP
0.249500	41.5	20.0	61.8	20.3	QP
0.368450	37.6	19.9	58.5	20.9	QP
0.396030	37.3	19.9	57.9	20.6	QP
0.734870	33.7	19.9	56.0	22.3	QP
19.198270	29.8	20.1	60.0	30.2	QP
0.205500	42.2	20.0	53.4	11.2	Ave.
0.249500	36.7	20.0	51.8	15.1	Ave.
0.368450	32.8	19.9	48.5	15.7	Ave.
0.396030	32.4	19.9	47.9	15.5	Ave.
0.734870	24.6	19.9	46.0	21.4	Ave.
19.198270	16.4	20.1	50.0	33.6	Ave.

BLE Mode:**AC 120 V/60 Hz, Line:**


EMI Auto Test L

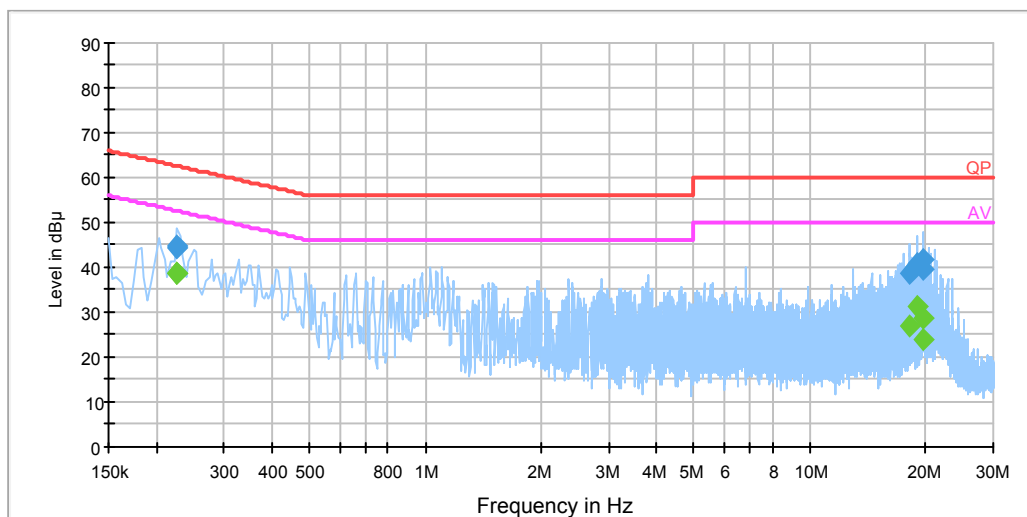

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.223500	44.4	20.0	62.6	18.2	QP
0.225500	44.6	20.0	62.6	18.0	QP
18.216550	38.6	20.1	60.0	21.4	QP
19.013090	40.8	20.1	60.0	19.2	QP
19.742110	39.6	20.1	60.0	20.4	QP
19.761570	41.7	20.1	60.0	18.3	QP
0.223500	38.8	20.0	52.6	13.8	Ave.
0.225500	38.8	20.0	52.6	13.8	Ave.
18.216550	27.1	20.1	50.0	22.9	Ave.
19.013090	31.2	20.1	50.0	18.8	Ave.
19.742110	23.9	20.1	50.0	26.1	Ave.
19.761570	28.7	20.1	50.0	21.3	Ave.

AC 120V/ 60 Hz, Neutral:

EMI Auto Test N

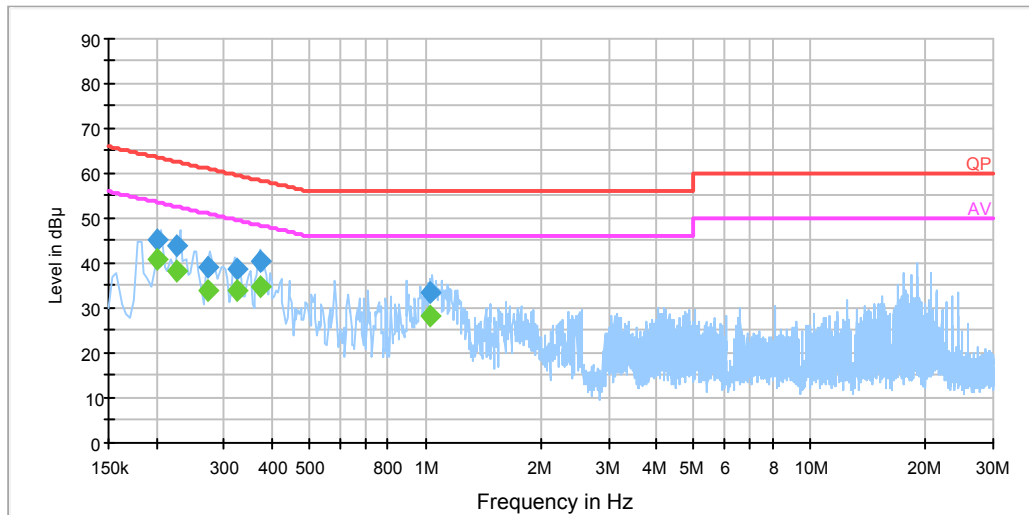

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.201500	45.2	20.0	63.5	18.3	QP
0.225500	44.0	20.0	62.6	18.6	QP
0.273500	39.2	19.9	61.0	21.8	QP
0.325170	38.7	19.9	59.6	20.9	QP
0.372390	40.4	19.9	58.4	18.0	QP
1.034310	33.7	20.0	56.0	22.3	QP
0.201500	40.7	20.0	53.5	12.8	Ave.
0.225500	38.2	20.0	52.6	14.4	Ave.
0.273500	33.9	19.9	51.0	17.1	Ave.
0.325170	33.8	19.9	49.6	15.8	Ave.
0.372390	34.9	19.9	48.4	13.5	Ave.
1.034310	28.3	20.0	46.0	17.7	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.81 dB for 30MHz-1GHz and 4.88 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

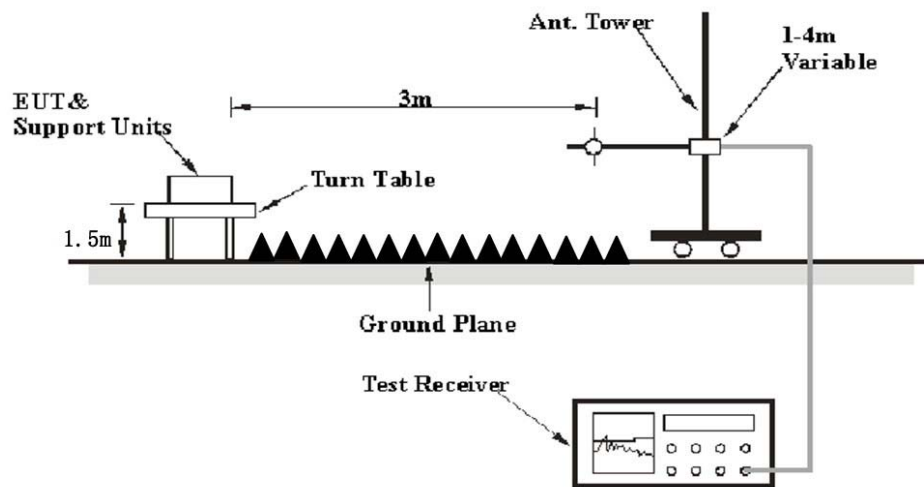

Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2016-05-06	2017-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-12-15	2016-12-14
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2016-04-23	2017-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2013-10-15	2016-10-15
TDK	Chamber	Chamber B	1#	2015-07-23	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
R&S	Auto test Software	EMC32	V9.10	NCR	NCR
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369223410-001	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	104PEA	218124002	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	1	2015-06-15	2016-06-15
Ducommun technologies	RF Cable	RG-214	2	2015-06-15	2016-06-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

5.02 dB at 2486.91 MHz in the Horizontal polarization in High channel for Wi-Fi 802.11n-HT20 Mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	55.6 %
ATM Pressure:	101.0 kPa

The testing was performed by David Lee on 2016-05-31.

EUT operation mode: Transmitting

30 MHz-25 GHz**802.11b Mode:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
195.2	39.41	QP	35	1.1	V	-8.5	30.91	43.5	12.59
2412.00	103.85	PK	244	2.0	H	-6.46	97.39	/	/
2412.00	99.44	Ave.	244	2.0	H	-6.46	92.98	/	/
2412.00	100.87	PK	80	2.0	V	-6.46	94.41	/	/
2412.00	96.68	Ave.	80	2.0	V	-6.46	90.22	/	/
2377.49	55.07	PK	260	1.2	H	-6.46	48.61	74	25.39
2377.49	37.01	Ave.	260	1.2	H	-6.46	30.55	54	23.45
2389.67	56.38	PK	290	1.9	H	-6.46	49.92	74	24.08
2389.67	37.88	Ave.	290	1.9	H	-6.46	31.42	54	22.58
2486.01	45.69	PK	172	1.6	H	-4.74	40.95	74	33.05
2486.01	29.51	Ave.	172	1.6	H	-4.74	24.77	54	29.23
4824.00	39.54	PK	73	1.7	V	3.79	43.33	74	30.67
4824.00	24.36	Ave.	73	1.7	V	3.79	28.15	54	25.85
7236.00	41.96	PK	284	2.4	H	9.79	51.75	74	22.25
7236.00	26.24	Ave.	284	2.4	H	9.79	36.03	54	17.97
9648.00	41.98	PK	150	2.1	V	11.85	53.83	74	20.17
9648.00	26.76	Ave.	150	2.1	V	11.85	38.61	54	15.39
Middle Channel (2442 MHz)									
195.2	38.87	QP	168	2.4	V	-8.5	30.37	43.5	13.13
2442.00	101.69	PK	103	2.1	H	-6.46	95.23	/	/
2442.00	97.39	Ave.	103	2.1	H	-6.46	90.93	/	/
2442.00	99.65	PK	22	1.3	V	-6.46	93.19	/	/
2442.00	95.67	Ave.	22	1.3	V	-6.46	89.21	/	/
2371.56	42.32	PK	80	1.5	H	-6.46	35.86	74	38.14
2371.56	29.51	Ave.	80	1.5	H	-6.46	23.05	54	30.95
2374.61	43.36	PK	170	2.1	H	-6.46	36.90	74	37.10
2374.61	30.52	Ave.	170	2.1	H	-6.46	24.06	54	29.94
2489.98	46.38	PK	90	1.7	H	-4.74	41.64	74	32.36
2489.98	31.43	Ave.	90	1.7	H	-4.74	26.69	54	27.31
4884.00	40.15	PK	273	1.6	V	3.56	43.71	74	30.29
4884.00	25.52	Ave.	273	1.6	V	3.56	29.08	54	24.92
7326.00	40.32	PK	71	1.4	V	10.11	50.43	74	23.57
7326.00	25.79	Ave.	71	1.4	V	10.11	35.90	54	18.10
9768.00	41.50	PK	277	1.8	H	13.21	54.71	74	19.29
9768.00	25.56	Ave.	277	1.8	H	13.21	38.77	54	15.23

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2472 MHz)									
195.2	38.32	QP	216	1.4	V	-8.5	29.82	43.5	13.68
2472.00	100.66	PK	200	1.5	H	-4.74	95.92	/	/
2472.00	96.32	Ave.	200	1.5	H	-4.74	91.58	/	/
2472.00	98.77	PK	159	1.8	V	-4.74	94.03	/	/
2472.00	94.43	Ave.	159	1.8	V	-4.74	89.69	/	/
2366.27	43.53	PK	184	1.2	V	-6.46	37.07	74	36.93
2366.27	29.51	Ave.	184	1.2	V	-6.46	23.05	54	30.95
2485.31	60.58	PK	245	2.3	H	-4.74	55.84	74	18.16
2485.31	48.21	Ave.	245	2.3	H	-4.74	43.47	54	10.53
2487.01	58.62	PK	184	1.8	H	-4.74	53.88	74	20.12
2487.01	46.85	Ave.	184	1.8	H	-4.74	42.11	54	11.89
4944.00	41.52	PK	159	1.2	V	3.56	45.08	74	28.92
4944.00	26.04	Ave.	159	1.2	V	3.56	29.60	54	24.40
7416.00	41.59	PK	356	1.5	V	8.17	49.76	74	24.24
7416.00	25.92	Ave.	356	1.5	V	8.17	34.09	54	19.91
9888.00	41.34	PK	208	2.4	V	13.21	54.55	74	19.45
9888.00	25.67	Ave.	208	2.4	V	13.21	38.88	54	15.12

802.11g Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
195.2	39.48	QP	147	2.2	V	-8.5	30.98	43.5	12.52
2412.00	103.68	PK	51	1.9	H	-6.46	97.22	/	/
2412.00	94.59	Ave.	51	1.9	H	-6.46	88.13	/	/
2412.00	100.58	PK	161	1.5	V	-6.46	94.12	/	/
2412.00	90.64	Ave.	161	1.5	V	-6.46	84.18	/	/
2389.03	57.56	PK	12	1.4	H	-6.46	51.10	74	22.90
2389.03	45.12	Ave.	12	1.4	H	-6.46	38.66	54	15.34
2483.51	62.12	PK	77	1.6	H	-4.74	57.38	74	16.62
2483.51	43.58	Ave.	77	1.6	H	-4.74	38.84	54	15.16
2484.82	43.56	PK	286	2.1	H	-4.74	38.82	74	35.18
2484.82	31.14	Ave.	286	2.1	H	-4.74	26.40	54	27.60
4824.00	39.45	PK	116	2.4	V	3.79	43.24	74	30.76
4824.00	24.26	Ave.	116	2.4	V	3.79	28.05	54	25.95
7236.00	40.16	PK	281	2.4	H	9.79	49.95	74	24.05
7236.00	25.75	Ave.	281	2.4	H	9.79	35.54	54	18.46
9648.00	40.23	PK	125	1.8	H	11.85	52.08	74	21.92
9648.00	25.24	Ave.	125	1.8	H	11.85	37.09	54	16.91
Middle Channel (2442 MHz)									
195.2	38.26	QP	8	2.4	V	-8.5	29.76	43.5	13.74
2442.00	101.07	PK	154	1.5	H	-6.46	94.61	/	/
2442.00	91.38	Ave.	154	1.5	H	-6.46	84.92	/	/
2442.00	98.68	PK	230	1.8	V	-6.46	92.22	/	/
2442.00	88.64	Ave.	230	1.8	V	-6.46	82.18	/	/
2376.37	43.61	PK	61	1.4	V	-6.46	37.15	74	36.85
2376.37	31.43	Ave.	61	1.4	V	-6.46	24.97	54	29.03
2378.29	44.91	PK	237	1.4	H	-6.46	38.45	74	35.55
2378.29	32.26	Ave.	237	1.4	H	-6.46	25.80	54	28.20
2490.21	48.35	PK	311	2.1	H	-4.74	43.61	74	30.39
2490.21	34.36	Ave.	311	2.1	H	-4.74	29.62	54	24.38
4884.00	40.65	PK	347	1.9	V	3.56	44.21	74	29.79
4884.00	25.12	Ave.	347	1.9	V	3.56	28.68	54	25.32
7326.00	40.89	PK	122	1.9	V	10.11	51.00	74	23.00
7326.00	25.32	Ave.	122	1.9	V	10.11	35.43	54	18.57
9768.00	40.73	PK	246	2.2	H	13.21	53.94	74	20.06
9768.00	26.76	Ave.	246	2.2	H	13.21	39.97	54	14.03

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2472 MHz)									
195.2	39.82	QP	89	2.0	V	-8.5	31.32	43.5	12.18
2472.00	100.96	PK	100	2.0	H	-4.74	96.22	/	/
2472.00	90.64	Ave.	100	2.0	H	-4.74	85.90	/	/
2472.00	98.67	PK	160	2.2	V	-4.74	93.93	/	/
2472.00	88.71	Ave.	160	2.2	V	-4.74	83.97	/	/
2389.03	44.84	PK	57	1.4	H	-6.46	38.38	74	35.62
2389.03	30.52	Ave.	57	1.4	H	-6.46	24.06	54	29.94
2483.51	73.58	PK	117	1.1	H	-4.74	68.84	74	5.16
2483.51	52.72	Ave.	117	1.1	H	-4.74	47.98	54	6.02
2484.82	71.19	PK	5	1.2	H	-4.74	66.45	74	7.55
2484.82	51.94	Ave.	5	1.2	H	-4.74	47.20	54	6.80
4944.00	40.15	PK	167	1.8	V	3.56	43.71	74	30.29
4944.00	25.34	Ave.	167	1.8	V	3.56	28.90	54	25.10
7416.00	40.21	PK	251	1.4	H	8.17	48.38	74	25.62
7416.00	26.75	Ave.	251	1.4	H	8.17	34.92	54	19.08
9888.00	40.23	PK	146	1.7	V	13.21	53.44	74	20.56
9888.00	25.28	Ave.	146	1.7	V	13.21	38.49	54	15.51

802.11n-HT20 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
195.2	39.67	QP	127	1.2	V	-8.5	31.17	43.5	12.33
2412.00	103.24	PK	225	1.4	H	-6.46	96.78	/	/
2412.00	92.58	Ave.	225	1.4	H	-6.46	86.12	/	/
2412.00	100.58	PK	87	2.5	V	-6.46	94.12	/	/
2412.00	90.46	Ave.	87	2.5	V	-6.46	84.00	/	/
2388.39	64.82	PK	76	1.9	H	-6.46	58.36	74	15.64
2388.39	48.58	Ave.	76	1.9	H	-6.46	42.12	54	11.88
2389.83	67.86	PK	96	1.4	H	-6.46	61.40	74	12.60
2389.83	49.16	Ave.	96	1.4	H	-6.46	42.70	54	11.30
2488.29	46.01	PK	300	1.3	H	-4.74	41.27	74	32.73
2488.29	31.43	Ave.	300	1.3	H	-4.74	26.69	54	27.31
4824.00	40.54	PK	10	1.3	H	3.79	44.33	74	29.67
4824.00	25.24	Ave.	10	1.3	H	3.79	29.03	54	24.97
7236.00	41.62	PK	202	1.3	V	9.79	51.41	74	22.59
7236.00	25.01	Ave.	202	1.3	V	9.79	34.80	54	19.20
9648.00	40.19	PK	117	1.8	V	11.85	52.04	74	21.96
9648.00	26.46	Ave.	117	1.8	V	11.85	38.31	54	15.69
Middle Channel (2442 MHz)									
195.2	38.42	QP	172	1.0	V	-8.5	29.92	43.5	13.58
2442.00	100.66	PK	288	1.1	H	-6.46	94.20	/	/
2442.00	90.56	Ave.	288	1.1	H	-6.46	84.10	/	/
2442.00	98.53	PK	185	1.3	V	-6.46	92.07	/	/
2442.00	88.51	Ave.	185	1.3	V	-6.46	82.05	/	/
2379.97	45.55	PK	212	2.1	H	-6.46	39.09	74	34.91
2379.97	33.71	Ave.	212	2.1	H	-6.46	27.25	54	26.75
2382.54	46.81	PK	147	2.2	H	-6.46	40.35	74	33.65
2382.54	34.36	Ave.	147	2.2	H	-6.46	27.90	54	26.10
2483.92	47.63	PK	130	2.4	H	-4.74	42.89	74	31.11
2483.92	34.36	Ave.	130	2.4	H	-4.74	29.62	54	24.38
4884.00	41.25	PK	95	1.9	V	3.56	44.81	74	29.19
4884.00	26.04	Ave.	95	1.9	V	3.56	29.60	54	24.40
7326.00	40.46	PK	53	2.0	V	10.11	50.57	74	23.43
7326.00	25.58	Ave.	53	2.0	V	10.11	35.69	54	18.31
9768.00	40.98	PK	48	1.7	V	13.21	54.19	74	19.81
9768.00	26.11	Ave.	48	1.7	V	13.21	39.32	54	14.68

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2472 MHz)									
195.2	38.06	QP	161	2.2	V	-8.5	29.56	43.5	13.94
2472.00	100.83	PK	113	2.4	H	-4.74	96.09	/	/
2472.00	90.23	Ave.	113	2.4	H	-4.74	85.49	/	/
2472.00	98.56	PK	201	2.3	V	-4.74	93.82	/	/
2472.00	88.19	Ave.	201	2.3	V	-4.74	83.45	/	/
2384.71	43.96	PK	122	2.0	H	-6.46	37.50	74	36.50
2384.71	31.43	Ave.	122	2.0	H	-6.46	24.97	54	29.03
2486.91	70.85	PK	282	2.0	H	-4.74	66.11	74	7.89
2486.91	53.72	Ave.	282	2.0	H	-4.74	48.98	54	5.02
2487.46	66.08	PK	320	1.2	H	-4.74	61.34	74	12.66
2487.46	52.95	Ave.	320	1.2	H	-4.74	48.21	54	5.79
4944.00	41.25	PK	332	1.1	H	3.56	44.81	74	29.19
4944.00	26.41	Ave.	332	1.1	H	3.56	29.97	54	24.03
7416.00	41.58	PK	96	1.8	V	8.17	49.75	74	24.25
7416.00	26.82	Ave.	96	1.8	V	8.17	34.99	54	19.01
9888.00	40.66	PK	242	1.6	H	13.21	53.87	74	20.13
9888.00	26.60	Ave.	242	1.6	H	13.21	39.81	54	14.19

802.11n-HT40 Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2422 MHz)									
195.2	38.79	QP	282	2.1	V	-8.5	30.29	43.5	13.21
2422.00	101.31	PK	312	1.2	H	-6.46	94.85	/	/
2422.00	91.53	Ave.	312	1.2	H	-6.46	85.07	/	/
2422.00	98.54	PK	98	1.7	V	-6.46	92.08	/	/
2422.00	88.62	Ave.	98	1.7	V	-6.46	82.16	/	/
2386.79	72.45	PK	299	2.3	H	-6.46	65.99	74	8.01
2386.79	54.36	Ave.	299	2.3	H	-6.46	47.90	54	6.10
2389.99	73.74	PK	12	1.5	H	-6.46	67.28	74	6.72
2389.99	54.72	Ave.	12	1.5	H	-6.46	48.26	54	5.74
2483.66	53.32	PK	171	2.0	H	-4.74	48.58	74	25.42
2483.66	35.52	Ave.	171	2.0	H	-4.74	30.78	54	23.22
4844.00	40.12	PK	237	1.4	V	3.79	43.91	74	30.09
4844.00	24.98	Ave.	237	1.4	V	3.79	28.77	54	25.23
7266.00	40.31	PK	194	2.1	H	10.11	50.42	74	23.58
7266.00	26.44	Ave.	194	2.1	H	10.11	36.55	54	17.45
9688.00	40.77	PK	331	2.2	V	11.85	52.62	74	21.38
9688.00	25.82	Ave.	331	2.2	V	11.85	37.67	54	16.33
Middle Channel (2442 MHz)									
195.2	38.81	QP	65	1.8	V	-8.5	30.31	43.5	13.19
2442.00	99.56	PK	2	1.2	H	-6.46	93.10	/	/
2442.00	89.62	Ave.	2	1.2	H	-6.46	83.16	/	/
2442.00	97.56	PK	201	2.2	V	-6.46	91.10	/	/
2442.00	87.62	Ave.	201	2.2	V	-6.46	81.16	/	/
2386.79	56.15	PK	242	2.1	H	-6.46	49.69	74	24.31
2386.79	36.55	Ave.	242	2.1	H	-6.46	30.09	54	23.91
2389.99	57.15	PK	240	1.4	H	-6.46	50.69	74	23.31
2389.99	37.55	Ave.	240	1.4	H	-6.46	31.09	54	22.91
2483.66	64.52	PK	71	1.8	H	-4.74	59.78	74	14.22
2483.66	44.25	Ave.	71	1.8	H	-4.74	39.51	54	14.49
4884.00	40.98	PK	258	2.4	V	3.56	44.54	74	29.46
4884.00	25.38	Ave.	258	2.4	V	3.56	28.94	54	25.06
7326.00	41.66	PK	354	1.0	V	10.11	51.77	74	22.23
7326.00	26.79	Ave.	354	1.0	V	10.11	36.90	54	17.10
9768.00	41.18	PK	245	2.5	H	13.21	54.39	74	19.61
9768.00	26.11	Ave.	245	2.5	H	13.21	39.32	54	14.68

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
195.2	39.56	QP	261	2.2	V	-8.5	31.06	43.5	12.44
2462.00	99.95	PK	337	2.2	H	-4.74	95.21	/	/
2462.00	89.54	Ave.	337	2.2	H	-4.74	84.80	/	/
2462.00	97.56	PK	236	2.3	V	-4.74	92.82	/	/
2462.00	87.51	Ave.	236	2.3	V	-4.74	82.77	/	/
2386.79	44.15	PK	357	2.5	V	-6.46	37.69	74	36.31
2386.79	31.14	Ave.	357	2.5	V	-6.46	24.68	54	29.32
2389.95	73.45	PK	94	2.1	H	-6.46	66.99	74	7.01
2389.95	53.45	Ave.	94	2.1	H	-6.46	46.99	54	7.01
2483.63	72.94	PK	64	1.4	H	-4.74	68.20	74	5.80
2483.63	53.19	Ave.	64	1.4	H	-4.74	48.45	54	5.55
4924.00	41.65	PK	223	2.2	V	3.56	45.21	74	28.79
4924.00	26.46	Ave.	223	2.2	V	3.56	30.02	54	23.98
7386.00	40.92	PK	57	2.2	H	8.17	49.09	74	24.91
7386.00	26.67	Ave.	57	2.2	H	8.17	34.84	54	19.16
9848.00	41.11	PK	258	1.3	V	13.21	54.32	74	19.68
9848.00	25.17	Ave.	258	1.3	V	13.21	38.38	54	15.62

BLE Mode:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
195.2	39.40	QP	115	1.6	V	-8.5	30.90	43.5	12.60
2402.00	92.31	PK	127	1.8	H	-6.46	85.85	/	/
2402.00	86.93	Ave.	127	1.8	H	-6.46	80.47	/	/
2402.00	87.32	PK	169	1.4	V	-6.46	80.86	/	/
2402.00	82.39	Ave.	169	1.4	V	-6.46	75.93	/	/
2382.31	40.93	PK	208	1.5	V	-6.46	34.47	74	39.53
2382.31	29.73	Ave.	208	1.5	V	-6.46	23.27	54	30.73
2389.03	43.97	PK	322	1.9	H	-6.46	37.51	74	36.49
2389.03	30.68	Ave.	322	1.9	H	-6.46	24.22	54	29.78
2481.07	39.89	PK	133	1.3	H	-4.74	35.15	74	38.85
2481.07	27.06	Ave.	133	1.3	H	-4.74	22.32	54	31.68
4804.00	39.23	PK	347	2.0	V	3.79	43.02	74	30.98
4804.00	24.36	Ave.	347	2.0	V	3.79	28.15	54	25.85
7206.00	40.90	PK	222	2.2	H	9.79	50.69	74	23.31
7206.00	26.11	Ave.	222	2.2	H	9.79	35.90	54	18.10
9608.00	40.64	PK	155	2.0	H	11.85	52.49	74	21.51
9608.00	25.29	Ave.	155	2.0	H	11.85	37.14	54	16.86
Middle Channel (2440 MHz)									
195.2	38.96	QP	260	1.5	V	-8.5	30.46	43.5	13.04
2440.00	90.77	PK	124	1.6	H	-6.46	84.31	/	/
2440.00	85.79	Ave.	124	1.6	H	-6.46	79.33	/	/
2440.00	86.54	PK	357	1.7	V	-6.46	80.08	/	/
2440.00	81.62	Ave.	357	1.7	V	-6.46	75.16	/	/
2377.65	39.41	PK	40	1.1	H	-6.46	32.95	74	41.05
2377.65	28.28	Ave.	40	1.1	H	-6.46	21.82	54	32.18
2386.63	41.13	PK	226	2.2	V	-6.46	34.67	74	39.33
2386.63	28.67	Ave.	226	2.2	V	-6.46	22.21	54	31.79
2493.02	39.88	PK	156	2.0	H	-4.74	35.14	74	38.86
2493.02	27.46	Ave.	156	2.0	H	-4.74	22.72	54	31.28
4880.00	40.95	PK	297	1.1	V	3.56	44.51	74	29.49
4880.00	25.52	Ave.	297	1.1	V	3.56	29.08	54	24.92
7320.00	40.26	PK	259	2.1	H	10.11	50.37	74	23.63
7320.00	26.23	Ave.	259	2.1	H	10.11	36.34	54	17.66
9760.00	40.38	PK	279	1.6	V	13.21	53.59	74	20.41
9760.00	25.91	Ave.	279	1.6	V	13.21	39.12	54	14.88

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
195.2	38.33	QP	23	1.6	V	-8.5	29.83	43.5	13.67
2480.00	89.28	PK	258	1.4	H	-4.74	84.54	/	/
2480.00	84.11	Ave.	258	1.4	H	-4.74	79.37	/	/
2480.00	85.03	PK	66	1.1	V	-4.74	80.29	/	/
2480.00	79.85	Ave.	66	1.1	V	-4.74	75.11	/	/
2367.94	42.27	PK	288	1.8	H	-6.46	35.81	74	38.19
2367.94	27.88	Ave.	288	1.8	H	-6.46	21.42	54	32.58
2483.51	53.49	PK	39	1.9	H	-4.74	48.75	74	25.25
2483.51	40.52	Ave.	39	1.9	H	-4.74	35.78	54	18.22
2483.83	51.79	PK	34	1.3	H	-4.74	47.05	74	26.95
2483.83	39.51	Ave.	34	1.3	H	-4.74	34.77	54	19.23
4960.00	41.58	PK	129	1.2	V	3.19	44.77	74	29.23
4960.00	26.04	Ave.	129	1.2	V	3.19	29.23	54	24.77
7440.00	40.43	PK	296	2.4	H	8.17	48.60	74	25.40
7440.00	26.27	Ave.	296	2.4	H	8.17	34.44	54	19.56
9920.00	40.30	PK	266	1.7	H	13.21	53.51	74	20.49
9920.00	26.03	Ave.	266	1.7	H	13.21	39.24	54	14.76

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
WEINSCHTEL	3dB Attenuator	5321	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by David Lee on 2016-05-27.

Test Result: Pass.

Please refer to the following table and plots.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11b mode			
Low	2412	10.04	≥ 500
Middle	2442	10.04	≥ 500
High	2472	10.04	≥ 500
802.11g mode			
Low	2412	15.51	≥ 500
Middle	2442	15.51	≥ 500
High	2472	15.51	≥ 500
802.11n-HT20 Mode			
Low	2412	16.05	≥ 500
Middle	2442	16.05	≥ 500
High	2472	16.05	≥ 500
802.11n-HT40 Mode			
Low	2422	35.47	≥ 500
Middle	2442	35.47	≥ 500
High	2462	35.47	≥ 500
BLE mode			
Low	2402	0.717	≥ 500
Middle	2440	0.717	≥ 500
High	2480	0.725	≥ 500

Delta 1 [T1]

Ref Lvl 0.17 dB

23.5 dBm 10.04008016 MHz

RBW 100 kHz

VBW 300 kHz

SWT 7.5 ms

RF Att 30 dB

Unit dBm

3.5 dB Offset

D1 -0.3 dBm

D2 -6.3 dBm

1 MAX

1 [T1]

2.40697996 GHz

0.17 dB

10.04008016 MHz

1 MAX

Center 2.412 GHz

3 MHz/

Span 30 MHz


Date: 27.MAY.2016 21:28:56

Delta 1 [T1] -0.23 dB
 Ref Lvl 23.5 dBm
 RBW 100 kHz
 VBW 300 kHz
 RF Att 30 dB
 Unit dBm
 10.04008016 MHz
 SWT 7.5 ms


3.5 dB Offset
 D1 -0.7 dBm
 D2 -6.7 dBm
 1 MAX
 1 [T1] -6.80 dBm
 2.43697996 GHz
 -0.23 dB
 10.04008016 MHz
 1 MAX
 3 MHz/
 Span 30 MHz
 Center 2.442 GHz

Date: 27.MAY.2016 21:31:06


802.11b High Channel

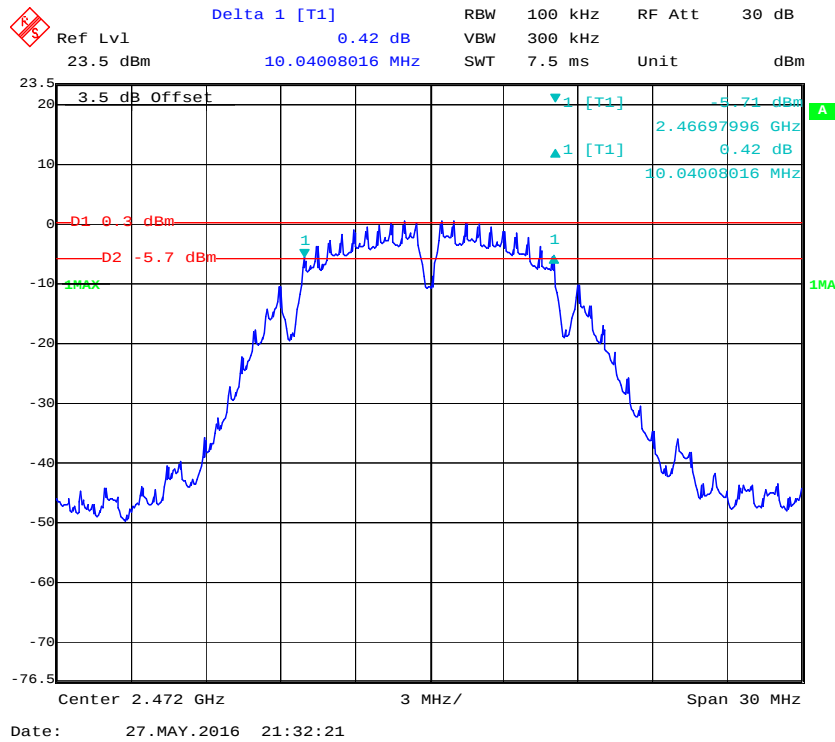


802.11g Low Channel

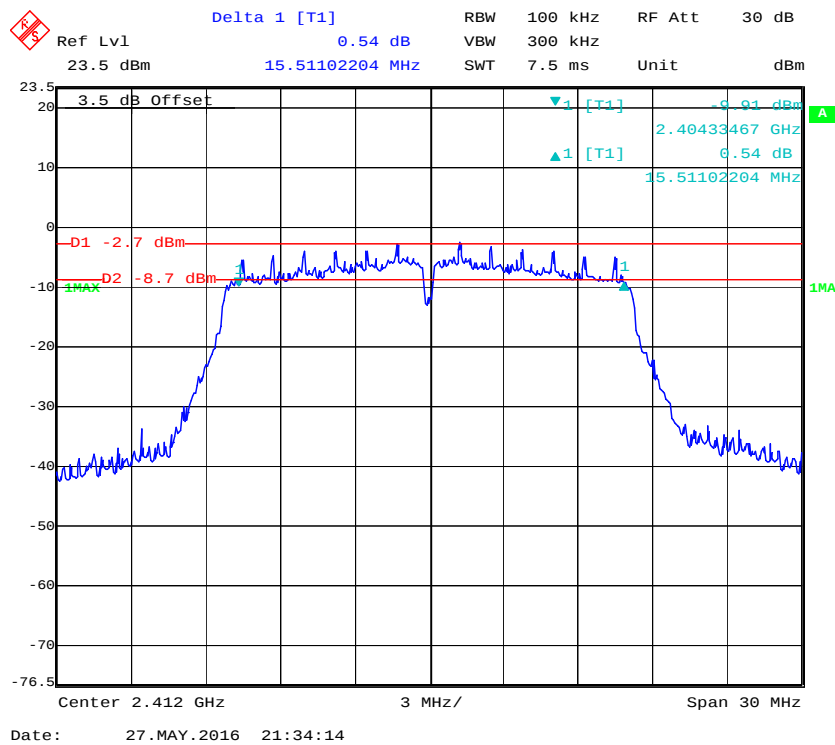


802.11g Middle Channel

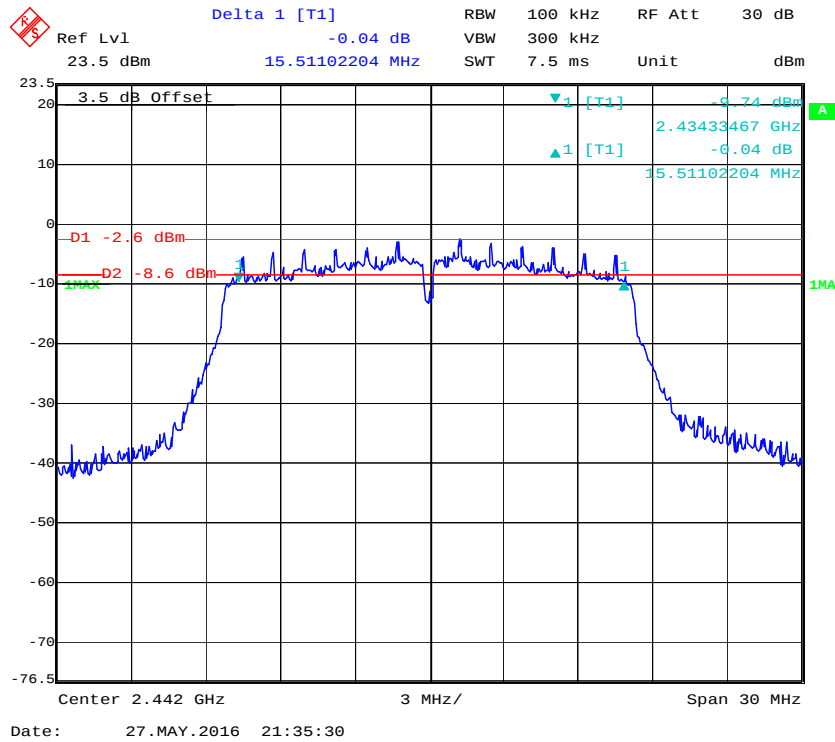


802.11g High Channel

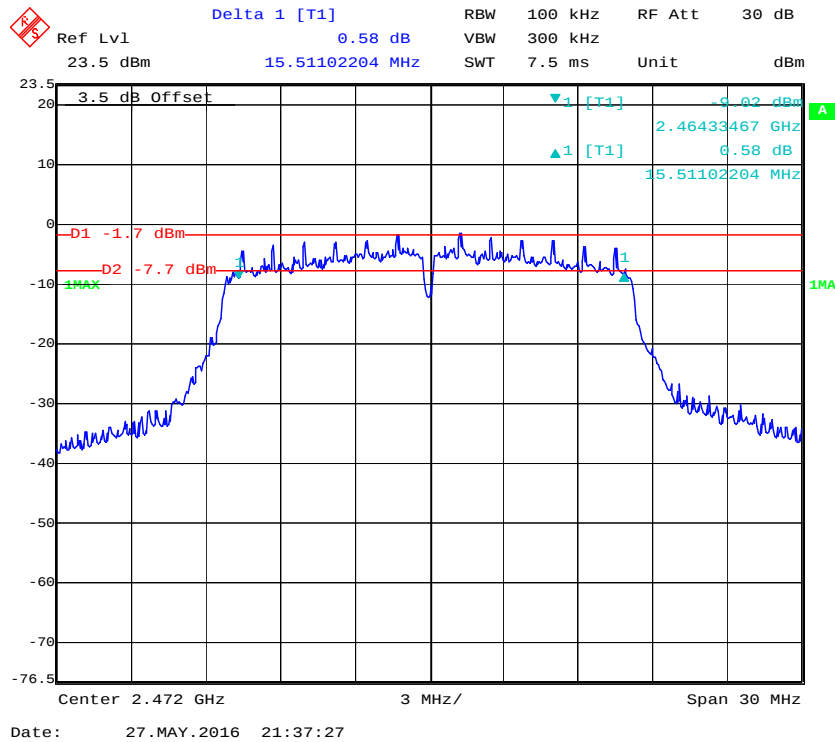


802.11n-HT20 Low Channel

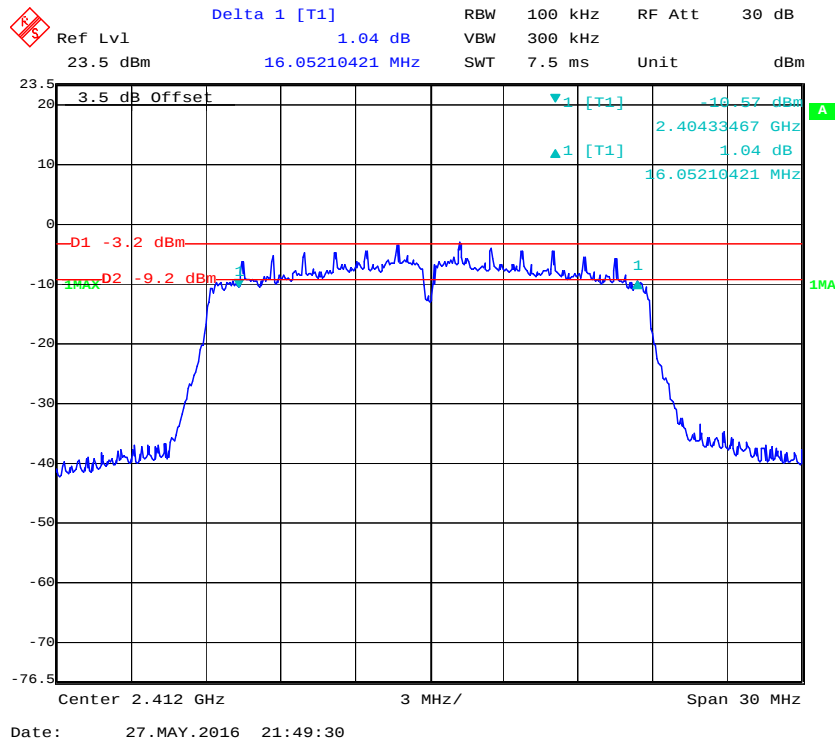


802.11n-HT20 Middle Channel

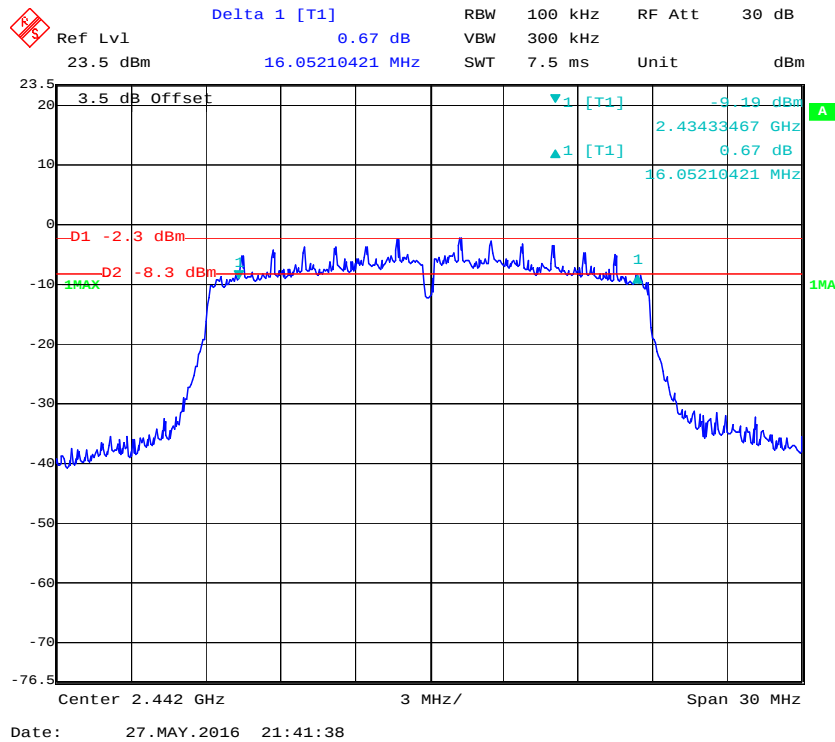


802.11n-HT20 Mode High Channel

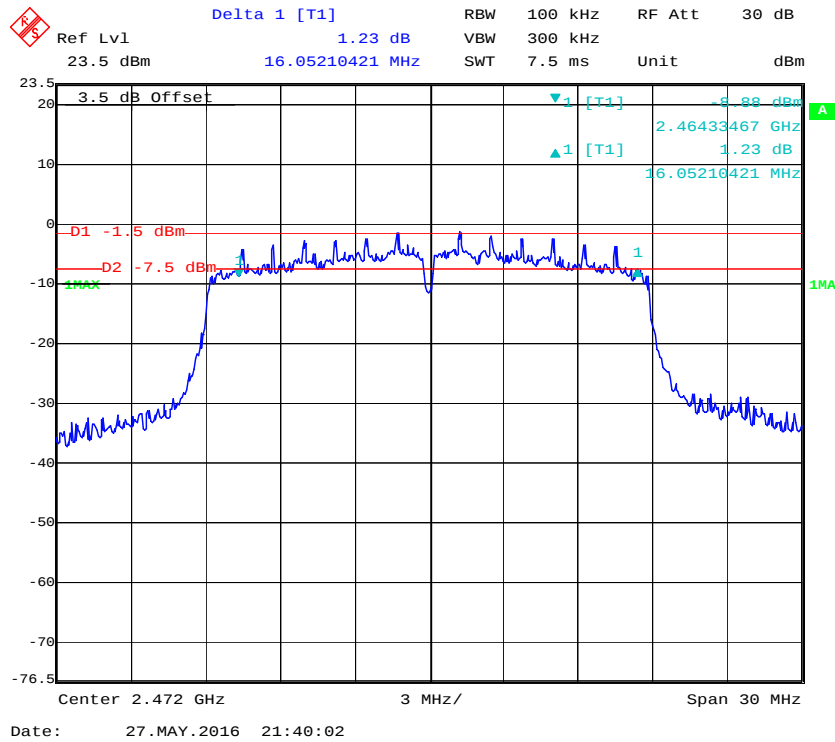


802.11n-HT40 Low Channel

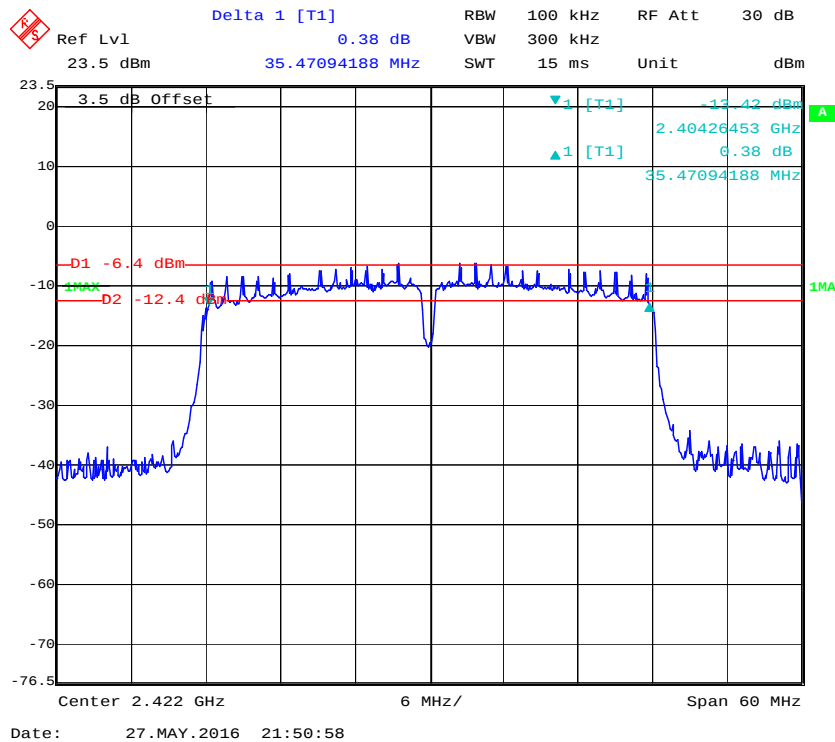

802.11n-HT40 Middle Channel

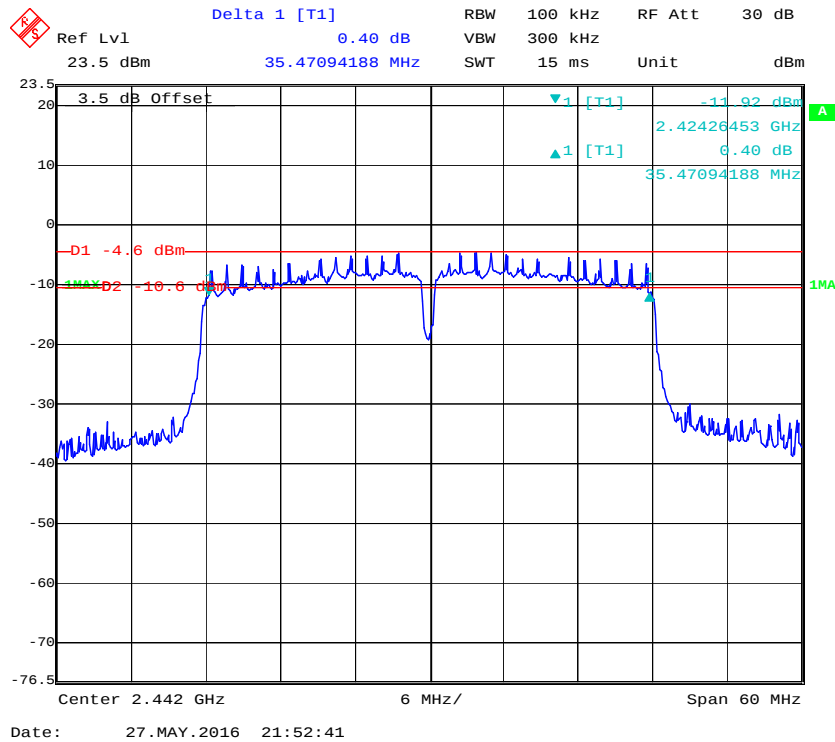

802.11n-HT40 Mode High Channel

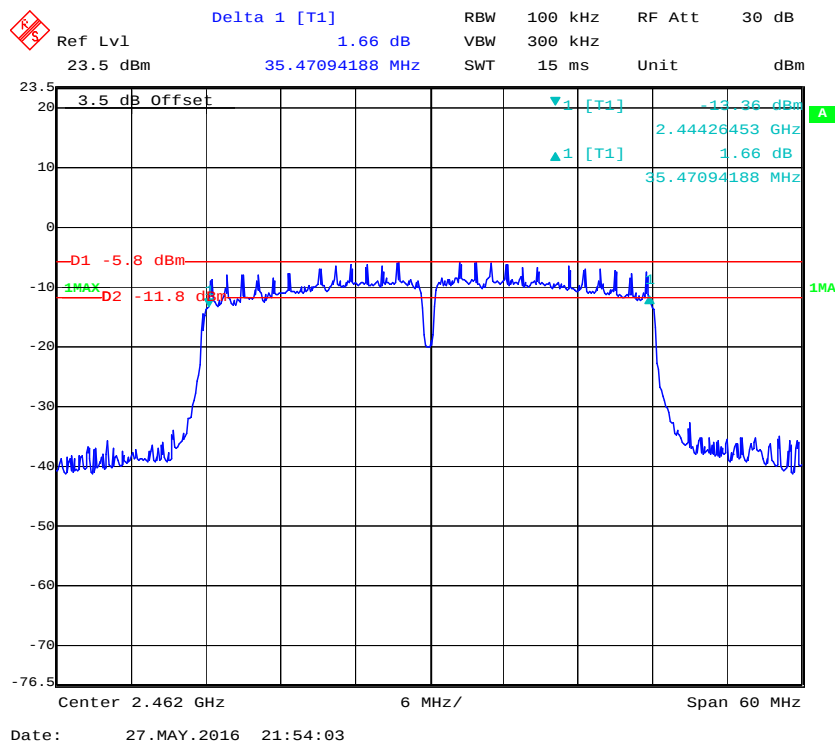

Ref Lvl 23.5 dBm Marker 1 [T1 ndB] 6.00 dB RBW 100 kHz RF Att 30 dB

Unit dBm

3.5 dB Offset

23.5

20

10

0

-10

-20

-30

-40

-50

-60

-70

-76.5

Center 2.402 GHz

200 kHz/

Span 2 MHz

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

Ref Lvl 23.5 dBm ndB 6.00 dB BW 717.43486974 kHz RBW 100 kHz RF Att 30 dB Unit dBm

3.5 dB Offset

Marker 1 [T1 ndB]


2.44021042 GHz -13.55 dBm

2.44032265 GHz -13.57 dBm

Center 2.44 GHz 200 kHz/ Span 2 MHz

Date: 27.MAY.2016 22:39:52

BLE High Channel

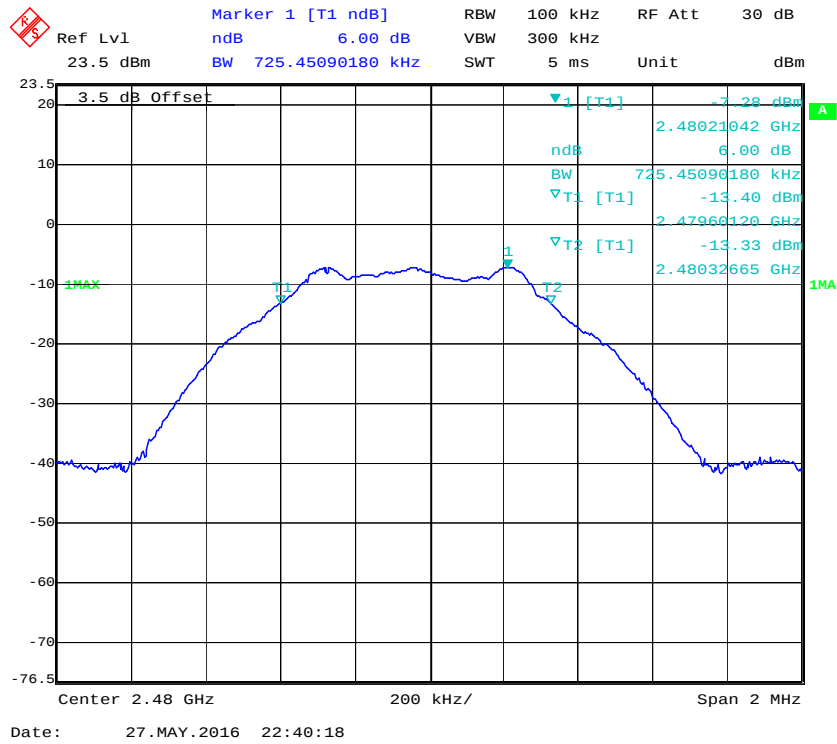


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Power Meter	N1912A	MY5000448	2015-12-18	2016-12-17
HP	Power Sensor	N1921A	MY54210016	2015-12-18	2016-12-17
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
WEINSCHTEL	3dB Attenuator	5321	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24℃
Relative Humidity:	55 %
ATM Pressure:	100.0~101.0 kPa

The testing was performed by David Lee on 2016-05-27.

EUT operation mode: Transmitting

Wi-Fi mode

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b				
Low	2412	11.39	8.13	30
Middle	2442	11.04	8.07	30
High	2472	12.11	8.68	30
802.11g				
Low	2412	14.71	7.37	30
Middle	2442	14.92	7.42	30
High	2472	15.36	7.93	30
802.11n-HT20				
Low	2412	13.59	6.72	30
Middle	2442	13.46	6.07	30
High	2472	13.83	7.04	30
802.11n-HT40				
Low	2422	15.13	7.79	30
Middle	2437	14.56	7.18	30
High	2462	14.54	7.33	30

BLE mode

Channel	Frequency (MHz)	Max Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	-7.09	30	Pass
Middle	2440	-6.57	30	Pass
High	2480	-6.34	30	Pass


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
WEINSCHEL	3dB Attenuator	5321	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24℃
Relative Humidity:	55 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by David Lee on 2016-05-27.

EUT operation mode: Transmitting


Test Result: Compliance

Please refer to the following plots.


802.11b: Band Edge, Left Side

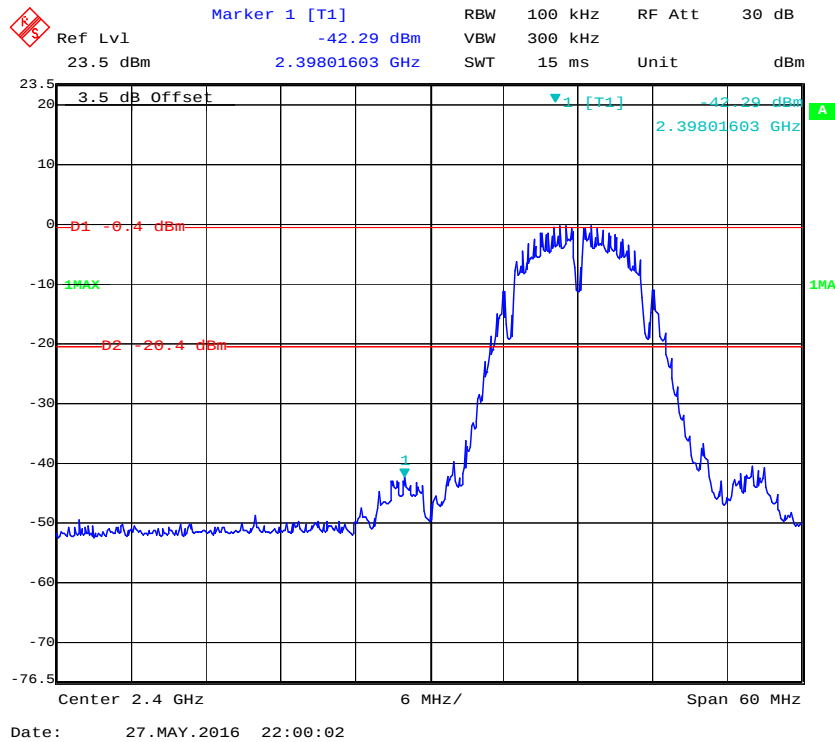


802.11b: Band Edge, Right Side

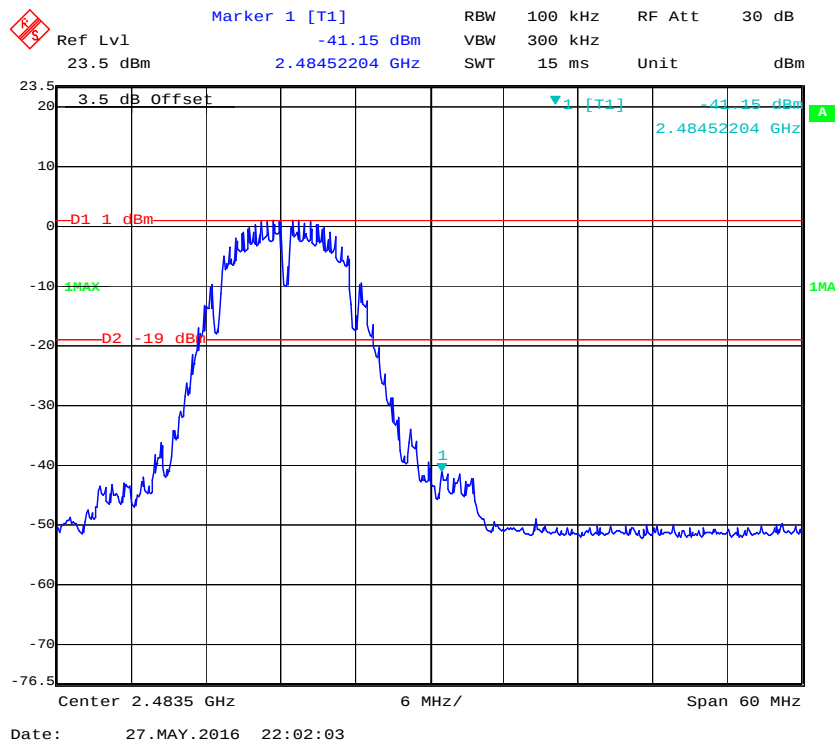


802.11g: Band Edge, Left Side

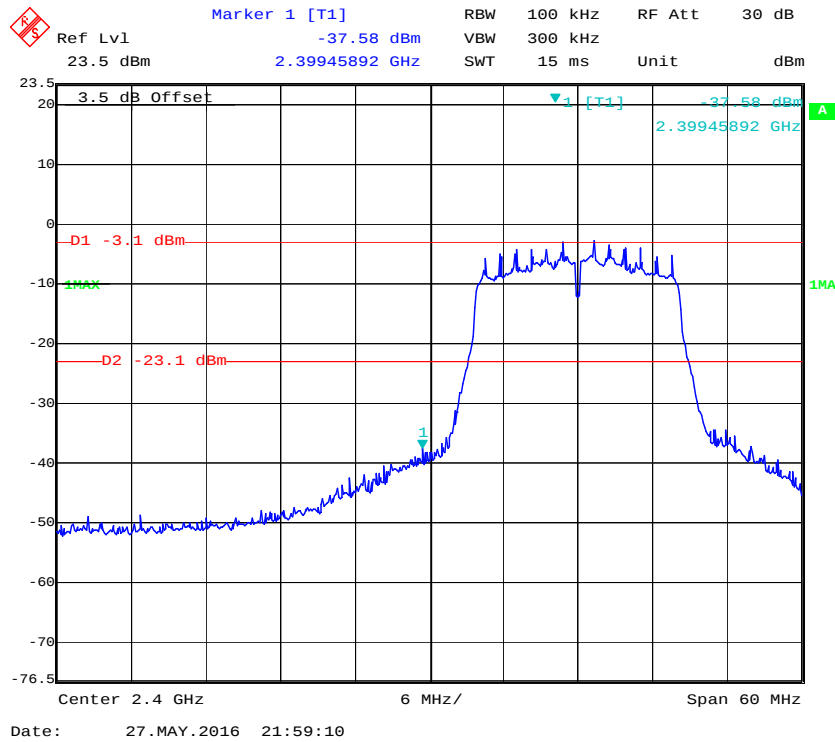


802.11g: Band Edge, Right Side

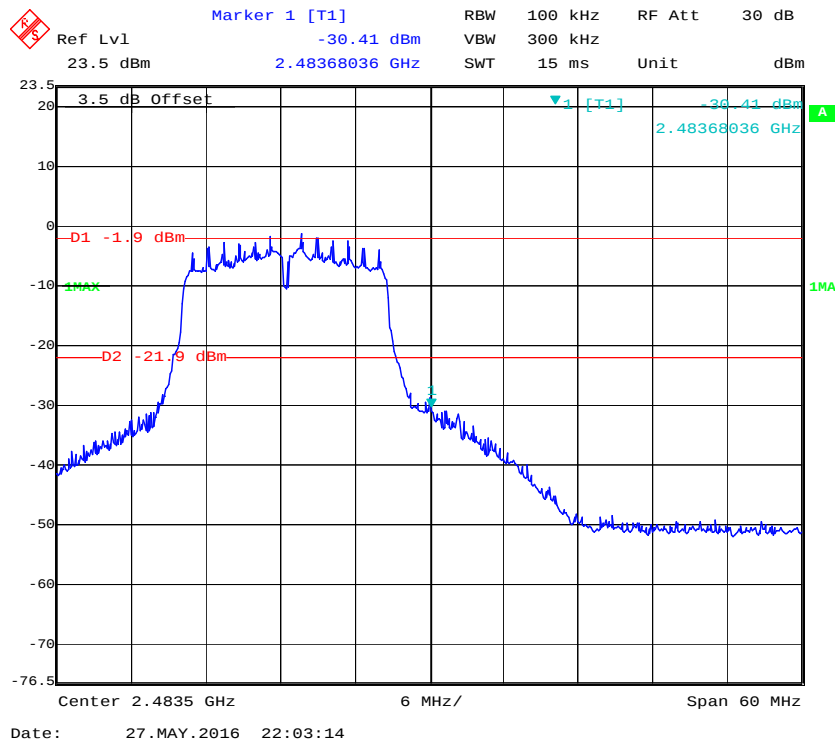


802.11n-HT20: Band Edge, Left Side

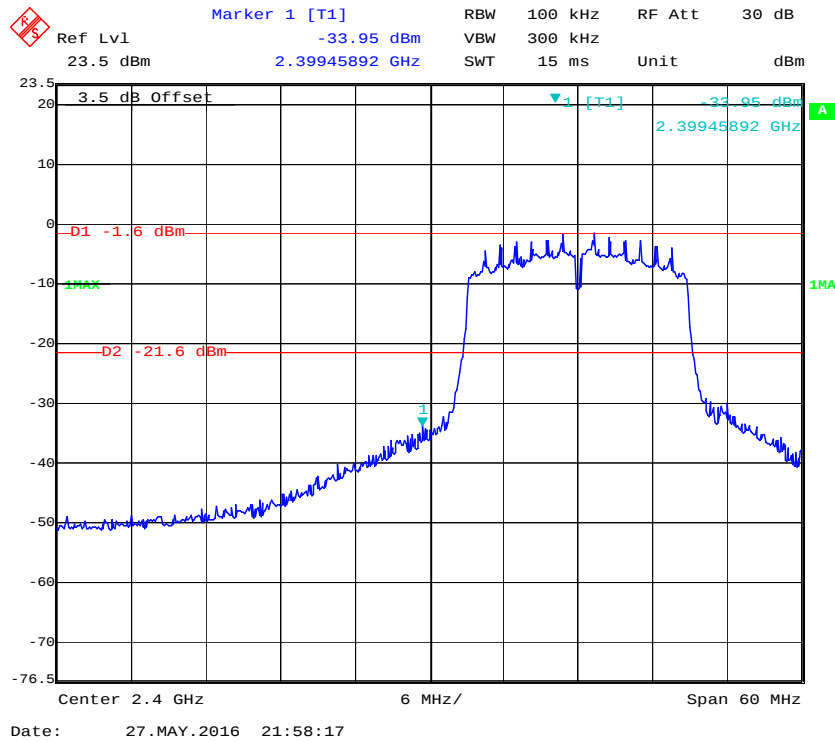


802.11n-HT20: Band Edge, Right Side

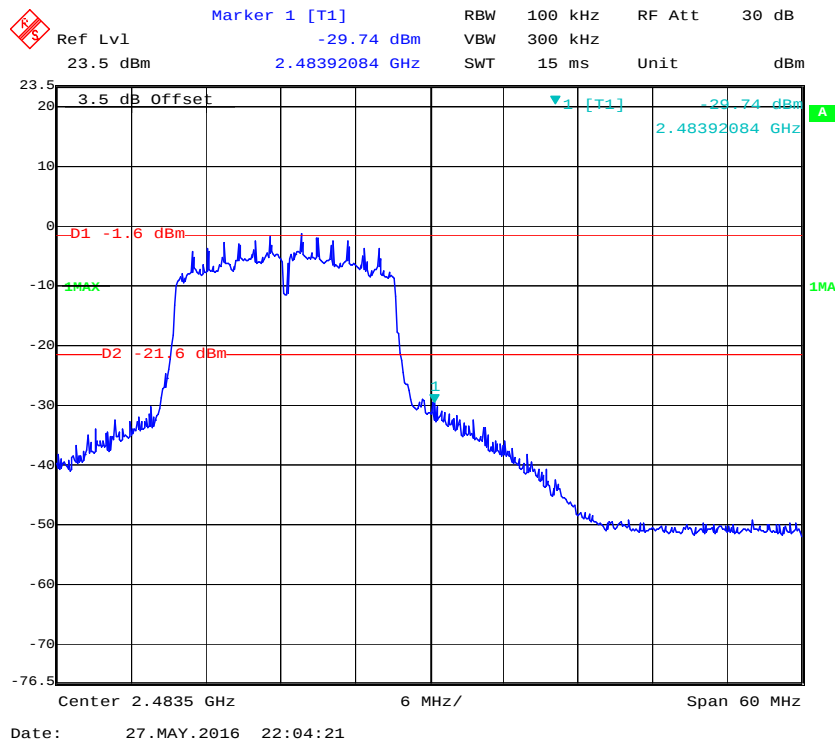


802.11n-HT4: Band Edge, Left Side

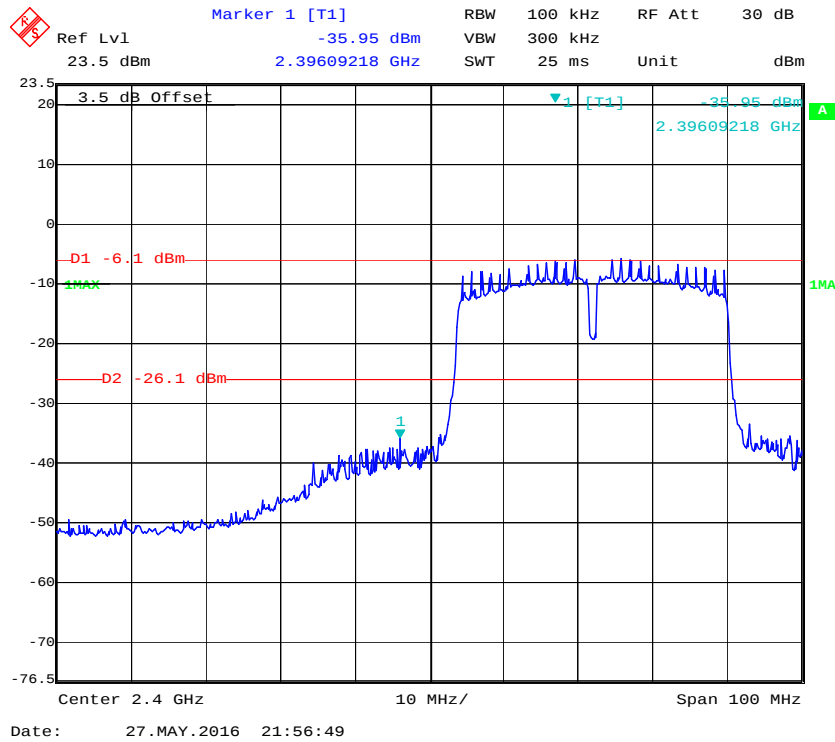


802.11n-HT4: Band Edge, Right Side

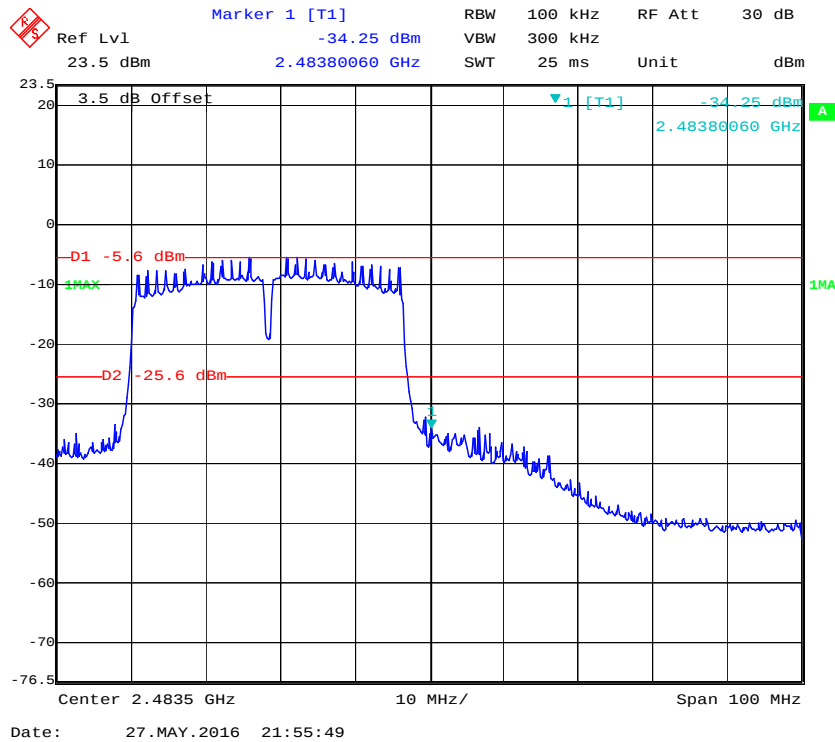

BLE: Band Edge, Left Side

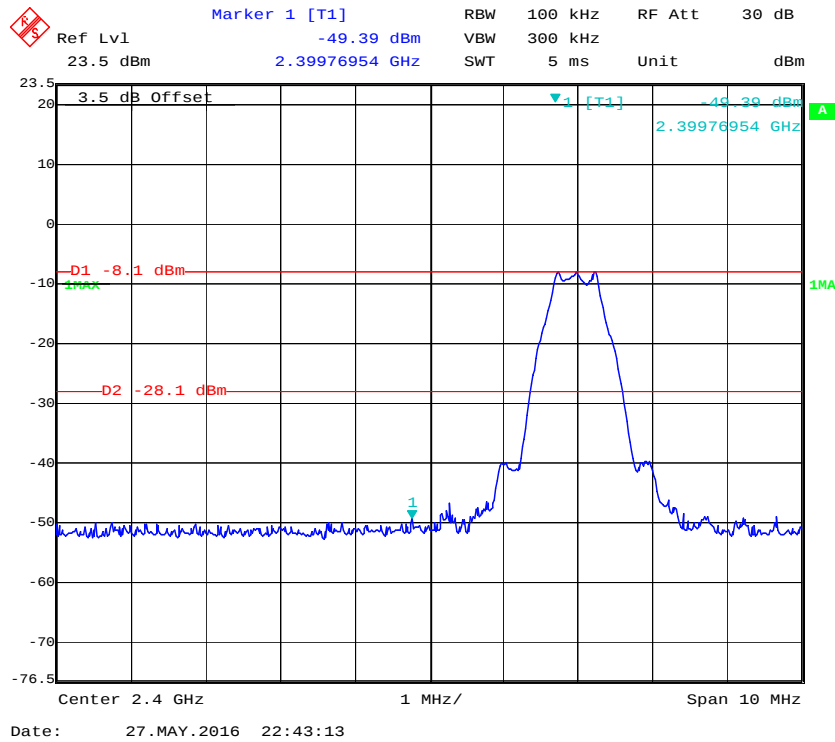

BLE: Band Edge, Right Side

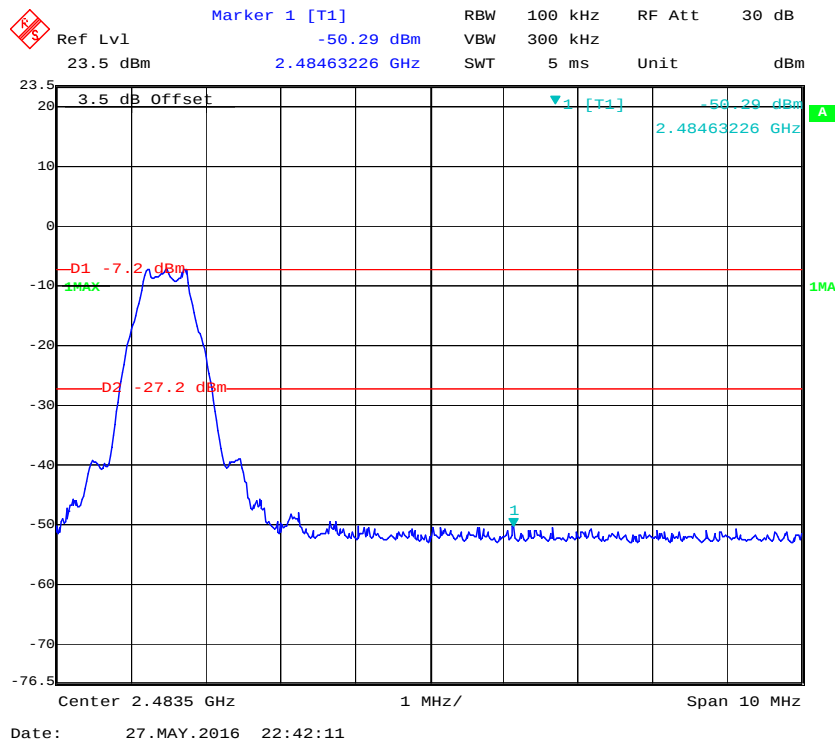

FCC §15.247(e) - POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r05 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
Ducommun technologies	RF Cable	RG-214	3	2015-06-15	2016-06-15
WEINSCHTEL	3dB Attenuator	5321	AU0709	2015-06-18	2016-06-18

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24℃
Relative Humidity:	55 %
ATM Pressure:	100.0~101.0 kPa


The testing was performed by David Lee on 2016-05-27.

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b mode			
Low	2412	-14.61	≤8
Middle	2442	-14.58	≤8
High	2472	-14.82	≤8
802.11g mode			
Low	2412	-17.58	≤8
Middle	2442	-17.18	≤8
High	2472	-15.46	≤8
802.11n-HT20 mode			
Low	2412	-17.74	≤8
Middle	2442	-16.64	≤8
High	2472	-15.69	≤8
802.11n-HT40 mode			
Low	2422	-19.76	≤8
Middle	2442	-19.32	≤8
High	2462	-19.94	≤8
BLE mode			
Low	2402	-22.69	≤8
Middle	2440	-22.20	≤8
High	2480	-21.99	≤8


Power Spectral Density, 802.11b Low Channel

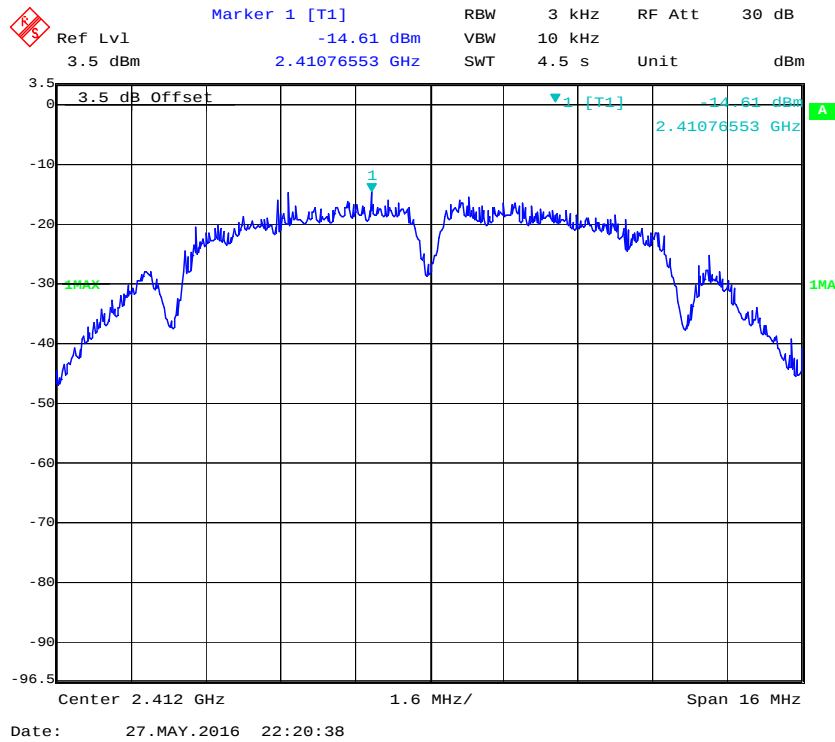


Power Spectral Density, 802.11b Middle Channel

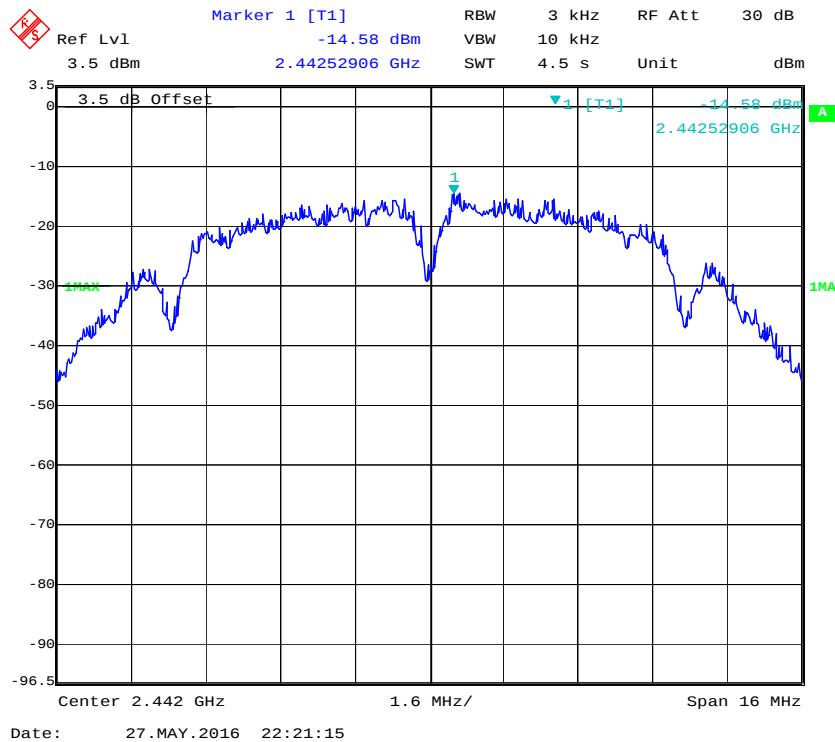


Power Spectral Density, 802.11b High Channel

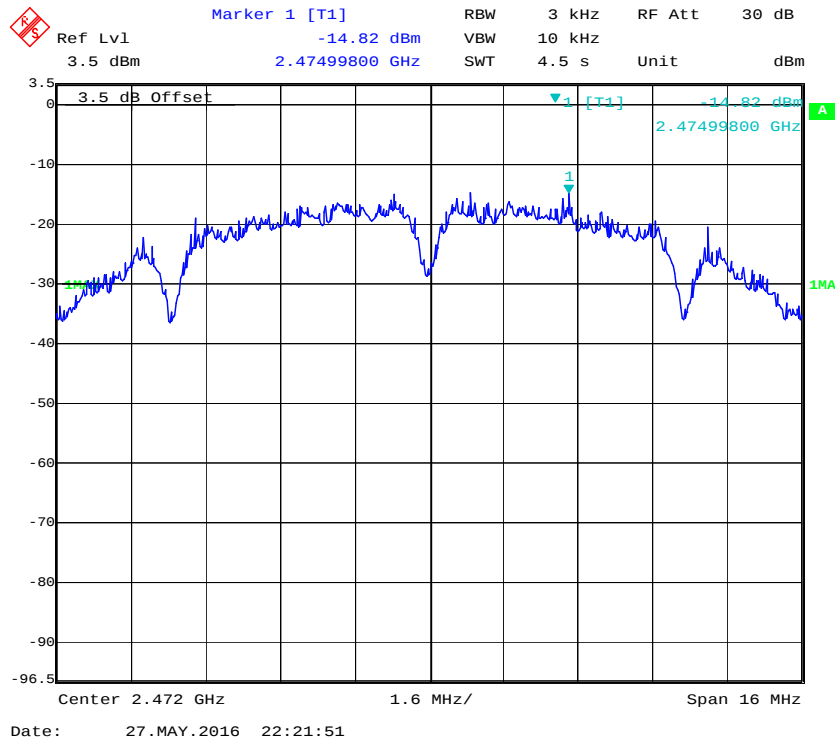


Power Spectral Density, 802.11g Low Channel

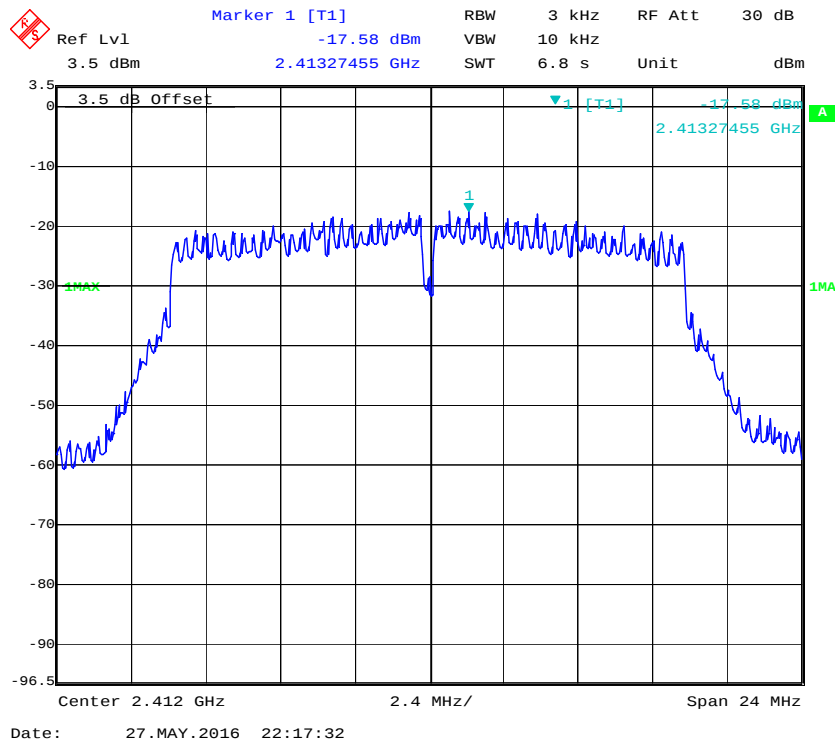


Power Spectral Density, 802.11g Middle Channel

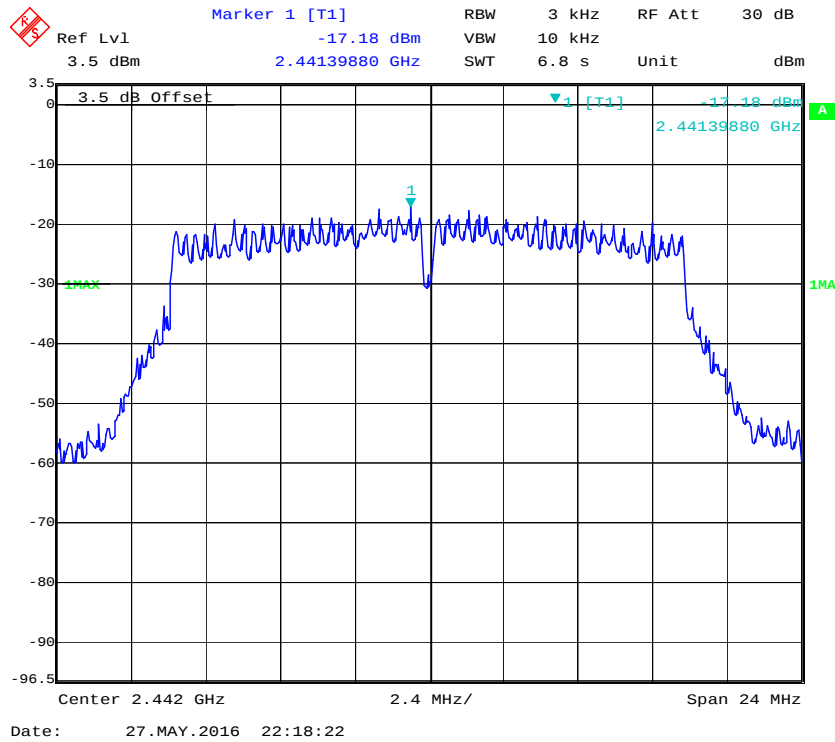


Power Spectral Density, 802.11g High Channel

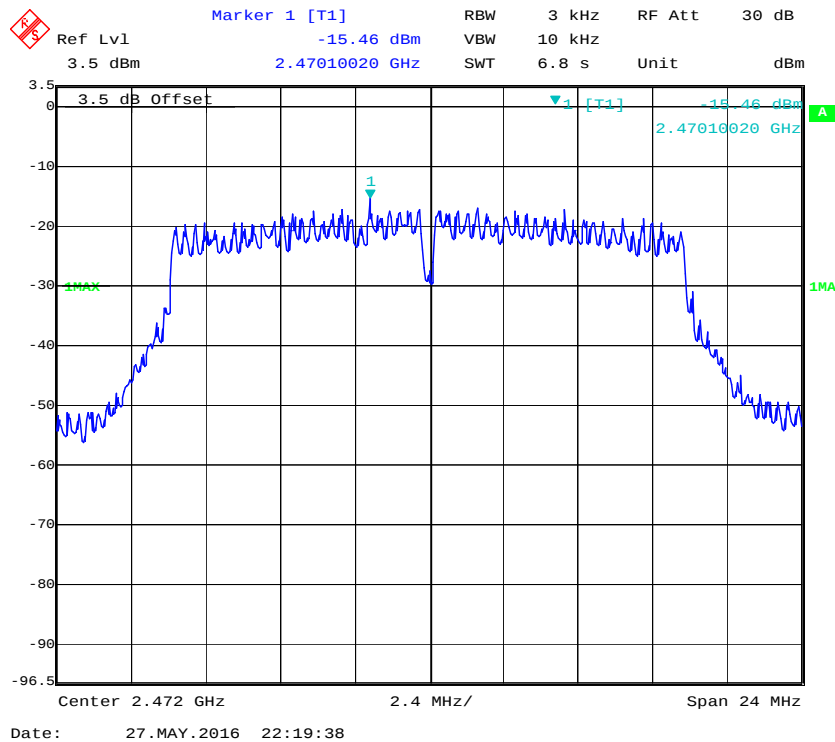


Power Spectral Density, 802.11n-HT20 Low Channel

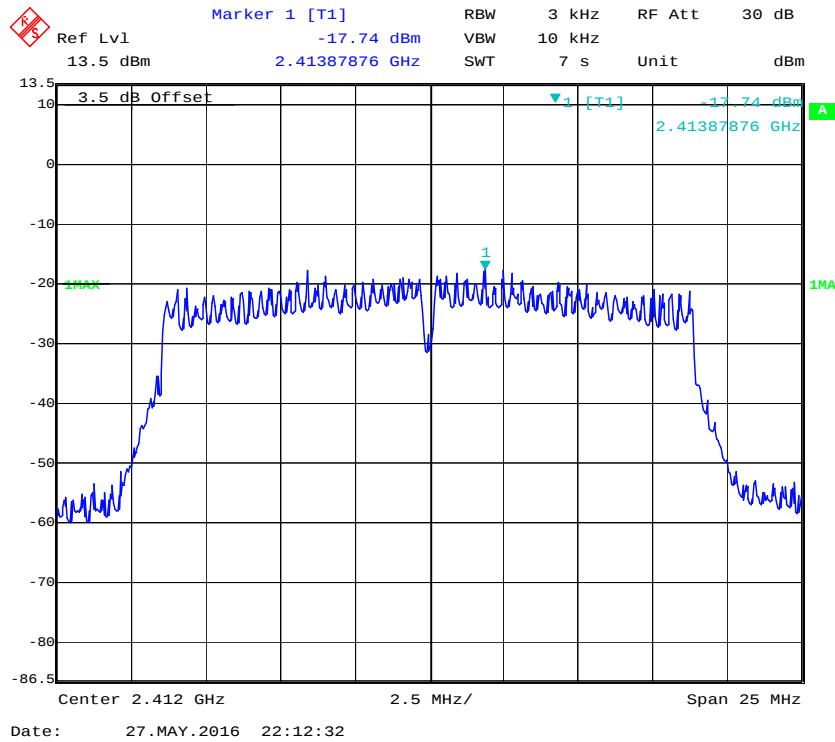


Power Spectral Density, 802.11n-HT20 Middle Channel

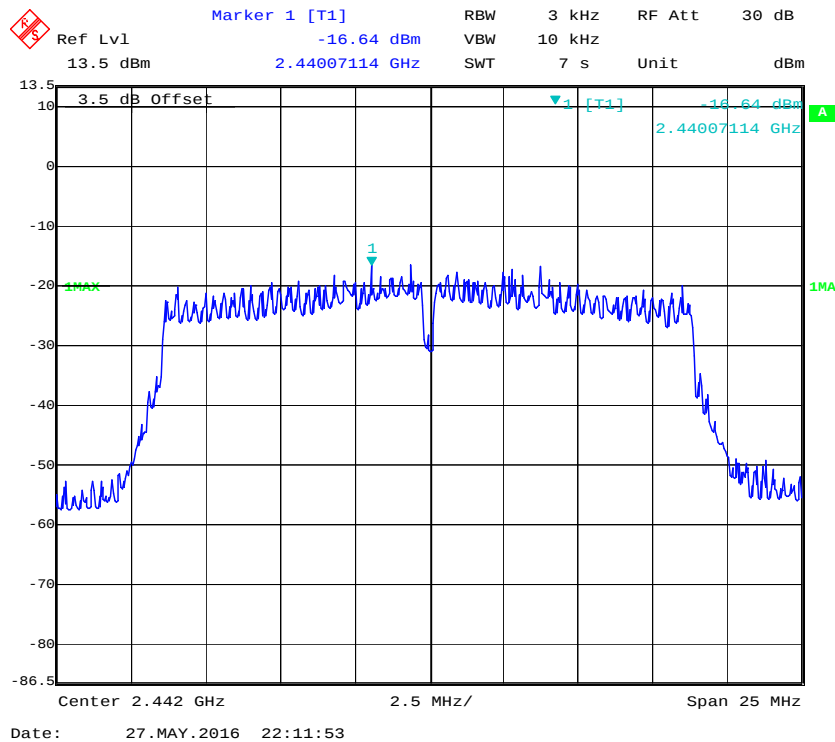


Power Spectral Density, 802.11n-HT20 High Channel

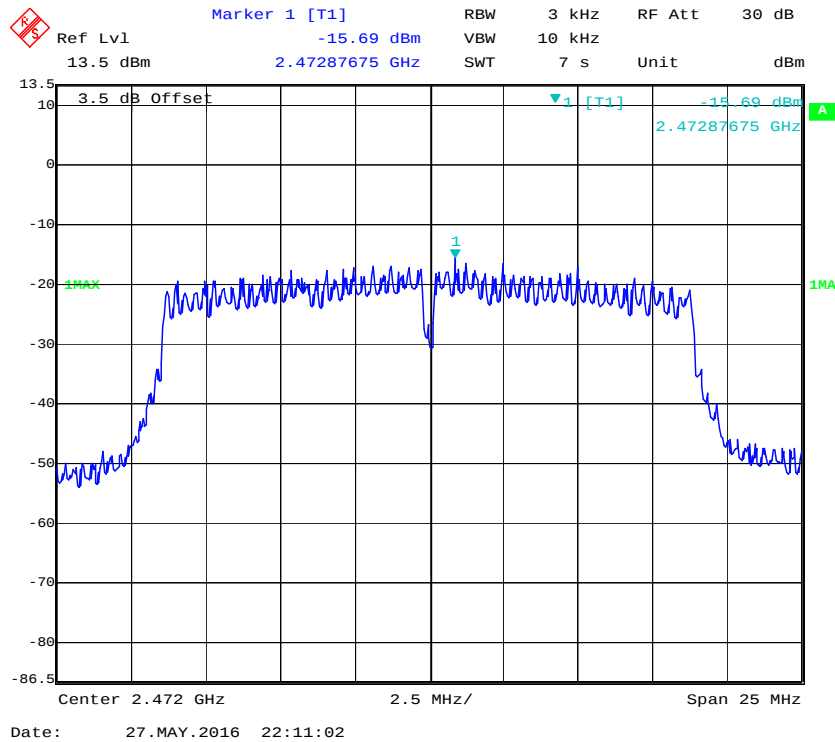


Power Spectral Density, 802.11n-HT40 Low Channel

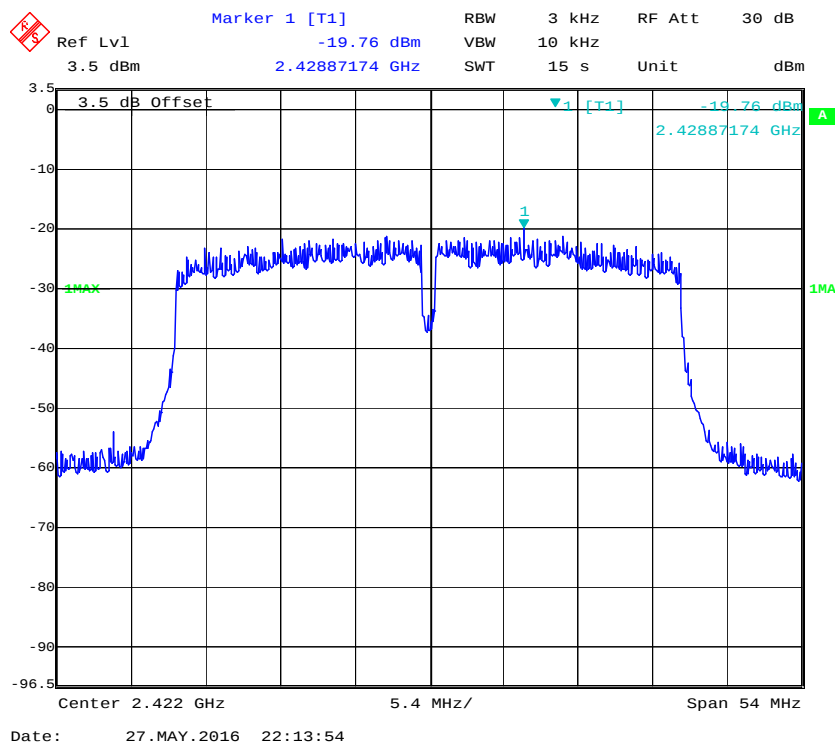


Power Spectral Density, 802.11n-HT40 Middle Channel

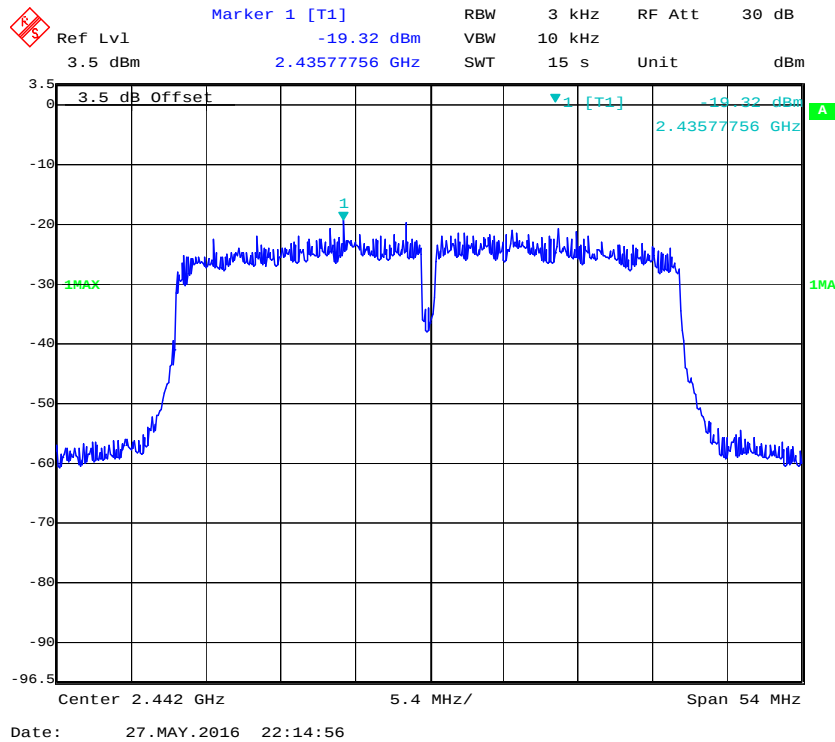


Power Spectral Density, 802.11n-HT40 High Channel

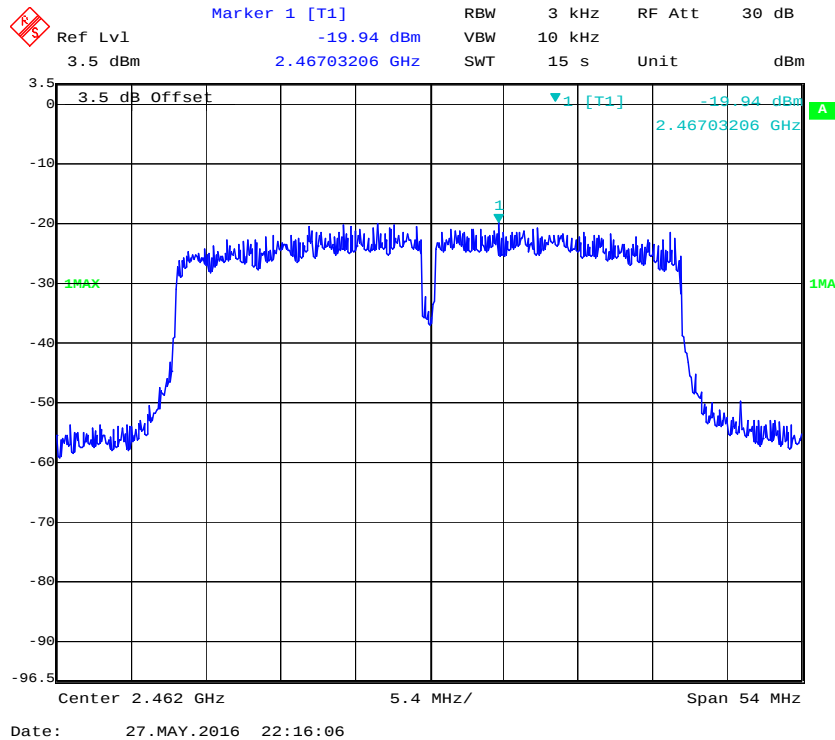


Power Spectral Density, BLE Low Channel

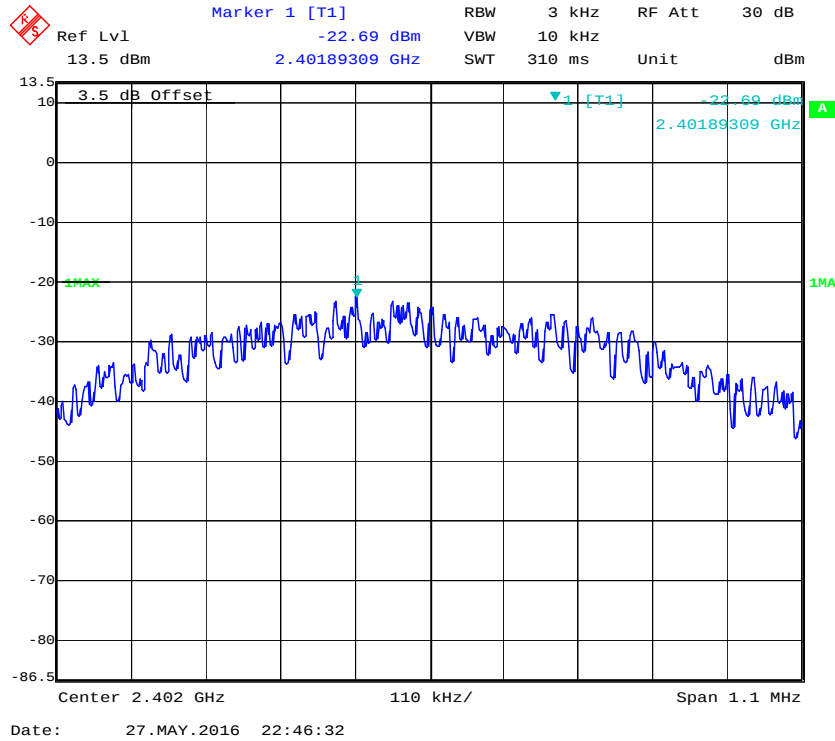

Power Spectral Density, BLE Middle Channel

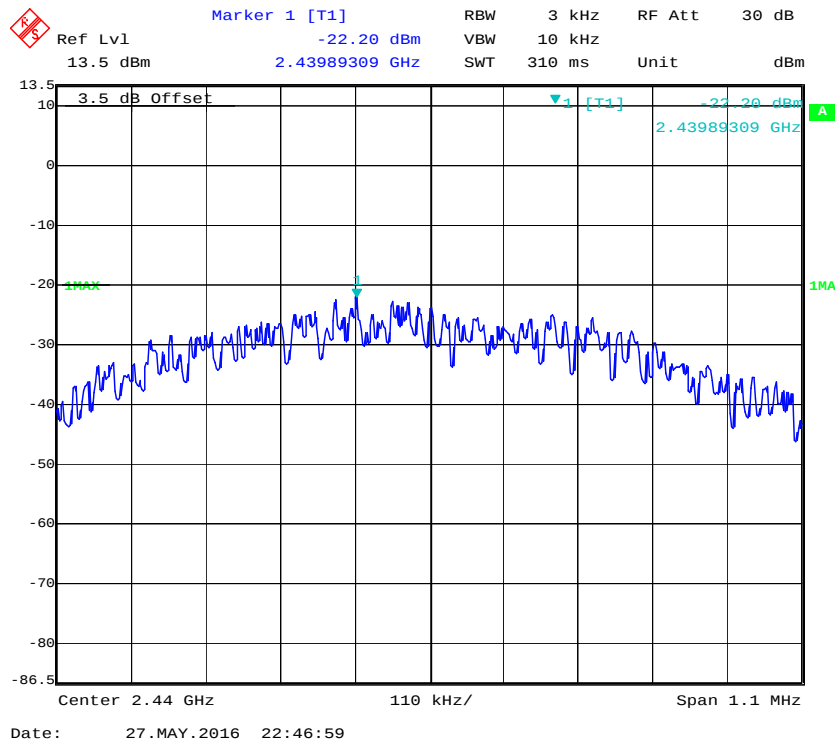

Power Spectral Density, BLE High Channel

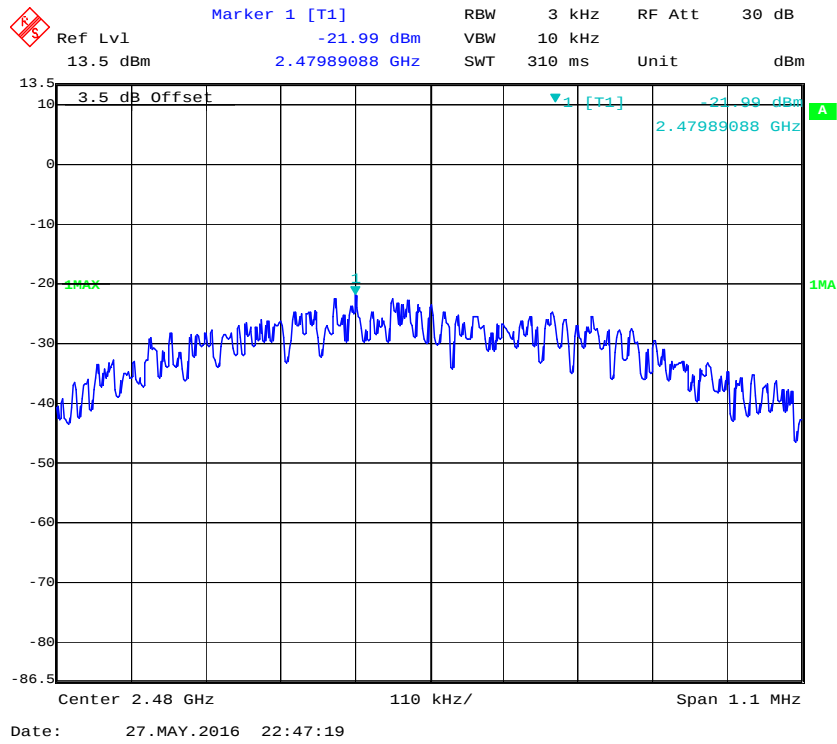

***** END OF REPORT *****