


# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Tablet PC IdeaTab A1000-F  
**BRAND NAME** : lenovo  
**MODEL NAME** : 60027  
**FCC ID** : O57A1000F  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Jan. 28, 2013 and completely tested on Mar. 18, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Testing Site..... 6

    1.6 Applied Standards ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Descriptions of Test Mode..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 Description of RF Function Operation Test Setup..... 10

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 99% Bandwidth Measurement ..... 12

    3.2 Peak Output Power Measurement ..... 17

    3.3 Power Spectral Density Measurement ..... 20

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 26

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 34

    3.6 AC Conducted Emission Measurement..... 58

    3.7 Antenna Requirements..... 62

**4 LIST OF MEASURING EQUIPMENT..... 63**

**5 UNCERTAINTY OF EVALUATION..... 64**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.48 dB at 2483.500 MHz
3.6	15.207	RSS-210 Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 15.54 dB at 0.480 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ , Shanghai , China

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Tablet PC IdeaTab A1000-F
<b>Brand Name</b>	lenovo
<b>Model Name</b>	60027
<b>FCC ID</b>	O57A1000F
<b>EUT supports Radios application</b>	WLAN 11bgn / Bluetooth / Bluetooth4.0 - LE
<b>HW Version</b>	A3000_MB_PCB_V3.0
<b>SW Version</b>	A1000T_A412_01_07_130118_CN
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2. The difference between the two samples is only different supplier for Touch panel/LCD panel/battery cell/storage and the front camera. The others are the same including circuit design, PCB board, structure and other components.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	2402+n*2 MHz; n=0~39
<b>Maximum Output Power to Antenna</b>	Bluetooth v4.0 - LE : 1.58 dBm (0.0014 W)
<b>99% Occupied Bandwidth</b>	Bluetooth v4.0 - LE : 1.032MHz
<b>Antenna Type</b>	PIFA Antenna type with gain 1 dBi
<b>Type of Modulation</b>	Bluetooth v4.0 - LE : GFSK

## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	1.58 dBm	
Ch19	2440MHz	0.84 dBm	
Ch39	2480MHz	0.73 dBm	

- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 KHz to 30 MHz), radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Y plane as worst plane) from all possible combinations.
  
- b. AC power line Conducted Emission was tested under maximum output power.


## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps for Sample 1 Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps for Sample 1 Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps for Sample 1 Mode 4: Bluetooth Tx CH39_2480 MHz_1Mbps for Sample 2
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1 Mode 2 :Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 2 for Sample 2
<b>Remark:</b> 1. For radiated test cases, the tests were performance with Battery 1 for Sample 1, and then only choose the worst channel to perform with Battery 2 for Sample 2. 2. For conducted emission, the worst case is mode 1; only the test data of this mode was reported.	

## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

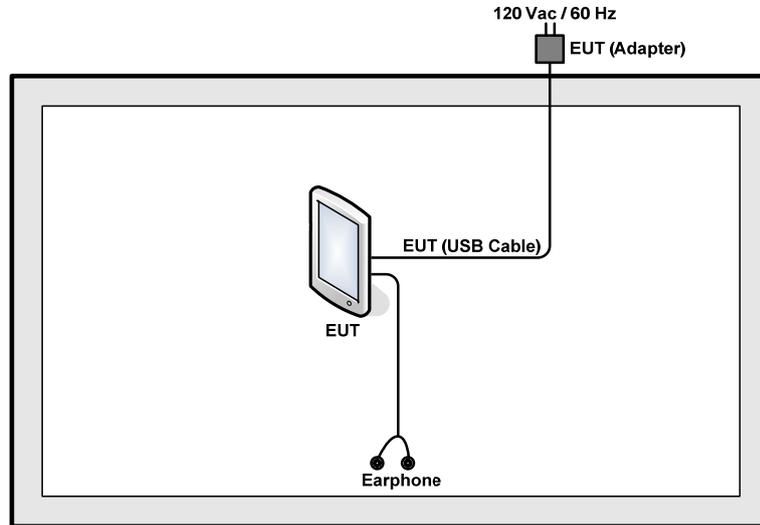

### <AC Conducted Emission Mode>

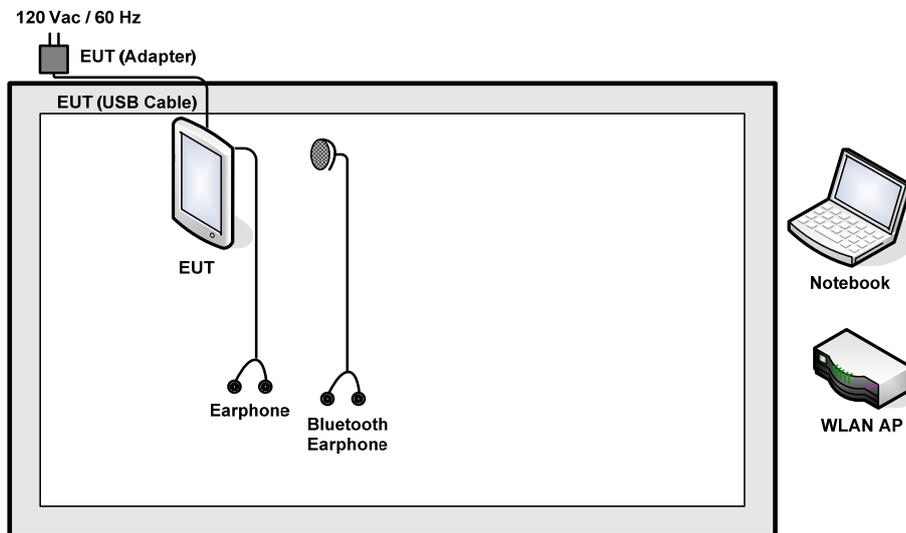

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

## 2.5 Description of RF Function Operation Test Setup

For Bluetooth function, key in “\* # \* # 3646633 # \* # \*” on the EUT directly. Then, the EUT will get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.



## 2.6 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following table shows an offset computation example with cable loss 7.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1-5% of DTS BW, not to exceed 100 KHz. Set the Video bandwidth (VBW)  $\geq 3 \times$  RBW. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.  
For 99% Bandwidth measurement, the RBW=30kHz, and VBW=100kHz. Sweep = auto ;  
Detector function = sample. Trace = max hold.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup

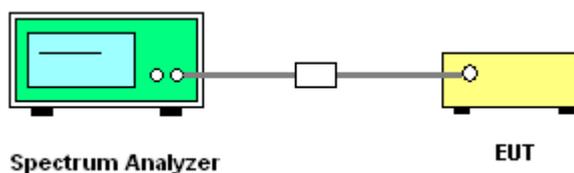






6 dB Bandwidth Plot on Channel 19

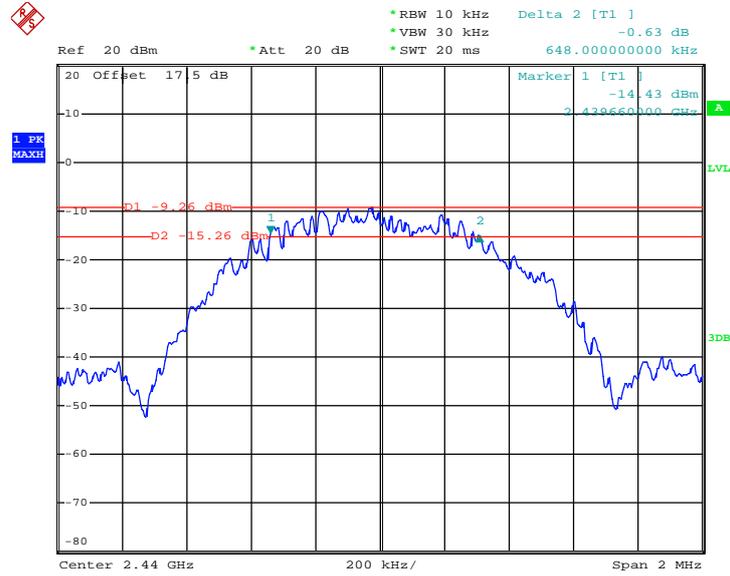

Date: 6.MAR.2013 21:10:43

6 dB Bandwidth Plot on Channel 39

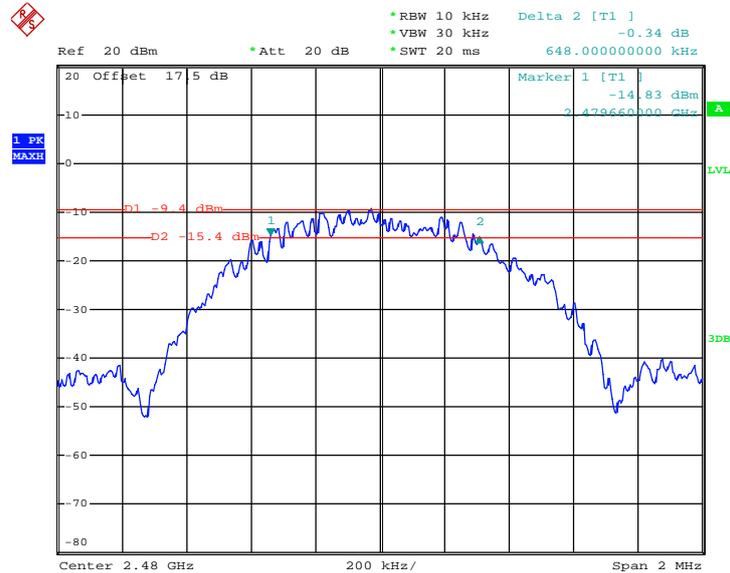

Date: 6.MAR.2013 21:16:18




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.026
19	2440	1.032
39	2480	1.032


99% Bandwidth Plot on Channel 00

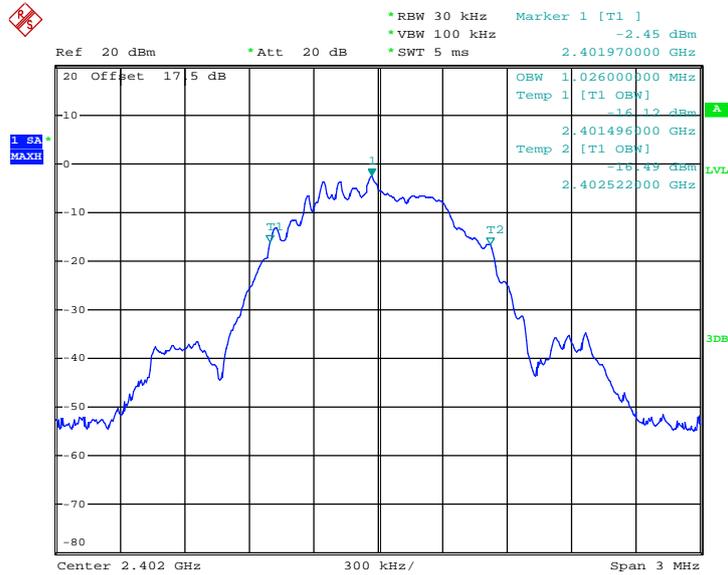

Date: 6.MAR.2013 21:23:17




99% Occupied Bandwidth Plot on Channel 19

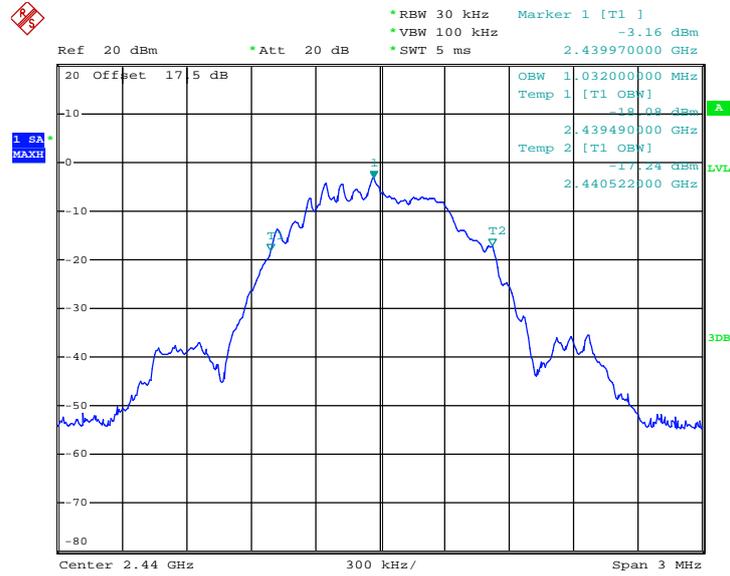

Date: 6.MAR.2013 21:21:54

99% Occupied Bandwidth Plot on Channel 39

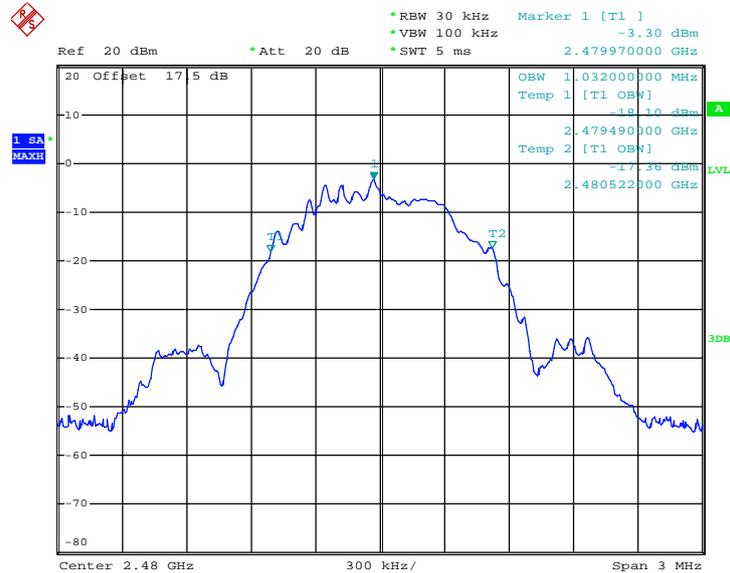

Date: 6.MAR.2013 21:20:05

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

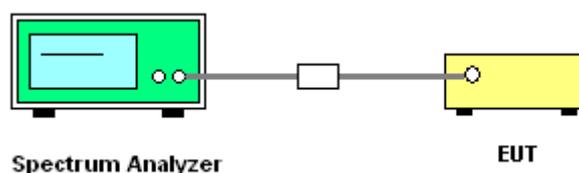


3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	1.58	30.00	Pass
19	2440	0.84	30.00	Pass
39	2480	0.73	30.00	Pass


Peak Output Power Plot on Channel 00

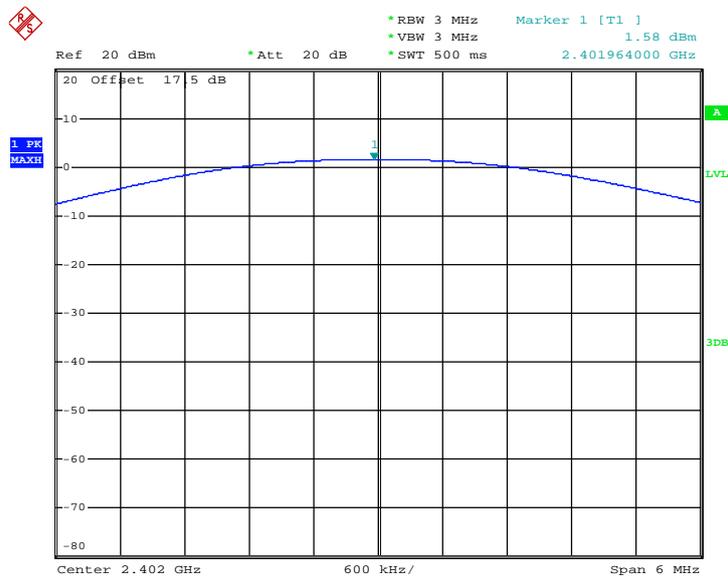

Date: 6.MAR.2013 20:51:59




### Peak Output Power Plot on Channel 19

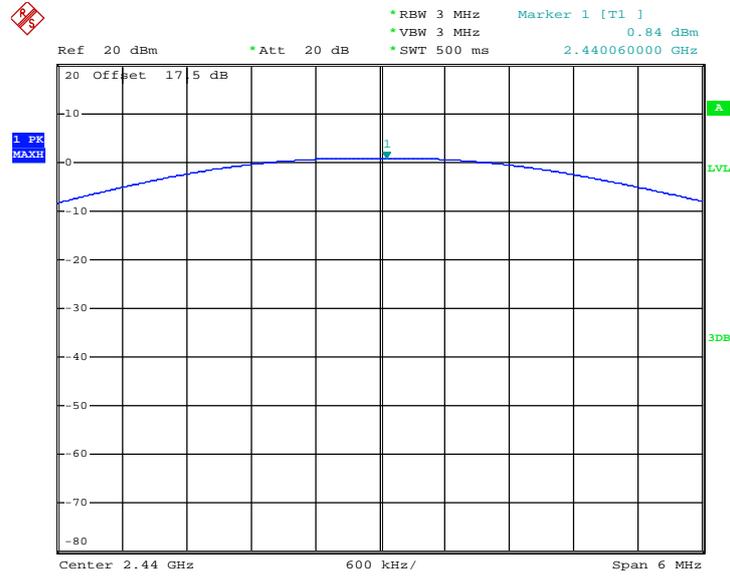

Date: 6.MAR.2013 20:53:29

### Peak Output Power Plot on Channel 39

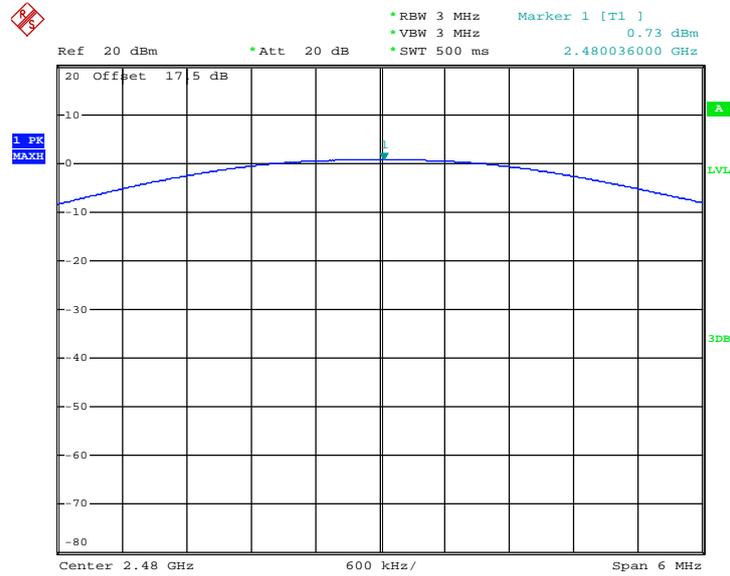

Date: 6.MAR.2013 20:54:44

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100KHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

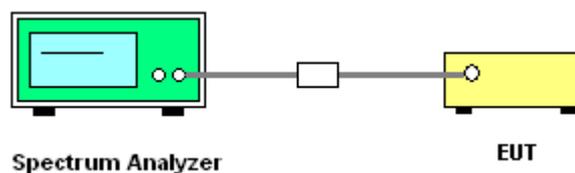



3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
00	2402	0.70	-13.47	8	Pass
19	2440	-0.01	-14.22	8	Pass
39	2480	-0.13	-14.31	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

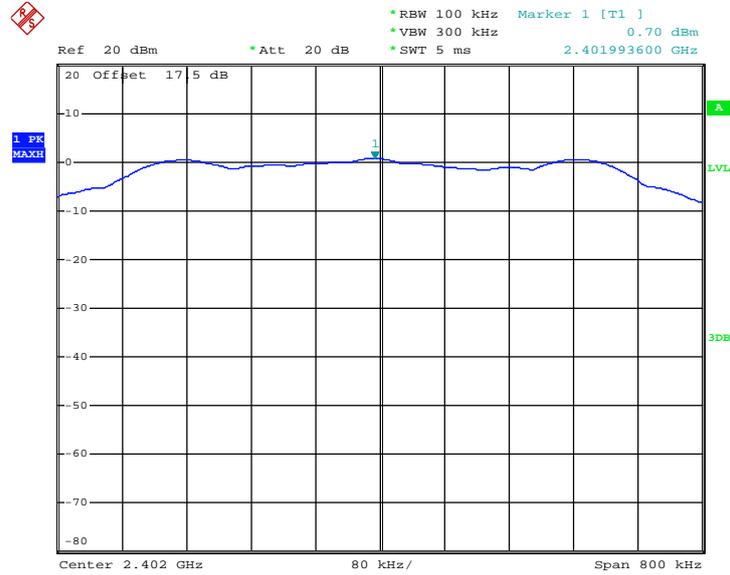

Date: 6.MAR.2013 21:41:55




PSD 100kHz Plot on Channel 19

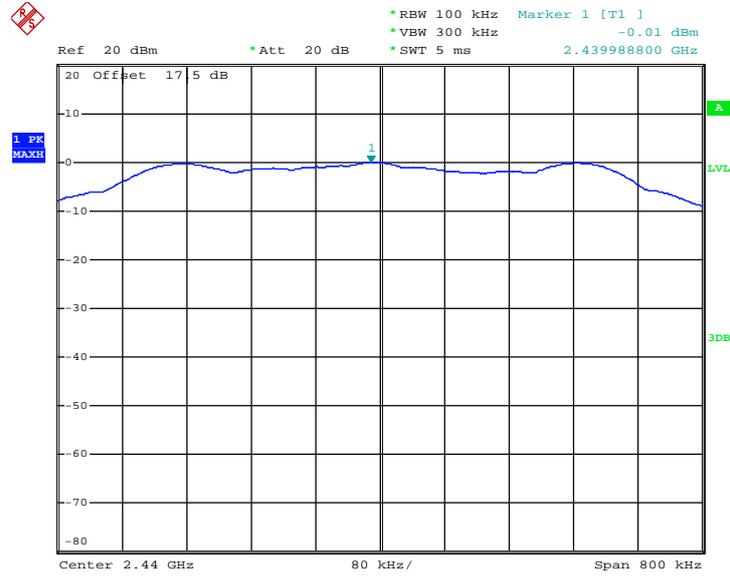

Date: 6.MAR.2013 21:40:52

PSD 100kHz Plot on Channel 39

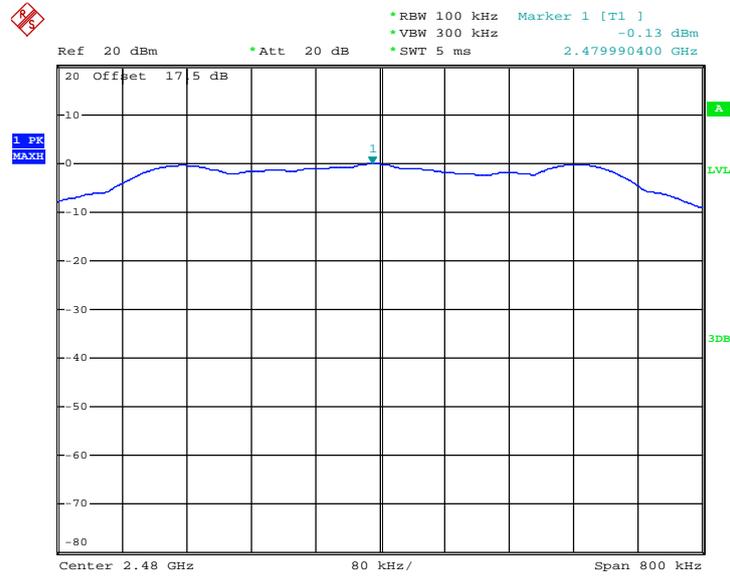


Date: 6.MAR.2013 21:36:18



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

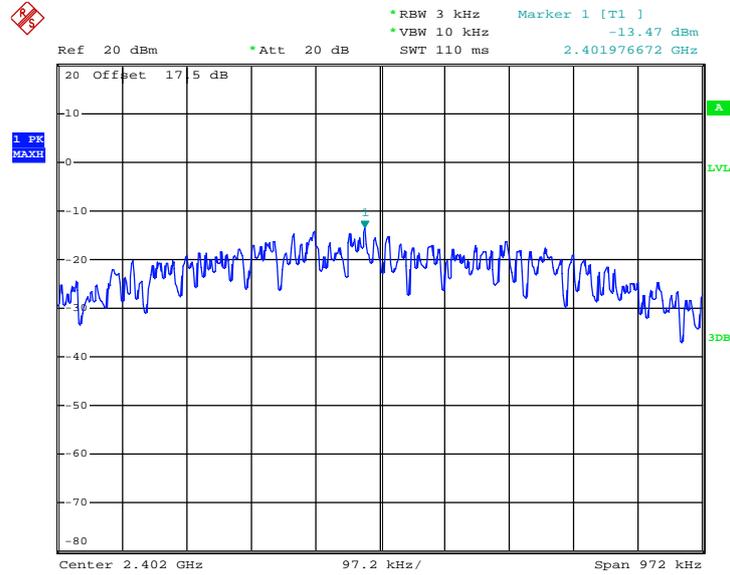

Date: 6.MAR.2013 21:45:18




PSD 3kHz Plot on Channel 19

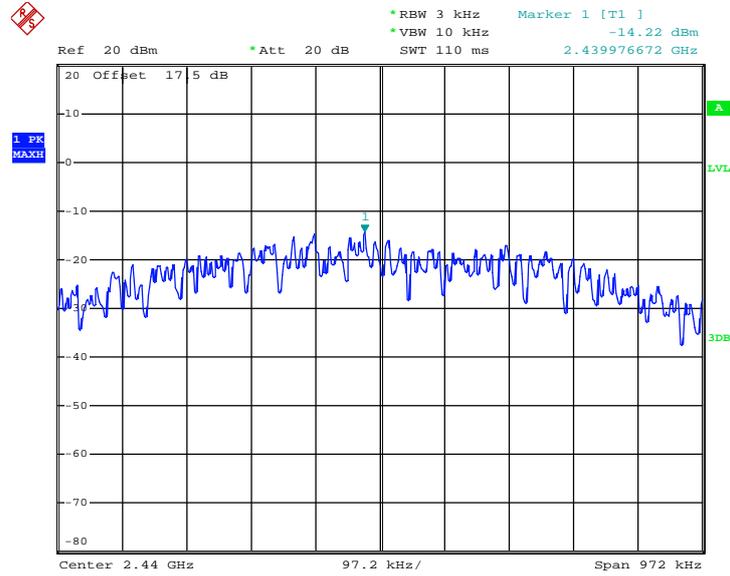

Date: 6.MAR.2013 21:46:39

PSD 3kHz Plot on Channel 39

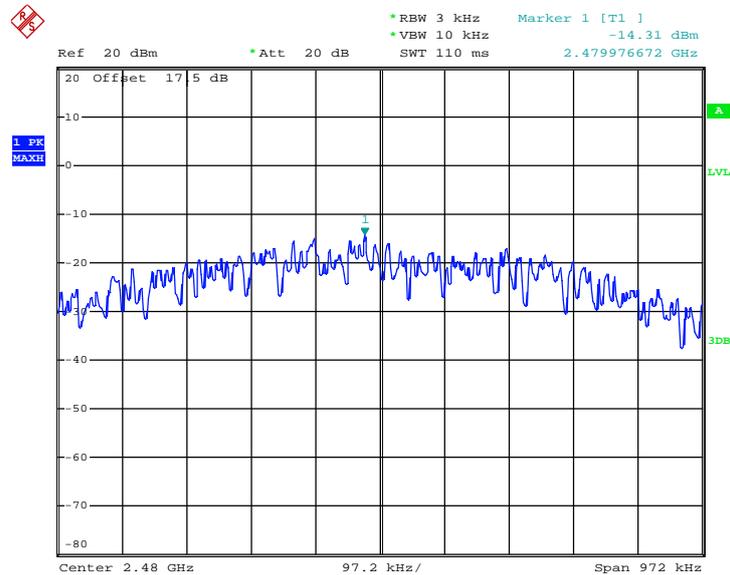

Date: 6.MAR.2013 21:48:46

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

#### 3.4.4 Test Setup

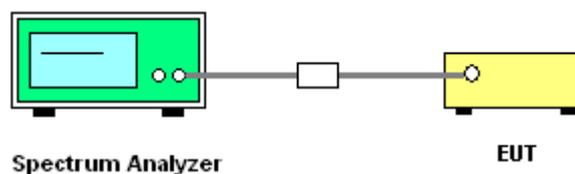




### 3.4.5 Test Result of Conducted Band Edges


Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Channel :	00 and 39	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li

Low Band Edge Plot on Channel 00

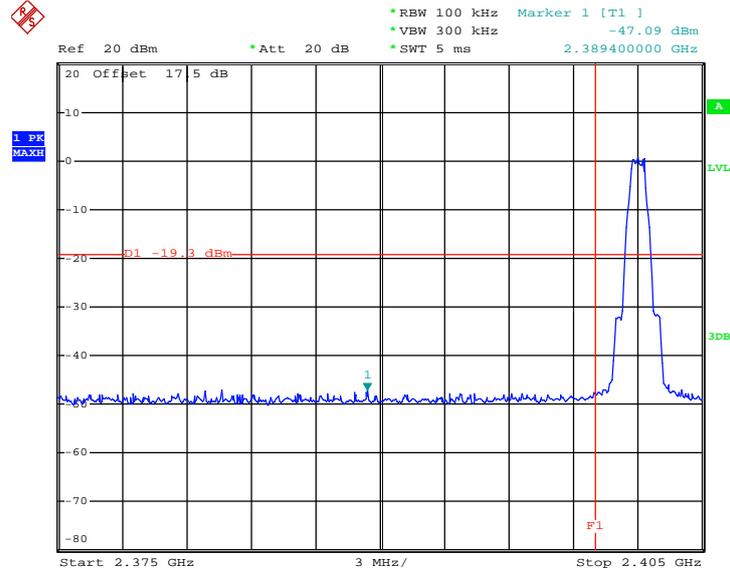

Date: 6.MAR.2013 22:31:09

High Band Edge Plot on Channel 39

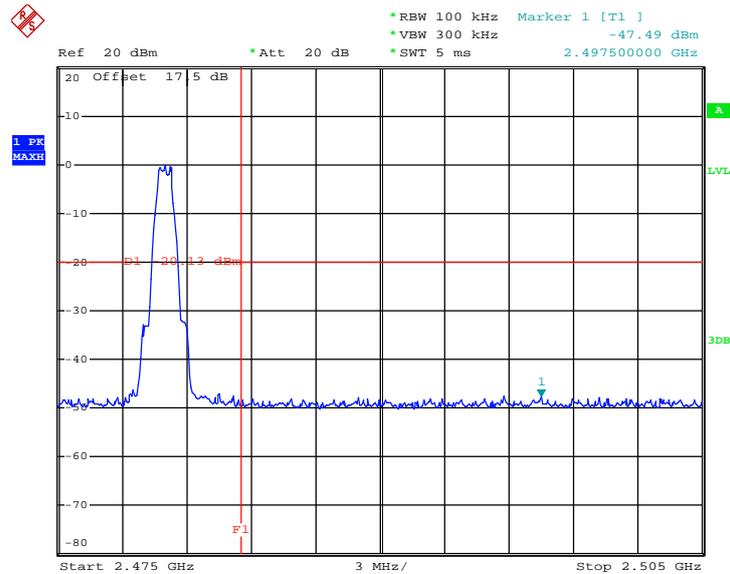


Date: 6.MAR.2013 22:33:54



### 3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

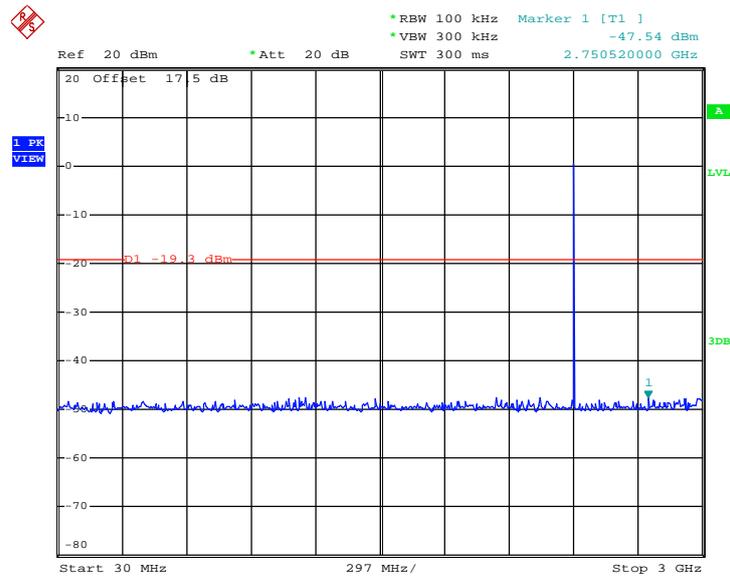

Date: 6.MAR.2013 22:45:35



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

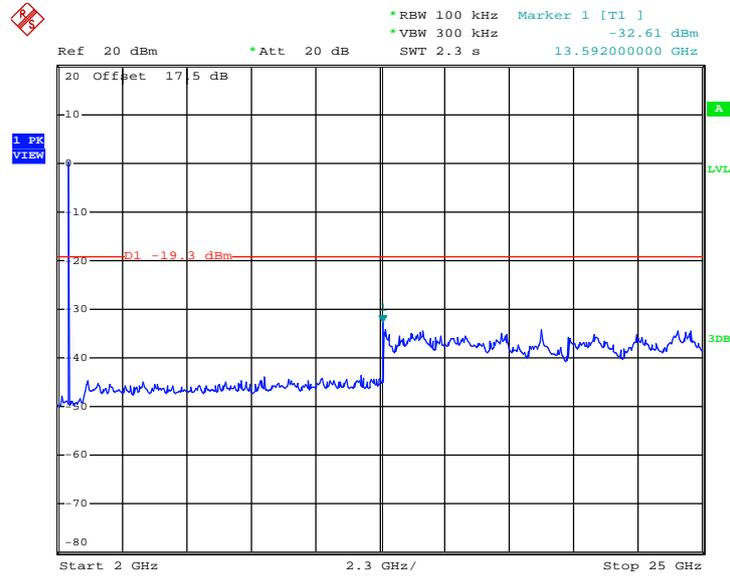


Date: 6.MAR.2013 22:43:50



Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Channel :	19	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

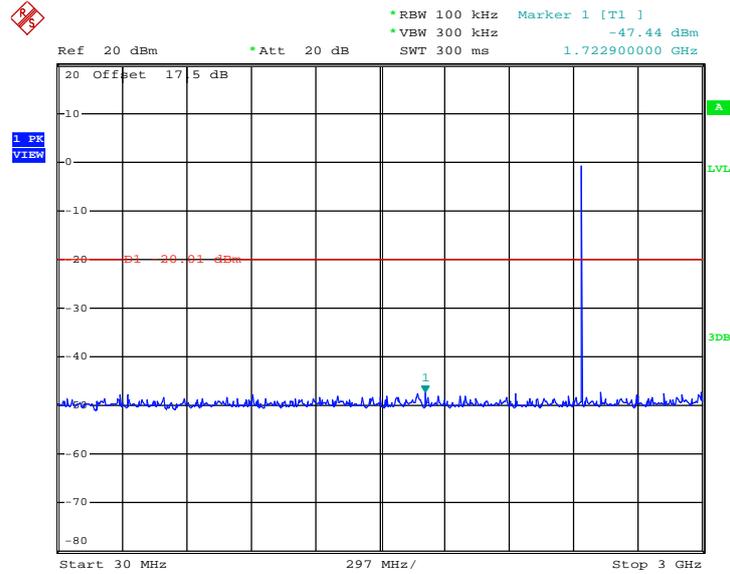

Date: 6.MAR.2013 22:41:24



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

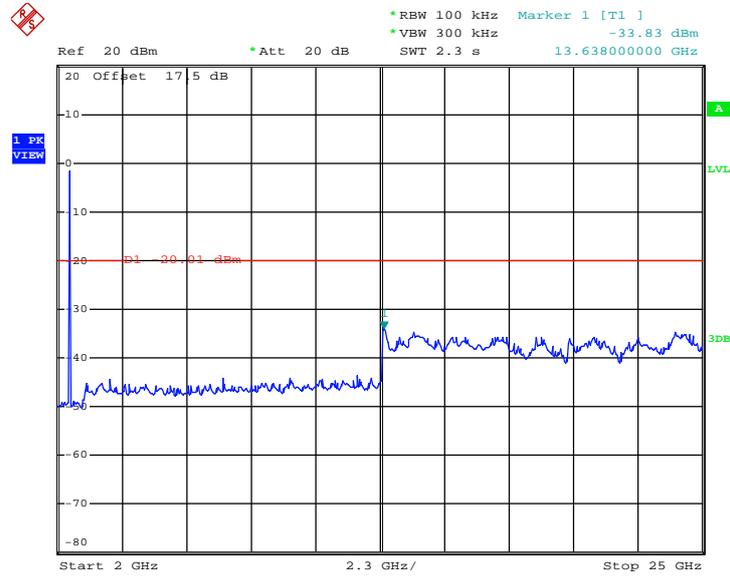


Date: 6.MAR.2013 22:42:25



Test Mode :	Bluetooth 4.0 - LE	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	47~48%
		Test Engineer :	Lizy Li


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

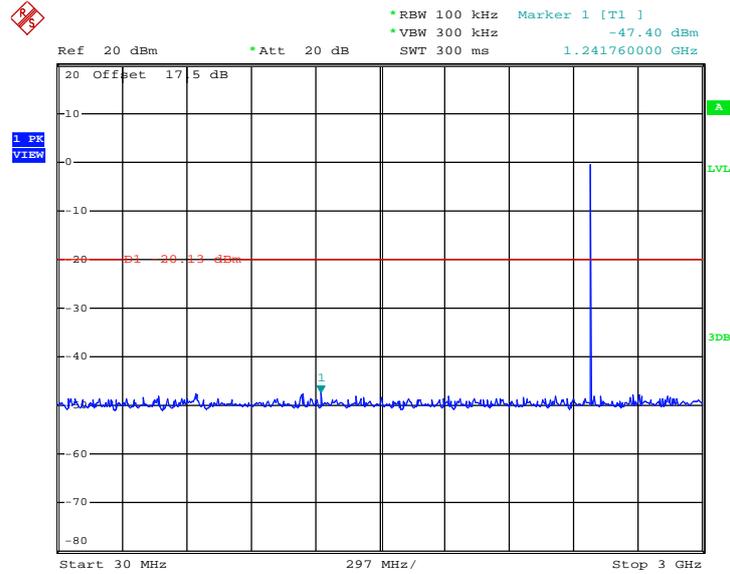

Date: 6.MAR.2013 22:39:58



### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

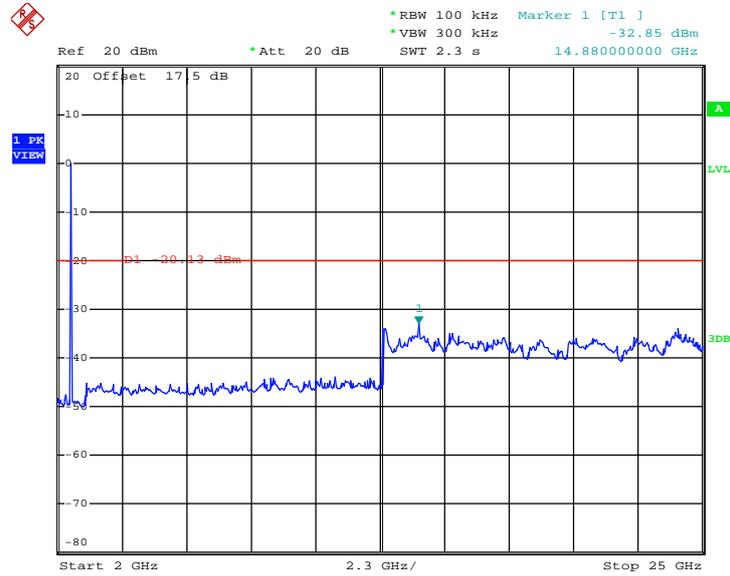

Date: 6.MAR.2013 22:37:37

### **3.5 Radiated Band Edges and Spurious Emission Measurement**

#### **3.5.1 Limit of Radiated Band Edges and Spurious Emission**

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

<b>Frequency (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### **3.5.2 Measuring Instruments**

See list of measuring instruments of this test report.

**3.5.3 Test Procedures**

1. The testing follows the guidelines in ANSI C63.10-2009 and ANSI C63.4-2003 test site requirement.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 KHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
 For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
Bluetooth 4.0 - LE	0.611	0.384	2.604	3KHz

**Note:** For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.



**Marker-Delta method :**

- (1) Set RBW = 1 MHz, VBW = 3 MHz, peak detector.

Repeat the measurement with an average detector, use RBW = 1MHz

VBW = 10 Hz, when duty cycle is no less than 98 percent.

VBW  $\geq$  1/T, when duty cycle is less than 98 percent


- (2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100KHz, 1% of the total span. Set VBW = 100KHz  $\geq$  RBW.

- (3) Subtract the delta measured in step (2) from the field strengths measured in step (1).


The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

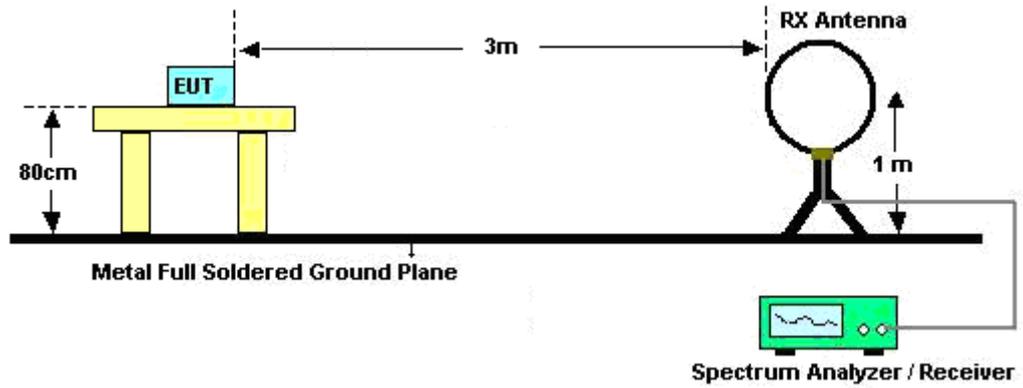

For radiated emissions from 30MHz to 1GHz

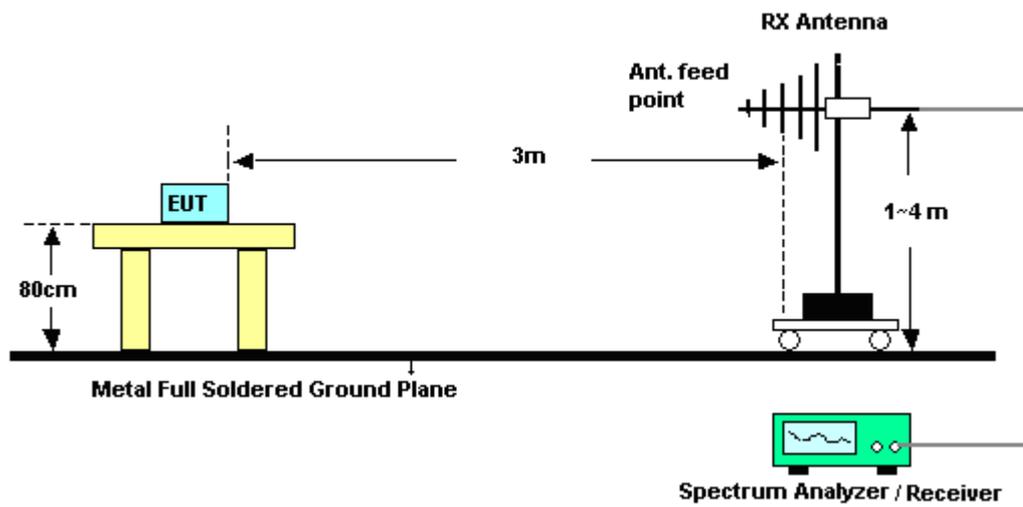

For radiated emissions above 1GHz

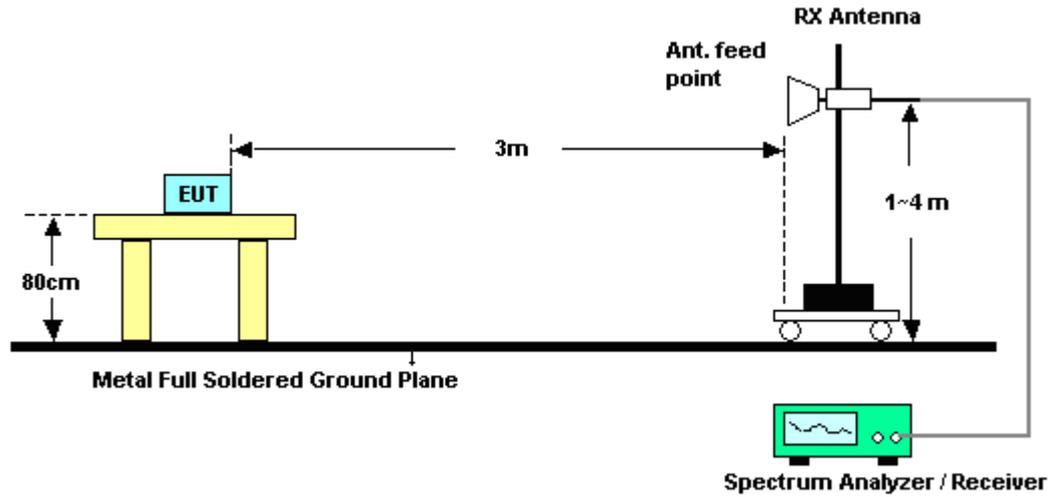

### 3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.05	51.22	-22.78	74	47.78	32.85	2.1	31.51	120	50	Peak
2386.05	41.07	-12.93	54	37.63	32.85	2.1	31.51	120	50	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2386.23	50.58	-23.42	74	47.14	32.85	2.1	31.51	110	30	Peak
2386.32	40.06	-13.94	54	36.62	32.85	2.1	31.51	110	30	Average



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
		Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	61.68	-12.32	74	58.03	33.01	2.15	31.51	110	60	Peak
2483.5	58.26	4.26	54	54.61	33.01	2.15	31.51	110	60	Average
2483.5	49.28	-24.72	74	-	-	-	-	-	-	Peak
2483.5	48.52	-5.48	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission ( dBμV/m )	Delta Result ( dB )	Measurement Result ( dBμV/m )	Limit ( dBμV/m )	Margin ( dB )	Result
Peak	98.86	49.58	49.28	74	-24.72	Pass
Average	98.1	49.58	48.52	54	-5.48	Pass

Note: Measurement result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.75	-14.25	74	56.1	33.01	2.15	31.51	110	260	Peak
2483.5	56.17	2.17	54	52.52	33.01	2.15	31.51	110	260	Average
2483.5	45.03	-28.97	74	-	-	-	-	-	-	Peak
2483.5	44.24	-9.76	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission ( dBμV/m )	Delta Result ( dB )	Measurement Result ( dBμV/m )	Limit ( dBμV/m )	Margin ( dB )	Result
Peak	96.31	51.28	45.03	74	-28.97	Pass
Average	95.52	51.28	44.24	54	-9.76	Pass

Note: Measurement result = Maximum field strength – Delta result

<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
		<b>Test Engineer :</b>	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	61.6	-12.4	74	57.95	33.01	2.15	31.51	135	38	Peak
2483.5	57.91	3.91	54	54.26	33.01	2.15	31.51	135	38	Average
2483.5	46.63	-27.37	74	-	-	-	-	-	-	Peak
2483.5	45.04	-8.96	54	-	-	-	-	-	-	Average

**Summary results of marker-delta method:**

Test mode	Maximum field strength of the fundamental emission ( dB $\mu$ V/m )	Delta Result ( dB )	Measurement Result ( dB $\mu$ V/m )	Limit ( dB $\mu$ V/m )	Margin ( dB )	Result
Peak	99.35	52.72	46.63	74	-27.37	Pass
Average	97.76	52.72	45.04	54	-8.96	Pass

**Note:** Measurement result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dB $\mu$ V/m )	Over Limit ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	63.11	-10.89	74	59.46	33.01	2.15	31.51	100	230	Peak
2483.5	59.82	5.82	54	56.17	33.01	2.15	31.51	100	230	Average
2483.5	45.88	-28.12	74	-	-	-	-	-	-	Peak
2483.5	45.03	-8.97	54	-	-	-	-	-	-	Average


**Summary results of marker-delta method:**

Test mode	Maximum field strength of the fundamental emission ( dB $\mu$ V/m )	Delta Result ( dB )	Measurement Result ( dB $\mu$ V/m )	Limit ( dB $\mu$ V/m )	Margin ( dB )	Result
Peak	100.63	54.75	45.88	74	-28.12	Pass
Average	99.78	54.75	45.03	54	-8.97	Pass

**Note:** Measurement result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal

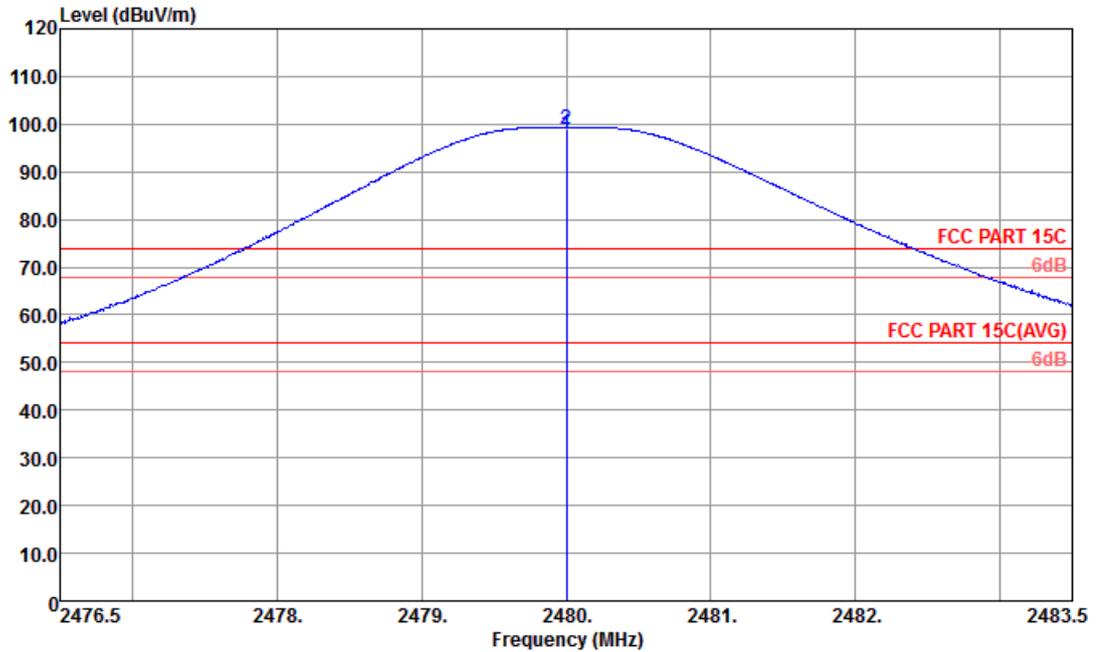


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	98.10	44.10	54.00	94.45	33.01	2.15	31.51	112	35	Average
2 *	2480.00	98.86	24.86	74.00	95.21	33.01	2.15	31.51	112	35	Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal

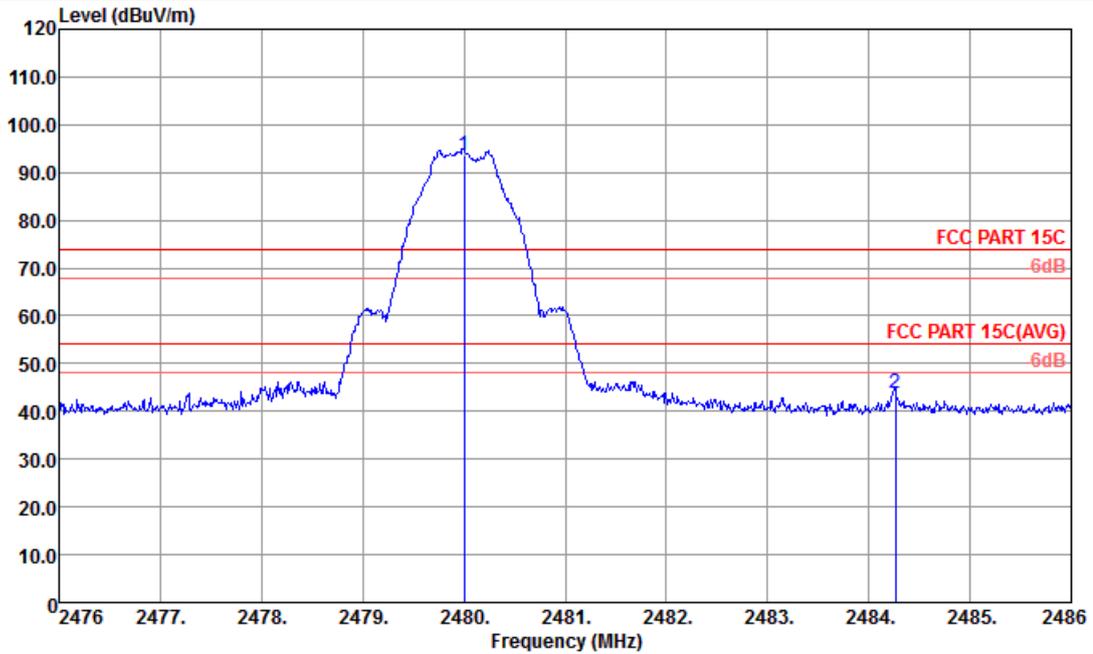


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	93.53	19.53	74.00	89.88	33.01	2.15	31.51	100	0	Peak
2	2484.26	43.95	-30.05	74.00	40.30	33.01	2.15	31.51	134	218	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 49.58 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical

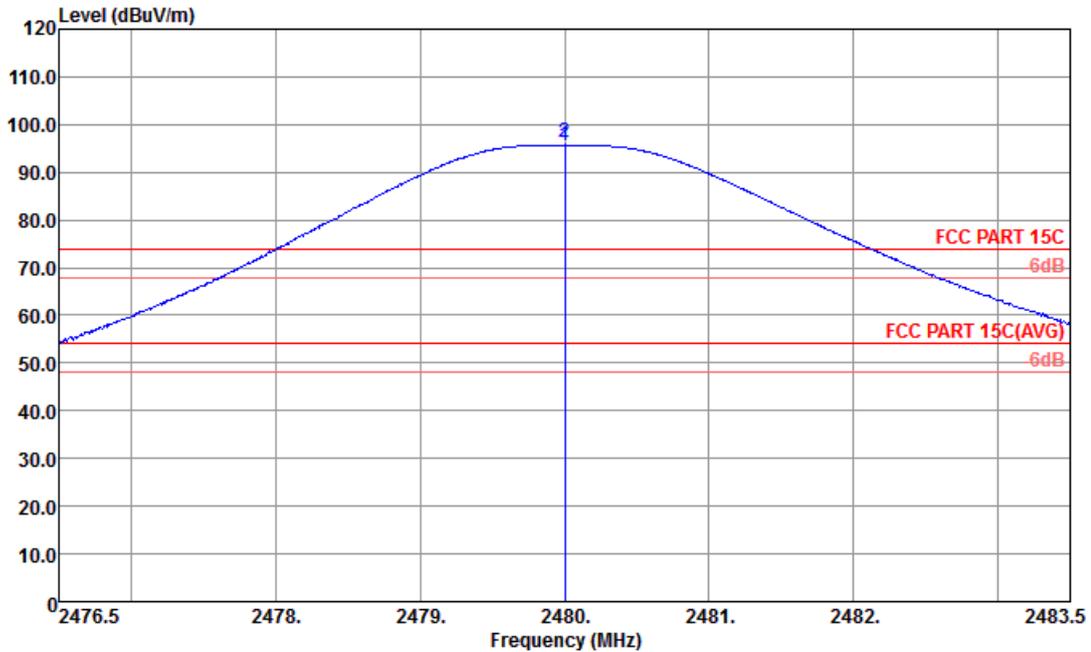


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	95.52	41.52	54.00	91.87	33.01	2.15	31.51	101	230	Average
2 *	2480.00	96.31	22.31	74.00	92.66	33.01	2.15	31.51	101	230	Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical

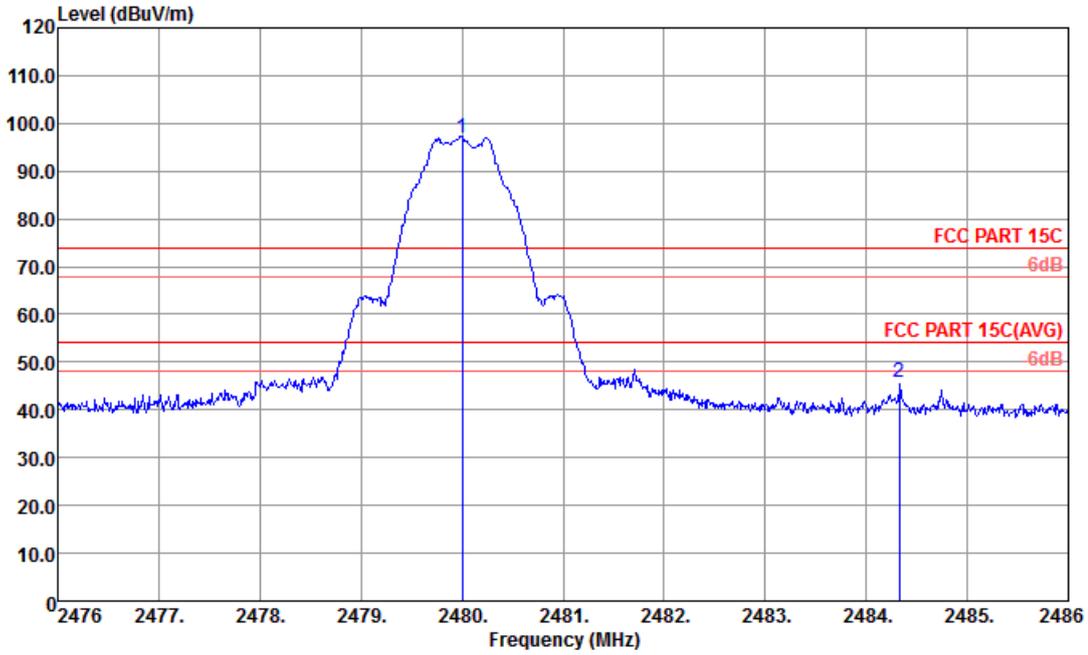


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	96.94	22.94	74.00	93.29	33.01	2.15	31.51	102	240	Peak
2	2484.33	45.66	-28.34	74.00	42.01	33.01	2.15	31.51	100	240	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 51.28 dB , single carrier Mode



Test Mode :	Mode 4	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal

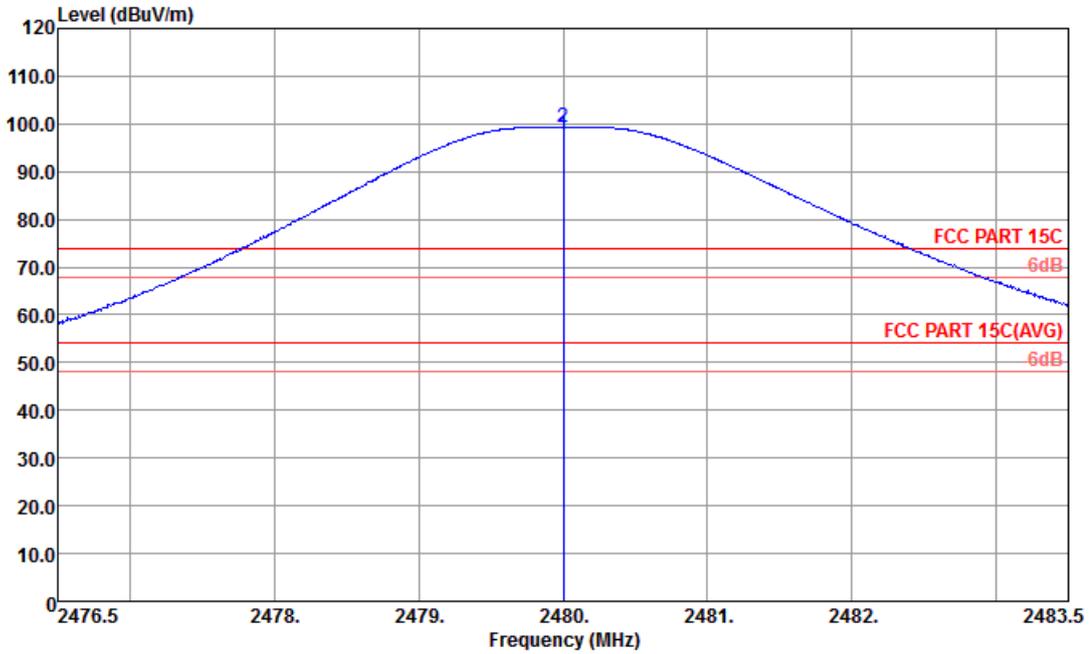


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	2480.00	97.76	43.76	54.00	94.11	33.01	2.15	31.51	135	40 Average
2 *	2480.00	99.35	25.35	74.00	95.70	33.01	2.15	31.51	135	40 Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 4	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal

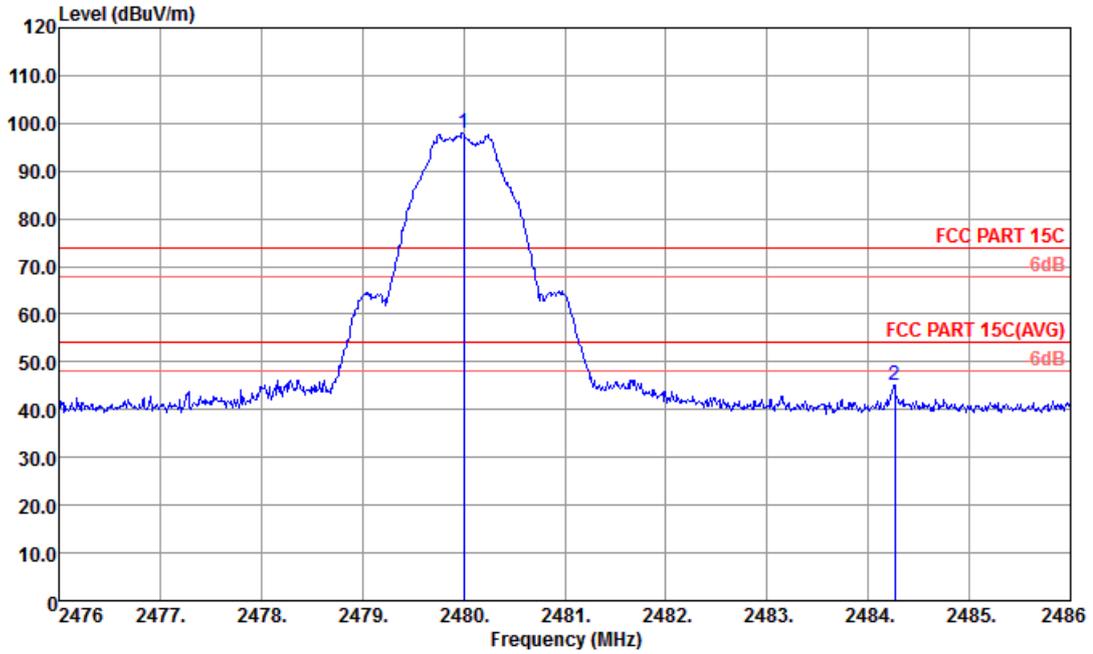


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	97.81	23.81	74.00	94.16	33.01	2.15	31.51	135	40	Peak
2	2484.26	45.09	-28.91	74.00	41.44	33.01	2.15	31.51	200	0	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 52.72 dB , single carrier Mode



Test Mode :	Mode 4	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical

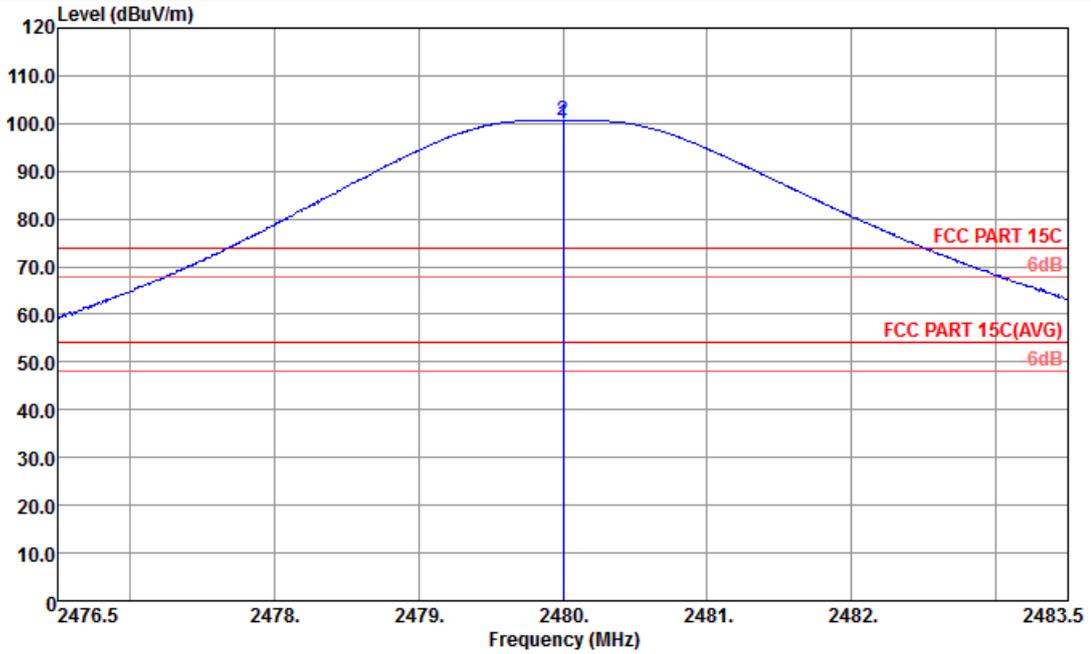


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	99.78	45.78	54.00	96.13	33.01	2.15	31.51	101	230	Average
2 *	2480.00	100.63	26.63	74.00	96.98	33.01	2.15	31.51	101	230	Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 4	Temperature :	23~24°C
Test Channel :	39	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical

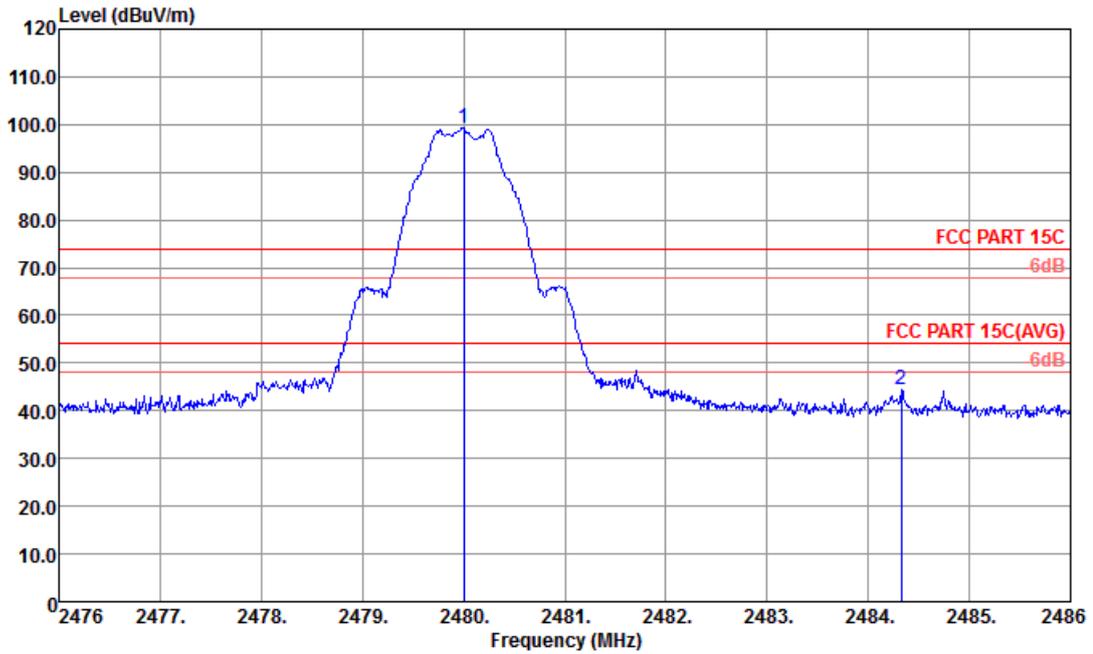

Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	99.37	25.37	74.00	95.72	33.01	2.15	31.51	101	230	Peak
2	2484.33	44.62	-29.38	74.00	40.97	33.01	2.15	31.51	200	15	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 54.75 dB , single carrier Mode

**3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)**

**Note:** Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 100.81 dBuV/m - 20dB = 80.81 dBuV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2399	64.44	-16.37	80.81	61	32.85	2.1	31.51	118	52	Peak
2402	100.81	-	-	97.37	32.85	2.1	31.51	118	52	Peak
2402	100.13	-	-	96.69	32.85	2.1	31.51	118	52	Average
4804	47.87	-26.13	74	41.18	35.16	3.07	31.54	114	325	Peak
7206	44.06	-36.75	80.81	35.64	36.15	3.23	30.96	108	96	Peak



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2402 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7206 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level.. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2399	63.55	-16.94	80.49	60.11	32.85	2.1	31.51	119	65	Peak
2402	100.49	-	-	97.05	32.85	2.1	31.51	119	65	Peak
2402	99.04	-	-	95.6	32.85	2.1	31.51	119	65	Average
4804	46.56	-27.44	74	39.87	35.16	3.07	31.54	118	96	Peak
7206	43.84	-36.65	80.49	35.42	36.15	3.23	30.96	138	125	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	99.62	-	-	96.06	32.94	2.13	31.51	100	302	Peak
2440	98.82	-	-	95.26	32.94	2.13	31.51	100	302	Average
4880	47.37	-26.63	74	40.6	35.18	3.11	31.52	113	254	Peak
7320	42.83	-31.17	74	34.37	36.2	3.2	30.94	124	268	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	19	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2440	96.77	-	-	93.21	32.94	2.13	31.51	122	219	Peak
2440	95.95	-	-	92.39	32.94	2.13	31.51	122	219	Average
4880	47.55	-26.45	74	40.78	35.18	3.11	31.52	132	162	Peak
7320	44.79	-29.21	74	36.33	36.2	3.2	30.94	107	95	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
59.859	27.07	-12.93	40	54.89	5.29	0.47	33.58	-	-	Peak
104.536	33.86	-9.64	43.5	55.74	11.14	0.58	33.6	108	324	Peak
270.375	29.58	-16.42	46	49.67	12.38	0.94	33.41	-	-	Peak
356.676	28.07	-17.93	46	45.67	14.64	1.1	33.34	-	-	Peak
663.473	29.61	-16.39	46	42.09	18.98	1.46	32.92	-	-	Peak
866.088	32.22	-13.78	46	42.71	20.48	1.66	32.63	-	-	Peak
2480	99.56	-	-	95.91	33.01	2.15	31.51	113	65	Peak
2480	98.68	-	-	95.03	33.01	2.15	31.51	113	65	Average
4960	49.07	-24.93	74	42.24	35.19	3.15	31.51	125	312	Peak
7440	45.45	-28.55	74	36.94	36.26	3.17	30.92	125	115	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	33.84	-6.16	40	49.08	17.99	0.33	33.56	125	128	Peak
59.859	26.02	-13.98	40	53.84	5.29	0.47	33.58	-	-	Peak
104.17	32.23	-11.27	43.5	54.25	11.01	0.58	33.61	-	-	Peak
268.485	29.36	-16.64	46	49.5	12.33	0.94	33.41	-	-	Peak
407.515	26.81	-19.19	46	42.92	16.03	1.15	33.29	-	-	Peak
866.088	30.55	-15.45	46	41.04	20.48	1.66	32.63	-	-	Peak
2480	97.87	-	-	94.22	33.01	2.15	31.51	100	255	Peak
2480	96.53	-	-	92.88	33.01	2.15	31.51	100	255	Average
4960	47.82	-26.18	74	40.99	35.19	3.15	31.51	124	85	Peak
7440	43.51	-30.49	74	35	36.26	3.17	30.92	142	36	Peak



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
59.859	27.07	-12.93	40	54.89	5.29	0.47	33.58	-	-	Peak
107.51	34.05	-9.45	43.5	55.54	11.53	0.58	33.6	184	23	Peak
180.017	28.06	-15.44	43.5	52.45	8.39	0.78	33.56	-	-	Peak
270.375	29.58	-16.42	46	49.67	12.38	0.94	33.41	-	-	Peak
407.515	29.57	-16.43	46	45.68	16.03	1.15	33.29	-	-	Peak
866.088	32.22	-13.78	46	42.71	20.48	1.66	32.63	-	-	Peak
2480	98.88	-	-	95.23	33.01	2.15	31.51	135	38	Peak
2480	97.94	-	-	94.29	33.01	2.15	31.51	135	38	Average
4960	49.15	-24.85	74	42.32	35.19	3.15	31.51	120	356	Peak
7440	45.67	-28.33	74	37.16	36.26	3.17	30.92	200	142	Peak



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Stone Gu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	33.84	-6.16	40	49.08	17.99	0.33	33.56	200	0	Peak
59.859	28.02	-11.98	40	55.84	5.29	0.47	33.58	-	-	Peak
108.647	34.47	-9.03	43.5	55.82	11.66	0.59	33.6	-	-	Peak
268.485	31.36	-14.64	46	51.5	12.33	0.94	33.41	-	-	Peak
407.515	28.81	-17.19	46	44.92	16.03	1.15	33.29	-	-	Peak
866.088	31.55	-14.45	46	42.04	20.48	1.66	32.63	-	-	Peak
2480	99.81	-	-	96.16	33.01	2.15	31.51	100	231	Average
2480	100.66	-	-	97.01	33.01	2.15	31.51	100	231	Peak
4960	47.98	-26.02	74	41.15	35.19	3.15	31.51	120	144	Peak
7440	43.83	-30.17	74	35.32	36.26	3.17	30.92	100	24	Peak

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009 and ANSI C63.4-2003 test site requirement.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.6.4 Test Setup

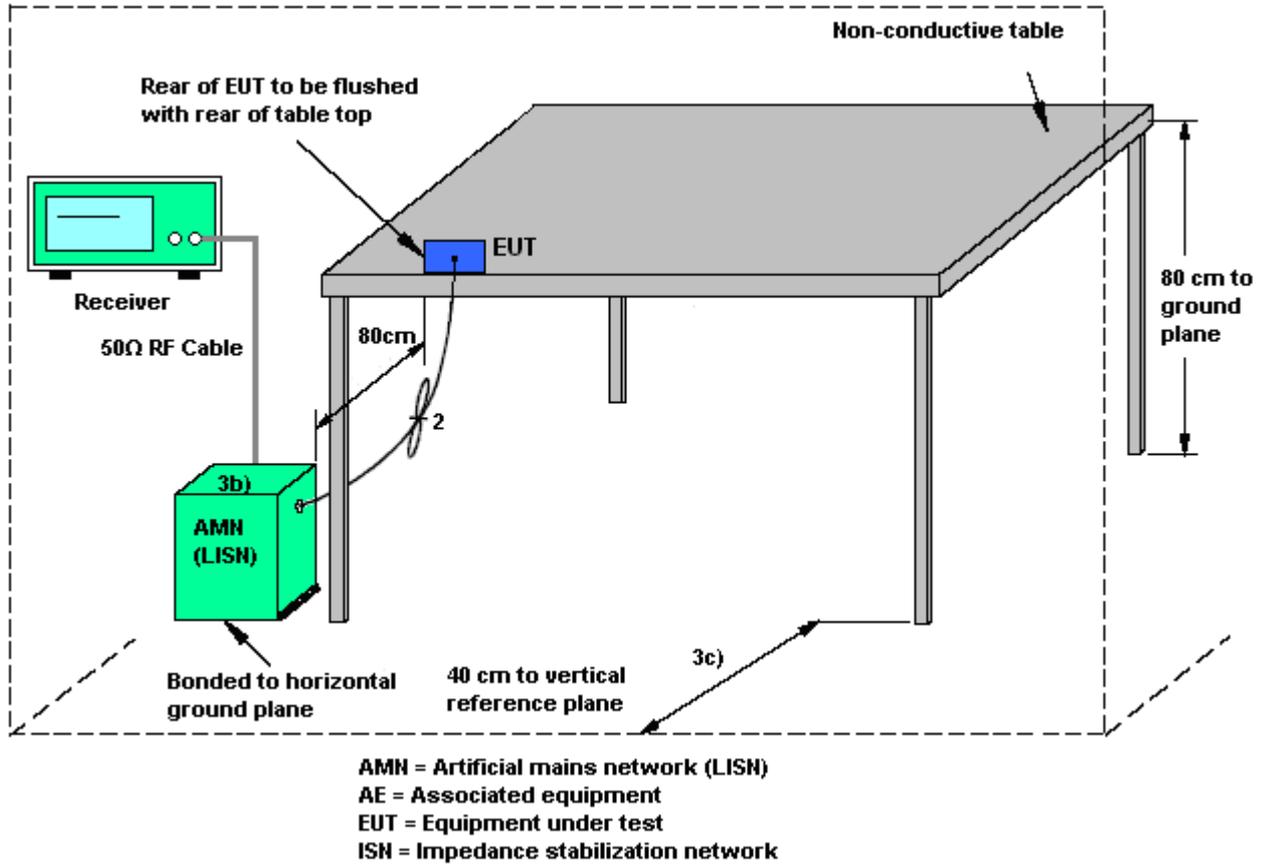



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

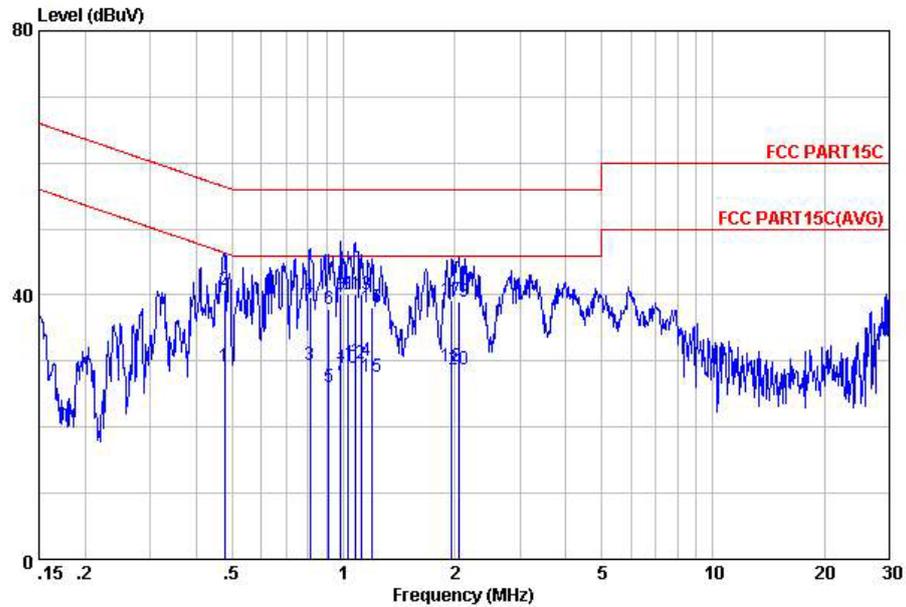


Site : CO01-KS  
 Condition: FCC PART15C LISN-111230 LINE  
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.48	29.17	-17.24	46.41	19.00	-0.08	10.25	Average
2	0.48	40.87	-15.54	56.41	30.70	-0.08	10.25	QP
3	0.81	29.38	-16.62	46.00	19.19	-0.09	10.28	Average
4	0.81	39.68	-16.32	56.00	29.49	-0.09	10.28	QP
5	0.91	26.08	-19.92	46.00	15.90	-0.10	10.28	Average
6	0.91	37.98	-18.02	56.00	27.80	-0.10	10.28	QP
7	0.98	27.88	-18.12	46.00	17.70	-0.10	10.28	Average
8	0.98	40.08	-15.92	56.00	29.90	-0.10	10.28	QP
9	1.03	40.18	-15.82	56.00	30.00	-0.10	10.28	QP
10	1.03	29.08	-16.92	46.00	18.90	-0.10	10.28	Average
11	1.08	40.18	-15.82	56.00	30.00	-0.10	10.28	QP
12	1.08	29.58	-16.42	46.00	19.40	-0.10	10.28	Average
13	1.12	40.08	-15.92	56.00	29.90	-0.10	10.28	QP
14	1.12	30.08	-15.92	46.00	19.90	-0.10	10.28	Average
15	1.19	27.68	-18.32	46.00	17.50	-0.10	10.28	Average
16	1.19	38.18	-17.82	56.00	28.00	-0.10	10.28	QP
17	1.96	39.29	-16.71	56.00	29.10	-0.11	10.30	QP
18	1.96	29.19	-16.81	46.00	19.00	-0.11	10.30	Average
19	2.05	38.89	-17.11	56.00	28.70	-0.11	10.30	QP
20	2.05	28.79	-17.21	46.00	18.60	-0.11	10.30	Average



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

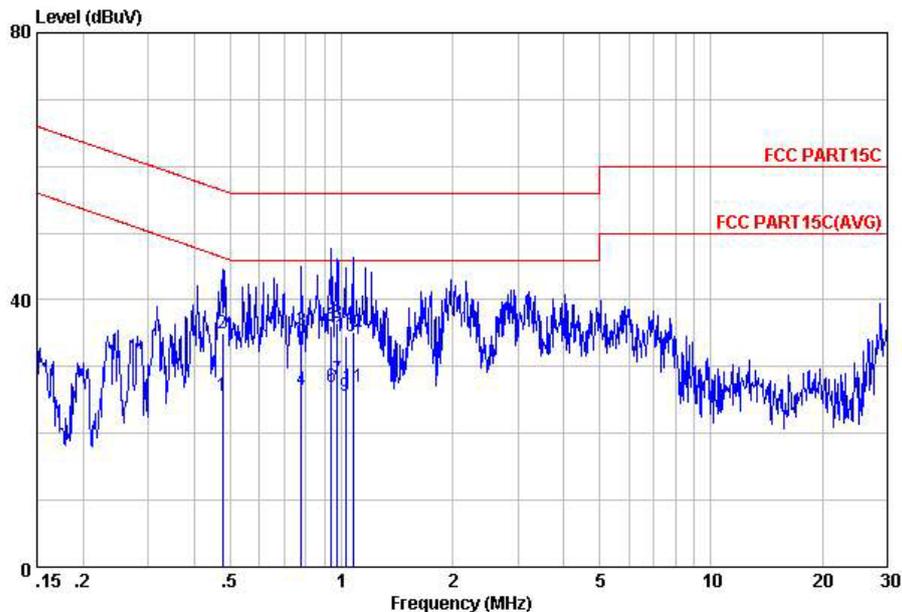

Site : C001-KS  
 Condition: FCC PART15C LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.48	25.57	-20.84	46.41	15.40	-0.08	10.25	Average
2	0.48	34.97	-21.44	56.41	24.80	-0.08	10.25	QP
3	0.78	35.49	-20.51	56.00	25.30	-0.08	10.27	QP
4	0.78	26.59	-19.41	46.00	16.40	-0.08	10.27	Average
5	0.94	35.99	-20.01	56.00	25.80	-0.09	10.28	QP
6	0.94	26.89	-19.11	46.00	16.70	-0.09	10.28	Average
7	0.97	27.99	-18.01	46.00	17.80	-0.09	10.28	Average
8	0.97	36.49	-19.51	56.00	26.30	-0.09	10.28	QP
9	1.03	25.69	-20.31	46.00	15.50	-0.09	10.28	Average
10	1.03	34.59	-21.41	56.00	24.40	-0.09	10.28	QP
11	1.08	26.99	-19.01	46.00	16.80	-0.09	10.28	Average
12	1.08	35.19	-20.81	56.00	25.00	-0.09	10.28	QP



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Mar. 06, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Mar. 06, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Mar. 06, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Mar. 06, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Mar. 06, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Mar. 18, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Mar. 18, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Mar. 18, 2013	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	Mar. 18, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Mar. 18, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Mar. 18, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Mar. 18, 2013	Nov. 14, 2013	Conduction (CO01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP312802 as below.