


Internal photos

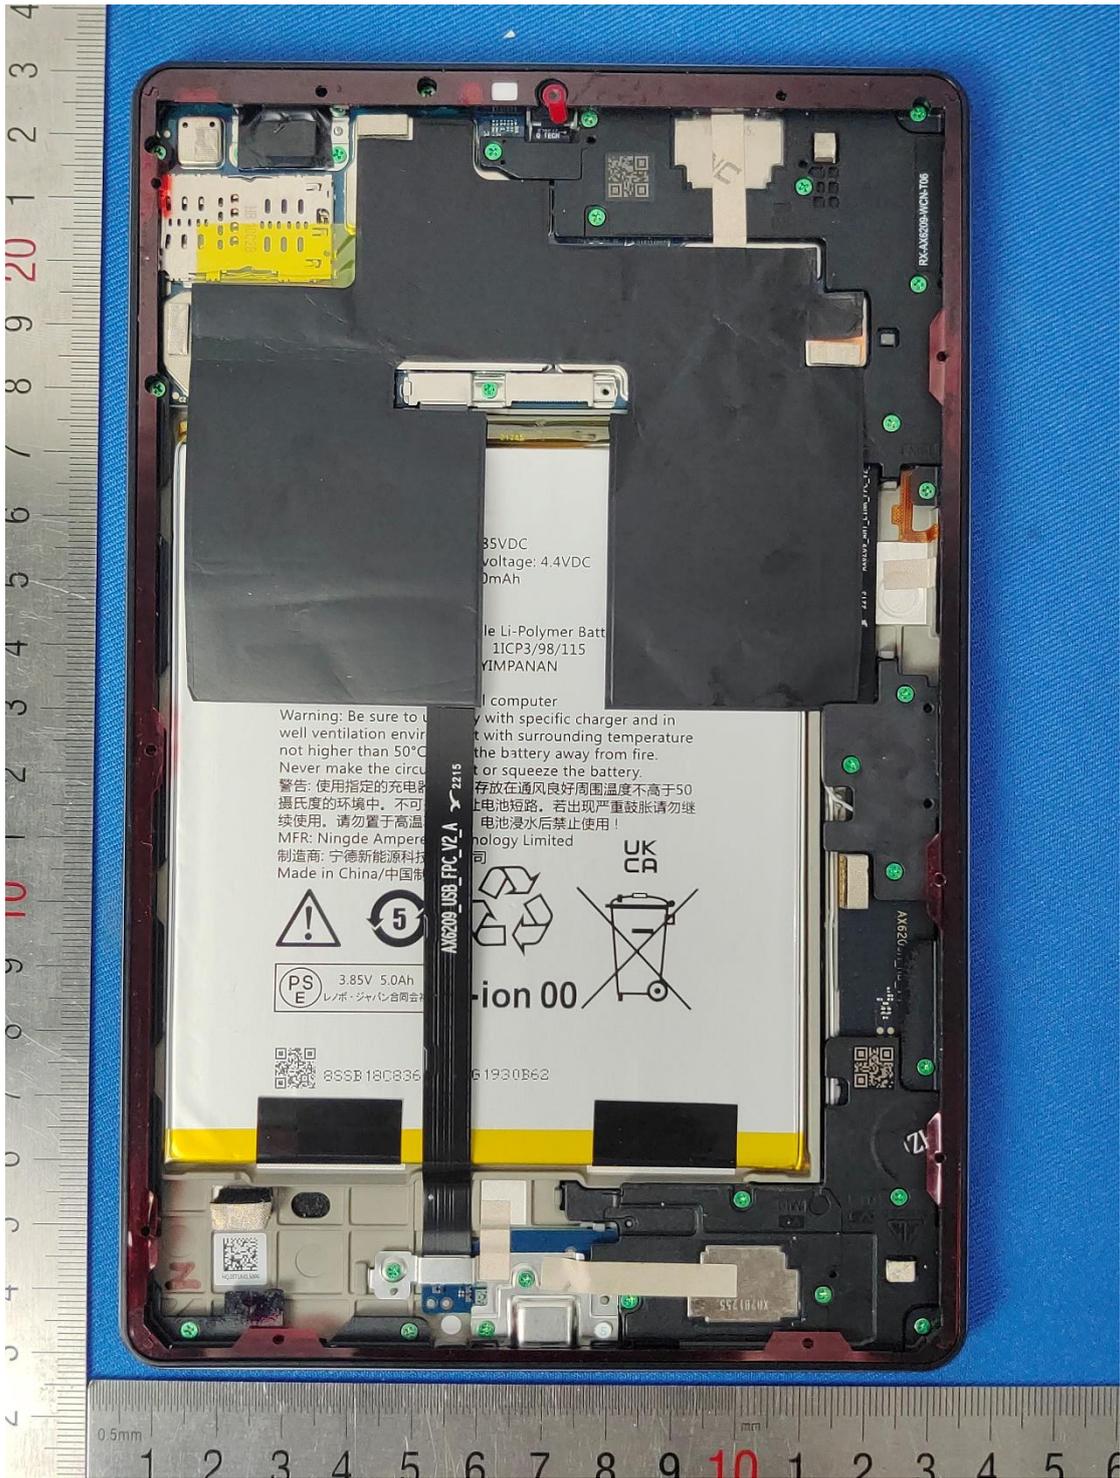

3.85VDC
Voltage: 4.4VDC
500mAh
Li-Polymer Batt
11CP3/98/115
YIMPANAN

Warning: Be sure to use only with specific charger and in well ventilation environment with surrounding temperature not higher than 50°C. Never make the circuit short or squeeze the battery.
警告: 使用指定的充电器, 存放在通风良好周围温度不高于50摄氏度的环境中。不可使电池短路。若出现严重鼓胀请勿继续使用。请勿置于高温环境, 电池浸水后禁止使用!
MFR: Ningde Ampere Technology Limited
制造商: 宁德新能源科技有限公司
Made in China/中国制造

AXC209_USB_FPC_V2_A 2215
PS E 3.85V 5.0Ah
レボ・ジャパン合同会社
ion 00
Recycling symbols and disposal instructions.

855B18C836 61930B62

0.5mm mm

