



**CFR 47 FCC PART 15 SUBPART E
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

Notebook Computer

MODEL NUMBER: Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API

FCC ID: O57IPS540A13

IC: 10407A-IPS540A13

REPORT NUMBER: 4789547060-7

ISSUE DATE: August 21, 2020

Prepared for

**Lenovo(Shanghai) Electronics Technology Co., Ltd.
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free
Trade Zone, 200131, CHINA**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-
Tech Development Zone Dongguan, 523808, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	08/21/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6dB/26dB Bandwidth	FCC 15.407 (a)&(e) RSS-247 Clause 6.2	PASS
2	99% Occupied Bandwidth	RSS-Gen Clause 6.6	PASS
3	Maximum Conducted Output Power	FCC 15.407 (a) RSS-247 Clause 6.2	PASS
4	Power Spectral Density	FCC 15.407 (a) RSS-247 Clause 6.2	PASS
5	Radiated Bandedge and Spurious Emission	FCC 15.407 (b) FCC 15.209 FCC 15.205 RSS-247 Clause 6.2 RSS-GEN Clause 8.9	PASS
6	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	PASS
7	Frequency Stability	FCC 15.407 (g)	PASS
8	Dynamic Frequency Selection	FCC 15.407 (h) RSS-247 Clause 6.3	PASS
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C >< ISED RSS-247 > when <Accuracy Method> decision rule is applied.</p>			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>9</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>9</i>
5. EQUIPMENT UNDER TEST	10
5.1. <i>DESCRIPTION OF EUT</i>	<i>10</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>11</i>
5.3. <i>CHANNEL LIST</i>	<i>12</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>14</i>
5.5. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>16</i>
5.6. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>18</i>
5.7. <i>THE WORSE CASE CONFIGURATIONS</i>	<i>20</i>
5.8. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>22</i>
6. MEASURING INSTRUMENT AND SOFTWARE USED	23
7. ANTENNA PORT TEST RESULTS	25
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>25</i>
7.2. <i>6/26 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>26</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>28</i>
7.4. <i>POWER SPECTRAL DENSITY</i>	<i>33</i>
8. RADIATED TEST RESULTS.....	35
8.1. <i>802.11a SISO MODE.....</i>	<i>42</i>
8.1.1. <i>UNII-1 BAND</i>	<i>42</i>
8.1.2. <i>UNII-2A BAND</i>	<i>62</i>
8.1.3. <i>UNII-2C BAND.....</i>	<i>78</i>
8.1.4. <i>UNII-3 BAND</i>	<i>96</i>
8.2. <i>802.11n HT20 CDD MIMO MODE</i>	<i>112</i>
8.2.1. <i>UNII-1 BAND</i>	<i>112</i>
8.2.2. <i>UNII-2A BAND</i>	<i>132</i>
8.2.3. <i>UNII-2C BAND.....</i>	<i>148</i>
8.2.4. <i>UNII-3 BAND</i>	<i>166</i>
8.3. <i>802.11n HT40 CDD MIMO MODE</i>	<i>182</i>
8.3.1. <i>UNII-1 BAND</i>	<i>182</i>
8.3.2. <i>UNII-2A BAND</i>	<i>198</i>



8.3.3.	UNII-2C BAND.....	210
8.3.4.	UNII-3 BAND	228
8.4.	802.11ac VHT80 CDD MIMO MODE	240
8.4.1.	UNII-1 BAND	240
8.4.2.	UNII-2A BAND	248
8.4.3.	UNII-2C BAND.....	256
8.4.4.	UNII-3 BAND	270
8.5.	802.11ac VHT160 CDD MIMO MODE	276
8.5.1.	UNII-1 BAND	276
8.5.2.	UNII-2C BAND.....	284
8.6.	SPURIOUS EMISSIONS FOR SIMULTANEOUS TRANSMISSION	292
8.6.1.	BT GFSK MODE AND 802.11a SISO MODE.....	292
8.7.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	300
8.7.1.	802.11a SISO MODE.....	300
8.8.	SPURIOUS EMISSIONS (26 GHz ~ 40 GHz).....	302
8.8.1.	802.11a SISO MODE.....	302
8.9.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz).....	304
8.9.1.	802.11a SISO MODE.....	304
8.10.	SPURIOUS EMISSIONS BELOW 30 MHz.....	306
8.10.1.	802.11a SISO MODE	306
9.	AC POWER LINE CONDUCTED EMISSIONS	309
9.1.	802.11a SISO MODE.....	310
10.	FREQUENCY STABILITY.....	312
11.	DYNAMIC FREQUENCY SELECTION	314
12.	ANTENNA REQUIREMENTS	318
	<i>Appendix A1: 26dB Emission Bandwidth</i>	<i>319</i>
	Test Result.....	319
	Test Graphs	320
	<i>Appendix A2: UNII Band-1 Unwanted Emissions.....</i>	<i>340</i>
	Test Graphs.....	340
	<i>Appendix A3: Occupied channel bandwidth.....</i>	<i>342</i>
	Test Result.....	342
	Test Graphs	343
	<i>Appendix A4: 6dB Minimum Emission Bandwidth.....</i>	<i>363</i>
	Test Result.....	363
	Test Graphs	364
	<i>Appendix B: Maximum Power Spectral Density.....</i>	<i>369</i>
	Test Result.....	369
	Test Graphs	371
	<i>Appendix C: Duty Cycle.....</i>	<i>405</i>
	Test Result.....	405



Test Graphs	406
<i>Appendix D: Frequency Stability</i>	409
Test Result.....	409
<i>Appendix E: Dynamic Frequency Selection</i>	410
Test Result.....	410
Test Graphs	411



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address: Section 304-305, Building No. 4, # 222, Meiyue Road, China
(Shanghai) Pilot Free Trade Zone, 200131, CHINA

Manufacturer Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address: Section 304-305, Building No. 4, # 222, Meiyue Road, China
(Shanghai) Pilot Free Trade Zone, 200131, CHINA

EUT Information

EUT Name: Notebook Computer
Model: Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API
Brand: Lenovo
Serial Model: Please refer to clause 5.1. Description of EUT
Sample Received Date: June 15, 2020
Sample Status: Normal
Date of Tested: July 3, 2020 ~ August 21, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Denny Huang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, CFR 47 FCC Part 2, CFR 47 FCC Part 15, KDB 789033 D02 v02r01, RSS-GEN Issue 5, RSS-247 Issue 2, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02 and KDB 905462 D04 Operational Modes for DFS Testing New Rules v01.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction Emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1G Hz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.64 dB (26 GHz-40 GHz)
Emission Bandwidth DTS Bandwidth 99% Occupied Bandwidth	±0.0196 %
Conducted Output Power	±0.766 dB
Conducted Power Spectral Density	±1.22 dB
Conducted Band edge Measurements	±1.328 dB
Conducted Spurious Emissions	±0.746 dB (9 kHz ~ 1 GHz) ±1.328 dB (1 GHz ~ 26 GHz)
Frequency Stability	±2.76 %
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Notebook Computer
Model	Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API
Series Model	Lenovo IdeaPad S540-13API
Model Difference	Lenovo IdeaPad S540-13API have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with Lenovo IdeaPad S540-13ARE. The difference lies only on the difference AMD platform's CPU and model name. all these changes do not degrade the RF performance of the certified product.
Radio Technology	WLAN (IEEE 802.11a/n HT20/n HT40/ac VHT20/VHT 40/VHT 80/VHT 160)
Operation frequency	UNII-1: 5150-5250 MHz UNII-2A: 5250-5350 MHz UNII-2C: 5470-5725 MHz UNII-3: 5725-5850 MHz
Modulation	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT40: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT80: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT160: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Battery	DC 11.55 V/4680 mAh/54 Wh
FVIN	V1.0
PMN	Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API
HVIN	Lenovo IdeaPad S540-13ARE, Lenovo IdeaPad S540-13API
EUT Serial Number	1385599200003

**5.2. MAXIMUM OUTPUT POWER****UNII-1 BAND**

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)	Max Average EIRP (dBm)
a	5150 ~ 5250	16.87	19.40
n HT20		15.37	20.54
n HT40		17.26	22.43
ac VHT20		15.25	20.42
ac VHT40		17.09	22.26
ac VHT80		17.24	22.42
ac VHT160		17.08	22.25

UNII-2A BAND

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5250 ~ 5350	16.85
n HT20		18.92
n HT40		18.97
ac VHT20		18.81
ac VHT40		18.74
ac VHT80		18.98

UNII-2C BAND

IEEE Std. 802.11	Frequency (MHz)	Max Power (dBm)
a	5470 ~ 5725	15.22
n HT20		17.44
n HT40		17.85
ac VHT20		17.27
ac VHT40		17.50
ac VHT80		17.68
ac VHT160		17.75

UNII-3 BAND

IEEE Std. 802.11	Frequency (MHz)	Max Power (dBm)
a	5725 ~ 5850	15.38
n HT20		17.65
n HT40		17.72
ac VHT20		17.47
ac VHT40		17.51
ac VHT80		17.43



5.3. CHANNEL LIST

UNII-1 (For Bandwidth=20 MHz)		UNII-1 (For Bandwidth=40 MHz)		UNII-1 (For Bandwidth=80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-1 (For Bandwidth=160 MHz)	
Channel	Frequency (MHz)
50	5250

UNII-2A (For Bandwidth=20 MHz)		UNII-2A (For Bandwidth=40 MHz)		UNII-2A (For Bandwidth=80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C (For Bandwidth=20 MHz)		UNII-2C (For Bandwidth=40 MHz)		UNII-2C (For Bandwidth=80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	/	/
112	5560	126	5630		
116	5580	134	5670		
120	5600	/	/		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
/	/				

UNII-2C (For Bandwidth=160 MHz)	
Channel	Frequency (MHz)
114	5570



UNII-3 (For Bandwidth=20 MHz)		UNII-3 (For Bandwidth=40 MHz)		UNII-3 (For Bandwidth=80 MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

Note: All channels in the 5600-5650MHz band was not operational in Canada.

**5.4. TEST CHANNEL CONFIGURATION**

UNII-1 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11n HT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT20	CH 36(Low Channel), CH 40(MID Channel), CH 48(High Channel)	5180 MHz, 5200 MHz, 5240 MHz
802.11ac VHT40	CH 38(Low Channel), CH 46(High Channel)	5190 MHz, 5230 MHz
802.11ac VHT80	CH 42(Low Channel)	5210 MHz
802.11ac VHT160	CH 50(Low Channel)	5250 MHz

UNII-2A Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11n HT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT20	CH 52(Low Channel), CH 56(MID Channel), CH 64(High Channel)	5260 MHz, 5280 MHz, 5320 MHz
802.11ac VHT40	CH 54(Low Channel), CH 62(High Channel)	5270 MHz, 5310 MHz
802.11ac VHT80	CH 58(Low Channel)	5290 MHz

UNII-2C Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 100(Low Channel), CH 120(MID Channel), CH 140(High Channel)	5500 MHz, 5600 MHz, 5700 MHz
802.11n VHT20	CH 100(Low Channel), CH 120(MID Channel), CH 140(High Channel)	5500 MHz, 5600 MHz, 5700 MHz
802.11n VHT40	CH 102(Low Channel), CH 118(MID Channel), CH 134(High Channel)	5510 MHz, 5590 MHz, 5670 MHz
802.11ac VHT20	CH 100(Low Channel), CH 120(MID Channel), CH 140(High Channel)	5500MHz, 5600 MHz, 5700MHz
802.11ac VHT40	CH 102(Low Channel), CH 118(MID Channel), CH 134(High Channel)	5510 MHz, 5590 MHz, 5670 MHz
802.11ac VHT80	CH 102(Low Channel), CH 122(High Channel)	5530 MHz, 5610 MHz
802.11ac VHT160	CH 114(Low Channel)	5570 MHz



UNII-3 Test Channel Configuration		
IEEE Std.	Test Channel Number	Frequency
802.11a	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11n HT40	CH 151(Low Channel), CH 159(High Channel)	5755MHz, 5795MHz
802.11ac VHT20	CH 149(Low Channel), CH 157(MID Channel), CH 165(High Channel)	5745 MHz, 5785 MHz, 5825 MHz
802.11ac VHT40	CH 151(Low Channel), CH 159(High Channel)	5755 MHz, 5795 MHz
802.11ac VHT80	CH 155(Low Channel)	5775 MHz



5.5. DESCRIPTION OF AVAILABLE ANTENNAS

SPEEDWIRE(SPD) Antenna

Antenna	Frequency Band	Antenna Type	Maximum Antenna Gain	Directional Gain (dBi)	
			(dBi)	CDD Mode	STBC Mode
Tx1	UNII-1	PIFA	1.78	5.17	3.81
Tx2	UNII-1	PIFA	2.53		
Tx1	UNII-2A	PIFA	1.78	5.17	3.81
Tx2	UNII-2A	PIFA	2.53		
Tx1	UNII-2C	PIFA	2.81	5.75	4.52
Tx2	UNII-2C	PIFA	2.67		
Tx1	UNII-3	PIFA	2.97	5.83	4.63
Tx2	UNII-3	PIFA	2.67		

IEEE Std. 802.11	Transmit and Receive Mode	Description
a	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT80	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT160	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.

Note: 1. Only 802.11n HT20/HT40 and 802.11ac HT20/40/80/160 support MIMO mode.



ICT Antenna

Antenna	Frequency Band	Antenna Type	Maximum Antenna Gain	Directional Gain (dBi)	
			(dBi)	CDD Mode	STBC Mode
Tx1	UNII-1	PIFA	-0.06	2.52	1.43
Tx2	UNII-1	PIFA	-0.93		
Tx1	UNII-2A	PIFA	-0.06	2.52	1.43
Tx2	UNII-2A	PIFA	-0.93		
Tx1	UNII-2C	PIFA	-1.99	1.96	0.45
Tx2	UNII-2C	PIFA	-0.20		
Tx1	UNII-3	PIFA	-1.99	0.58	-0.5
Tx2	UNII-3	PIFA	-2.90		

IEEE Std. 802.11	Transmit and Receive Mode	Description
a	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
n HT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
n HT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT20	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT40	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT80	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.
ac VHT160	<input checked="" type="checkbox"/> 2TX, 2RX	ANT 1, 2 can be used as transmitting/receiving antenna.

Note: 1. Only 802.11n HT20/HT40 and 802.11ac HT20/40/80/160 support MIMO mode.

Note 1: The EUT have two kinds of antennas, one is called SPEEDWIRE antenna and the other one called ICT antenna.

Note 2: The EUT has two antennas, one is Tx1 which is the main antenna and the other one is Tx2 which is the auxiliary (AUX) antenna.

Note 3: CDD Mode Directional gain= $10 \log [(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$
STBC Mode Directional gain= $10 \log [(10^{G1/10} + 10^{G2/10}) / N_{ANT}]$

G_{ANT} : Average of the Antenna Gain

N_{ANT} : Antenna numbers

Note 4: The value of the antenna gain was declared by customer.

**5.6. THE WORSE CASE POWER SETTING PARAMETER**

The Worst Case Power Setting Parameter	
Test Software	DRTU, Version 11.1941.0-10270

UNII-1

IEEE Std. 802.11	Rate	Channel	Test Software Setting Value	
			ANT1	ANT2
a	6M	36	16	17
		40	16	17
		48	16	17
n HT20	MCS0	36	11.5	12.5
		40	11.5	12.5
		48	11.5	12.5
n HT40	MCS0	38	13	14
		46	13	14
ac VHT20	MCS0	36	11.5	12.5
		40	11.5	12.5
		48	11.5	12.5
ac VHT40	MCS0	38	13	14
		46	13	14
ac VHT80	MCS0	42	13	14
ac VHT160	MCS0	50	15.5	16

UNII-2A

IEEE Std. 802.11	Rate	Channel	Soft set value	
			ANT1	ANT2
a	6M	52	C	16.5
		60	16	16.5
		64	16	17
n HT20	MCS0	52	15.5	16
		60	15.5	16
		64	15.5	16
n HT40	MCS0	54	15	16
		62	15.5	16.5
ac VHT20	MCS0	52	15.5	16
		60	15.5	16
		64	15.5	16.5
ac VHT40	MCS0	54	15	16
		62	15.5	16.5
ac VHT80	MCS0	58	13	13.5

**UNII-2C**

IEEE Std. 802.11	Rate	Channel	Soft set value	
			ANT1	ANT2
a	6M	100	14	15
		120	14	15
		140	15	15.5
n HT20	MCS0	100	14	15
		120	14	15
		140	14.5	15
n HT40	MCS0	102	15	15.5
		118	15	15.5
		134	14	15
ac VHT20	MCS0	100	14	15
		120	14	15
		140	14.5	15
ac VHT40	MCS0	102	14	15
		118	14	15
		134	14	15
ac VHT80	MCS0	106	14	15
		122	14	15
ac VHT160	MCS0	114	14	15

UNII-3

IEEE Std. 802.11	Rate	Channel	Soft set value	
			ANT1	ANT2
a	6M	149	15	15.5
		157	14.5	15
		165	15	15.5
n HT20	MCS0	149	15	15.5
		157	15	15
		165	14.5	15
n HT40	MCS0	151	14.5	14.5
		159	14.5	14.5
ac VHT20	MCS0	149	15	15.5
		157	15	15
		165	14.5	15
ac VHT40	MCS0	151	14.5	14.5
		159	14.5	14.5
ac VHT80	MCS0	155	14.5	14.5

- Note: 1. STBC mode and CDD mode use the same power setting.
2. SPEEDWIRE(SPD) antenna and ICT antenna use the same power setting.

5.7. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.6.

Worst case Data Rates declared by the customer:

- IEEE 802.11a / SISO – BPSK / 6 Mbps
- IEEE 802.11n HT20 / SISO – BPSK / MCS0
- IEEE 802.11n HT40 / SISO – BPSK / MCS0
- IEEE 802.11n HT20 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11n HT40 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11ac VHT20 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11ac VHT40 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11ac VHT80 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11ac VHT160 / MIMO / 2Tx CDD – BPSK / MCS0
- IEEE 802.11n HT20 / MIMO / STBC – BPSK / MCS0
- IEEE 802.11n HT40 / MIMO / STBC – BPSK / MCS0
- IEEE 802.11ac VHT20 / MIMO / STBC – BPSK / MCS0
- IEEE 802.11ac VHT40 / MIMO / STBC – BPSK / MCS0
- IEEE 802.11ac VHT80 / MIMO / STBC – BPSK / MCS0
- IEEE 802.11ac VHT160 / MIMO / STBC – BPSK / MCS0

Since 802.11ac VHT20/VHT40 mode are different from 802.11n HT20/HT40 only in control messages, so all the tests (except conducted output power and power spectral density) were performed on the worst case (802.11n HT20/802.11n HT40) mode between these 4 modes and only the worst data was recorded in this report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Tx1 and Tx2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Duty cycle and 6dB/26dB DTS bandwidth/occupied channel bandwidth tests, only SISO mode and one chain were tested since the duty cycle and bandwidth does not change depending on chains used.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.



Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

STBC mode and CDD mode use the same power setting, only the worst data was recorded in the report.

Both SPEEDWIRE (SPD) antenna and ICT antenna were tested, but only the worst data was recorded in the report.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	FCC ID
1	Router	TP-Link	Archer AX11000	TE7AX11000

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC Input	Type C	/	/	/
2	USB	USB	/	/	/
3	Type C	Type C	/	/	/
4	AUX	AUX	/	/	/

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC ADAPTER	Lenovo	ADLX95YCC3A	Input: AC 100 ~ 240 V/1.6 A/50 ~ 60 Hz Output: DC 20 V, 4.75 A/ DC 15 V, 3 A/DC 5 V, 3 A

TEST SETUP


The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

For DFS Test:



For the other RF Test:



**6. MEASURING INSTRUMENT AND SOFTWARE USED**

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
Software						
Used	Description		Manufacturer	Name	Version	
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC	Ver. UL-3A1	
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-3	TRS-308-00002	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-	4	Dec.05,2019	Dec.05,2020



			2533.5-40SS			
<input checked="" type="checkbox"/>	High Pass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Cable	/	/	9879/44E A	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Cable	/	/	20160201 001	Dec.05,2019	Dec.05,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power sensor, Power Meter	R&S	OSP120	100921	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	DC power supply	Array	3662A	A1512015	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Power sensor, Power Meter	R&S	OSP120	100921	Mar.13,2020	Mar.13,2021
<input checked="" type="checkbox"/>	Vector Signal Generator	R&S	SMBV100A	261637	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMB100A	178553	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Signal Analyzer	R&S	FSV40	A1512015	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Attenuator	Weinschel	3M-10	T9692	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Cable	R&S	/	MY11565/4P E	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Cable	R&S	/	MY11566/4P E	Dec.06,2019	Dec.06,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for RF Conducted Test	Tonscend	JS1120-3 RF Test System	2.6.77.0518		
<input checked="" type="checkbox"/>	Test Software for DFS Test	R&S	EMC 32	10.60.10		

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

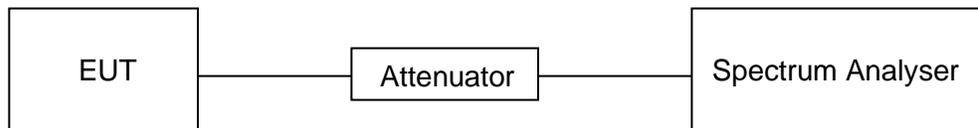

TEST ENVIRONMENT

Temperature	25.6 °C	Relative Humidity	59.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to appendix C.

7.2. 6/26 EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E ISED RSS-247 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC) 5470 ~ 5600 (For ISED) 5650 ~ 5725 (For ISED)
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825 (For ISED)

ISED RSS-247 6.2.1.2 clause unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \cdot \text{RBW}$ For 26 dB Bandwidth: $> \text{RBW}$ For 99 % Bandwidth: $> 3 \cdot \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

Calculation for 99% Bandwidth of UNII-2C and UNII-3 Straddle Channel:

For Example: Fundamental Frequency: 5720 MHz

99% OBW: 21.00 MHz

Turning Frequency: 5725 MHz

99% Bandwidth of UNII-2C Band Portion = $(5725 - (5720 - (21.00/2))) = 15.50$ MHz99% Bandwidth of UNII-3 Band Portion = $(5720 + (21.00/2) - 5725) = 5.50$ MHz**Calculation for 26dB Bandwidth of UNII-2C Straddle Channel:**

For Example: Fundamental frequency: 5720 MHz

26dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26dB Bandwidth of UNII-2C Band Portion = $5725 - 5710.16 = 14.84$ MHz**Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:**


For Example: Fundamental frequency: 5720 MHz

6dB BW: 16.44 MHz

FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

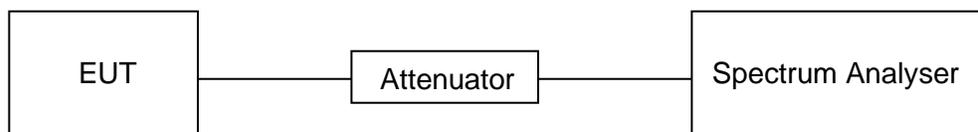6dB Bandwidth of UNII-3 band Portion = $5728.2 - 5725 = 3.2$ MHz**TEST SETUP****TEST ENVIRONMENT**

Temperature	25.6 °C	Relative Humidity	59.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to Appendix A1&A2&A3&A4.



7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

ISED RSS-247 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power or e.i.r.p.	The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or 10 + 10 log ₁₀ B, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz.	5150 ~ 5250
	a. The maximum conducted output power shall not exceed 250 mW (24dBm) or 11 + 10 log ₁₀ B dBm, whichever is less. b. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or 17 + 10 log ₁₀ B dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p.greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	Shall not exceed 1 W1 Watt (30 dBm). The e.i.r.p. shall not exceed 4 W	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep):

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times$ span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $<$ 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).


Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Straddle channel power was measured using spectrum analyzer.



TEST SETUP

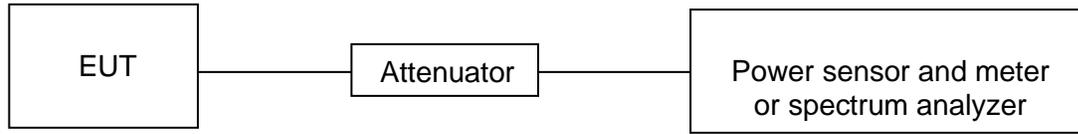

TEST ENVIRONMENT

Temperature	25.6 °C	Relative Humidity	59.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V



RESULTS

Mode	Frequency (MHz)	Average Conducted Output Power (dBm)			FCC Conducted Power Limit (dBm)	ISED Conducted Power Limit (dBm)	Average EIRP (dBm)			ISED EIRP Limit (dBm)
		ANT 1	ANT 2	Total			ANT 1	ANT 2	Total	
802.11a	5180	14.99	16.82	/	24.00	/	16.77	19.35	/	22.26
	5200	15.10	16.86	/	24.00	/	16.88	19.39	/	22.26
	5240	15.45	16.87	/	24.00	/	17.23	19.40	/	22.26
	5260	15.37	16.52	/	24.00	23.26	17.15	19.05	/	29.26
	5280	15.43	16.55	/	24.00	23.26	17.21	19.08	/	29.26
	5320	15.57	16.85	/	24.00	23.26	17.35	19.38	/	29.26
	5500	14.11	14.85	/	24.00	23.26	16.92	17.52	/	29.26
	5600	13.82	14.89	/	24.00	23.26	16.63	17.56	/	29.26
	5700	14.21	15.22	/	24.00	23.26	17.02	17.89	/	29.26
	5745	14.33	15.23	/	30.00	30.00	17.30	17.90	/	36.00
	5785	14.19	15.21	/	30.00	30.00	17.16	17.88	/	36.00
	5825	14.31	15.38	/	30.00	30.00	17.28	18.05	/	36.00
802.11n HT20	5180	11.84	12.75	15.33	24.00	/	/	/	20.50	22.54
	5200	11.54	12.74	15.19	24.00	/	/	/	20.37	22.54
	5240	11.62	12.99	15.37	24.00	/	/	/	20.54	22.54
	5260	15.11	16.18	18.69	24.00	23.54	/	/	23.86	29.54
	5280	15.24	16.11	18.71	24.00	23.54	/	/	23.88	29.54
	5320	15.46	16.31	18.92	24.00	23.54	/	/	24.09	29.54
	5500	14.04	14.79	17.44	24.00	23.54	/	/	23.19	29.54
	5600	14.04	14.75	17.42	24.00	23.54	/	/	23.17	29.54
	5700	14.01	14.70	17.38	24.00	23.54	/	/	23.13	29.54
	5745	14.02	15.19	17.65	30.00	30.00	/	/	23.49	36.00
	5785	14.21	14.89	17.57	30.00	30.00	/	/	23.41	36.00
	5825	14.05	14.92	17.52	30.00	30.00	/	/	23.35	36.00
802.11n HT40	5190	13.59	14.82	17.26	24.00	/	/	/	22.43	23.00
	5230	13.38	14.57	17.03	24.00	/	/	/	22.20	23.00
	5270	15.39	16.46	18.97	24.00	24.00	/	/	24.14	30.00
	5310	15.19	16.34	18.81	24.00	24.00	/	/	23.99	30.00
	5510	14.33	15.11	17.75	24.00	24.00	/	/	23.50	30.00
	5590	14.45	15.20	17.85	24.00	24.00	/	/	23.60	30.00
	5670	14.08	15.01	17.58	24.00	24.00	/	/	23.33	30.00
	5755	14.40	15.00	17.72	30.00	30.00	/	/	23.56	36.00
5795	14.27	14.93	17.62	30.00	30.00	/	/	23.45	36.00	



Mode	Frequency (MHz)	Average Conducted Output Power (dBm)			FCC Conducted Power Limit (dBm)	ISED Conducted Power Limit (dBm)	Average EIRP (dBm)			ISED Limit (dBm)
		ANT 1	ANT 2	Total			ANT 1	ANT 2	Total	
802.11ac HT20	5180	11.74	12.24	15.01	24.00	/	/	/	20.18	22.54
	5200	11.41	12.47	14.98	24.00	/	/	/	20.16	22.54
	5240	11.50	12.87	15.25	24.00	/	/	/	20.42	22.54
	5260	15.09	16.16	18.67	24.00	23.54	/	/	23.84	29.54
	5280	15.21	15.97	18.62	24.00	23.54	/	/	23.79	29.54
	5320	15.29	16.26	18.81	24.00	23.54	/	/	23.99	29.54
	5500	14.01	14.47	17.26	24.00	23.54	/	/	23.01	29.54
	5600	14.00	14.50	17.27	24.00	23.54	/	/	23.02	29.54
	5700	13.94	14.49	17.23	24.00	23.54	/	/	22.98	29.54
	5745	14.00	14.88	17.47	30.00	30.00	/	/	23.30	36.00
	5785	14.01	14.87	17.47	30.00	30.00	/	/	23.30	36.00
5825	14.04	14.81	17.45	30.00	30.00	/	/	23.28	36.00	
802.11ac HT40	5190	13.59	14.52	17.09	24.00	/	/	/	22.26	23.00
	5230	13.03	14.80	17.01	24.00	/	/	/	22.19	23.00
	5270	15.00	16.26	18.69	24.00	24.00	/	/	23.86	30.00
	5310	15.17	16.23	18.74	24.00	24.00	/	/	23.92	30.00
	5510	14.06	14.56	17.33	24.00	24.00	/	/	23.08	30.00
	5590	14.17	14.70	17.45	24.00	24.00	/	/	23.20	30.00
	5670	14.03	14.90	17.50	24.00	24.00	/	/	23.25	30.00
	5755	13.90	14.99	17.49	30.00	30.00	/	/	23.32	36.00
5795	14.06	14.89	17.51	30.00	30.00	/	/	23.34	36.00	
802.11ac HT80	5210	13.33	14.98	17.24	24.00	/	/	/	22.42	23.00
	5290	15.37	16.50	18.98	24.00	24.00	/	/	24.21	30.00
	5530	14.14	15.10	17.66	24.00	24.00	/	/	23.41	30.00
	5610	13.89	15.33	17.68	24.00	24.00	/	/	23.43	30.00
	5775	14.35	14.48	17.43	30.00	30.00	/	/	23.26	30.00
802.11ac HT160	5250	13.48	14.59	17.08	24.00	/	/	/	22.25	23.00
	5570	14.38	15.08	17.75	24.00	24.00	/	/	23.50	30.00

- Note: 1. 802.11a does not support MIMO mode.
 2. Average EIRP = Average Conducted Output Power + Antenna gain/Directional gain.
 3. The test results have already included the duty cycle correction factor. About correction Factor please refer to section 7.1.
 4. STBC mode and CDD mode use the same power setting, only the worst EIRP data was recorded in the report, for more about the antenna gain/directional gain, please refer to clause 5.5.



7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500 kHz	5725 ~ 5850

ISED RSS-247 ISSUE 2		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150 ~ 5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	30 dBm/500 kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyser and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow trace to fully stabilize and Use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz/500kHz reference bandwidth.

TEST SETUP

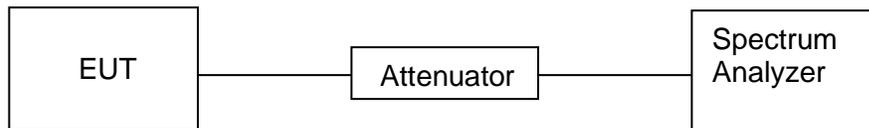

TEST ENVIRONMENT

Temperature	25.6 °C	Relative Humidity	59.8 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Please refer to Appendix B.

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-247 6.2.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz-1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.89475 - 16.89525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5480	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c




Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
<p>Note:</p> <p>*1 beyond 75 MHz or more above of the band edge.</p> <p>*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.</p> <p>*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.</p> <p>*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>		

TEST SETUP AND PROCEDURE

Below 30 MHz

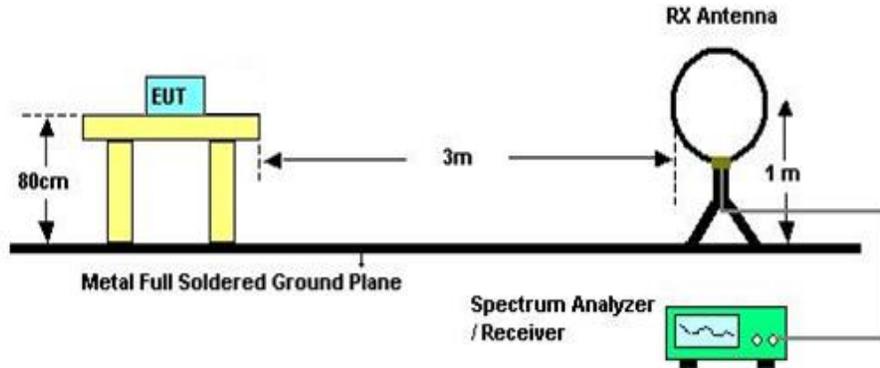


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15 MHz)/ 9kHz (From 0.15 MHz to 30 MHz)
VBW	200Hz (From 9kHz to 0.15 MHz)/ 9kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

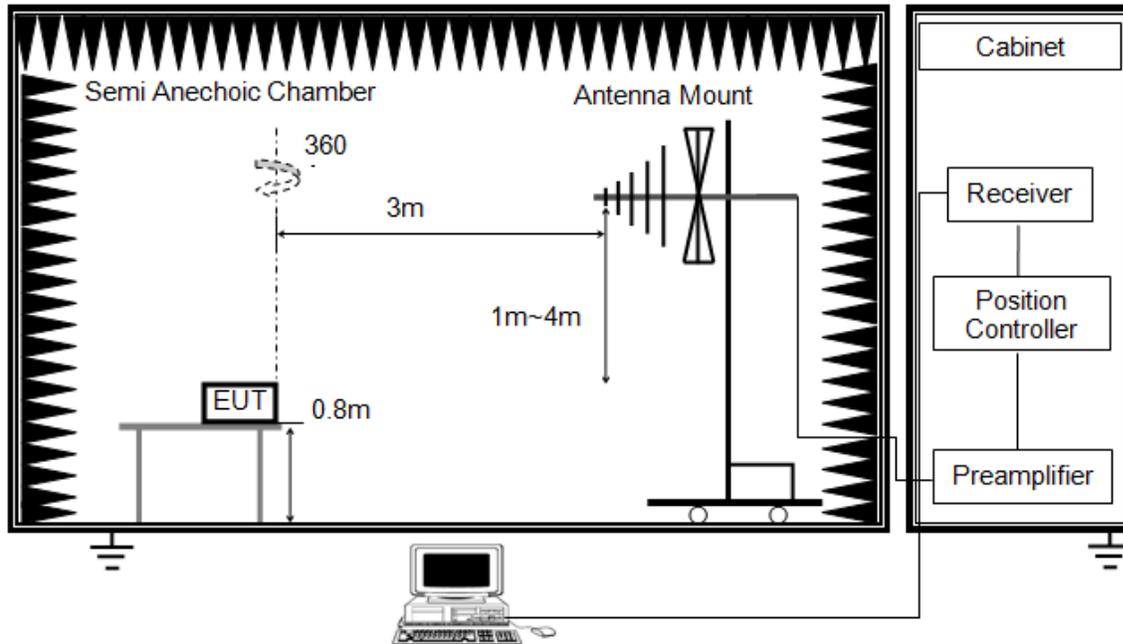


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 11.11.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

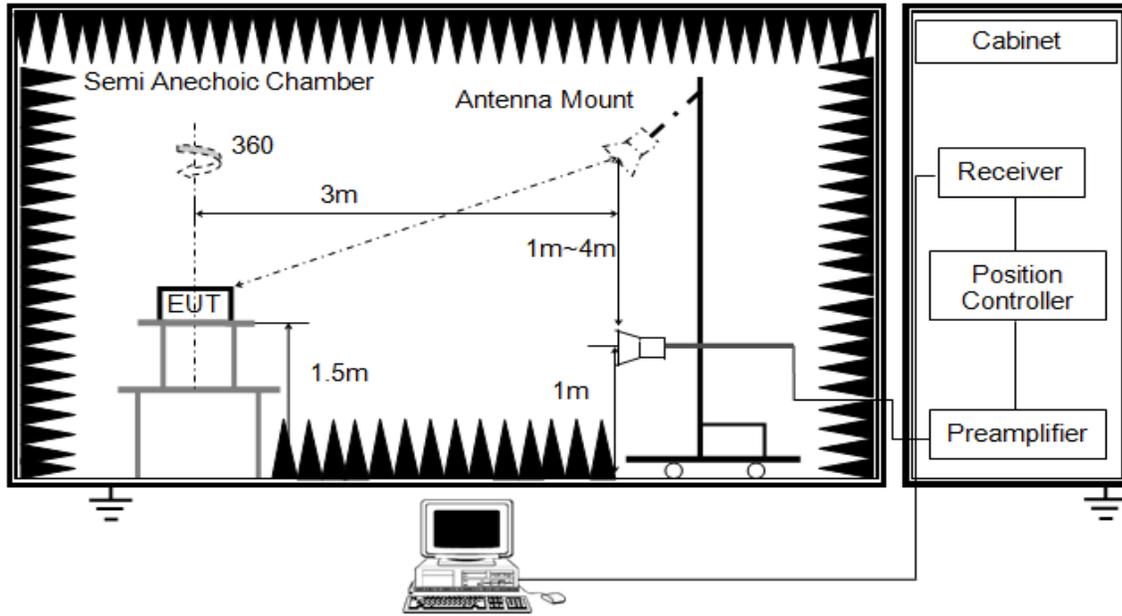

The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

TEST ENVIRONMENT



Temperature	25.2 °C	Relative Humidity	63 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 11.55 V

RESULTS

Note 1: Simultaneous transmission had been evaluated with the 5 GHz WiFi and BT/BLE transmitter and has no additional or worse emissions found. Only the worst data was recorded in the test report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

Note 3: Both SPEEDWIRE(SPD) antenna and ICT antenna were tested, but only the worst data (SPEEDWIRE(SPD) antenna) was recorded in the report.

Note 4: Both STBC and CDD modes had been tested, only the worst data was recorded in the report.


8.1. 802.11a SISO MODE

8.1.1. UNII-1 BAND

ANTENNA 2 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

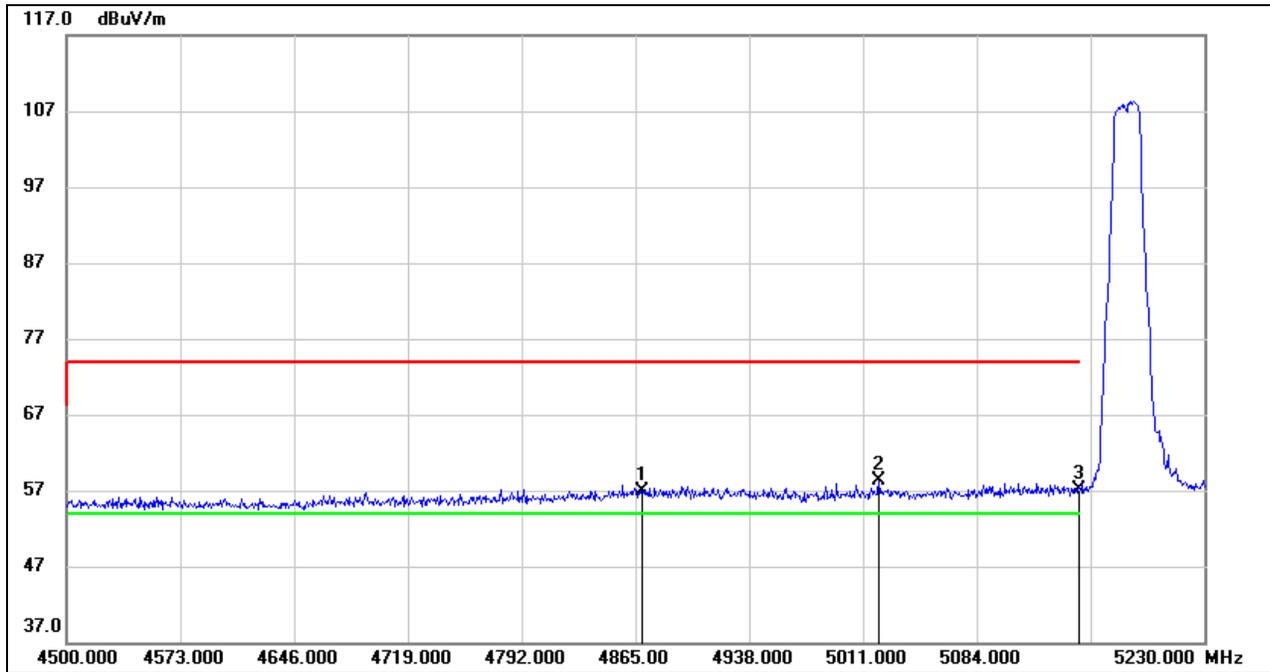

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4869.380	17.50	39.43	56.93	74.00	-17.07	peak
2	5021.220	18.17	40.10	58.27	74.00	-15.73	peak
3	5150.000	16.62	40.46	57.08	74.00	-16.92	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

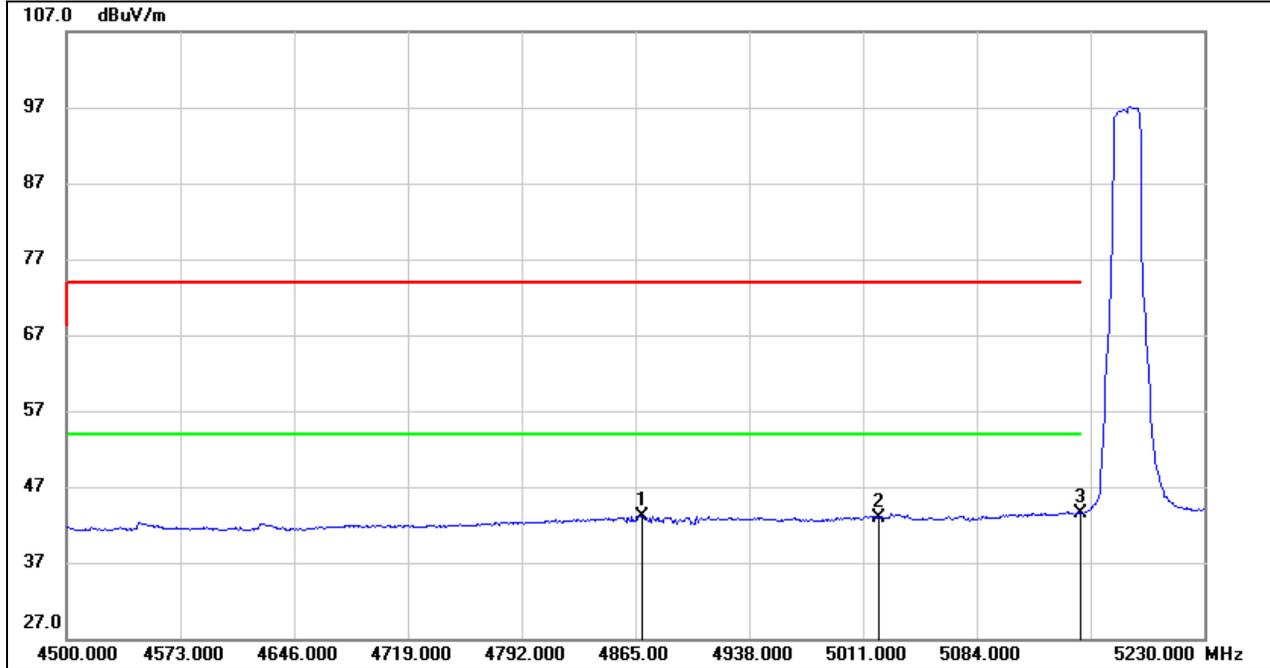


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4869.380	3.67	39.43	43.10	54.00	-10.90	AVG
2	5021.220	2.87	40.10	42.97	54.00	-11.03	AVG
3	5150.000	3.14	40.46	43.60	54.00	-10.40	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


PEAK

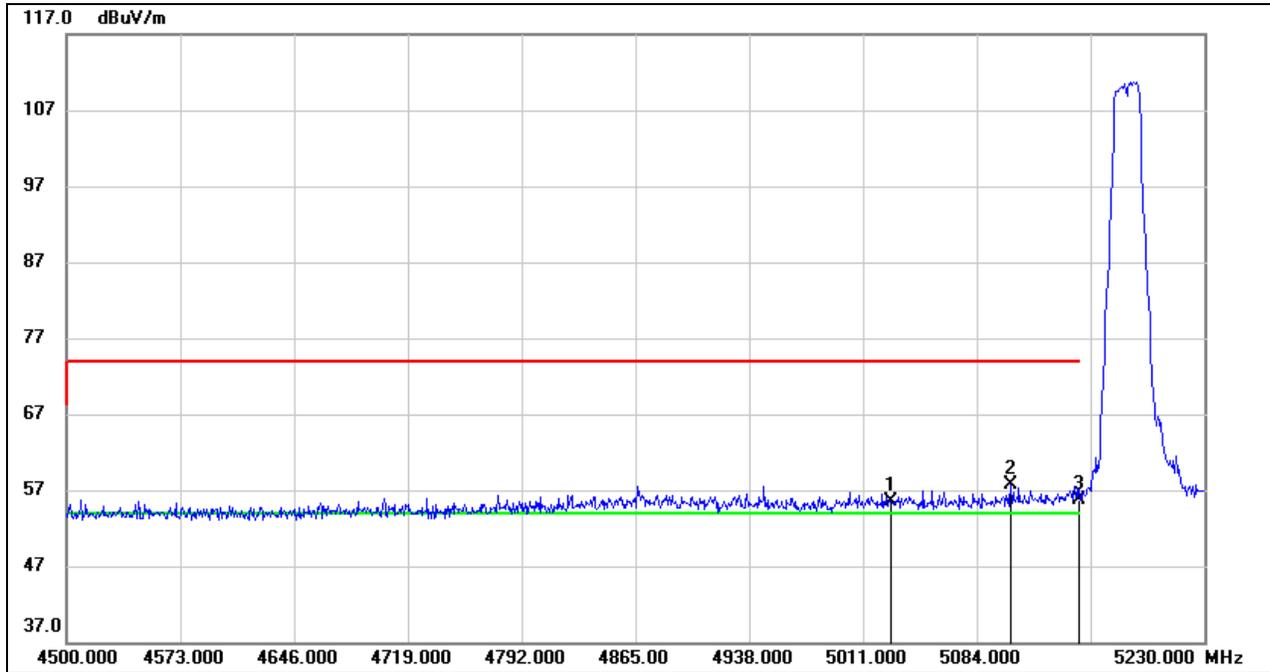

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5029.250	15.37	40.11	55.48	74.00	-18.52	peak
2	5105.900	17.39	40.22	57.61	74.00	-16.39	peak
3	5150.000	15.25	40.46	55.71	74.00	-18.29	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

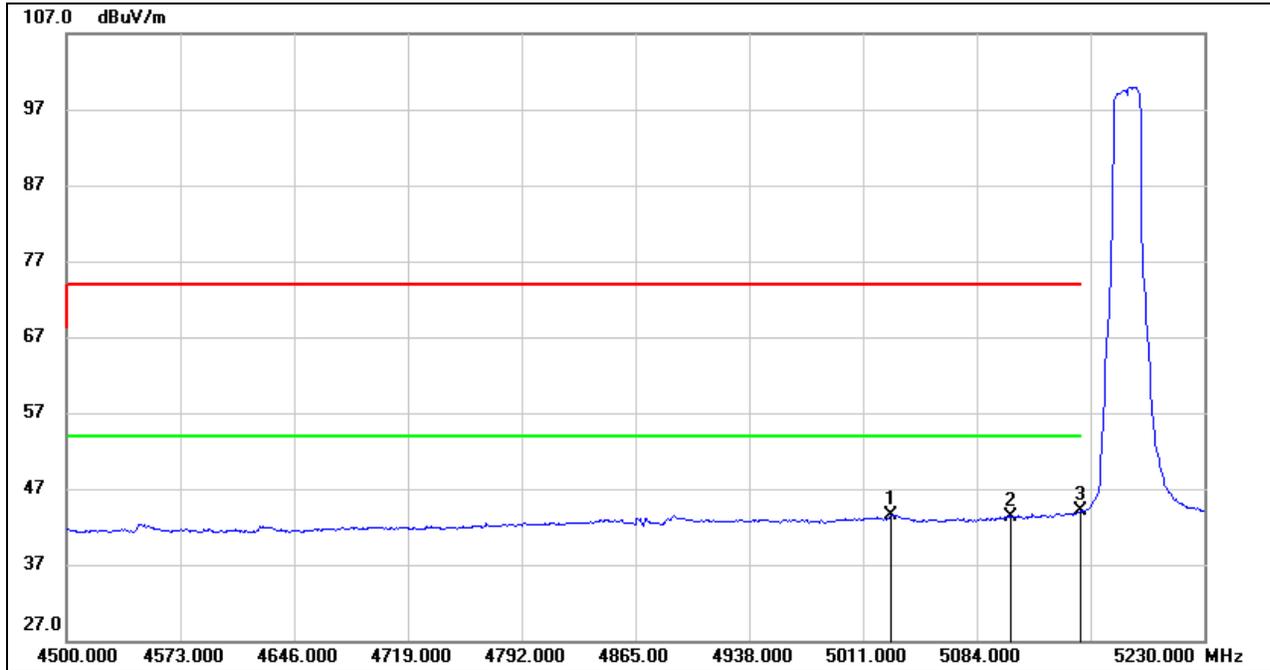


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5029.250	3.45	40.11	43.56	54.00	-10.44	AVG
2	5105.900	3.14	40.22	43.36	54.00	-10.64	AVG
3	5150.000	3.56	40.46	44.02	54.00	-9.98	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

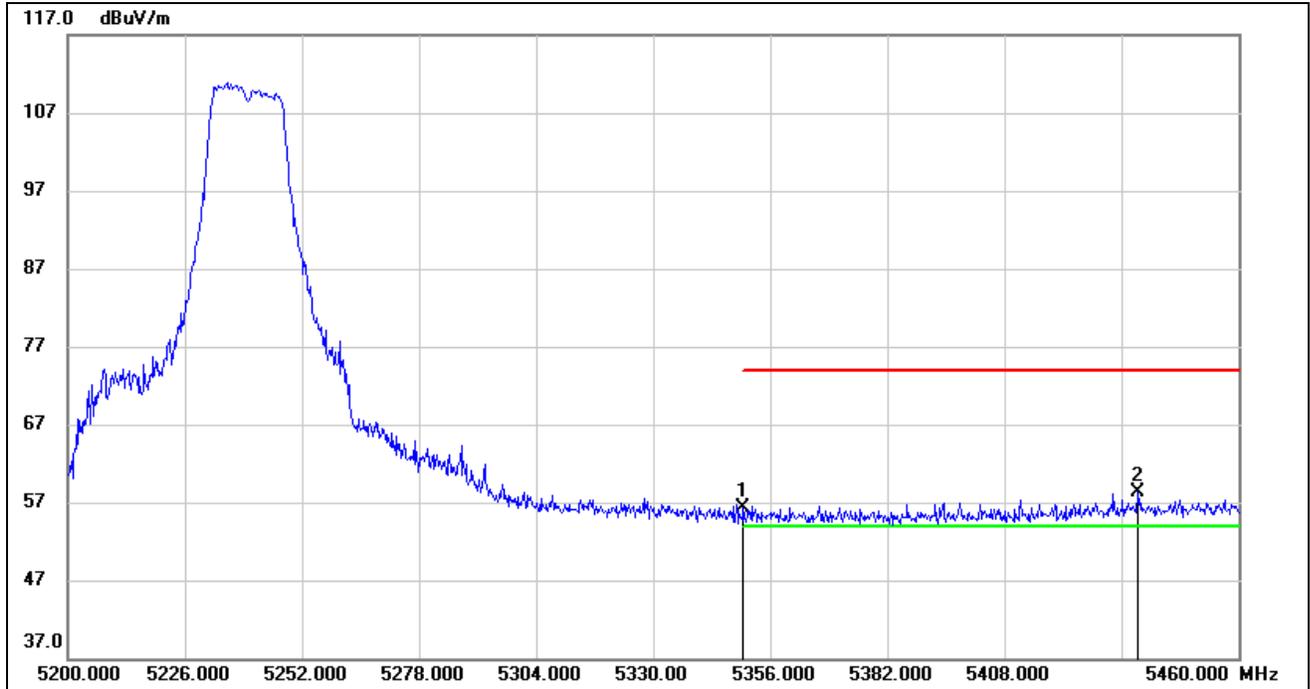


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.67	40.64	56.31	74.00	-17.69	5350.000
2	5437.640	17.39	41.00	58.39	74.00	-15.61	5437.640

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.




AVG

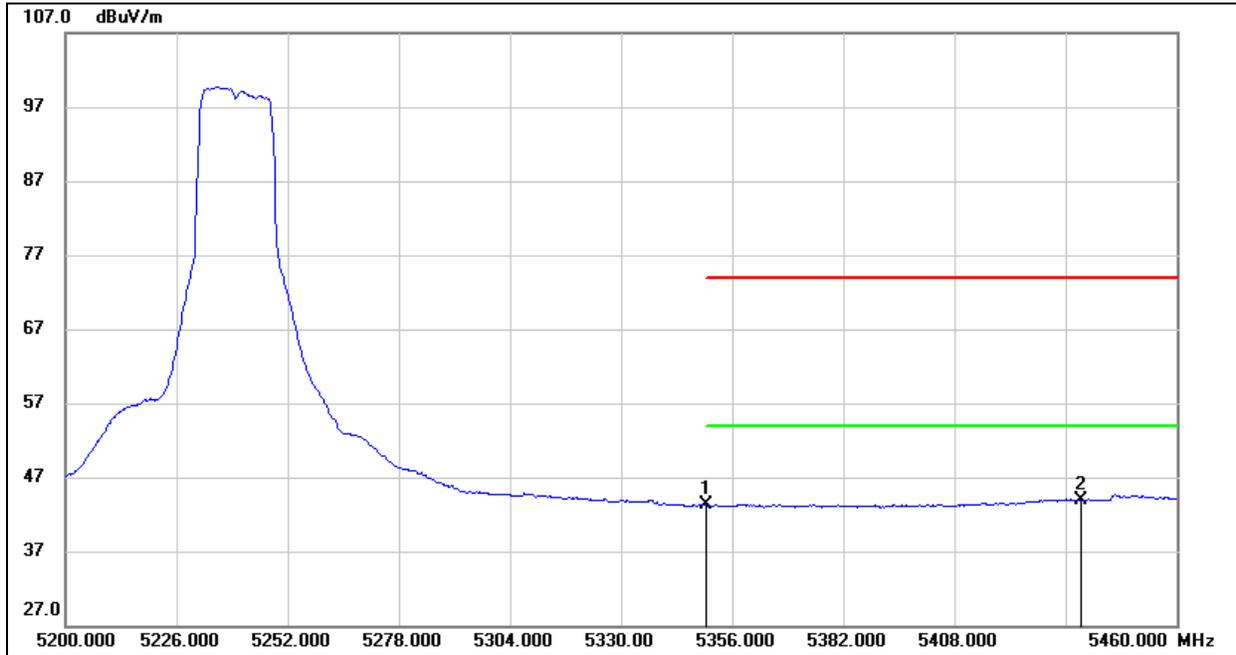

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	2.60	40.64	43.24	54.00	-10.76	AVG
2	5437.640	3.00	41.00	44.00	54.00	-10.00	AVG


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

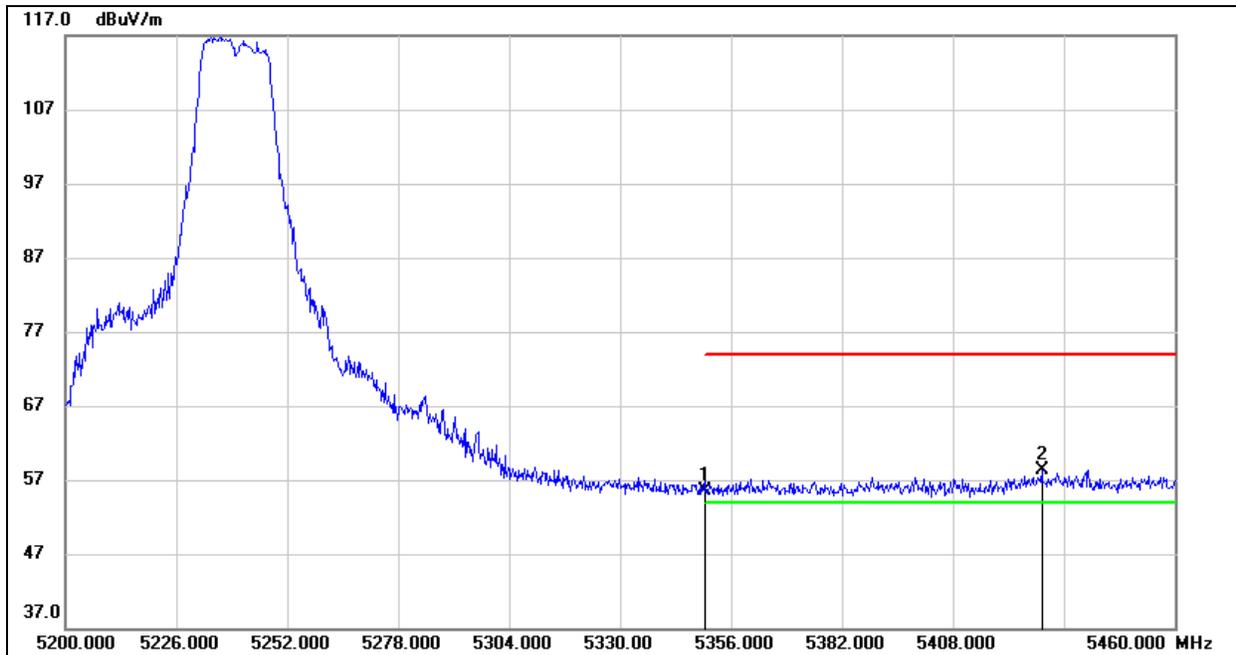**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	14.84	40.64	55.48	74.00	-18.52	5350.000
2	5428.800	17.36	40.88	58.24	74.00	-15.76	5428.800

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

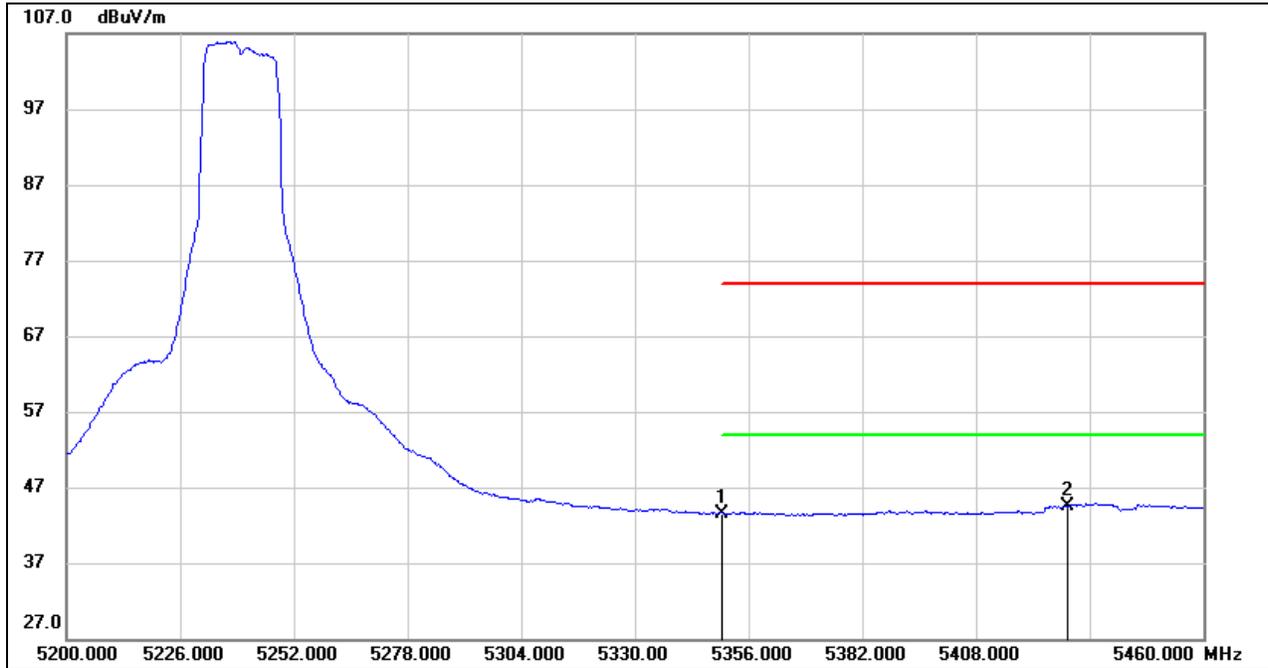


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	2.96	40.64	43.60	54.00	-10.40	AVG
2	5428.800	3.56	40.88	44.44	54.00	-9.56	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

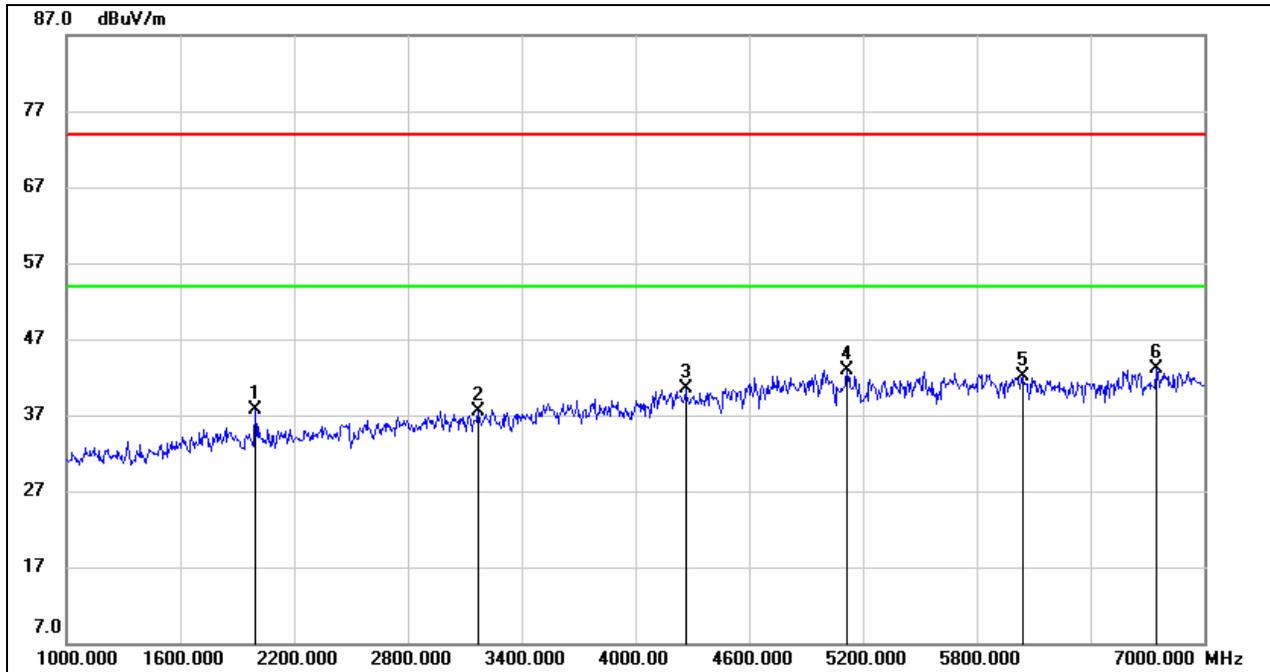

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1996.000	47.96	-10.24	37.72	74.00	-36.28	peak
2	3172.000	43.18	-5.72	37.46	74.00	-36.54	peak
3	4264.000	42.41	-1.84	40.57	74.00	-33.43	peak
4	5116.000	41.36	1.47	42.83	74.00	-31.17	peak
5	6040.000	39.52	2.57	42.09	74.00	-31.91	peak
6	6748.000	38.73	4.45	43.18	74.00	-30.82	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

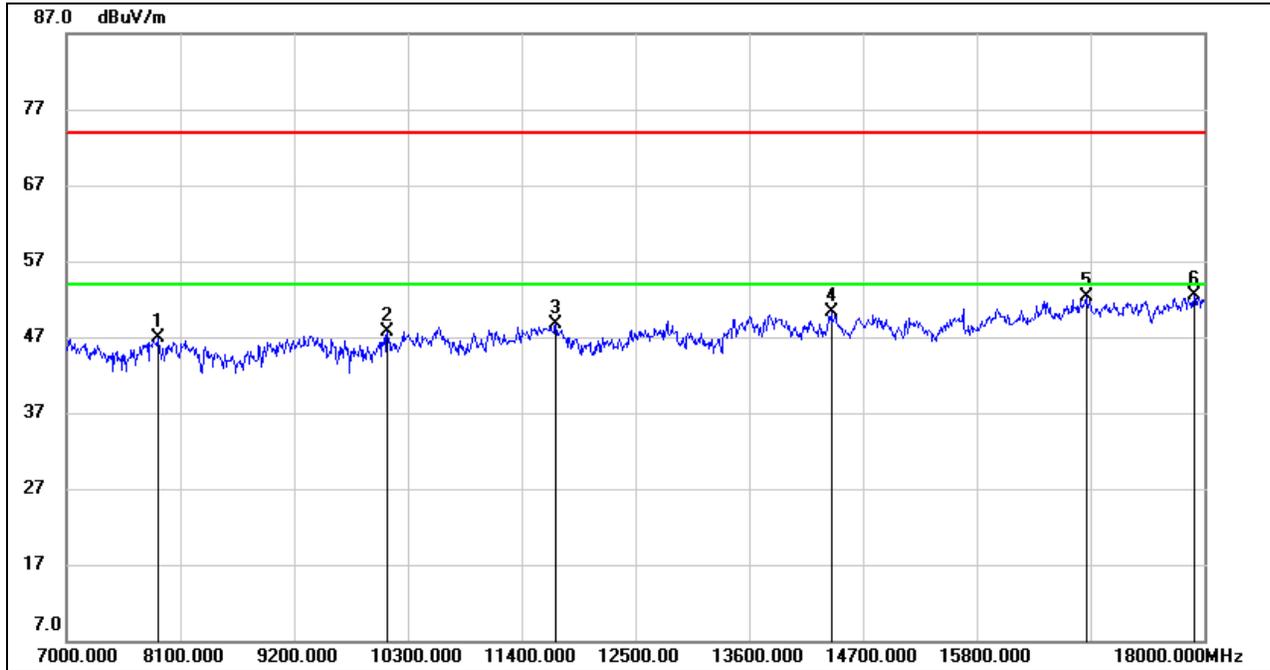


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.12	7.72	46.84	74.00	-27.16	peak
2	10102.000	37.00	10.78	47.78	74.00	-26.22	peak
3	11730.000	35.61	13.11	48.72	74.00	-25.28	peak
4	14392.000	33.70	16.65	50.35	74.00	-23.65	peak
5	16856.000	32.11	20.13	52.24	74.00	-21.76	peak
6	17901.000	29.06	23.40	52.46	74.00	-21.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

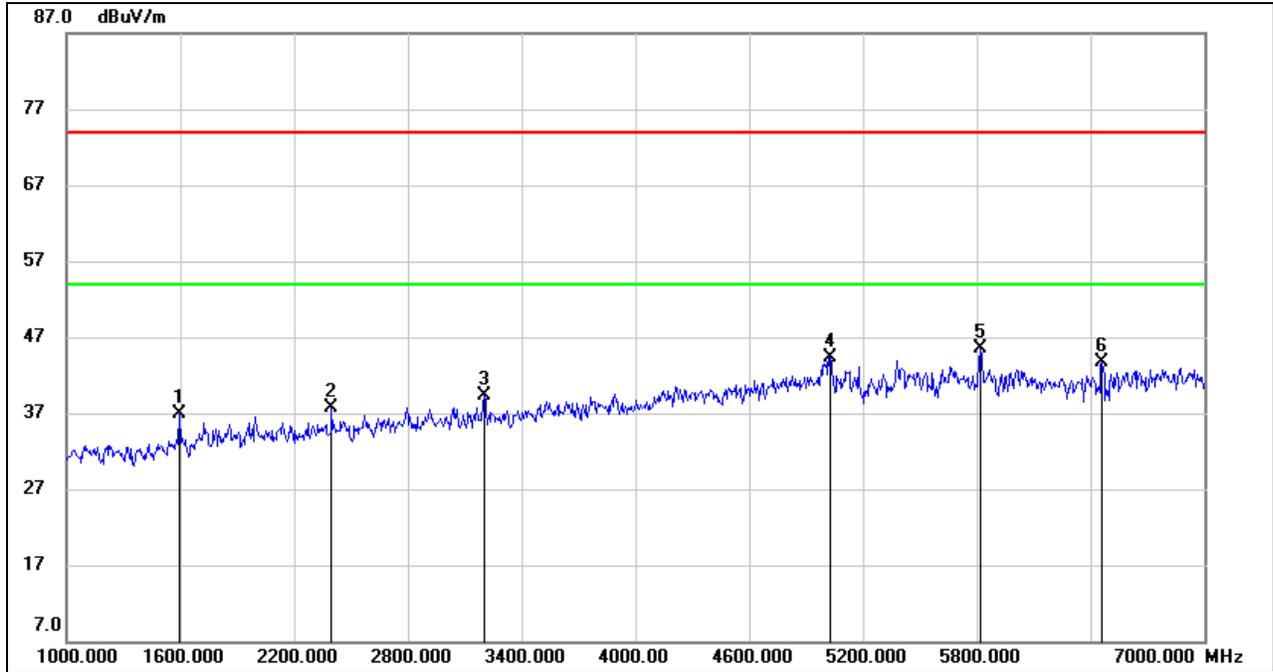

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1594.000	48.66	-11.66	37.00	74.00	-37.00	peak
2	2398.000	46.35	-8.62	37.73	74.00	-36.27	peak
3	3202.000	44.99	-5.66	39.33	74.00	-34.67	peak
4	5026.000	43.35	0.99	44.34	74.00	-29.66	peak
5	5818.000	43.50	2.00	45.50	74.00	-28.50	peak
6	6460.000	40.00	3.76	43.76	74.00	-30.24	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

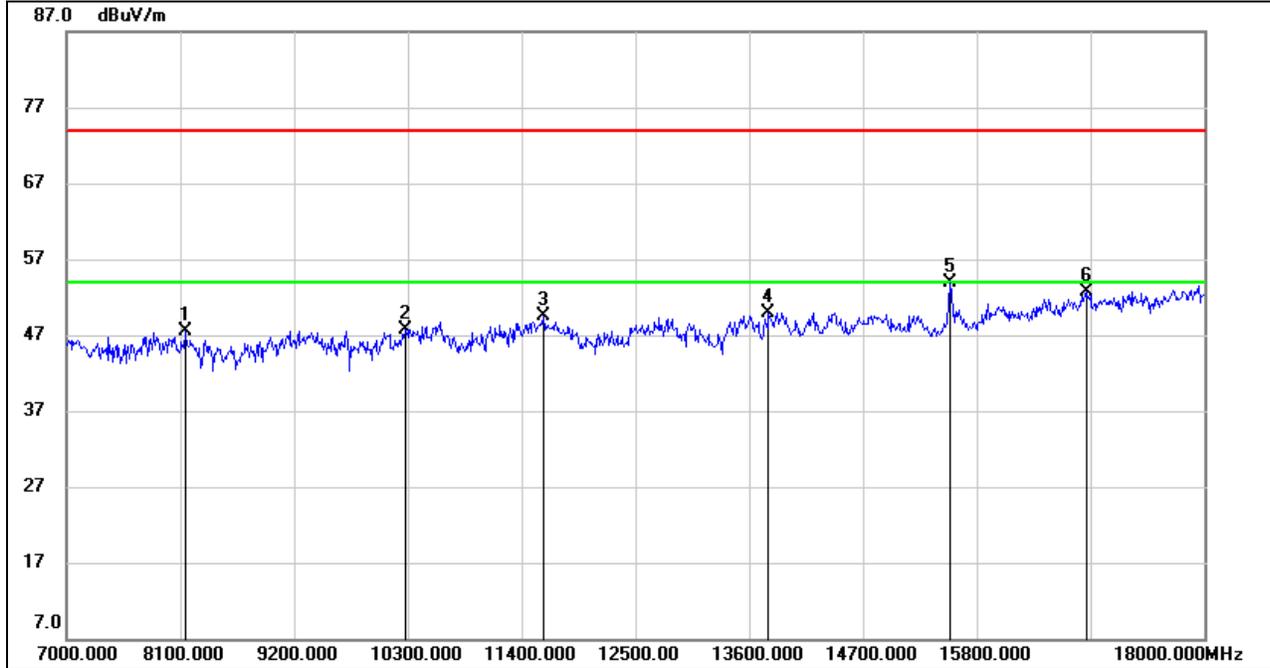


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8144.000	39.12	8.44	47.56	74.00	-26.44	peak
2	10278.000	36.59	11.10	47.69	74.00	-26.31	peak
3	11609.000	35.94	13.50	49.44	74.00	-24.56	peak
4	13787.000	33.05	16.94	49.99	74.00	-24.01	peak
5	15536.000	37.11	16.75	53.86	74.00	-20.14	peak
6	16856.000	32.66	20.13	52.79	74.00	-21.21	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

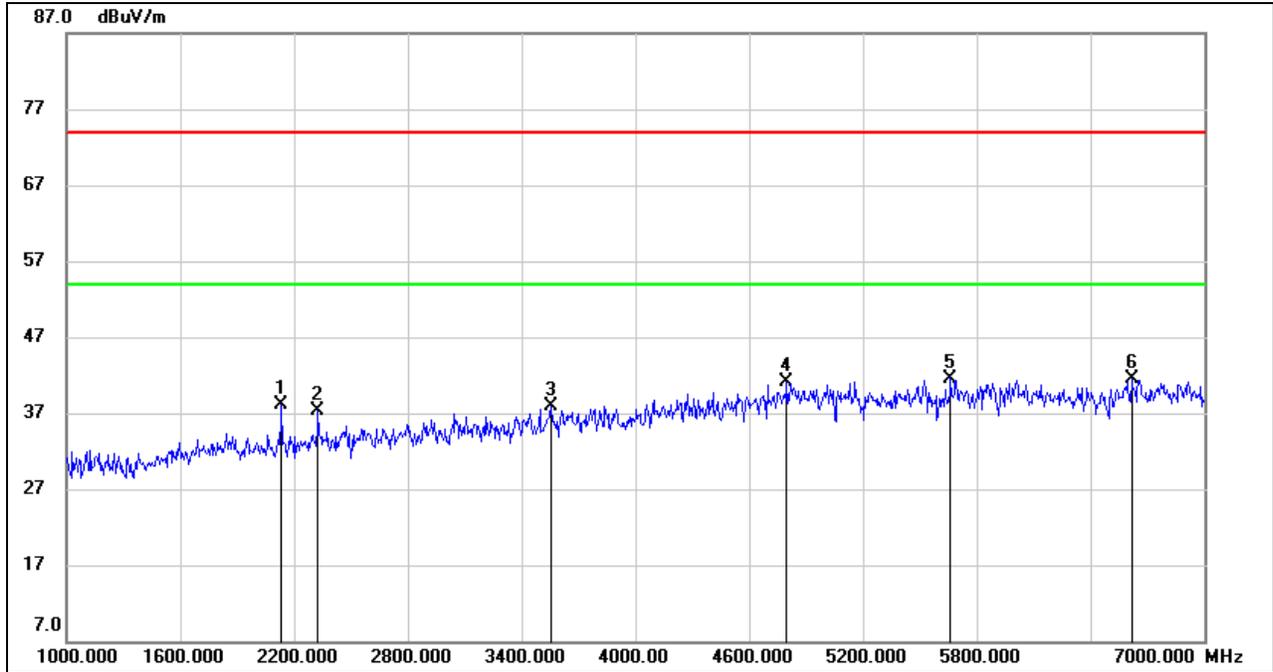

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2134.000	47.56	-9.53	38.03	74.00	-35.97	peak
2	2326.000	46.18	-8.83	37.35	74.00	-36.65	peak
3	3556.000	42.65	-4.70	37.95	74.00	-36.05	peak
4	4798.000	40.49	0.52	41.01	74.00	-32.99	peak
5	5662.000	39.61	1.99	41.60	74.00	-32.40	peak
6	6616.000	37.04	4.48	41.52	74.00	-32.48	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

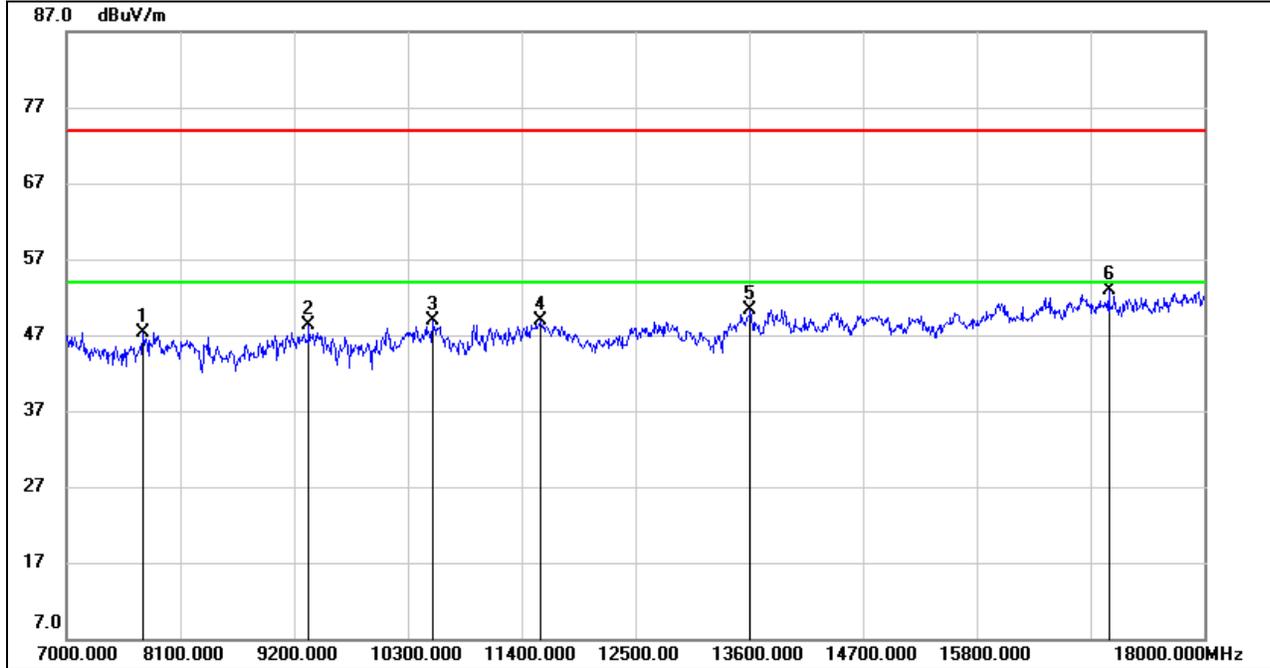


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7737.000	40.05	7.33	47.38	74.00	-26.62	peak
2	9343.000	38.80	9.57	48.37	74.00	-25.63	peak
3	10542.000	37.13	11.83	48.96	74.00	-25.04	peak
4	11587.000	35.41	13.52	48.93	74.00	-25.07	peak
5	13611.000	34.28	16.10	50.38	74.00	-23.62	peak
6	17076.000	32.08	20.82	52.90	74.00	-21.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

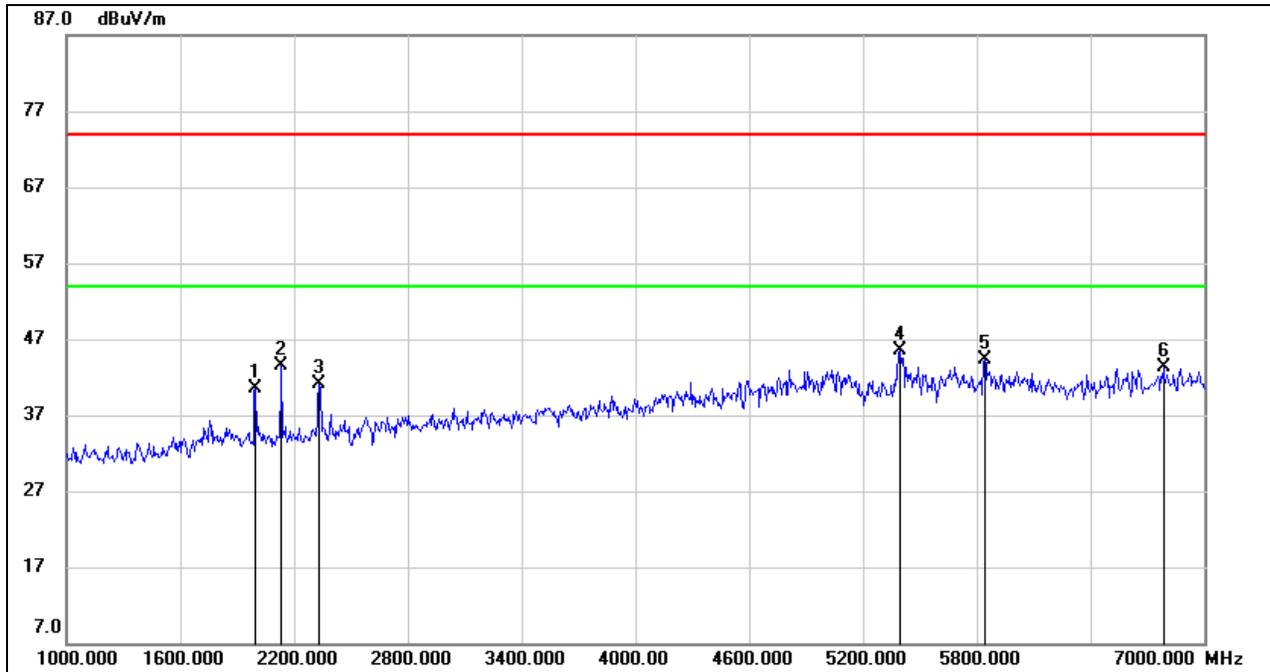

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1996.000	50.77	-10.24	40.53	74.00	-33.47	peak
2	2134.000	53.06	-9.53	43.53	74.00	-30.47	peak
3	2332.000	49.90	-8.80	41.10	74.00	-32.90	peak
4	5398.000	43.96	1.58	45.54	74.00	-28.46	peak
5	5842.000	42.24	2.08	44.32	74.00	-29.68	peak
6	6784.000	38.95	4.44	43.39	74.00	-30.61	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

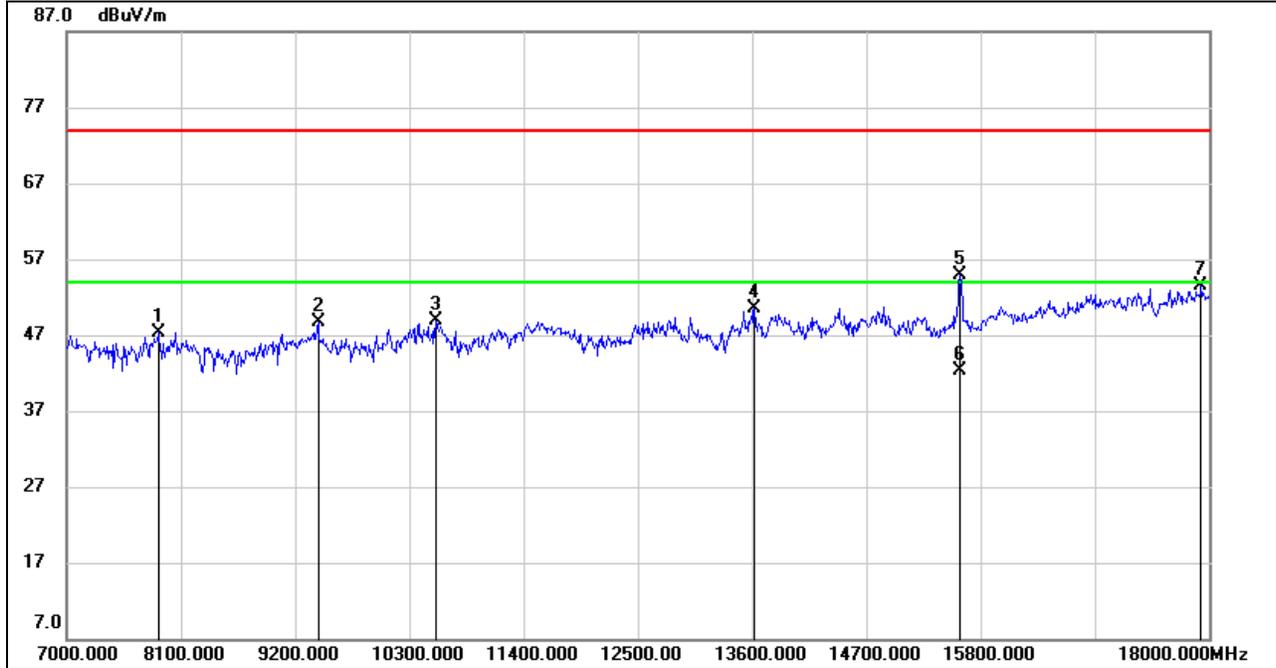


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.62	7.72	47.34	74.00	-26.66	peak
2	9420.000	38.74	9.90	48.64	74.00	-25.36	peak
3	10553.000	36.91	11.93	48.84	74.00	-25.16	peak
4	13622.000	34.40	16.08	50.48	74.00	-23.52	peak
5	15600.880	37.83	17.12	54.95	74.00	-19.05	peak
6	15600.880	25.22	17.12	42.34	54.00	-11.66	AVG
7	17923.000	29.99	23.42	53.41	74.00	-20.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

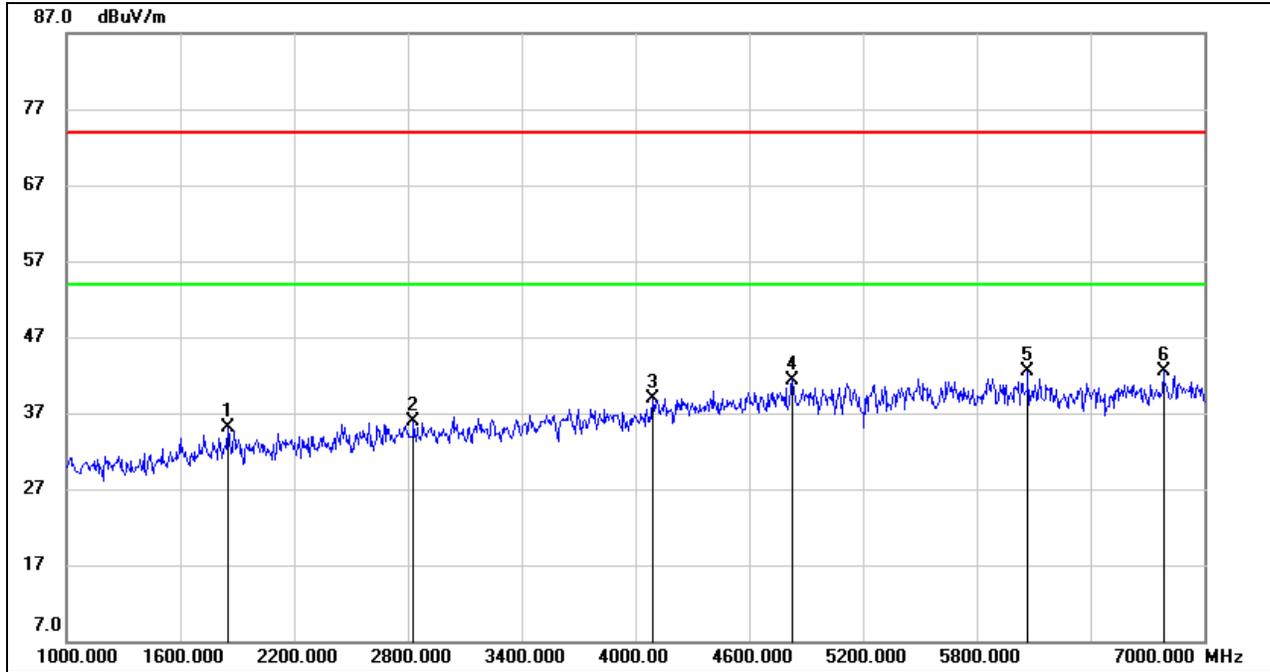

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1852.000	45.15	-10.13	35.02	74.00	-38.98	peak
2	2830.000	42.63	-6.81	35.82	74.00	-38.18	peak
3	4090.000	41.71	-2.86	38.85	74.00	-35.15	peak
4	4828.000	40.84	0.56	41.40	74.00	-32.60	peak
5	6070.000	39.86	2.55	42.41	74.00	-31.59	peak
6	6784.000	38.02	4.44	42.46	74.00	-31.54	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

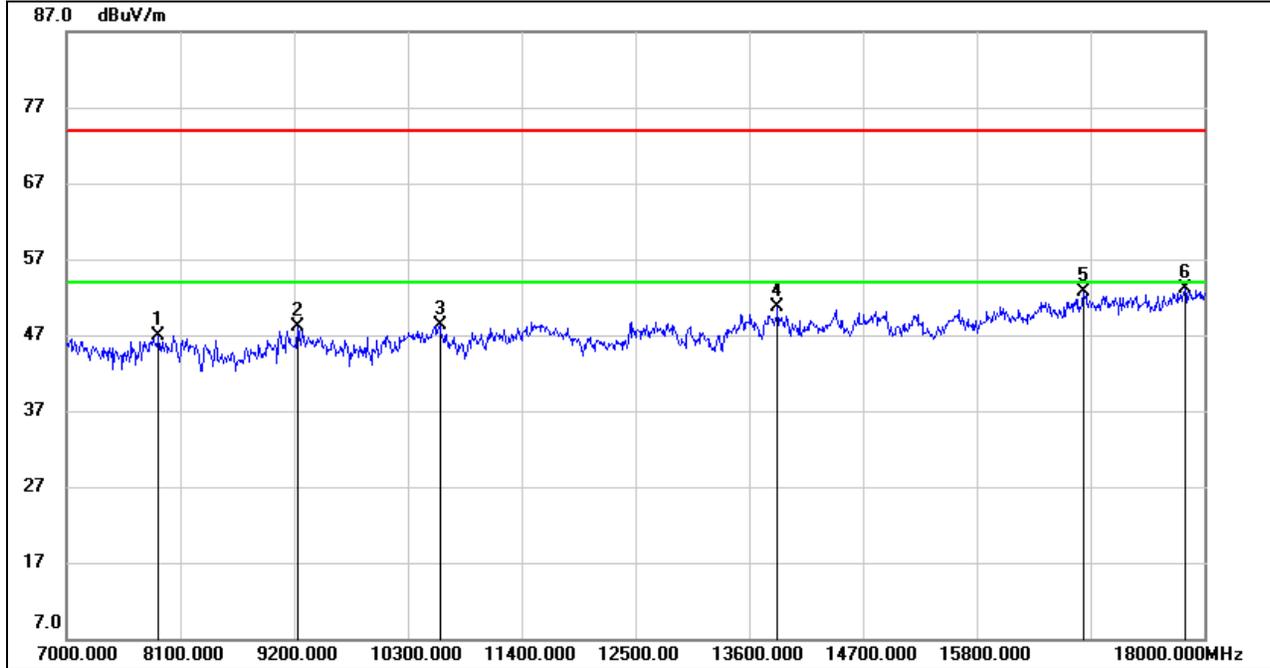


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	39.29	7.66	46.95	74.00	-27.05	peak
2	9233.000	39.06	9.03	48.09	74.00	-25.91	peak
3	10608.000	35.83	12.39	48.22	74.00	-25.78	peak
4	13875.000	34.30	16.39	50.69	74.00	-23.31	peak
5	16834.000	32.53	20.15	52.68	74.00	-21.32	peak
6	17813.000	29.72	23.41	53.13	74.00	-20.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

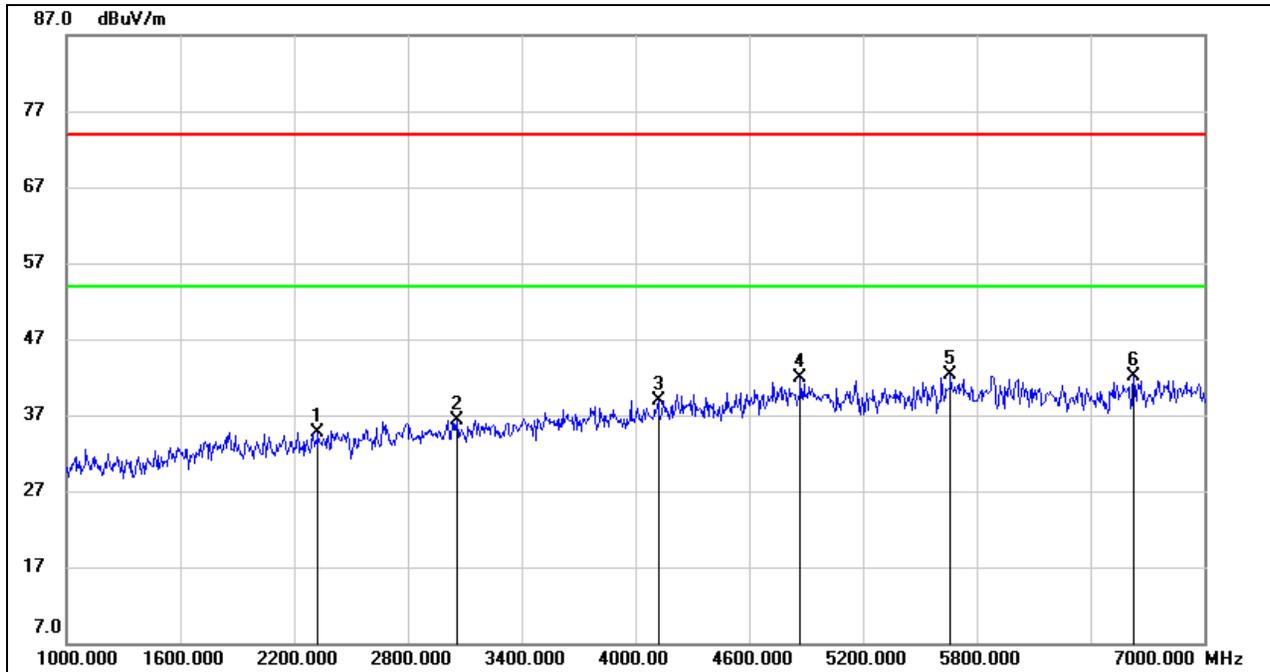

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2326.000	43.60	-8.83	34.77	74.00	-39.23	peak
2	3058.000	42.32	-5.94	36.38	74.00	-37.62	peak
3	4120.000	41.52	-2.56	38.96	74.00	-35.04	peak
4	4870.000	41.29	0.63	41.92	74.00	-32.08	peak
5	5662.000	40.29	1.99	42.28	74.00	-31.72	peak
6	6628.000	37.64	4.47	42.11	74.00	-31.89	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.


7-18GHz

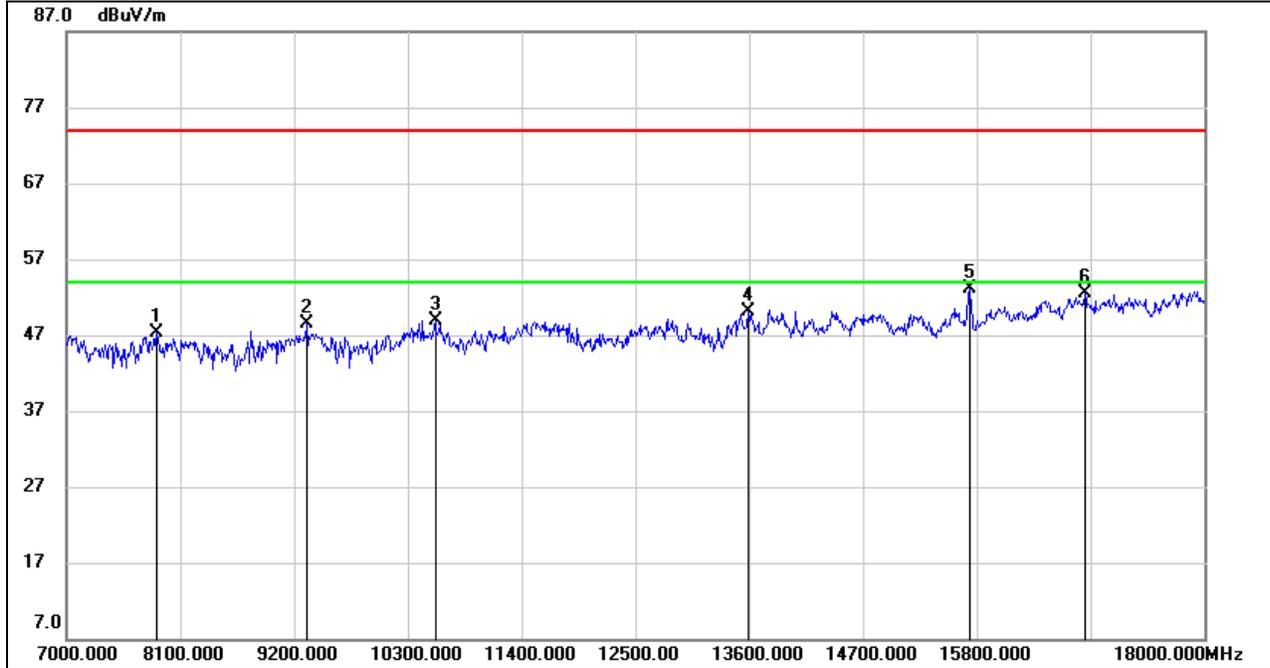

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.45	7.79	47.24	74.00	-26.76	peak
2	9321.000	38.97	9.44	48.41	74.00	-25.59	peak
3	10564.000	36.92	12.06	48.98	74.00	-25.02	peak
4	13589.000	34.10	16.08	50.18	74.00	-23.82	peak
5	15734.000	36.21	16.93	53.14	74.00	-20.86	peak
6	16845.000	32.32	20.15	52.47	74.00	-21.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.1.2. UNII-2A BAND
ANTENNA 2 TEST RESULTS (WORST CASE)
RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)
PEAK

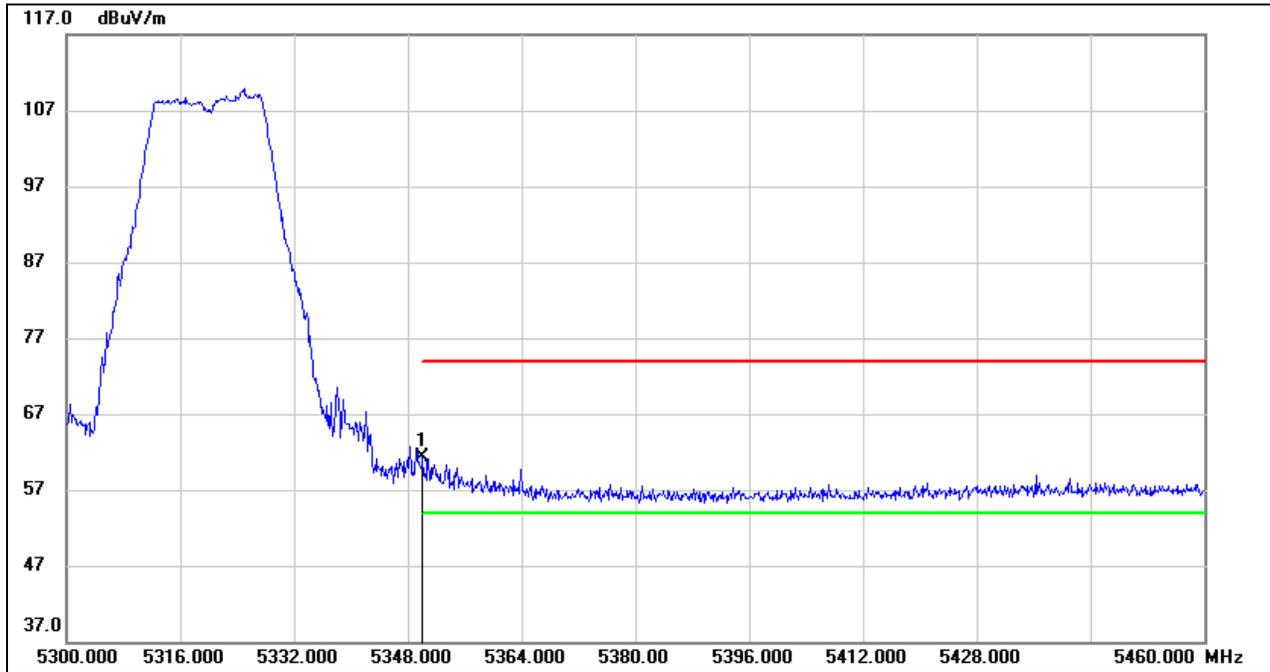


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	20.64	40.64	61.28	74.00	-12.72	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

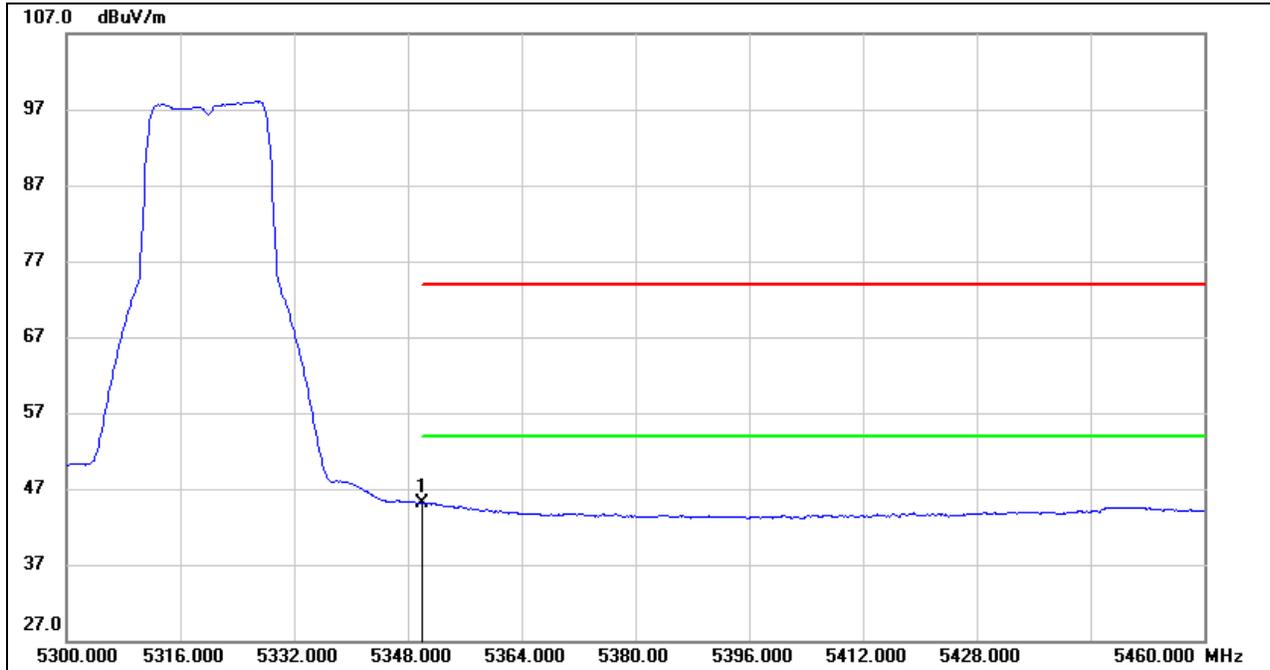


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	4.41	40.64	45.05	54.00	-8.95	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

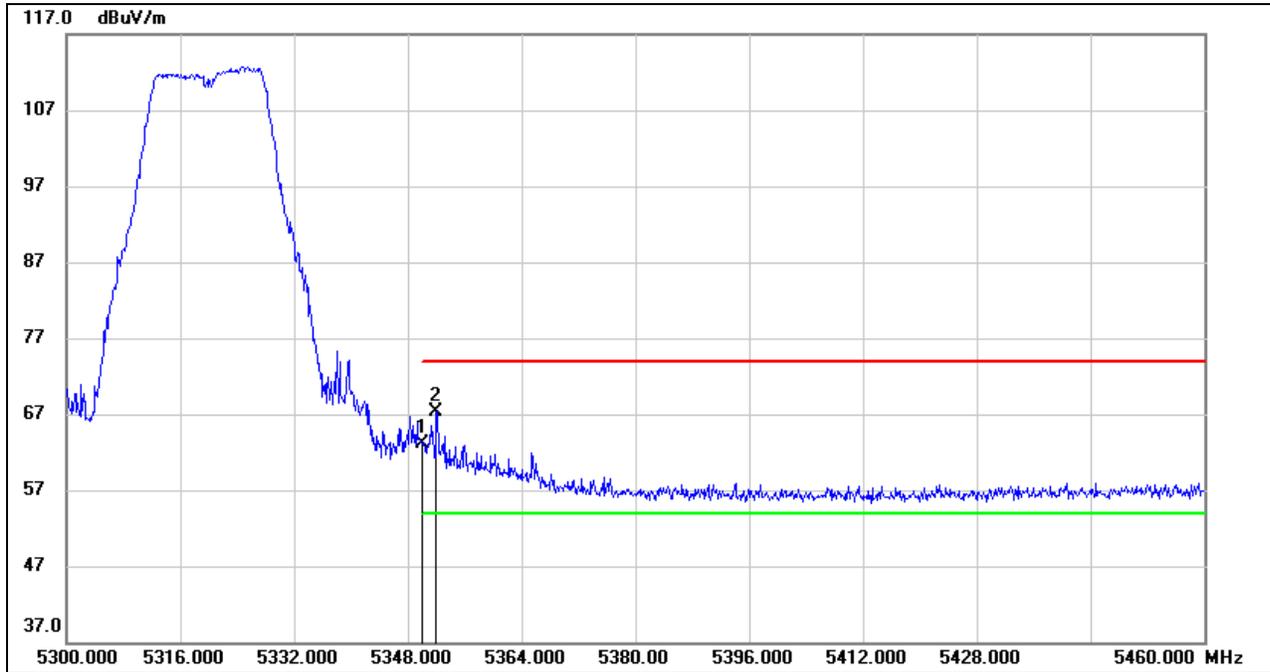

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	22.41	40.64	63.05	74.00	-10.95	peak
2	5352.000	26.67	40.63	67.30	74.00	-6.70	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG




No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	6.61	40.64	47.25	54.00	-6.75	AVG
2	5352.000	6.27	40.63	46.90	54.00	-7.10	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

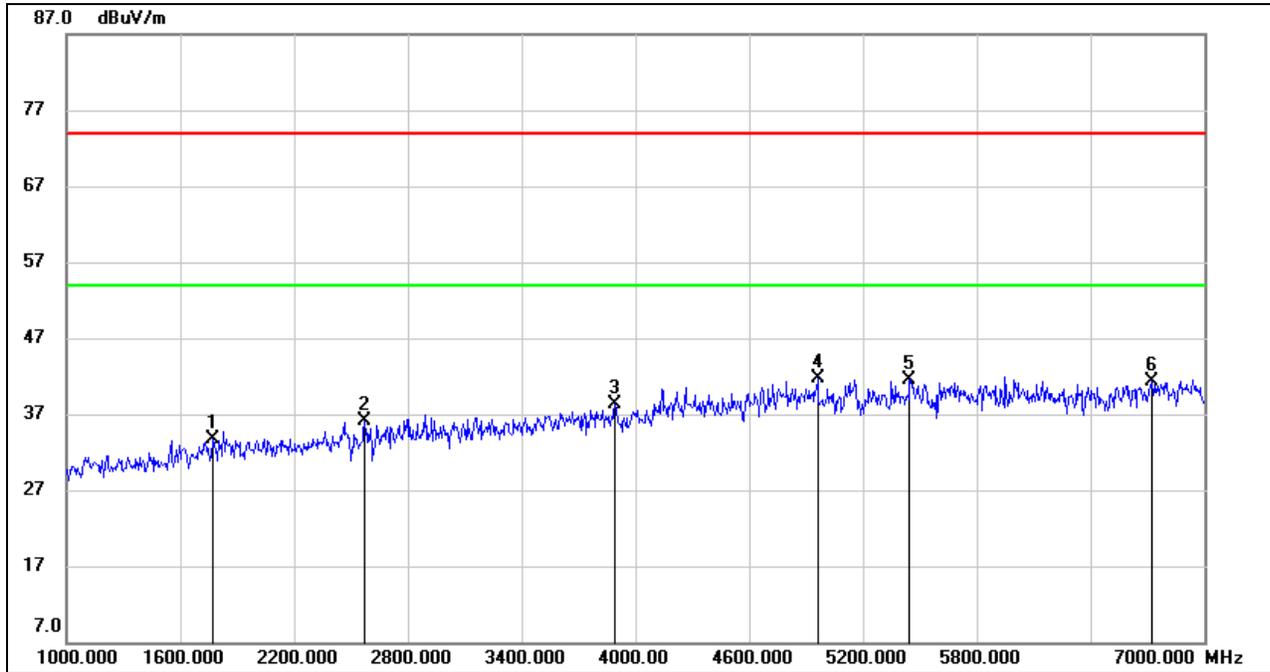

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1768.000	44.01	-10.35	33.66	74.00	-40.34	peak
2	2572.000	44.46	-8.26	36.20	74.00	-37.80	peak
3	3892.000	41.94	-3.59	38.35	74.00	-35.65	peak
4	4960.000	40.92	0.78	41.70	74.00	-32.30	peak
5	5446.000	39.90	1.67	41.57	74.00	-32.43	peak
6	6724.000	36.87	4.45	41.32	74.00	-32.68	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

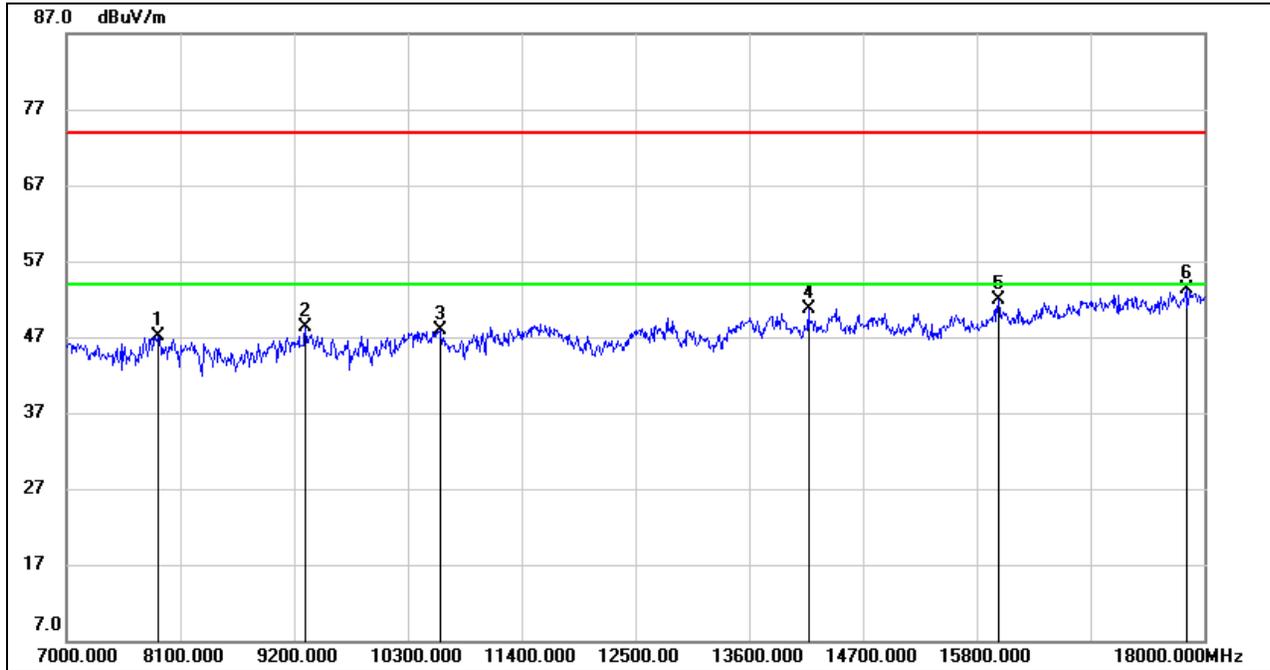


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.34	7.72	47.06	74.00	-26.94	peak
2	9310.000	38.98	9.37	48.35	74.00	-25.65	peak
3	10608.000	35.51	12.39	47.90	74.00	-26.10	peak
4	14172.000	34.28	16.43	50.71	74.00	-23.29	peak
5	16009.000	34.03	17.85	51.88	74.00	-22.12	peak
6	17824.000	29.81	23.42	53.23	74.00	-20.77	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

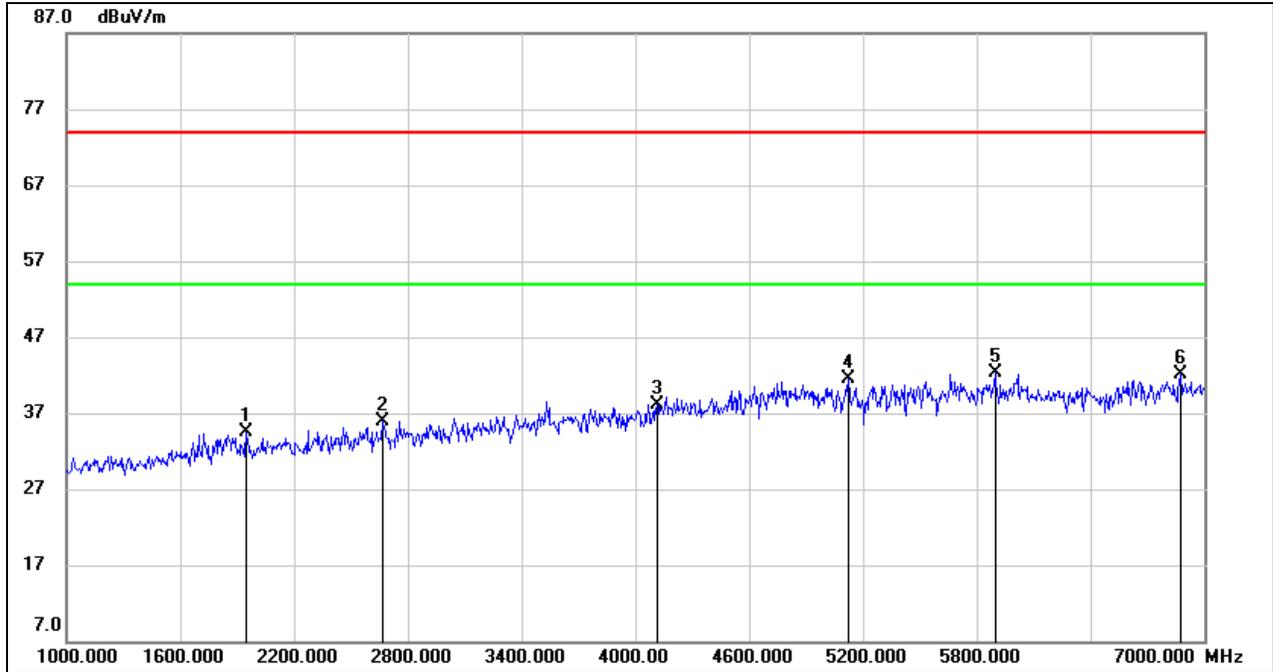

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1948.000	44.76	-10.21	34.55	74.00	-39.45	peak
2	2668.000	43.70	-7.76	35.94	74.00	-38.06	peak
3	4114.000	40.71	-2.62	38.09	74.00	-35.91	peak
4	5122.000	40.02	1.51	41.53	74.00	-32.47	peak
5	5896.000	40.13	2.27	42.40	74.00	-31.60	peak
6	6874.000	37.48	4.61	42.09	74.00	-31.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

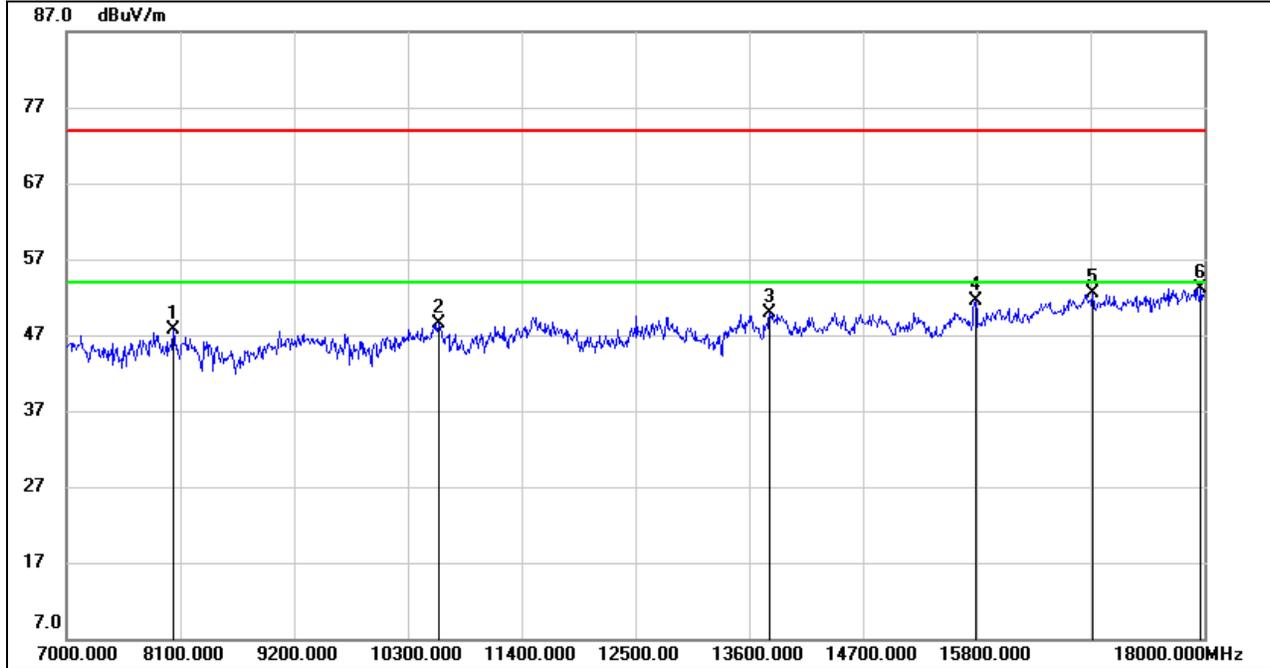


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8034.000	40.04	7.67	47.71	74.00	-26.29	peak
2	10597.000	36.01	12.43	48.44	74.00	-25.56	peak
3	13798.000	32.94	17.05	49.99	74.00	-24.01	peak
4	15789.000	34.31	17.13	51.44	74.00	-22.56	peak
5	16922.000	32.37	20.22	52.59	74.00	-21.41	peak
6	17967.000	29.61	23.49	53.10	74.00	-20.90	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

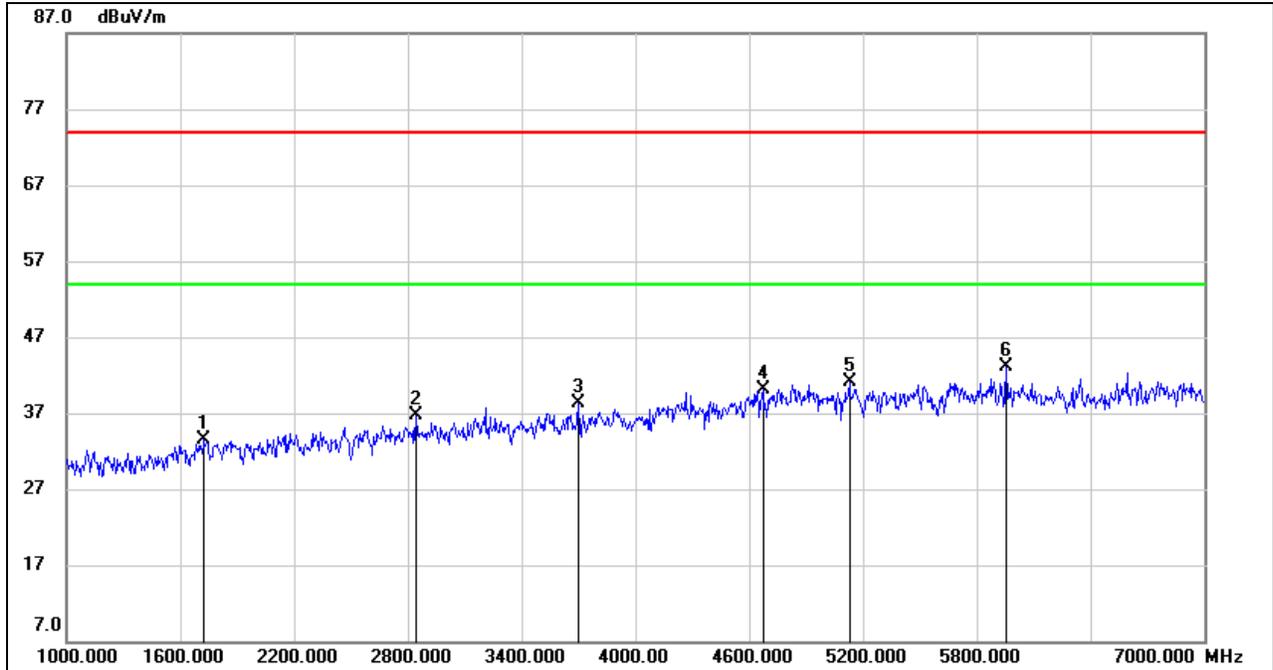

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1726.000	44.23	-10.66	33.57	74.00	-40.43	peak
2	2842.000	43.39	-6.76	36.63	74.00	-37.37	peak
3	3700.000	42.21	-3.95	38.26	74.00	-35.74	peak
4	4672.000	40.41	-0.22	40.19	74.00	-33.81	peak
5	5128.000	39.64	1.54	41.18	74.00	-32.82	peak
6	5956.000	40.66	2.46	43.12	74.00	-30.88	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

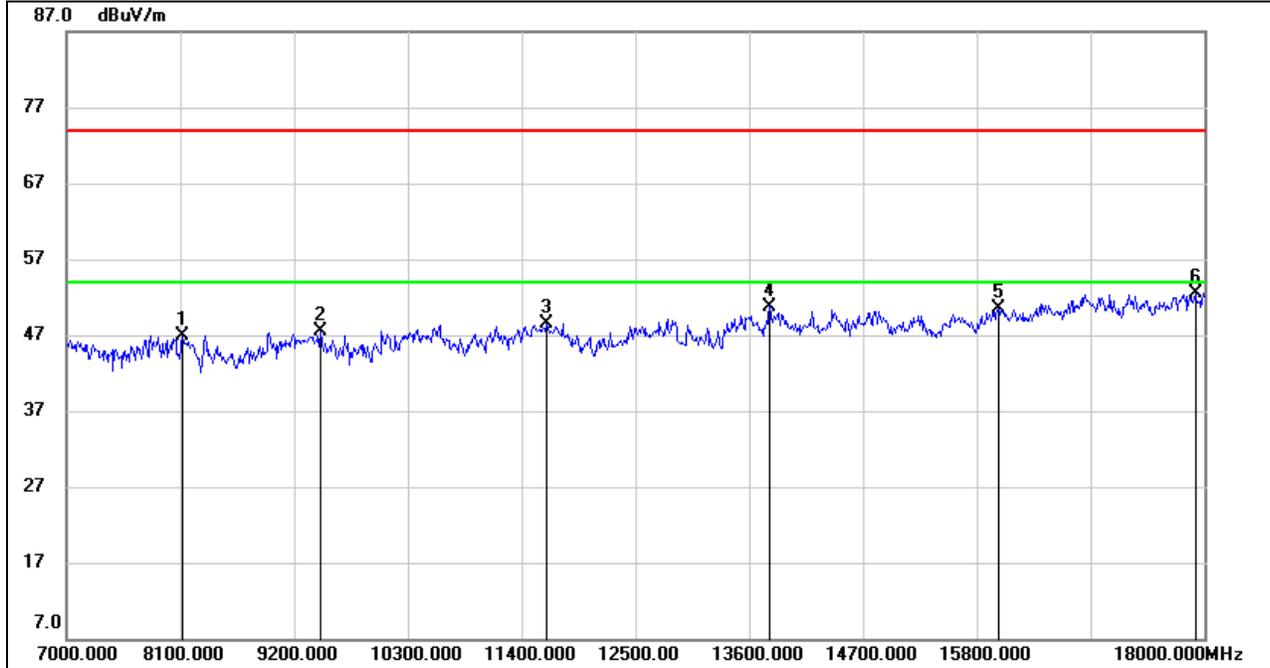


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.61	8.29	46.90	74.00	-27.10	peak
2	9453.000	37.70	9.83	47.53	74.00	-26.47	peak
3	11642.000	35.12	13.33	48.45	74.00	-25.55	peak
4	13798.000	33.75	17.05	50.80	74.00	-23.20	peak
5	16009.000	32.60	17.85	50.45	74.00	-23.55	peak
6	17912.000	29.08	23.42	52.50	74.00	-21.50	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

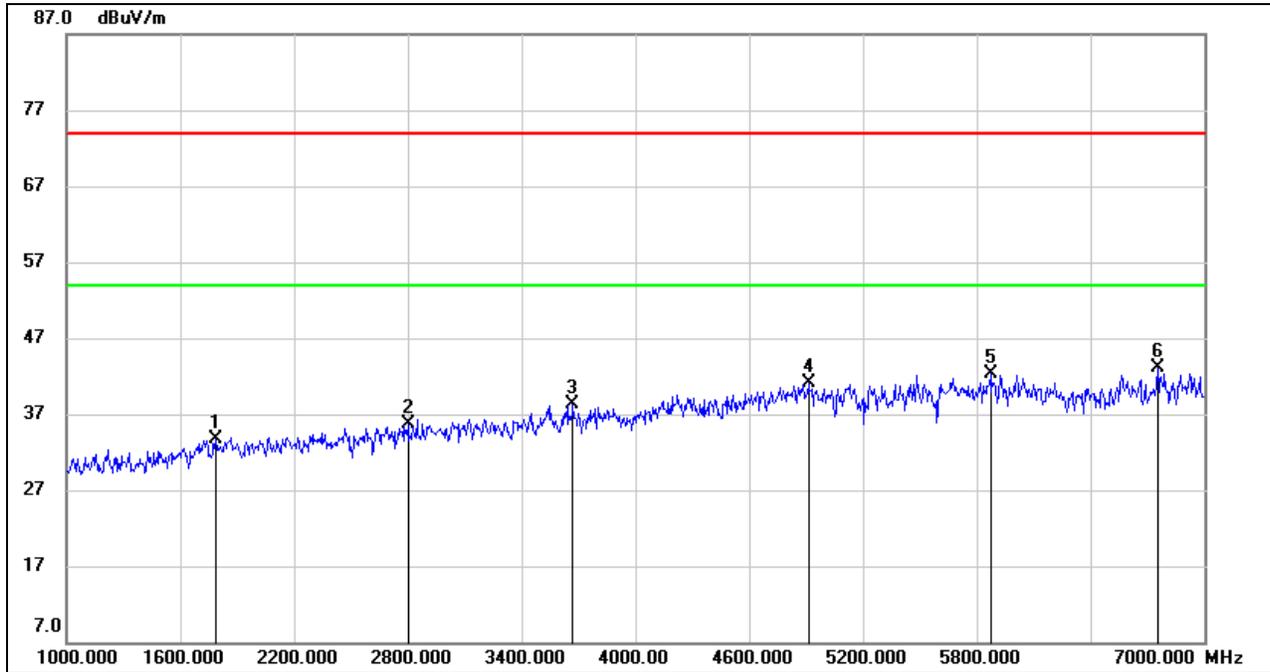

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1786.000	43.91	-10.21	33.70	74.00	-40.30	peak
2	2800.000	42.66	-6.95	35.71	74.00	-38.29	peak
3	3670.000	42.40	-4.11	38.29	74.00	-35.71	peak
4	4912.000	40.35	0.71	41.06	74.00	-32.94	peak
5	5872.000	40.13	2.19	42.32	74.00	-31.68	peak
6	6754.000	38.75	4.45	43.20	74.00	-30.80	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

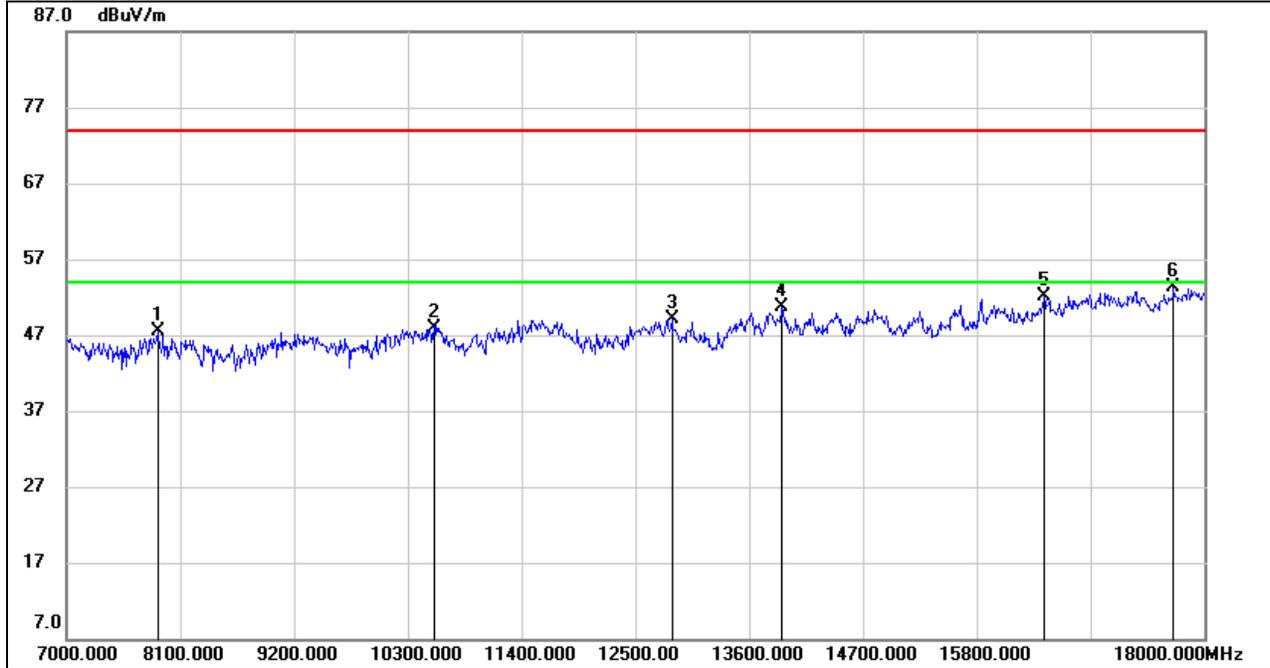


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.78	7.72	47.50	74.00	-26.50	peak
2	10553.000	36.03	11.93	47.96	74.00	-26.04	peak
3	12852.000	33.47	15.61	49.08	74.00	-24.92	peak
4	13919.000	34.55	16.16	50.71	74.00	-23.29	peak
5	16449.000	32.64	19.45	52.09	74.00	-21.91	peak
6	17703.000	30.69	22.52	53.21	74.00	-20.79	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

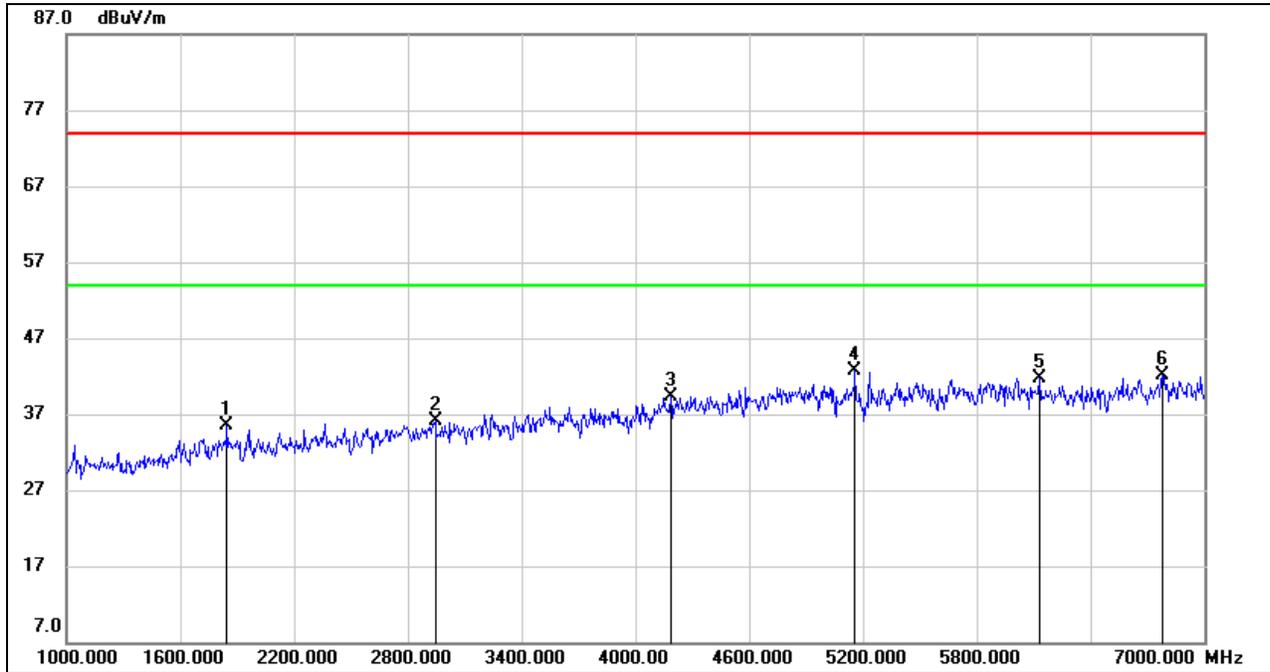

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1846.000	45.55	-10.14	35.41	74.00	-38.59	peak
2	2944.000	42.42	-6.31	36.11	74.00	-37.89	peak
3	4186.000	41.28	-1.92	39.36	74.00	-34.64	peak
4	5158.000	41.02	1.70	42.72	74.00	-31.28	peak
5	6130.000	39.25	2.51	41.76	74.00	-32.24	peak
6	6778.000	37.68	4.44	42.12	74.00	-31.88	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

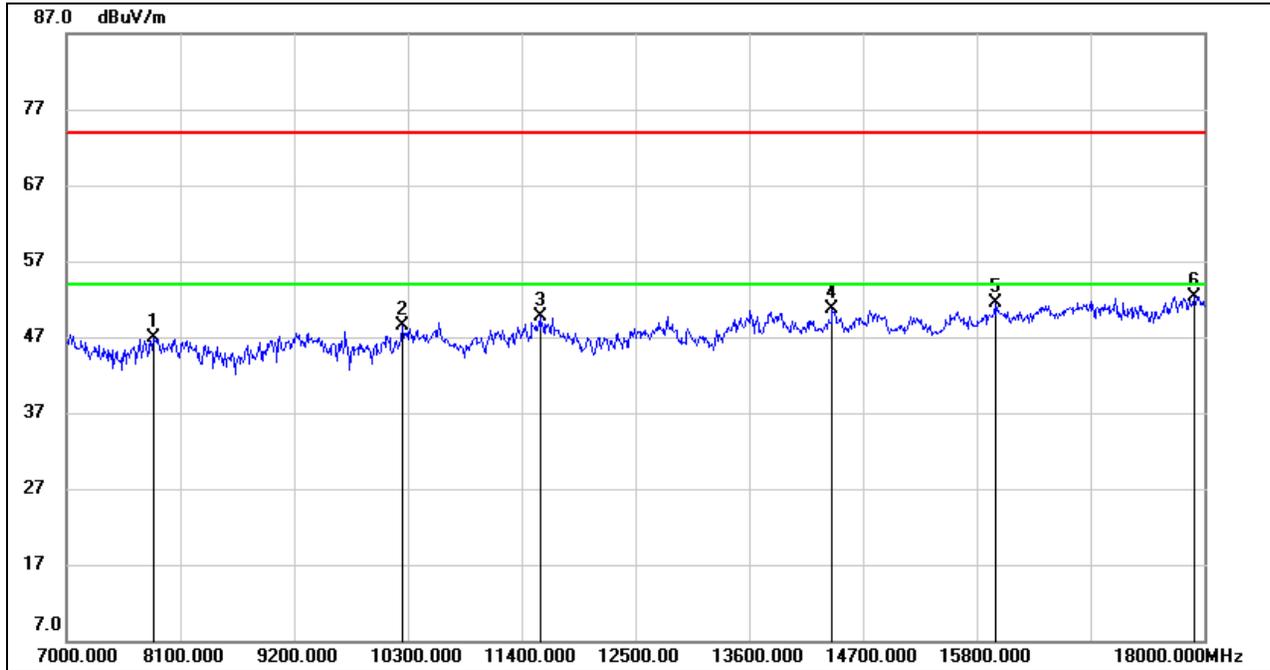


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7836.000	39.02	7.96	46.98	74.00	-27.02	peak
2	10245.000	37.72	10.82	48.54	74.00	-25.46	peak
3	11576.000	36.25	13.51	49.76	74.00	-24.24	peak
4	14403.000	34.03	16.68	50.71	74.00	-23.29	peak
5	15976.000	33.69	17.78	51.47	74.00	-22.53	peak
6	17901.000	28.87	23.40	52.27	74.00	-21.73	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

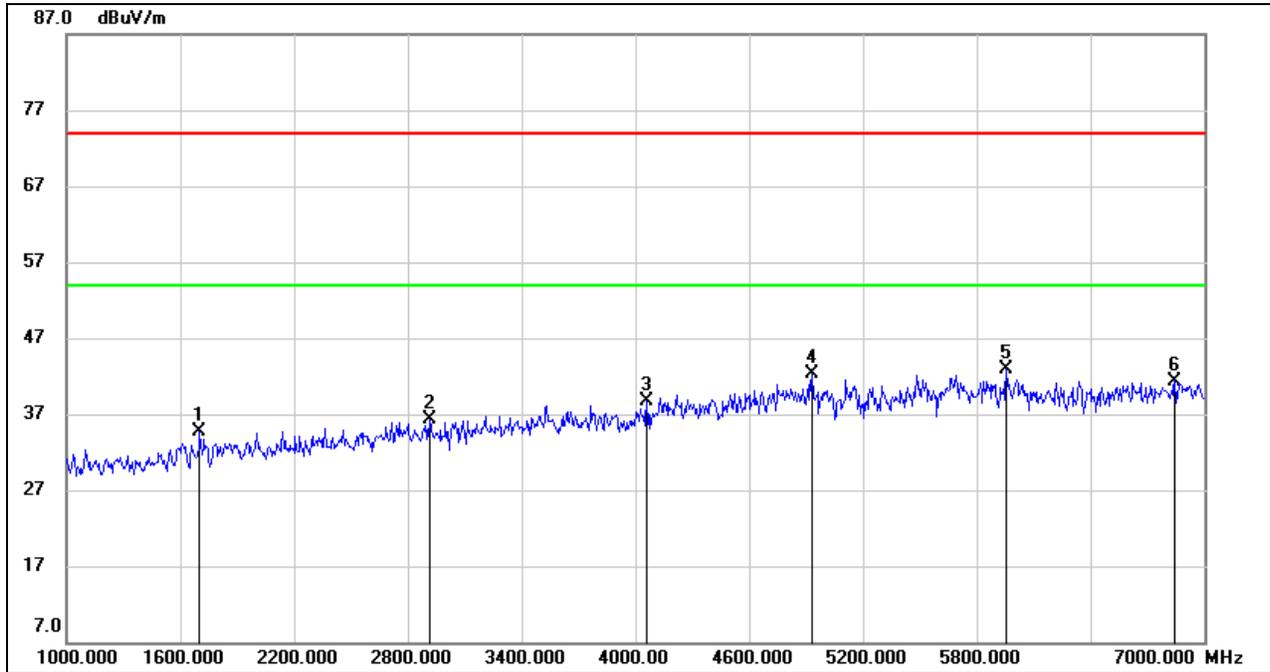

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1702.000	45.52	-10.85	34.67	74.00	-39.33	peak
2	2914.000	42.74	-6.45	36.29	74.00	-37.71	peak
3	4060.000	41.79	-3.15	38.64	74.00	-35.36	peak
4	4930.000	41.60	0.74	42.34	74.00	-31.66	peak
5	5956.000	40.43	2.46	42.89	74.00	-31.11	peak
6	6844.000	36.85	4.55	41.40	74.00	-32.60	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.


7-18GHz

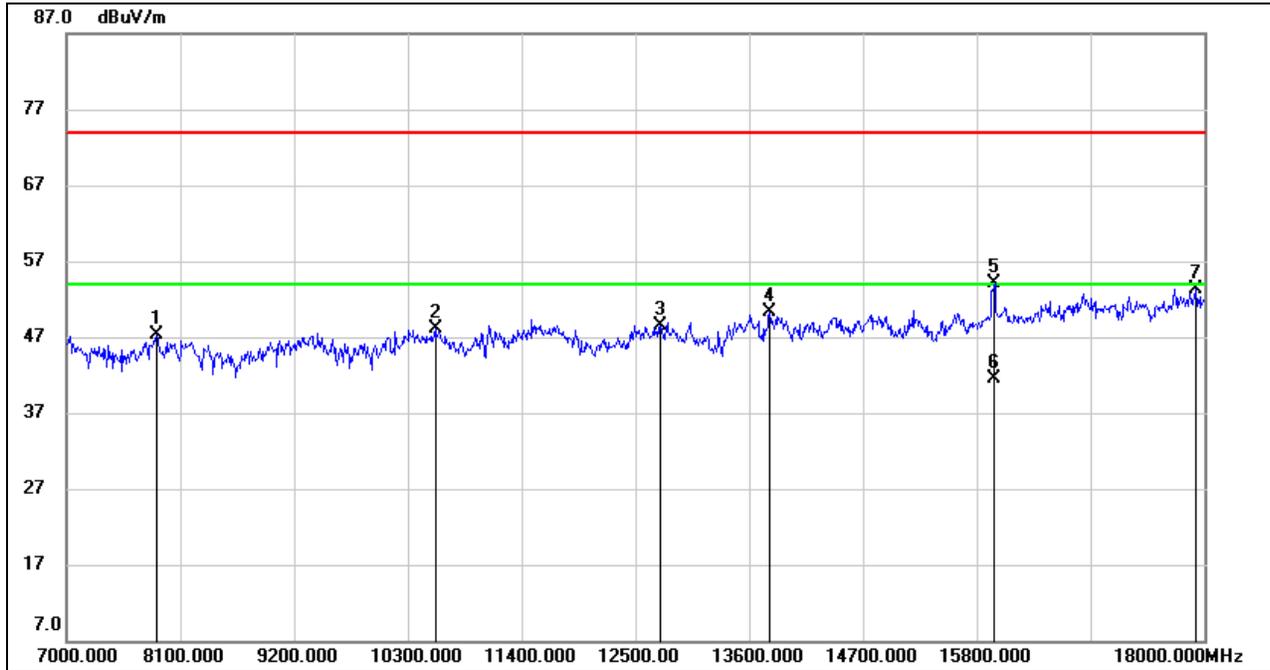

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.43	7.79	47.22	74.00	-26.78	peak
2	10564.000	36.03	12.06	48.09	74.00	-25.91	peak
3	12742.000	33.40	15.16	48.56	74.00	-25.44	peak
4	13798.000	33.34	17.05	50.39	74.00	-23.61	peak
5	15957.590	36.34	17.76	54.10	74.00	-19.90	peak
6	15957.590	23.79	17.76	41.55	54.00	-12.45	AVG
7	17923.000	29.95	23.42	53.37	74.00	-20.63	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.1.3. UNII-2C BAND
ANTENNA 2 TEST RESULTS (WORST CASE)
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)
PEAK

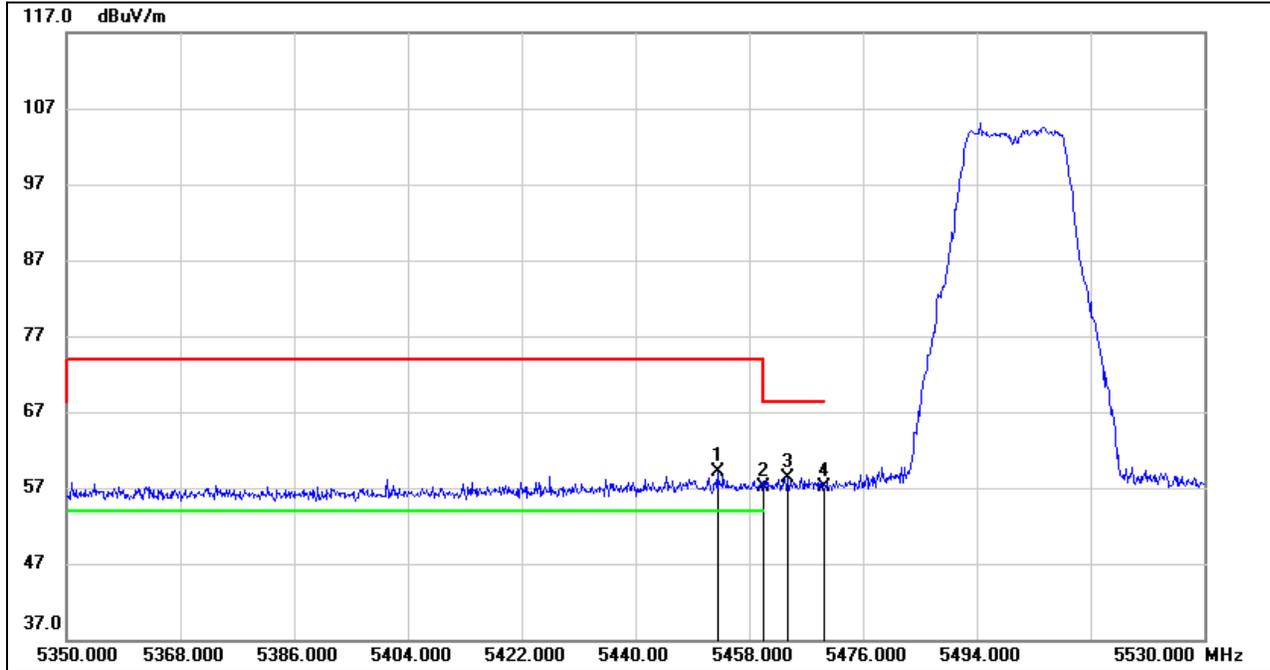


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.960	17.86	41.19	59.05	74.00	-14.95	peak
2	5460.000	15.85	41.28	57.13	68.20	-11.07	peak
3	5464.120	16.94	41.34	58.28	68.20	-9.92	peak
4	5470.000	15.70	41.41	57.11	68.20	-11.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

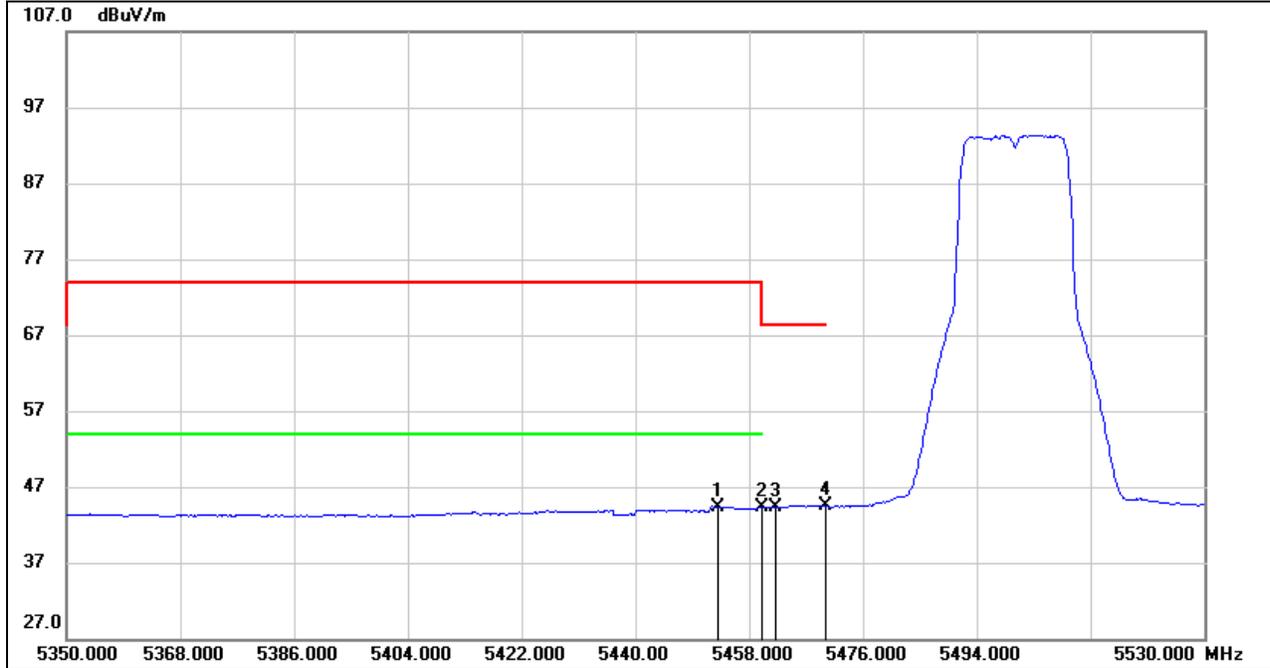


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.960	3.04	41.19	44.23	54.00	-9.77	AVG
2	5460.000	2.98	41.28	44.26	54.00	-9.74	AVG
3	5462.120	3.00	41.31	44.31	68.20	-23.89	AVG
4	5470.000	3.15	41.41	44.56	68.20	-23.64	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


PEAK

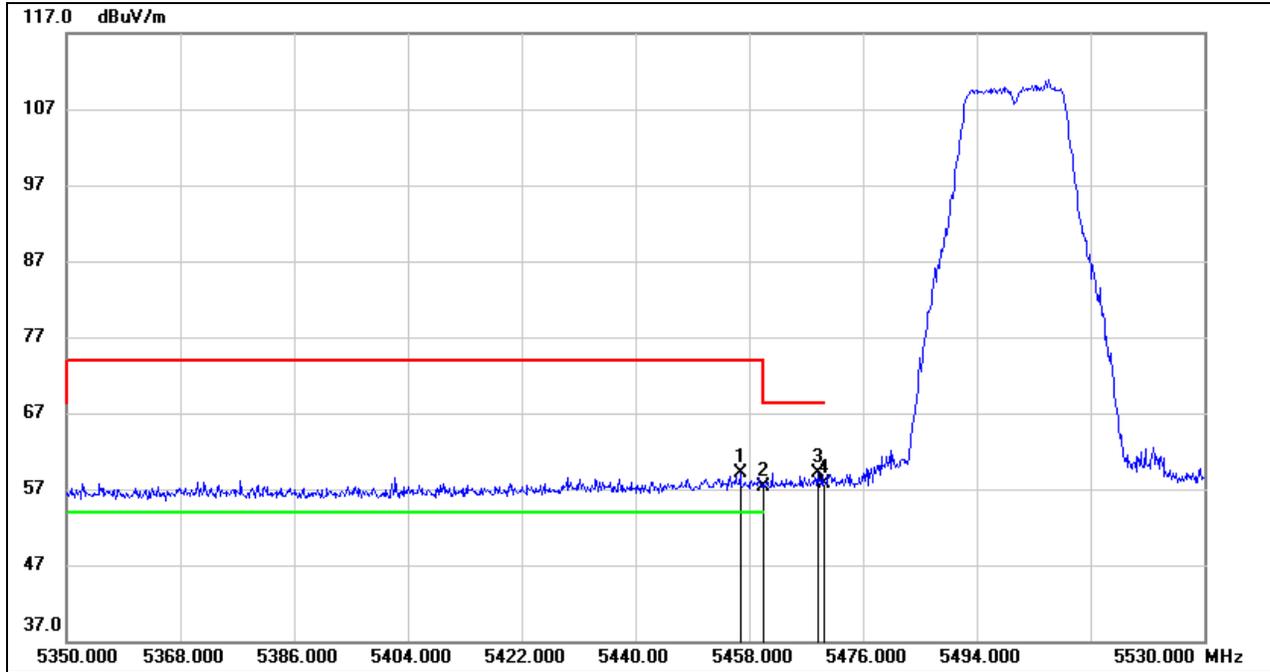

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.560	17.78	41.24	59.02	74.00	-14.98	peak
2	5460.000	16.11	41.28	57.39	68.20	-10.81	peak
3	5468.800	17.80	41.39	59.19	68.20	-9.01	peak
4	5470.000	16.33	41.41	57.74	68.20	-10.46	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

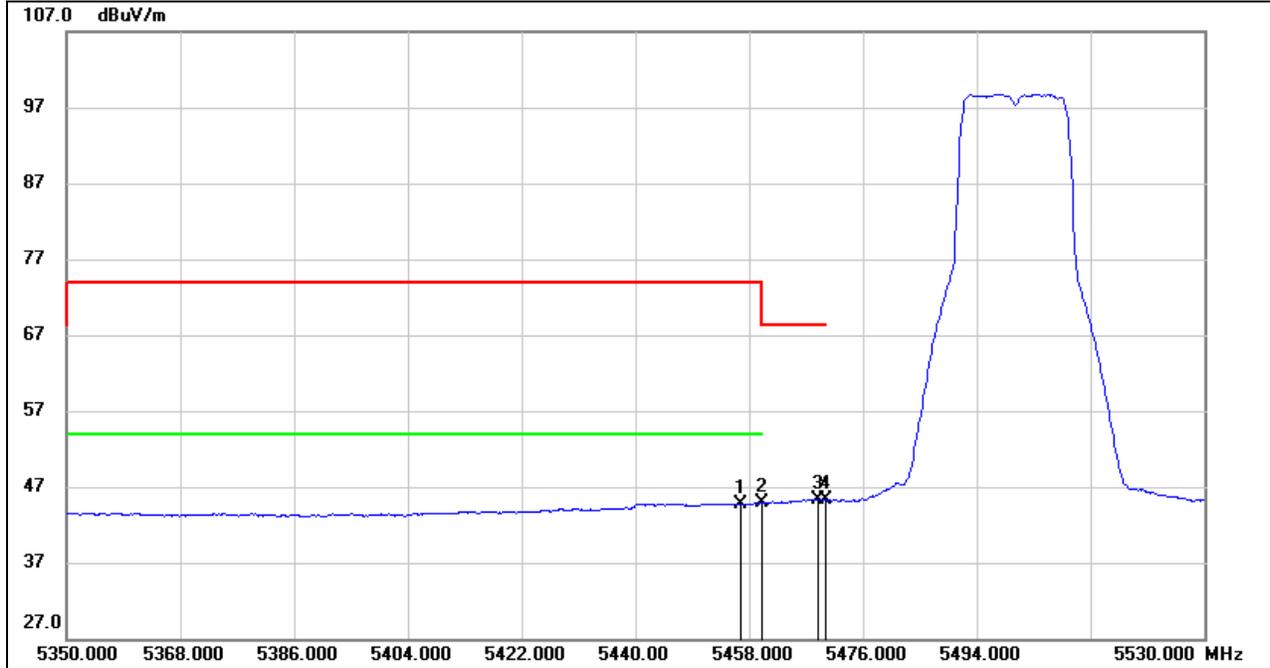


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.560	3.42	41.24	44.66	54.00	-9.34	AVG
2	5460.000	3.58	41.28	44.86	54.00	-9.14	AVG
3	5468.800	3.93	41.39	45.32	68.20	-22.88	AVG
4	5470.000	3.92	41.41	45.33	68.20	-22.87	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

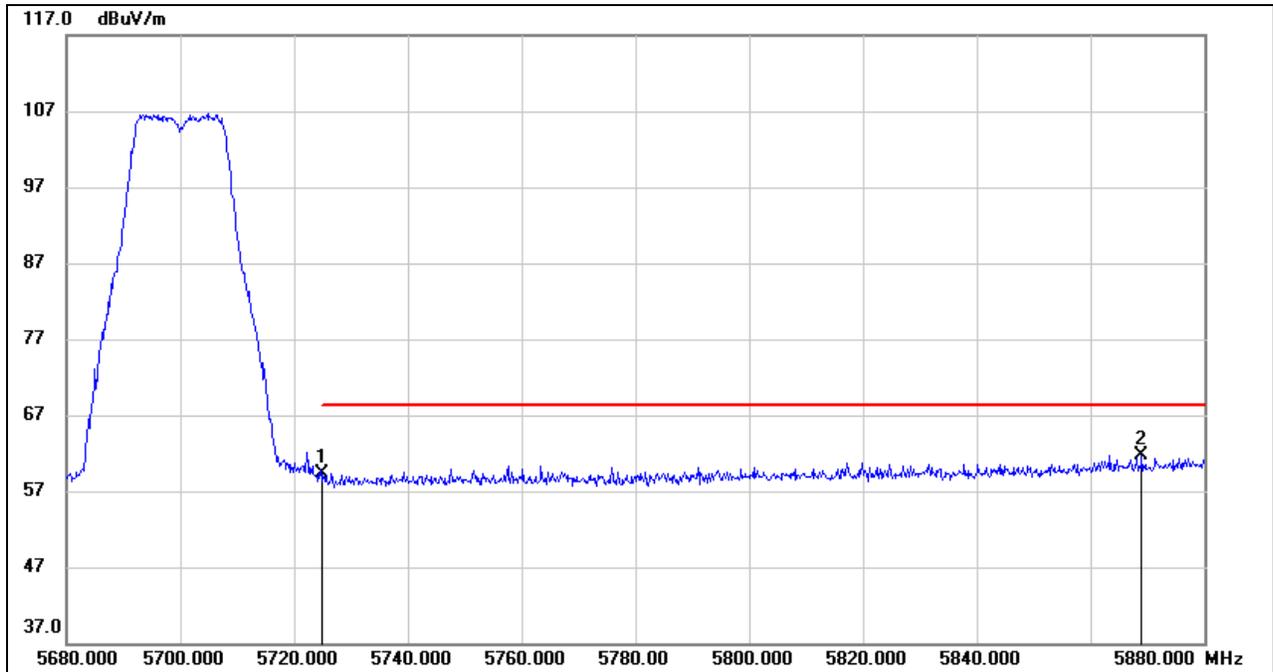


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	17.77	41.61	59.38	68.20	-8.82	peak
2	5869.000	18.53	43.25	61.78	68.20	-6.42	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

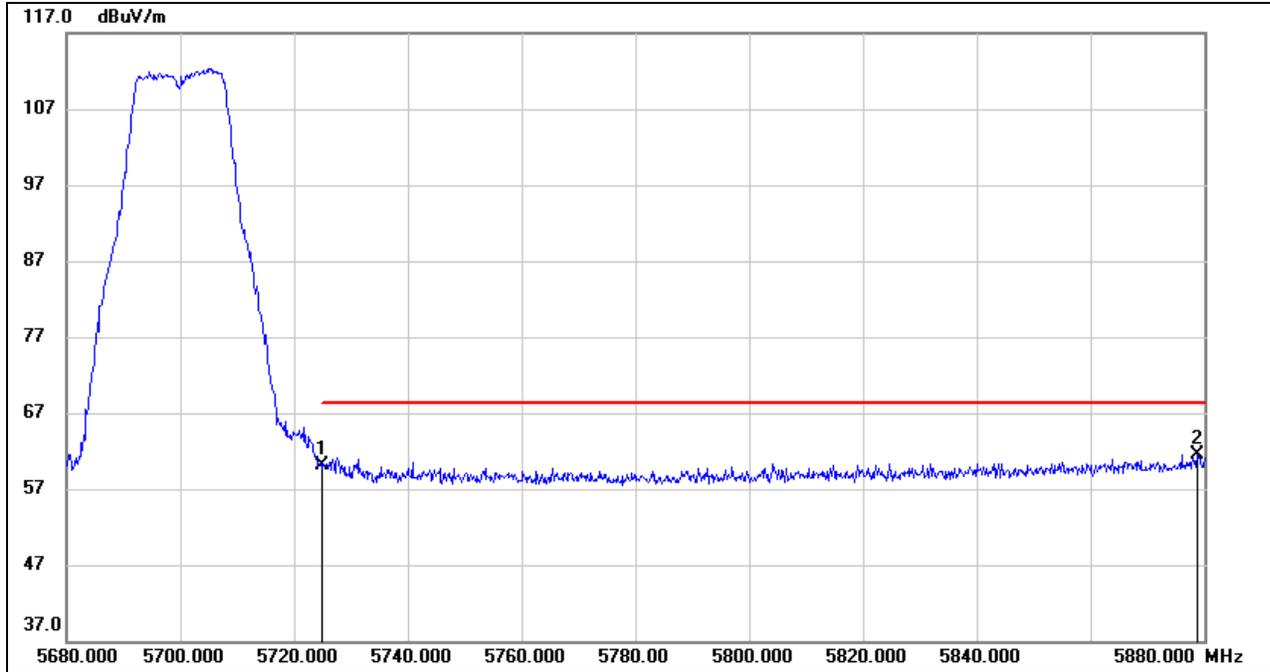


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	18.51	41.61	60.12	68.20	-8.08	peak
2	5878.800	18.13	43.44	61.57	68.20	-6.63	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

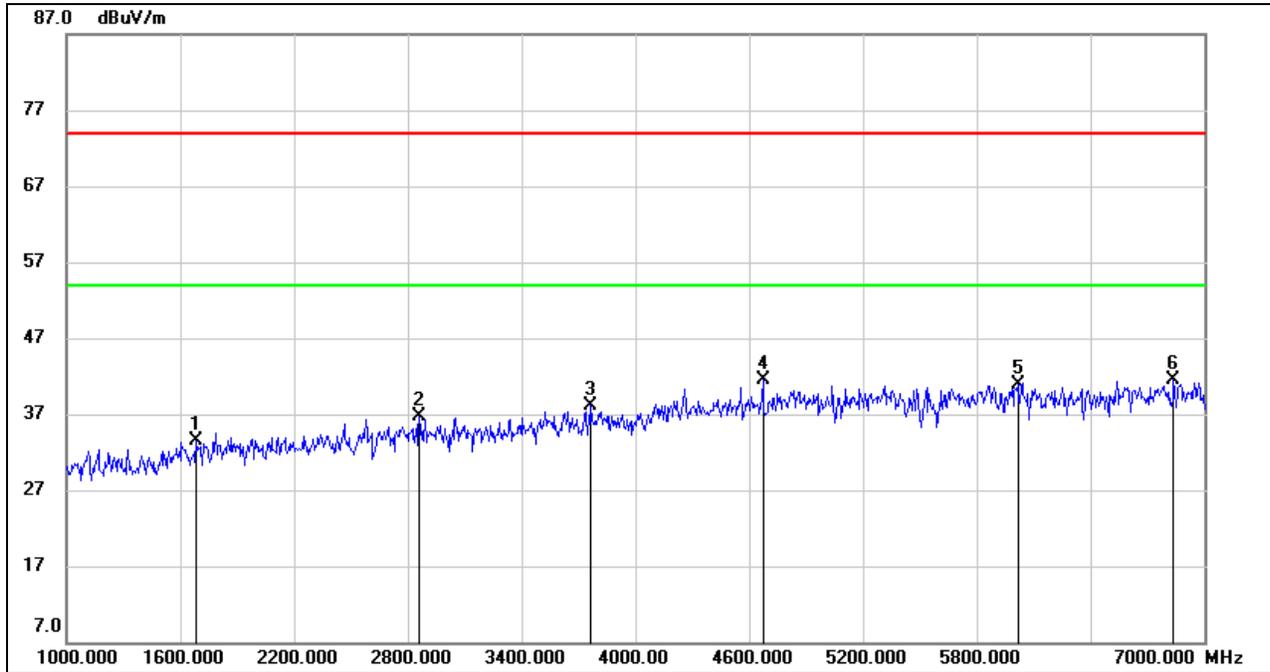

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1684.000	44.45	-10.98	33.47	74.00	-40.53	peak
2	2860.000	43.31	-6.68	36.63	74.00	-37.37	peak
3	3766.000	41.72	-3.63	38.09	74.00	-35.91	peak
4	4672.000	41.66	-0.22	41.44	74.00	-32.56	peak
5	6016.000	38.26	2.60	40.86	74.00	-33.14	peak
6	6838.000	36.93	4.54	41.47	74.00	-32.53	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

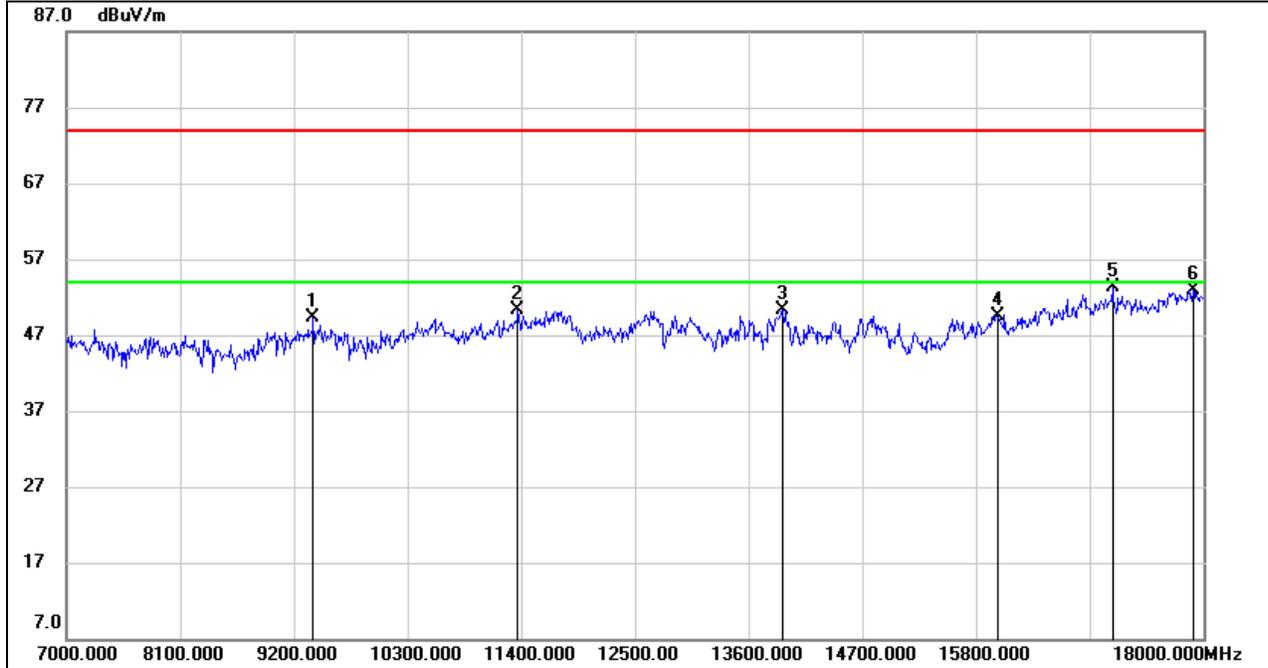


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	39.37	9.94	49.31	74.00	-24.69	peak
2	11367.000	36.95	13.38	50.33	74.00	-23.67	peak
3	13930.000	34.08	16.24	50.32	74.00	-23.68	peak
4	16009.000	31.72	17.74	49.46	74.00	-24.54	peak
5	17120.000	32.04	21.20	53.24	74.00	-20.76	peak
6	17901.000	29.27	23.59	52.86	74.00	-21.14	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.



HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

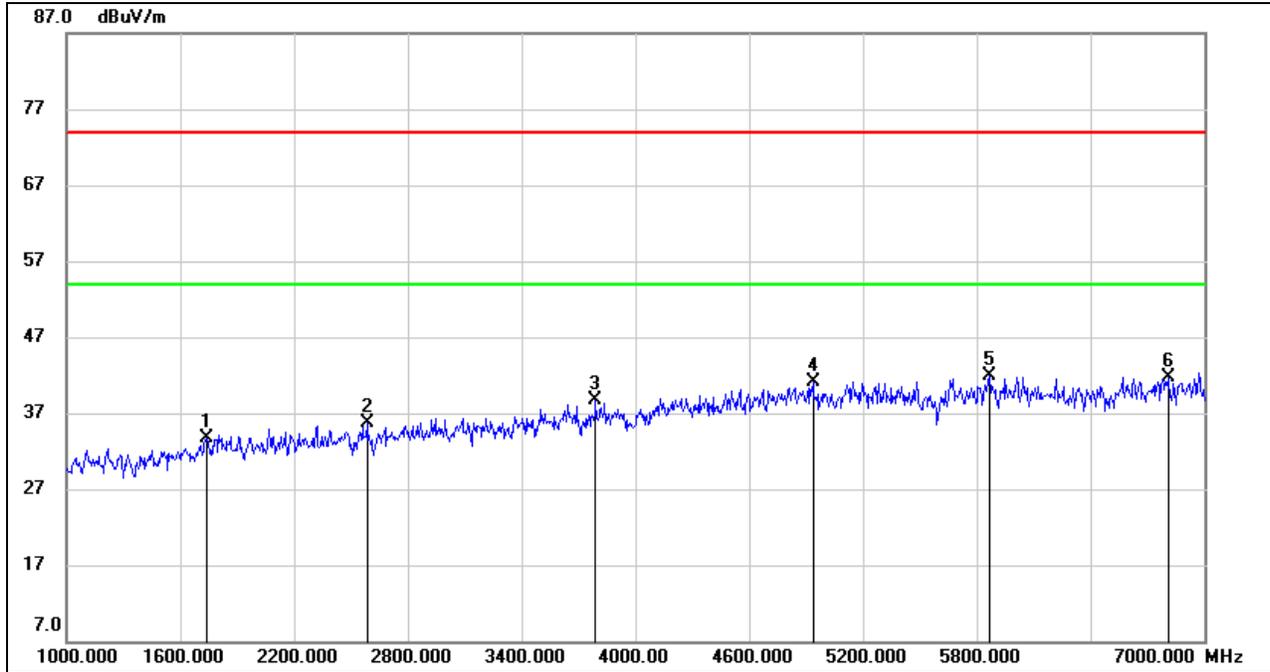

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1738.000	44.33	-10.57	33.76	74.00	-40.24	peak
2	2584.000	43.88	-8.22	35.66	74.00	-38.34	peak
3	3790.000	42.24	-3.51	38.73	74.00	-35.27	peak
4	4936.000	40.43	0.75	41.18	74.00	-32.82	peak
5	5866.000	39.80	2.16	41.96	74.00	-32.04	peak
6	6808.000	37.22	4.45	41.67	74.00	-32.33	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

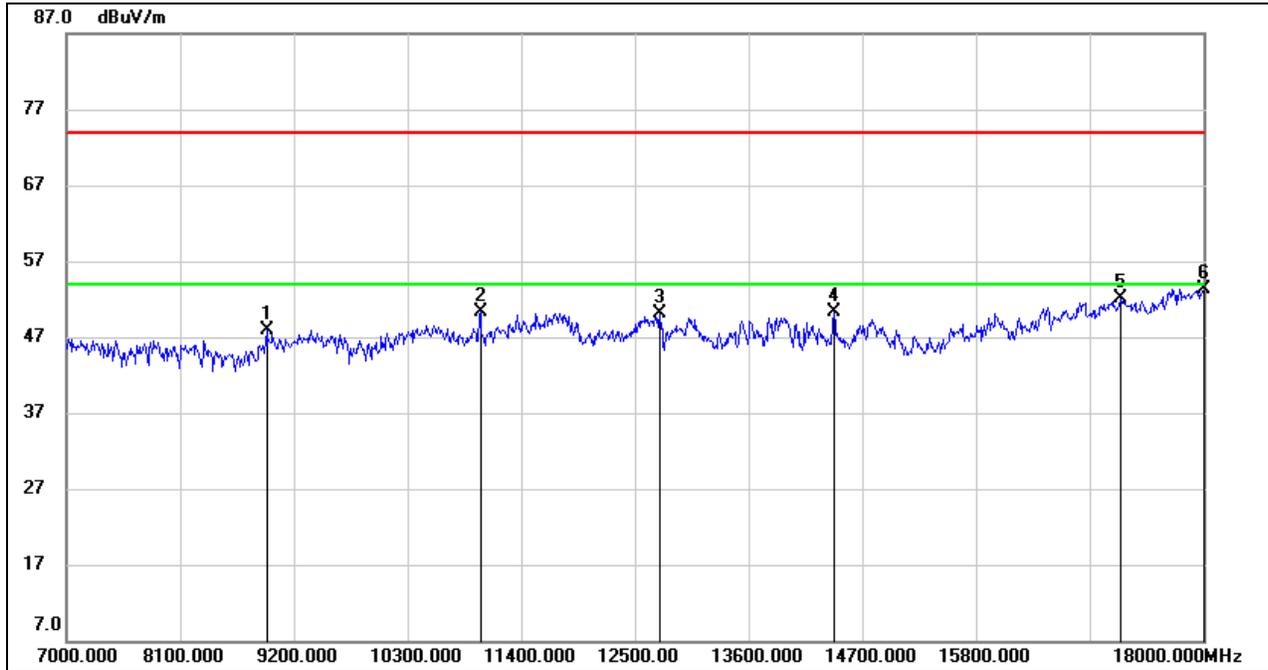


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	38.40	9.53	47.93	74.00	-26.07	peak
2	11004.000	37.61	12.63	50.24	74.00	-23.76	peak
3	12742.000	34.81	15.28	50.09	74.00	-23.91	peak
4	14425.000	34.27	16.11	50.38	74.00	-23.62	peak
5	17197.000	30.39	21.68	52.07	74.00	-21.93	peak
6	18000.000	29.67	23.69	53.36	74.00	-20.64	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

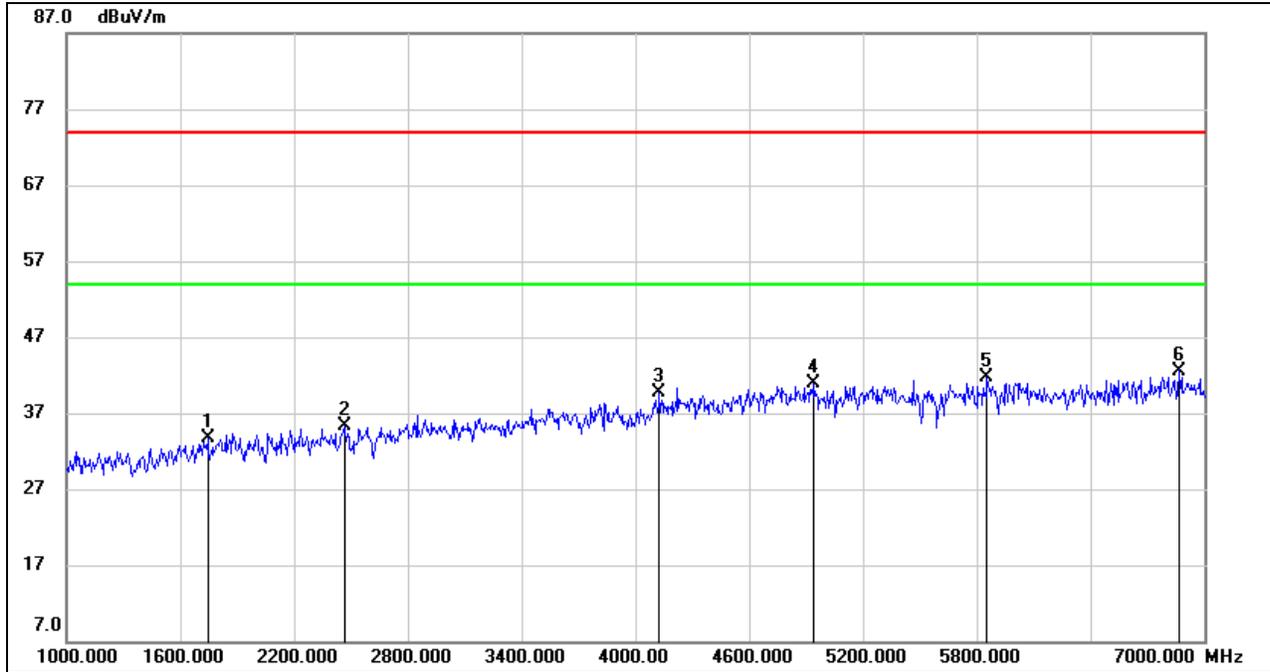

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1744.000	44.26	-10.52	33.74	74.00	-40.26	peak
2	2464.000	43.82	-8.52	35.30	74.00	-38.70	peak
3	4126.000	42.15	-2.50	39.65	74.00	-34.35	peak
4	4942.000	40.16	0.76	40.92	74.00	-33.08	peak
5	5854.000	39.63	2.12	41.75	74.00	-32.25	peak
6	6868.000	38.00	4.60	42.60	74.00	-31.40	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

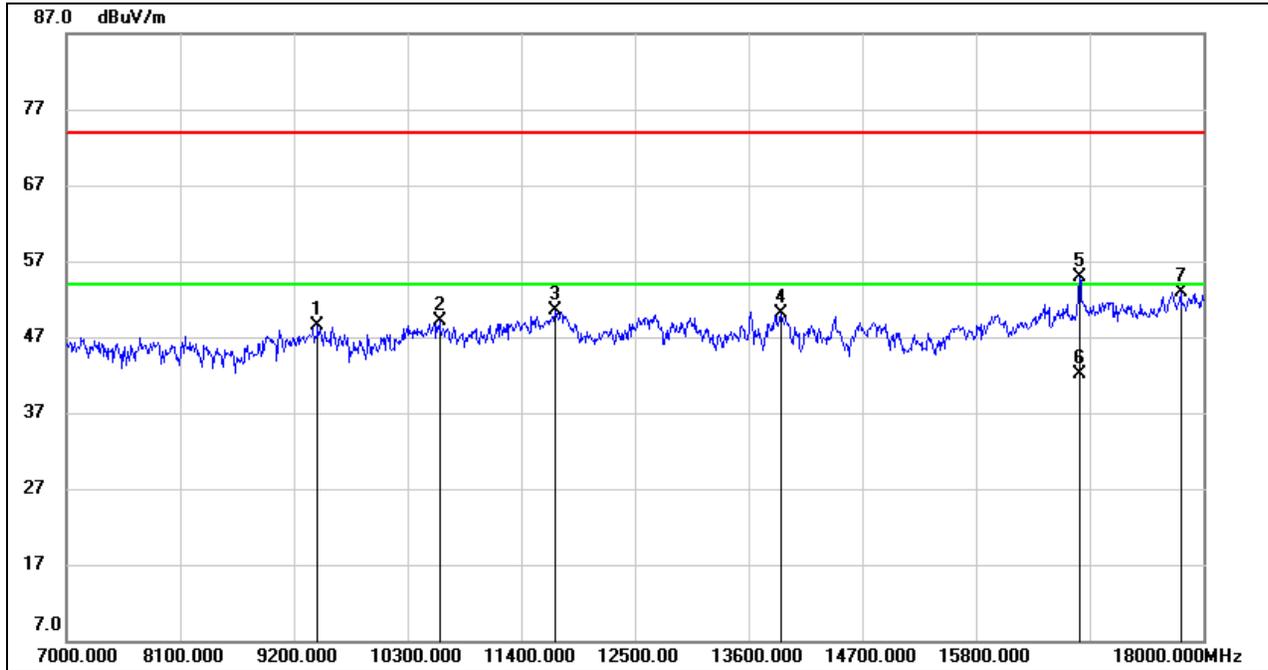


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	38.44	10.09	48.53	74.00	-25.47	peak
2	10608.000	37.22	11.86	49.08	74.00	-24.92	peak
3	11730.000	36.29	14.25	50.54	74.00	-23.46	peak
4	13908.000	33.88	16.26	50.14	74.00	-23.86	peak
5	16800.000	34.84	20.12	54.96	74.00	-19.04	peak
6	16800.000	22.04	20.12	42.16	54.00	-11.84	AVG
7	17780.000	29.58	23.35	52.93	74.00	-21.07	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

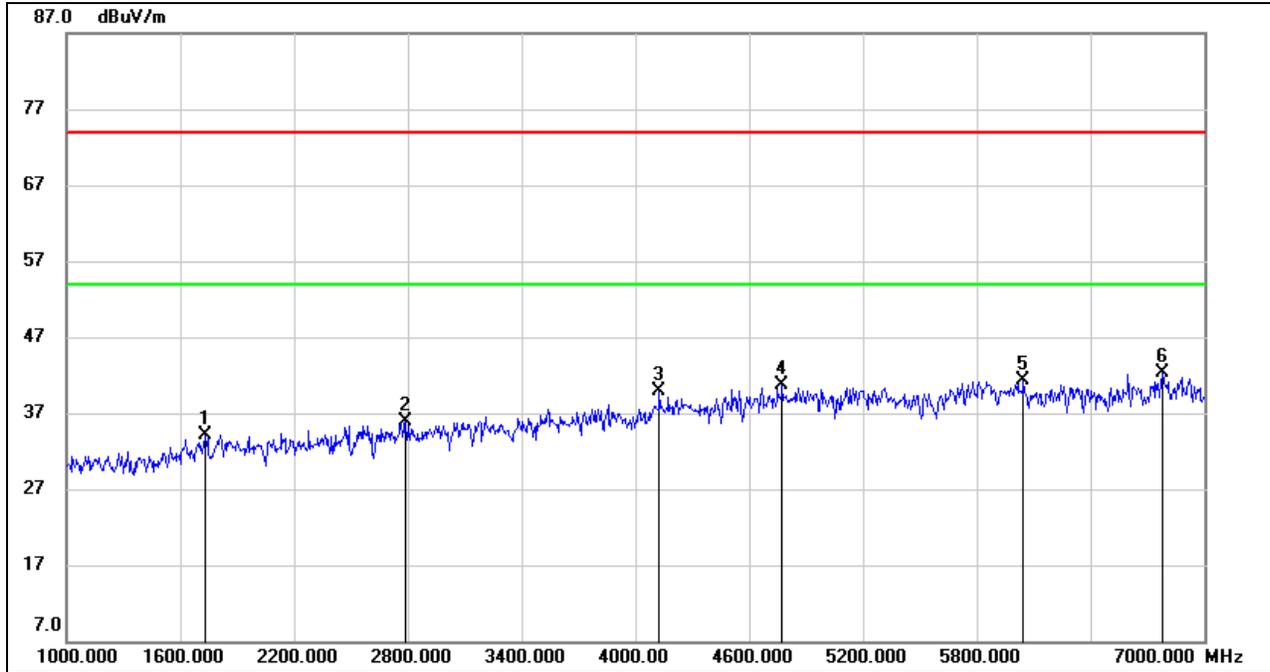

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1732.000	44.81	-10.62	34.19	74.00	-39.81	peak
2	2788.000	42.84	-7.01	35.83	74.00	-38.17	peak
3	4126.000	42.40	-2.50	39.90	74.00	-34.10	peak
4	4774.000	40.33	0.36	40.69	74.00	-33.31	peak
5	6046.000	38.79	2.57	41.36	74.00	-32.64	peak
6	6778.000	37.81	4.44	42.25	74.00	-31.75	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

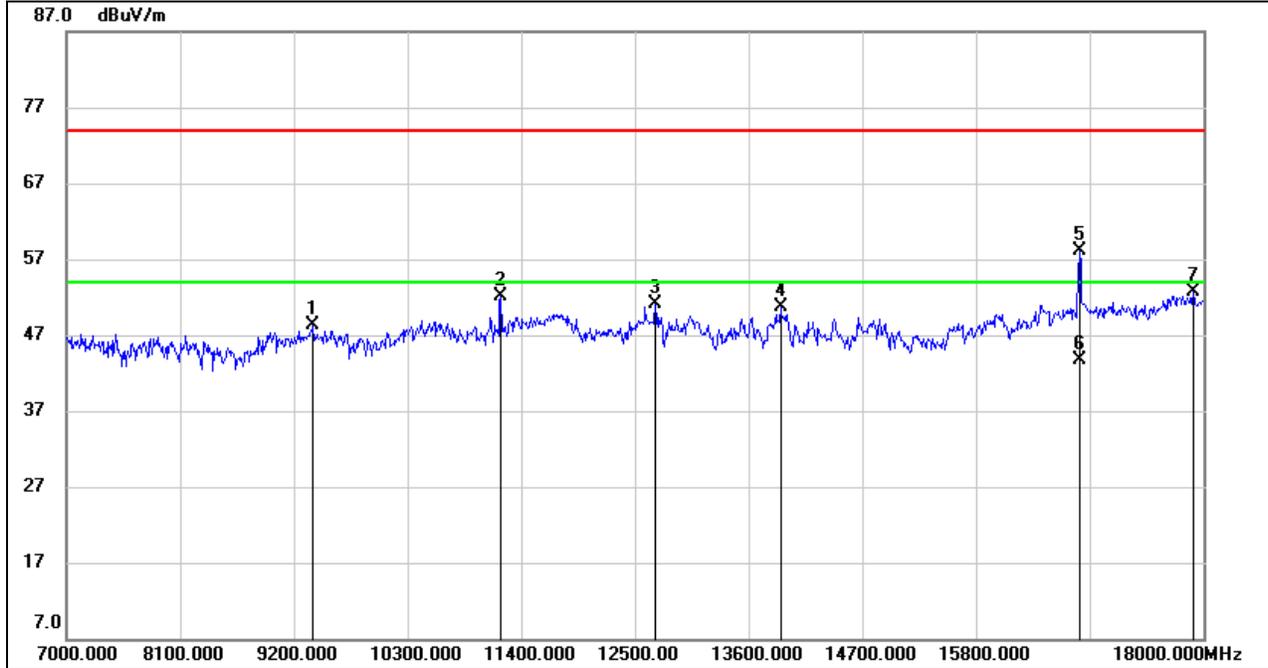


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9387.000	38.37	9.94	48.31	74.00	-25.69	peak
2	11202.000	39.08	13.04	52.12	74.00	-21.88	peak
3	12698.000	35.88	15.25	51.13	74.00	-22.87	peak
4	13908.000	34.49	16.26	50.75	74.00	-23.25	peak
5	16800.000	37.89	20.12	58.01	74.00	-15.99	peak
6	16800.000	23.60	20.12	43.72	54.00	-10.28	AVG
7	17901.000	29.04	23.59	52.63	74.00	-21.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

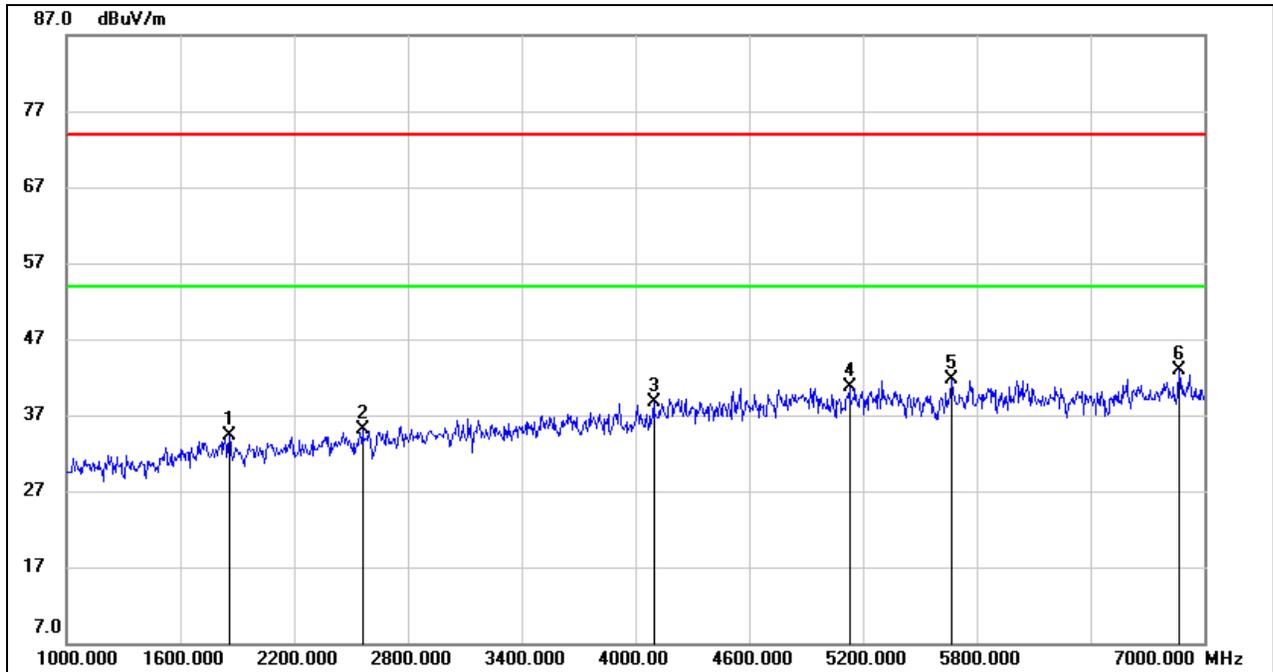

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1858.000	44.45	-10.14	34.31	74.00	-39.69	peak
2	2560.000	43.36	-8.29	35.07	74.00	-38.93	peak
3	4096.000	41.45	-2.80	38.65	74.00	-35.35	peak
4	5128.000	39.25	1.54	40.79	74.00	-33.21	peak
5	5668.000	39.73	1.99	41.72	74.00	-32.28	peak
6	6868.000	38.34	4.60	42.94	74.00	-31.06	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

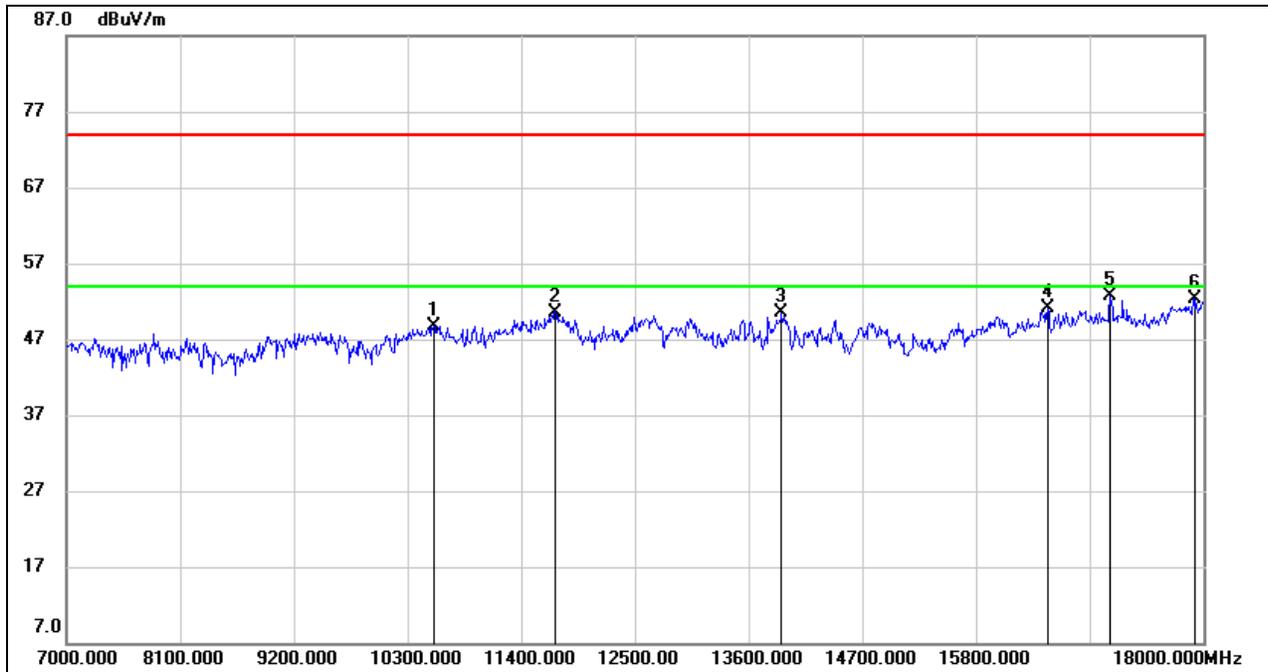


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10553.000	37.03	11.70	48.73	74.00	-25.27	peak
2	11730.000	36.35	14.25	50.60	74.00	-23.40	peak
3	13919.000	34.35	16.24	50.59	74.00	-23.41	peak
4	16493.000	31.67	19.42	51.09	74.00	-22.91	peak
5	17098.000	31.65	21.07	52.72	74.00	-21.28	peak
6	17923.000	28.76	23.61	52.37	74.00	-21.63	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

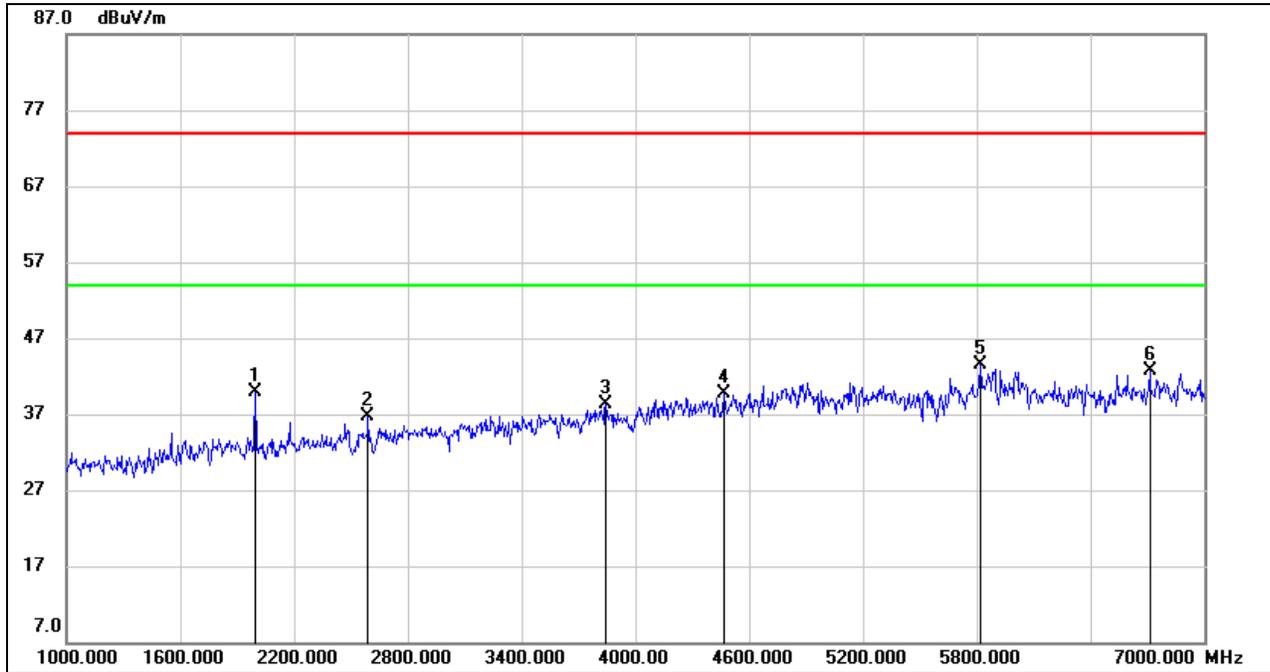

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1996.000	50.21	-10.24	39.97	74.00	-34.03	peak
2	2590.000	44.94	-8.21	36.73	74.00	-37.27	peak
3	3844.000	41.77	-3.51	38.26	74.00	-35.74	peak
4	4468.000	41.17	-1.54	39.63	74.00	-34.37	peak
5	5818.000	41.44	2.00	43.44	74.00	-30.56	peak
6	6712.000	38.15	4.46	42.61	74.00	-31.39	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.


7-18GHz

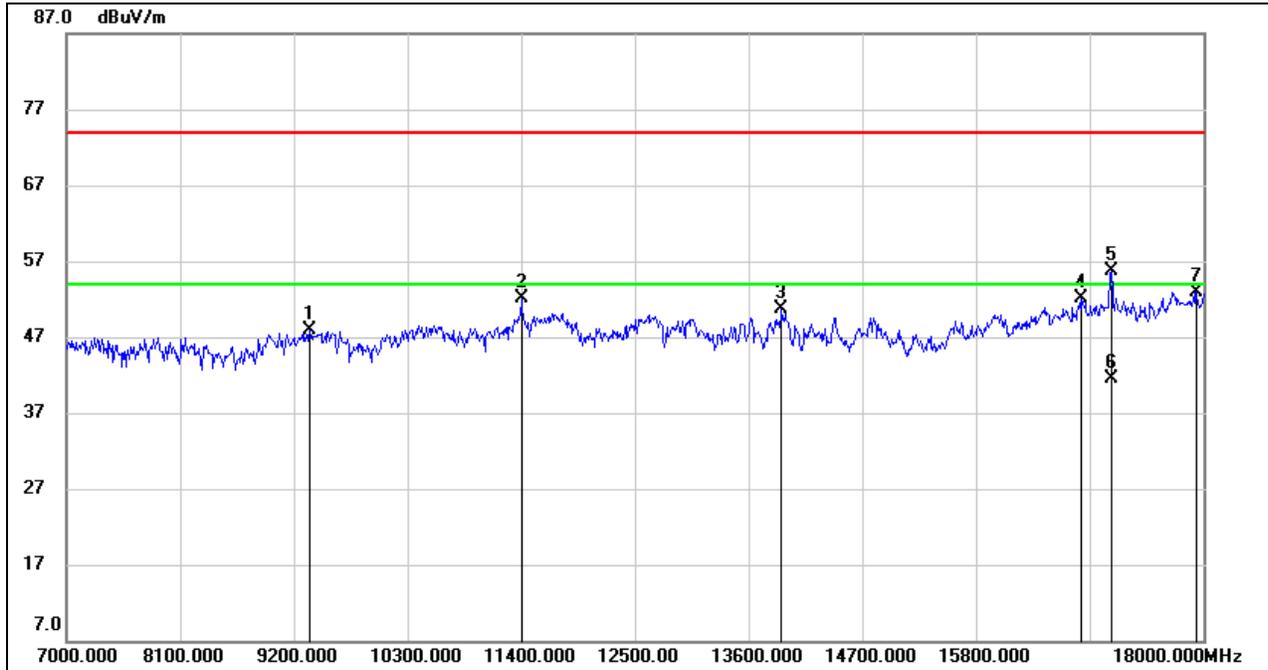

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	38.05	9.78	47.83	74.00	-26.17	peak
2	11400.000	38.60	13.45	52.05	74.00	-21.95	peak
3	13919.000	34.39	16.24	50.63	74.00	-23.37	peak
4	16812.000	31.91	20.14	52.05	74.00	-21.95	peak
5	17100.000	34.54	21.08	55.62	74.00	-18.38	peak
6	17100.000	20.50	21.08	41.58	54.00	-12.42	AVG
7	17934.000	29.37	23.62	52.99	74.00	-21.01	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.1.4. UNII-3 BAND
ANTENNA 2 TEST RESULTS (WORST CASE)
RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)
PEAK

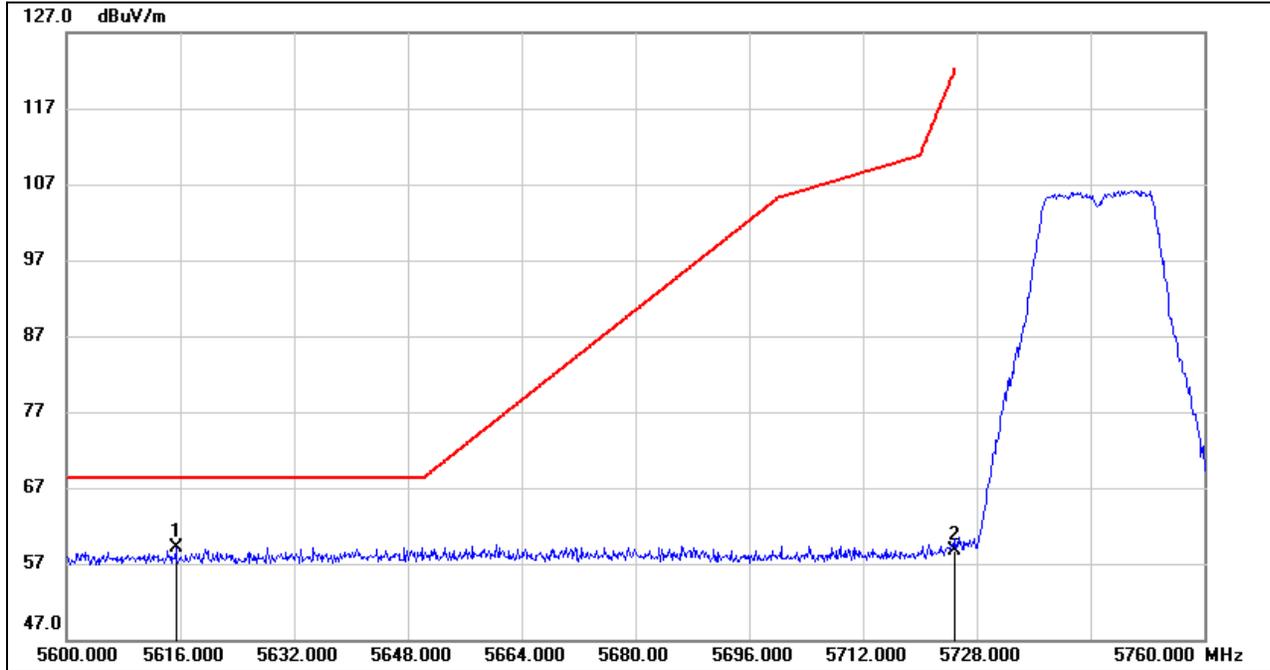


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5615.360	17.62	41.47	59.09	68.20	-9.11	peak
2	5725.000	17.19	41.61	58.80	122.20	-63.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

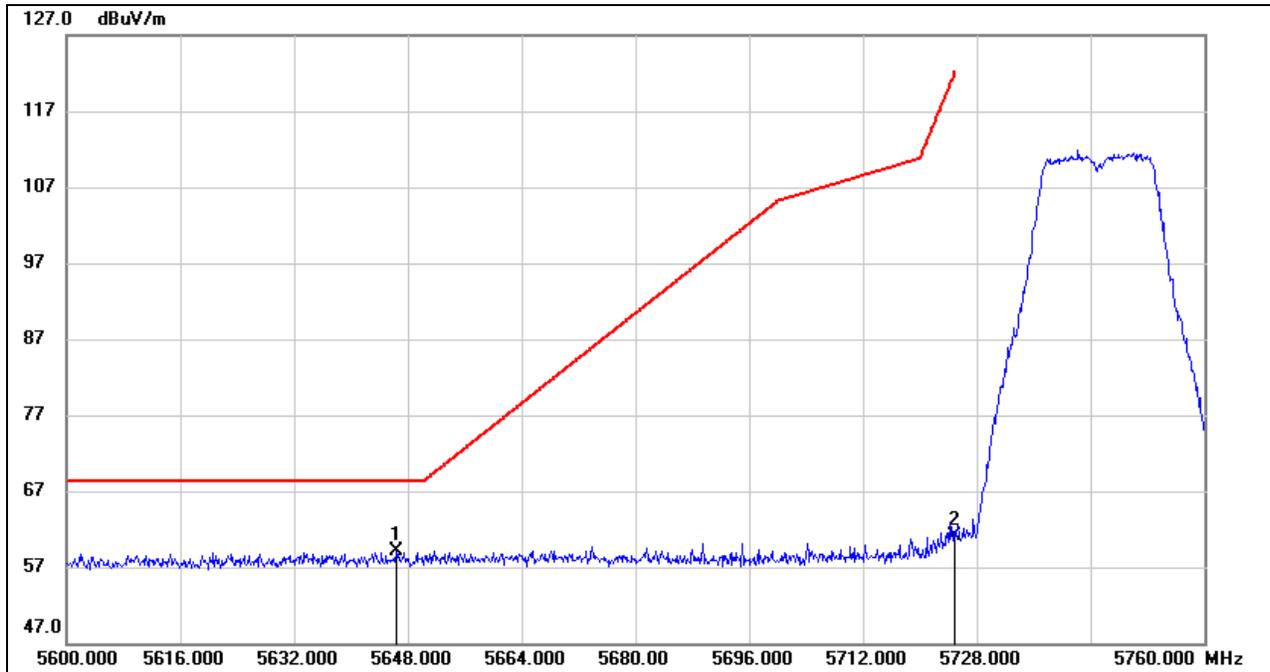


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.400	17.62	41.48	59.10	68.20	-9.10	peak
2	5725.000	19.52	41.61	61.13	122.20	-61.07	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

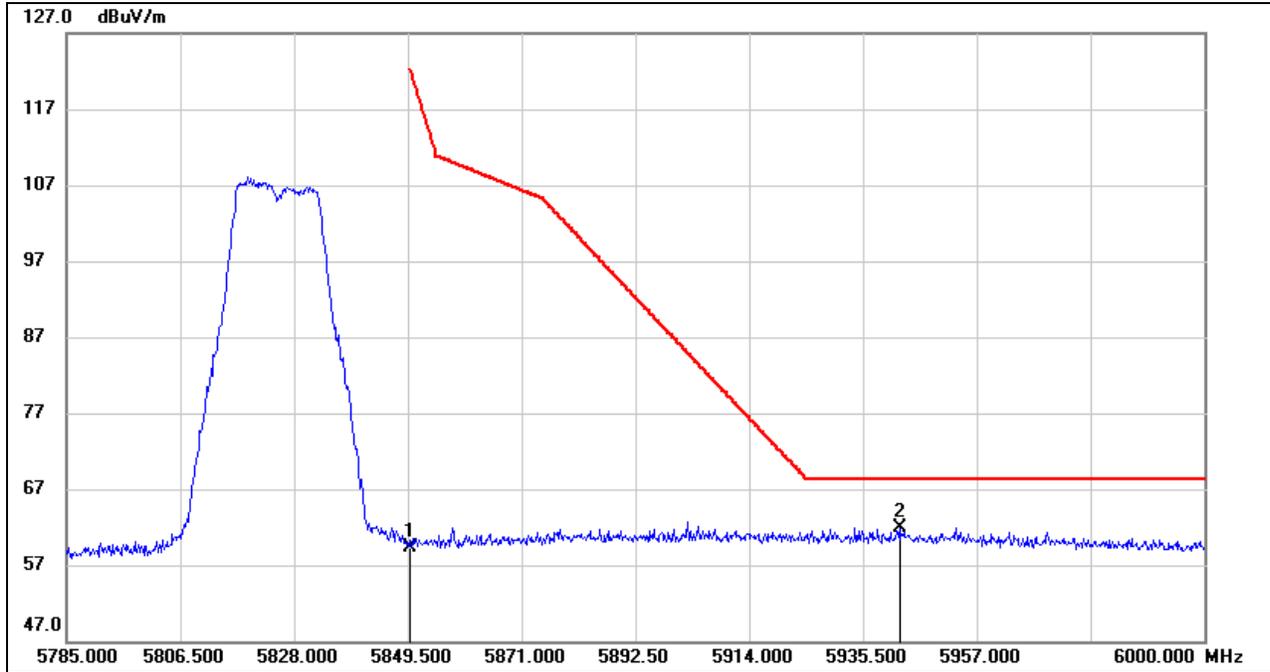


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	16.34	42.89	59.23	122.20	-62.97	peak
2	5942.380	18.83	43.12	61.95	68.20	-6.25	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

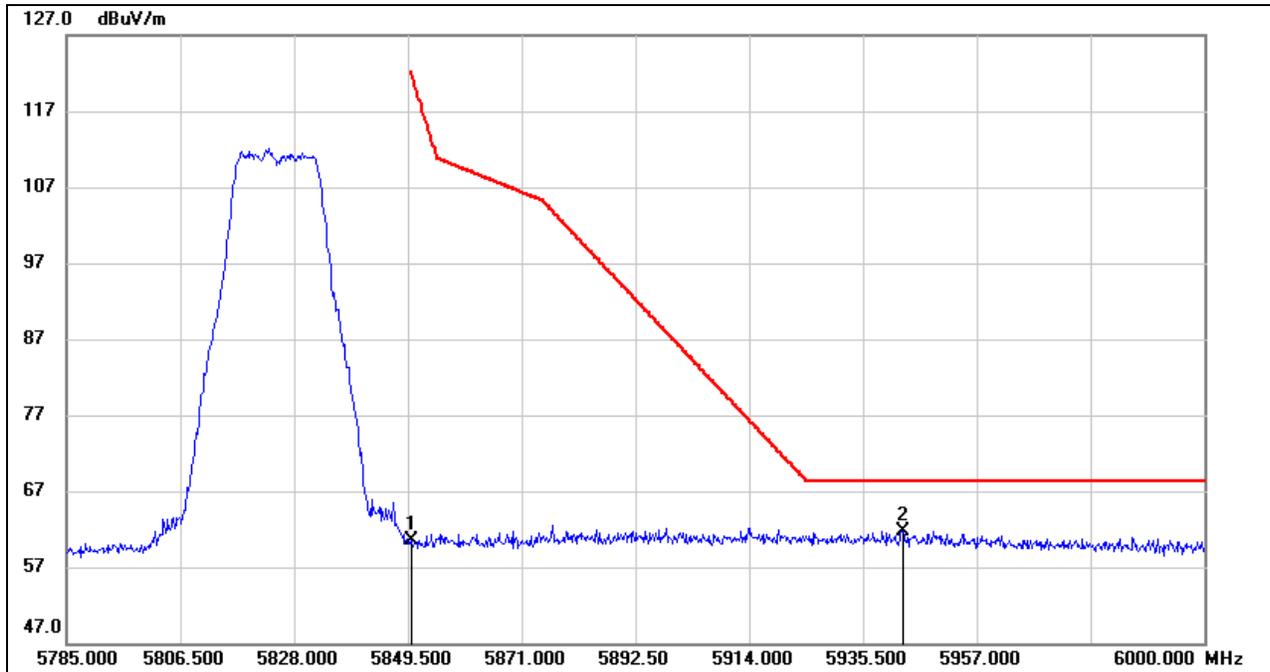


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	17.63	42.89	60.52	122.20	-61.68	peak
2	5943.025	18.68	43.11	61.79	68.20	-6.41	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

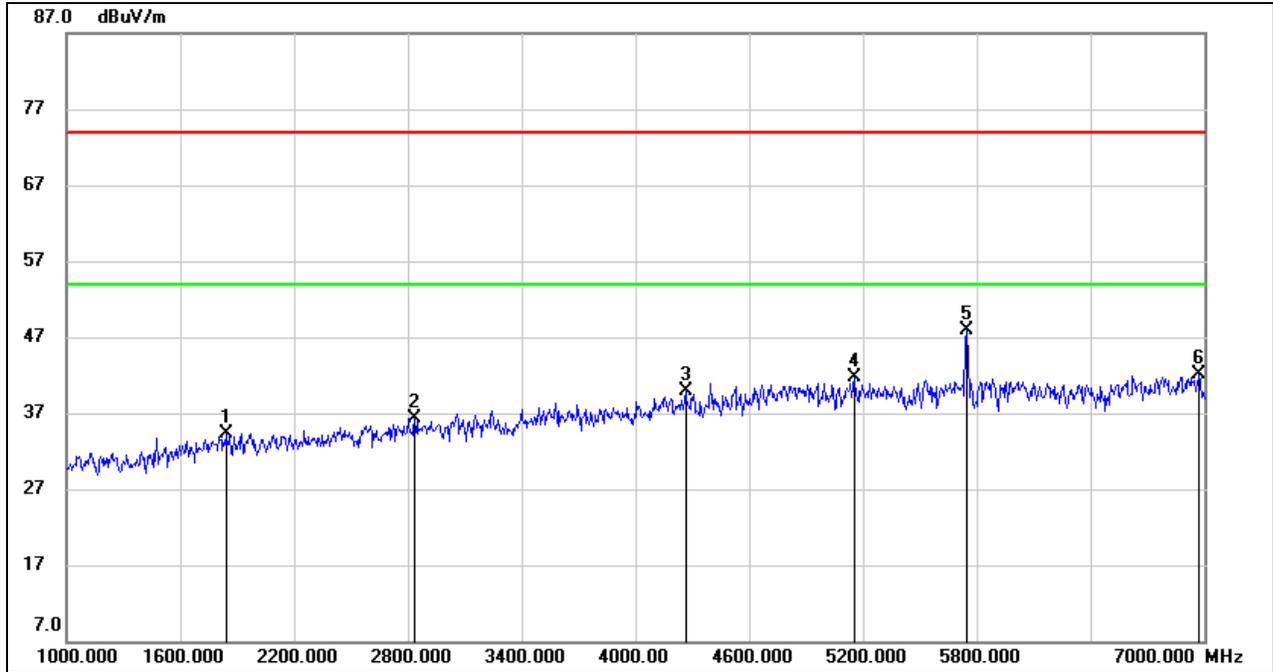

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1840.000	44.53	-10.13	34.40	74.00	-39.60	peak
2	2836.000	43.19	-6.79	36.40	74.00	-37.60	peak
3	4264.000	41.84	-1.84	40.00	74.00	-34.00	peak
4	5152.000	40.11	1.66	41.77	74.00	-32.23	peak
5	5746.000	45.85	1.97	47.82	74.00	-26.18	peak
6	6970.000	37.22	4.83	42.05	74.00	-31.95	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

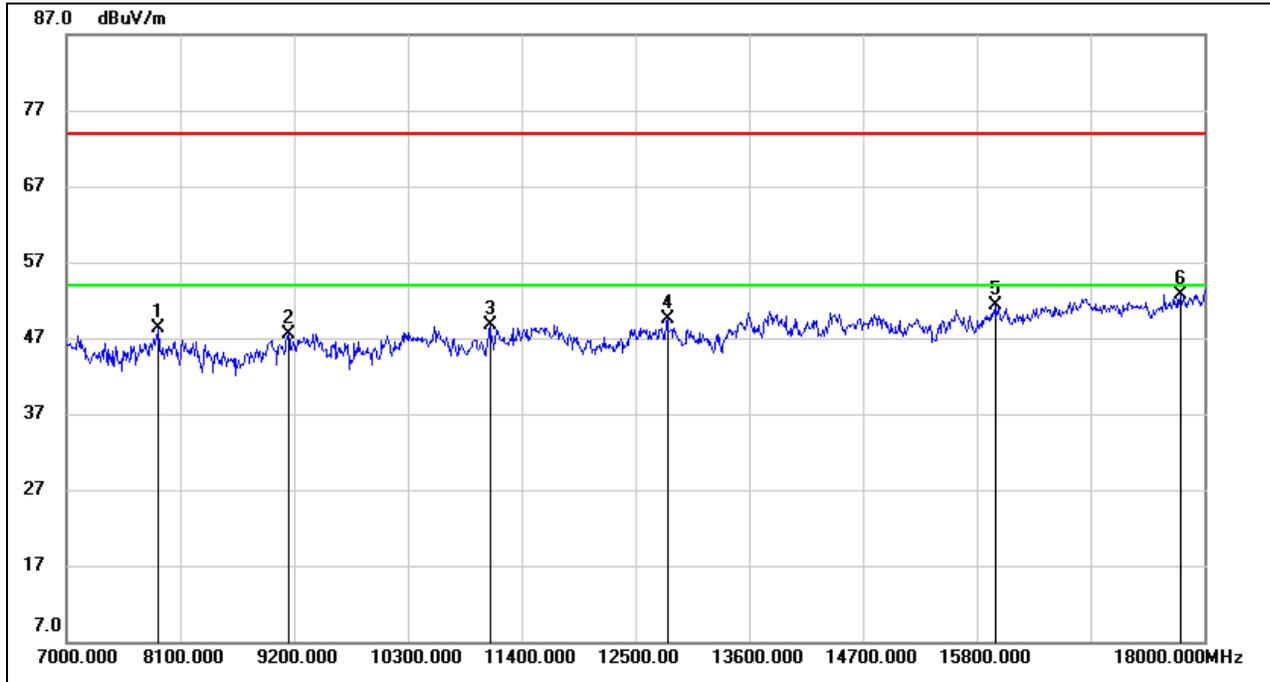


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	40.68	7.66	48.34	74.00	-25.66	peak
2	9145.000	38.28	9.22	47.50	74.00	-26.50	peak
3	11092.000	36.03	12.65	48.68	74.00	-25.32	peak
4	12808.000	33.32	16.09	49.41	74.00	-24.59	peak
5	15987.000	33.50	17.79	51.29	74.00	-22.71	peak
6	17769.000	29.61	23.12	52.73	74.00	-21.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

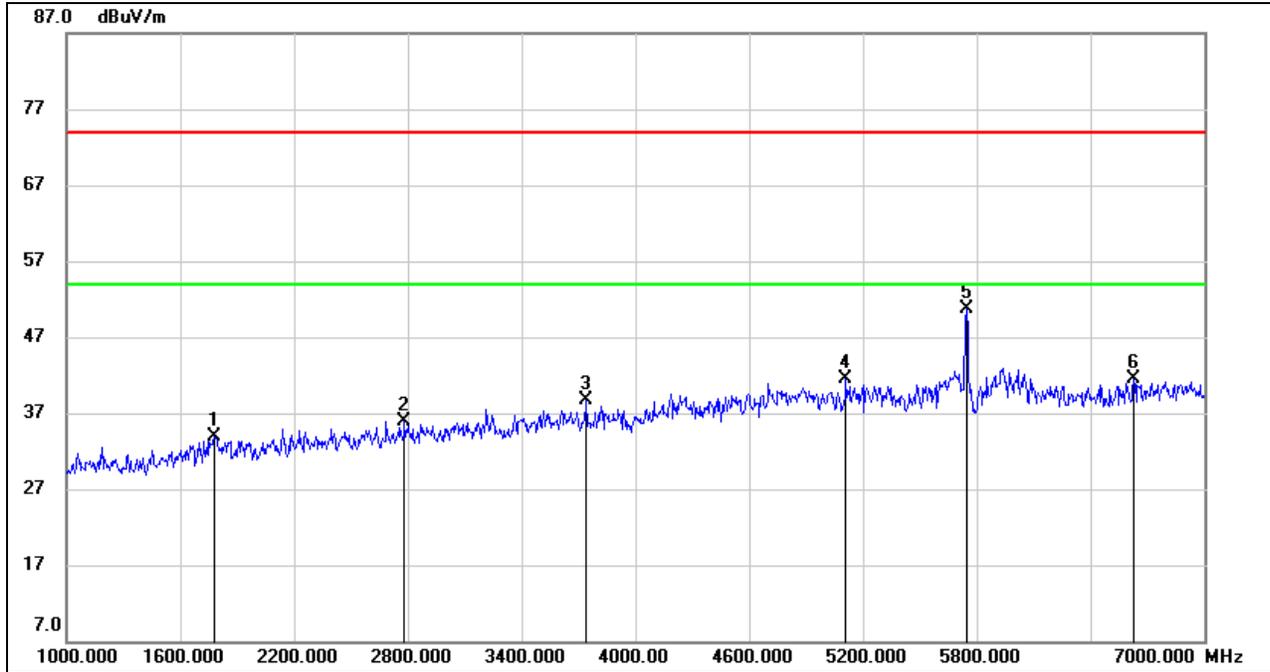

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1780.000	44.20	-10.26	33.94	74.00	-40.06	peak
2	2782.000	43.01	-7.06	35.95	74.00	-38.05	peak
3	3742.000	42.40	-3.75	38.65	74.00	-35.35	peak
4	5110.000	40.01	1.43	41.44	74.00	-32.56	peak
5	5746.000	48.68	1.97	50.65	74.00	-23.35	peak
6	6628.000	36.96	4.47	41.43	74.00	-32.57	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

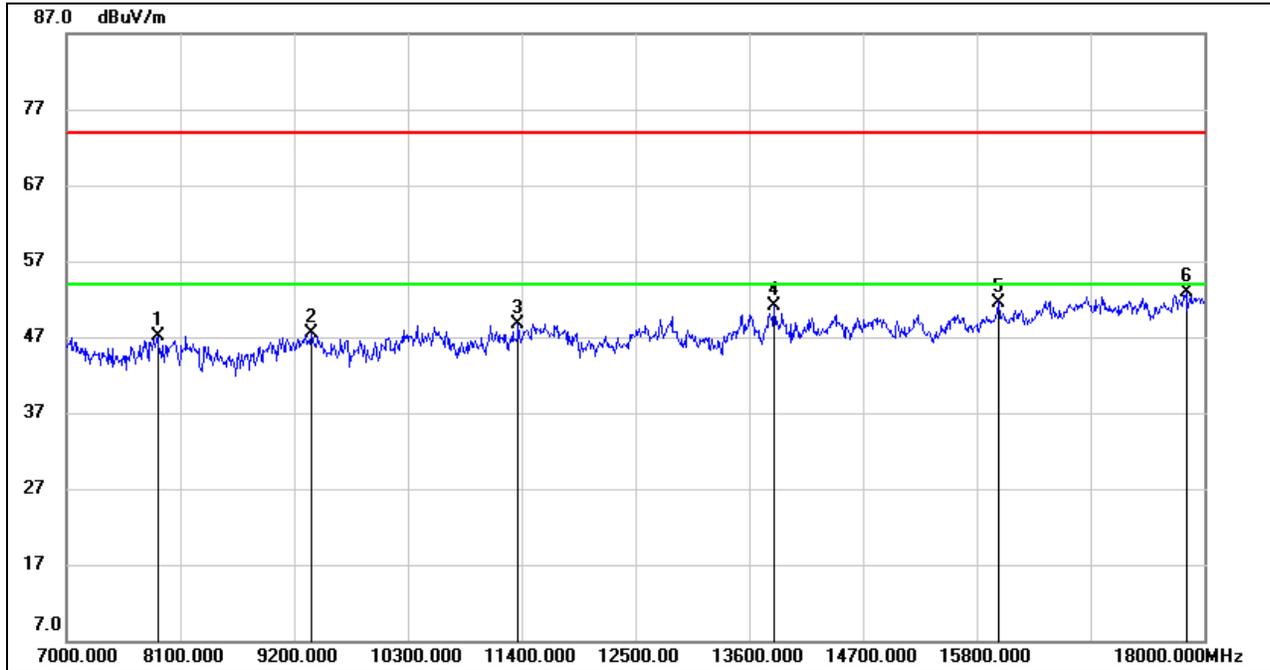


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7880.000	39.41	7.72	47.13	74.00	-26.87	peak
2	9365.000	37.81	9.72	47.53	74.00	-26.47	peak
3	11367.000	36.14	12.58	48.72	74.00	-25.28	peak
4	13842.000	34.44	16.69	51.13	74.00	-22.87	peak
5	16009.000	33.75	17.85	51.60	74.00	-22.40	peak
6	17824.000	29.48	23.42	52.90	74.00	-21.10	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

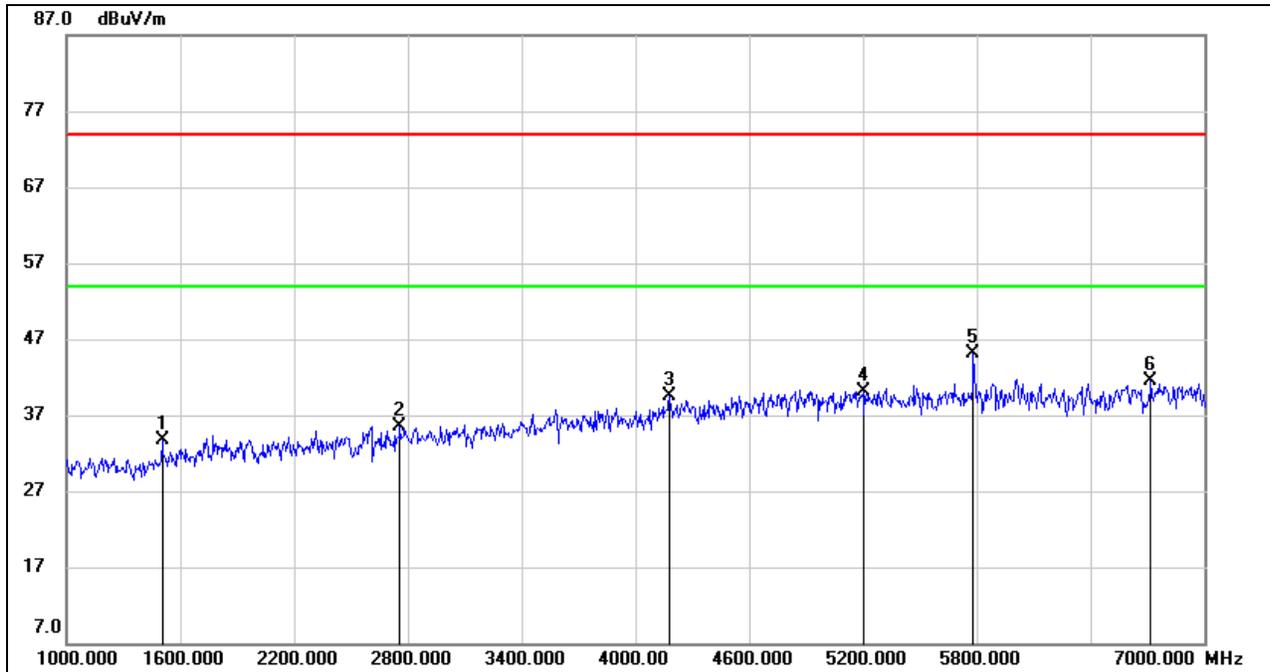

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1504.000	45.89	-12.26	33.63	74.00	-40.37	peak
2	2758.000	42.66	-7.20	35.46	74.00	-38.54	peak
3	4180.000	41.39	-1.98	39.41	74.00	-34.59	peak
4	5200.000	38.22	1.92	40.14	74.00	-33.86	peak
5	5782.000	43.20	1.95	45.15	74.00	-28.85	peak
6	6718.000	37.13	4.45	41.58	74.00	-32.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

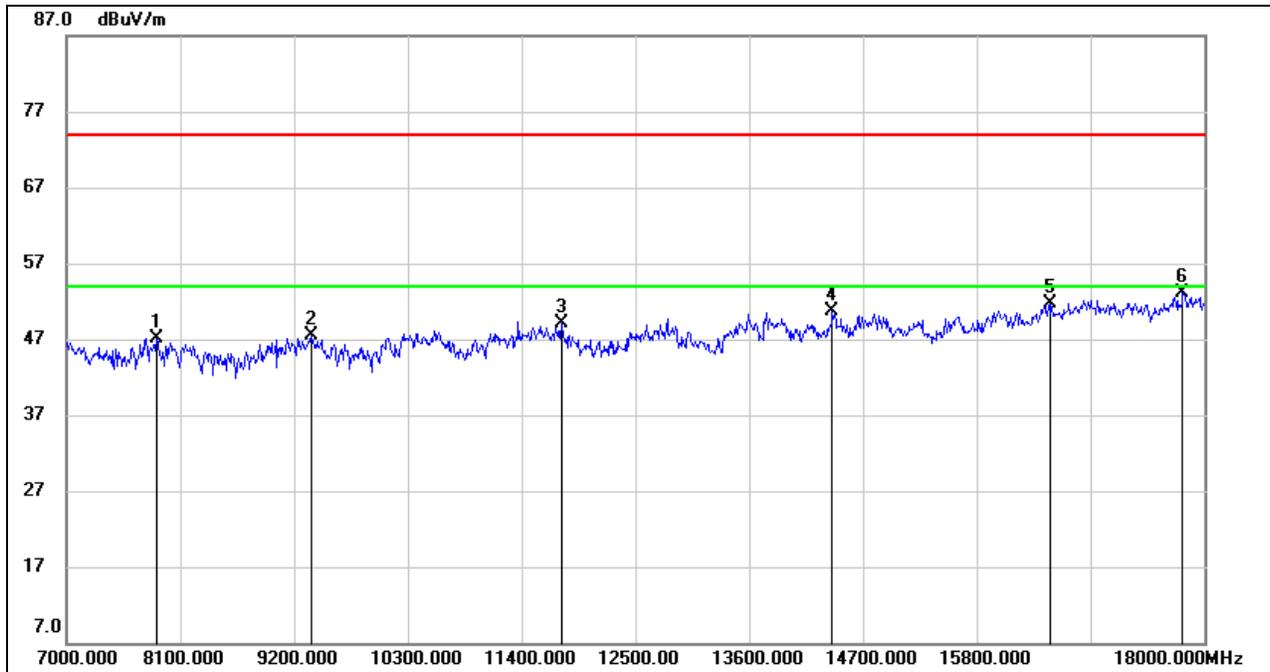


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7869.000	39.27	7.79	47.06	74.00	-26.94	peak
2	9365.000	37.75	9.72	47.47	74.00	-26.53	peak
3	11785.000	35.92	13.22	49.14	74.00	-24.86	peak
4	14403.000	34.07	16.68	50.75	74.00	-23.25	peak
5	16504.000	32.08	19.61	51.69	74.00	-22.31	peak
6	17791.000	29.84	23.33	53.17	74.00	-20.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

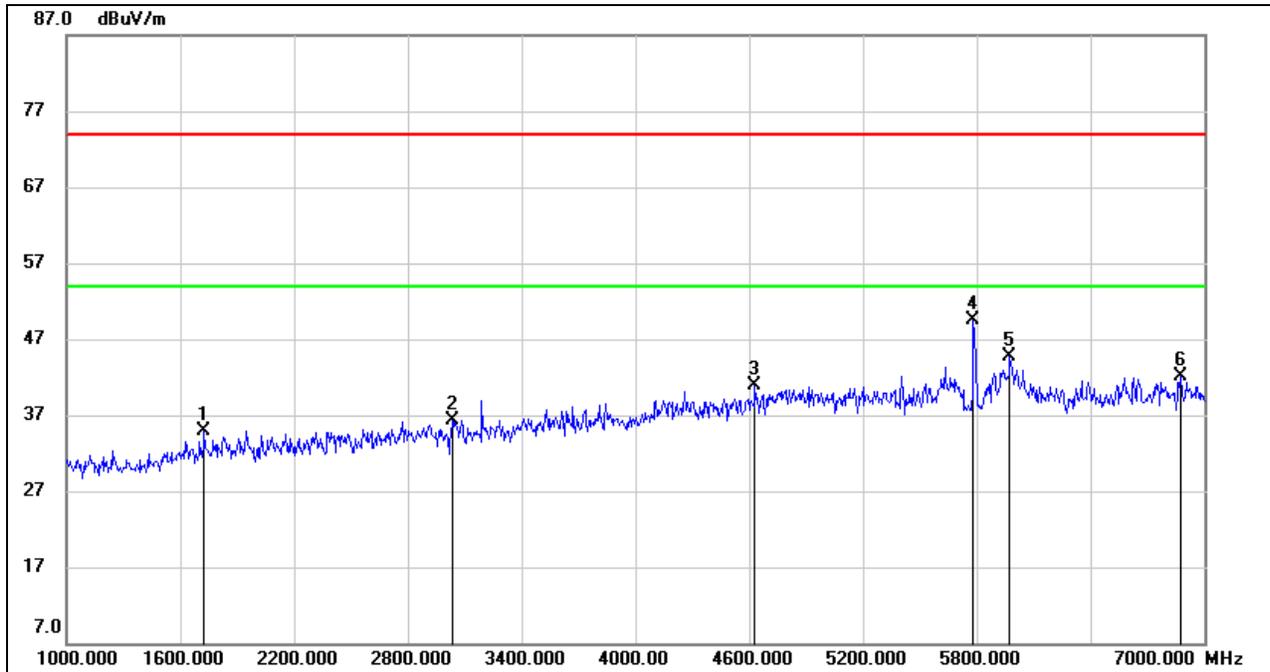

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1726.000	45.59	-10.66	34.93	74.00	-39.07	peak
2	3034.000	42.38	-6.00	36.38	74.00	-37.62	peak
3	4630.000	41.39	-0.46	40.93	74.00	-33.07	peak
4	5782.000	47.59	1.95	49.54	74.00	-24.46	peak
5	5974.000	42.27	2.53	44.80	74.00	-29.20	peak
6	6874.000	37.43	4.61	42.04	74.00	-31.96	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

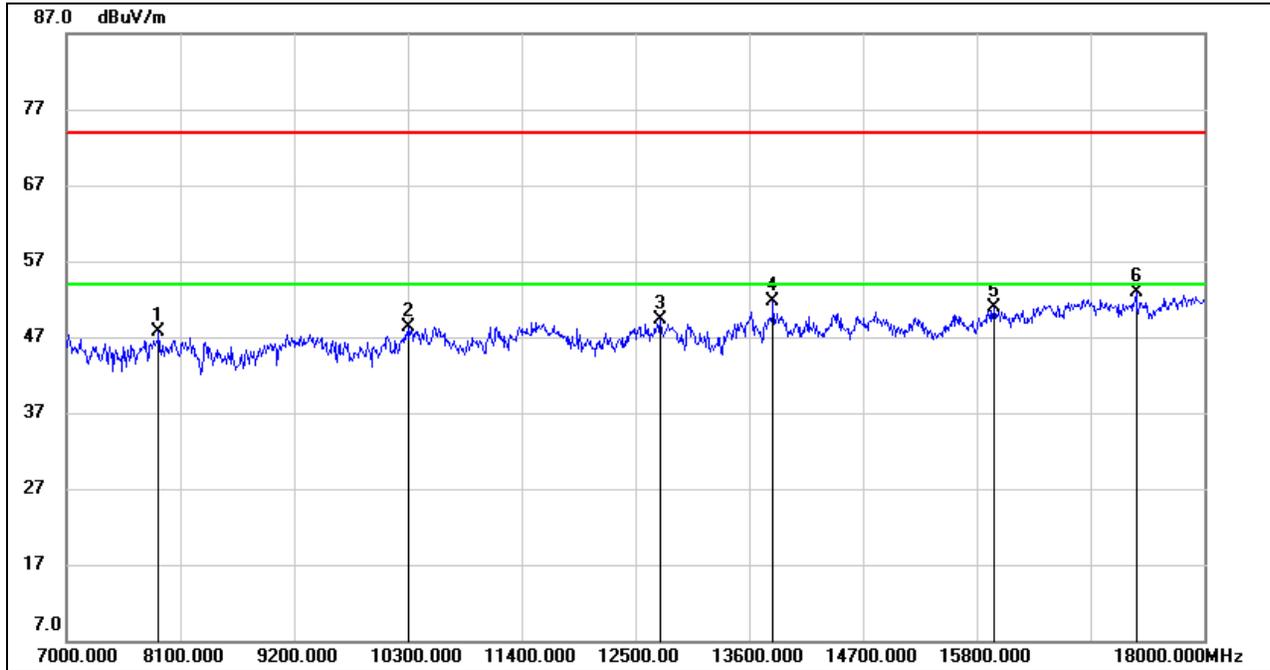


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7891.000	40.12	7.66	47.78	74.00	-26.22	peak
2	10311.000	37.10	11.29	48.39	74.00	-25.61	peak
3	12742.000	34.17	15.16	49.33	74.00	-24.67	peak
4	13831.000	34.92	16.79	51.71	74.00	-22.29	peak
5	15965.000	33.05	17.76	50.81	74.00	-23.19	peak
6	17340.000	31.12	21.74	52.86	74.00	-21.14	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

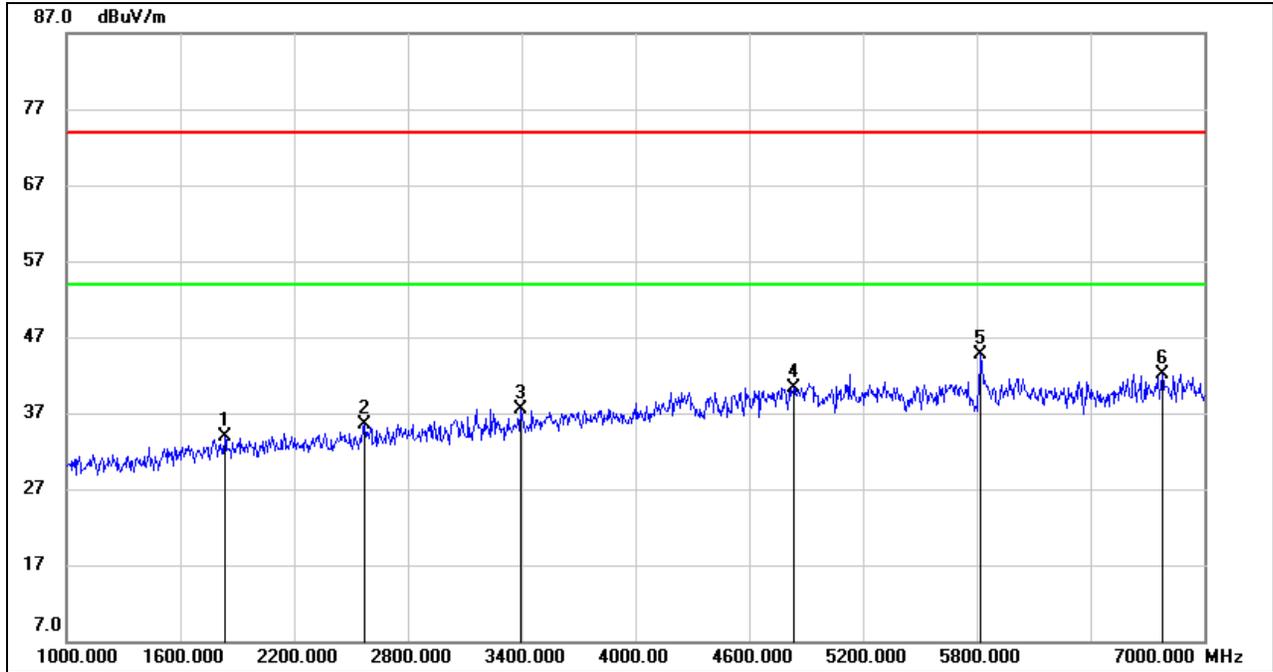

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1834.000	44.08	-10.13	33.95	74.00	-40.05	peak
2	2572.000	43.85	-8.26	35.59	74.00	-38.41	peak
3	3394.000	42.87	-5.45	37.42	74.00	-36.58	peak
4	4834.000	39.80	0.57	40.37	74.00	-33.63	peak
5	5818.000	42.72	2.00	44.72	74.00	-29.28	peak
6	6778.000	37.75	4.44	42.19	74.00	-31.81	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

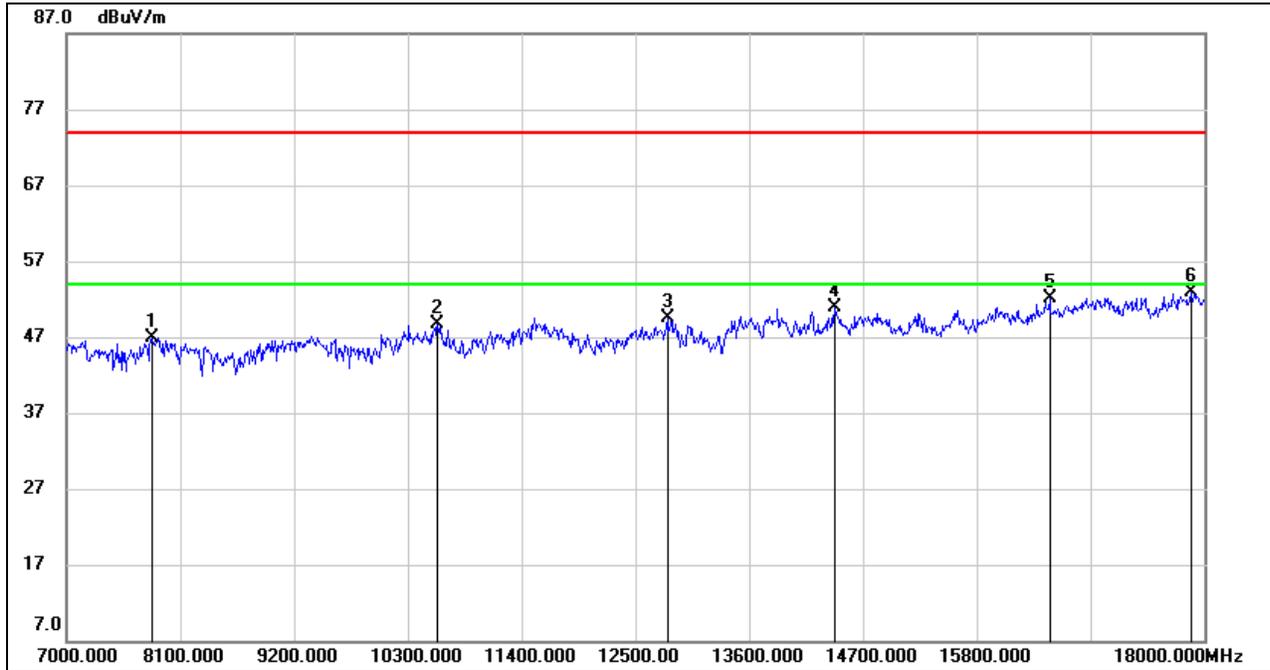


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7825.000	38.81	8.04	46.85	74.00	-27.15	peak
2	10586.000	36.47	12.30	48.77	74.00	-25.23	peak
3	12808.000	33.40	16.09	49.49	74.00	-24.51	peak
4	14425.000	34.18	16.65	50.83	74.00	-23.17	peak
5	16504.000	32.57	19.61	52.18	74.00	-21.82	peak
6	17879.000	29.55	23.40	52.95	74.00	-21.05	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

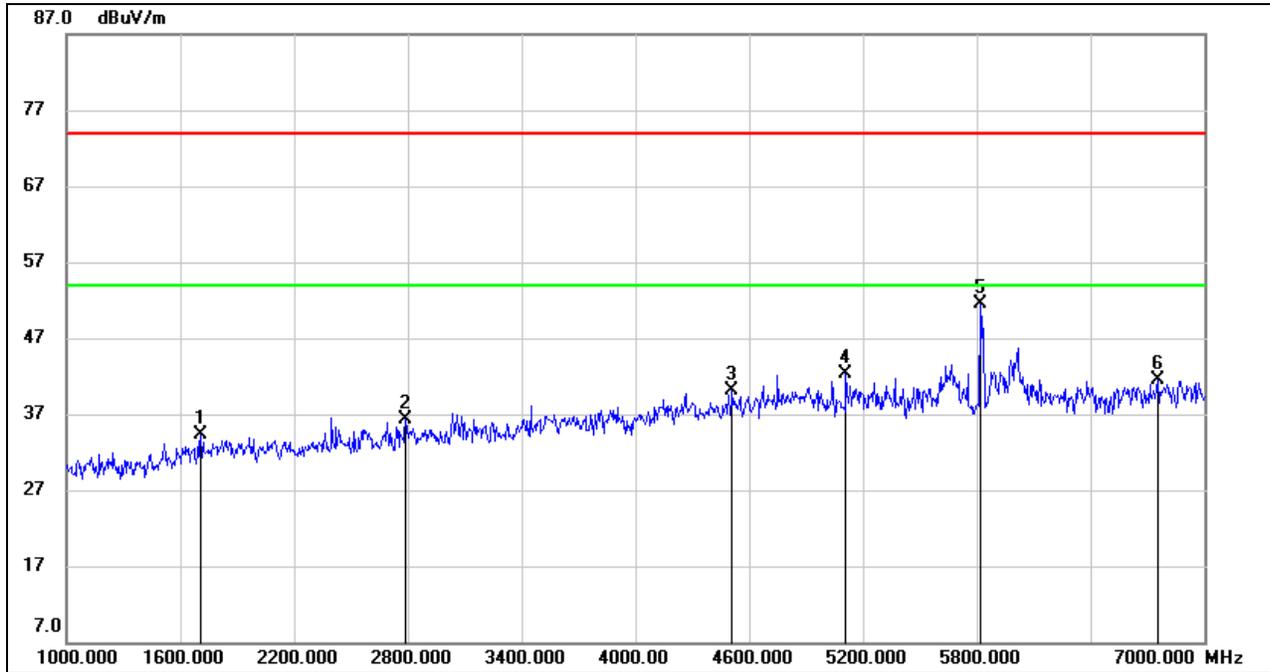

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1708.000	45.01	-10.80	34.21	74.00	-39.79	peak
2	2788.000	43.22	-7.01	36.21	74.00	-37.79	peak
3	4510.000	41.29	-1.26	40.03	74.00	-33.97	peak
4	5110.000	40.95	1.43	42.38	74.00	-31.62	peak
5	5818.000	49.42	2.00	51.42	74.00	-22.58	peak
6	6754.000	37.13	4.45	41.58	74.00	-32.42	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

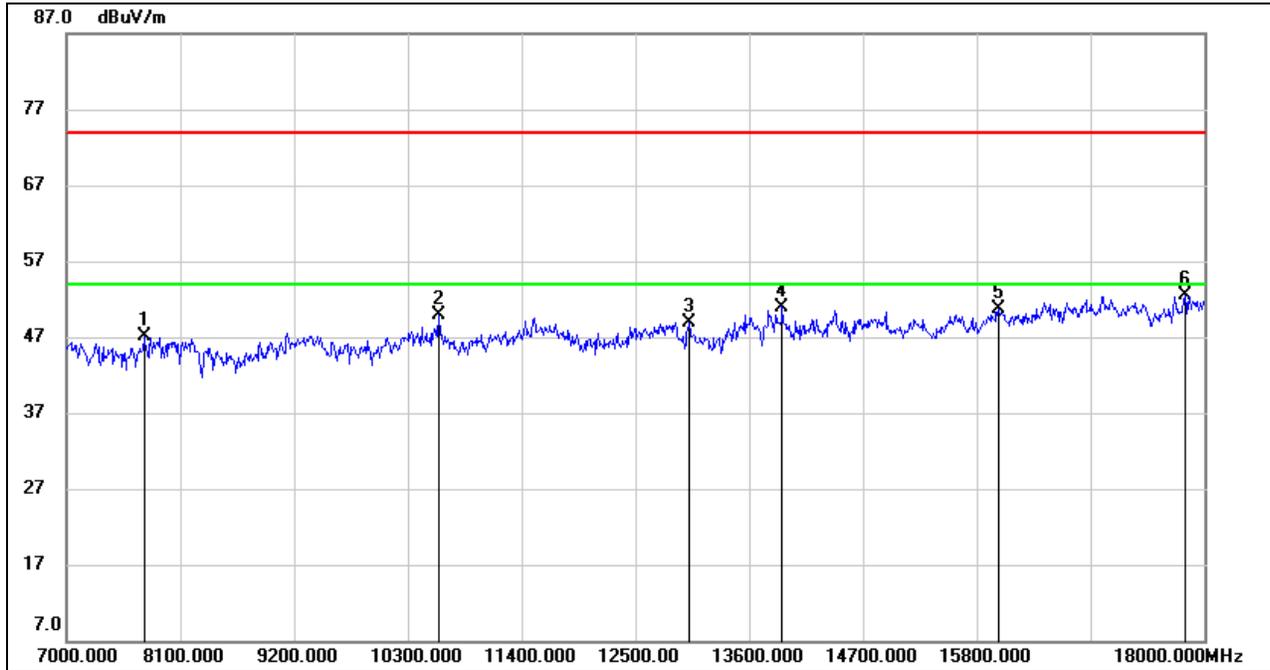

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.000	39.63	7.48	47.11	74.00	-26.89	peak
2	10597.000	37.40	12.43	49.83	74.00	-24.17	peak
3	13017.000	33.76	15.08	48.84	74.00	-25.16	peak
4	13919.000	34.84	16.16	51.00	74.00	-23.00	peak
5	16009.000	32.76	17.85	50.61	74.00	-23.39	peak
6	17813.000	29.10	23.41	52.51	74.00	-21.49	peak


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.2. 802.11n HT20 CDD MIMO MODE

8.2.1. UNII-1 BAND

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

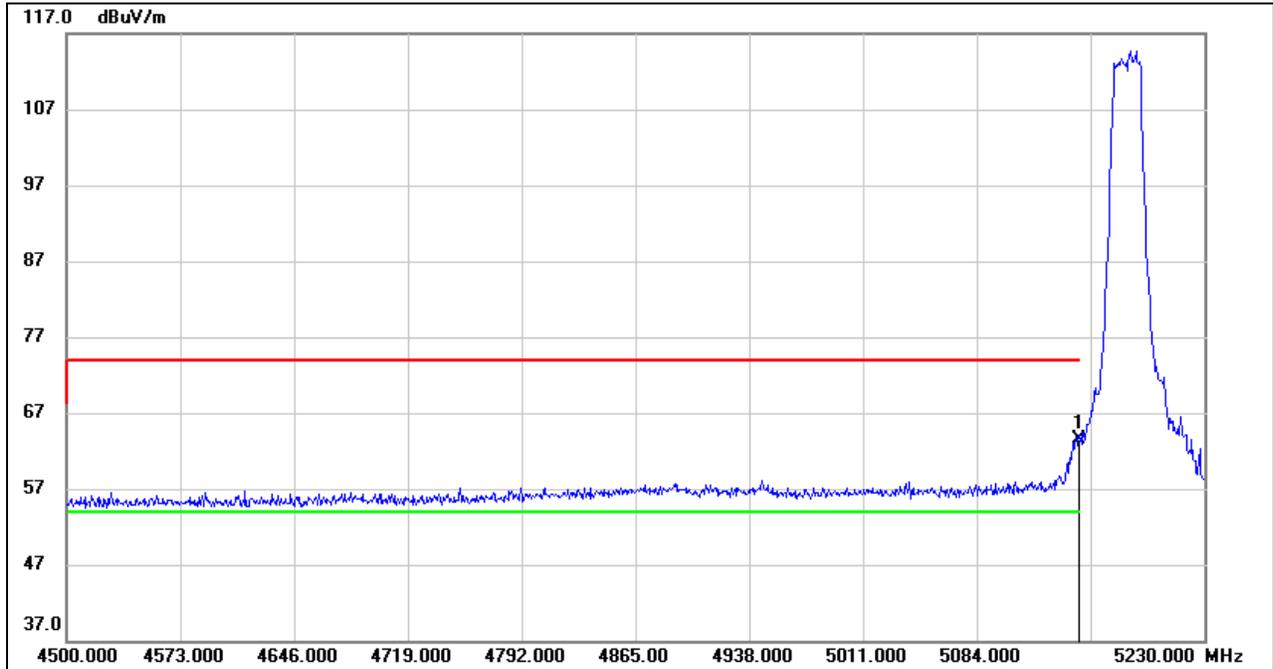

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	22.98	40.46	63.44	74.00	-10.56	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

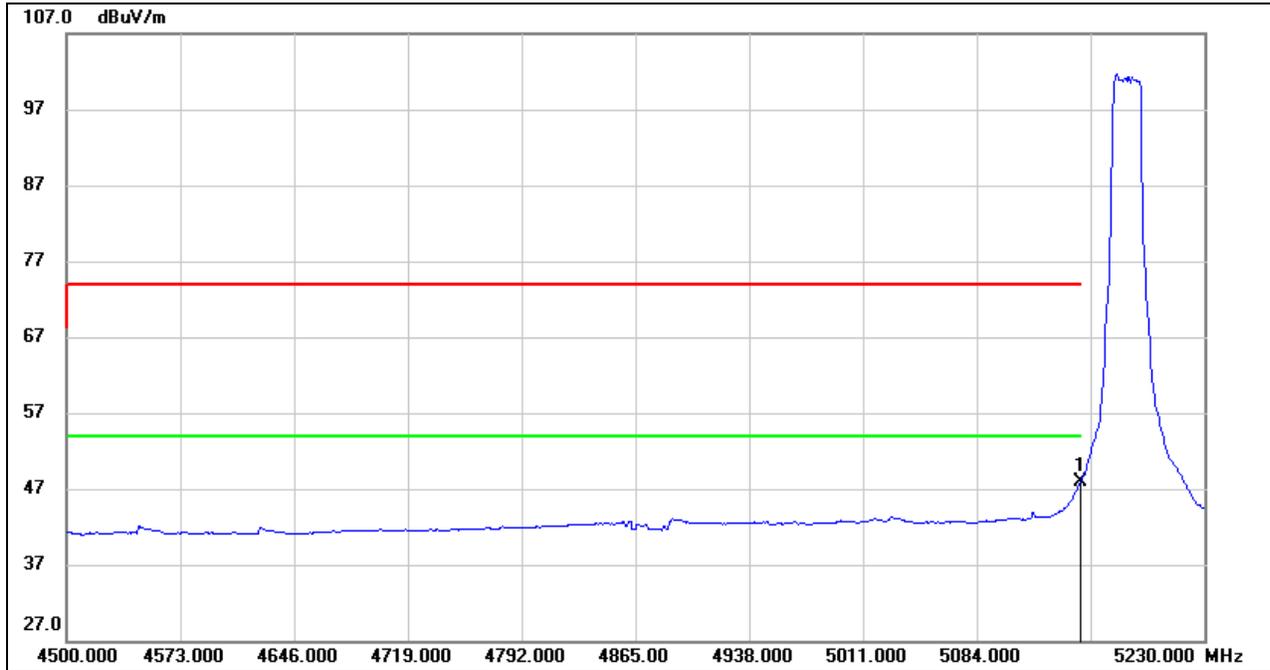


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.43	40.46	47.89	74.00	-26.11	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


PEAK

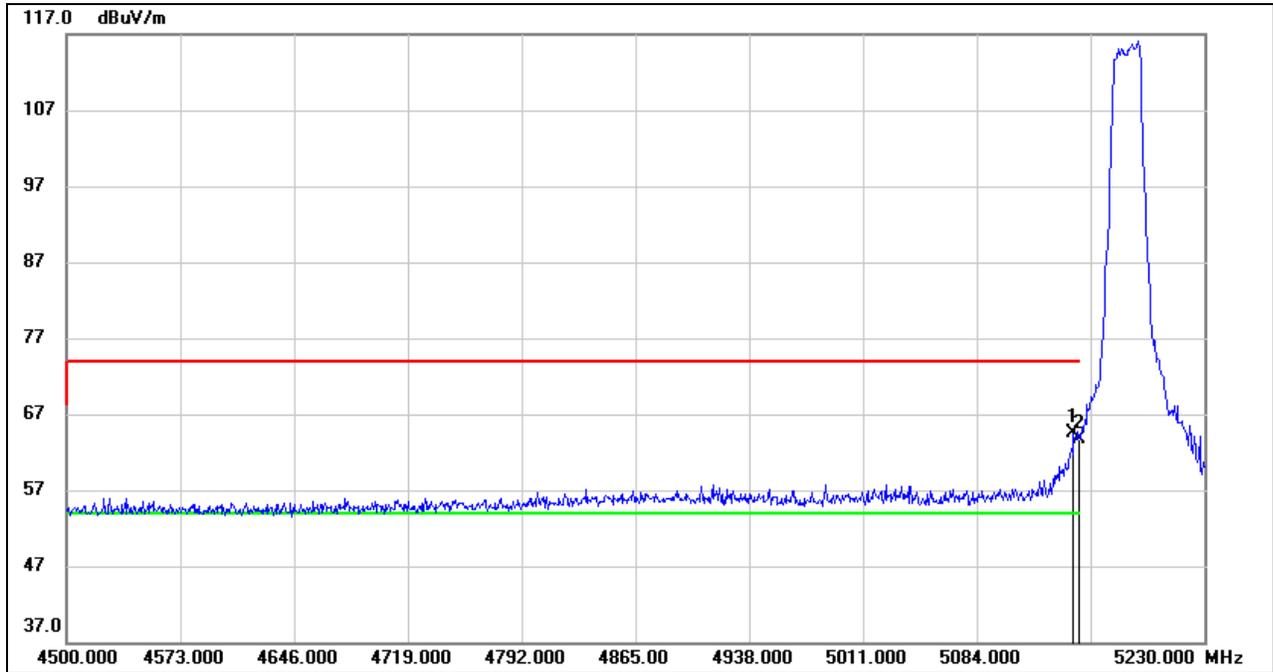

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	24.05	40.45	64.50	74.00	-9.50	peak
2	5150.000	23.23	40.46	63.69	74.00	-10.31	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

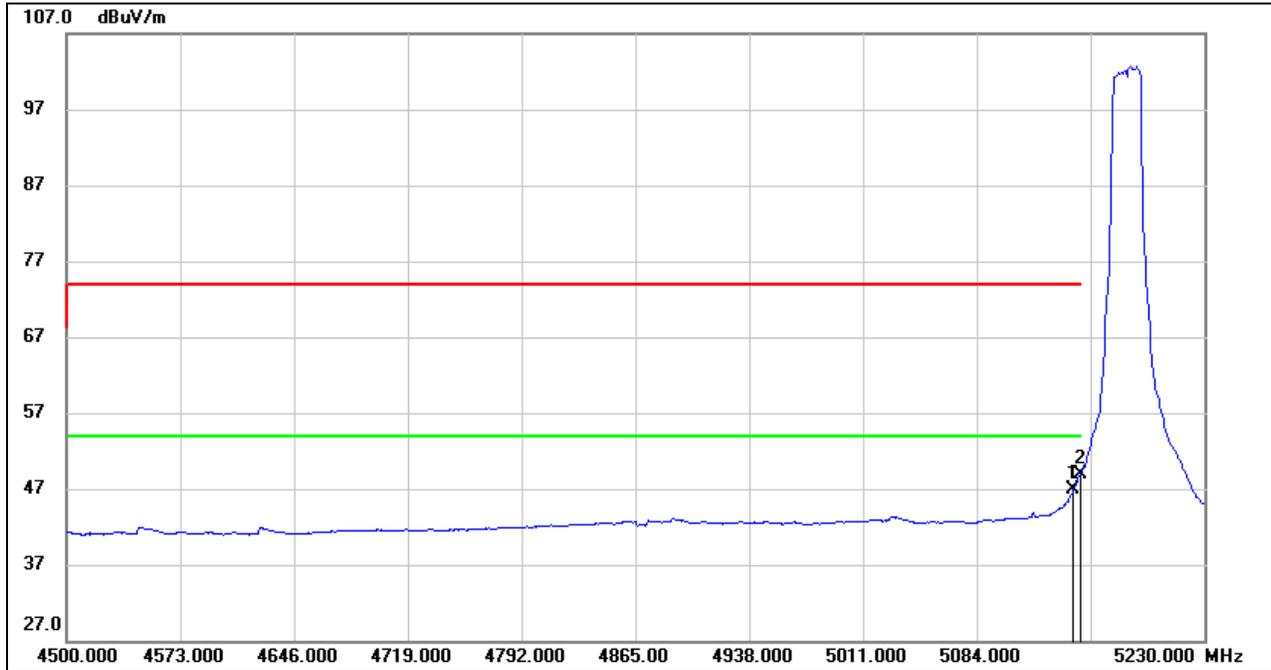


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	6.36	40.45	46.81	54.00	-7.19	AVG
2	5150.000	8.42	40.46	48.88	54.00	-5.12	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


PEAK

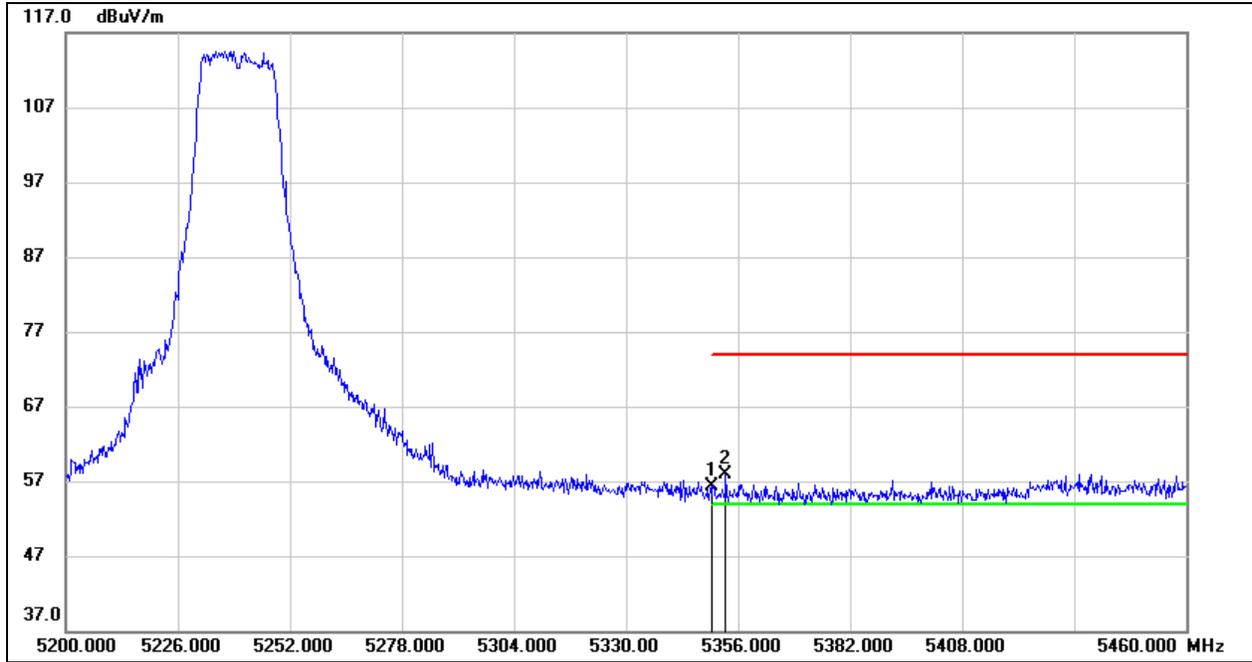

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	15.62	40.64	56.26	74.00	-17.74	peak
2	5353.140	17.21	40.63	57.84	74.00	-16.16	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

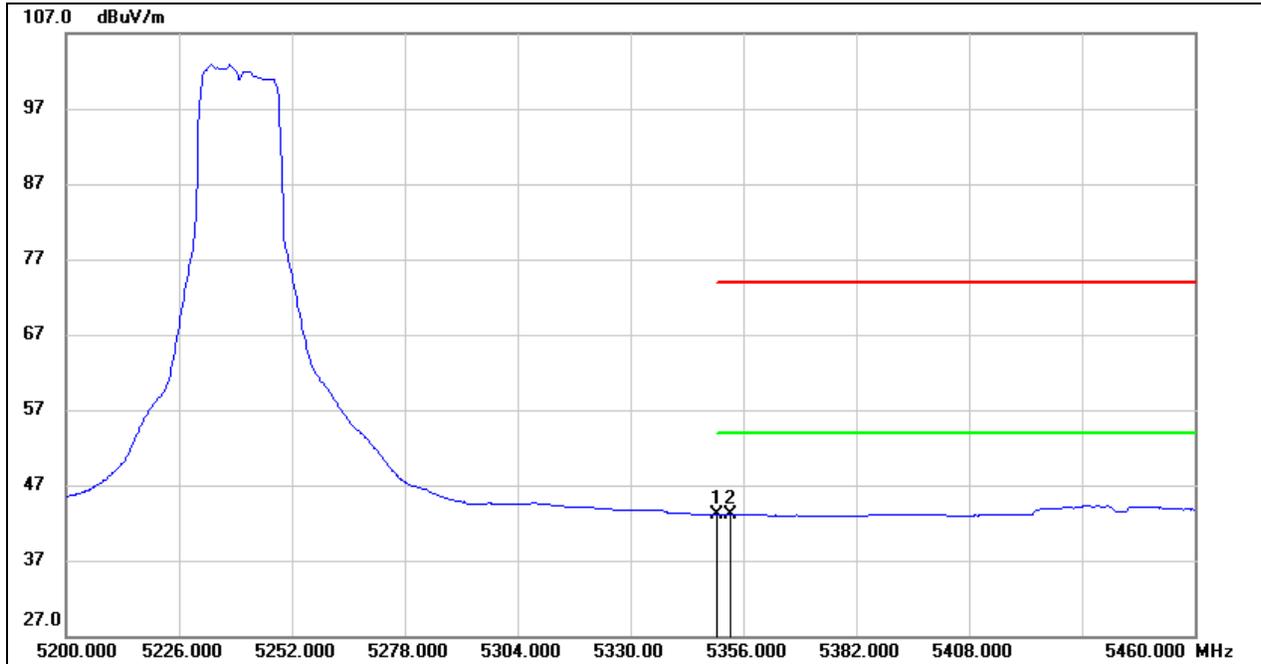


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	2.52	40.64	43.16	54.00	-10.84	AVG
2	5353.140	2.48	40.63	43.11	54.00	-10.89	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)


PEAK

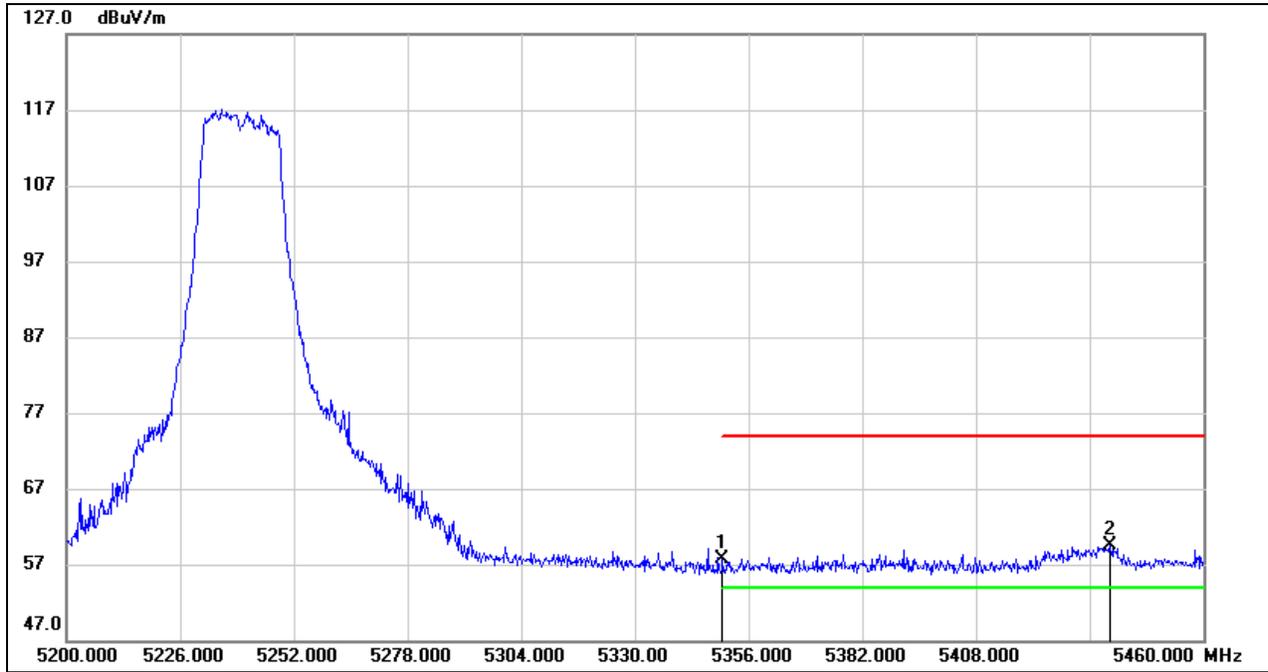

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	17.15	40.64	57.79	74.00	-16.21	peak
2	5438.680	18.57	41.01	59.58	74.00	-14.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

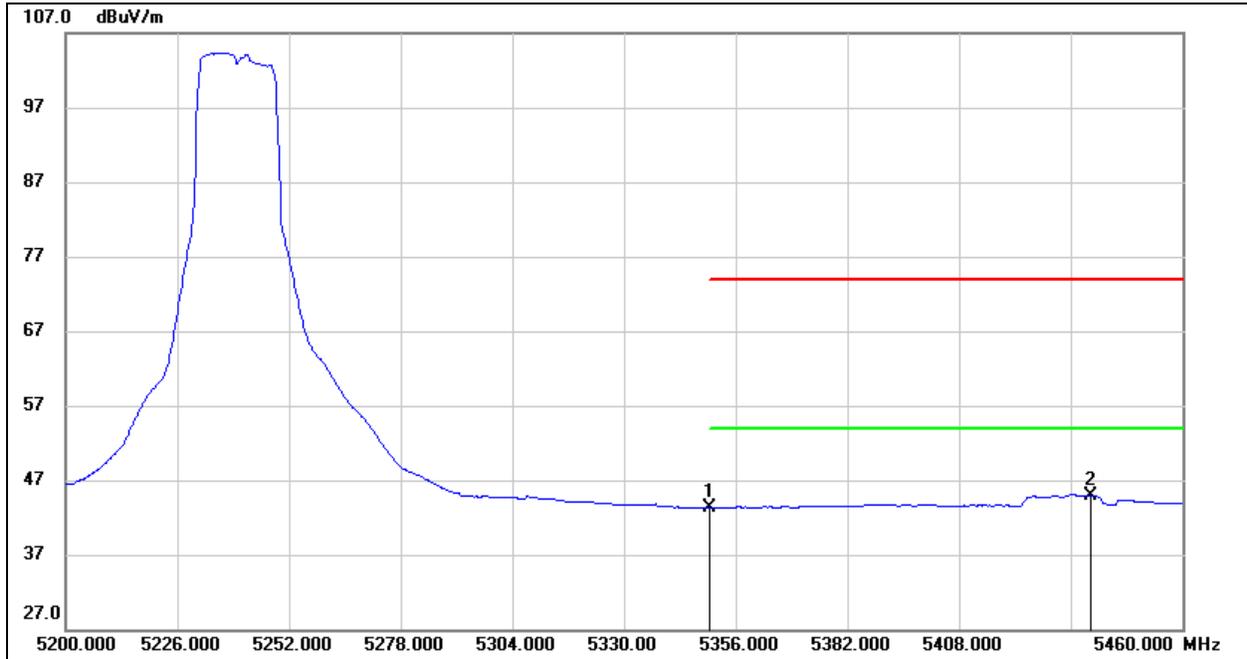


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	2.73	40.64	43.37	54.00	-10.63	AVG
2	5438.680	3.81	41.01	44.82	54.00	-9.18	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

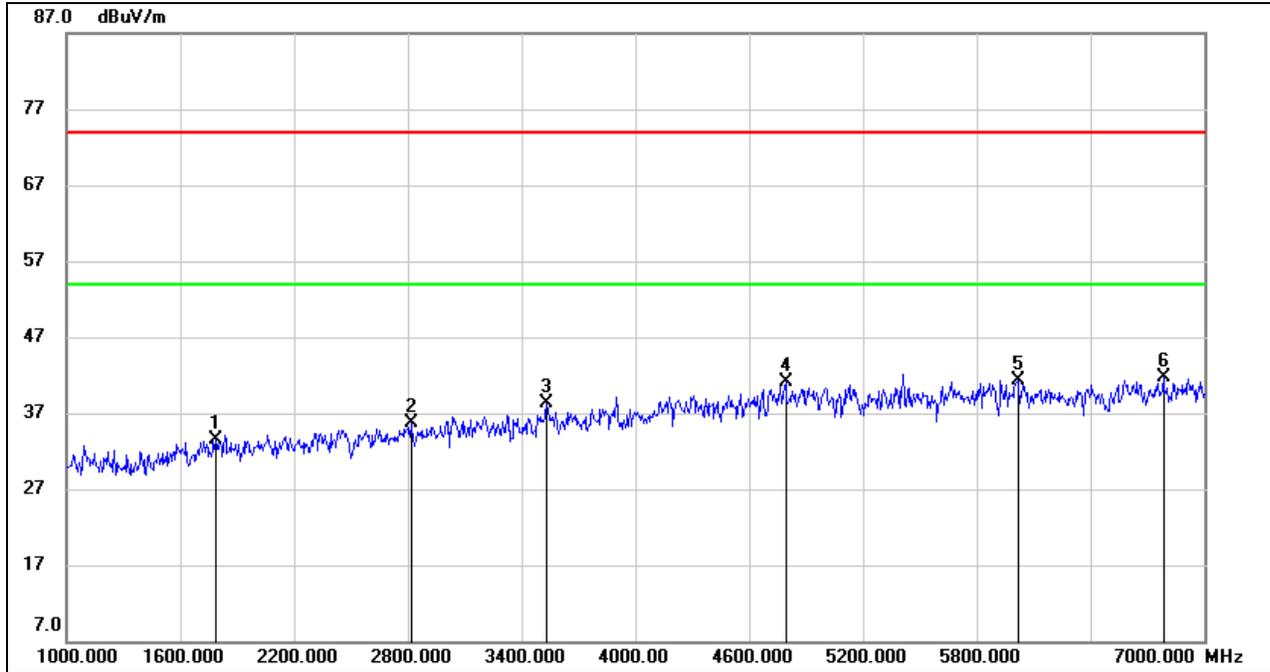

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1786.000	43.73	-10.21	33.52	74.00	-40.48	peak
2	2818.000	42.58	-6.88	35.70	74.00	-38.30	peak
3	3532.000	43.10	-4.84	38.26	74.00	-35.74	peak
4	4792.000	40.57	0.47	41.04	74.00	-32.96	peak
5	6016.000	38.74	2.60	41.34	74.00	-32.66	peak
6	6784.000	37.30	4.44	41.74	74.00	-32.26	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

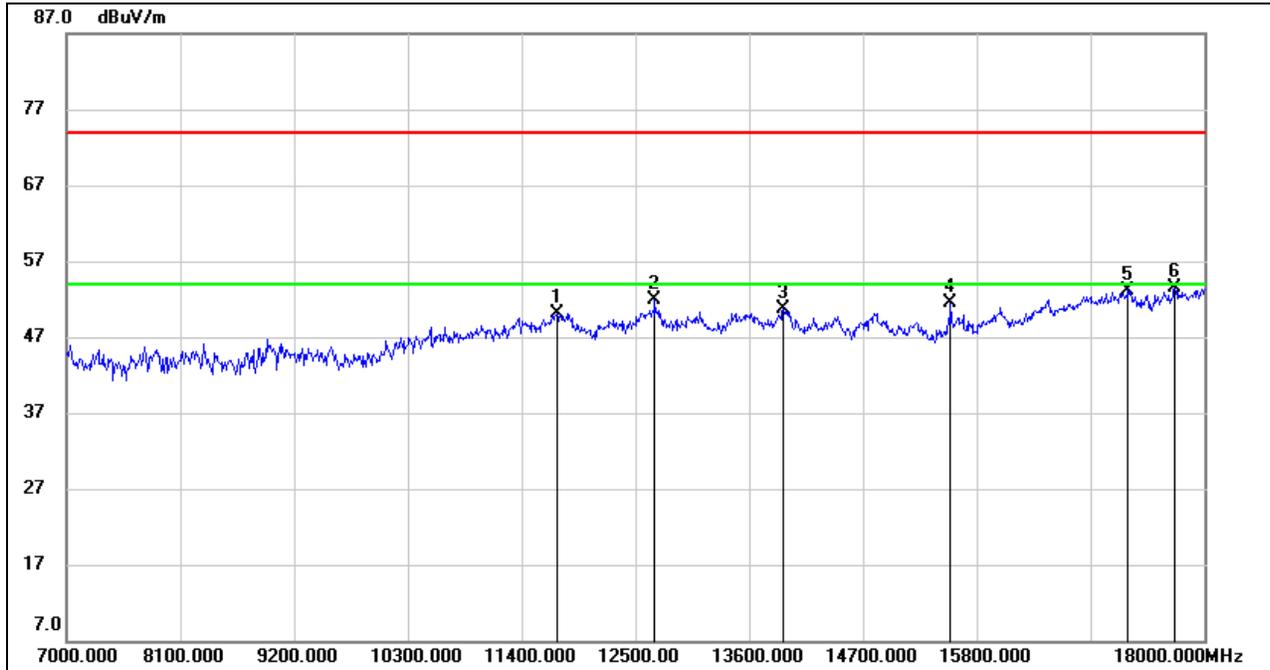


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11741.000	35.81	14.29	50.10	74.00	-23.90	peak
2	12687.000	36.73	15.24	51.97	74.00	-22.03	peak
3	13930.000	34.45	16.24	50.69	74.00	-23.31	peak
4	15547.000	34.99	16.54	51.53	74.00	-22.47	peak
5	17263.000	31.67	21.53	53.20	74.00	-20.80	peak
6	17714.000	30.62	22.85	53.47	74.00	-20.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

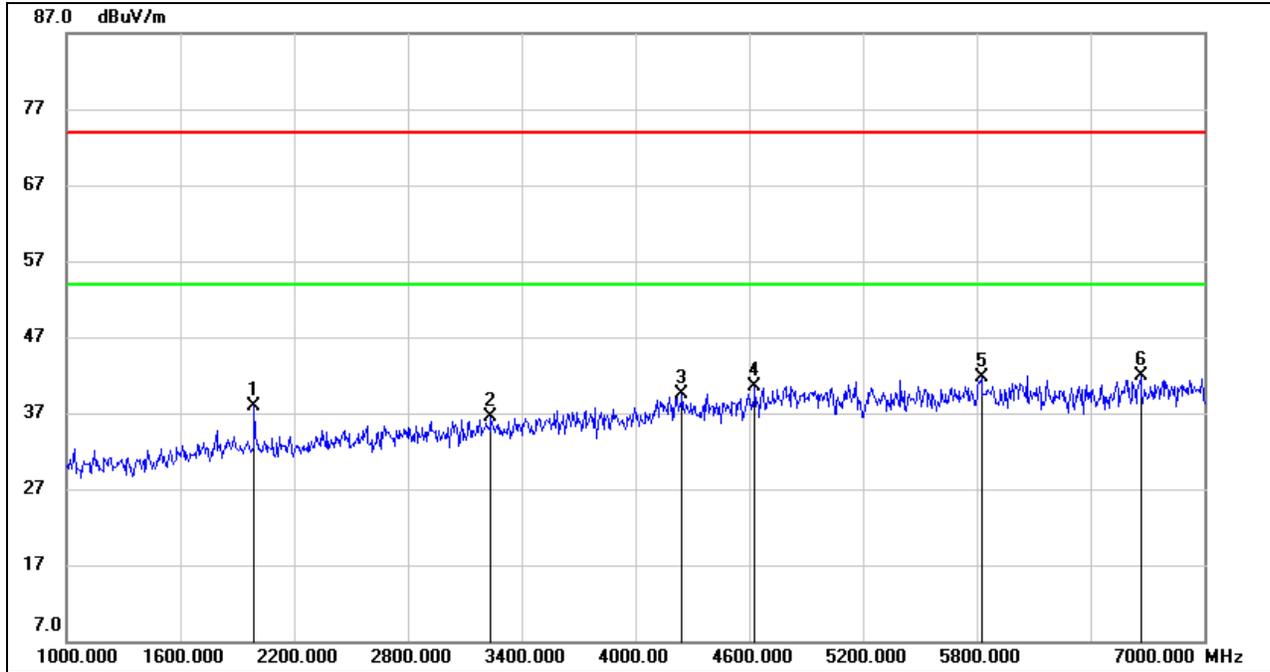

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1990.000	48.10	-10.24	37.86	74.00	-36.14	peak
2	3238.000	42.06	-5.62	36.44	74.00	-37.56	peak
3	4246.000	41.32	-1.83	39.49	74.00	-34.51	peak
4	4630.000	41.02	-0.46	40.56	74.00	-33.44	peak
5	5824.000	39.58	2.03	41.61	74.00	-32.39	peak
6	6664.000	37.44	4.47	41.91	74.00	-32.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

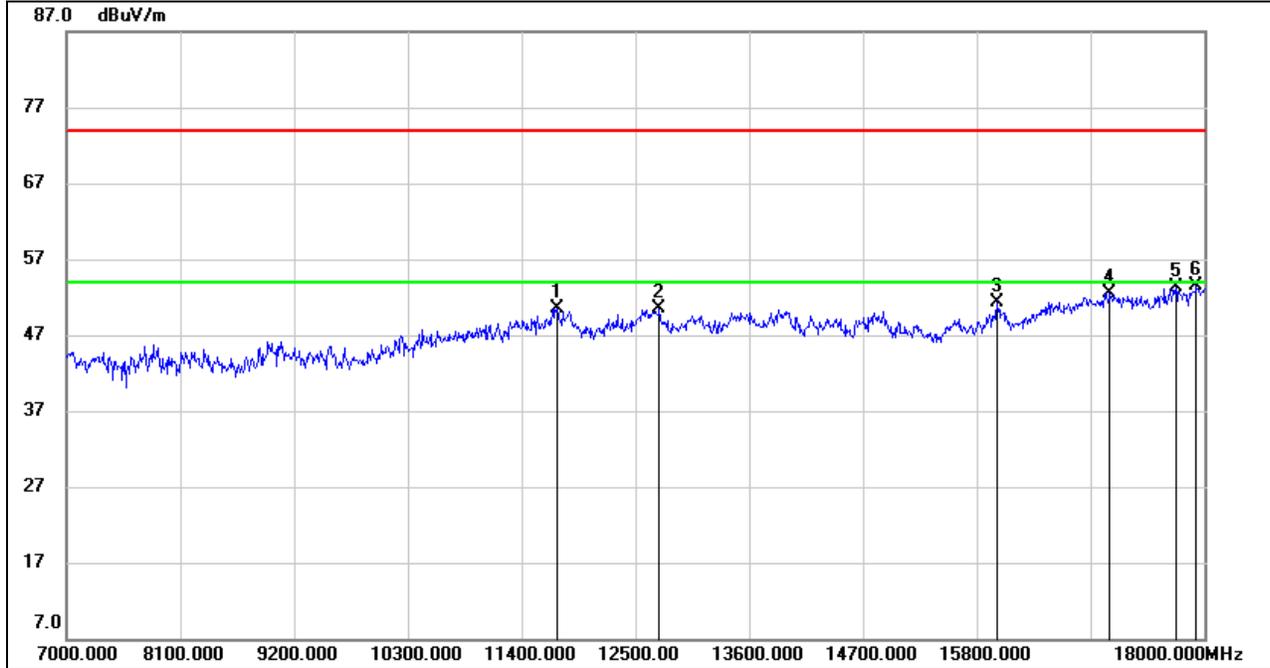


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11741.000	36.17	14.29	50.46	74.00	-23.54	peak
2	12731.000	35.17	15.26	50.43	74.00	-23.57	peak
3	15998.000	33.49	17.73	51.22	74.00	-22.78	peak
4	17087.000	31.58	21.00	52.58	74.00	-21.42	peak
5	17725.000	30.30	22.94	53.24	74.00	-20.76	peak
6	17923.000	29.97	23.61	53.58	74.00	-20.42	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

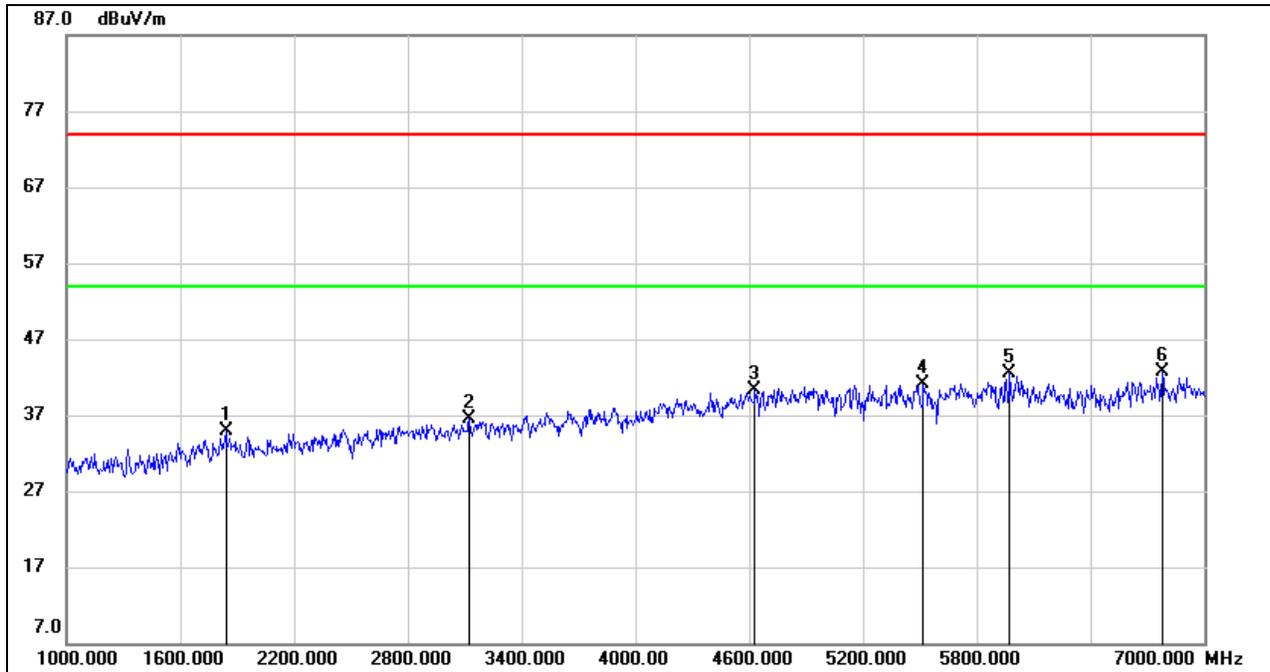

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1840.000	45.06	-10.13	34.93	74.00	-39.07	peak
2	3124.000	42.33	-5.82	36.51	74.00	-37.49	peak
3	4630.000	40.72	-0.46	40.26	74.00	-33.74	peak
4	5518.000	39.18	1.84	41.02	74.00	-32.98	peak
5	5974.000	40.07	2.53	42.60	74.00	-31.40	peak
6	6778.000	38.22	4.44	42.66	74.00	-31.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

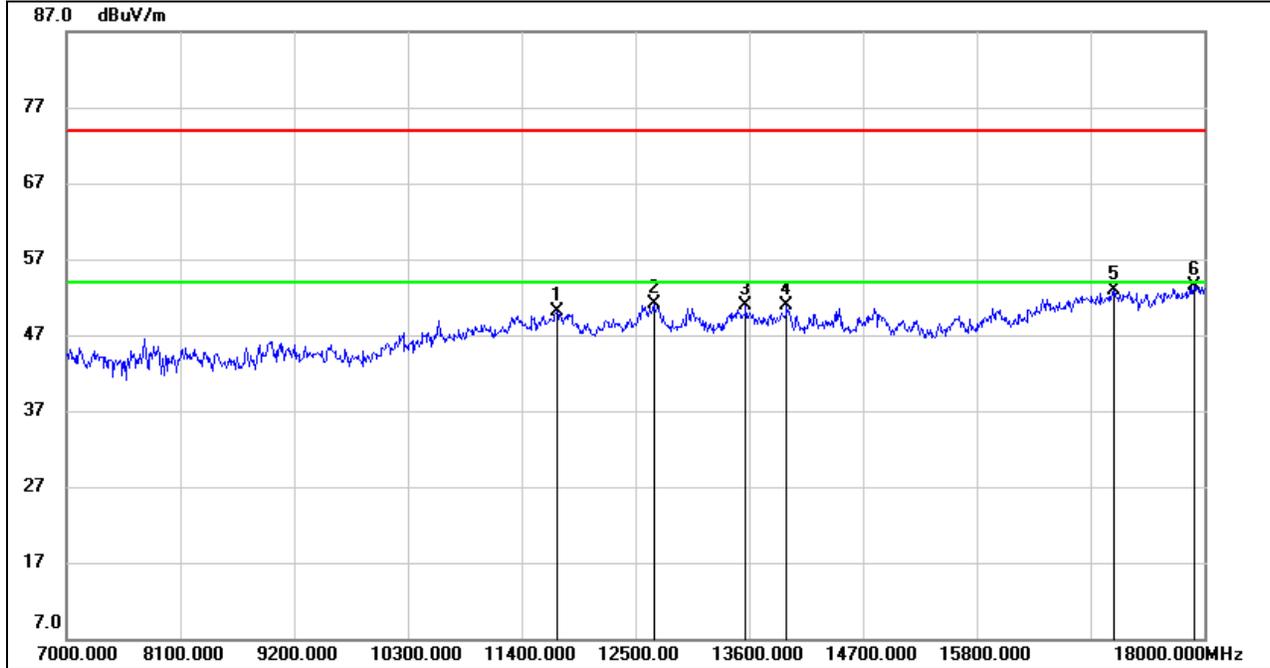


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11741.000	35.79	14.29	50.08	74.00	-23.92	peak
2	12676.000	35.84	15.23	51.07	74.00	-22.93	peak
3	13567.000	35.05	15.89	50.94	74.00	-23.06	peak
4	13963.000	34.76	16.17	50.93	74.00	-23.07	peak
5	17131.000	31.71	21.27	52.98	74.00	-21.02	peak
6	17901.000	29.87	23.59	53.46	74.00	-20.54	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

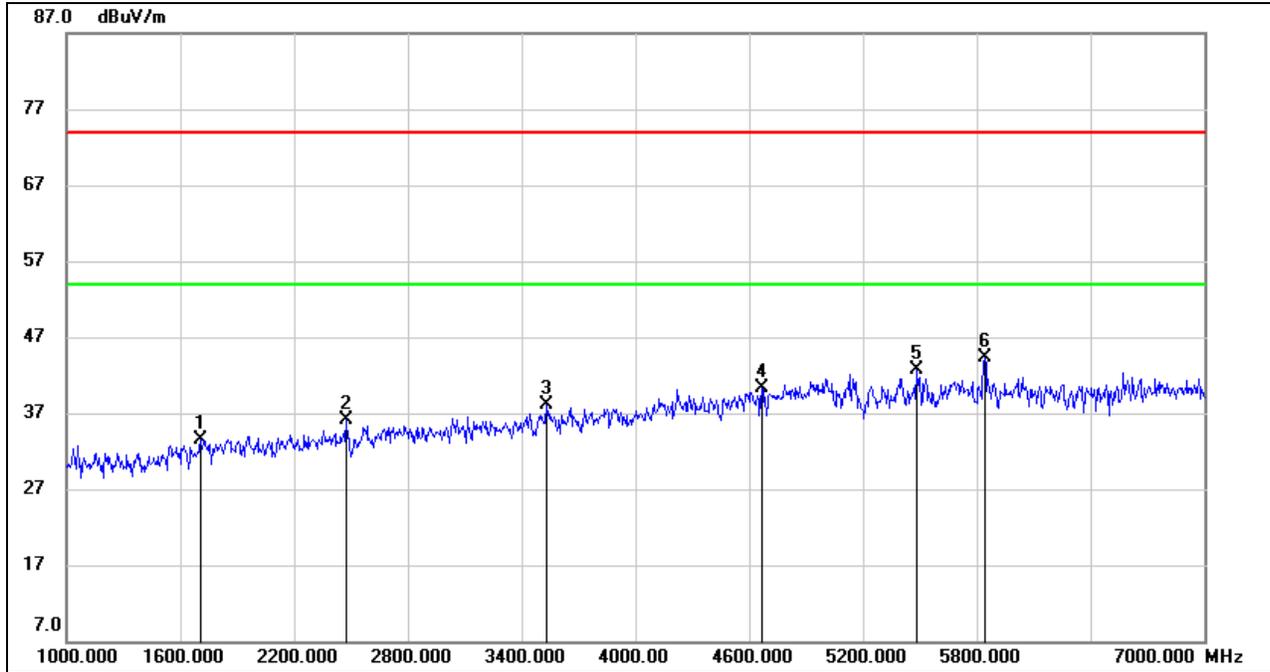

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1708.000	44.40	-10.80	33.60	74.00	-40.40	peak
2	2476.000	44.60	-8.52	36.08	74.00	-37.92	peak
3	3532.000	42.90	-4.84	38.06	74.00	-35.94	peak
4	4666.000	40.58	-0.25	40.33	74.00	-33.67	peak
5	5482.000	40.90	1.75	42.65	74.00	-31.35	peak
6	5842.000	42.30	2.08	44.38	74.00	-29.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

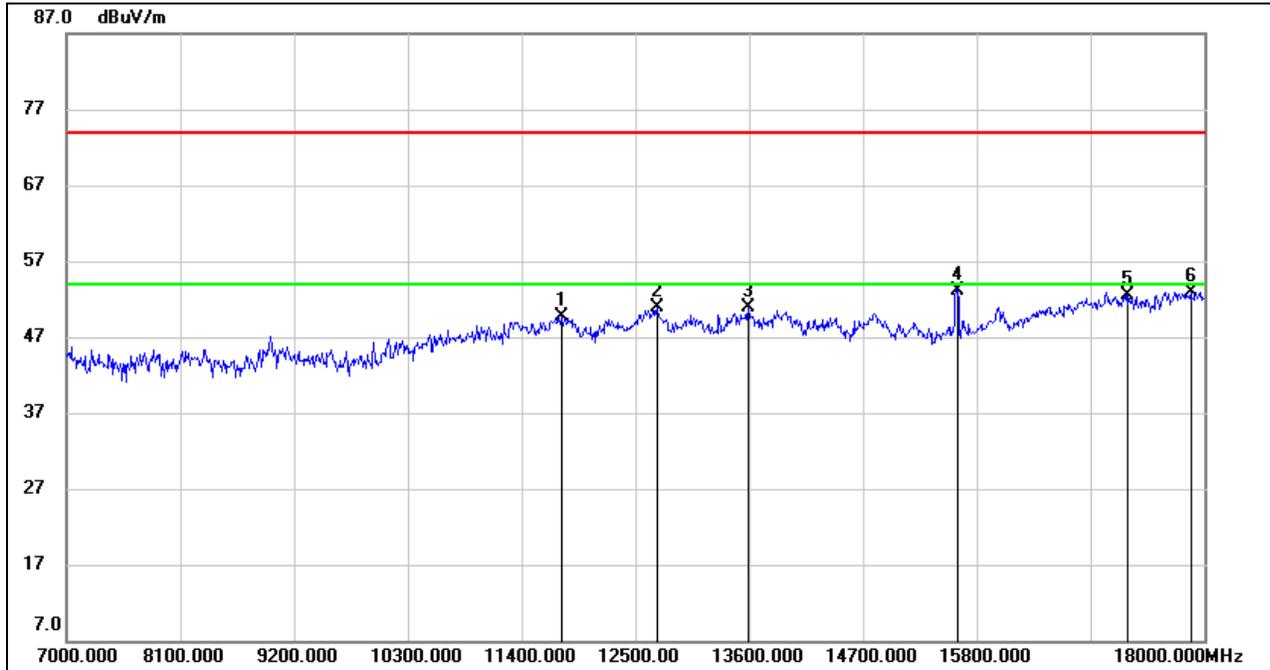


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11785.000	35.19	14.47	49.66	74.00	-24.34	peak
2	12709.000	35.72	15.26	50.98	74.00	-23.02	peak
3	13589.000	34.97	15.87	50.84	74.00	-23.16	peak
4	15613.000	36.44	16.76	53.20	74.00	-20.80	peak
5	17263.000	31.06	21.53	52.59	74.00	-21.41	peak
6	17868.000	29.34	23.56	52.90	74.00	-21.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

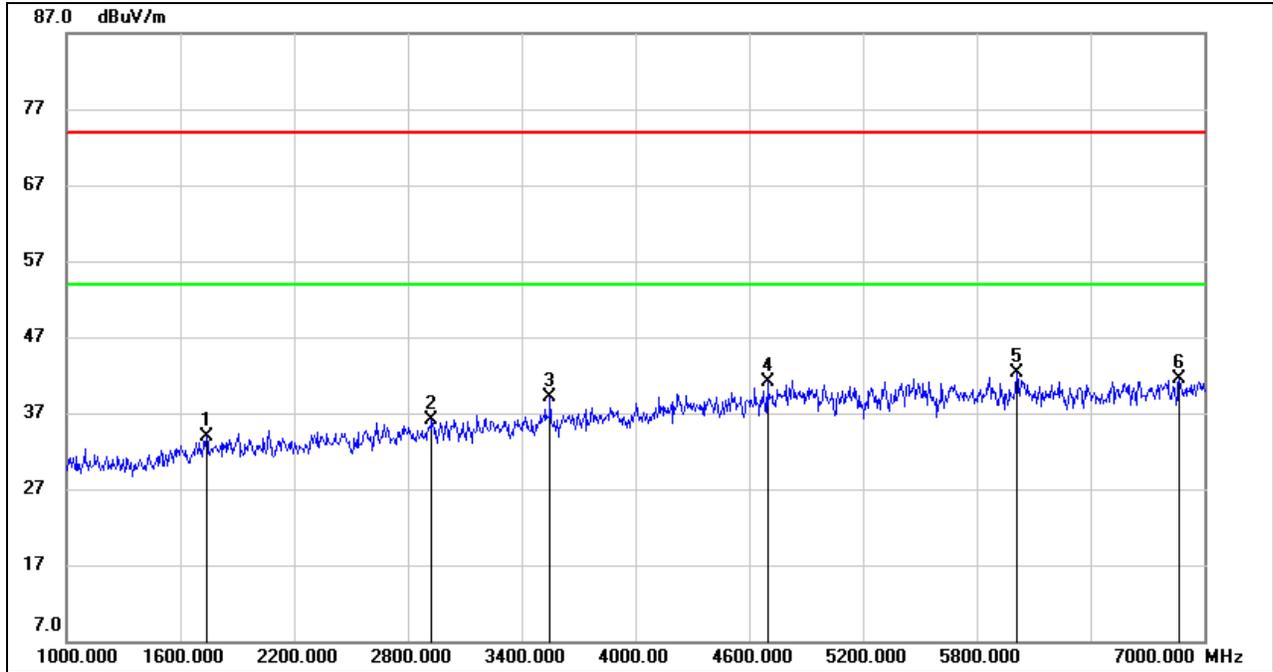

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1738.000	44.49	-10.57	33.92	74.00	-40.08	peak
2	2926.000	42.53	-6.40	36.13	74.00	-37.87	peak
3	3550.000	43.82	-4.74	39.08	74.00	-34.92	peak
4	4696.000	41.16	-0.09	41.07	74.00	-32.93	peak
5	6010.000	39.69	2.61	42.30	74.00	-31.70	peak
6	6868.000	36.97	4.60	41.57	74.00	-32.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

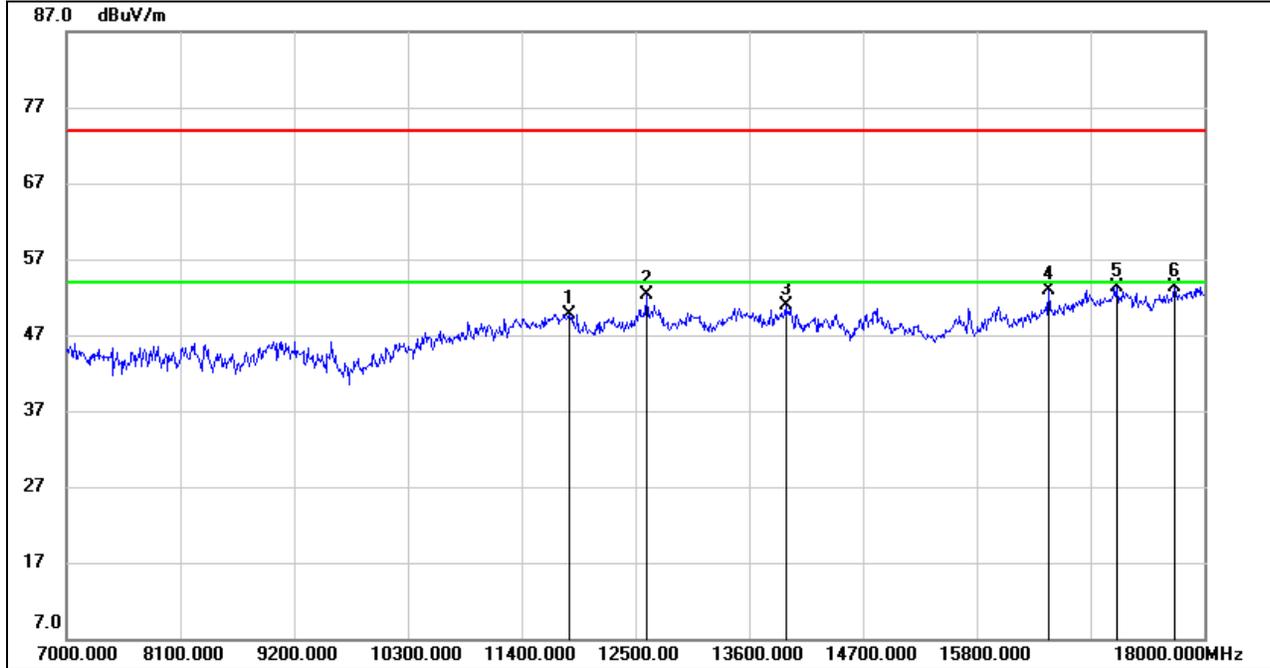


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11862.000	35.34	14.44	49.78	74.00	-24.22	peak
2	12610.000	37.18	15.17	52.35	74.00	-21.65	peak
3	13952.000	34.74	16.19	50.93	74.00	-23.07	peak
4	16493.000	33.43	19.42	52.85	74.00	-21.15	peak
5	17153.000	31.92	21.40	53.32	74.00	-20.68	peak
6	17714.000	30.36	22.85	53.21	74.00	-20.79	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

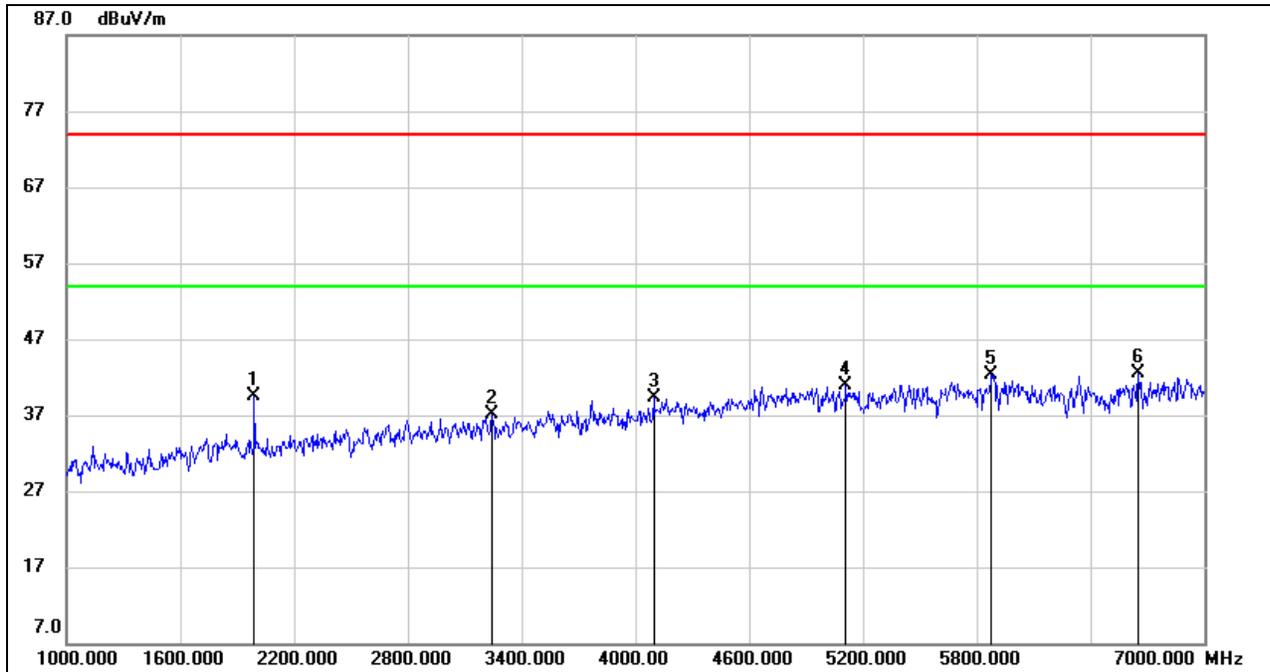

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1990.000	49.68	-10.24	39.44	74.00	-34.56	peak
2	3244.000	42.73	-5.61	37.12	74.00	-36.88	peak
3	4096.000	42.04	-2.80	39.24	74.00	-34.76	peak
4	5110.000	39.47	1.43	40.90	74.00	-33.10	peak
5	5878.000	40.17	2.20	42.37	74.00	-31.63	peak
6	6652.000	37.96	4.47	42.43	74.00	-31.57	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

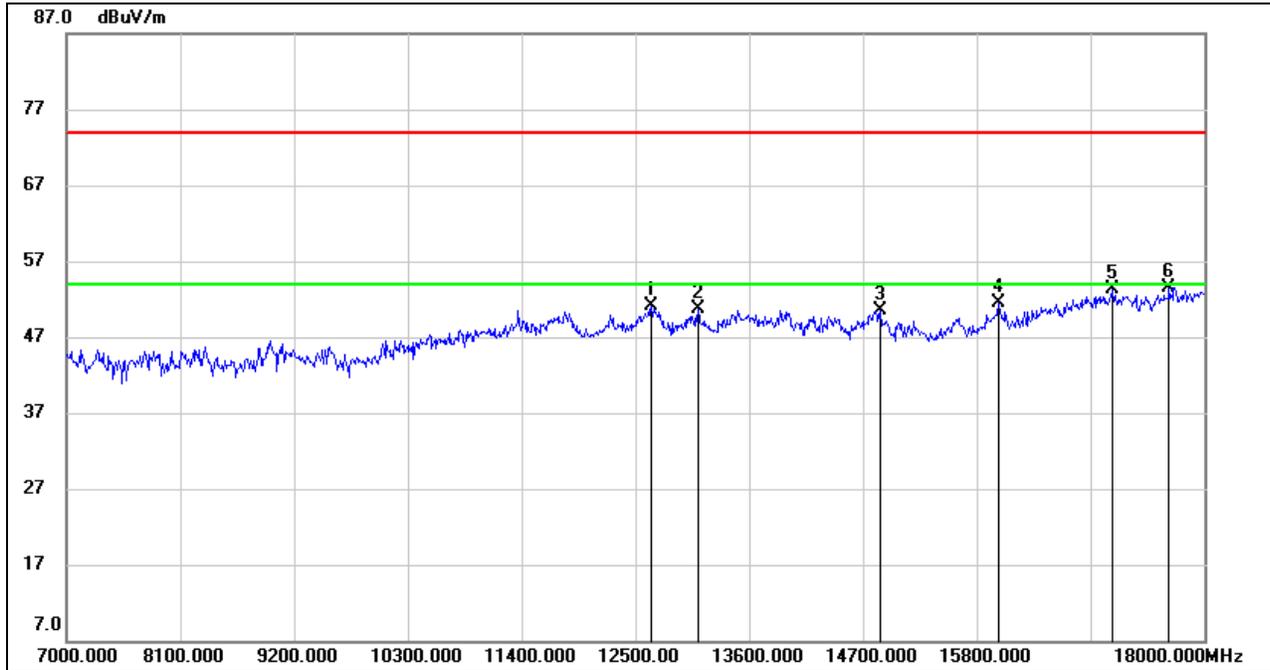


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12654.000	35.99	15.20	51.19	74.00	-22.81	peak
2	13105.000	35.19	15.46	50.65	74.00	-23.35	peak
3	14865.000	34.47	16.03	50.50	74.00	-23.50	peak
4	16009.000	33.71	17.74	51.45	74.00	-22.55	peak
5	17109.000	32.09	21.13	53.22	74.00	-20.78	peak
6	17659.000	31.08	22.45	53.53	74.00	-20.47	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.2.2. UNII-2A BAND

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

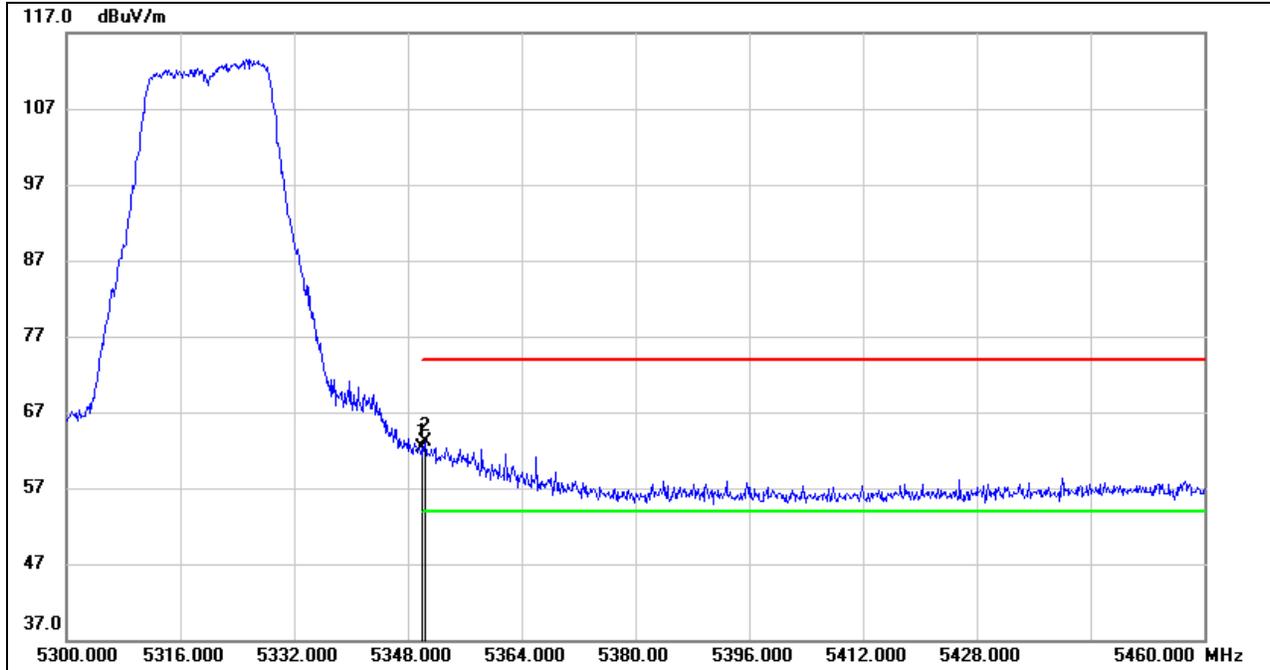


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	21.57	40.64	62.21	74.00	-11.79	peak
2	5350.400	22.45	40.64	63.09	74.00	-10.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



AVG

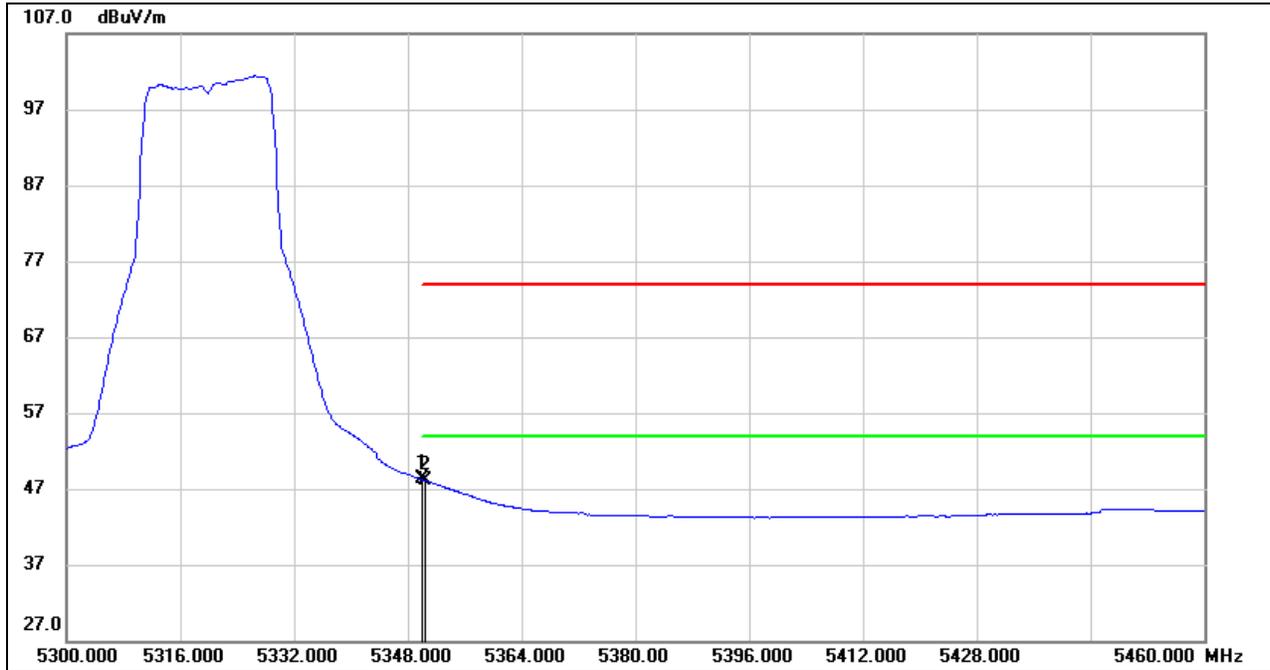


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	7.56	40.64	48.20	54.00	-5.80	AVG
2	5350.400	7.46	40.64	48.10	54.00	-5.90	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)


PEAK

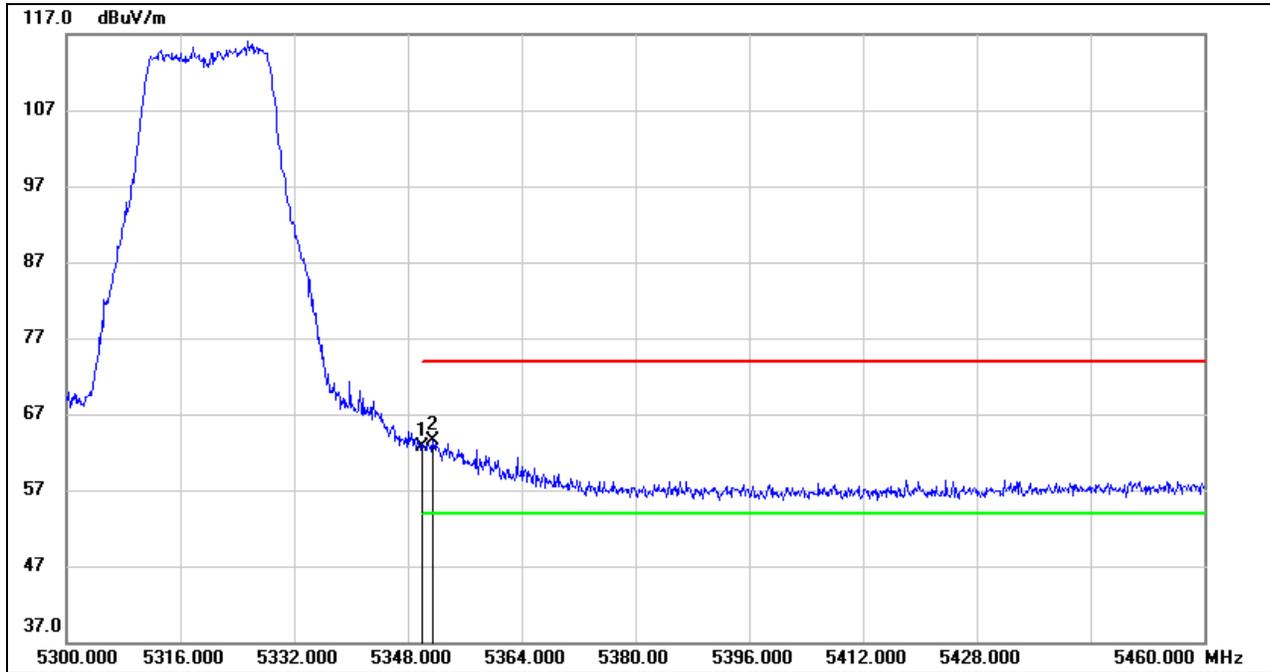

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	22.09	40.64	62.73	74.00	-11.27	peak
2	5351.520	22.84	40.63	63.47	74.00	-10.53	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

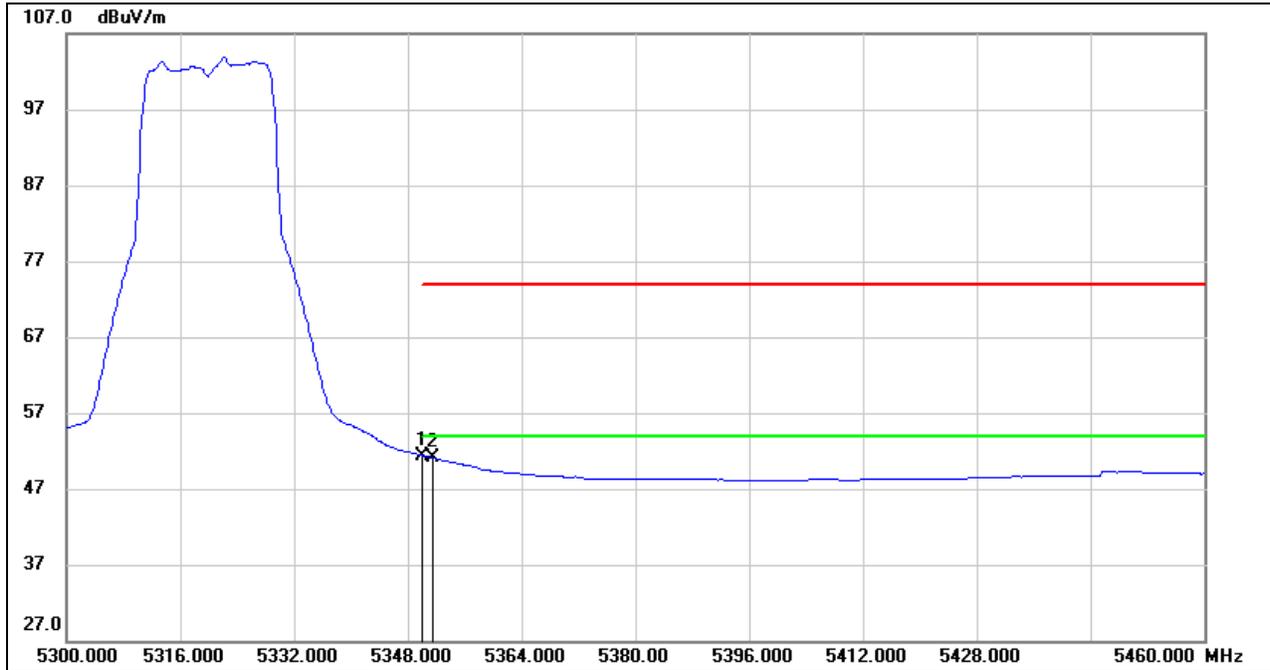


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	10.76	40.64	51.40	54.00	-2.60	AVG
2	5351.520	10.45	40.63	51.08	54.00	-2.92	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

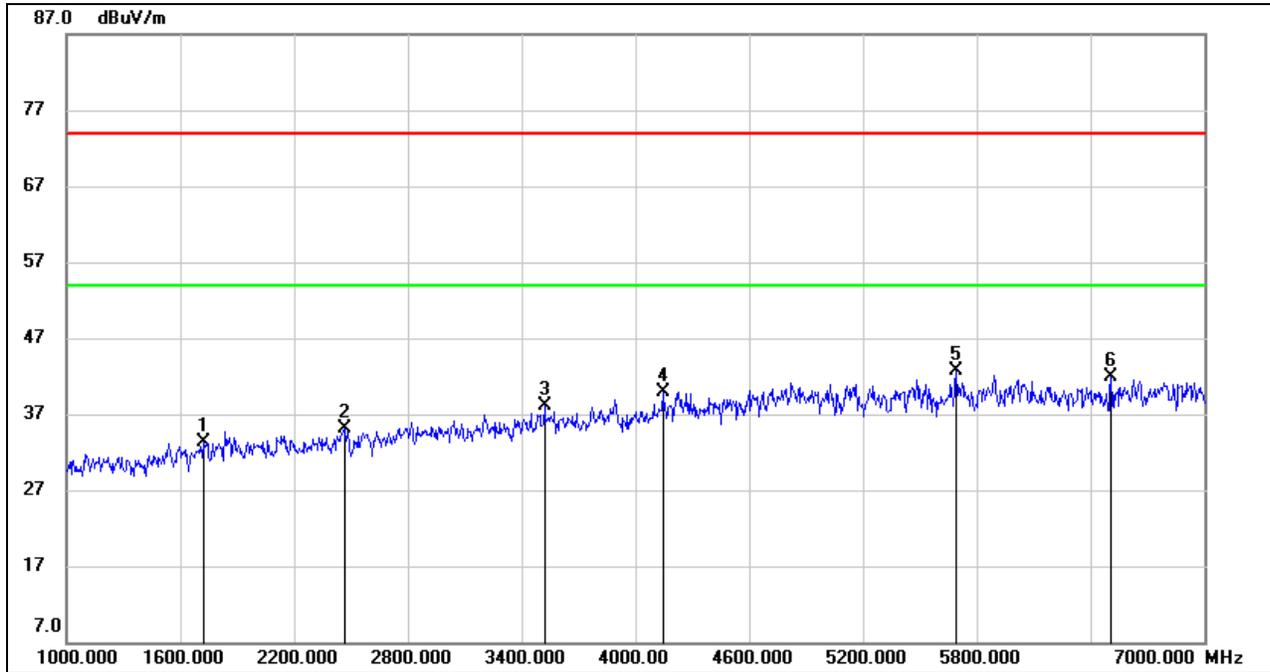

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1720.000	44.07	-10.71	33.36	74.00	-40.64	peak
2	2464.000	43.68	-8.52	35.16	74.00	-38.84	peak
3	3520.000	43.07	-4.90	38.17	74.00	-35.83	peak
4	4144.000	42.30	-2.33	39.97	74.00	-34.03	peak
5	5692.000	40.81	1.98	42.79	74.00	-31.21	peak
6	6508.000	37.86	4.00	41.86	74.00	-32.14	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

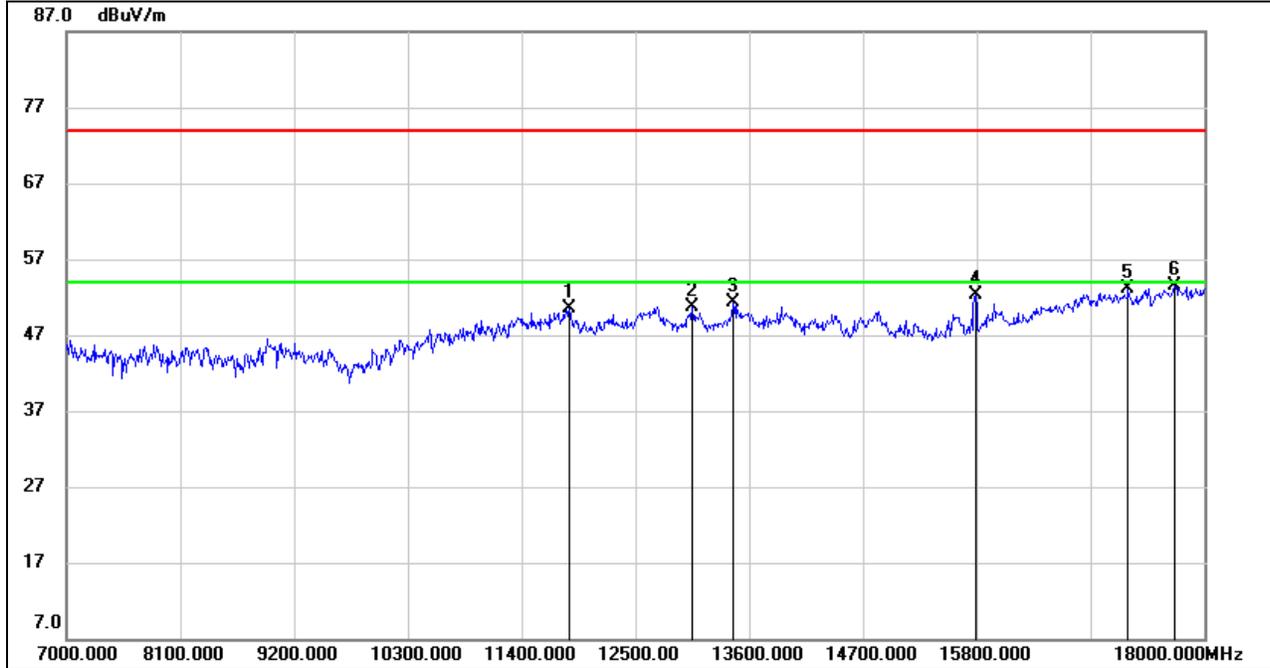


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11862.000	36.03	14.44	50.47	74.00	-23.53	peak
2	13050.000	35.10	15.55	50.65	74.00	-23.35	peak
3	13446.000	35.30	15.96	51.26	74.00	-22.74	peak
4	15789.000	35.49	16.86	52.35	74.00	-21.65	peak
5	17263.000	31.67	21.53	53.20	74.00	-20.80	peak
6	17714.000	30.63	22.85	53.48	74.00	-20.52	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)


1-7GHz

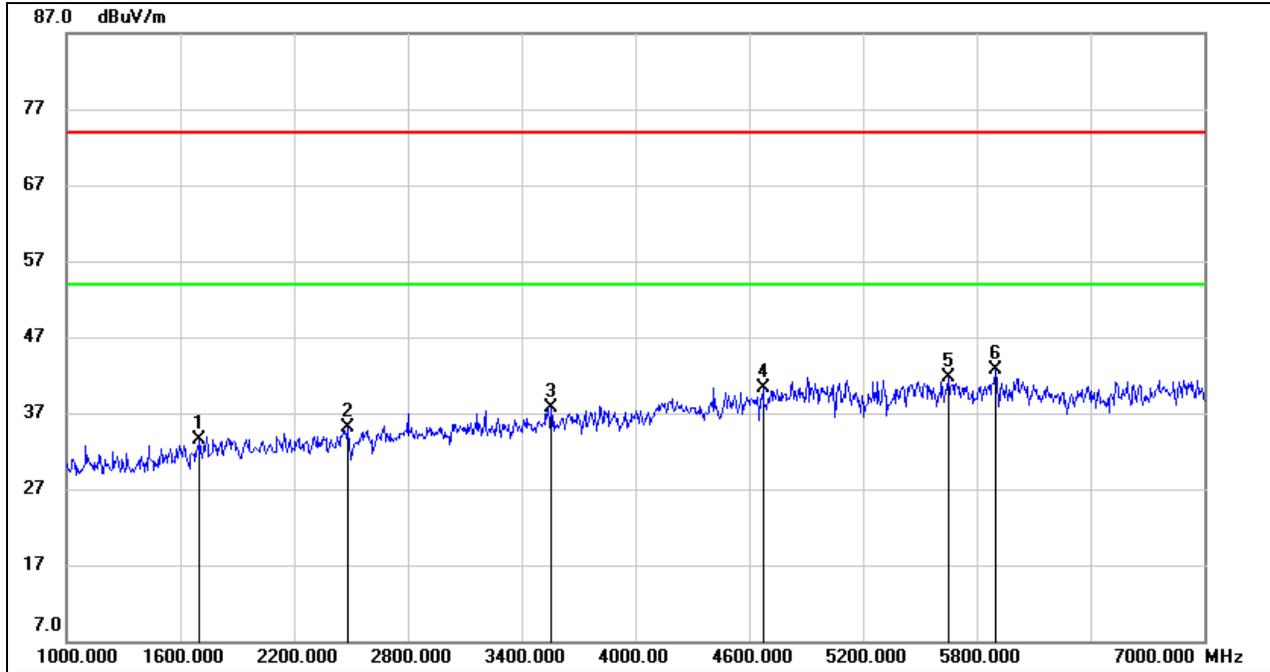

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1702.000	44.42	-10.85	33.57	74.00	-40.43	peak
2	2482.000	43.66	-8.50	35.16	74.00	-38.84	peak
3	3556.000	42.41	-4.70	37.71	74.00	-36.29	peak
4	4672.000	40.57	-0.22	40.35	74.00	-33.65	peak
5	5650.000	39.76	2.01	41.77	74.00	-32.23	peak
6	5896.000	40.41	2.27	42.68	74.00	-31.32	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

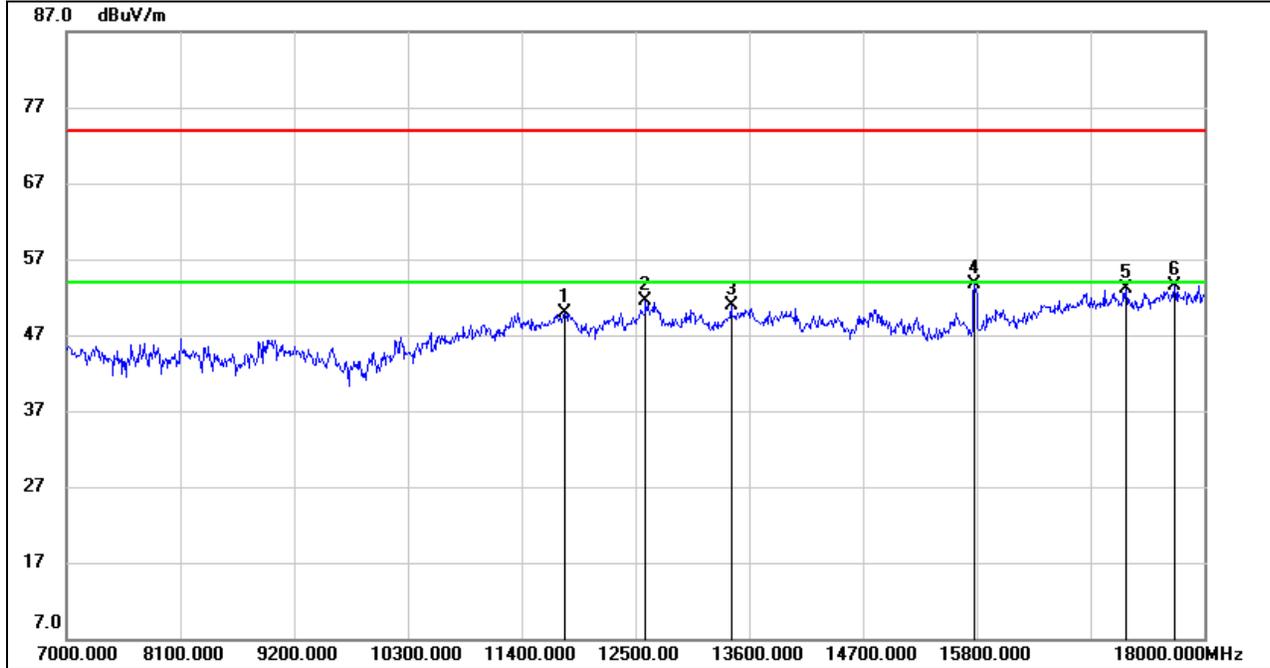


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11818.000	35.39	14.50	49.89	74.00	-24.11	peak
2	12599.000	36.36	15.16	51.52	74.00	-22.48	peak
3	13424.000	34.90	15.95	50.85	74.00	-23.15	peak
4	15778.000	36.77	16.86	53.63	74.00	-20.37	peak
5	17241.000	31.54	21.58	53.12	74.00	-20.88	peak
6	17714.000	30.60	22.85	53.45	74.00	-20.55	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)


1-7GHz

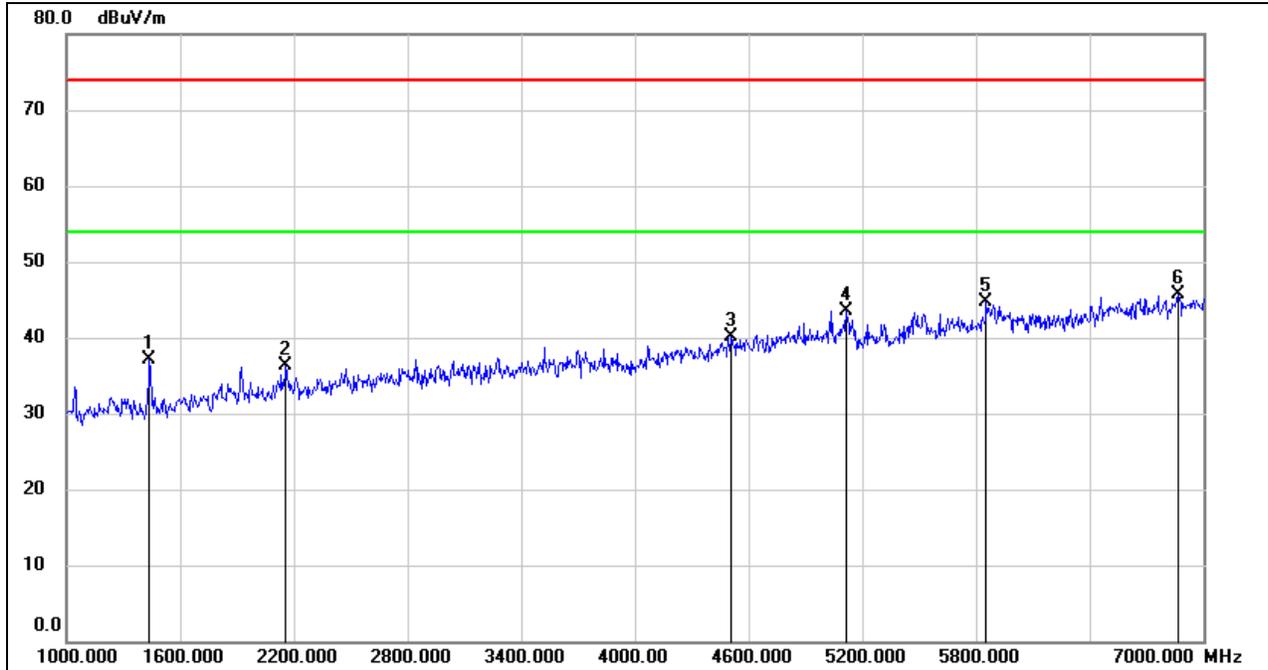

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	50.19	-12.99	37.20	74.00	-36.80	peak
2	2158.000	46.06	-9.83	36.23	74.00	-37.77	peak
3	4510.000	41.77	-1.75	40.02	74.00	-33.98	peak
4	5116.000	42.73	0.86	43.59	74.00	-30.41	peak
5	5854.000	41.23	3.48	44.71	74.00	-29.29	peak
6	6868.000	40.72	4.98	45.70	74.00	-28.30	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

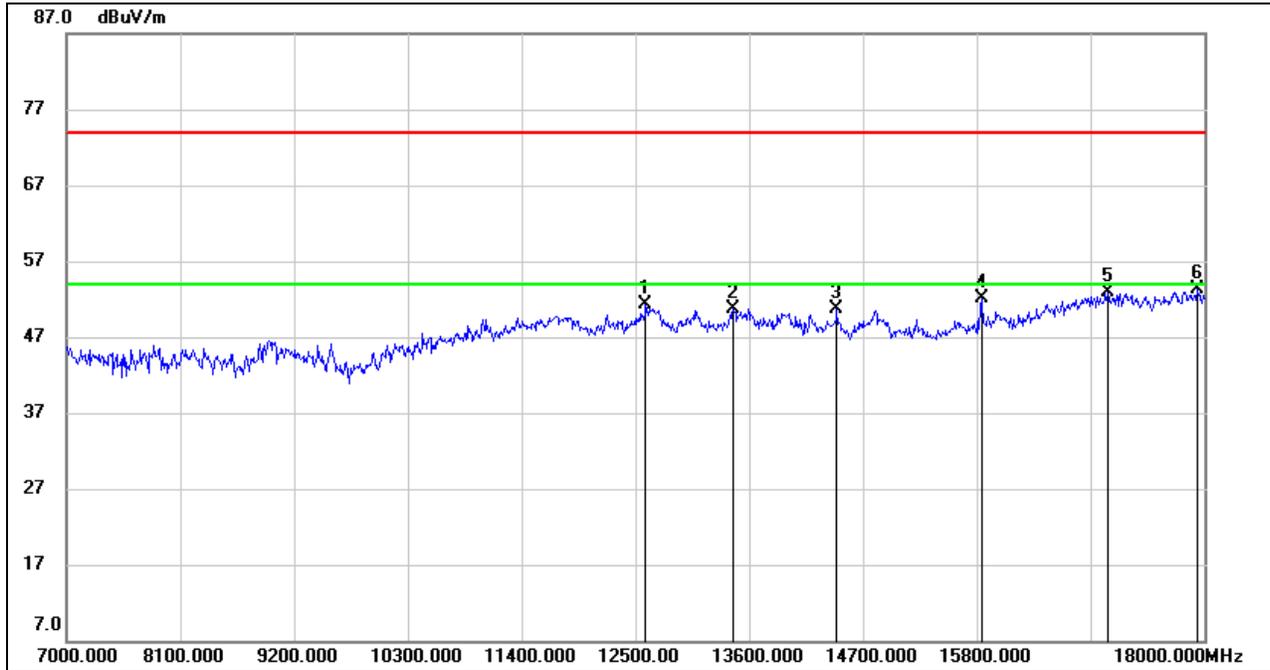


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12599.000	36.13	15.16	51.29	74.00	-22.71	peak
2	13446.000	34.75	15.96	50.71	74.00	-23.29	peak
3	14447.000	34.60	16.08	50.68	74.00	-23.32	peak
4	15844.000	34.96	17.06	52.02	74.00	-21.98	peak
5	17065.000	31.99	20.87	52.86	74.00	-21.14	peak
6	17934.000	29.63	23.62	53.25	74.00	-20.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)


1-7GHz

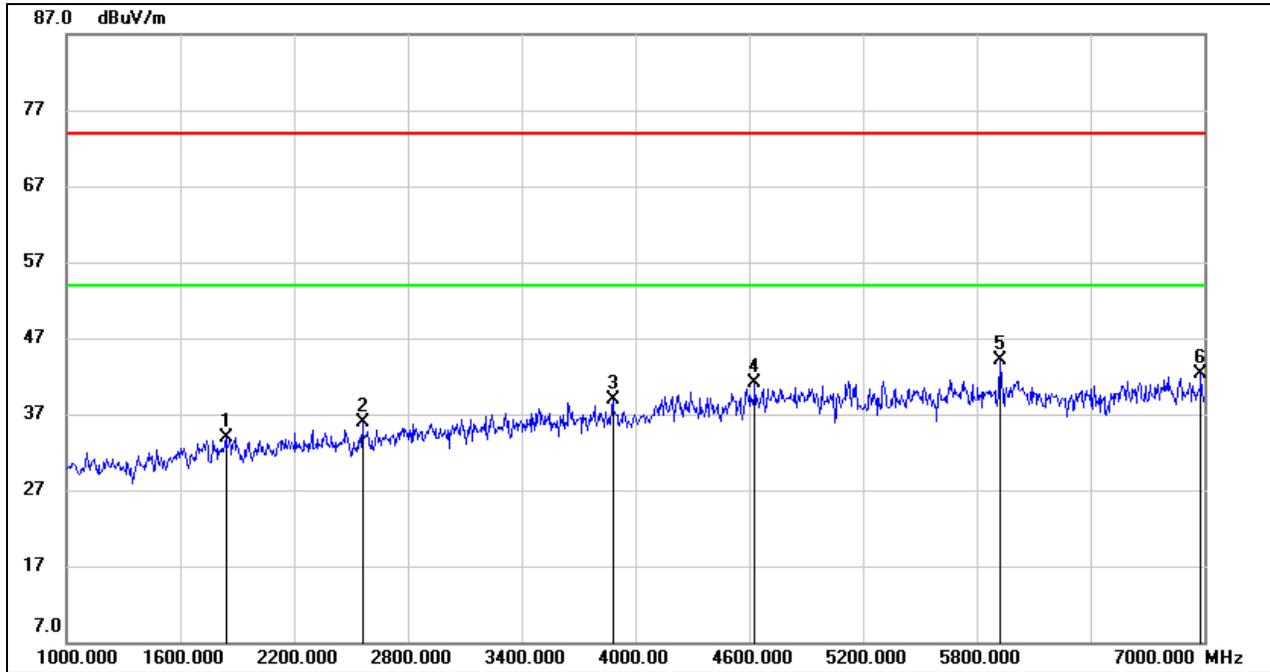

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1840.000	43.94	-10.13	33.81	74.00	-40.19	peak
2	2560.000	44.16	-8.29	35.87	74.00	-38.13	peak
3	3880.000	42.55	-3.57	38.98	74.00	-35.02	peak
4	4630.000	41.62	-0.46	41.16	74.00	-32.84	peak
5	5920.000	41.85	2.34	44.19	74.00	-29.81	peak
6	6982.000	37.36	4.85	42.21	74.00	-31.79	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

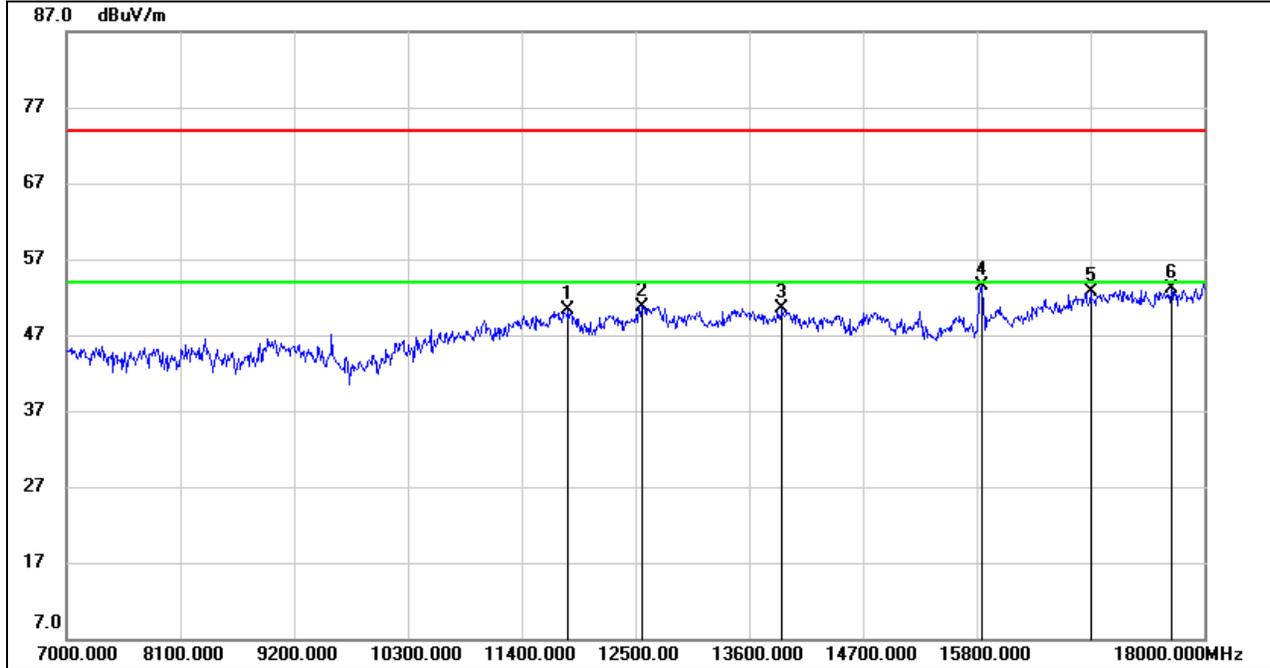


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11851.000	35.85	14.45	50.30	74.00	-23.70	peak
2	12566.000	35.70	15.10	50.80	74.00	-23.20	peak
3	13919.000	34.31	16.24	50.55	74.00	-23.45	peak
4	15844.000	36.53	17.06	53.59	74.00	-20.41	peak
5	16900.000	32.50	20.29	52.79	74.00	-21.21	peak
6	17681.000	30.56	22.61	53.17	74.00	-20.83	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)


1-7GHz

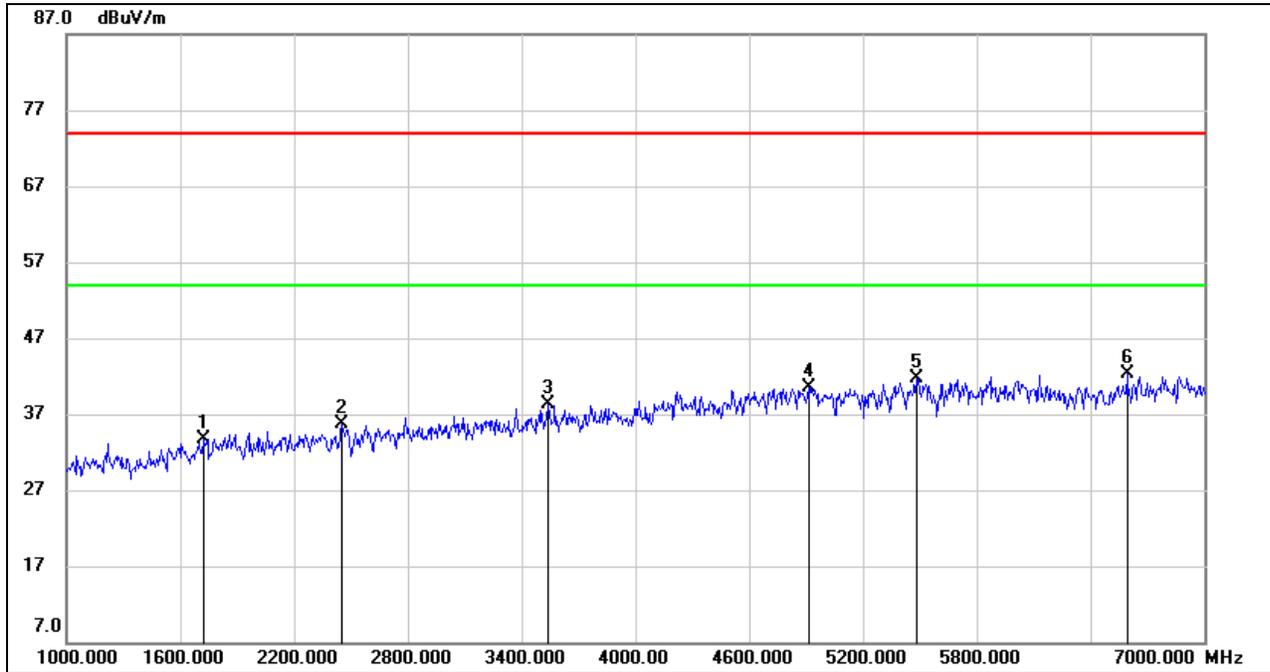

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1726.000	44.33	-10.66	33.67	74.00	-40.33	peak
2	2452.000	44.34	-8.55	35.79	74.00	-38.21	peak
3	3538.000	43.06	-4.80	38.26	74.00	-35.74	peak
4	4912.000	39.78	0.71	40.49	74.00	-33.51	peak
5	5482.000	39.98	1.75	41.73	74.00	-32.27	peak
6	6592.000	37.78	4.44	42.22	74.00	-31.78	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

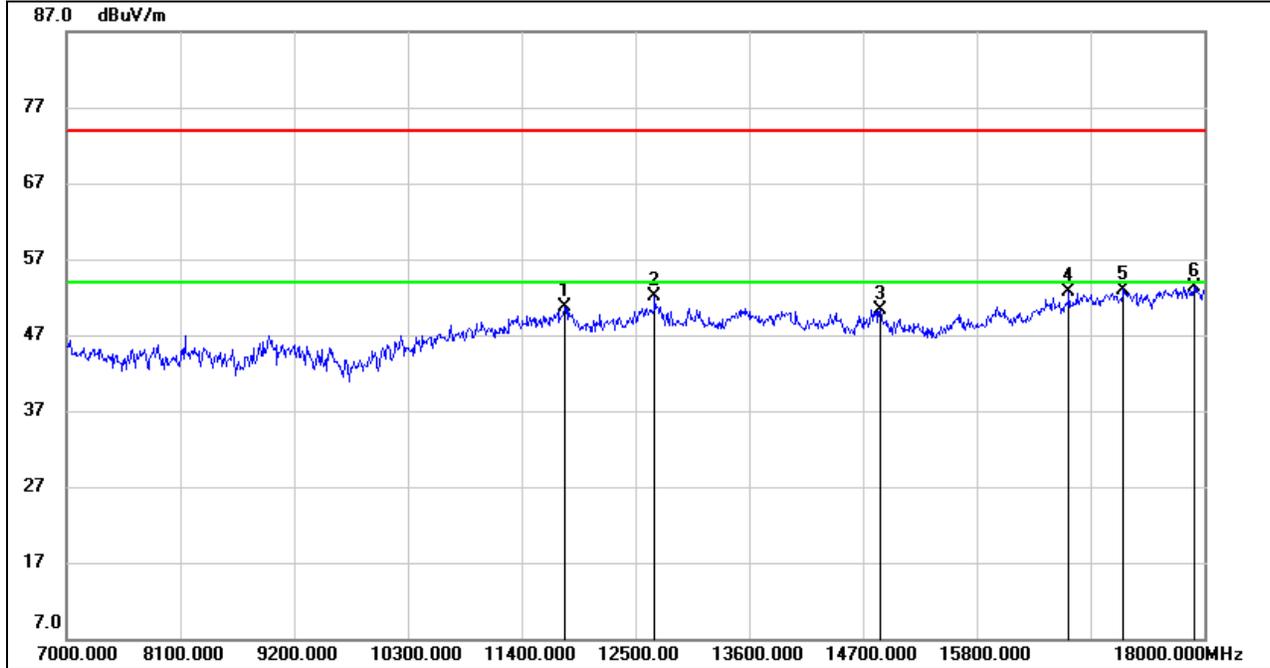


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11818.000	36.20	14.50	50.70	74.00	-23.30	peak
2	12687.000	36.81	15.24	52.05	74.00	-21.95	peak
3	14865.000	34.24	16.03	50.27	74.00	-23.73	peak
4	16691.000	32.68	20.02	52.70	74.00	-21.30	peak
5	17219.000	31.36	21.64	53.00	74.00	-21.00	peak
6	17901.000	29.80	23.59	53.39	74.00	-20.61	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)


1-7GHz

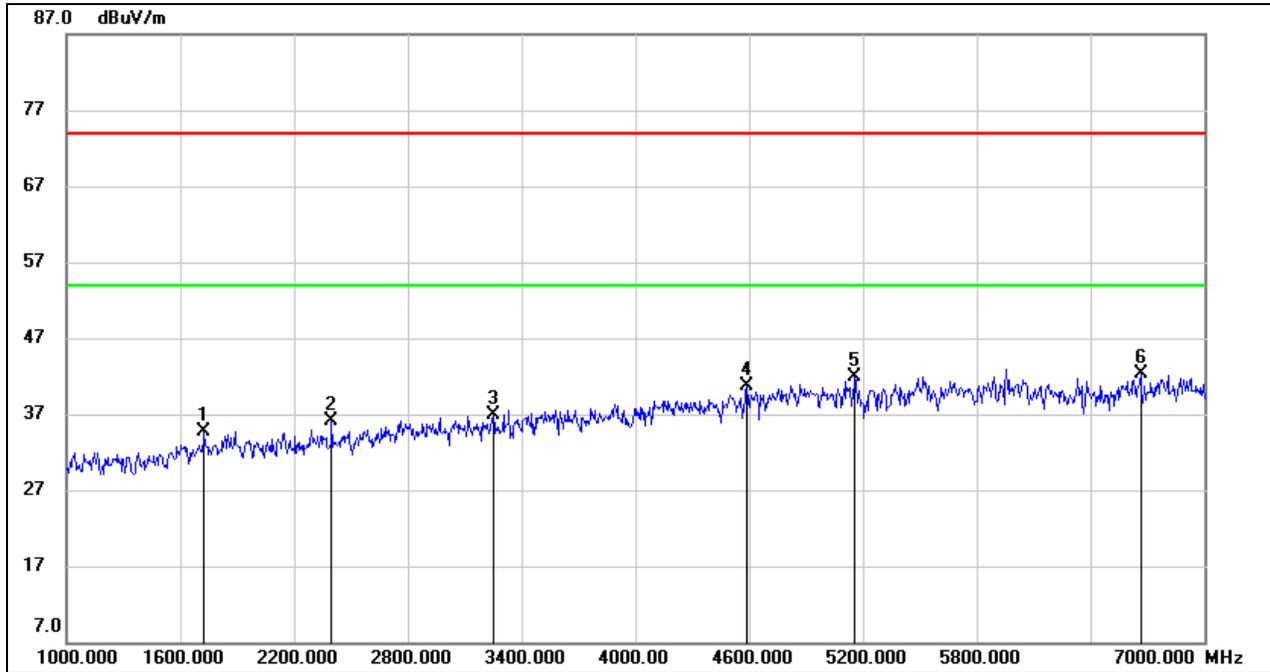

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1726.000	45.33	-10.66	34.67	74.00	-39.33	peak
2	2398.000	44.80	-8.62	36.18	74.00	-37.82	peak
3	3250.000	42.61	-5.61	37.00	74.00	-37.00	peak
4	4588.000	41.49	-0.73	40.76	74.00	-33.24	peak
5	5158.000	40.19	1.70	41.89	74.00	-32.11	peak
6	6664.000	37.80	4.47	42.27	74.00	-31.73	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

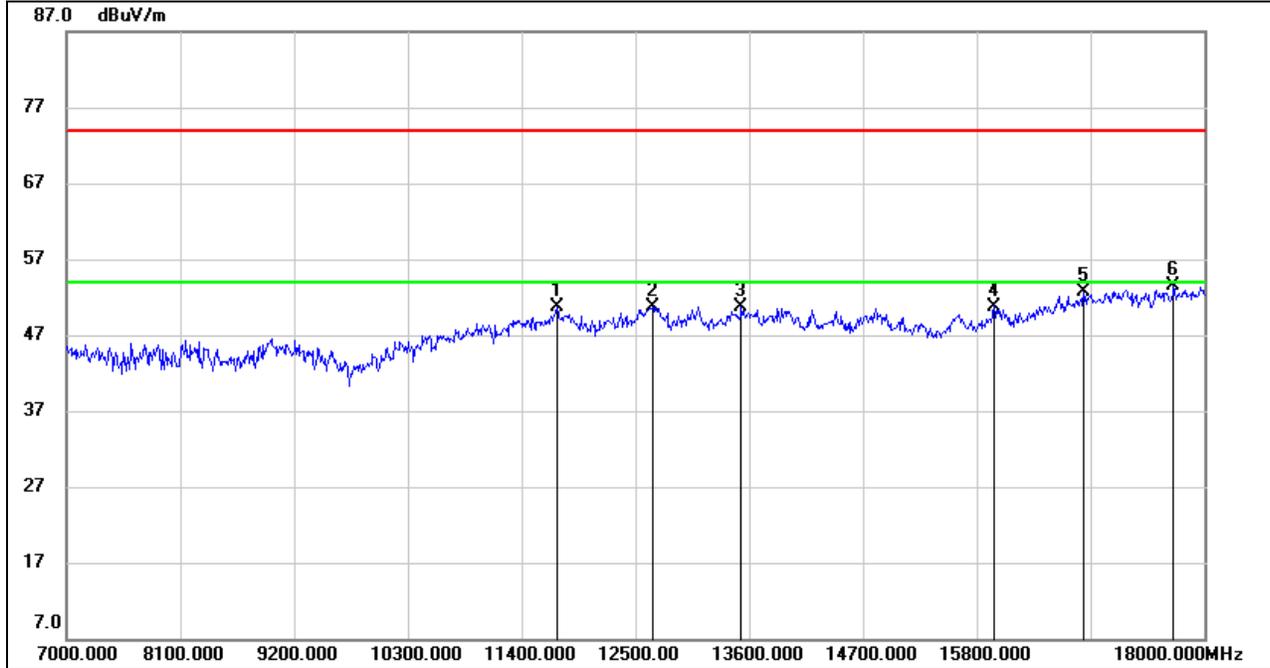


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11741.000	36.39	14.29	50.68	74.00	-23.32	peak
2	12665.000	35.58	15.22	50.80	74.00	-23.20	peak
3	13523.000	34.79	15.93	50.72	74.00	-23.28	peak
4	15965.000	33.22	17.58	50.80	74.00	-23.20	peak
5	16834.000	32.56	20.17	52.73	74.00	-21.27	peak
6	17703.000	30.73	22.77	53.50	74.00	-20.50	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

8.2.3. UNII-2C BAND

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)


PEAK

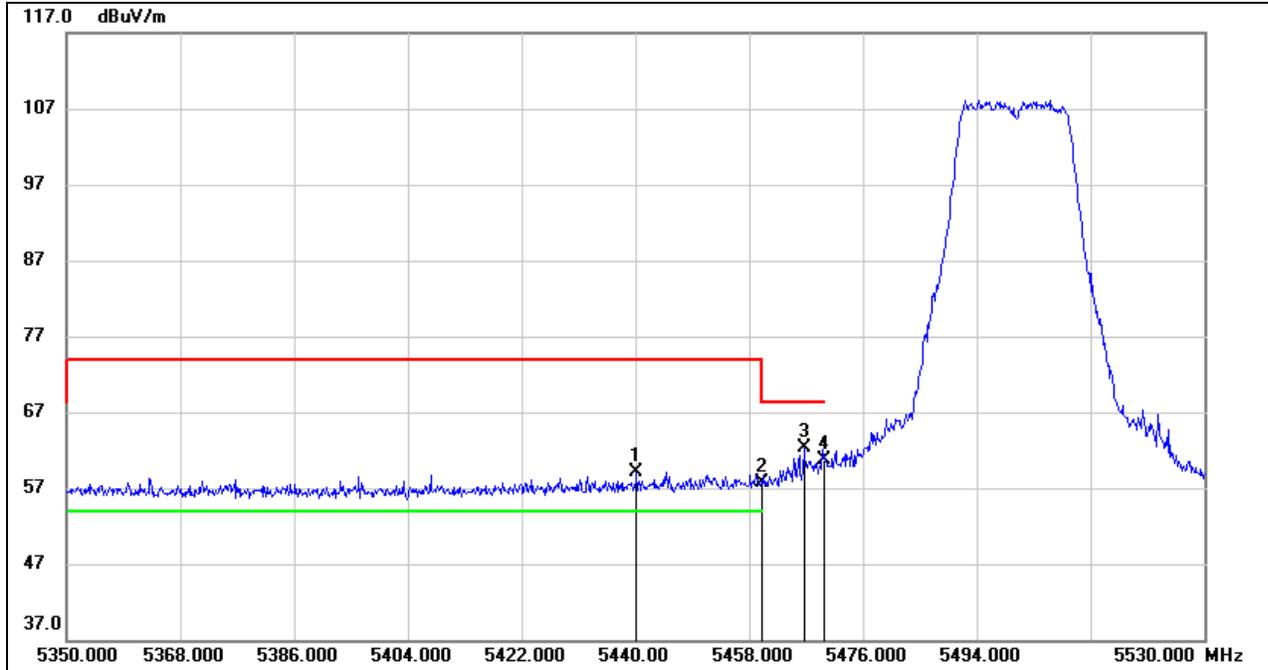

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.180	18.13	41.03	59.16	74.00	-14.84	peak
2	5460.000	16.49	41.28	57.77	68.20	-10.43	peak
3	5466.640	20.91	41.37	62.28	68.20	-5.92	peak
4	5470.000	19.25	41.41	60.66	68.20	-7.54	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

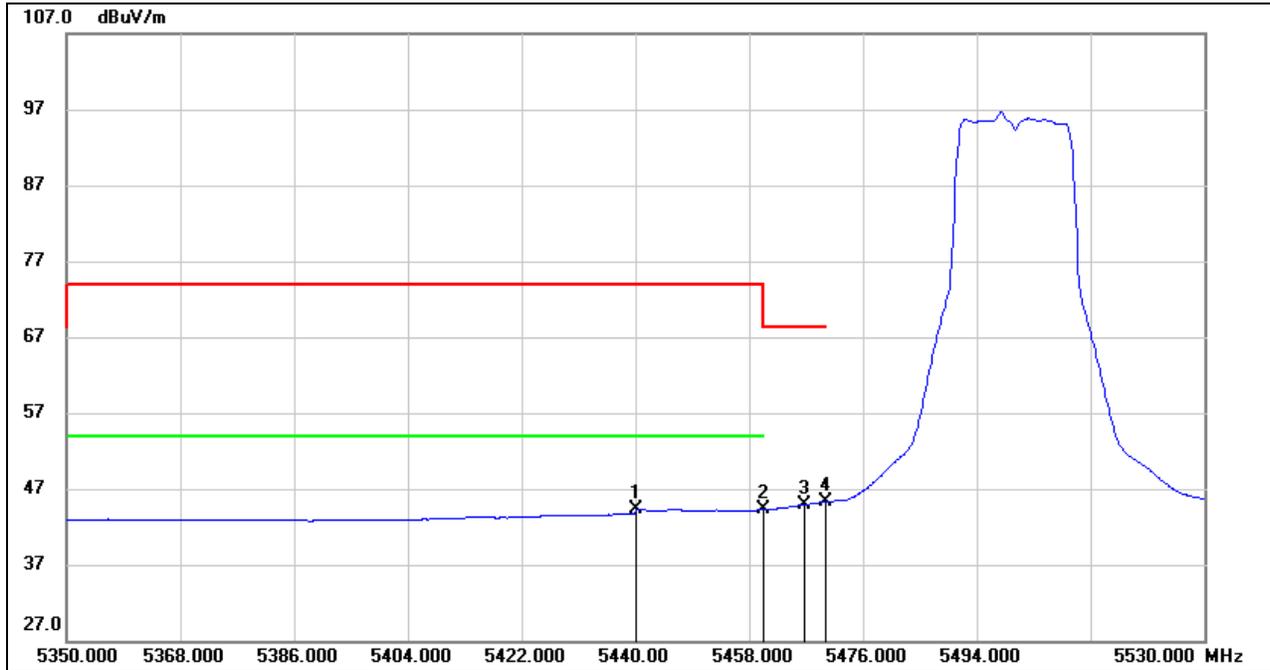


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.180	3.26	41.03	44.29	54.00	-9.71	AVG
2	5460.000	3.00	41.28	44.28	54.00	-9.72	AVG
3	5466.640	3.53	41.37	44.90	68.20	-23.30	AVG
4	5470.000	3.95	41.41	45.36	68.20	-22.84	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)


PEAK

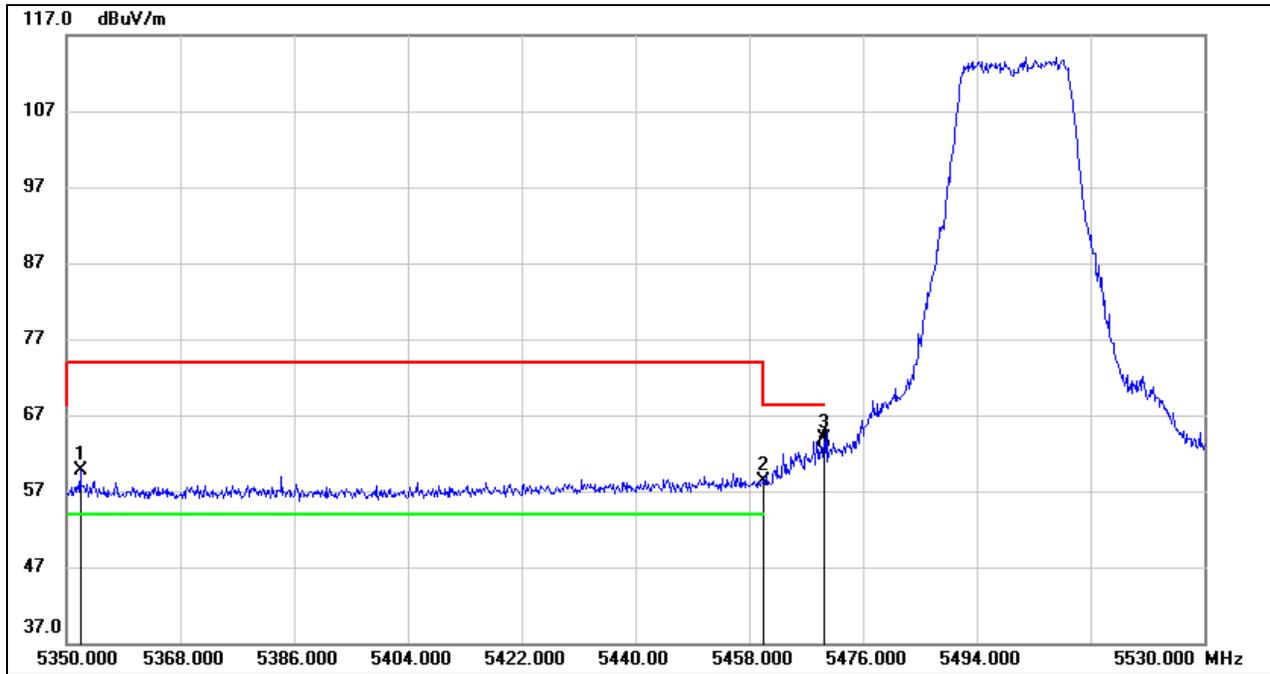

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5352.160	19.07	40.63	59.70	74.00	-14.30	peak
2	5460.000	16.98	41.28	58.26	68.20	-9.94	peak
3	5469.880	22.52	41.41	63.93	68.20	-4.27	peak
4	5470.000	20.75	41.41	62.16	68.20	-6.04	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

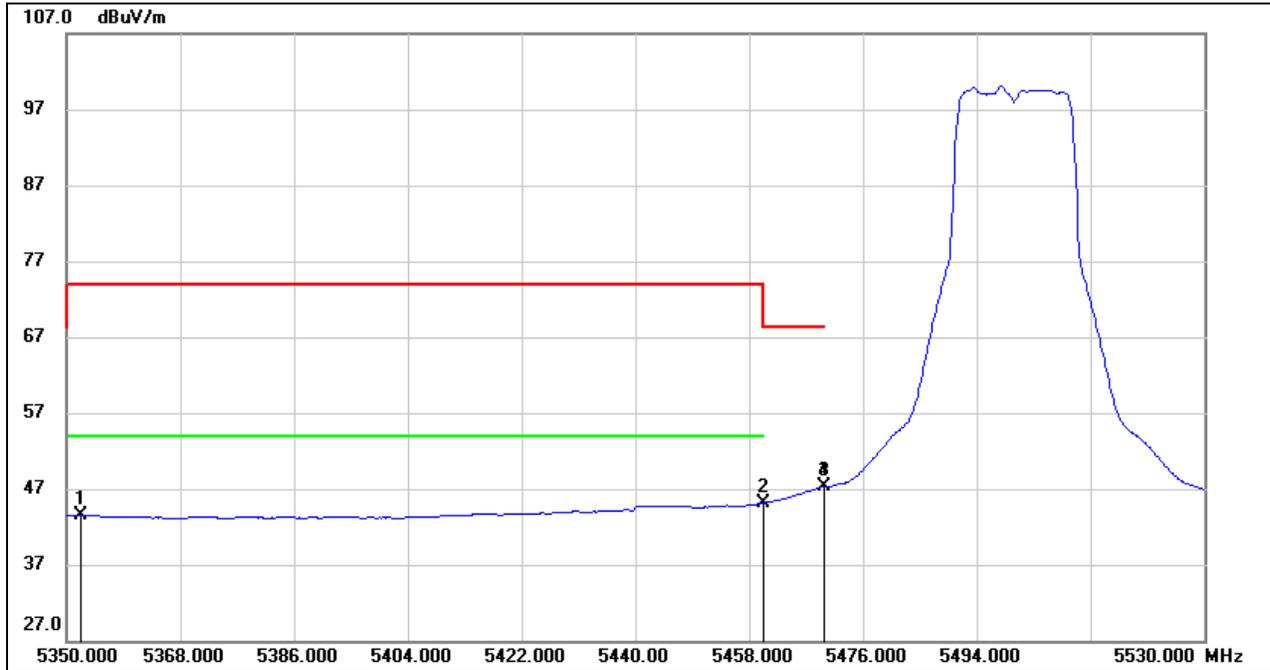


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5352.160	2.82	40.63	43.45	54.00	-10.55	AVG
2	5460.000	3.90	41.28	45.18	54.00	-8.82	AVG
3	5469.880	5.97	41.41	47.38	68.20	-20.82	AVG
4	5470.000	5.94	41.41	47.35	68.20	-20.85	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 4. For the transmitting duration, please refer to clause 7.1.
 5. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

PEAK

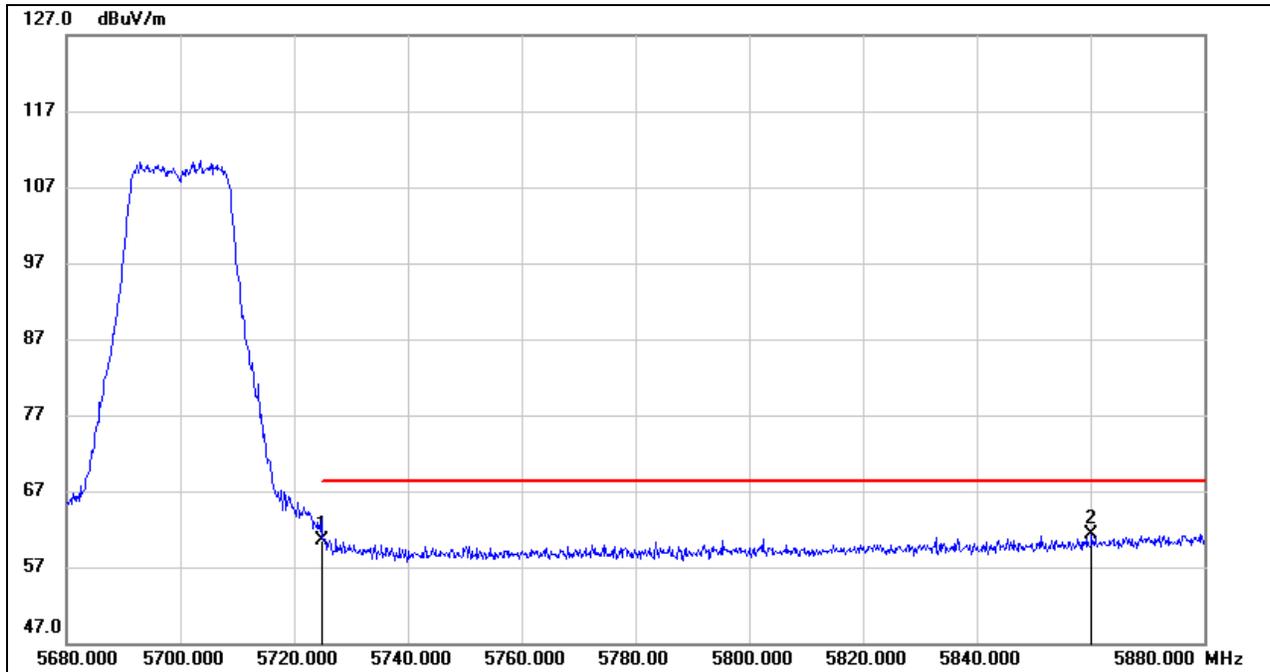


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	18.99	41.61	60.60	68.20	-7.60	peak
2	5860.200	18.23	43.08	61.31	68.20	-6.89	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

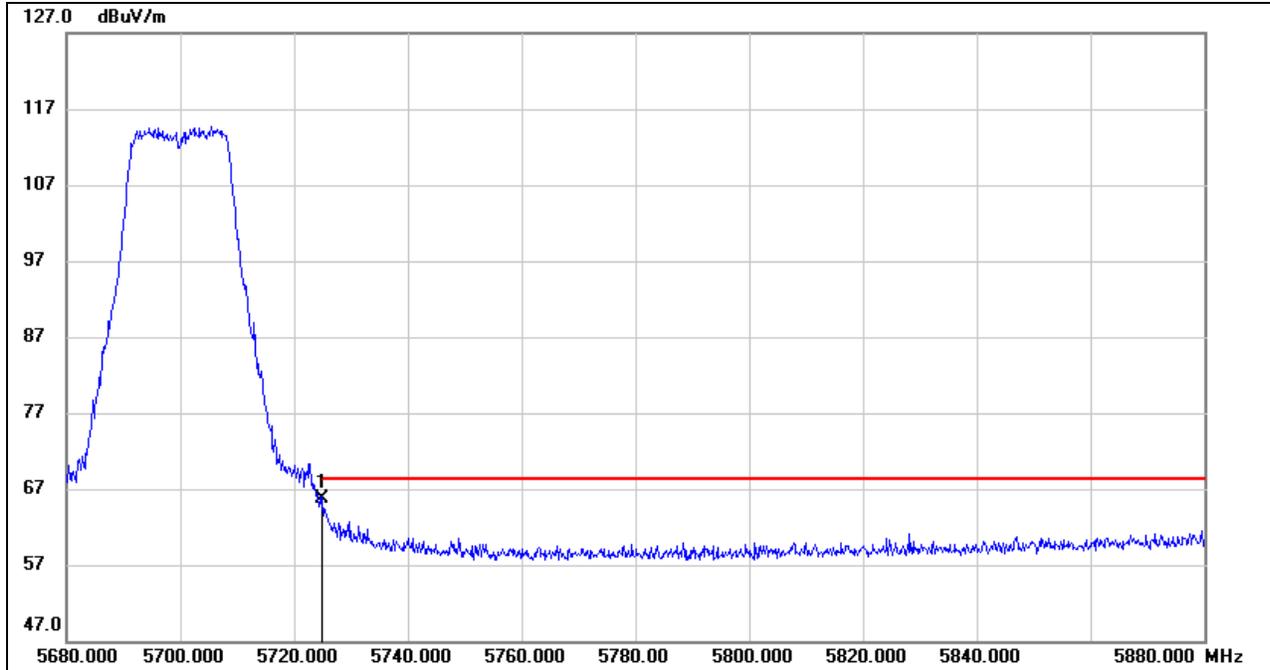


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	24.19	41.61	65.80	68.20	-2.40	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)


1-7GHz

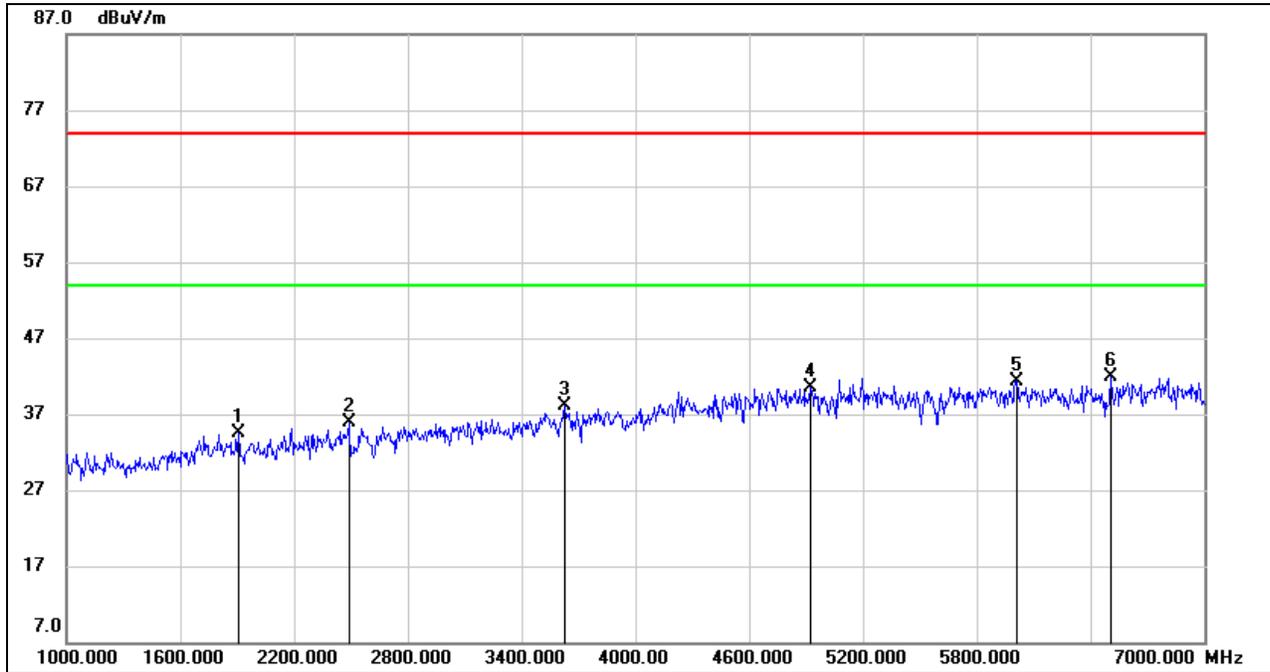

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1906.000	44.75	-10.18	34.57	74.00	-39.43	peak
2	2488.000	44.37	-8.50	35.87	74.00	-38.13	peak
3	3628.000	42.33	-4.31	38.02	74.00	-35.98	peak
4	4924.000	39.85	0.72	40.57	74.00	-33.43	peak
5	6010.000	38.79	2.61	41.40	74.00	-32.60	peak
6	6508.000	37.96	4.00	41.96	74.00	-32.04	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

7-18GHz

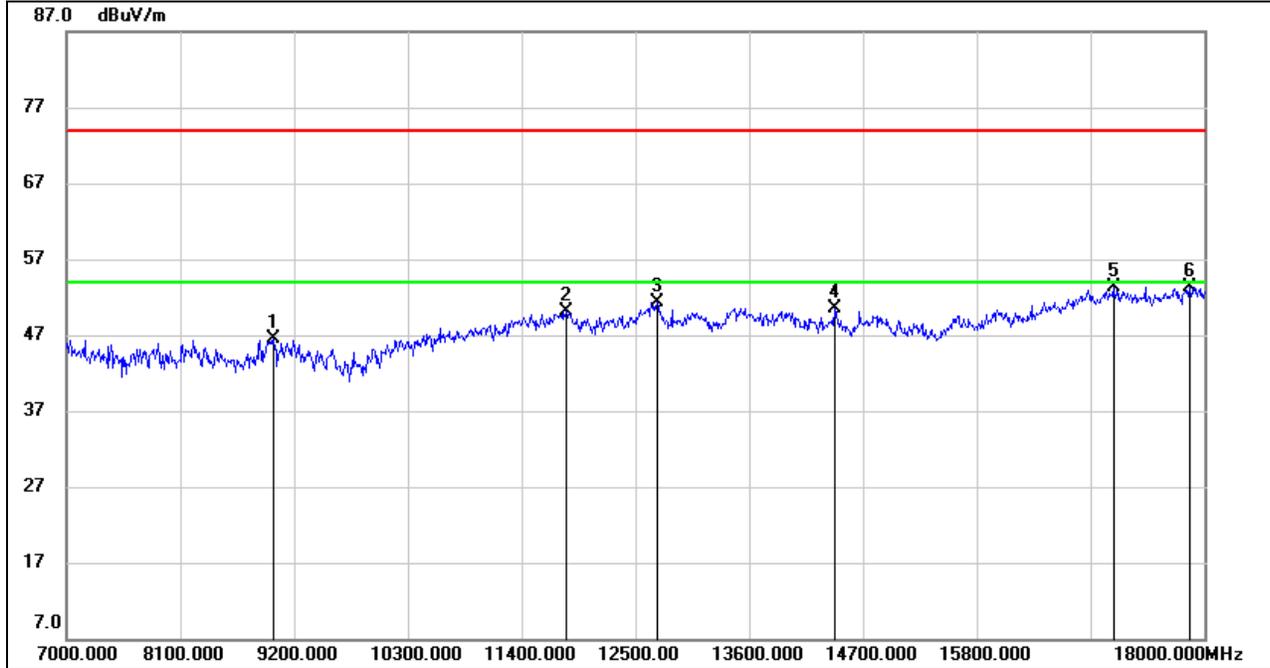


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9002.000	36.26	10.19	46.45	74.00	-27.55	peak
2	11829.000	35.61	14.48	50.09	74.00	-23.91	peak
3	12709.000	36.07	15.26	51.33	74.00	-22.67	peak
4	14425.000	34.37	16.11	50.48	74.00	-23.52	peak
5	17120.000	32.10	21.20	53.30	74.00	-20.70	peak
6	17857.000	29.75	23.55	53.30	74.00	-20.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

1-7GHz

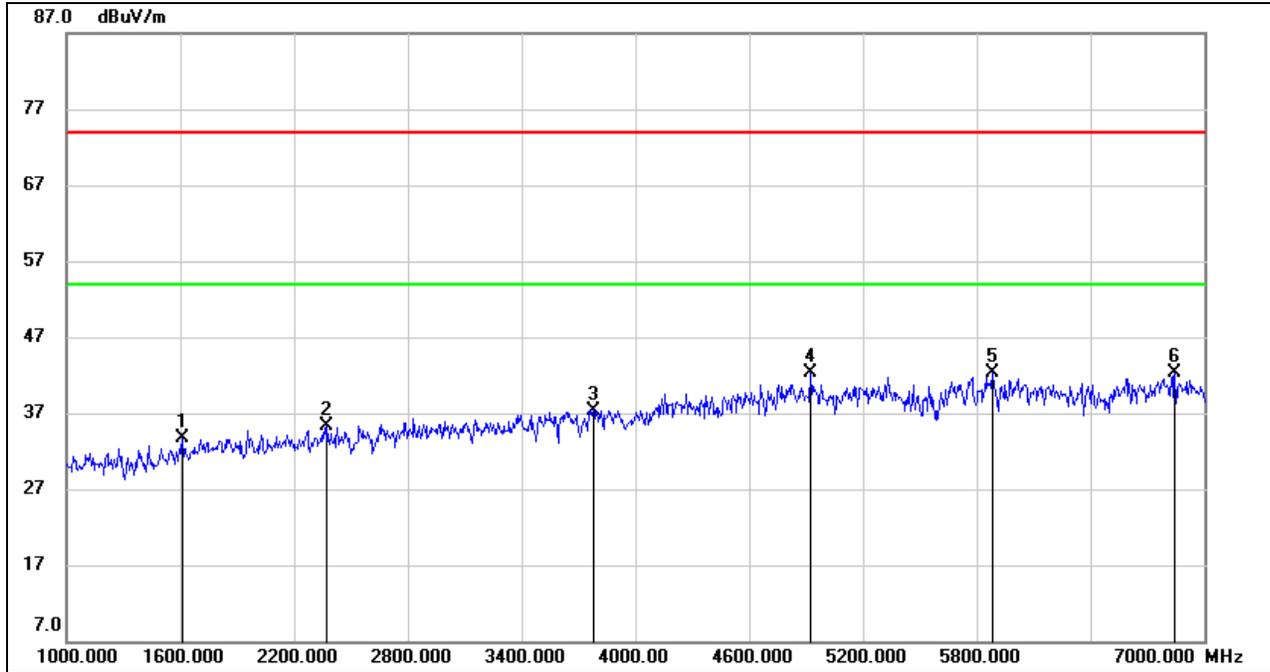

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1612.000	45.30	-11.52	33.78	74.00	-40.22	peak
2	2374.000	44.07	-8.69	35.38	74.00	-38.62	peak
3	3778.000	40.96	-3.56	37.40	74.00	-36.60	peak
4	4924.000	41.59	0.72	42.31	74.00	-31.69	peak
5	5884.000	39.98	2.23	42.21	74.00	-31.79	peak
6	6844.000	37.67	4.55	42.22	74.00	-31.78	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
 5. For the transmitting duration, please refer to clause 7.1.
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
 8. Owing to the highest peak level of unwanted emission out of the restricted bands complies with the lowest limit(54dBuV/m), so all the test point was deemed to comply with the limits list in the standard.