



# FCC RF Test Report

**APPLICANT** : Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Lenovo Mobile Phone  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo PB2-690Y  
**FCC ID** : O57PB2690Y  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on May 11, 2016 and testing was completed on Jun. 14, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

- 1 GENERAL DESCRIPTION ..... 5**
  - 1.1 Applicant ..... 5
  - 1.2 Manufacturer ..... 5
  - 1.3 Product Feature of Equipment Under Test ..... 5
  - 1.4 Product Specification of Equipment Under Test ..... 6
  - 1.5 Component List ..... 6
  - 1.6 Modification of EUT ..... 6
  - 1.7 Testing Location ..... 7
  - 1.8 Applicable Standards ..... 8
- 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**
  - 2.1 Carrier Frequency and Channel ..... 9
  - 2.2 Pre-Scanned RF Power ..... 10
  - 2.3 Test Mode ..... 11
  - 2.4 Connection Diagram of Test System ..... 12
  - 2.5 Support Unit used in test configuration and system ..... 13
  - 2.6 EUT Operation Test Setup ..... 13
  - 2.7 Measurement Results Explanation Example ..... 13
- 3 TEST RESULT ..... 14**
  - 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 14
  - 3.2 Maximum Conducted Output Power Measurement ..... 17
  - 3.3 Power Spectral Density Measurement ..... 18
  - 3.4 Unwanted Emissions Measurement ..... 21
  - 3.5 AC Conducted Emission Measurement ..... 27
  - 3.6 Frequency Stability Measurement ..... 31
  - 3.7 Automatically Discontinue Transmission ..... 32
  - 3.8 Antenna Requirements ..... 33
- 4 LIST OF MEASURING EQUIPMENT ..... 34**
- 5 UNCERTAINTY OF EVALUATION ..... 35**
- APPENDIX A. CONDUCTED TEST RESULTS**
- APPENDIX B. RADIATED TEST RESULTS**
- APPENDIX C. Duty Cycle Plots**
- APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	RSS-247 Section 6	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	15.407(b)(4)(i) ≤ -17, -27 dBm/MHz & 15.209(a)	Pass	Under limit 9.25 dB at 17475.000 MHz
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 11.01 dB at 0.610 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

## 1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Lenovo Mobile Phone
Brand Name	Lenovo
Model Name	Lenovo PB2-690Y
FCC ID	O57PB2690Y
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 869972020004370/869972020004388 Radiation: 869972020005856/869972020005864 Conduction: 869972020005054/869972020005062
HW Version	Lenovo PB2-690Y
SW Version	PB2-690Y-160711
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	802.11a : 11.41 dBm / 0.0138 W 802.11n HT20 : 11.47 dBm / 0.0140 W 802.11n HT40 : 11.99 dBm / 0.0158 W 802.11ac VHT20: 11.88 dBm / 0.0154 W 802.11ac VHT40: 10.94 dBm / 0.0124 W 802.11ac VHT80: 10.29 dBm / 0.0107 W
<b>99% Occupied Bandwidth</b>	802.11a : 18.65 MHz 802.11n HT20 : 19.35 MHz 802.11n HT40 : 36.70 MHz 802.11ac VHT20 : 19.35 MHz 802.11ac VHT40 : 36.80 MHz 802.11ac VHT80 : 74.76 MHz
<b>Antenna Type / Gain</b>	PIFA Antenna with gain 0.10 dBi
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

### 1.5 Component List

**Note:** There are two types of EUT, the details refer the following table. According to the difference, we evaluate is not affect RF performance, so only choose sample 1 to perform RF test.

Component	Sample 1	Sample 2
4GB LPDDR3	Samsung K3QF4F40BM-FGCF	Hynix H9CKNNNCPTMRPR-NUH
64GB eMMC	Toshiba THGBMGG9T4LBAIR	Samsung KLMCG4JENB-B041

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-SZ	

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.	
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC/IC Registration No.</b>
	03CH03-SZ	565805/4086F

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	CO01-KS	

**Note:** The test site complies with ANSI C63.4 2014 requirement.



## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	<b>151</b>	<b>5755</b>	<b>159</b>	<b>5795</b>
	153	5765	161	5805
	155	5775	165	5825

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables.

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 149	5745	11.41	CH 149	11.37	11.28	10.43	10.38	10.40	9.24	9.18
CH 157	5785	11.37								
CH 165	5825	11.34								

WLAN 5GHz 802.11n-HT20 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 149	5745	11.45	CH 157	11.39	11.39	10.33	10.38	10.30	9.21	9.24
CH 157	5785	11.47								
CH 165	5825	11.40								

WLAN 5GHz 802.11n-HT40 Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 151	5755	11.95	CH 159	11.92	11.93	10.78	10.69	10.70	9.48	9.49
CH 159	5795	11.99								

WLAN 5GHz 802.11ac VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0									
CH 149	5745	11.88	CH 149	11.80	11.83	10.73	10.61	10.69	9.66	9.62	9.55
CH 157	5785	11.86									
CH 165	5825	11.79									

WLAN 5GHz 802.11ac VHT40 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 151	5755	10.84	CH 159	10.93	10.87	9.72	9.77	9.82	8.70	8.64	8.73	8.76
CH 159	5795	10.94										

WLAN 5GHz 802.11n-HT80 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 155	5775	10.29	CH 155	10.15	10.18	9.20	9.06	9.21	8.13	8.18	8.13	8.10



### 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


AC Conducted Emission	<p>Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link (5GHz) + Earphone + USB Cable (Charging from Adapter 12V) for Sample 1</p> <p>Mode 2 : <b>GSM850 Idle + Bluetooth Link + WLAN Link (5GHz) + Earphone + USB Cable (Charging from Adapter 5.2V) for Sample 1</b></p>
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>For Radiated TCs, the tests were performed with Sample 1.</li> <li>The worst case of conducted emission is mode 2; only the test data of it was reported.</li> </ol>	

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

## 2.4 Connection Diagram of Test System

<WLAN Tx Mode>

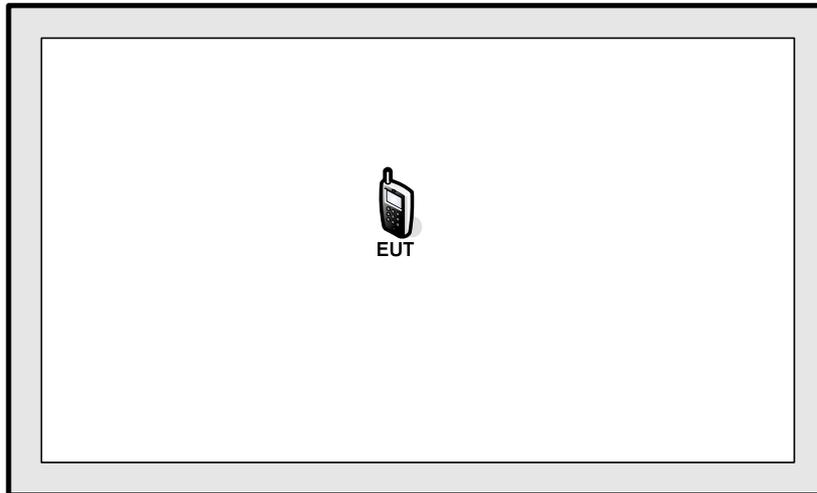

<AC Conducted Emission Mode>

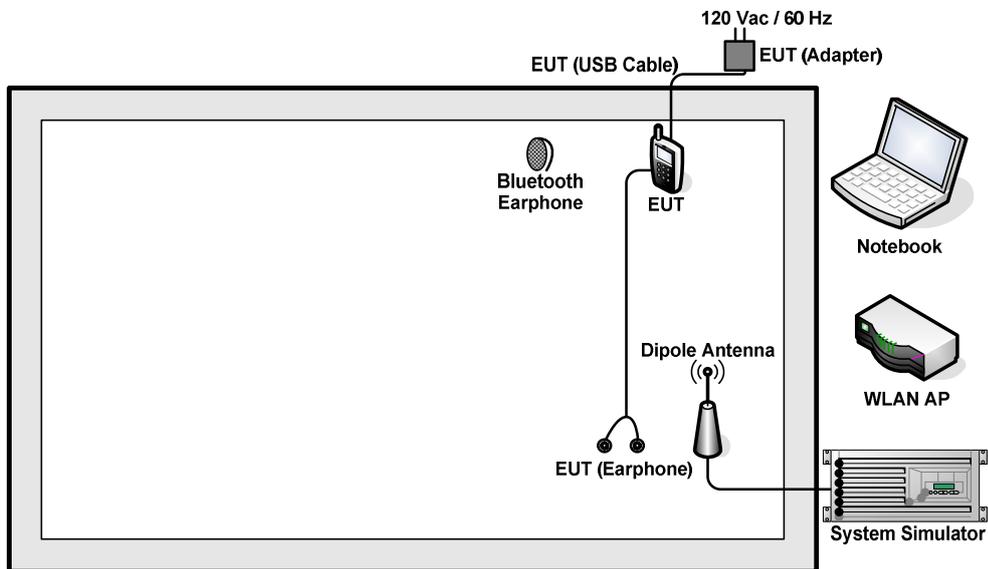

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH 505	FCC DoC	N/A	N/A
5.	DC Power Supply	GW INSTEK	GPD-2303S	N/A	N/A	Unshielded, 1.8 m

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 6.5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.5 + 10 = 16.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



##### 3.1.4 Test Setup

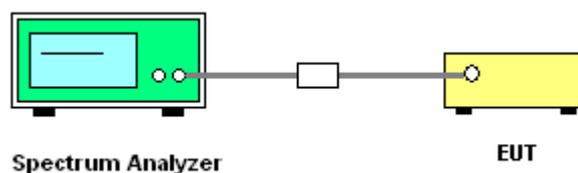




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

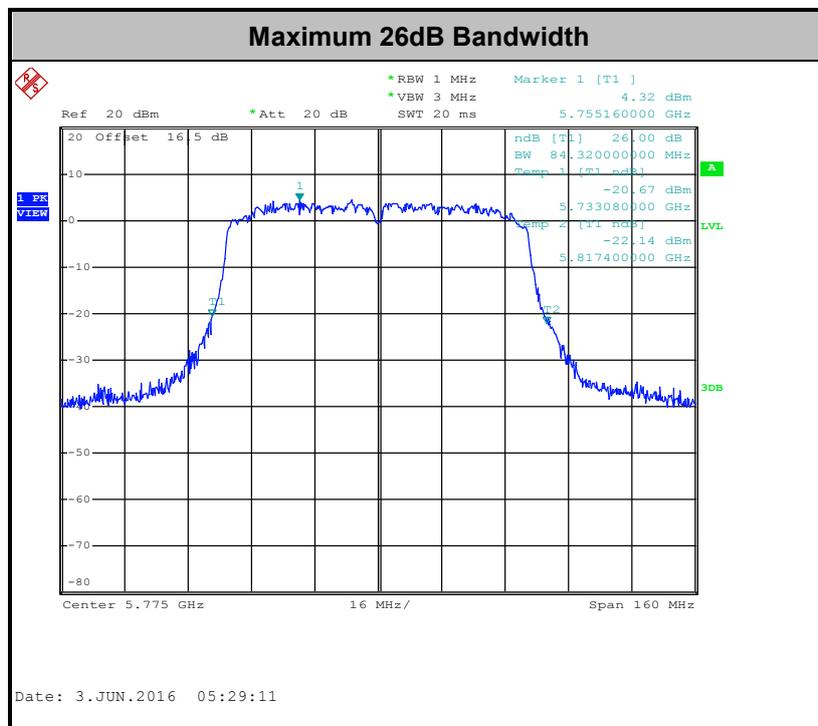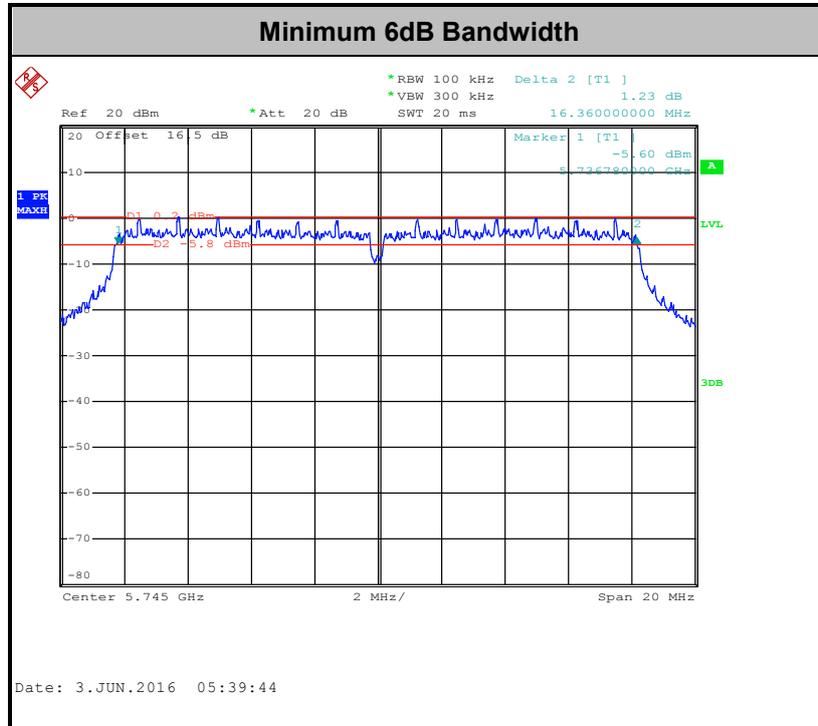

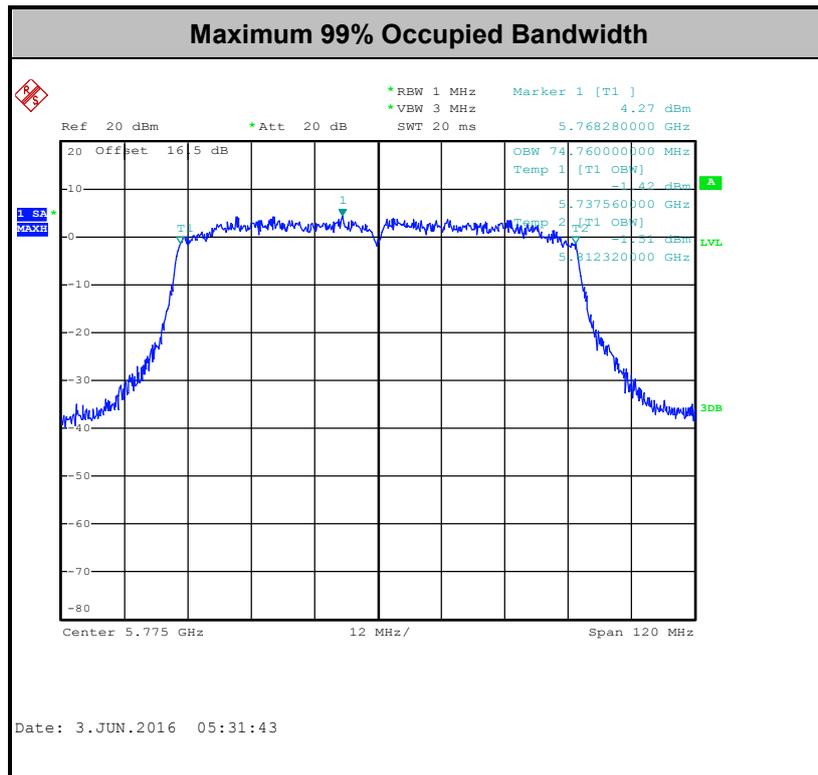

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

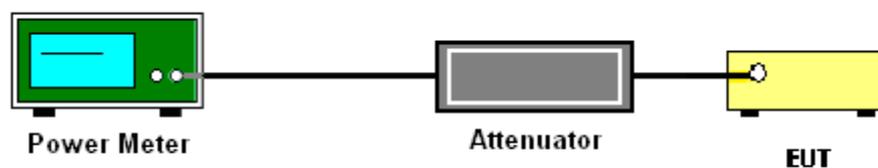

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section F) Maximum power spectral density.


##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


### 3.3.4 Test Setup

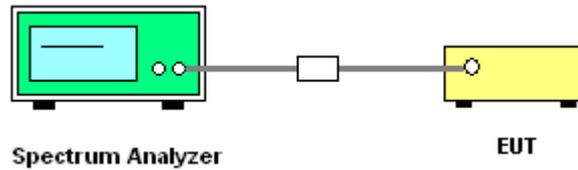



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

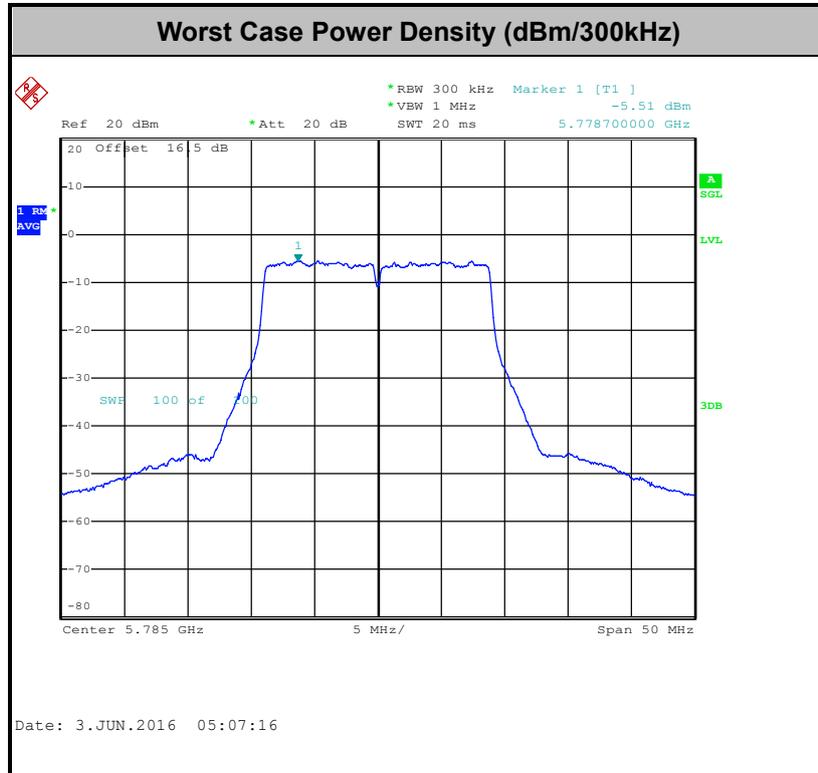



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) For transmitters operating in the 5725-5850 MHz band:  
all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBµV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBµV/m).
- (3) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3



- (4) KDB 789033 D02 General UNII Test Procedures New Rules v01r02 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



### **3.4.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r02. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

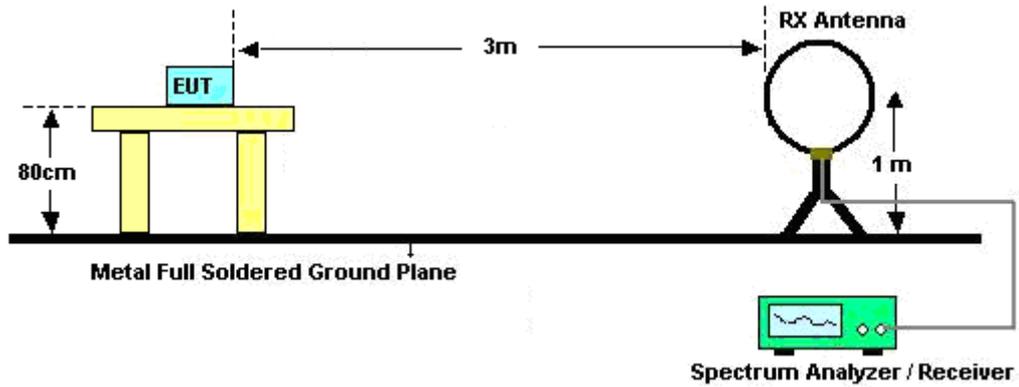

For radiated emissions from 30MHz to 1GHz

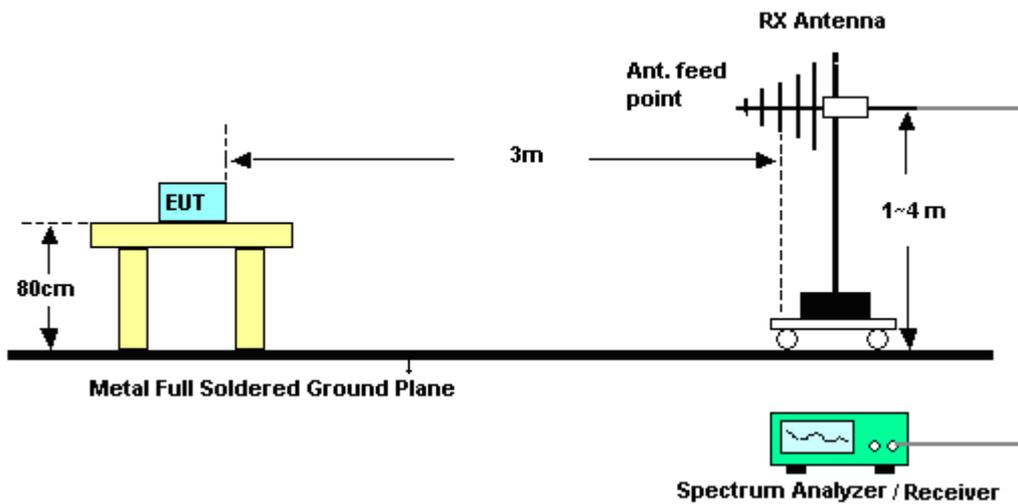

For radiated emissions above 1GHz

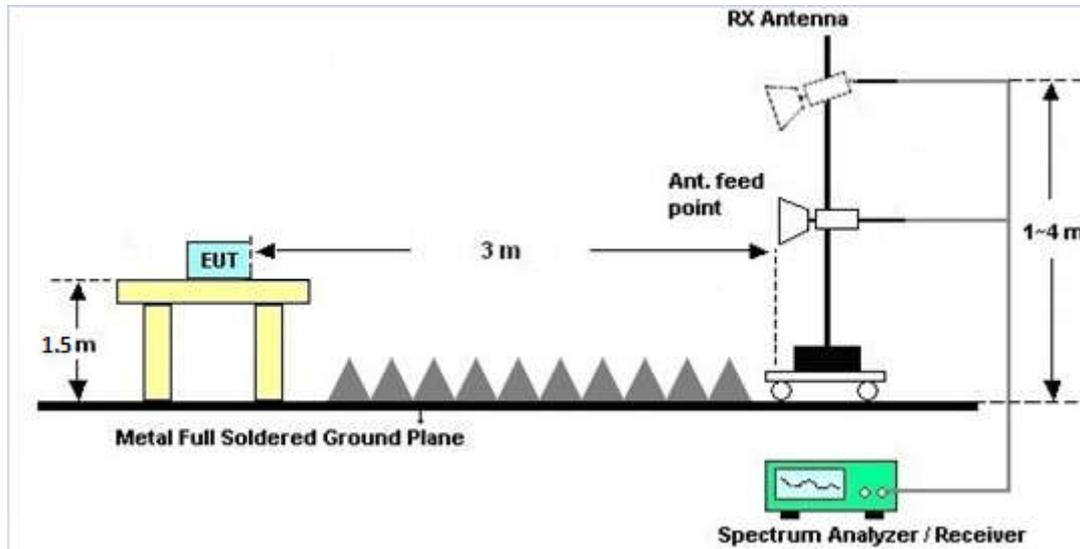

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

### 3.4.7 Duty Cycle

Please refer to Appendix C.

### 3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

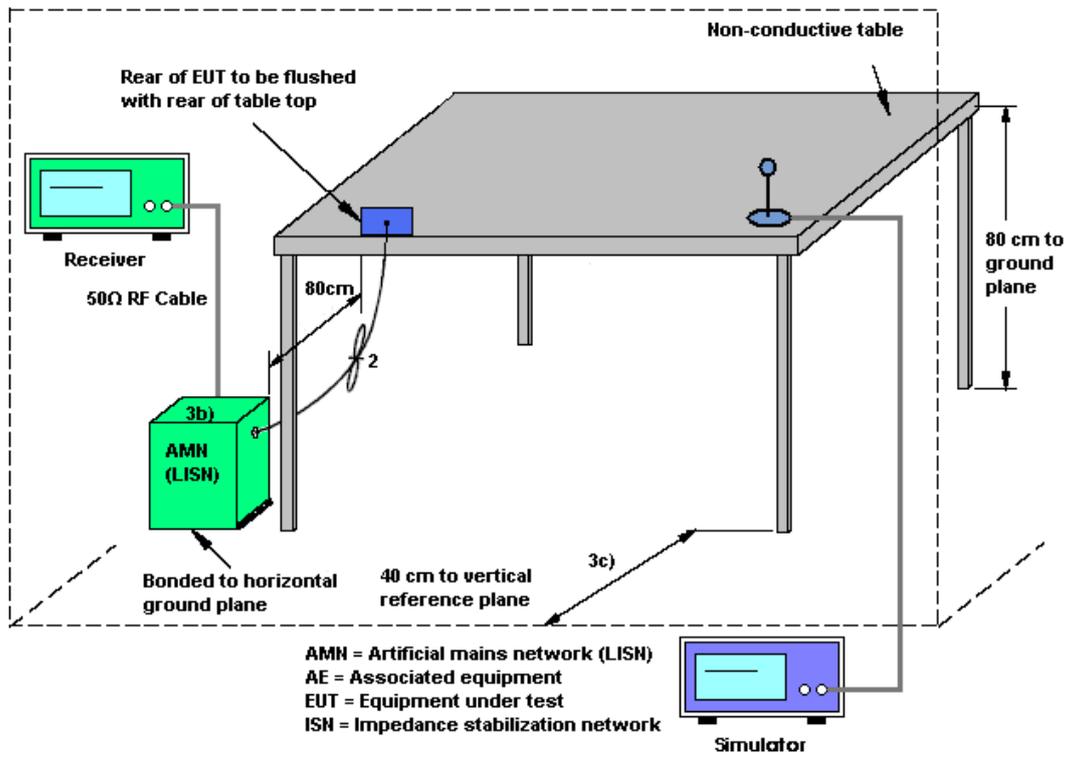



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5GHz) + Earphone + USB Cable (Charging from Adapter 5.2V) for Sample 1		

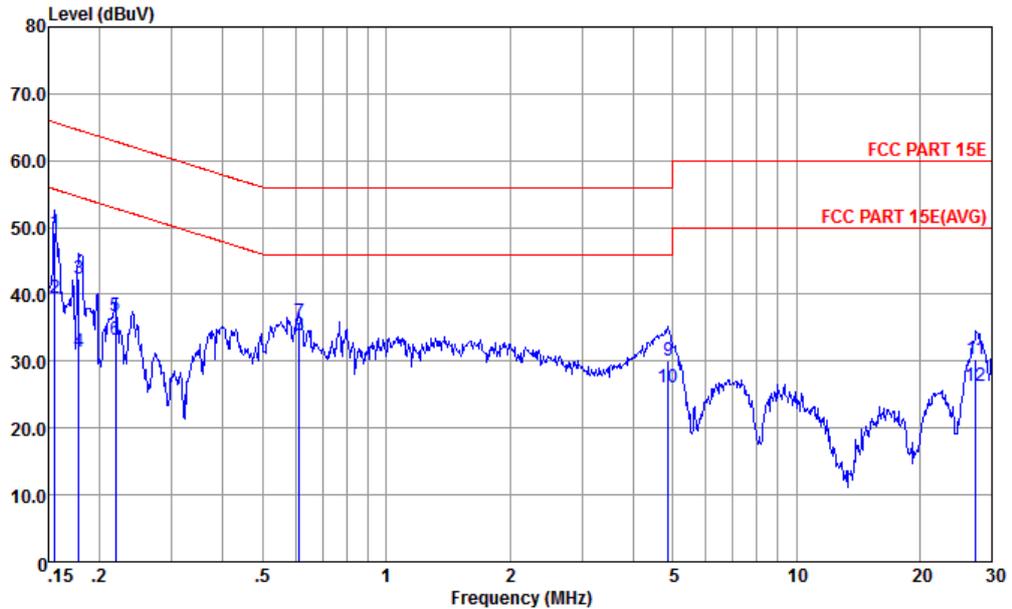


Site : CO01-KS  
 Condition : FCC PART 15E LISN-L-20151024 LINE

mode : Mode 2  
 IMEI : 869972020005054/869972020005062 #1

	Freq	Level	Over Limit	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	49.20	-16.49	65.69	38.60	0.49	10.11	QP
2	0.16	39.50	-16.19	55.69	28.90	0.49	10.11	Average
3	0.18	42.26	-22.33	64.59	31.80	0.34	10.12	QP
4	0.18	31.36	-23.23	54.59	20.90	0.34	10.12	Average
5	0.22	36.85	-26.03	62.88	26.50	0.22	10.13	QP
6	0.22	33.25	-19.63	52.88	22.90	0.22	10.13	Average
7	0.61	35.79	-20.21	56.00	25.39	0.24	10.16	QP
8 *	0.61	33.79	-12.21	46.00	23.39	0.24	10.16	Average
9	4.87	30.17	-25.83	56.00	19.80	0.19	10.18	QP
10	4.87	26.07	-19.93	46.00	15.70	0.19	10.18	Average
11	27.42	30.30	-29.70	60.00	19.31	0.22	10.77	QP
12	27.42	26.30	-23.70	50.00	15.31	0.22	10.77	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	43~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link (5GHz) + Earphone + USB Cable (Charging from Adapter 5.2V) for Sample 1		

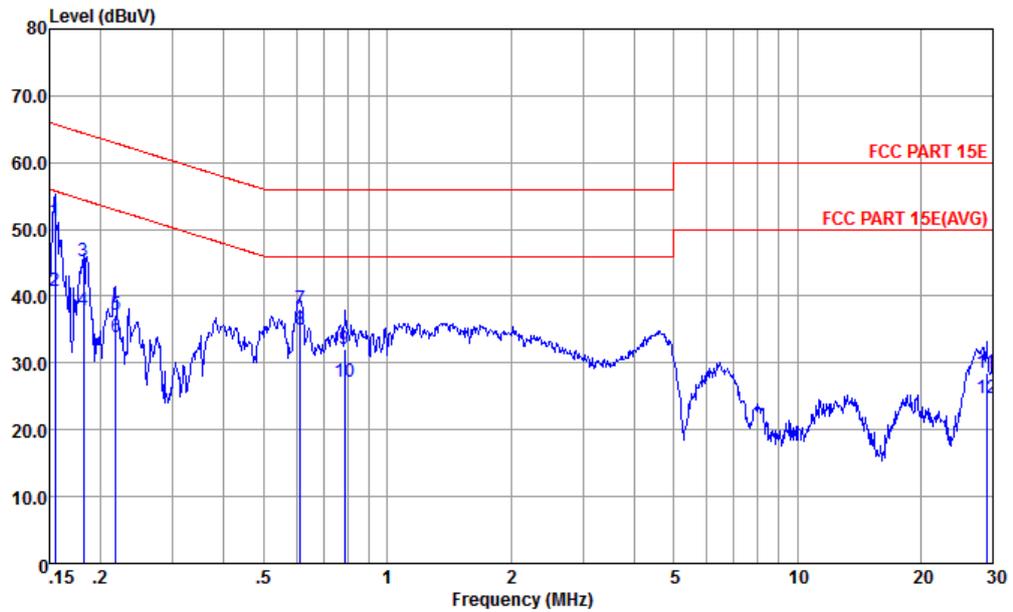

Site : CO01-KS  
Condition : FCC PART 15E LISN-N-20151024 NEUTRAL

mode : Mode 2  
IMEI : 869972020005054/869972020005062 #1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	51.21	-14.53	65.74	40.80	0.30	10.11	QP
2	0.15	40.81	-14.93	55.74	30.40	0.30	10.11	Average
3	0.18	45.23	-19.19	64.42	34.80	0.31	10.12	QP
4	0.18	37.83	-16.59	54.42	27.40	0.31	10.12	Average
5	0.22	37.14	-25.78	62.92	26.70	0.31	10.13	QP
6	0.22	33.94	-18.98	52.92	23.50	0.31	10.13	Average
7	0.61	38.09	-17.91	56.00	27.60	0.33	10.16	QP
8 *	0.61	34.99	-11.01	46.00	24.50	0.33	10.16	Average
9	0.79	32.10	-23.90	56.00	21.60	0.35	10.15	QP
10	0.79	27.30	-18.70	46.00	16.80	0.35	10.15	Average
11	28.91	28.57	-31.43	60.00	17.50	0.24	10.83	QP
12	28.91	24.77	-25.23	50.00	13.70	0.24	10.83	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

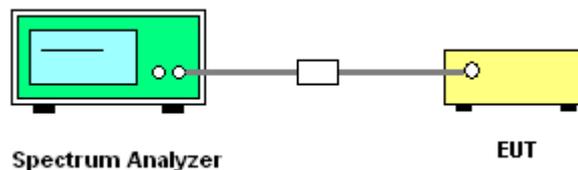

### 3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.8.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.8.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~40GHz	Jan. 12, 2016	Jun. 03, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 12, 2016	Jun. 03, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 12, 2016	Jun. 03, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Aug. 07, 2015	Jun. 03, 2016	Aug. 06, 2016	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	May 07, 2016	May 26, 2016~ Jun. 14, 2016	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	May 07, 2016	May 26, 2016~ Jun. 14, 2016	May 06, 2017	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	May 26, 2016~ Jun. 14, 2016	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	May 26, 2016~ Jun. 14, 2016	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	May 26, 2016~ Jun. 14, 2016	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 19, 2015	May 26, 2016~ Jun. 14, 2016	Aug. 18, 2016	Radiation (03CH03-SZ)
Amplifier	PREAMP LIFIER	BPA-530	102210	0.01Hz ~3000MHz	Oct. 20, 2015	May 26, 2016~ Jun. 14, 2016	Oct. 19, 2016	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 12, 2016	May 26, 2016~ Jun. 14, 2016	Jan. 11, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 18, 2015	May 26, 2016~ Jun. 14, 2016	Jul. 17, 2016	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 20, 2015	May 26, 2016~ Jun. 14, 2016	Oct. 19, 2016	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	May 26, 2016~ Jun. 14, 2016	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 26, 2016~ Jun. 14, 2016	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 26, 2016~ Jun. 14, 2016	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 29, 2016	Jun. 13, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jun. 13, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jun. 13, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jun. 13, 2016	Oct. 23, 2016	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Tiny You	Temperature:	24~26	°C
Test Date:	2016/6/3	Relative Humidity:	50~53	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV									
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	18.3	23.65	16.36	0.5	Pass
11a	6Mbps	1	157	5785	18.65	23.75	16.36	0.5	Pass
11a	6Mbps	1	165	5825	18.6	23.55	16.36	0.5	Pass
HT20	MCS 0	1	149	5745	19.35	24	17.6	0.5	Pass
HT20	MCS 0	1	157	5785	19.25	23.95	17.54	0.5	Pass
HT20	MCS 0	1	165	5825	19.3	24.1	17.56	0.5	Pass
HT40	MCS 0	1	151	5755	36.7	45.18	35.68	0.5	Pass
HT40	MCS 0	1	159	5795	36.6	44.73	35.68	0.5	Pass
VHT20	MCS 0	1	149	5745	19.25	24.3	17.56	0.5	Pass
VHT20	MCS 0	1	157	5785	19.35	24.05	17.56	0.5	Pass
VHT20	MCS 0	1	165	5825	19.3	24.1	17.56	0.5	Pass
VHT40	MCS 0	1	151	5755	36.8	44.19	35.36	0.5	Pass
VHT40	MCS 0	1	159	5795	36.7	45.09	35.12	0.5	Pass
VHT80	MCS 0	1	155	5775	74.76	84.32	75.12	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.33	11.41	30.00	0.10		Pass
11a	6Mbps	1	157	5785	0.33	11.37	30.00	0.10		Pass
11a	6Mbps	1	165	5825	0.33	11.34	30.00	0.10		Pass
HT20	MCS 0	1	149	5745	0.35	11.45	30.00	0.10		Pass
HT20	MCS 0	1	157	5785	0.35	11.47	30.00	0.10		Pass
HT20	MCS 0	1	165	5825	0.35	11.40	30.00	0.10		Pass
HT40	MCS 0	1	151	5755	0.64	11.95	30.00	0.10		Pass
HT40	MCS 0	1	159	5795	0.64	11.99	30.00	0.10		Pass
VHT20	MCS 0	1	149	5745	0.81	11.88	30.00	0.10		Pass
VHT20	MCS 0	1	157	5785	0.81	11.86	30.00	0.10		Pass
VHT20	MCS 0	1	165	5825	0.81	11.79	30.00	0.10		Pass
VHT40	MCS 0	1	151	5755	1.48	10.84	30.00	0.10		Pass
VHT40	MCS 0	1	159	5795	1.48	10.94	30.00	0.10		Pass
VHT80	MCS 0	1	155	5775	2.57	10.29	30.00	0.10		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.33	2.22	-2.85	30.00	0.10	Pass
11a	6Mbps	1	157	5785	0.33	2.22	-2.72	30.00	0.10	Pass
11a	6Mbps	1	165	5825	0.33	2.22	-2.92	30.00	0.10	Pass
HT20	MCS 0	1	149	5745	0.35	2.22	-3.21	30.00	0.10	Pass
HT20	MCS 0	1	157	5785	0.35	2.22	-2.98	30.00	0.10	Pass
HT20	MCS 0	1	165	5825	0.35	2.22	-2.74	30.00	0.10	Pass
HT40	MCS 0	1	151	5755	0.64	2.22	-5.25	30.00	0.10	Pass
HT40	MCS 0	1	159	5795	0.64	2.22	-4.56	30.00	0.10	Pass
VHT20	MCS 0	1	149	5745	0.81	2.22	-2.75	30.00	0.10	Pass
VHT20	MCS 0	1	157	5785	0.81	2.22	-2.48	30.00	0.10	Pass
VHT20	MCS 0	1	165	5825	0.81	2.22	-2.52	30.00	0.10	Pass
VHT40	MCS 0	1	151	5755	1.48	2.22	-4.23	30.00	0.10	Pass
VHT40	MCS 0	1	159	5795	1.48	2.22	-4.15	30.00	0.10	Pass
VHT80	MCS 0	1	155	5775	2.57	2.22	-6.68	30.00	0.10	Pass

**TEST RESULTS DATA**  
**Frequency Stability**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	3.7	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	4.2	
11a	6M bps	1	149	5745	5744.975	-0.025	-4.35	20	3.8	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	-30	3.8	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	50	3.8	



## Appendix B. Radiated Spurious Emission

### Band 4 - 5725~5850MHz WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11a CH 149 5745MHz		5649	44.63	-23.67	68.3	38.58	32.22	7.32	33.49	247	186	P	H
		5692	44.6	-54.8	99.4	38.45	32.3	7.36	33.51	247	186	P	H
		5703	43.93	-62.21	106.14	37.75	32.33	7.36	33.51	247	186	P	H
		5725	46.5	-75.8	122.3	40.3	32.36	7.36	33.52	247	186	P	H
		5745	95.73	-	-	89.46	32.39	7.41	33.53	247	186	P	H
		5745	85.32	-	-	79.05	32.39	7.41	33.53	247	186	A	H
		5644.4	44.71	-23.59	68.3	38.71	32.22	7.27	33.49	150	120	P	V
		5678.6	44.33	-45.17	89.5	38.23	32.28	7.32	33.5	150	120	P	V
		5715.8	43.75	-65.98	109.73	37.58	32.33	7.36	33.52	150	120	P	V
		5723.2	45.56	-72.64	118.2	39.36	32.36	7.36	33.52	150	120	P	V
		5745	91.13	-	-	84.86	32.39	7.41	33.53	150	120	P	V
		5745	81.3	-	-	75.03	32.39	7.41	33.53	150	120	A	V
802.11a CH 157 5785MHz		5634.6	44.3	-24	68.3	38.3	32.22	7.27	33.49	250	188	P	H
		5685.2	43.9	-50.48	94.38	37.79	32.3	7.32	33.51	250	188	P	H
		5710.8	43.7	-64.63	108.33	37.53	32.33	7.36	33.52	250	188	P	H
		5725	43.92	-78.38	122.3	37.72	32.36	7.36	33.52	250	188	P	H
		5785	96.65	-	-	90.3	32.44	7.45	33.54	250	188	P	H
		5785	86.03	-	-	79.68	32.44	7.45	33.54	250	188	A	H
		5852.2	44.55	-72.73	117.28	38.05	32.55	7.51	33.56	250	188	P	H
		5861.4	44.97	-64.14	109.11	38.44	32.58	7.51	33.56	250	188	P	H
		5887.4	46.93	-49.16	96.09	40.36	32.61	7.53	33.57	250	188	P	H
		5925.4	44.32	-23.98	68.3	37.68	32.69	7.53	33.58	250	188	P	H
		5612	44.23	-24.07	68.3	38.28	32.17	7.27	33.49	166	140	P	V
		5660.8	45.2	-31.12	76.32	39.13	32.25	7.32	33.5	166	140	P	V
		5700.6	43.99	-61.48	105.47	37.81	32.33	7.36	33.51	166	140	P	V
		5723	43.98	-73.76	117.74	37.78	32.36	7.36	33.52	166	140	P	V
	5785	90.74	-	-	84.39	32.44	7.45	33.54	166	140	P	V	



		5785	81.09	-	-	74.74	32.44	7.45	33.54	166	140	A	V
		5850.6	45.15	-75.78	120.93	38.65	32.55	7.51	33.56	166	140	P	V
		5868	44.91	-62.35	107.26	38.38	32.58	7.51	33.56	166	140	P	V
		5922	45.43	-25.08	70.51	38.79	32.69	7.53	33.58	166	140	P	V
		5937	45.32	-22.98	68.3	38.65	32.69	7.56	33.58	166	140	P	V
<b>802.11a CH 165 5825MHz</b>		5825	97.01	-	-	90.56	32.52	7.48	33.55	150	186	P	H
		5825	87.54	-	-	81.09	32.52	7.48	33.55	150	186	A	H
		5850.8	44.56	-75.92	120.48	38.06	32.55	7.51	33.56	150	186	P	H
		5863.4	45.08	-63.47	108.55	38.55	32.58	7.51	33.56	150	186	P	H
		5878.4	45.3	-57.47	102.77	38.74	32.61	7.51	33.56	150	186	P	H
		5935.8	44.93	-23.37	68.3	38.26	32.69	7.56	33.58	150	186	P	H
		5825	89.8	-	-	83.35	32.52	7.48	33.55	150	122	P	V
		5825	81.23	-	-	74.78	32.52	7.48	33.55	150	122	A	V
		5851.8	44.09	-74.11	118.2	37.59	32.55	7.51	33.56	150	122	P	V
		5860.4	45.73	-63.66	109.39	39.2	32.58	7.51	33.56	150	122	P	V
		5902.8	45.22	-39.47	84.69	38.63	32.63	7.53	33.57	150	122	P	V
		5940.8	45.36	-22.94	68.3	38.66	32.72	7.56	33.58	150	122	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 149 5745MHz		11490	48.1	-25.9	74	57.74	39.06	11.05	59.75	250	0	P	H
		17235	46.68	-21.62	68.3	48.89	41.39	14.65	58.25	150	0	P	H
		11490	49	-25	74	58.64	39.06	11.05	59.75	250	0	P	V
		17235	50.67	-17.63	68.3	52.88	41.39	14.65	58.25	150	0	P	V
802.11a CH 157 5785MHz		11570	47.68	-26.32	74	57.52	38.98	11.01	59.83	250	0	P	H
		17355	49.73	-18.57	68.3	50.57	42.18	14.78	57.8	150	0	P	H
		11570	46.94	-27.06	74	56.78	38.98	11.01	59.83	250	0	P	V
		17355	49.06	-19.24	68.3	49.9	42.18	14.78	57.8	150	0	P	V
802.11a CH 165 5825MHz		11650	47.22	-26.78	74	57.23	38.92	10.97	59.9	250	0	P	H
		17472	50.62	-17.68	68.3	50.09	42.98	14.9	57.35	150	0	P	H
		11650	47.1	-26.9	74	57.11	38.92	10.97	59.9	250	0	P	V
		17475	57.05	-11.25	68.3	56.52	42.98	14.9	57.35	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		5646.2	44.63	-23.67	68.3	38.58	32.22	7.32	33.49	150	178	P	H
		5662.8	44.52	-33.28	77.8	38.45	32.25	7.32	33.5	150	178	P	H
		5710	44.31	-63.79	108.1	38.14	32.33	7.36	33.52	150	178	P	H
		5724.4	48.87	-72.06	120.93	42.67	32.36	7.36	33.52	150	178	P	H
		5745	97.47	-	-	91.2	32.39	7.41	33.53	150	178	P	H
		5745	86.81	-	-	80.54	32.39	7.41	33.53	150	178	A	H
		5612.6	45.23	-23.07	68.3	39.28	32.17	7.27	33.49	150	120	P	V
		5667.6	45.04	-36.32	81.36	38.94	32.28	7.32	33.5	150	120	P	V
		5698	43.5	-60.33	103.83	37.35	32.3	7.36	33.51	150	120	P	V
		5720	44.04	-66.86	110.9	37.84	32.36	7.36	33.52	150	120	P	V
		5745	89.77	-	-	83.5	32.39	7.41	33.53	150	120	P	V
	5745	80.42	-	-	74.15	32.39	7.41	33.53	150	120	A	V	
802.11n HT20 CH 157 5785MHz		5612.6	44.4	-23.9	68.3	38.45	32.17	7.27	33.49	159	187	P	H
		5650.8	44.06	-24.83	68.89	37.98	32.25	7.32	33.49	159	187	P	H
		5707	43.92	-63.34	107.26	37.75	32.33	7.36	33.52	159	187	P	H
		5725	44.08	-78.22	122.3	37.88	32.36	7.36	33.52	159	187	P	H
		5785	97.64	-	-	91.29	32.44	7.45	33.54	159	187	P	H
		5785	87.18	-	-	80.83	32.44	7.45	33.54	159	187	A	H
		5851.6	45.33	-73.32	118.65	38.83	32.55	7.51	33.56	159	187	P	H
		5864	44.83	-63.55	108.38	38.3	32.58	7.51	33.56	159	187	P	H
		5912.6	44.91	-32.54	77.45	38.3	32.66	7.53	33.58	159	187	P	H
		5946.4	45.74	-22.56	68.3	39.04	32.72	7.56	33.58	159	187	P	H
		5613.4	45.27	-23.03	68.3	39.32	32.17	7.27	33.49	150	121	P	V
		5678.2	44.42	-44.79	89.21	38.32	32.28	7.32	33.5	150	121	P	V
		5714.4	44.66	-64.67	109.33	38.49	32.33	7.36	33.52	150	121	P	V
		5724.8	43.67	-78.17	121.84	37.47	32.36	7.36	33.52	150	121	P	V
		5785	89.64	-	-	83.29	32.44	7.45	33.54	150	121	P	V
	5785	80.48	-	-	74.13	32.44	7.45	33.54	150	121	A	V	
	5855	44.31	-66.59	110.9	37.78	32.58	7.51	33.56	150	121	P	V	
	5870.8	44.75	-61.72	106.47	38.19	32.61	7.51	33.56	150	121	P	V	



		5917.2	45.06	-28.99	74.05	38.45	32.66	7.53	33.58	150	121	P	V	
		5928.2	45.34	-22.96	68.3	38.67	32.69	7.56	33.58	150	121	P	V	
<b>802.11n</b>		5825	98.33	-	-	91.88	32.52	7.48	33.55	150	176	P	H	
		5825	87.4	-	-	80.95	32.52	7.48	33.55	150	176	A	H	
		5850	43.9	-78.4	122.3	37.4	32.55	7.51	33.56	150	176	P	H	
		5874.4	44.89	-60.58	105.47	38.33	32.61	7.51	33.56	150	176	P	H	
		5876.6	46.15	-57.96	104.11	39.59	32.61	7.51	33.56	150	176	P	H	
	<b>HT20</b>		5926	45.34	-22.96	68.3	38.67	32.69	7.56	33.58	150	176	P	H
	<b>CH 165</b>		5825	90.62	-	-	84.17	32.52	7.48	33.55	160	137	P	V
	<b>5825MHz</b>		5825	80.92	-	-	74.47	32.52	7.48	33.55	160	137	A	V
			5853.8	43.97	-69.67	113.64	37.44	32.58	7.51	33.56	160	137	P	V
			5870.2	45.28	-61.36	106.64	38.75	32.58	7.51	33.56	160	137	P	V
			5919.2	45.45	-27.13	72.58	38.84	32.66	7.53	33.58	160	137	P	V
		5949.4	45.24	-23.06	68.3	38.54	32.72	7.56	33.58	160	137	P	V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>													



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20		11490	48.4	-25.6	74	58.04	39.06	11.05	59.75	250	0	P	H
		17235	47.3	-21	68.3	49.51	41.39	14.65	58.25	150	0	P	H
CH 149 5745MHz		11490	47.65	-26.35	74	57.29	39.06	11.05	59.75	250	0	P	V
		17235	53.63	-14.67	68.3	55.84	41.39	14.65	58.25	150	0	P	V
802.11n HT20		11570	47.29	-26.71	74	57.13	38.98	11.01	59.83	250	0	P	H
		17325	56.03	-12.27	68.3	57.22	41.96	14.78	57.93	150	0	P	H
CH 157 5785MHz		11570	47.35	-26.65	74	57.19	38.98	11.01	59.83	250	0	P	V
		17325	55.83	-12.47	68.3	57.02	41.96	14.78	57.93	150	0	P	V
802.11n HT20		11650	48.08	-25.92	74	58.09	38.92	10.97	59.9	250	0	P	H
		17475	58.19	-10.11	68.3	57.66	42.98	14.9	57.35	150	0	P	H
CH 165 5825MHz		11650	47.31	-26.69	74	57.32	38.92	10.97	59.9	250	0	P	V
		17475	59.05	-9.25	68.3	58.52	42.98	14.9	57.35	150	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5608.4 to 5934.6 MHz.



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5637.8	44.63	-23.67	68.3	38.63	32.22	7.27	33.49	191	171	P	H
		5690.6	44.67	-53.7	98.37	38.52	32.3	7.36	33.51	191	171	P	H
		5708.6	44.07	-63.64	107.71	37.9	32.33	7.36	33.52	191	171	P	H
		5724.4	43.11	-77.82	120.93	36.91	32.36	7.36	33.52	191	171	P	H
		5795	97.26	-	-	90.88	32.47	7.45	33.54	191	171	P	H
		5795	85.25	-	-	78.87	32.47	7.45	33.54	191	171	A	H
		5854	45.19	-67.99	113.18	38.66	32.58	7.51	33.56	191	171	P	H
		5863.6	44.78	-63.71	108.49	38.25	32.58	7.51	33.56	191	171	P	H
		5899	45.71	-41.79	87.5	39.12	32.63	7.53	33.57	191	171	P	H
		5944.8	45.16	-23.14	68.3	38.46	32.72	7.56	33.58	191	171	P	H
		5620.8	46.71	-21.59	68.3	40.74	32.19	7.27	33.49	150	139	P	V
		5681.6	44.73	-46.99	91.72	38.64	32.28	7.32	33.51	150	139	P	V
		5717.4	43.65	-66.52	110.17	37.48	32.33	7.36	33.52	150	139	P	V
		5724	45.35	-74.67	120.02	39.15	32.36	7.36	33.52	150	139	P	V
		5795	90.06	-	-	83.68	32.47	7.45	33.54	150	139	P	V
		5795	79.18	-	-	72.8	32.47	7.45	33.54	150	139	A	V
		5851.4	43.86	-75.25	119.11	37.36	32.55	7.51	33.56	150	139	P	V
		5870.8	44.33	-62.14	106.47	37.77	32.61	7.51	33.56	150	139	P	V
	5878.2	44.7	-58.22	102.92	38.14	32.61	7.51	33.56	150	139	P	V	
	5947.6	45.41	-22.89	68.3	38.71	32.72	7.56	33.58	150	139	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151		11510	47.94	-26.06	74	57.61	39.04	11.05	59.76	250	0	P	H
		17265	54.68	-13.62	68.3	56.5	41.62	14.69	58.13	150	0	P	H
5755MHz		11510	48.31	-25.69	74	57.98	39.04	11.05	59.76	250	0	P	V
		17265	55.79	-12.51	68.3	57.61	41.62	14.69	58.13	150	0	P	V
802.11n HT40 CH 159		11590	47.6	-26.4	74	57.47	38.97	11.01	59.85	250	0	P	H
		17385	56.75	-11.55	68.3	57.19	42.41	14.82	57.67	150	0	P	H
5795MHz		11590	47.23	-26.77	74	57.1	38.97	11.01	59.85	250	0	P	V
		17385	55.94	-12.36	68.3	56.38	42.41	14.82	57.67	150	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT20 CH 149 5745MHz		5618.4	45.28	-23.02	68.3	39.31	32.19	7.27	33.49	150	186	P	H
		5693	45.16	-54.98	100.14	39.01	32.3	7.36	33.51	150	186	P	H
		5710.2	45.76	-62.4	108.16	39.59	32.33	7.36	33.52	150	186	P	H
		5720.4	43.92	-67.89	111.81	37.72	32.36	7.36	33.52	150	186	P	H
		5745	93.99	-	-	87.72	32.39	7.41	33.53	150	186	P	H
		5745	87.33	-	-	81.06	32.39	7.41	33.53	150	186	A	H
		5603.8	43.59	-24.71	68.3	37.68	32.17	7.23	33.49	150	129	P	V
		5661.2	44.75	-31.87	76.62	38.68	32.25	7.32	33.5	150	129	P	V
		5705.2	43.8	-62.96	106.76	37.63	32.33	7.36	33.52	150	129	P	V
		5722.8	43.41	-73.87	117.28	37.21	32.36	7.36	33.52	150	129	P	V
		5745	89.73	-	-	83.46	32.39	7.41	33.53	150	129	P	V
	5745	82.97	-	-	76.7	32.39	7.41	33.53	150	129	A	V	
802.11ac VHT20 CH 157 5785MHz		5607.8	44.26	-24.04	68.3	38.31	32.17	7.27	33.49	150	224	P	H
		5671.2	44.35	-39.68	84.03	38.25	32.28	7.32	33.5	150	224	P	H
		5716.6	45.01	-64.94	109.95	38.84	32.33	7.36	33.52	150	224	P	H
		5723.8	43.7	-75.86	119.56	37.5	32.36	7.36	33.52	150	224	P	H
		5785	93.73	-	-	87.38	32.44	7.45	33.54	150	224	P	H
		5785	86.95	-	-	80.6	32.44	7.45	33.54	150	224	A	H
		5854.6	45.45	-66.36	111.81	38.92	32.58	7.51	33.56	150	224	P	H
		5861	45.55	-63.67	109.22	39.02	32.58	7.51	33.56	150	224	P	H
		5908.4	45.46	-35.09	80.55	38.84	32.66	7.53	33.57	150	224	P	H
		5943.4	45.91	-22.39	68.3	39.21	32.72	7.56	33.58	150	224	P	H
		5631.4	44.02	-24.28	68.3	38.05	32.19	7.27	33.49	168	140	P	V
		5669.6	44.19	-38.65	82.84	38.09	32.28	7.32	33.5	168	140	P	V
		5717.4	43.65	-66.52	110.17	37.48	32.33	7.36	33.52	168	140	P	V
		5723.2	45.83	-72.37	118.2	39.63	32.36	7.36	33.52	168	140	P	V
		5785	90.5	-	-	84.15	32.44	7.45	33.54	168	140	P	V
	5785	82.15	-	-	75.8	32.44	7.45	33.54	168	140	A	V	
	5855	44.3	-66.6	110.9	37.77	32.58	7.51	33.56	168	140	P	V	
	5858.2	44.95	-65.05	110	38.42	32.58	7.51	33.56	168	140	P	V	



		5911.6	45.54	-32.65	78.19	38.93	32.66	7.53	33.58	168	140	P	V
		5928.2	45.09	-23.21	68.3	38.42	32.69	7.56	33.58	168	140	P	V
<b>802.11ac</b> <b>VHT20</b> <b>CH 165</b> <b>5825MHz</b>		5825	94.01	-	-	87.56	32.52	7.48	33.55	150	226	P	H
		5825	84.95	-	-	78.5	32.52	7.48	33.55	150	226	A	H
		5852.2	44.83	-72.45	117.28	38.33	32.55	7.51	33.56	150	226	P	H
		5869.4	45.25	-61.62	106.87	38.72	32.58	7.51	33.56	150	226	P	H
		5879.4	45.52	-56.51	102.03	38.96	32.61	7.51	33.56	150	226	P	H
		5934.6	45.33	-22.97	68.3	38.66	32.69	7.56	33.58	150	226	P	H
		5825	90.16	-	-	83.71	32.52	7.48	33.55	156	139	P	V
		5825	81.75	-	-	75.3	32.52	7.48	33.55	156	139	A	V
		5854.6	44.23	-67.58	111.81	37.7	32.58	7.51	33.56	156	139	P	V
		5868.2	44.69	-62.51	107.2	38.16	32.58	7.51	33.56	156	139	P	V
		5876.8	46.49	-57.47	103.96	39.93	32.61	7.51	33.56	156	139	P	V
	5932.2	44.12	-24.18	68.3	37.45	32.69	7.56	33.58	156	139	P	V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



Band 4 5725~5850MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include channels 149, 157, and 165 at various frequencies.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequency measurements from 5643.2 to 5949.2 MHz.



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 159 5795MHz		5648.4	44.56	-23.74	68.3	38.51	32.22	7.32	33.49	203	172	P	H
		5677.2	43.9	-44.57	88.47	37.8	32.28	7.32	33.5	203	172	P	H
		5709.4	43.83	-64.1	107.93	37.66	32.33	7.36	33.52	203	172	P	H
		5723.8	44.25	-75.31	119.56	38.05	32.36	7.36	33.52	203	172	P	H
		5795	91.04	-	-	84.66	32.47	7.45	33.54	203	172	P	H
		5795	83.28	-	-	76.9	32.47	7.45	33.54	203	172	A	H
		5850.6	44.6	-76.33	120.93	38.1	32.55	7.51	33.56	203	172	P	H
		5871.2	43.63	-62.73	106.36	37.07	32.61	7.51	33.56	203	172	P	H
		5876	45.61	-58.95	104.56	39.05	32.61	7.51	33.56	203	172	P	H
		5930.6	45.41	-22.89	68.3	38.74	32.69	7.56	33.58	203	172	P	H
		5615	45.36	-22.94	68.3	39.41	32.17	7.27	33.49	157	138	P	V
		5665.8	45	-35.03	80.03	38.93	32.25	7.32	33.5	157	138	P	V
		5709.8	44.54	-63.51	108.05	38.37	32.33	7.36	33.52	157	138	P	V
		5720	43.5	-67.4	110.9	37.3	32.36	7.36	33.52	157	138	P	V
		5795	87.13	-	-	80.75	32.47	7.45	33.54	157	138	P	V
		5795	79.78	-	-	73.4	32.47	7.45	33.54	157	138	A	V
		5854.4	43.4	-68.87	112.27	36.87	32.58	7.51	33.56	157	138	P	V
		5868.6	45.74	-61.35	107.09	39.21	32.58	7.51	33.56	157	138	P	V
	5897.4	45.47	-43.22	88.69	38.88	32.63	7.53	33.57	157	138	P	V	
	5928.6	44.89	-23.41	68.3	38.22	32.69	7.56	33.58	157	138	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 151		11510	48.38	-25.62	74	58.05	39.04	11.05	59.76	250	0	P	H
		17265	54.64	-13.66	68.3	56.46	41.62	14.69	58.13	150	0	P	H
5755MHz		11510	48.37	-25.63	74	58.04	39.04	11.05	59.76	250	0	P	V
		17265	54.81	-13.49	68.3	56.63	41.62	14.69	58.13	150	0	P	V
802.11ac VHT40 CH 159		11590	47.35	-26.65	74	57.22	38.97	11.01	59.85	250	0	P	H
		17385	56.91	-11.39	68.3	57.35	42.41	14.82	57.67	150	0	P	H
5795MHz		11590	47.36	-26.64	74	57.23	38.97	11.01	59.85	250	0	P	V
		17385	56.46	-11.84	68.3	56.9	42.41	14.82	57.67	150	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz		5635	45.62	-22.68	68.3	39.62	32.22	7.27	33.49	159	173	P	H
		5695.8	45.76	-56.44	102.2	39.61	32.3	7.36	33.51	159	173	P	H
		5720	46.51	-64.39	110.9	40.31	32.36	7.36	33.52	159	173	P	H
		5724.4	48.68	-72.25	120.93	42.48	32.36	7.36	33.52	159	173	P	H
		5775	88.48	-	-	82.12	32.44	7.45	33.53	159	173	P	H
		5775	82.61	-	-	76.25	32.44	7.45	33.53	159	173	A	H
		5852.2	43.49	-73.79	117.28	36.99	32.55	7.51	33.56	159	173	P	H
		5859.8	45.41	-64.14	109.55	38.88	32.58	7.51	33.56	159	173	P	H
		5900.6	45.59	-40.73	86.32	39	32.63	7.53	33.57	159	173	P	H
		5608.8	44.04	-24.26	68.3	38.09	32.17	7.27	33.49	161	135	P	V
		5658.2	43.42	-30.97	74.39	37.35	32.25	7.32	33.5	161	135	P	V
		5708	44.11	-63.43	107.54	37.94	32.33	7.36	33.52	161	135	P	V
		5724.4	46.43	-74.5	120.93	40.23	32.36	7.36	33.52	161	135	P	V
		5775	83.23	-	-	76.87	32.44	7.45	33.53	161	135	P	V
		5775	76.48	-	-	70.12	32.44	7.45	33.53	161	135	A	V
		5854.2	44.41	-68.31	112.72	37.88	32.58	7.51	33.56	161	135	P	V
		5860.2	45.11	-64.33	109.44	38.58	32.58	7.51	33.56	161	135	P	V
		5911	44.89	-33.74	78.63	38.28	32.66	7.53	33.58	161	135	P	V
	5948.8	44.72	-23.58	68.3	38.02	32.72	7.56	33.58	161	135	P	V	

**Remark**

- No other spurious found.
- All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		11550	48.54	-25.46	74	58.32	39	11.03	59.81	250	0	P	H
VHT80		17328	56.28	-12.02	68.3	57.47	41.96	14.78	57.93	150	0	P	H
CH 155		11550	47.69	-26.31	74	57.47	39	11.03	59.81	250	0	P	V
5775MHz		17328	54.95	-13.35	68.3	56.14	41.96	14.78	57.93	150	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11n HT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11n HT20 LF		30	4.13	-35.87	40	12.29	24.2	1	33.36	-	-	P	H
		243.4	0.55	-45.45	46	14.14	17.72	1.8	33.11	-	-	P	H
		488.81	7.82	-38.18	46	14.29	23.74	2.31	32.52	-	-	P	H
		609.09	10.68	-35.32	46	15.36	24.86	2.57	32.11	-	-	P	H
		835.1	13.95	-32.05	46	15.92	26.51	2.99	31.47	150	0	P	H
		953.44	13.84	-32.16	46	14.27	27.47	3.15	31.05	-	-	P	H
		30	7.13	-32.87	40	15.29	24.2	1	33.36	-	-	P	V
		104.69	0.52	-42.98	43.5	14.3	18.19	1.38	33.35	-	-	P	V
		163.86	1.5	-42	43.5	16.3	16.89	1.53	33.22	-	-	P	V
		609.09	10.81	-35.19	46	15.49	24.86	2.57	32.11	-	-	P	V
		715.79	12.16	-33.84	46	15.64	25.61	2.75	31.84	-	-	P	V
		943.74	13.85	-32.15	46	14.38	27.41	3.15	31.09	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



### Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	92.71	2.69	0.37	1kHz
802.11n HT20	92.35	2.50	0.40	1kHz
802.11n HT40	86.20	1.23	0.81	1kHz
802.11ac VHT20	82.98	0.97	1.03	3kHz
802.11ac VHT40	71.08	0.49	2.02	3kHz
802.11ac VHT80	55.36	0.25	4.04	10kHz


802.11a

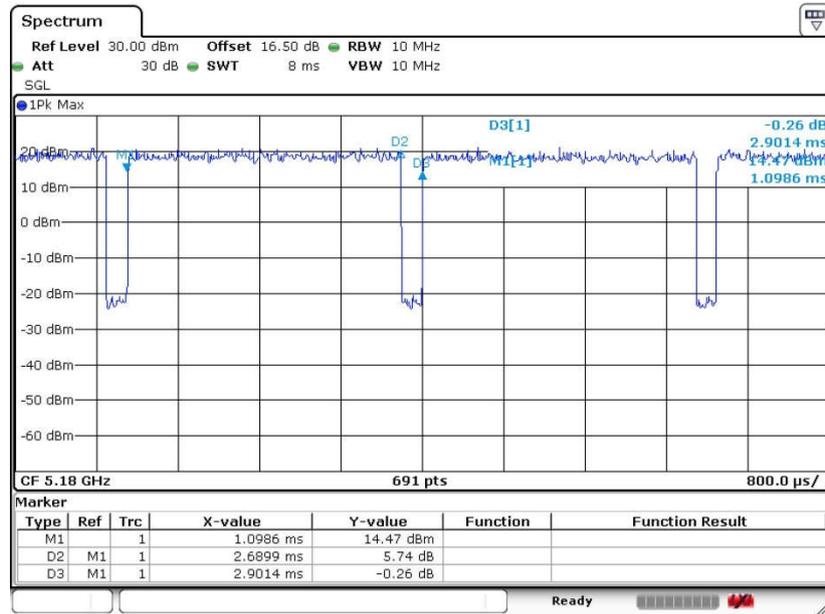

Date: 26.MAY.2016 10:04:28




802.11n HT20

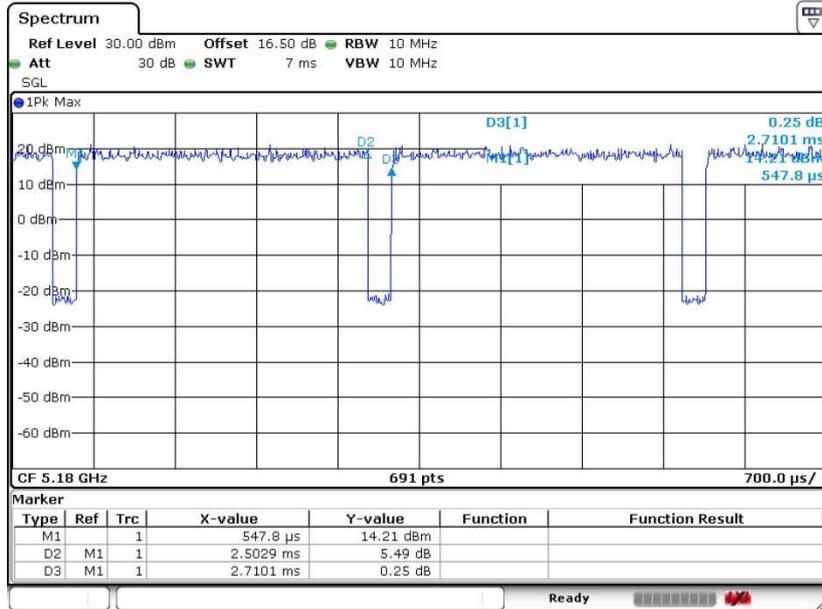

Date: 26.MAY.2016 10:27:20


802.11n HT40

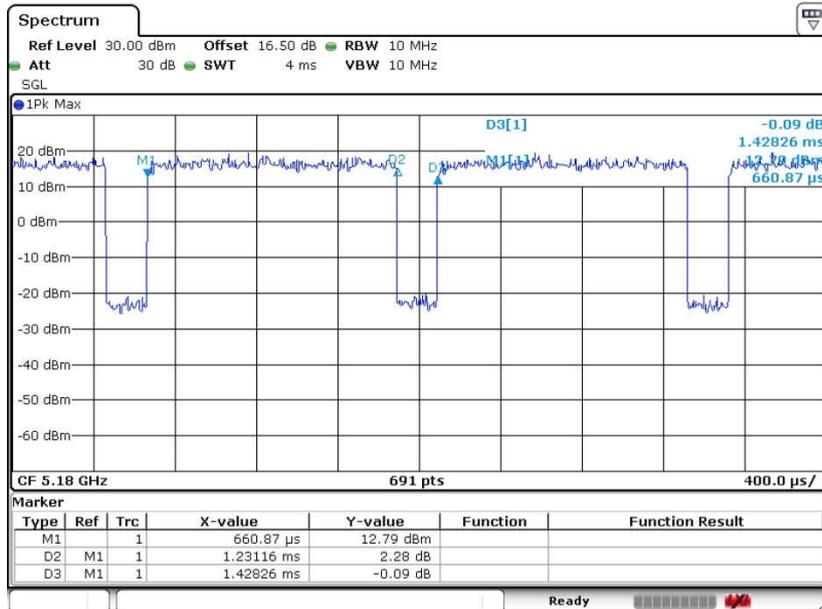

Date: 26.MAY.2016 11:00:23




802.11ac VHT20

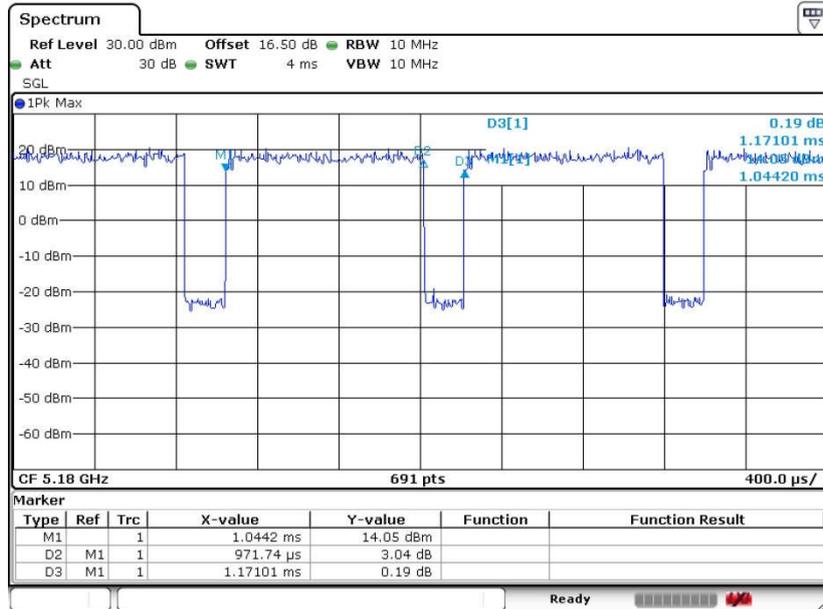

Date: 26.MAY.2016 11:25:50


802.11ac VHT40

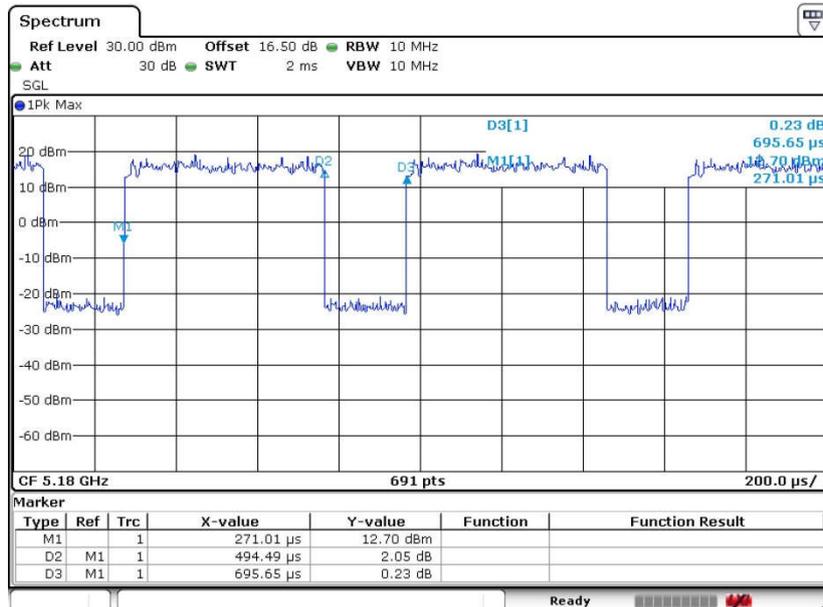

Date: 26.MAY.2016 13:42:44



802.11ac VHT80

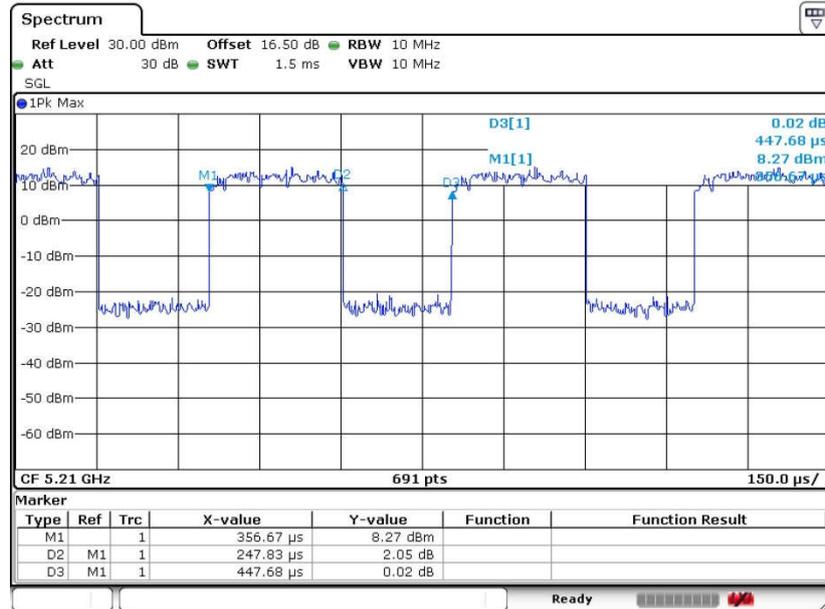

Date: 26.MAY.2016 14:08:25