



# FCC RF Test Report

**APPLICANT** : Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : 701LV, 702LV  
**FCC ID** : O57TAB4LV  
**STANDARD** : 47 CFR Part 2, 27(M)  
**CLASSIFICATION** : Licensed Non-Broadcast Station Transmitter(TNB)

The product was received on Aug. 22, 2017 and completely tested on Oct. 16, 2017. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**

**No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335  
China**



TABLE OF CONTENTS

1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Product Feature of Equipment Under Test ..... 5
1.4 Product Specification of Equipment Under Test ..... 6
1.5 Modification of EUT ..... 6
1.6 Specification of Accessory ..... 6
1.7 Component List ..... 6
1.8 Maximum EIRP Power, Frequency Tolerance, and Emission Designator ..... 7
1.9 Testing Location ..... 8
1.10 Applicable Standards ..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System ..... 10
2.3 Support Unit used in test configuration and system ..... 10
2.4 Measurement Results Explanation Example ..... 11
2.5 Frequency List of Low/Middle/High Channels ..... 12
3 CONDUCTED TEST ITEMS ..... 13
3.1 Measuring Instruments ..... 13
3.2 Test Setup ..... 13
3.3 Test Result of Conducted Test ..... 13
3.4 Conducted Output Power and EIRP ..... 14
3.5 Peak-to-Average Ratio ..... 15
3.6 Occupied Bandwidth ..... 16
3.7 Conducted Band Edge ..... 17
3.8 Conducted Spurious Emission ..... 18
3.9 Frequency Stability ..... 19
4 RADIATED TEST ITEMS ..... 20
4.1 Measuring Instruments ..... 20
4.2 Test Setup ..... 20
4.3 Test Result of Radiated Test ..... 20
4.4 Radiated Spurious Emission ..... 21
5 LIST OF MEASURING EQUIPMENT ..... 22
6 UNCERTAINTY OF EVALUATION ..... 23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 41)	EIRP < 2Watt	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (Band 41)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 41)	< 55+10log <sub>10</sub> (P[Watts])	PASS	-
3.9	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 41)	< 55+10log <sub>10</sub> (P[Watts])	PASS	Under limit 18.50 dB at 7766.000 MHz



# 1 General Description

## 1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

NO.68 BUILDING, 199 FENJU RD., China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

## 1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place, 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	701LV, 702LV
FCC ID	O57TAB4LV
EUT supports Radios application	LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 866423030007279 Radiation: 866423030007717
HW Version	LenovoPad 701LV
SW Version	TB-701LV_RF02_20170831
EUT Stage	Identical Prototype



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
<b>Rx Frequency</b>	LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz
<b>Bandwidth</b>	LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 41 : 23.71 dBm
<b>Antenna Gain</b>	LTE Band 41 : -0.50 dBi
<b>Type of Modulation</b>	QPSK / 16QAM / 64QAM(Downlink only)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Specification of Accessory

Specification of Accessory				
<b>Battery 1</b>	<b>Brand Name</b>	Lenovo(SCUD)	<b>Model Name</b>	L16D2P31
	<b>Power Rating</b>	3.85 Vdc, 7000 mAh	<b>Type</b>	Li-ion
<b>Battery 2</b>	<b>Brand Name</b>	Lenovo (Celxpert)	<b>Model Name</b>	L16D2P31
	<b>Power Rating</b>	3.85 Vdc, 7000 mAh	<b>Type</b>	Li-ion

### 1.7 Component List

**Note:** There are two types of EUT, the details refer the following table. According to the difference, we choose the sample 1 to full test.

Component	Sample 1		Sample 2	
CPU	MSM-8953-2-857NSP-TR-01 -1-AB	Qualcomm	MSM-8953-2-857NSP-TR-01-1- AB	Qualcomm
Flash	KMQE10013M-B318013	Samsung	H9TQ17ABJTBCUR-KUM(A05)	Hynix
LCD	P101KDA-AF0	INX	TV101WUM-NL1	BOE
TP	MTF-101-2856IKA	O-flim	TC101GFL16V.A	GIS
Front Camera	V10835V0	C&T	B02SF0105	Broad
Rear Camera	FX219BH	QTECH	L8856A10	O-film
Battery	L16D2P31	SCUD	L16D2P31	celxpert
motor	HZF-Z04BE-RL67B25-90	HONGZHIFA	CY0408L-021HB-064	Kunwang
Speaker 1	XHB171220B08-01-B1F-RH	HAOSHENG	XHB171220B08-01-B1F-RH	HAOSHENG
Speaker 2	XHB171220B08-02-B1F-RH	HAOSHENG	XHB171220B08-02-B1F-RH	HAOSHENG



### 1.8 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 41		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2498.5 ~ 2687.5	4M50G7D	-	0.2009	4M51W7D	-	0.1626
10	2501.0 ~ 2685.0	9M03G7D	0.0024	0.2094	9M03W7D	-	0.1531
15	2503.5 ~ 2682.5	13M4G7D	-	0.2042	13M5W7D	-	0.1542
20	2506.0 ~ 2680.0	18M3G7D	-	0.1963	18M5W7D	-	0.1486



### 1.9 Testing Location

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No. is CN5013.

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Test Firm Registration No.</b>
	TH01-KS	03CH03-KS	630927

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27(M)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	41	-	-	√	√	√	√	√	√	√	√	√	√	√	√
Peak-to-Average Ratio	41	-	-				√	√	√	√		√	√	√	√
26dB and 99% Bandwidth	41	-	-	√	√	√	√	√	√			√	√	√	√
Conducted Band Edge	41	-	-	√	√	√	√	√	√	√		√	√		√
Conducted Spurious Emission	41	-	-	√	√	√	√	√	√	√			√	√	√
Frequency Stability	41	-	-		√			√				√		√	
E.I.R.P.	41	-	-	√	√	√	√	√	√	√			√	√	√
Radiated Spurious Emission	41	-	-	√	√	√	√	√		√				√	
Note	<ol style="list-style-type: none"> <li>The mark "√" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>														

## 2.2 Connection Diagram of Test System

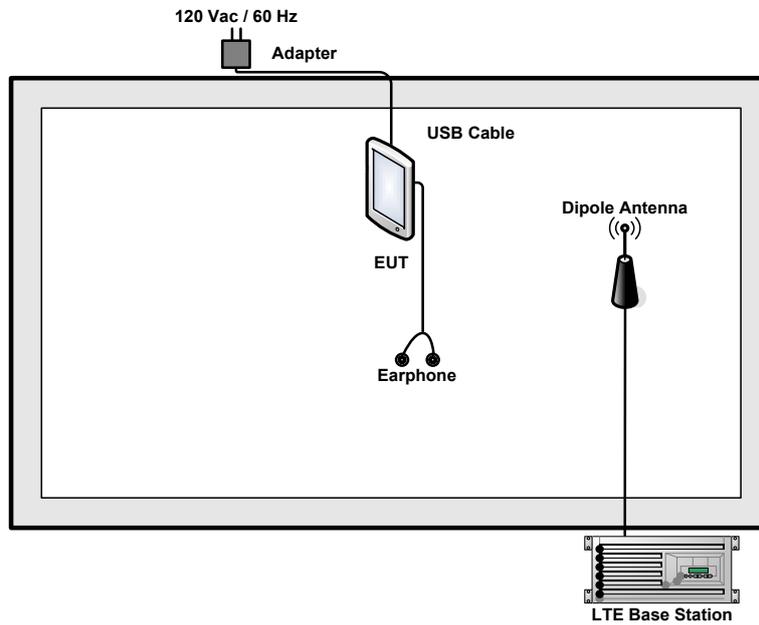

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2m	N/A
4.	Adaptor	Lenovo	C-P35	N/A	N/A	N/A
5.	USB Cable	LI QI	N/A	N/A	shielded, 1.0 m	N/A



## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.7 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.7 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	39750	40620	41490
	Frequency	2506	2593	2680
15	Channel	39725	40620	41515
	Frequency	2503.5	2593	2682.5
10	Channel	39700	40620	41540
	Frequency	2501	2593	2685
5	Channel	39675	40620	41565
	Frequency	2498.5	2593	2687.5

### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

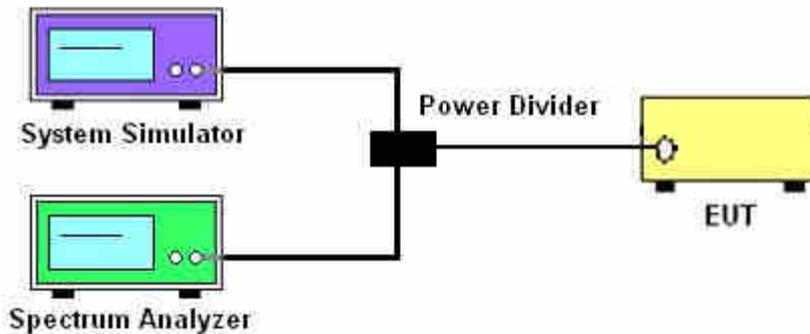

##### 3.2.3 Frequency Stability

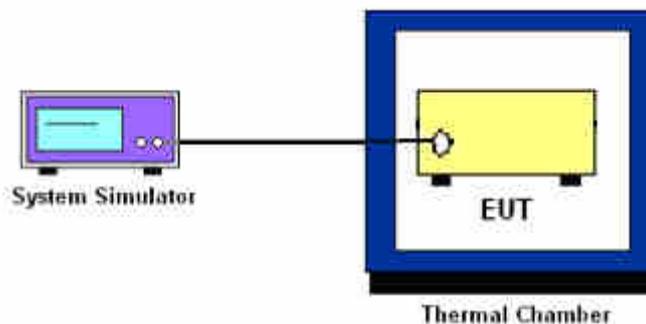

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 Occupied Bandwidth

#### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.1 and 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. Offset has included the duty factor for LTE Band 41. Duty factor  $=10 \log (1/x)$ , where x is the measured duty cycle
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB) = -13dBm.

10. For LTE Band 41, the other 40 dB, and 55 dB have additionally applied same calculation above.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Offset has included the duty factor for LTE Band 41. Duty factor =  $10 \log (1/x)$ , where x is the measured duty cycle.
8. Set spectrum analyzer with RMS detector.
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10 \log (P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10 \log (P)]$  (dB)  
=  $[30 + 10 \log (P)]$  (dBm) -  $[43 + 10 \log (P)]$  (dB)  
= -13dBm.
12. For Band 41  
The limit line is derived from  $55 + 10 \log (P)$  dB below the transmitter power P(Watts)  
=  $P(W) - [55 + 10 \log (P)]$  (dB)  
=  $[30 + 10 \log (P)]$  (dBm) -  $[55 + 10 \log (P)]$  (dB)  
= -25dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

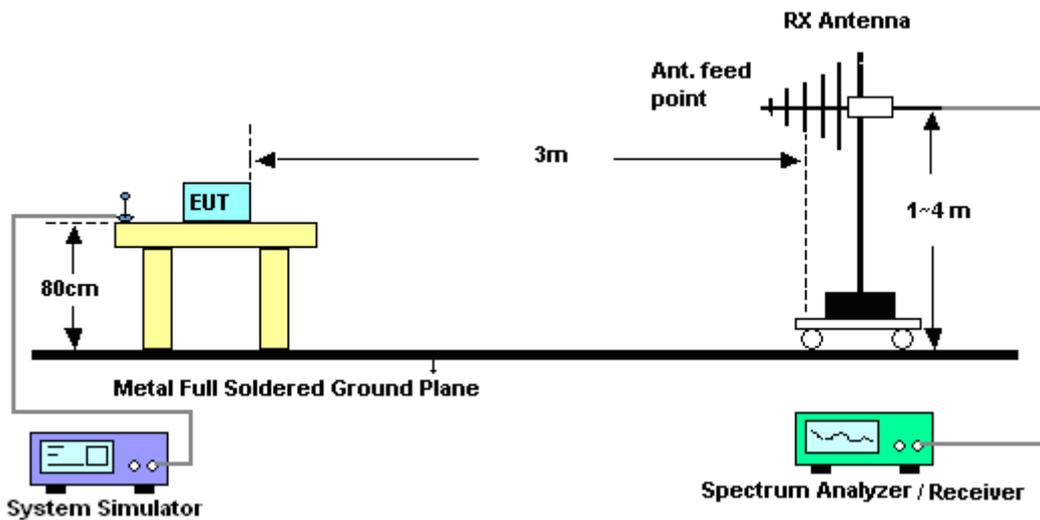

#### 4.2.2 For radiated test above 1GHz

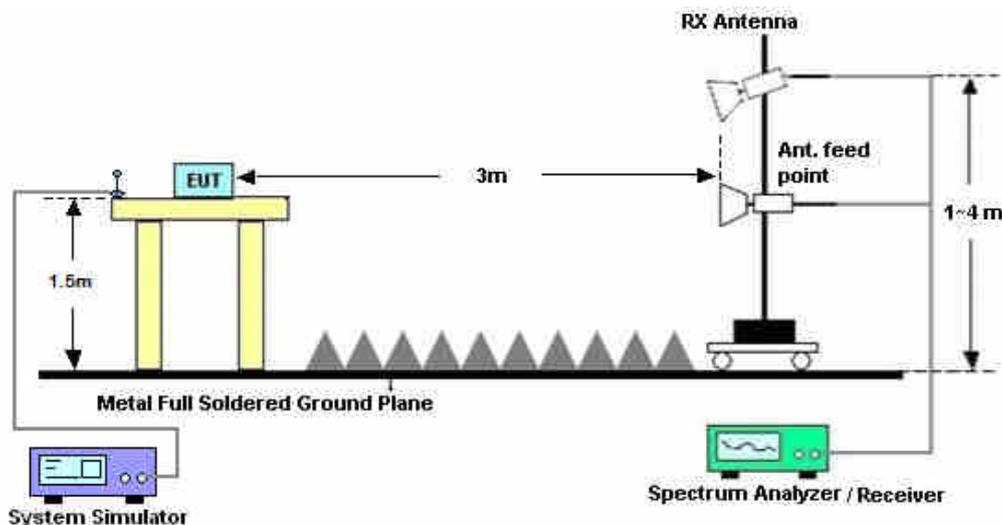

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

13. For Band 41:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$   
 $ERP \text{ (dBm)} = EIRP - 2.15$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 08, 2017	Oct. 10, 2017	Aug. 07, 2018	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 12, 2016	Oct. 10, 2017	Oct. 11, 2017	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8820C	6201432830	2G/3G/LTE Band	Jan. 19, 2017	Oct. 10, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Oct. 16, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Oct. 16, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Oct. 16, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 15, 2017	Oct. 16, 2017	Feb. 14, 2018	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 18, 2017	Oct. 16, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Oct. 12, 2017	Oct. 16, 2017	Oct. 11, 2018	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 dB	2025788	1GHz~18GHz	Apr. 18, 2017	Oct. 16, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 12, 2017	Oct. 16, 2017	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 16, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 16, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 16, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.22	23.43	23.39
20	1	49		23.07	23.4	23.24
20	1	99		23.11	23.36	23.08
20	50	0		22.19	22.35	22.5
20	50	24		22.12	22.35	22.46
20	50	50		22.06	22.34	22.48
20	100	0		22.02	22.4	22.47
20	1	0	16-QAM	21.72	21.92	22.2
20	1	49		21.9	22.02	22.22
20	1	99		21.8	22.04	21.89
20	50	0		21.26	21.36	21.57
20	50	24		21.13	21.54	21.52
20	50	50		21.16	21.42	21.54
20	100	0		21.07	21.48	21.44
15	1	0	QPSK	23.26	23.29	23.21
15	1	37		23.42	23.6	23.56
15	1	74		23.02	23.27	23.12
15	36	0		22.19	22.31	22.5
15	36	20		22.41	22.32	22.48
15	36	39		22.36	22.36	22.38
15	75	0		22.46	22.34	22.5
15	1	0	16-QAM	21.78	21.91	22.08
15	1	37		22.38	21.98	22.34
15	1	74		21.89	21.85	22.17
15	36	0		21.4	21.5	21.49
15	36	20		21.25	21.52	21.79
15	36	39		21.33	21.58	21.4
15	75	0		21.56	21.45	21.44



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.25	23.41	23.46
10	1	25		23.5	23.71	23.6
10	1	49		23.27	23.38	23.14
10	25	0		22.28	22.37	22.49
10	25	12		22.34	22.36	22.54
10	25	25		22.31	22.36	22.38
10	50	0		22.29	22.37	22.51
10	1	0	16-QAM	21.72	22.11	22.35
10	1	25		22.08	22.08	22.16
10	1	49		21.63	21.88	21.74
10	25	0		21.54	21.72	21.79
10	25	12		21.6	21.71	21.78
10	25	25		21.55	21.79	21.62
10	50	0		21.38	21.39	21.57
5	1	0	QPSK	23.23	23.2	23.09
5	1	12		23.31	23.53	23.36
5	1	24		23.18	23.18	23.02
5	12	0		22.27	22.3	22.34
5	12	7		22.28	22.3	22.37
5	12	13		22.26	22.33	22.37
5	25	0		22.27	22.31	22.34
5	1	0	16-QAM	22.04	22.1	22.22
5	1	12		22.1	21.92	22.61
5	1	24		21.77	22.07	22.16
5	12	0		21.28	21.35	21.44
5	12	7		21.31	21.54	21.47
5	12	13		21.27	21.56	21.46
5	25	0		21.53	21.72	21.69



LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = -0.5 dBi) QPSK									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
(MHz)									
Conducted Power (dBm)	23.31	23.53	23.36	23.50	23.71	23.60	23.42	23.60	23.56
Conducted Power (Watts)	0.2143	0.2254	0.2168	0.2239	0.2350	0.2291	0.2198	0.2291	0.2270
EIRP(dBm)	22.81	23.03	22.86	23.00	23.21	23.10	22.92	23.10	23.06
EIRP(Watts)	0.1910	0.2009	0.1932	0.1995	0.2094	0.2042	0.1959	0.2042	0.2023

LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = -0.5 dBi) QPSK			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency	2506	2593	2680
(MHz)			
Conducted Power (dBm)	23.22	23.43	23.39
Conducted Power (Watts)	0.2099	0.2203	0.2183
EIRP(dBm)	22.72	22.93	22.89
EIRP(Watts)	0.1871	0.1963	0.1945



LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = -0.5 dBi) 16QAM									
Bandwidth	5M			10M			15M		
Channel	39675	40620	41565	39700	40620	41540	39725	40620	41515
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2498.5	2593	2687.5	2501	2593	2685	2503.5	2593	2682.5
Conducted Power (dBm)	22.10	21.92	22.61	21.72	22.11	22.35	22.38	21.98	22.34
Conducted Power (Watts)	0.1622	0.1556	0.1824	0.1486	0.1626	0.1718	0.1730	0.1578	0.1714
EIRP(dBm)	21.60	21.42	22.11	21.22	21.61	21.85	21.88	21.48	21.84
EIRP(Watts)	0.1445	0.1387	0.1626	0.1324	0.1449	0.1531	0.1542	0.1406	0.1528

LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = -0.5 dBi) 16QAM			
Bandwidth	20M		
Channel	39750	40620	41490
	(Low)	(Mid)	(High)
Frequency (MHz)	2506	2593	2680
Conducted Power (dBm)	21.90	22.02	22.22
Conducted Power (Watts)	0.1549	0.1592	0.1667
EIRP(dBm)	21.40	21.52	21.72
EIRP(Watts)	0.1380	0.1419	0.1486




### Peak-to-Average Ratio

Mode	LTE Band 41 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.43	4.81	5.48	5.86	PASS
Middle CH	4.9	5.16	5.91	6.12	
Highest CH	4.49	5.1	5.74	6.32	




LTE Band 41 / 20MHz / QPSK

Lowest Channel / 1RB

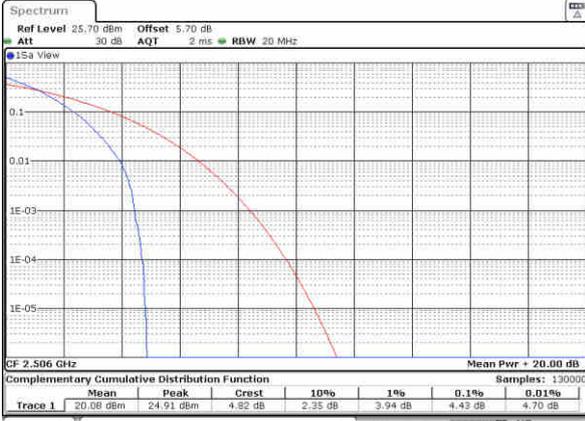


Date: 10.OCT.2017 18:45:08

Lowest Channel / Full RB

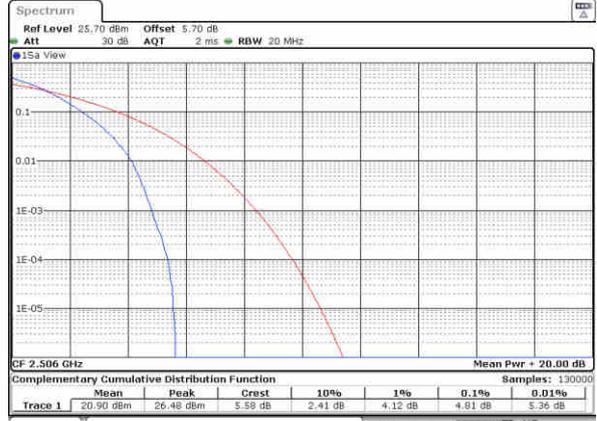


Date: 10.OCT.2017 18:46:38

Middle Channel / 1RB

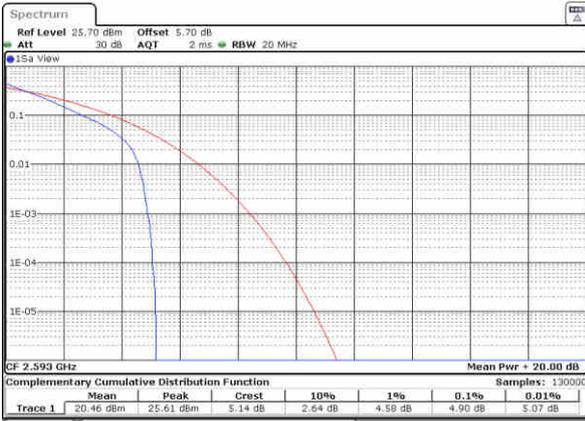


Date: 10.OCT.2017 18:50:21

Middle Channel / Full RB

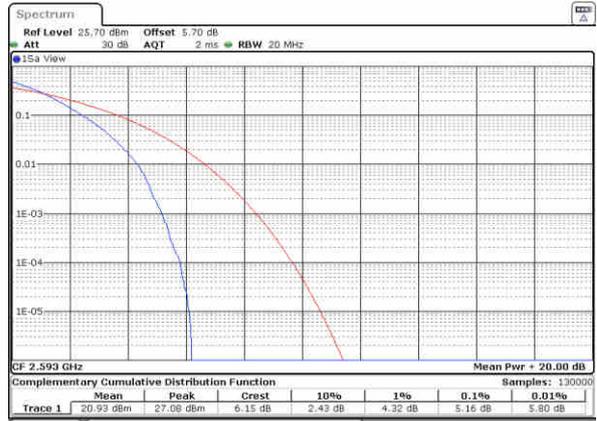


Date: 10.OCT.2017 18:51:38

Highest Channel / 1RB

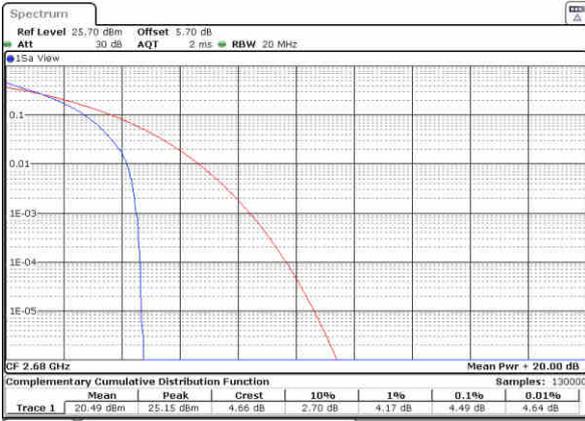

Date: 10.OCT.2017 18:53:56

Highest Channel / Full RB

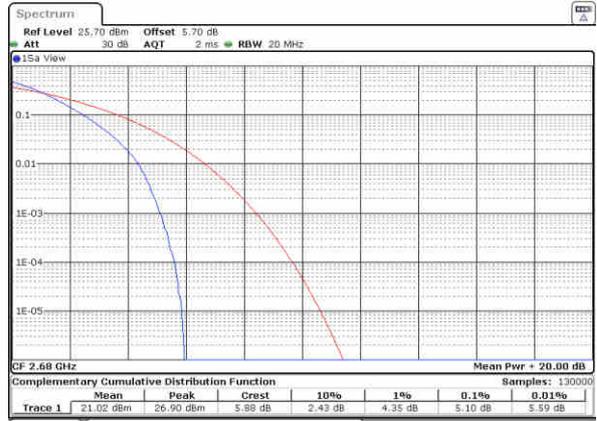


Date: 10.OCT.2017 18:54:52




LTE Band 41 / 20MHz / 16QAM

Lowest Channel / 1RB

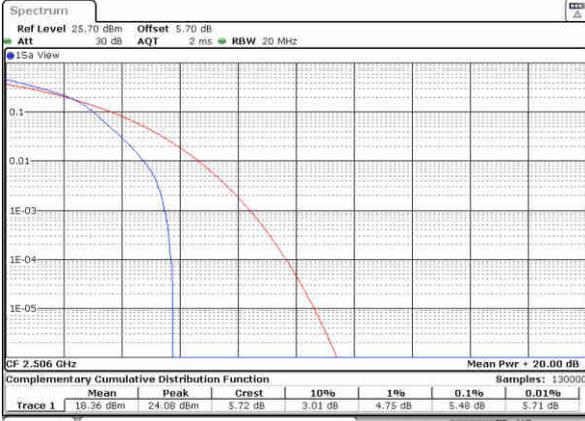


Date: 10.OCT.2017 18:45:54

Lowest Channel / Full RB

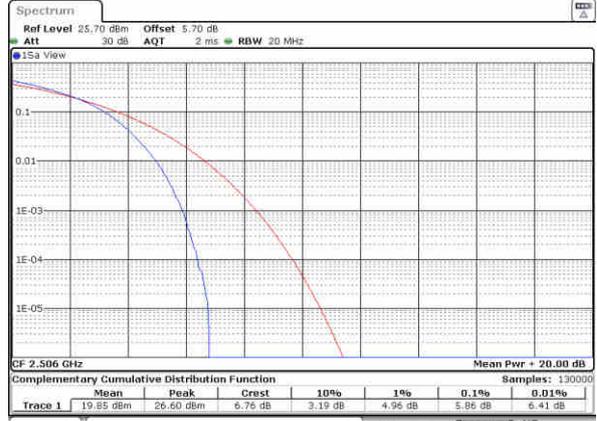


Date: 10.OCT.2017 18:47:53

Middle Channel / 1RB

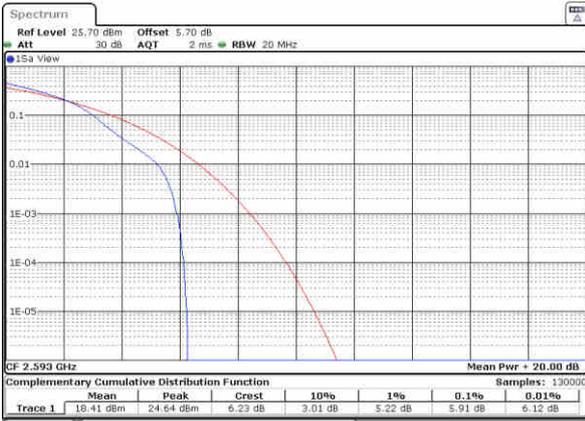


Date: 10.OCT.2017 18:50:46

Middle Channel / Full RB

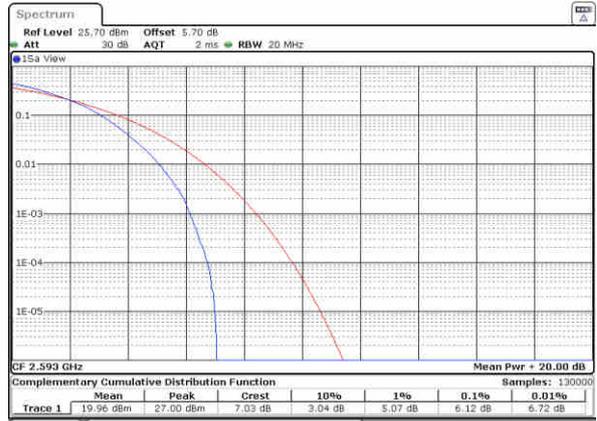

Date: 10.OCT.2017 18:52:41

Highest Channel / 1RB

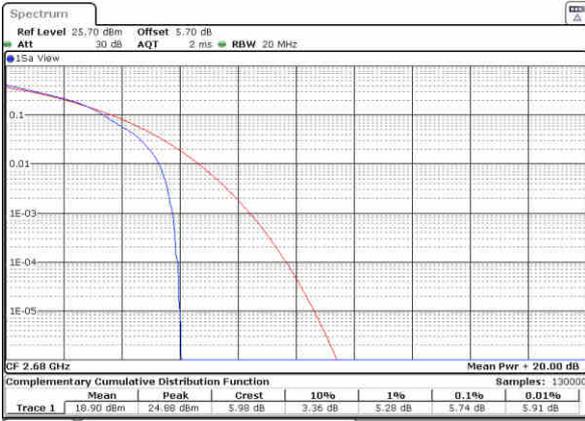

Date: 10.OCT.2017 18:54:18

Highest Channel / Full RB



Date: 10.OCT.2017 18:56:08




26dB Bandwidth

Mode	LTE Band 41 : 26dB BW(MHz)											
	5MHz		10MHz		15MHz		20MHz					
BW												
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM				
Lowest CH	4.975	4.885	9.75	9.79	14.266	14.146	20.18	20.26				
Middle CH	4.895	4.975	9.75	9.63	14.446	14.236	20.18	20.18				
Highest CH	4.905	4.875	9.75	9.91	14.116	14.146	20.26	20.14				




LTE Band 41

Lowest Channel / 5MHz / QPSK

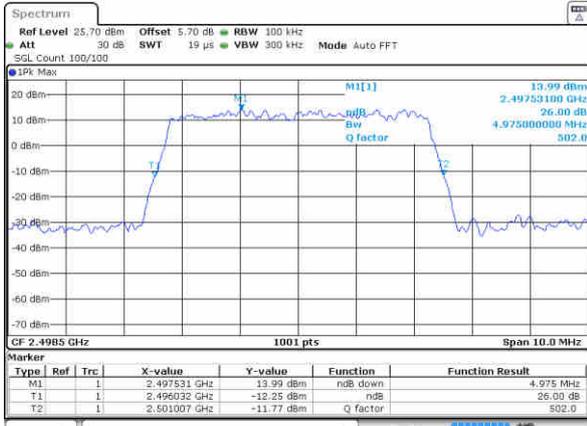


Date: 10.OCT.2017 18:24:29

Lowest Channel / 5MHz / 16QAM

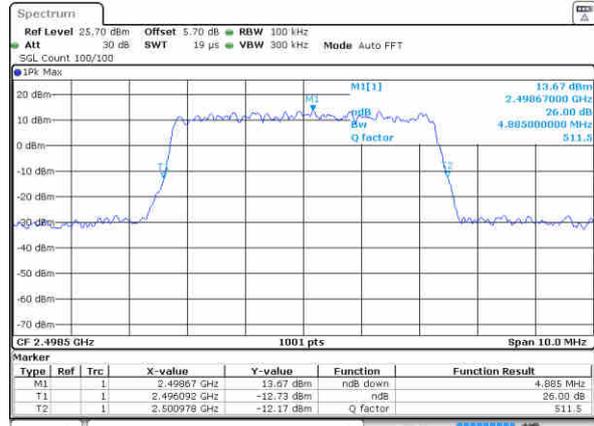

Date: 10.OCT.2017 18:24:48

Middle Channel / 5MHz / QPSK

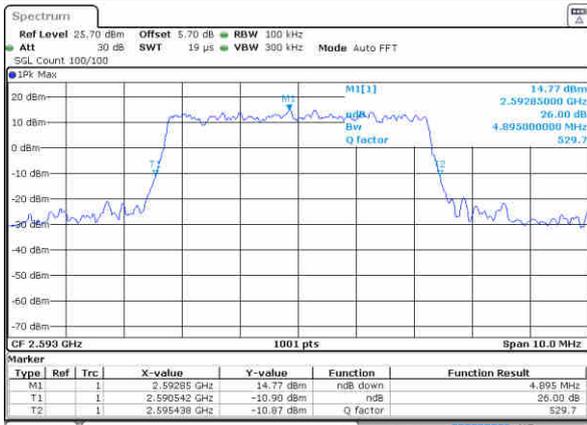


Date: 10.OCT.2017 18:25:28

Middle Channel / 5MHz / 16QAM




Date: 10.OCT.2017 18:25:55

Highest Channel / 5MHz / QPSK

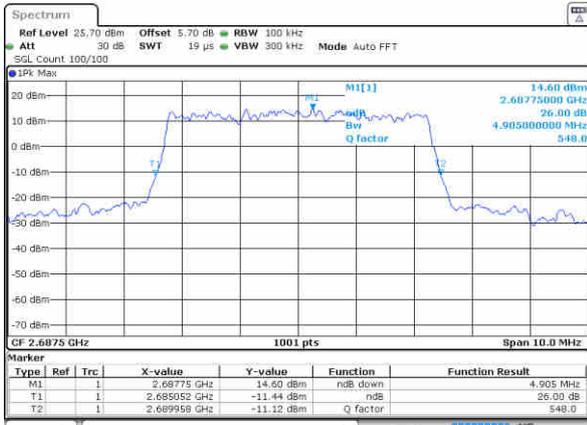

Date: 10.OCT.2017 18:27:00

Highest Channel / 5MHz / 16QAM

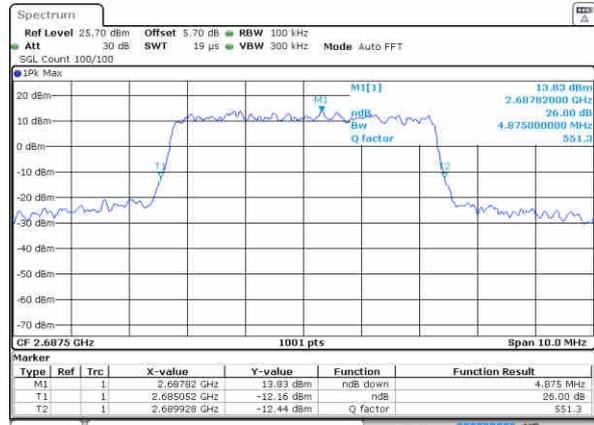


Date: 10.OCT.2017 18:27:20




LTE Band 41

Lowest Channel / 10MHz / QPSK

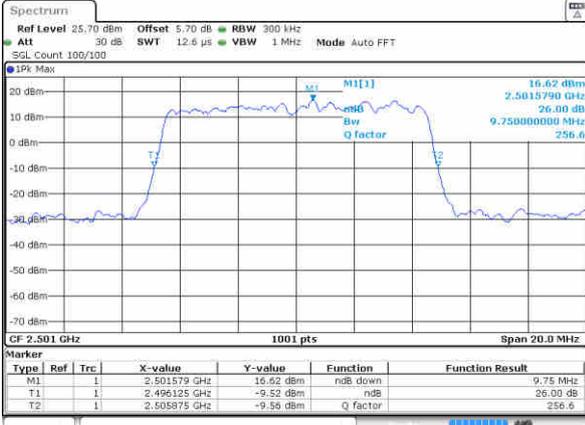

Date: 10.OCT.2017 18:28:29

Lowest Channel / 10MHz / 16QAM

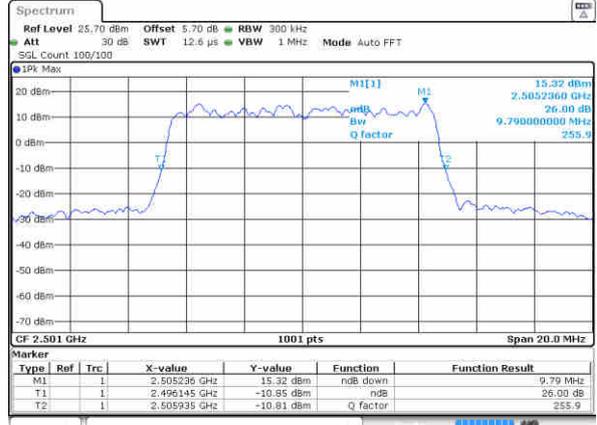


Date: 10.OCT.2017 18:29:56

Middle Channel / 10MHz / QPSK




Date: 10.OCT.2017 18:30:41

Middle Channel / 10MHz / 16QAM

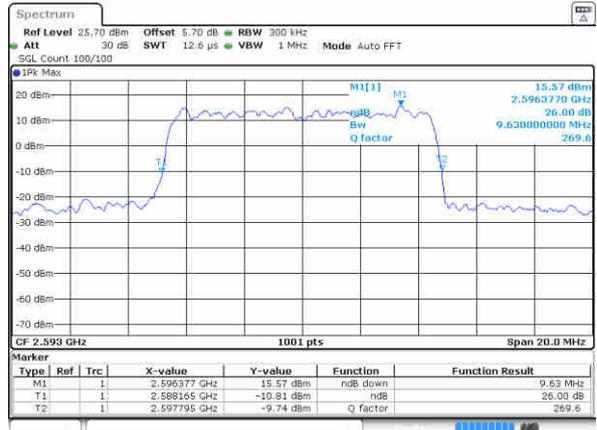

Date: 10.OCT.2017 18:31:00

Highest Channel / 10MHz / QPSK

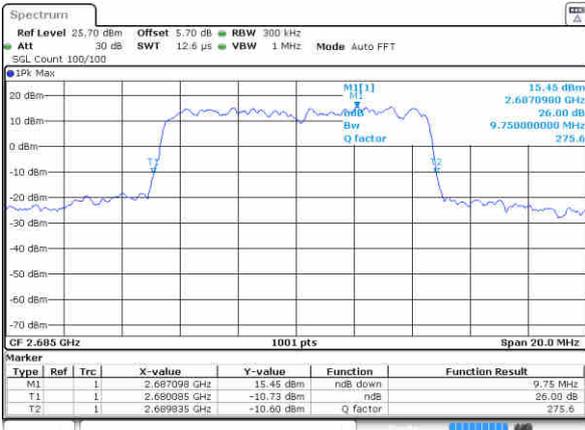

Date: 10.OCT.2017 18:31:53

Highest Channel / 10MHz / 16QAM




Date: 10.OCT.2017 18:32:18




LTE Band 41

Lowest Channel / 15MHz / QPSK

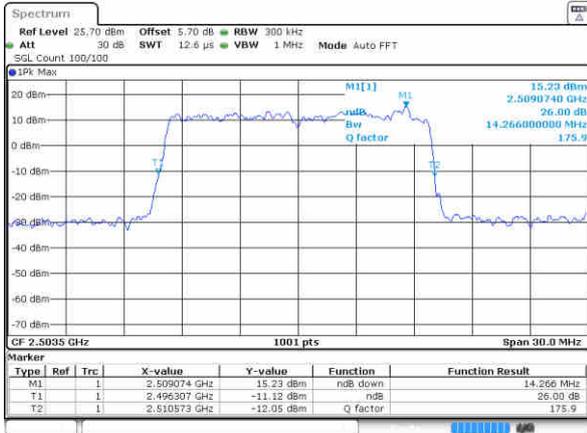


Date: 10.OCT.2017 18:33:57

Lowest Channel / 15MHz / 16QAM

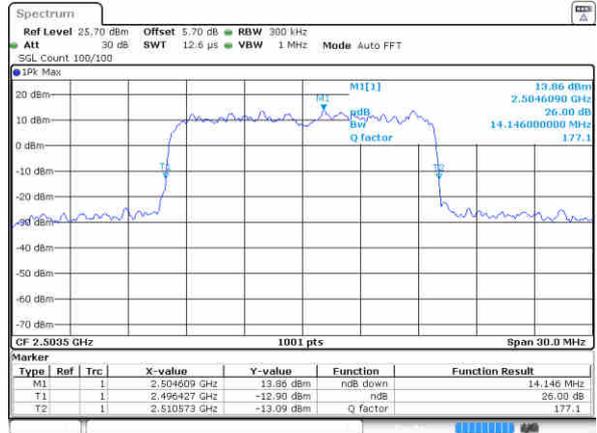


Date: 10.OCT.2017 18:34:20

Middle Channel / 15MHz / QPSK

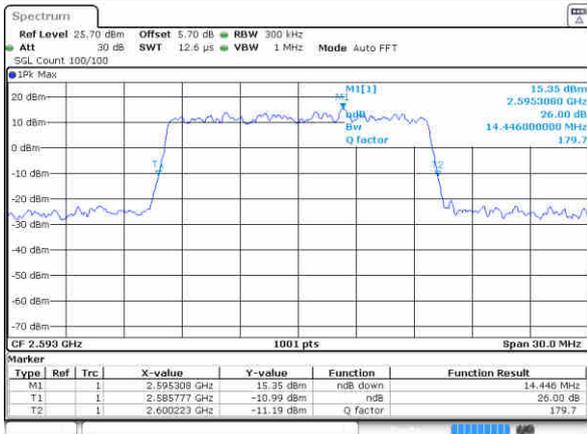

Date: 10.OCT.2017 18:35:30

Middle Channel / 15MHz / 16QAM

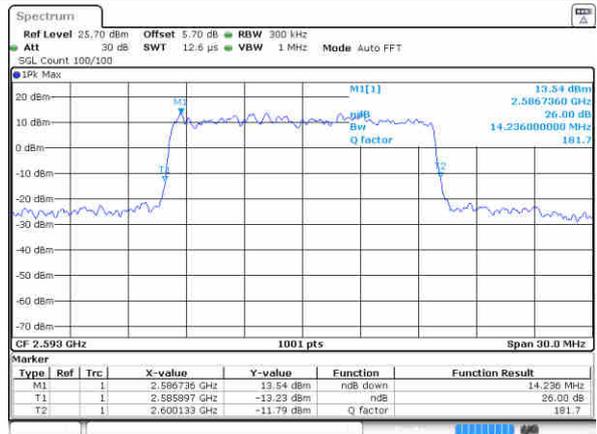


Date: 10.OCT.2017 18:35:52

Highest Channel / 15MHz / QPSK



Date: 10.OCT.2017 18:43:46

Highest Channel / 15MHz / 16QAM

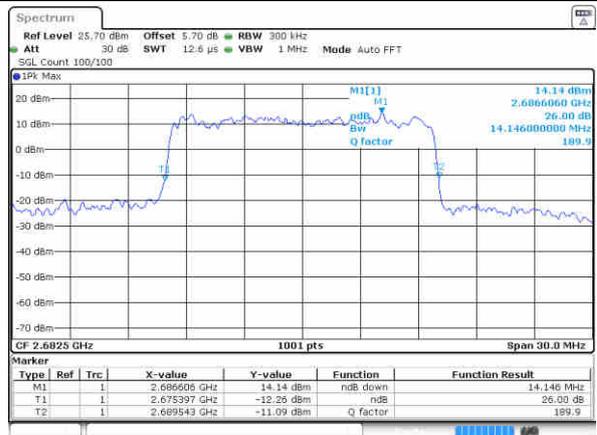


Date: 10.OCT.2017 18:44:22




LTE Band 41

Lowest Channel / 20MHz / QPSK

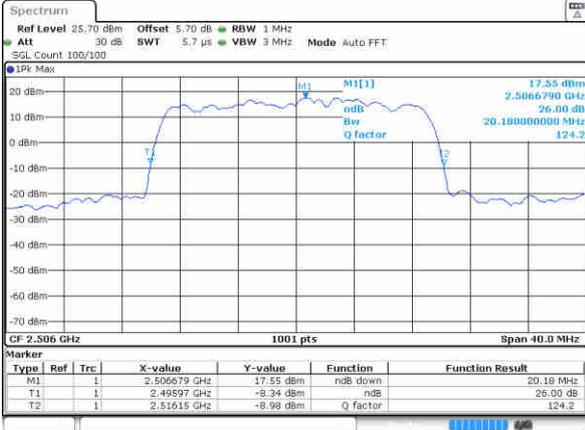


Date: 10.OCT.2017 18:38:08

Lowest Channel / 20MHz / 16QAM

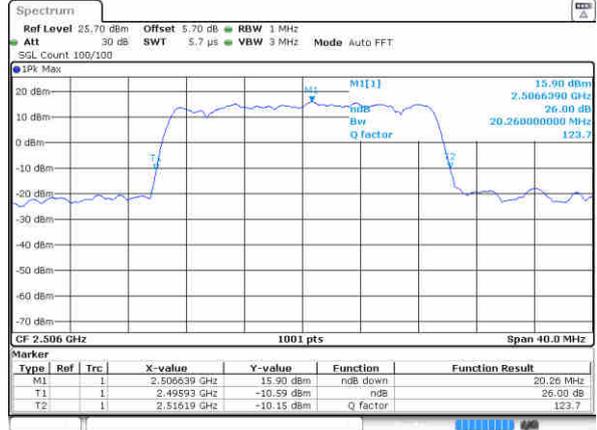


Date: 10.OCT.2017 18:38:29

Middle Channel / 20MHz / QPSK

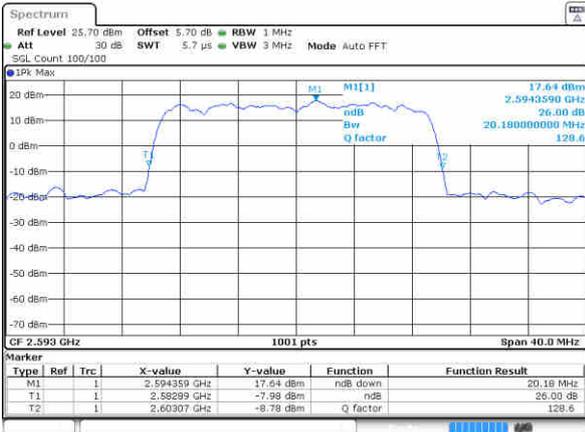


Date: 10.OCT.2017 18:39:22

Middle Channel / 20MHz / 16QAM

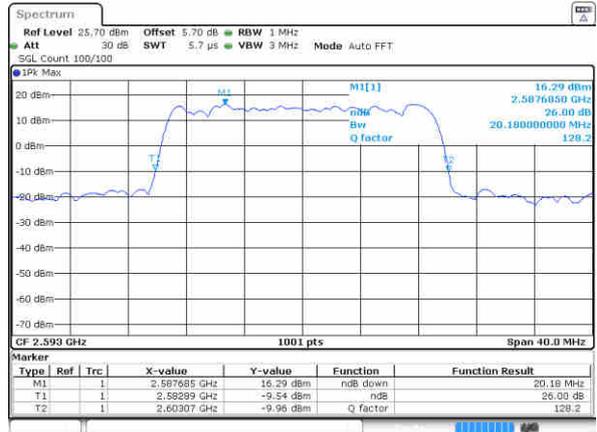


Date: 10.OCT.2017 18:40:10

Highest Channel / 20MHz / QPSK

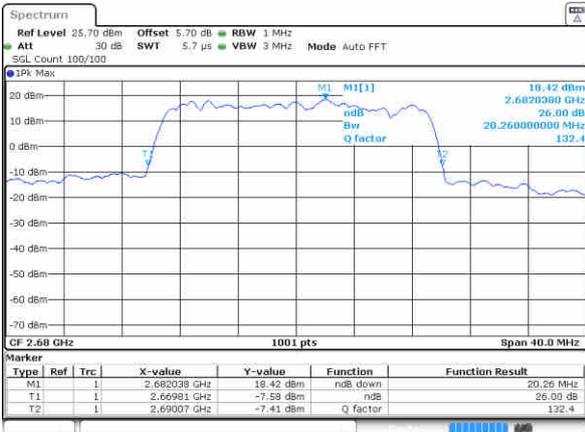

Date: 10.OCT.2017 18:42:19

Highest Channel / 20MHz / 16QAM

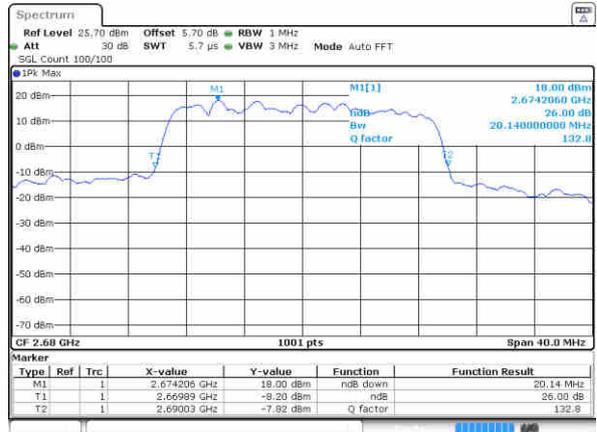

Date: 10.OCT.2017 18:42:40




### Occupied Bandwidth

Mode	LTE Band 41 : 99%OBW(MHz)											
BW	5MHz		10MHz		15MHz		20MHz					
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM				
Lowest CH	4.48	4.51	9.01	8.93	13.43	13.4	18.26	18.1				
Middle CH	4.5	4.51	9.03	9.03	13.37	13.4	18.3	18.3				
Highest CH	4.47	4.5	9.03	9.01	13.43	13.46	18.3	18.46				




LTE Band 41

Lowest Channel / 5MHz / QPSK

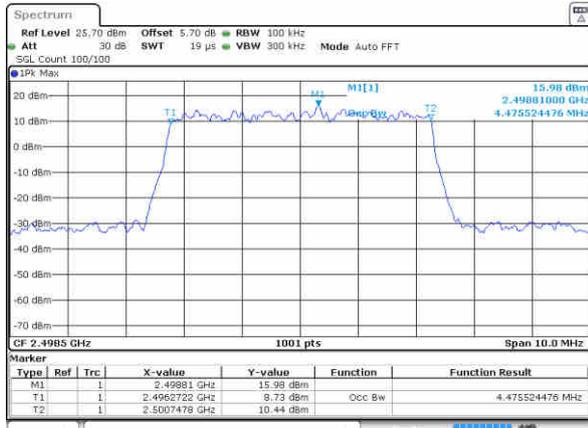


Date: 10.OCT.2017 18:24:19

Lowest Channel / 5MHz / 16QAM

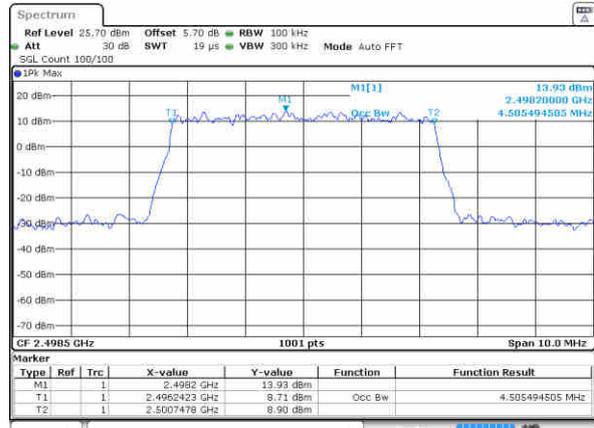


Date: 10.OCT.2017 18:24:39

Middle Channel / 5MHz / QPSK

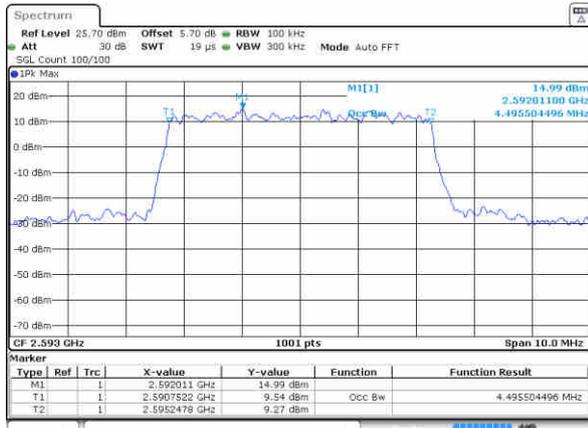


Date: 10.OCT.2017 18:25:20

Middle Channel / 5MHz / 16QAM

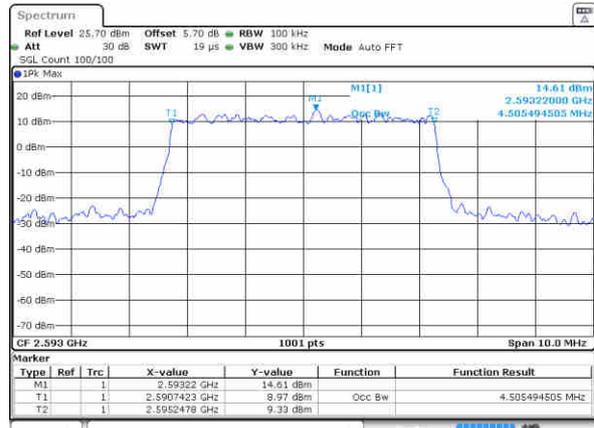


Date: 10.OCT.2017 18:25:38

Highest Channel / 5MHz / QPSK

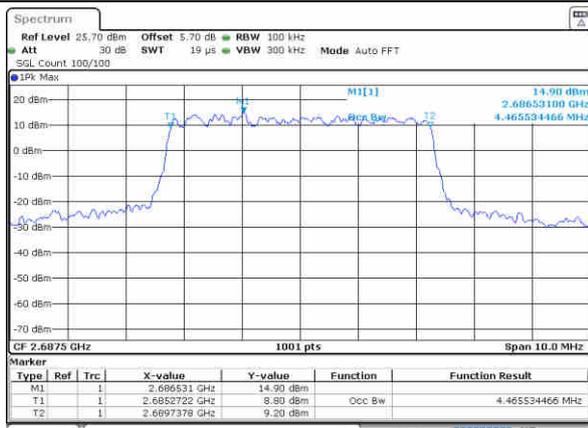

Date: 10.OCT.2017 18:26:52

Highest Channel / 5MHz / 16QAM

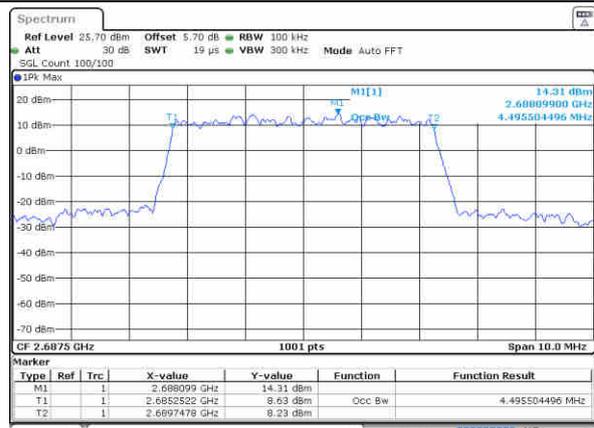


Date: 10.OCT.2017 18:27:10




LTE Band 41

Lowest Channel / 10MHz / QPSK

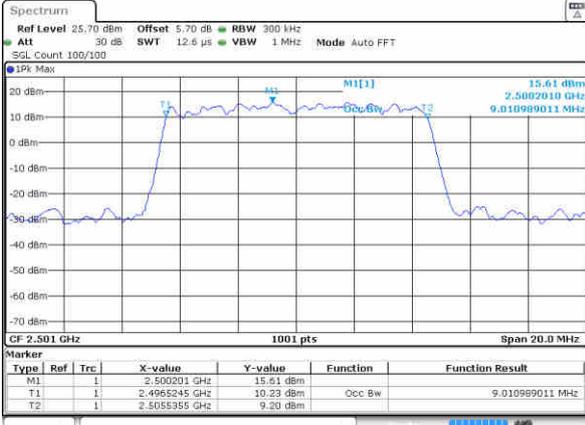


Date: 10.OCT.2017 18:28:21

Lowest Channel / 10MHz / 16QAM

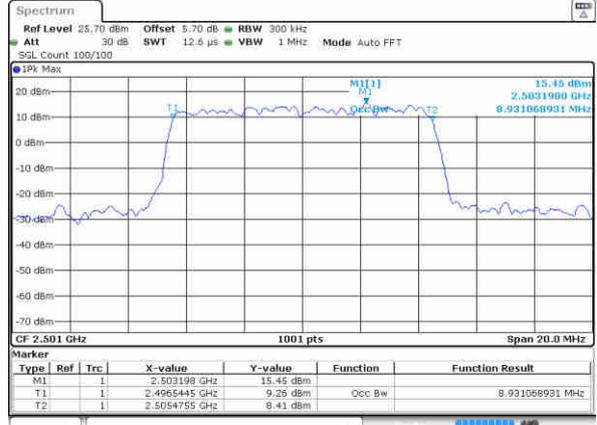


Date: 10.OCT.2017 18:29:40

Middle Channel / 10MHz / QPSK

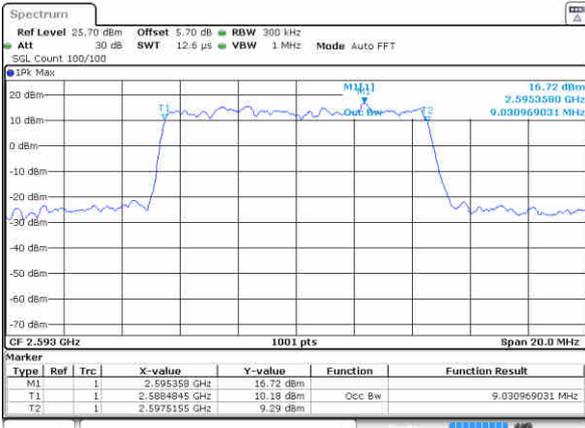


Date: 10.OCT.2017 18:30:31

Middle Channel / 10MHz / 16QAM

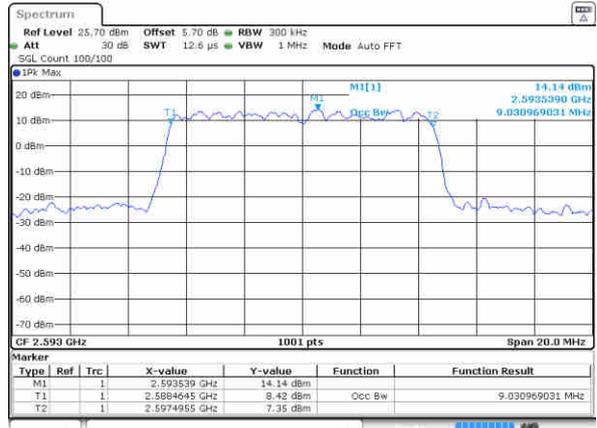


Date: 10.OCT.2017 18:30:51

Highest Channel / 10MHz / QPSK

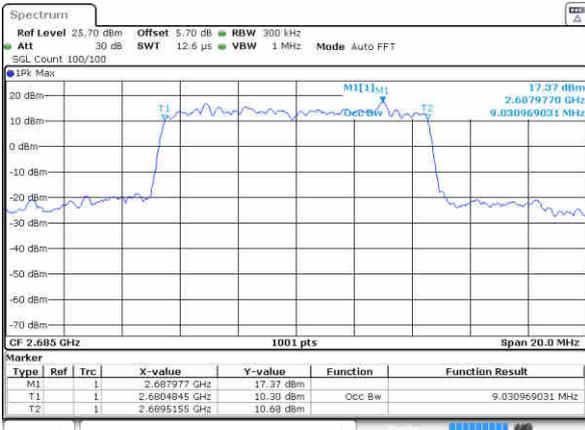

Date: 10.OCT.2017 18:31:44

Highest Channel / 10MHz / 16QAM

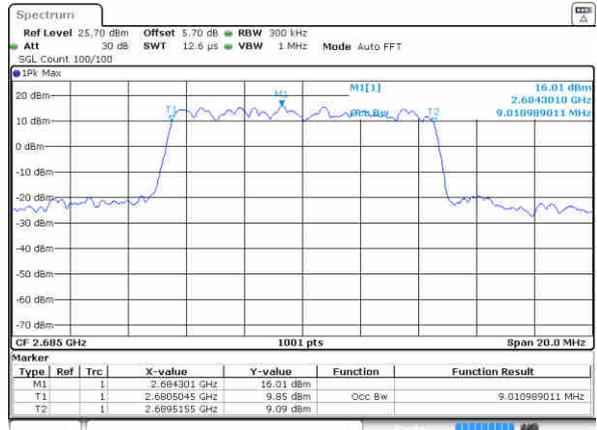


Date: 10.OCT.2017 18:30:07




LTE Band 41

Lowest Channel / 15MHz / QPSK

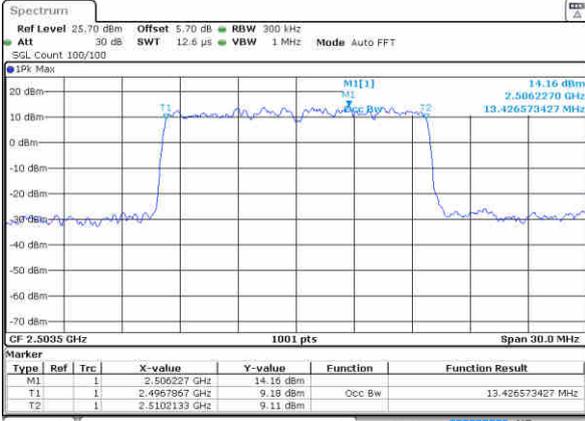


Date: 10.OCT.2017 18:33:48

Lowest Channel / 15MHz / 16QAM

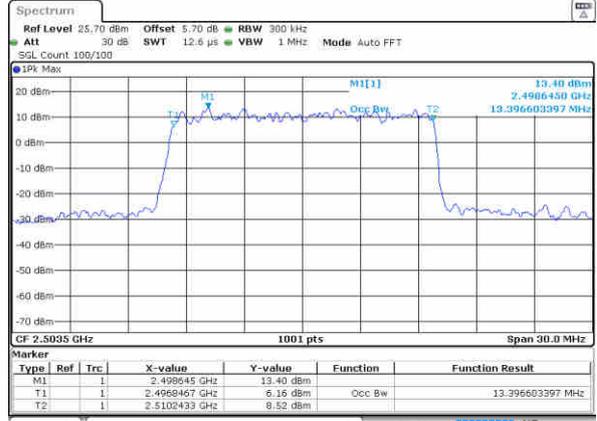


Date: 10.OCT.2017 18:34:10

Middle Channel / 15MHz / QPSK

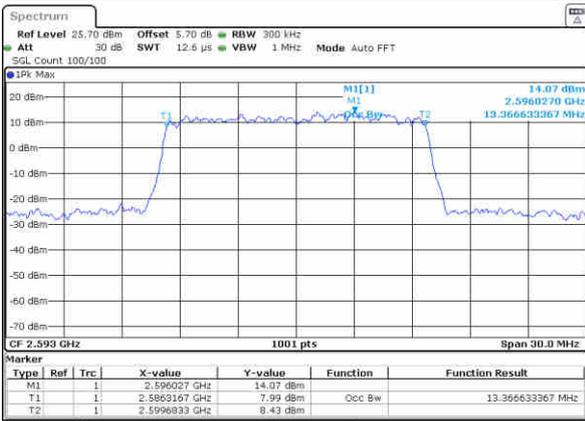


Date: 10.OCT.2017 18:35:21

Middle Channel / 15MHz / 16QAM

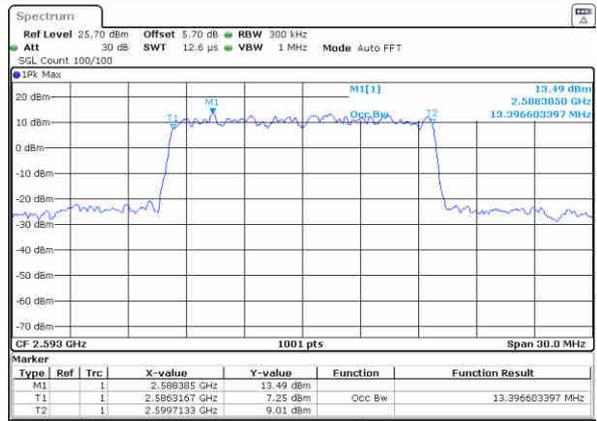


Date: 10.OCT.2017 18:35:43

Highest Channel / 15MHz / QPSK

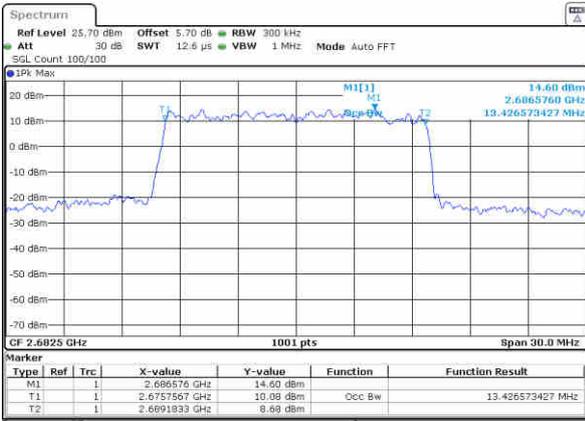

Date: 10.OCT.2017 18:43:37

Highest Channel / 15MHz / 16QAM

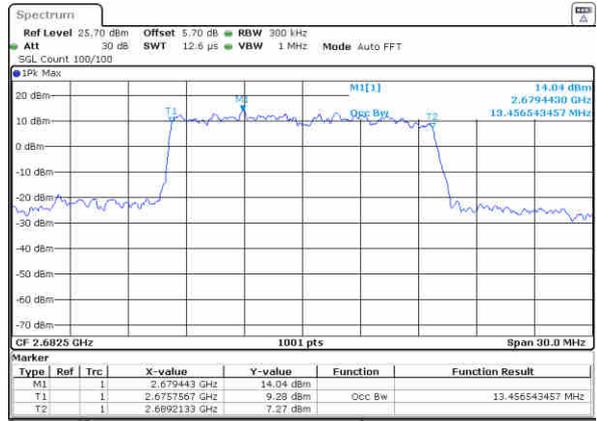


Date: 10.OCT.2017 18:43:56




LTE Band 41

Lowest Channel / 20MHz / QPSK

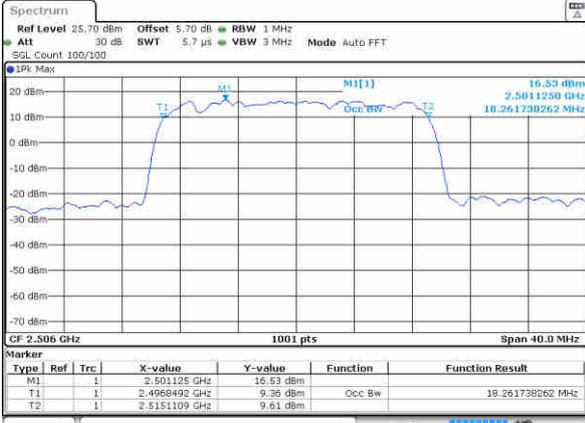


Date: 10.OCT.2017 18:37:29

Lowest Channel / 20MHz / 16QAM

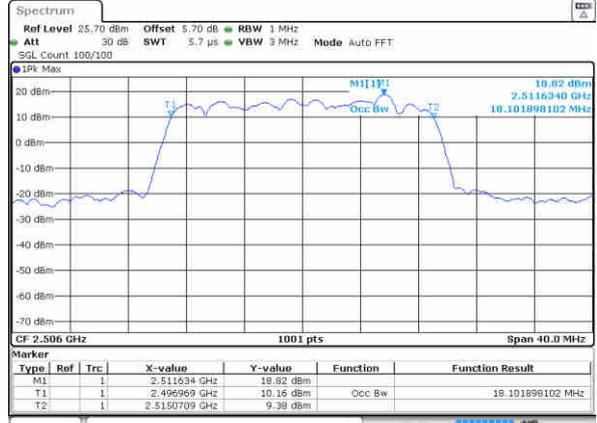


Date: 10.OCT.2017 18:38:20

Middle Channel / 20MHz / QPSK

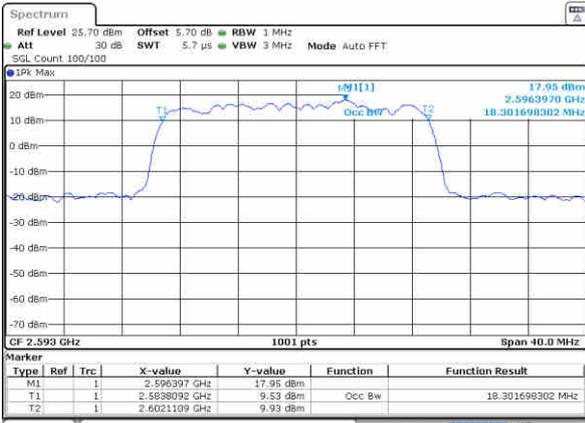


Date: 10.OCT.2017 18:39:13

Middle Channel / 20MHz / 16QAM

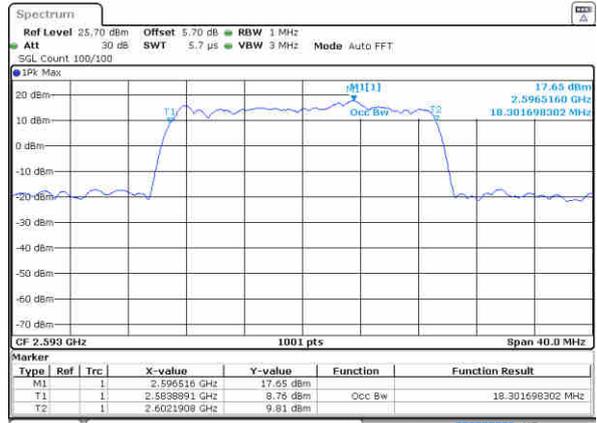


Date: 10.OCT.2017 18:40:01

Highest Channel / 20MHz / QPSK

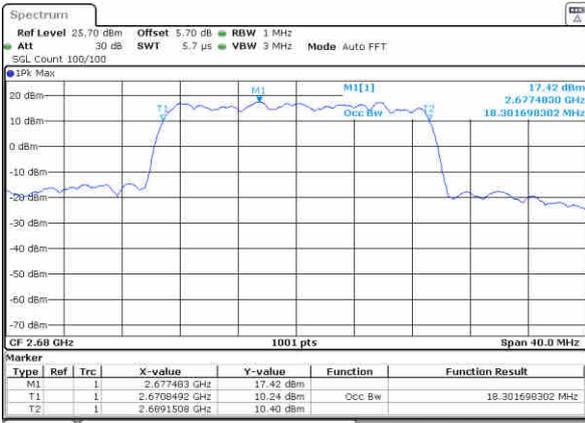

Date: 10.OCT.2017 18:41:02


Highest Channel / 20MHz / 16QAM

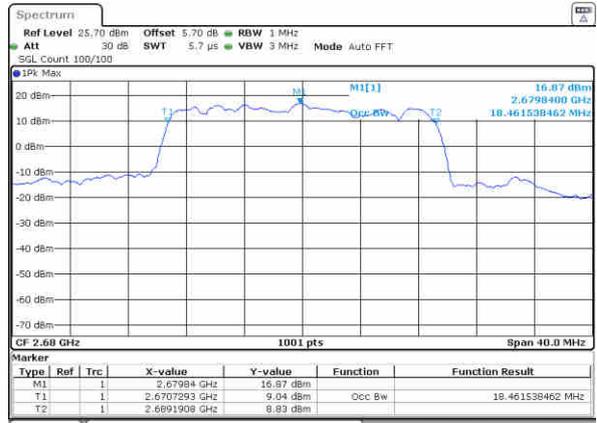

Date: 10.OCT.2017 18:42:31




# Conducted Band Edge

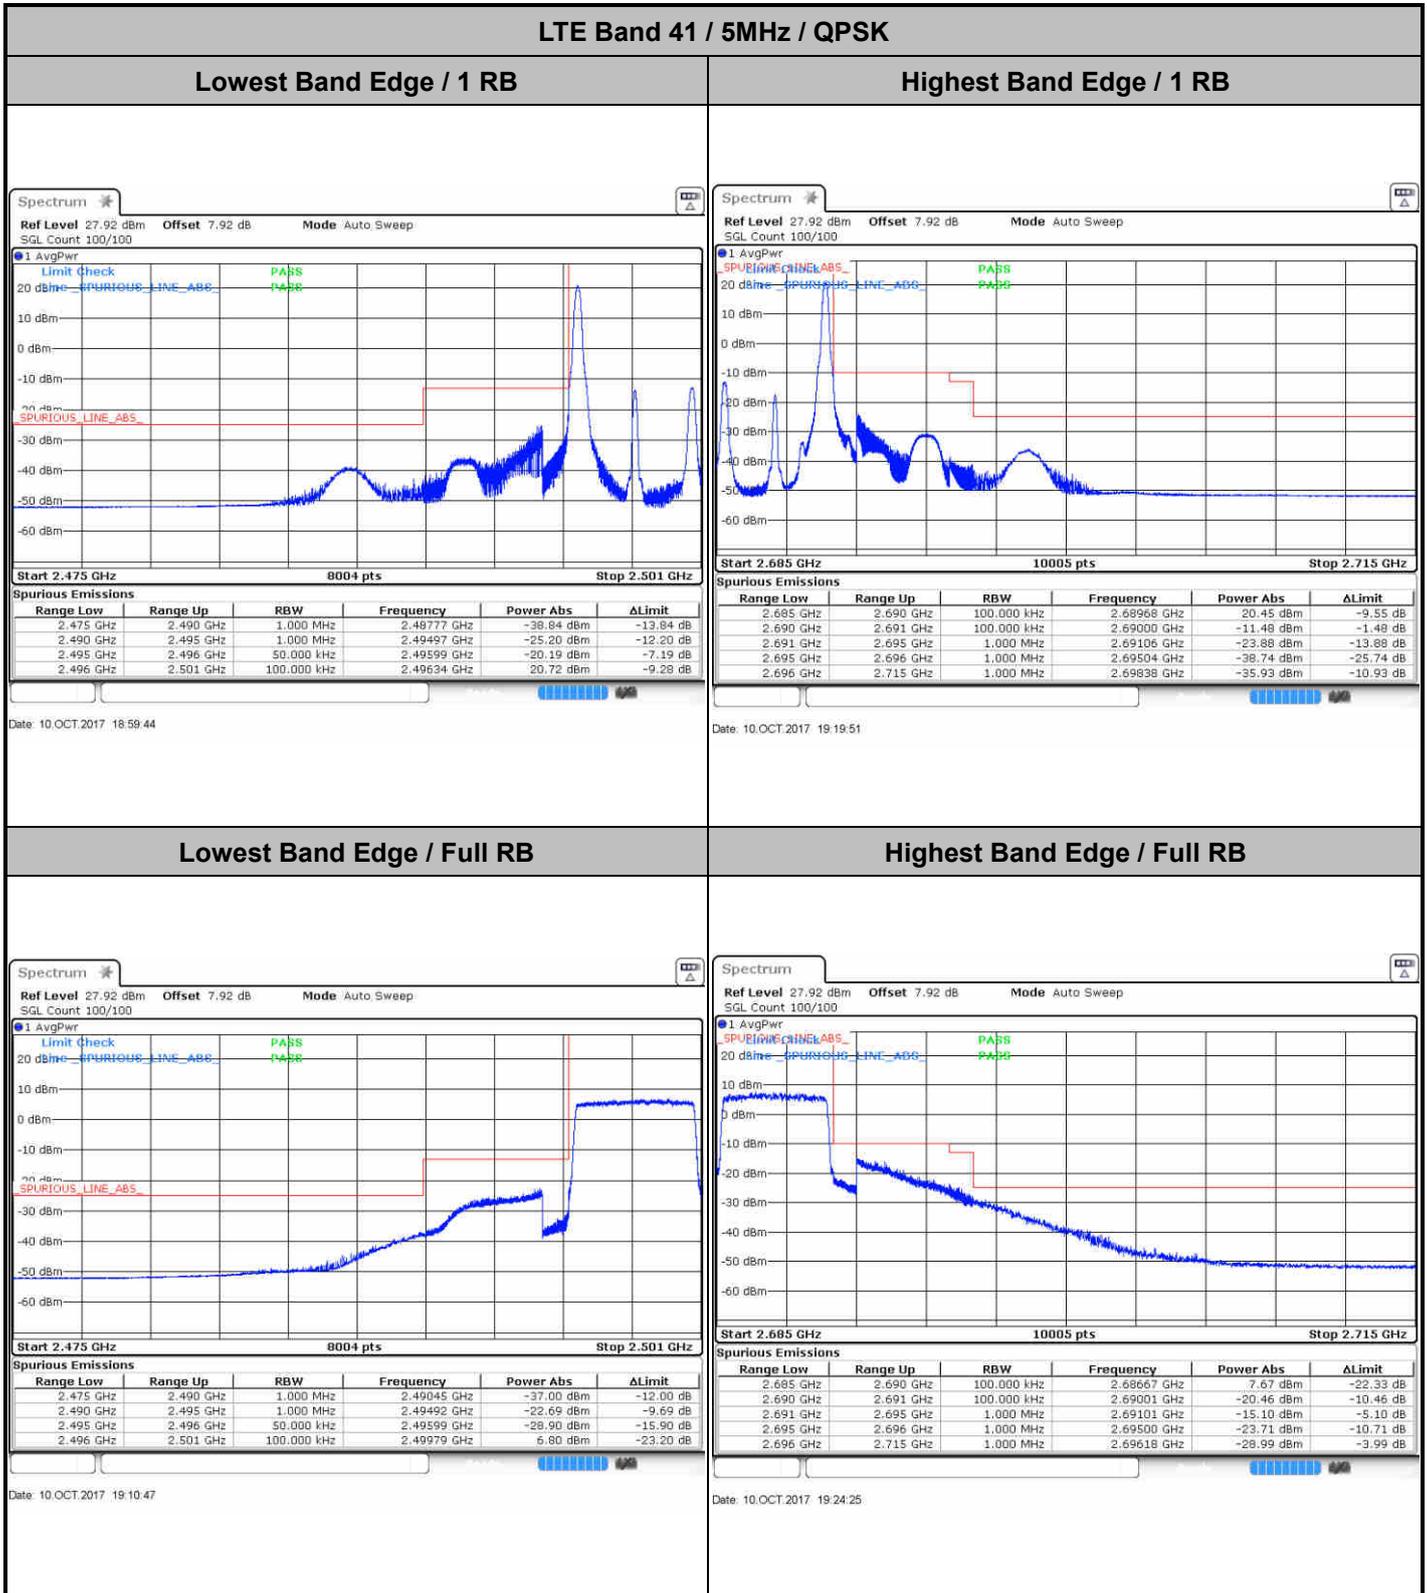




LTE Band 41 / 5MHz / 16QAM

Lowest Band Edge / 1RB

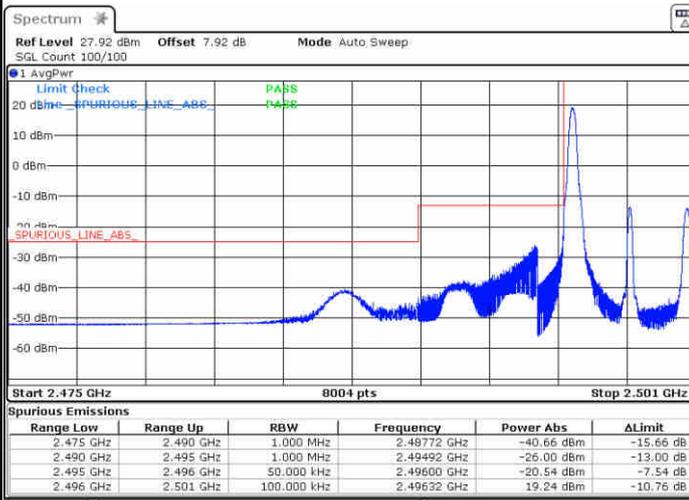


Date: 10.OCT.2017 19:07:23

Highest Band Edge / 1 RB

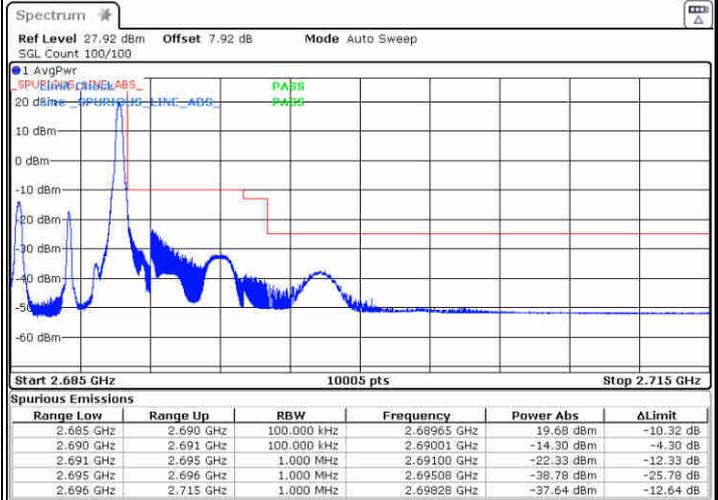


Date: 10.OCT.2017 19:21:46

Lowest Band Edge / Full RB

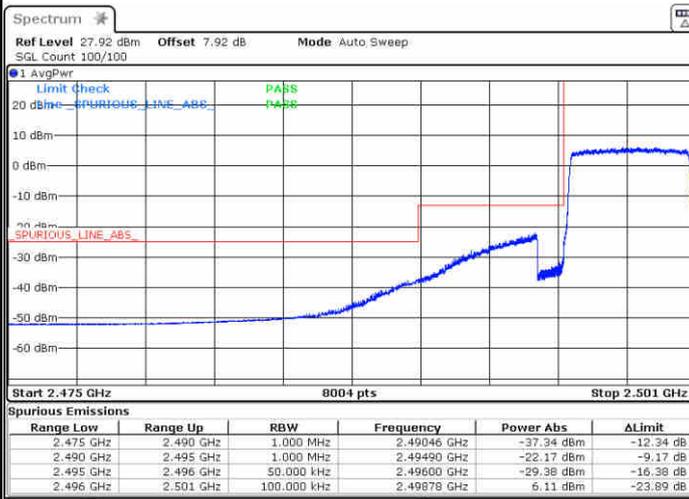

Date: 10.OCT.2017 19:11:35

Highest Band Edge / Full RB

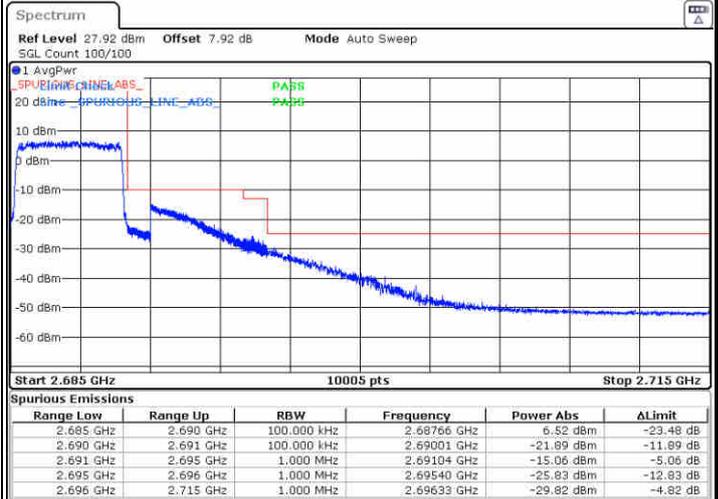


Date: 10.OCT.2017 19:24:44




LTE Band 41 / 10MHz / QPSK

Lowest Band Edge / 1 RB

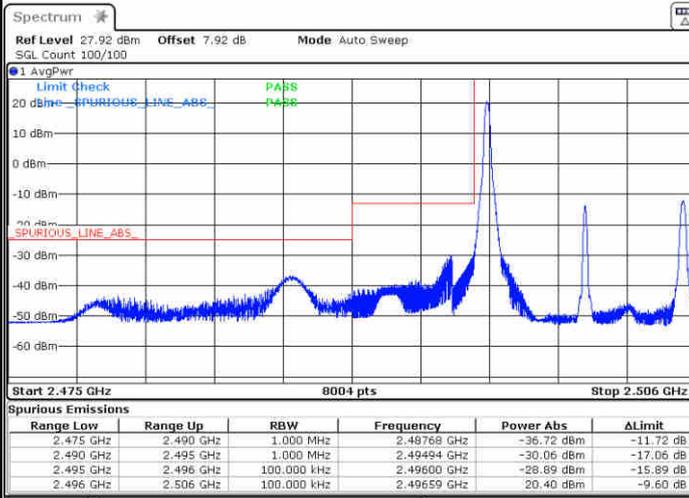


Date: 10.OCT.2017 19:27:44

Highest Band Edge / 1 RB

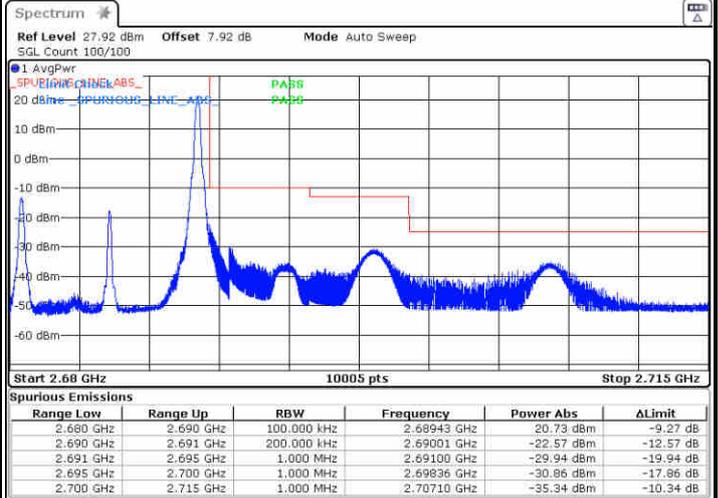

Date: 10.OCT.2017 19:53:06

Lowest Band Edge / Full RB

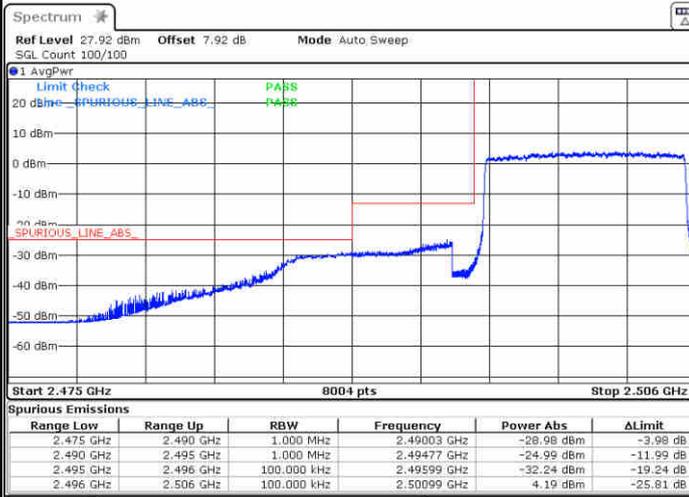

Date: 10.OCT.2017 19:43:57

Highest Band Edge / Full RB




Date: 10.OCT.2017 20:00:19




LTE Band 41 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

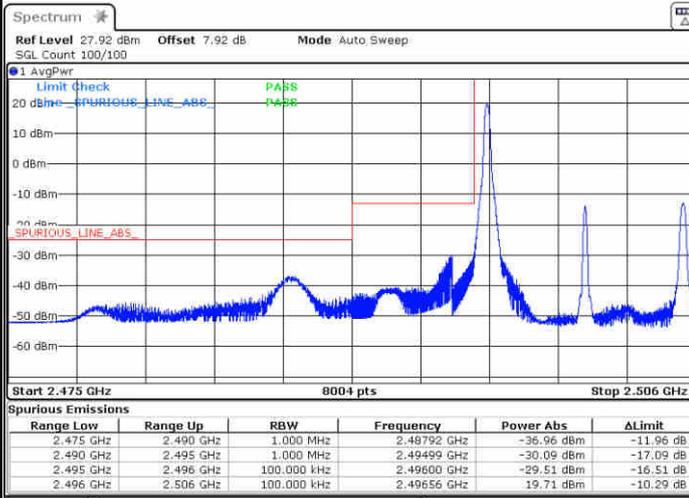


Date: 10.OCT.2017 19:39:27

Highest Band Edge / 1 RB

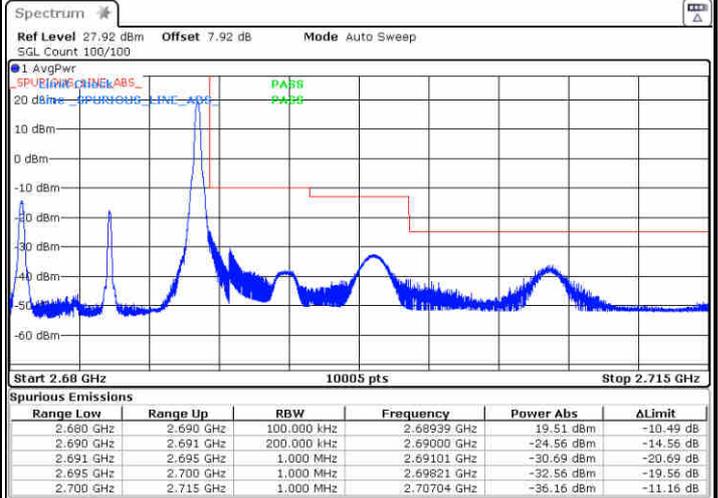


Date: 10.OCT.2017 19:55:32

Lowest Band Edge / Full RB

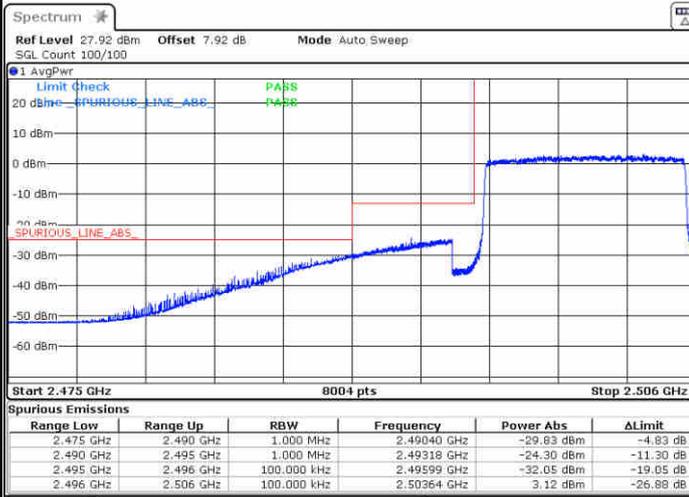

Date: 10.OCT.2017 19:44:38

Highest Band Edge / Full RB

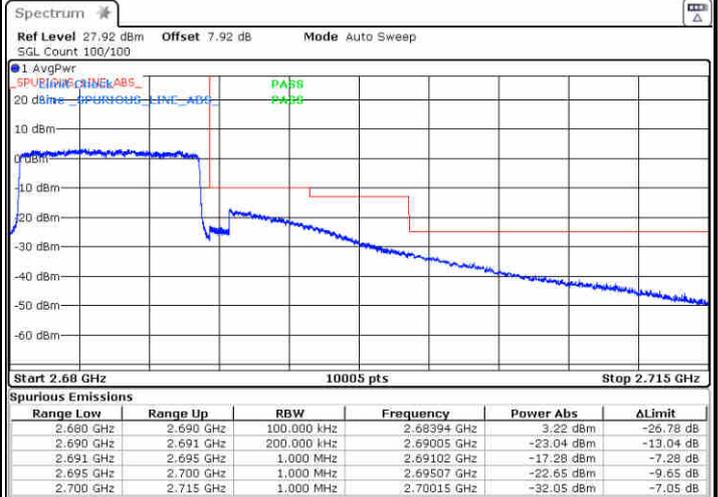


Date: 10.OCT.2017 20:01:05




LTE Band 41 / 15MHz / QPSK

Lowest Band Edge / 1 RB

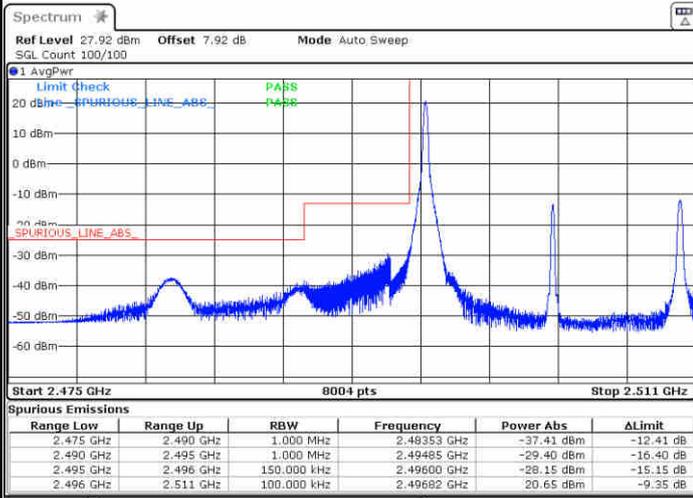


Date: 10.OCT.2017 20:04:25

Highest Band Edge / 1 RB

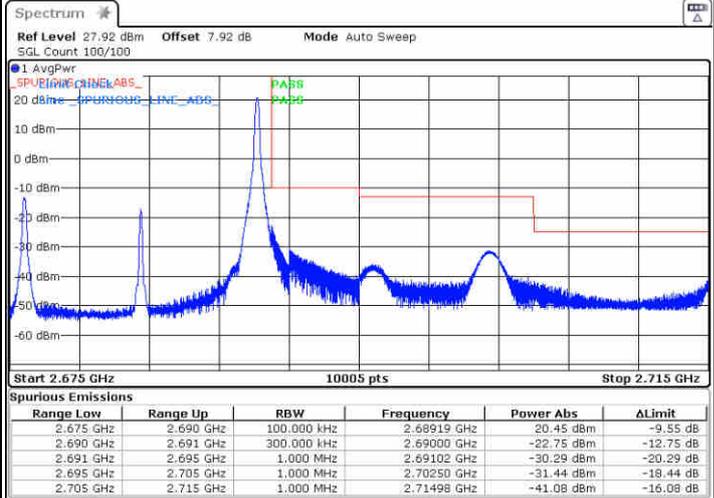


Date: 10.OCT.2017 20:16:34

Lowest Band Edge / Full RB

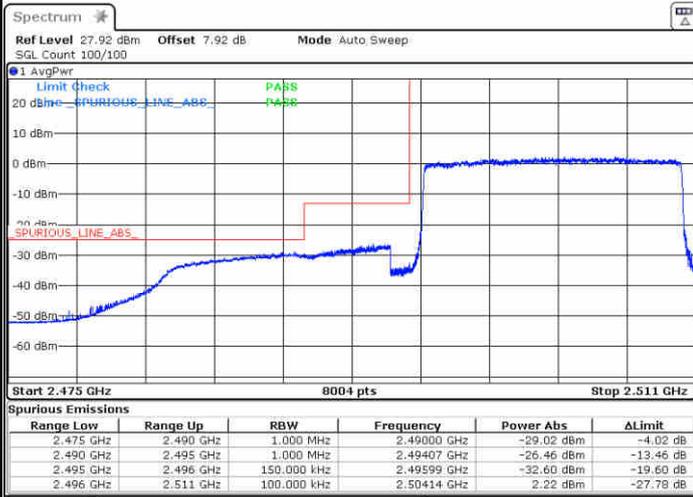

Date: 10.OCT.2017 20:10:19

Highest Band Edge / Full RB

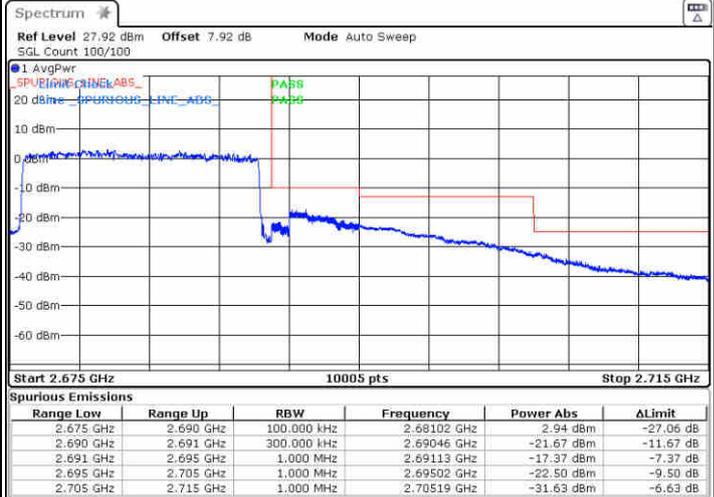


Date: 10.OCT.2017 20:38:58




LTE Band 41 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

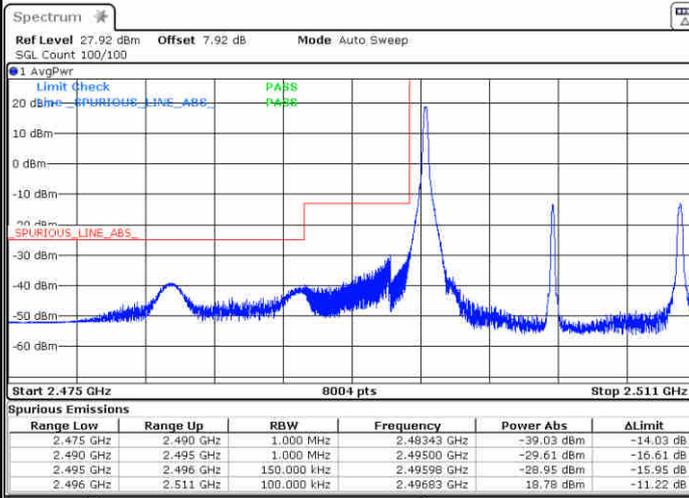


Date: 10.OCT.2017 20:06:33

Highest Band Edge / 1 RB

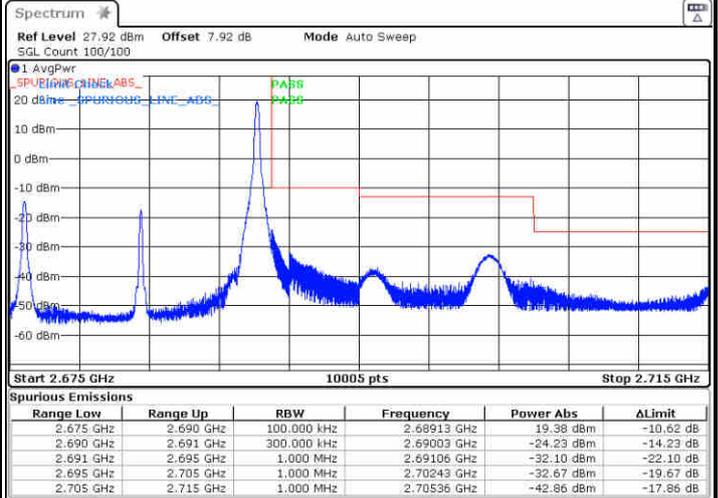


Date: 10.OCT.2017 20:18:46

Lowest Band Edge / Full RB

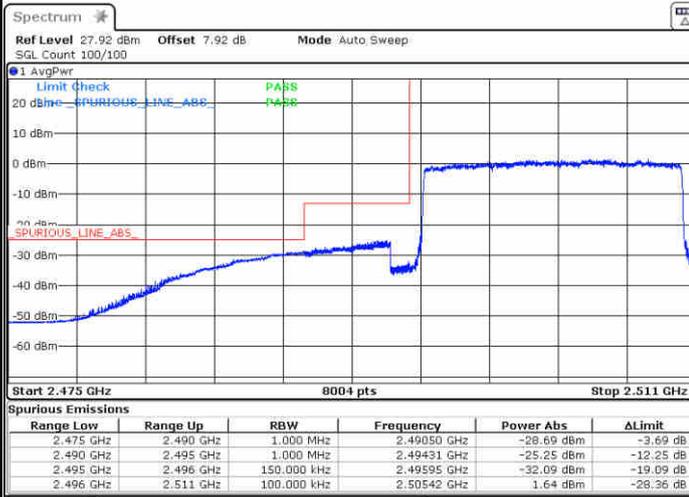

Date: 10.OCT.2017 20:11:16

Highest Band Edge / Full RB

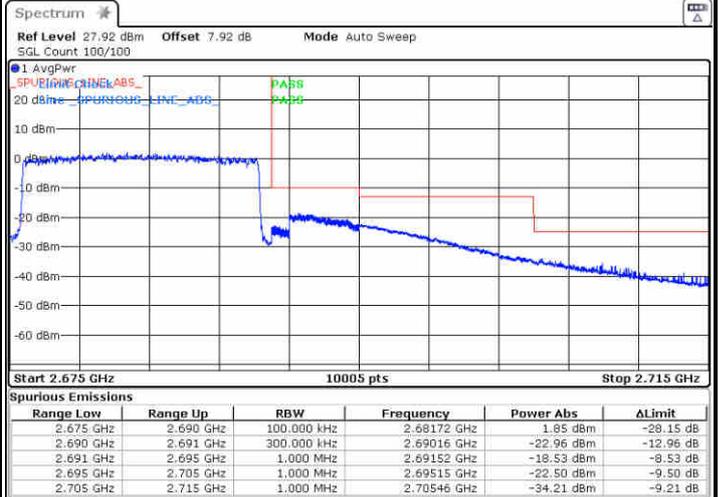


Date: 10.OCT.2017 20:39:49




LTE Band 41 / 20MHz / QPSK

Lowest Band Edge / 1 RB

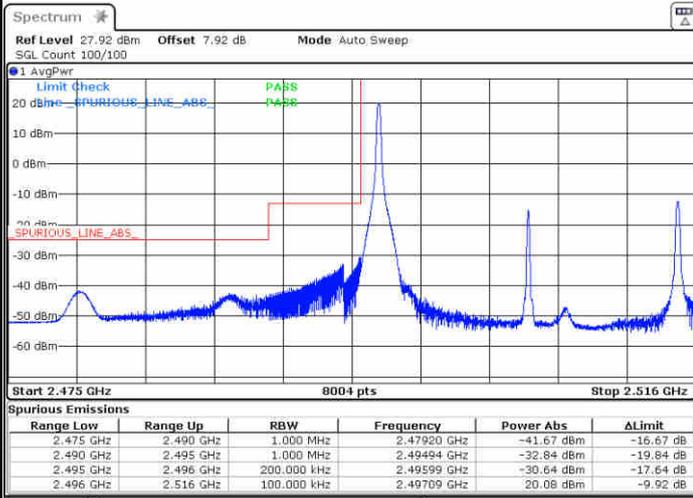


Date: 10.OCT.2017 20:42:20

Highest Band Edge / 1 RB

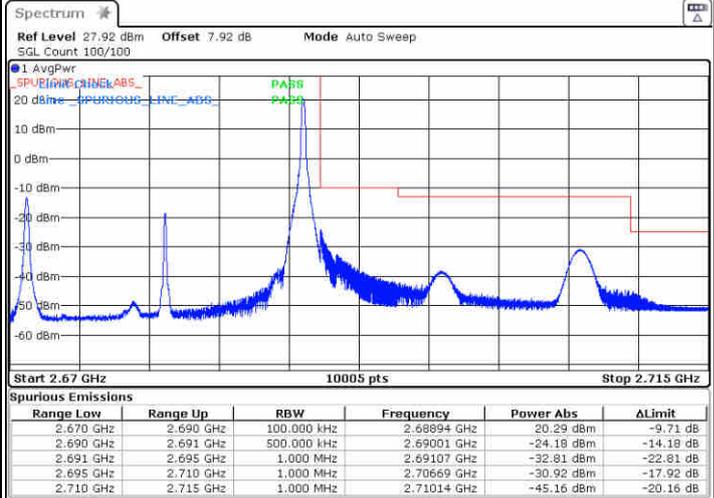


Date: 10.OCT.2017 20:49:32

Lowest Band Edge / Full RB

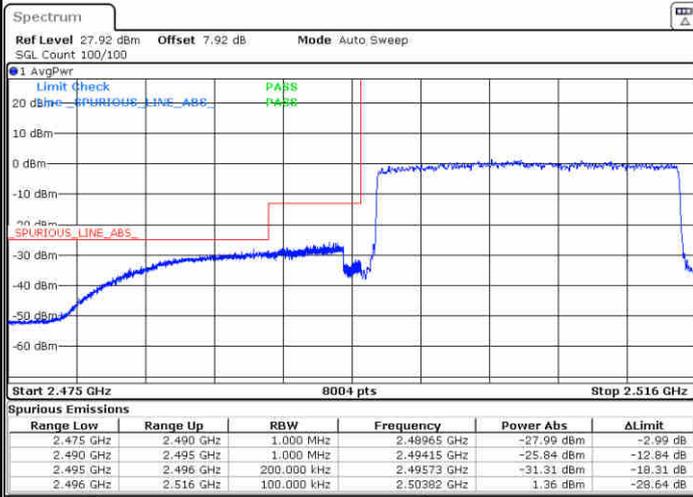

Date: 10.OCT.2017 20:46:19

Highest Band Edge / Full RB

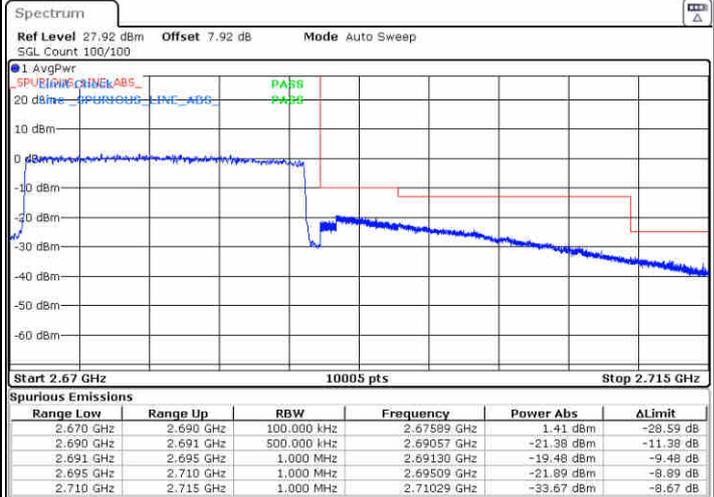


Date: 10.OCT.2017 20:54:21




LTE Band 41 / 20MHz / 16QAM

Lowest Band Edge / 1 RB

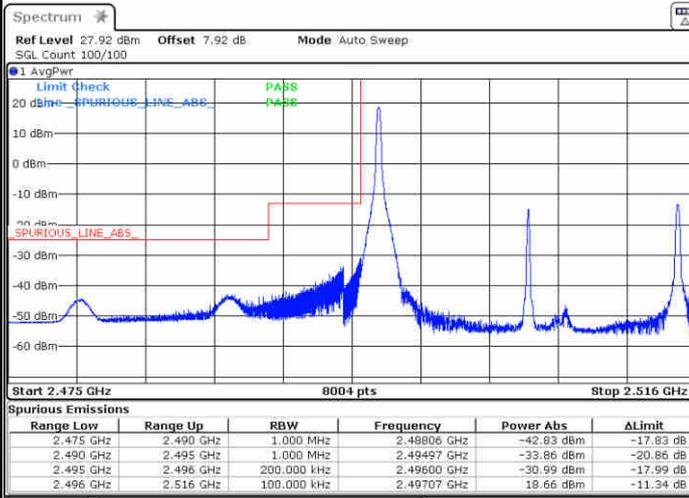


Date: 10.OCT.2017 20:44:09

Highest Band Edge / 1 RB

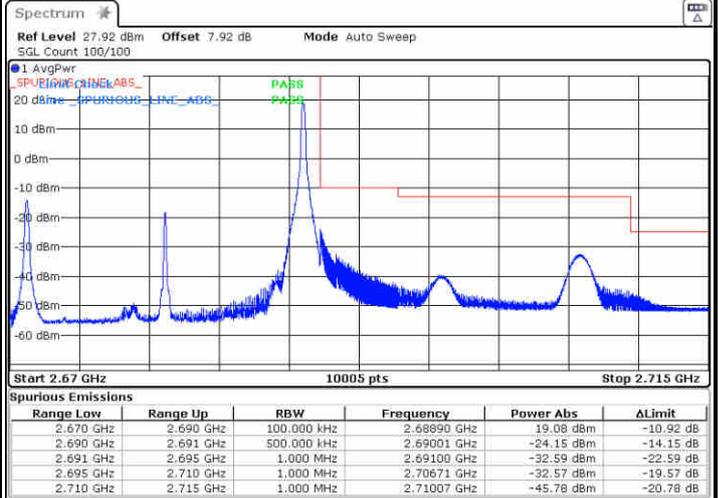


Date: 10.OCT.2017 20:51:50

Lowest Band Edge / Full RB

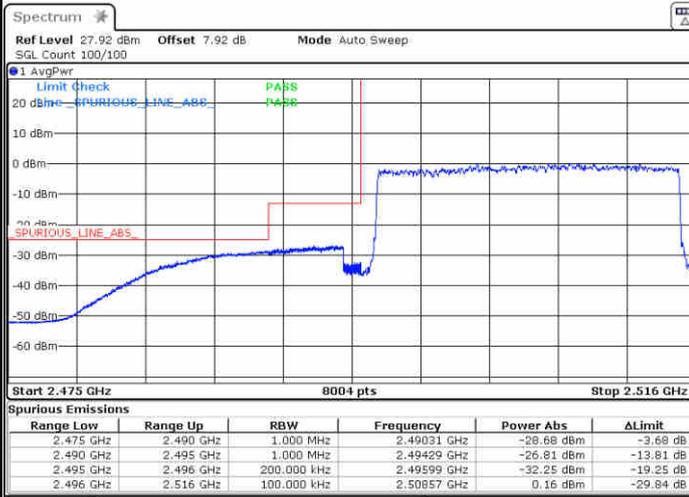

Date: 10.OCT.2017 20:46:54

Highest Band Edge / Full RB

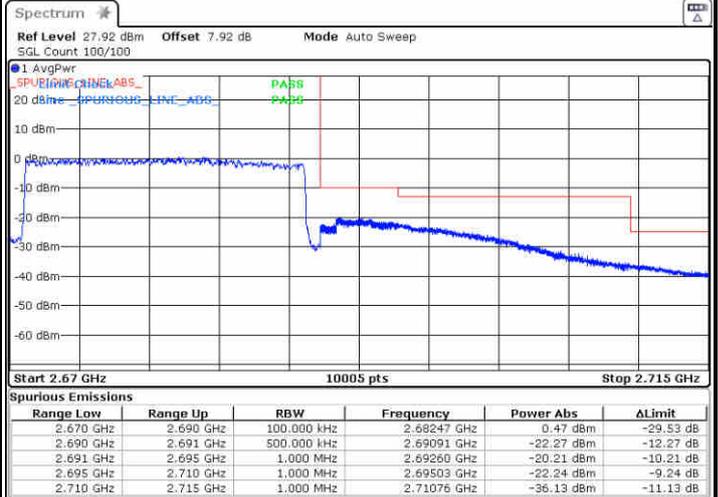

Date: 10.OCT.2017 20:54:50




# Conducted Spurious Emission






LTE Band 41 / 5MHz

Highest Channel / QPSK

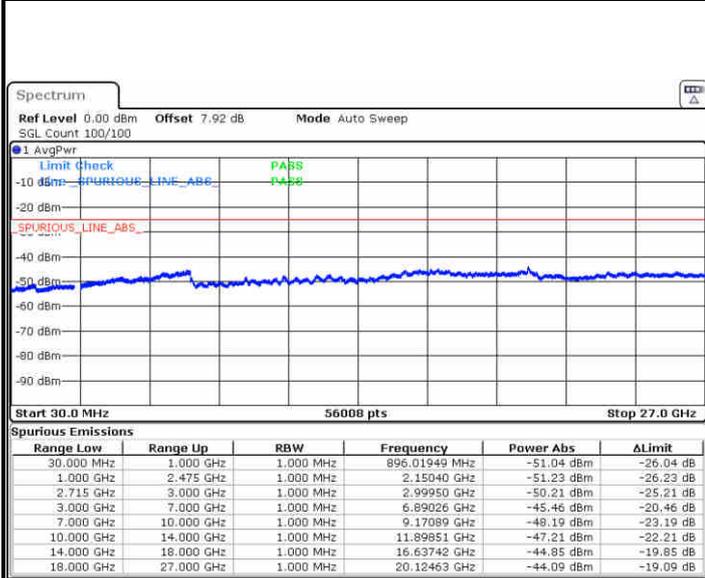

Date: 10.OCT.2017 21:02:27


Highest Channel / 16QAM

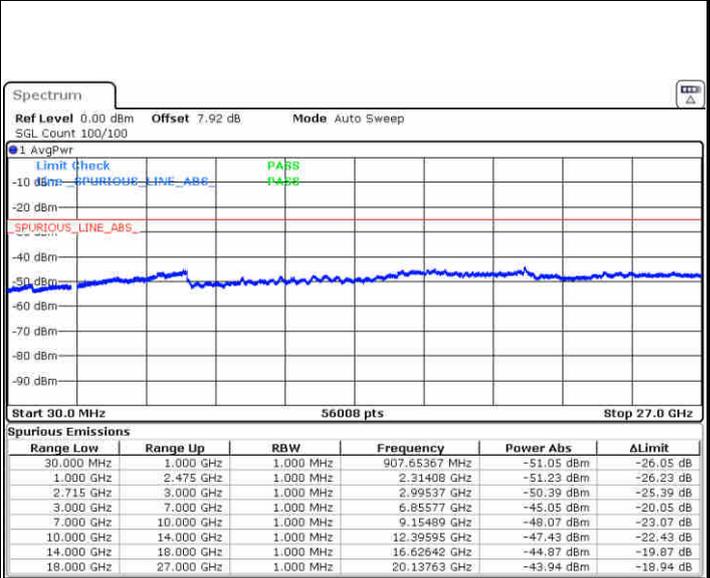

Date: 10.OCT.2017 21:04:21


LTE Band 41 / 10MHz

Lowest Channel / QPSK

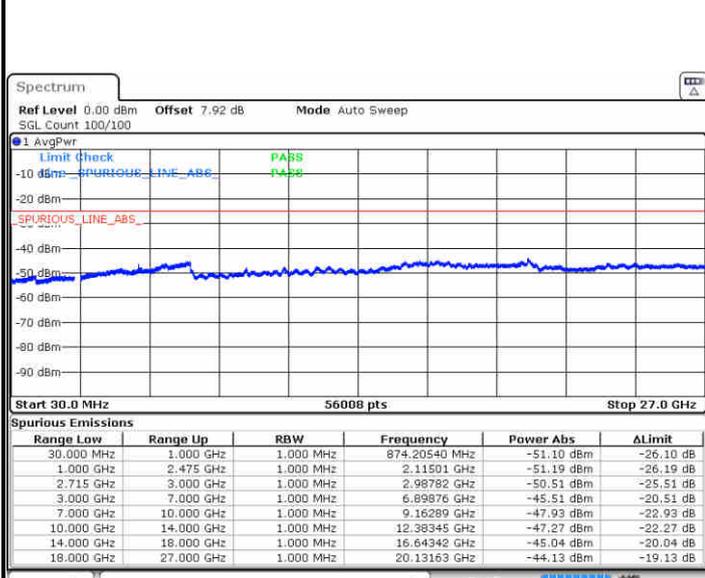

Date: 10.OCT.2017 21:08:22

Lowest Channel / 16QAM

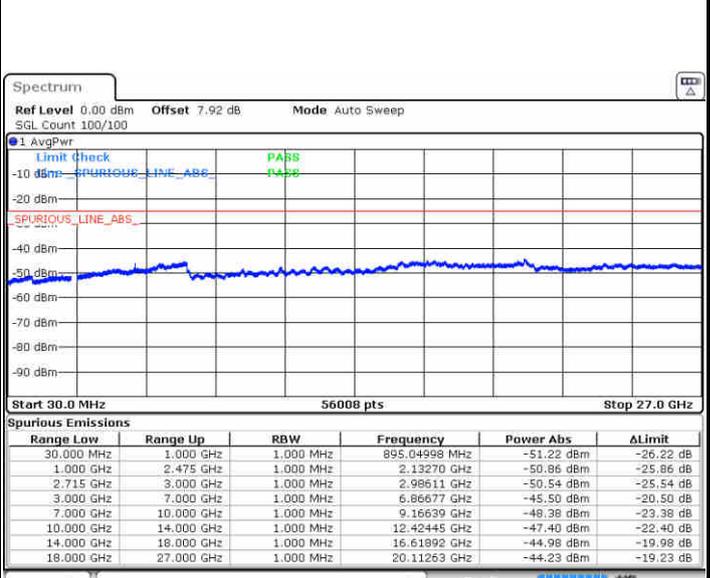



Date: 10.OCT.2017 21:09:09



LTE Band 41 / 10MHz

Middle Channel / QPSK

Middle Channel / 16QAM

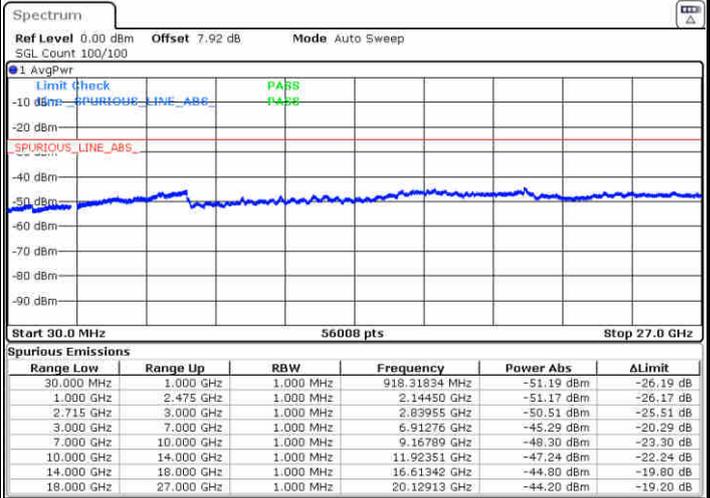
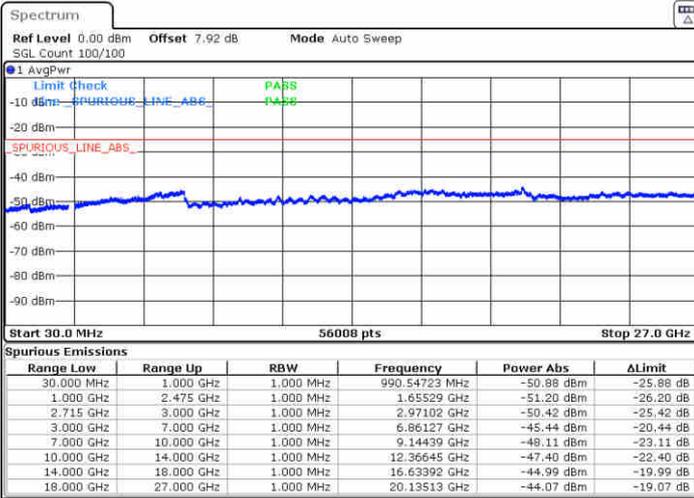


Date: 10.OCT.2017 21:11:05

Date: 10.OCT.2017 21:11:57

Highest Channel / QPSK

Highest Channel / 16QAM

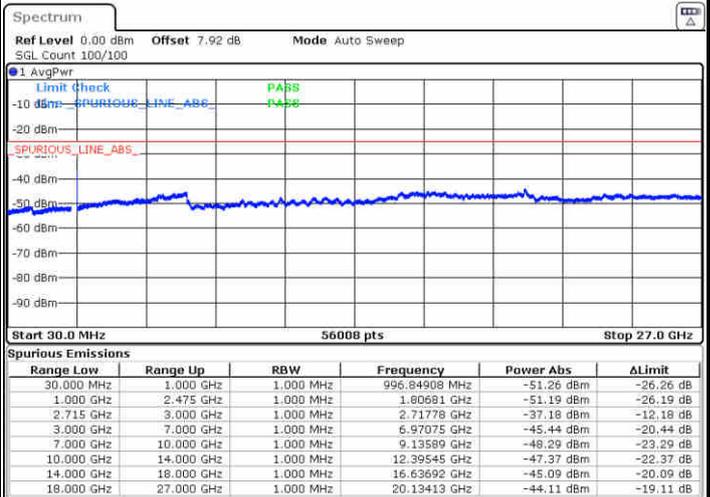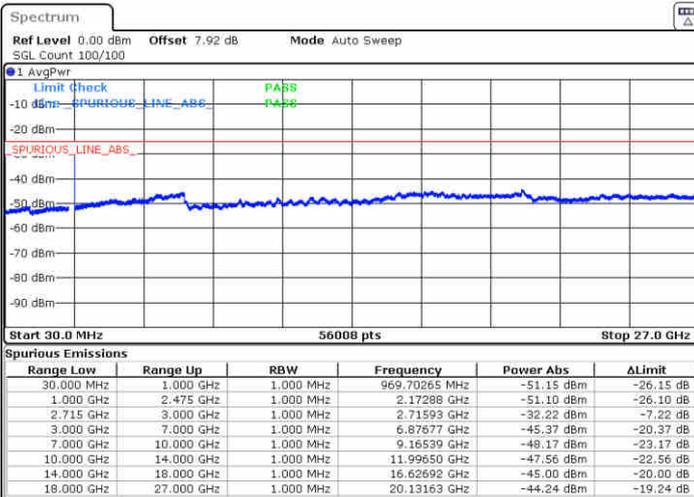

Date: 10.OCT.2017 21:13:45



Date: 10.OCT.2017 21:14:35



LTE Band 41 / 15MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

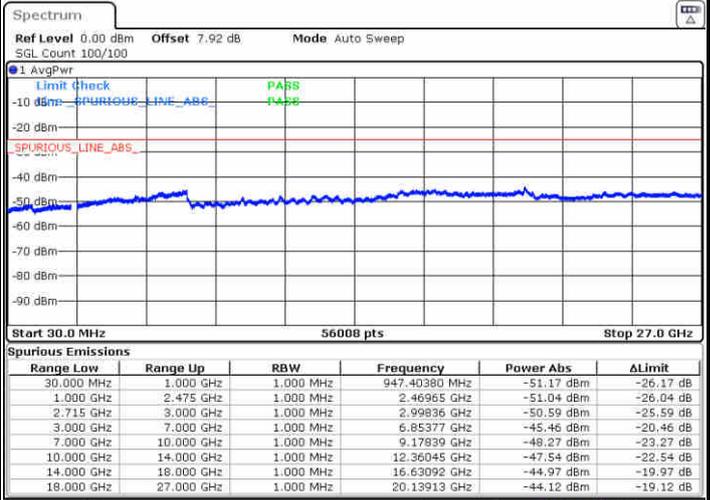
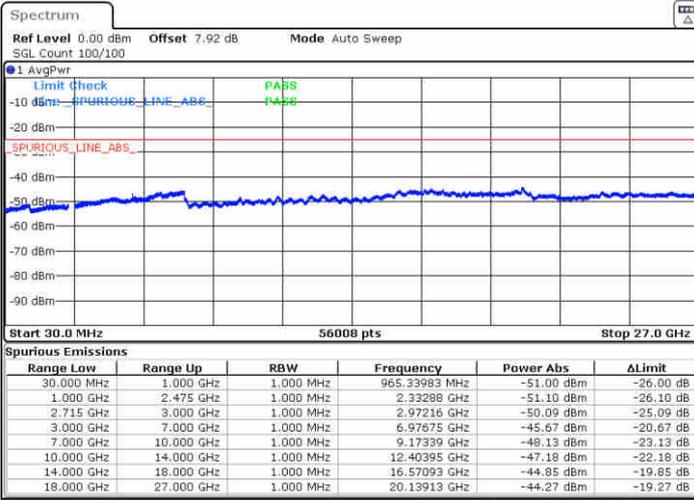


Date: 10.OCT.2017 21:23:35

Date: 10.OCT.2017 21:22:47

Middle Channel / QPSK

Middle Channel / 16QAM

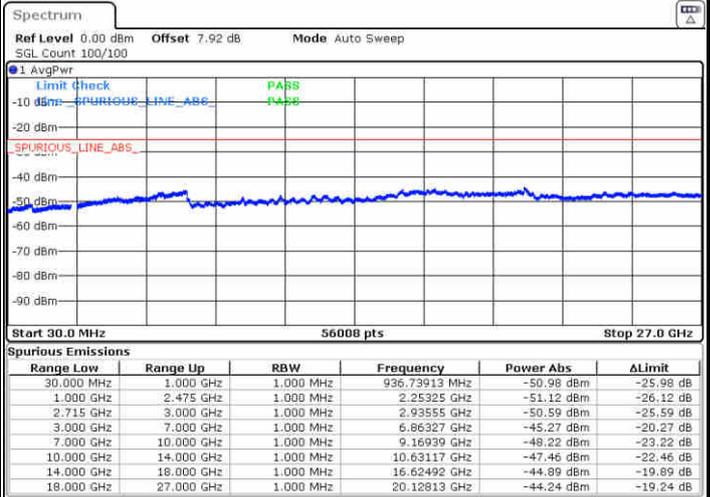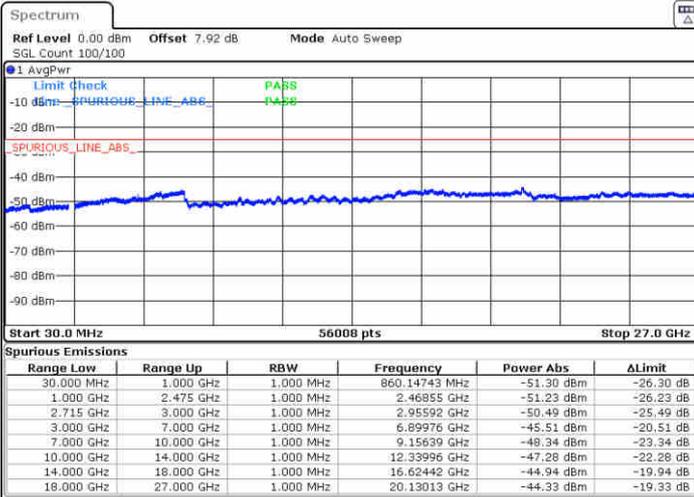


Date: 10.OCT.2017 21:19:10

Date: 10.OCT.2017 21:19:59




LTE Band 41 / 15MHz

Highest Channel / QPSK

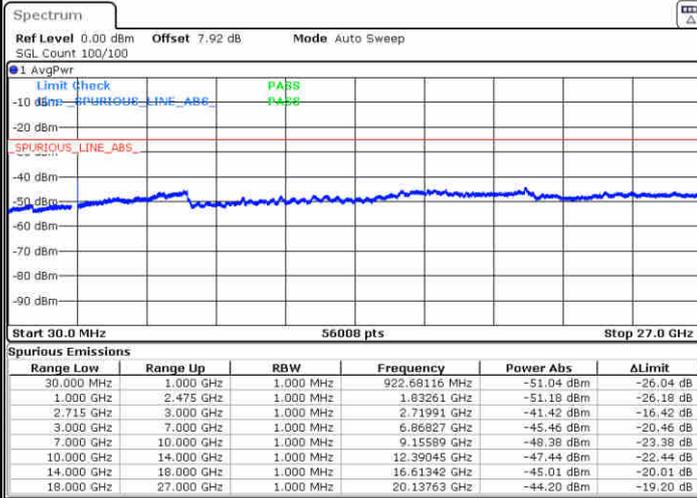

Date: 10.OCT.2017 21:24:24


Highest Channel / 16QAM

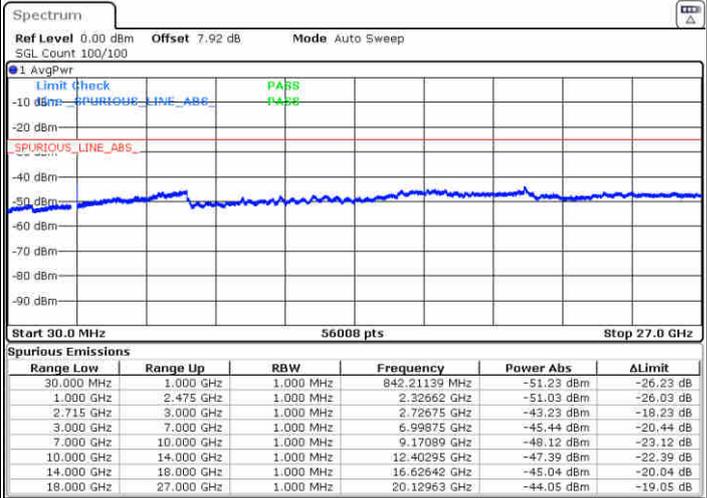

Date: 10.OCT.2017 21:25:13


LTE Band 41 / 20MHz

Lowest Channel / QPSK

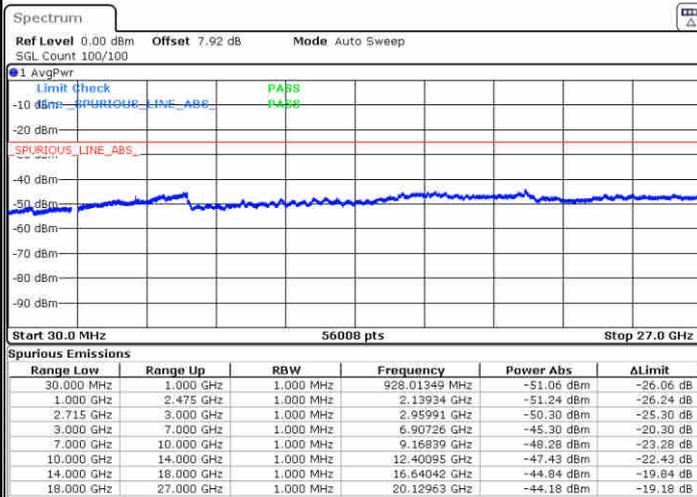

Date: 10.OCT.2017 21:26:56

Lowest Channel / 16QAM

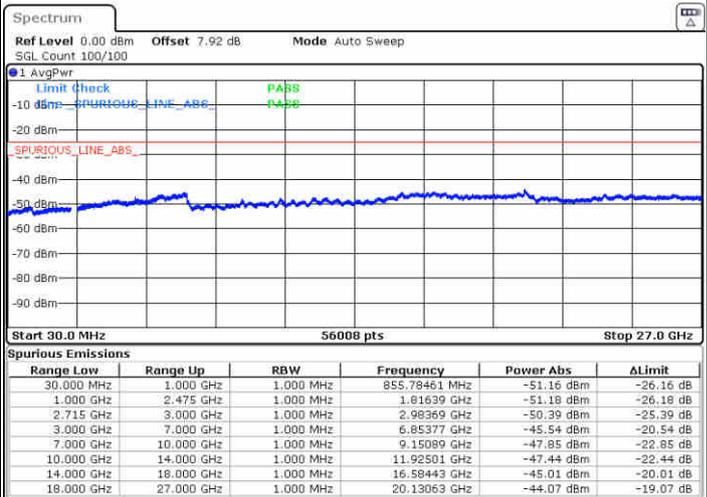



Date: 10.OCT.2017 21:27:58



LTE Band 41 / 20MHz

Middle Channel / QPSK

Middle Channel / 16QAM

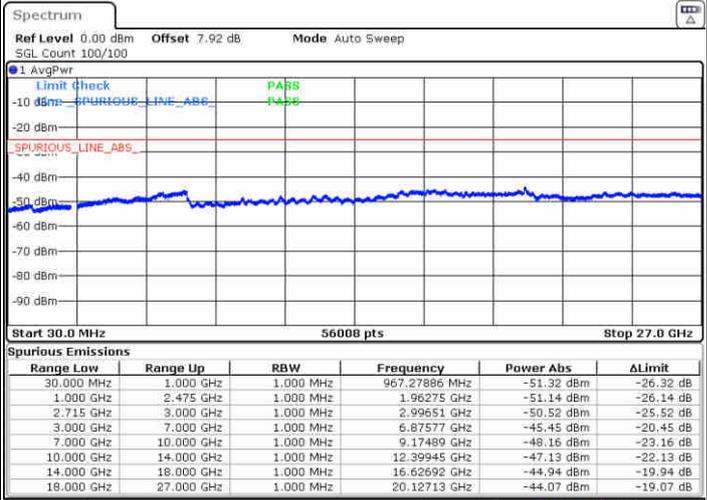
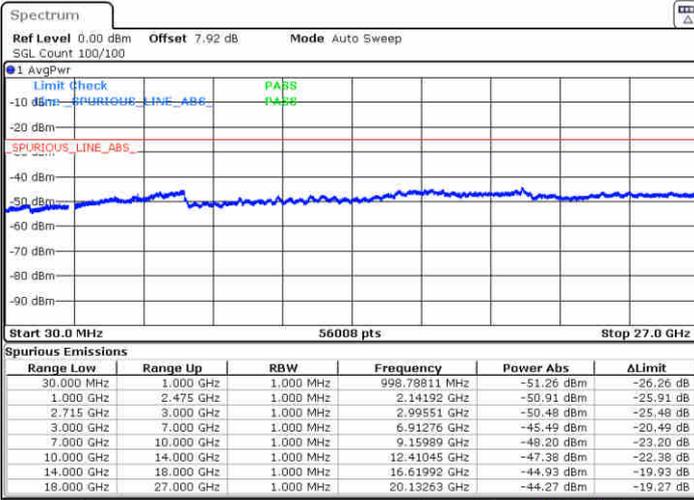


Date: 10.OCT.2017 21:29:39

Date: 10.OCT.2017 21:30:28

Highest Channel / QPSK

Highest Channel / 16QAM

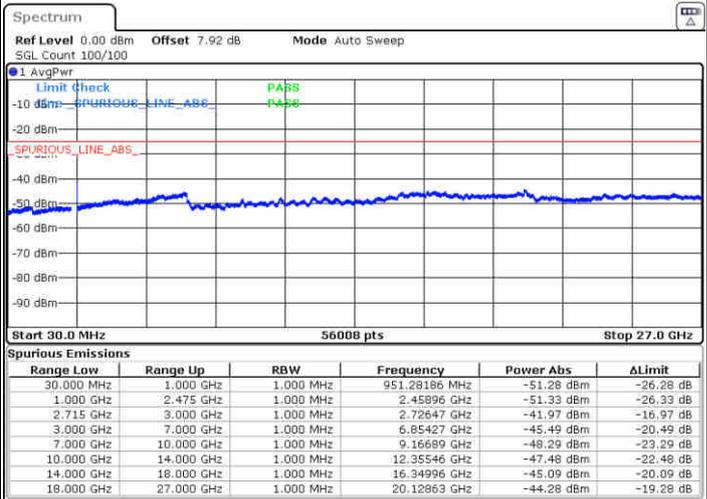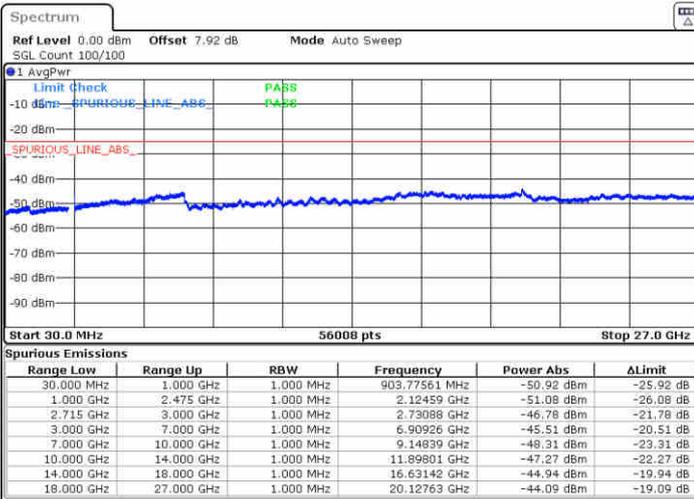

Date: 10.OCT.2017 21:32:30

Date: 10.OCT.2017 21:33:26



### Frequency Stability

Test Conditions		LTE Band 41 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0005	PASS
40	Normal Voltage	0.0022	
30	Normal Voltage	0.0002	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0014	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0002	
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0024	
20	Maximum Voltage	0.0001	
20	Normal Voltage	0.0019	
20	Battery End Point	0.0004	

**Note:**

1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.6 V. ; Maximum Voltage =4.4 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

LTE Band 41 / 5MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5180	-51.44	-25	-26.44	-39.90	-57.99	2.56	9.12	H
	7772	-46.62	-25	-21.62	-41.13	-55.13	3.45	11.97	H
	10364	-50.04	-25	-25.04	-49.79	-58.52	3.62	12.10	H
	5180	-53.08	-25	-28.08	-41.37	-59.64	2.56	9.12	V
	7772	-52.89	-25	-27.89	-45.87	-61.40	3.45	11.97	V
	10364	-53.31	-25	-28.31	-53.56	-61.79	3.62	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 41 / 10MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5177	-48.35	-25	-23.35	-37.92	-54.91	2.56	9.12	H
	7766	-43.50	-25	-18.50	-38.89	-52.02	3.45	11.97	H
	10352	-49.27	-25	-24.27	-49.02	-57.75	3.62	12.10	H
	5177	-48.32	-25	-23.32	-38.3	-54.88	2.56	9.12	V
	7766	-50.98	-25	-25.98	-44.47	-59.50	3.45	11.97	V
	10352	-50.24	-25	-25.24	-50.49	-58.72	3.62	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 41 / 15MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5171	-47.50	-25	-22.50	-37.26	-54.06	2.56	9.12	H
	7760	-47.18	-25	-22.18	-41.50	-55.69	3.45	11.97	H
	10344	-47.25	-25	-22.25	-47.00	-55.73	3.62	12.10	H
	5171	-49.56	-25	-24.56	-39.21	-56.12	2.56	9.12	V
	7760	-55.73	-25	-30.73	-48.71	-64.24	3.45	11.97	V
	10344	-51.47	-25	-26.47	-51.72	-59.95	3.62	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 41 / 20MHz / QPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5168	-47.36	-25	-22.36	-37.14	-53.91	2.56	9.12	H
	7751	-46.88	-25	-21.88	-41.26	-55.39	3.45	11.97	H
	10336	-49.00	-25	-24.00	-48.75	-57.48	3.62	12.10	H
	5168	-47.10	-25	-22.10	-37.34	-53.65	2.56	9.12	V
	7751	-52.94	-25	-27.94	-45.92	-61.45	3.45	11.97	V
	10336	-52.18	-25	-27.18	-52.43	-60.66	3.62	12.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.