



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB305XU
FCC ID : O57TB305XU
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 13, 2024 ~ Dec. 03, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 5

 1.6 Testing Location 6

 1.7 Test Software..... 6

 1.8 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode..... 7

 2.3 Connection Diagram of Test System 8

 2.4 Support Unit used in test configuration and system 9

 2.5 EUT Operation Test Setup 9

 2.6 Measurement Results Explanation Example..... 9

3 TEST RESULT 10

 3.1 6dB and 99% Bandwidth Measurement 10

 3.2 Output Power Measurement..... 11

 3.3 Power Spectral Density Measurement 14

 3.4 Conducted Band Edges and Spurious Emission Measurement 15

 3.5 Radiated Band Edges and Spurious Emission Measurement 16

 3.6 AC Conducted Emission Measurement..... 20

 3.7 Antenna Requirements 22

4 LIST OF MEASURING EQUIPMENT 23

5 MEASUREMENT UNCERTAINTY 24

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
0	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.48 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.80 dB at 14.672 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB305XU
FCC ID	O57TB305XU
IMEI Code	Conducted: 868538070001961/868538070001978 Conduction: 868538070001466 Radiation: 868538070000872
HW Version	TB305XU
SW Version	TB305XU_RF01_241207
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 21.16 dBm (0.1306 W) 802.11g : 25.04 dBm (0.3192 W) 802.11n HT20 : 24.96 dBm (0.3133 W)
99% Occupied Bandwidth	802.11b : 13.273MHz 802.11g : 17.455MHz 802.11n HT20 : 18.218MHz
Antenna Type / Gain	PIFA Antenna type with gain -2.1 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Test Cases	
AC Conducted Emission	Mode 1 :BT Link + WLAN Link(2.4G) + Earphone1 + USB Cable (2)(Charging From Adaptor2)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable 1.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

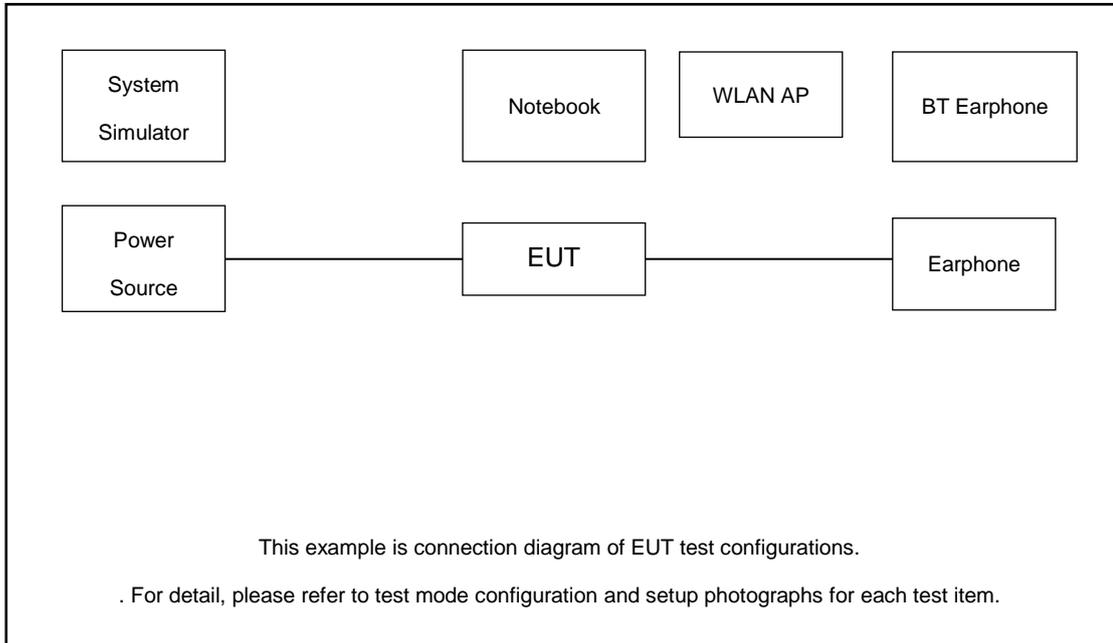

Radiated Emission:

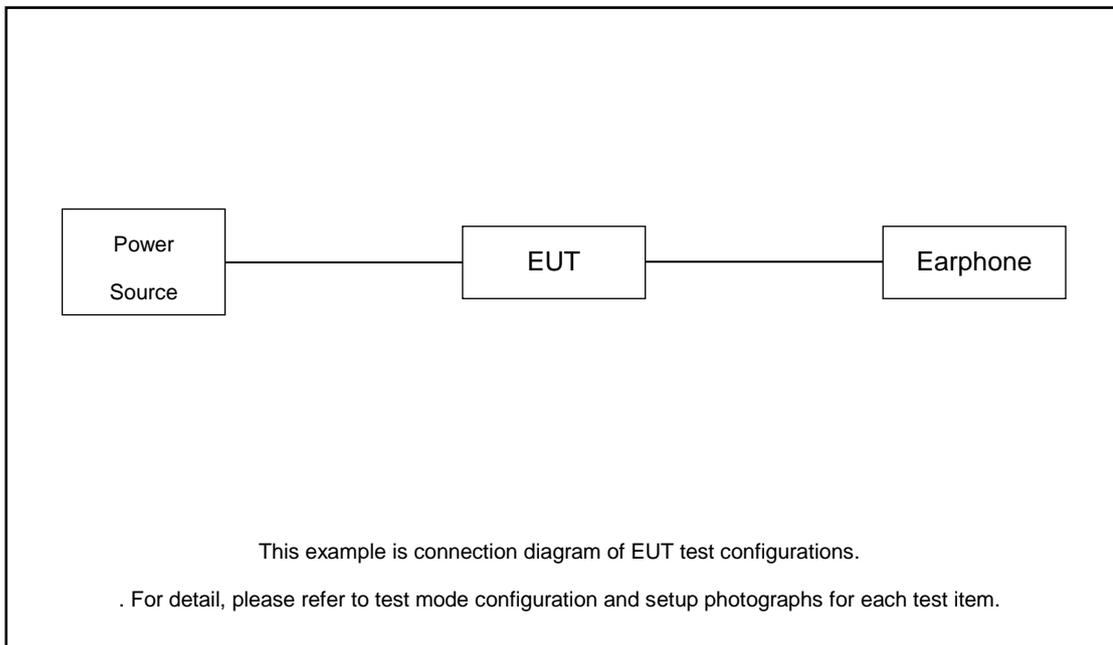



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	SD Card	Kingston	8GB	N/A	N/A	N/A
5.	Bluetooth Earphone	N/A	N/A	N/A	N/A	N/A
6.	Earphone1	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 1.87 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 1.87 + 20 = 21.87 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times$ RBW. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

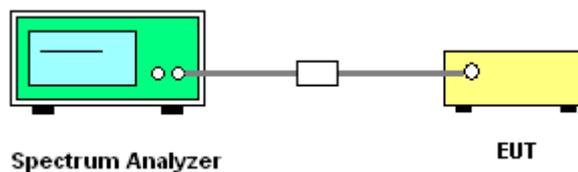

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

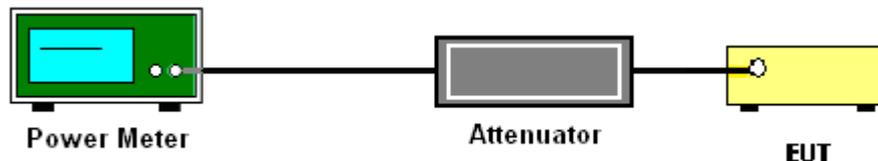



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	21.16	30.00	-2.10	19.06	36.00	Pass
11b	1Mbps	1	2	2417	21.08	30.00	-2.10	18.98	36.00	Pass
11b	1Mbps	1	6	2437	17.47	30.00	-2.10	15.37	36.00	Pass
11b	1Mbps	1	11	2462	19.11	30.00	-2.10	17.01	36.00	Pass
11g	6Mbps	1	1	2412	24.81	30.00	-2.10	22.71	36.00	Pass
11g	6Mbps	1	6	2437	25.04	30.00	-2.10	22.94	36.00	Pass
11g	6Mbps	1	11	2462	24.72	30.00	-2.10	22.62	36.00	Pass
HT20	MCS0	1	1	2412	24.72	30.00	-2.10	22.62	36.00	Pass
HT20	MCS0	1	6	2437	24.96	30.00	-2.10	22.86	36.00	Pass
HT20	MCS0	1	11	2462	24.76	30.00	-2.10	22.66	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	0.00	18.90	30.00	-2.10	16.80	36.00	Pass
11b	1Mbps	1	2	2417	0.00	18.71	30.00	-2.10	16.61	36.00	Pass
11b	1Mbps	1	6	2437	0.00	15.12	30.00	-2.10	13.02	36.00	Pass
11b	1Mbps	1	11	2462	0.00	16.74	30.00	-2.10	14.64	36.00	Pass
11g	6Mbps	1	1	2412	0.13	17.90	30.00	-2.10	15.80	36.00	Pass
11g	6Mbps	1	6	2437	0.13	17.78	30.00	-2.10	15.68	36.00	Pass
11g	6Mbps	1	11	2462	0.13	17.96	30.00	-2.10	15.86	36.00	Pass
HT20	MCS0	1	1	2412	0.14	15.72	30.00	-2.10	13.62	36.00	Pass
HT20	MCS0	1	6	2437	0.14	15.54	30.00	-2.10	13.44	36.00	Pass
HT20	MCS0	1	11	2462	0.14	15.81	30.00	-2.10	13.71	36.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

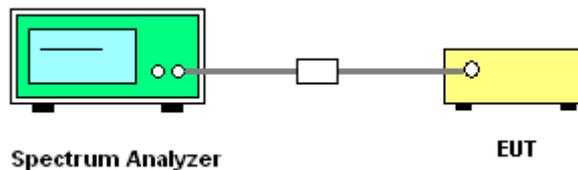

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

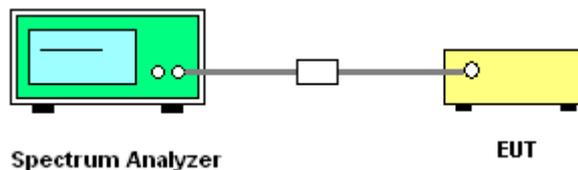

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A .



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

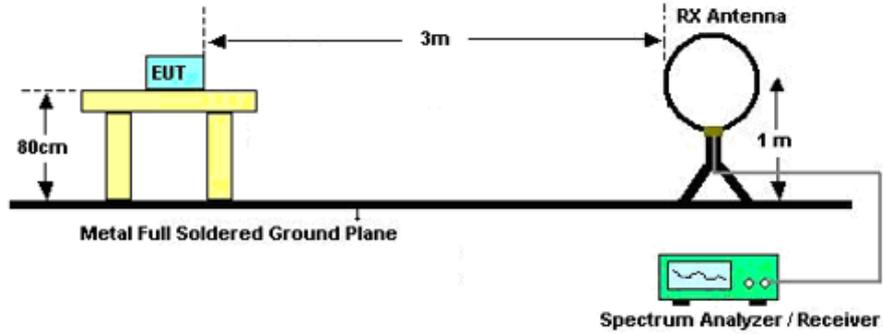

For radiated emissions from 30MHz to 1GHz

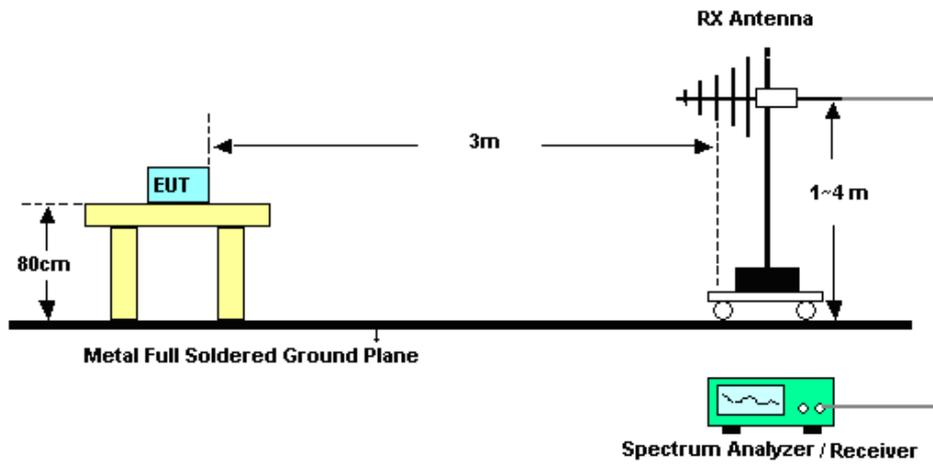

For radiated emissions above 1GHz

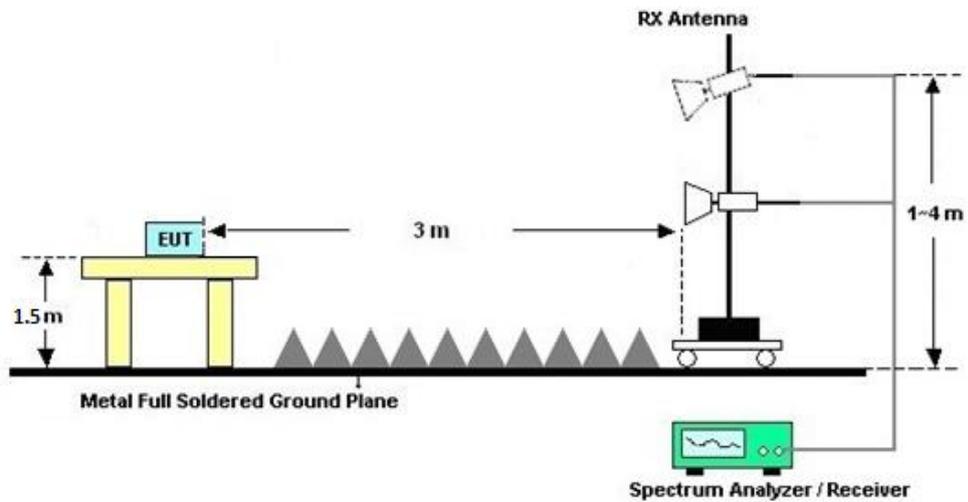



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

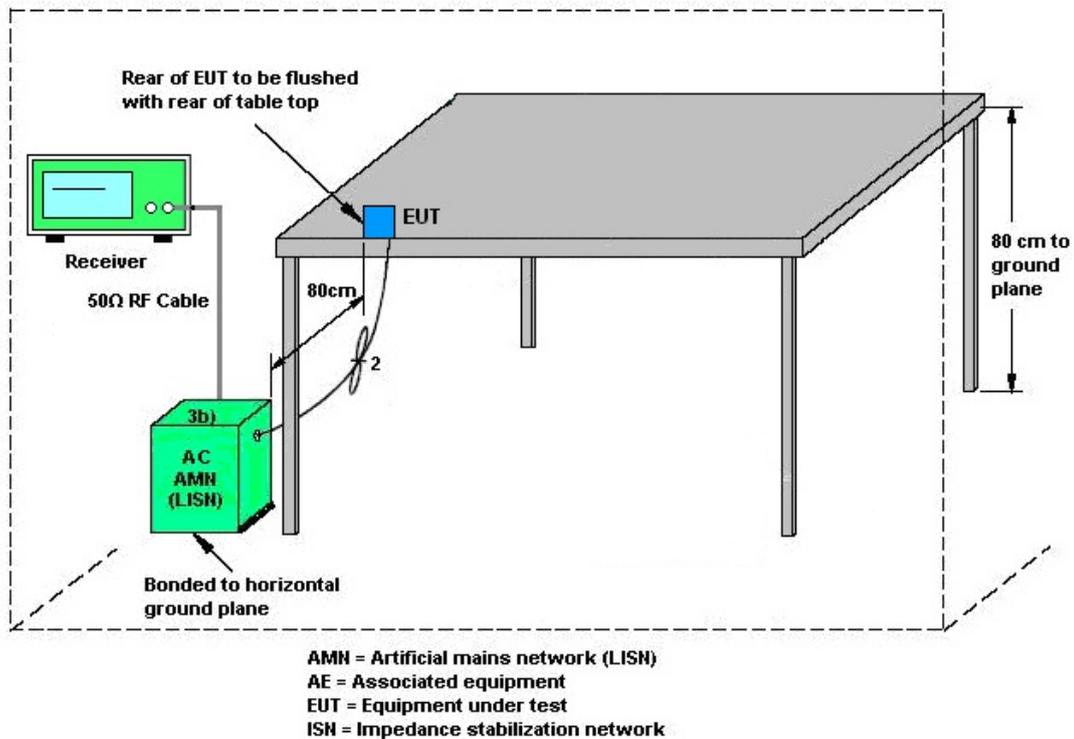

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 13, 2024~ Dec. 03, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 13, 2024~ Dec. 03, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 13, 2024~ Dec. 03, 2024	Jan. 01, 2025	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 04, 2024	Nov. 16, 2024	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz, MAX 30dB	Oct. 10, 2024	Nov. 16, 2024	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 16, 2024	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 18, 2024	Nov. 16, 2024	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 11, 2024	Nov. 16, 2024	Apr. 10, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 16, 2024	Jan. 05, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	381512	9KHz~1GHz	Jan. 02, 2024	Nov. 16, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 02, 2024	Nov. 16, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1GHz~18GHz	Jan. 03, 2024	Nov. 16, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1GHz~18GHz	Jan. 03, 2024	Nov. 16, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 16, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 16, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 16, 2024	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Nov. 30, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Nov. 30, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Nov. 30, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Nov. 30, 2024	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.02 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.34 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results





DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.53	2408.01	2415.55	0.5	PASS
		2417	8.04	2412.98	2421.02	0.5	PASS
		2437	8.55	2432.98	2441.53	0.5	PASS
		2462	7.57	2457.98	2465.55	0.5	PASS
11G	Ant1	2412	15.10	2404.48	2419.59	0.5	PASS
		2437	16.34	2428.87	2445.21	0.5	PASS
		2462	15.43	2454.12	2469.55	0.5	PASS
11N20SISO	Ant1	2412	15.07	2404.45	2419.52	0.5	PASS
		2437	15.07	2429.52	2444.59	0.5	PASS
		2462	15.10	2454.45	2469.55	0.5	PASS



Test Graphs

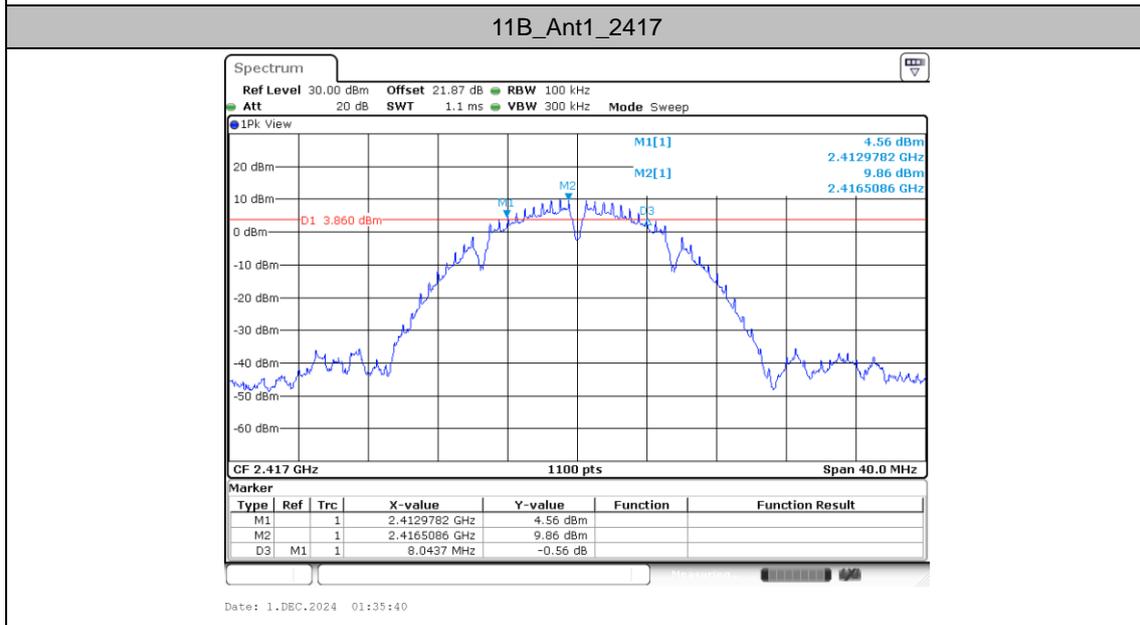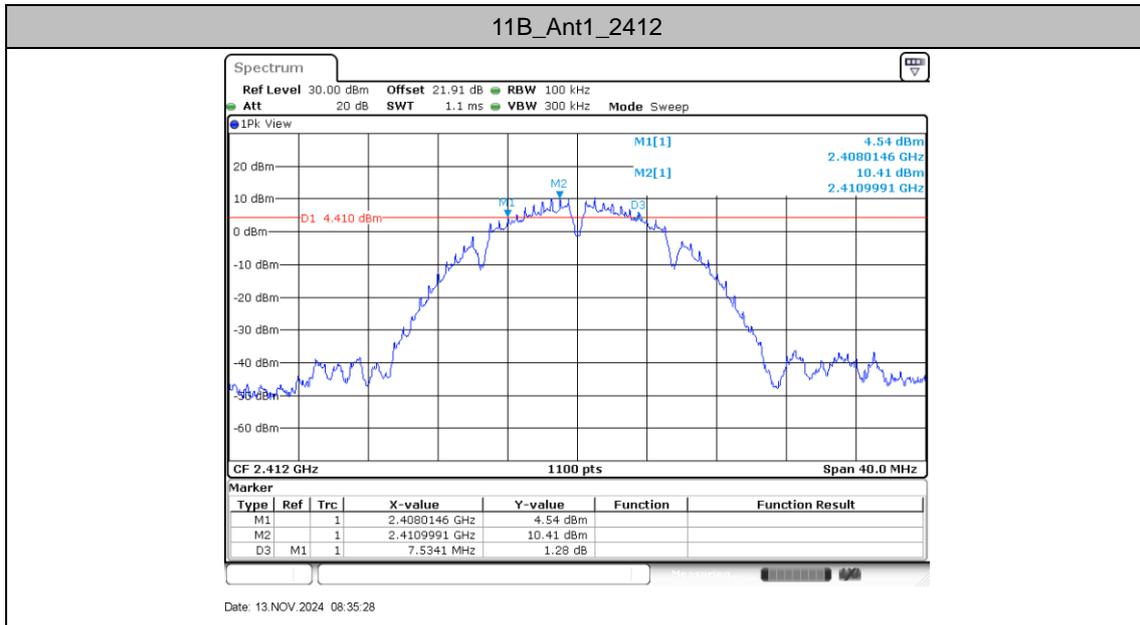


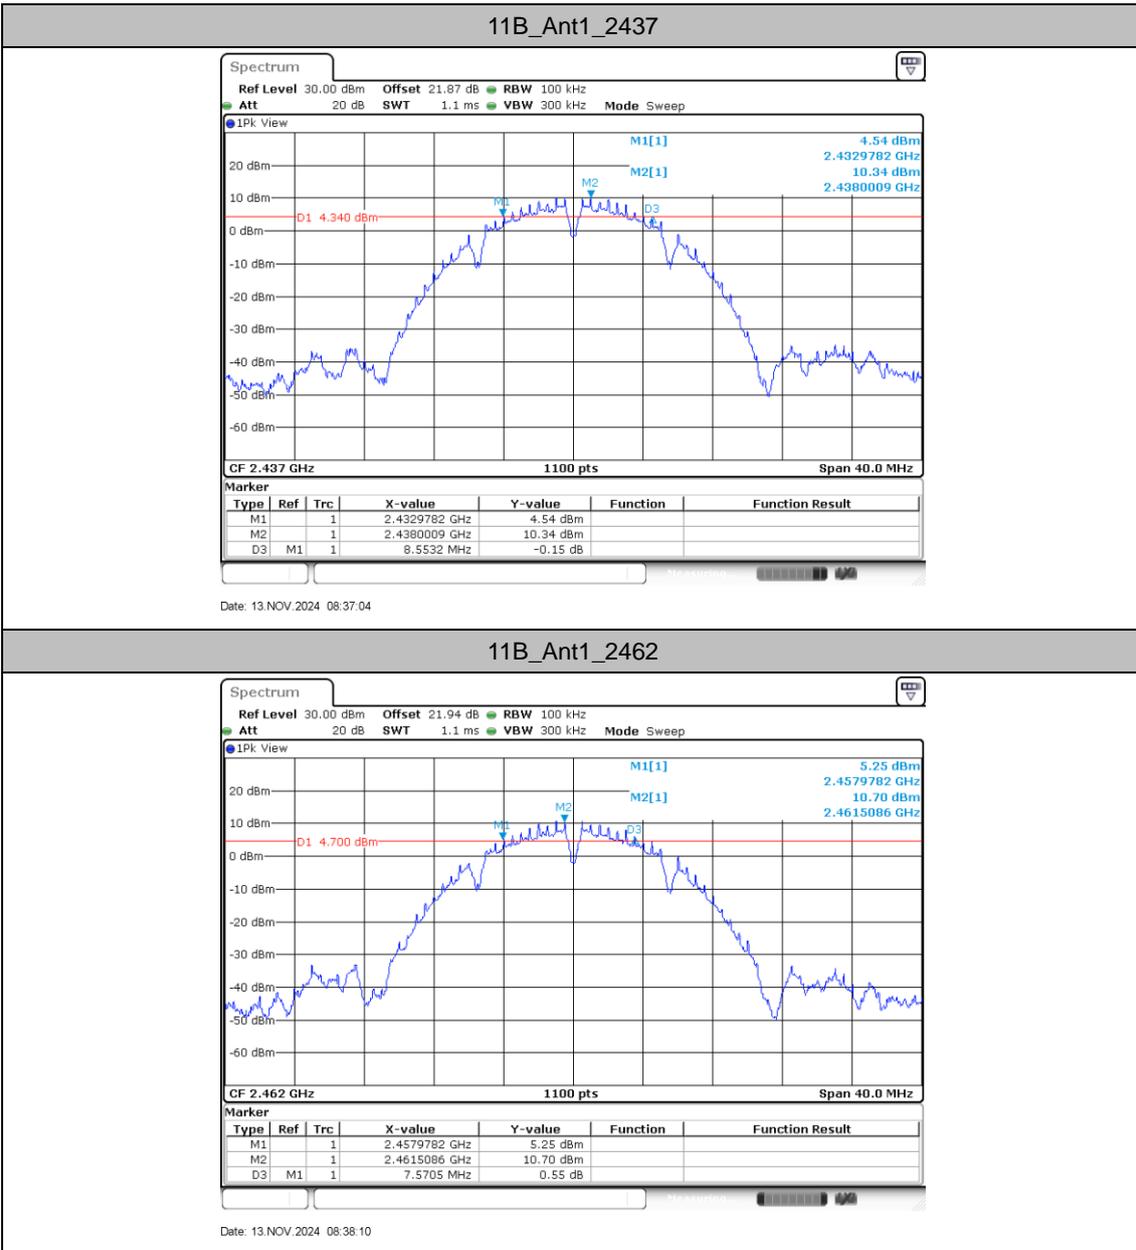

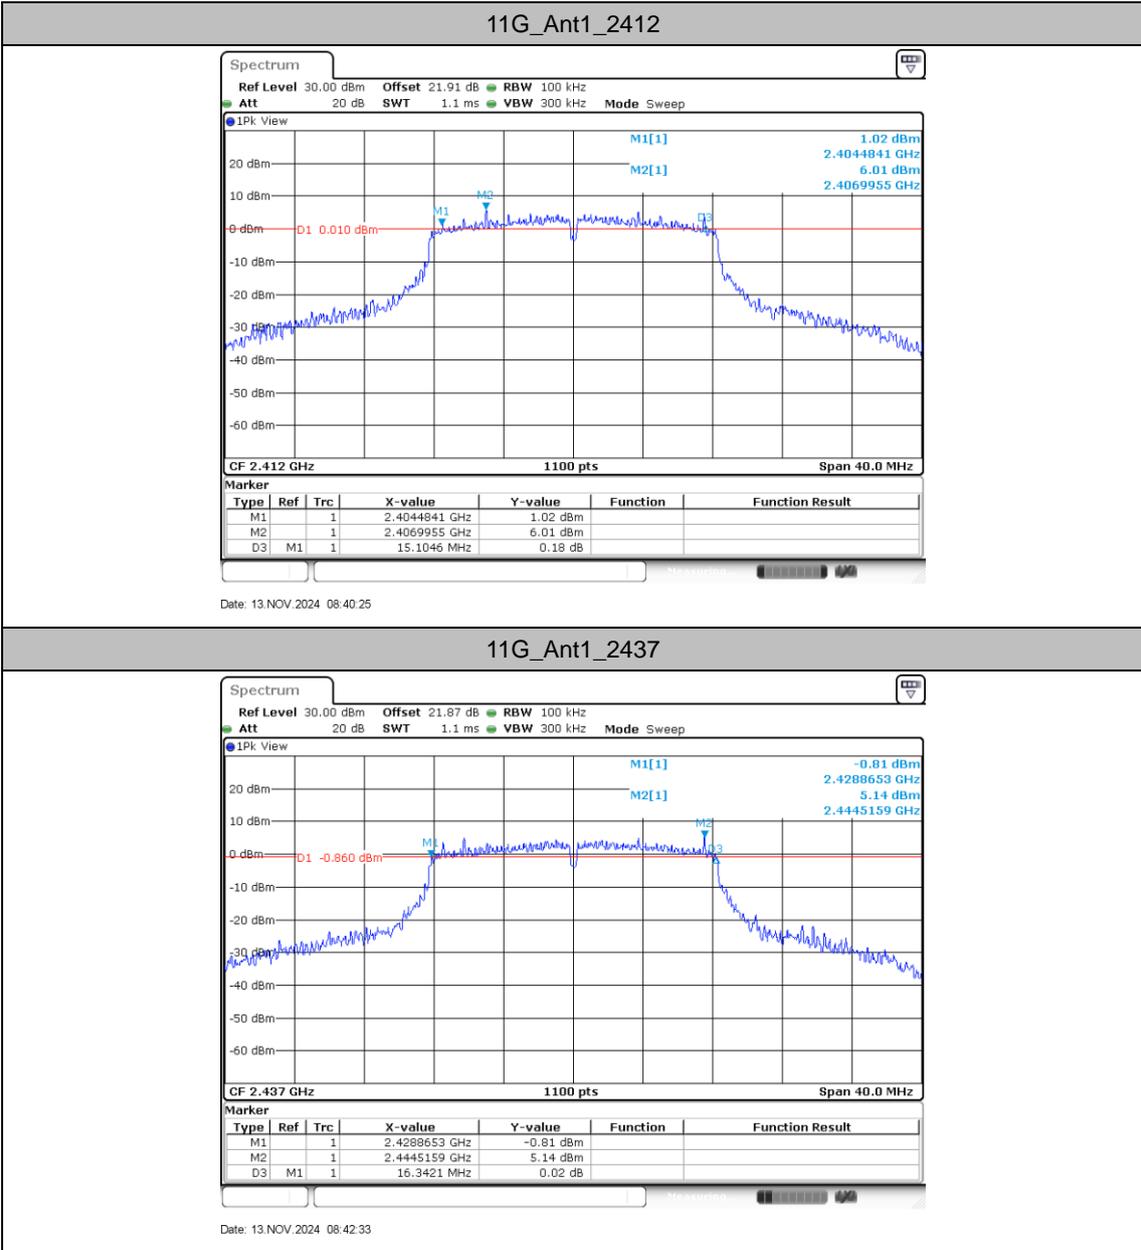




11G_Ant1_2462

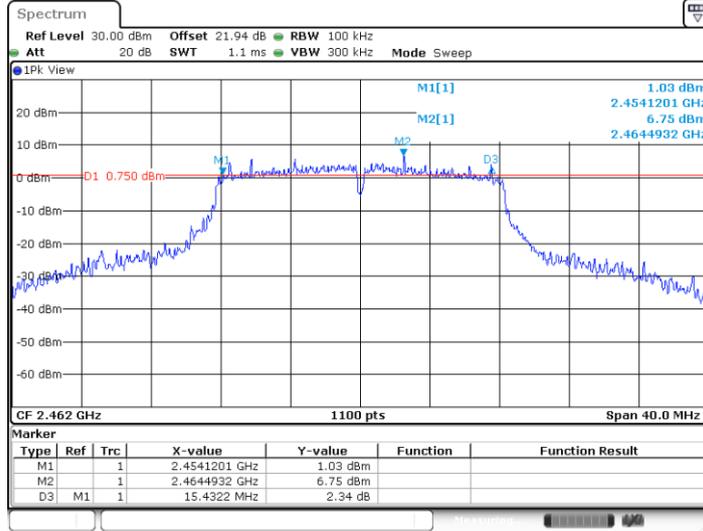

Date: 13 NOV. 2024 08:44:04


11N20SISO_Ant1_2412

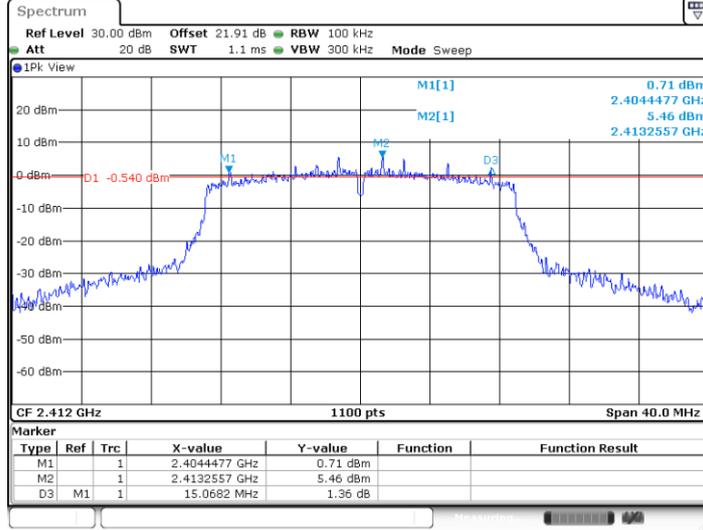

Date: 13 NOV. 2024 08:45:39




11N20SISO_Ant1_2437

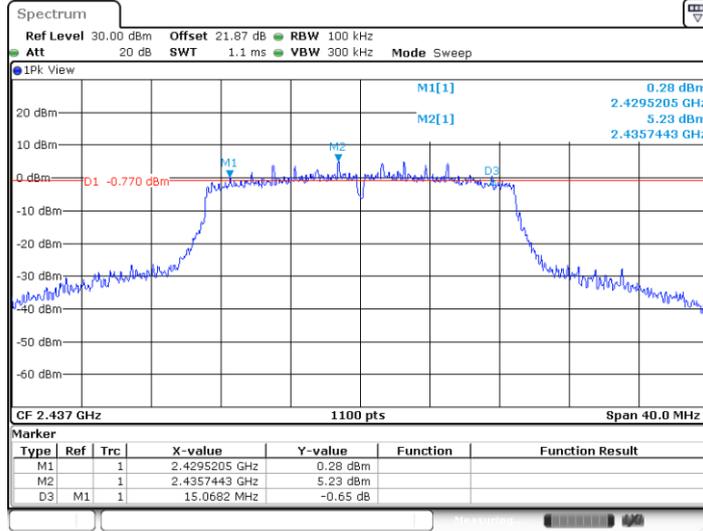

Date: 13 NOV, 2024 08:46:57

11N20SISO_Ant1_2462

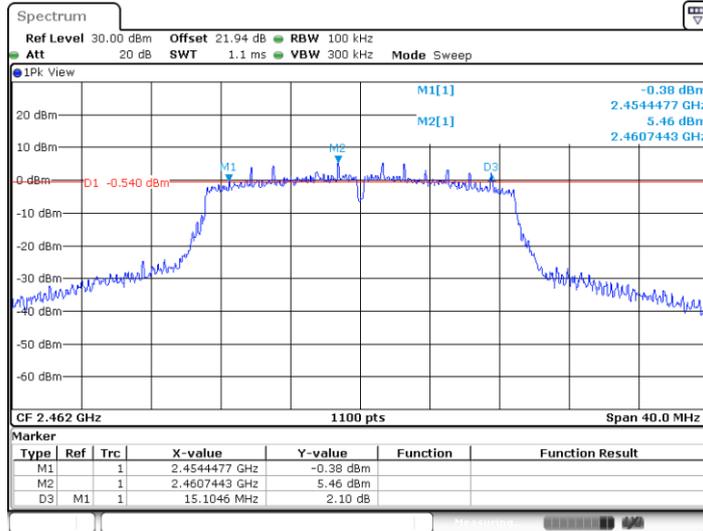

Date: 13 NOV, 2024 08:48:06





Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.055	2405.5091	2418.5636	---	---
		2417	13.091	2410.4000	2423.4909	---	---
		2437	13.127	2430.4727	2443.6000	---	---
		2462	13.273	2455.3273	2468.6000	---	---
11G	Ant1	2412	17.273	2403.3636	2420.6364	---	---
		2437	17.455	2428.3273	2445.7818	---	---
		2462	17.455	2453.1818	2470.6364	---	---
11N20SISO	Ant1	2412	18.109	2402.9636	2421.0727	---	---
		2437	18.182	2427.9636	2446.1455	---	---
		2462	18.218	2452.8182	2471.0364	---	---




Test Graphs

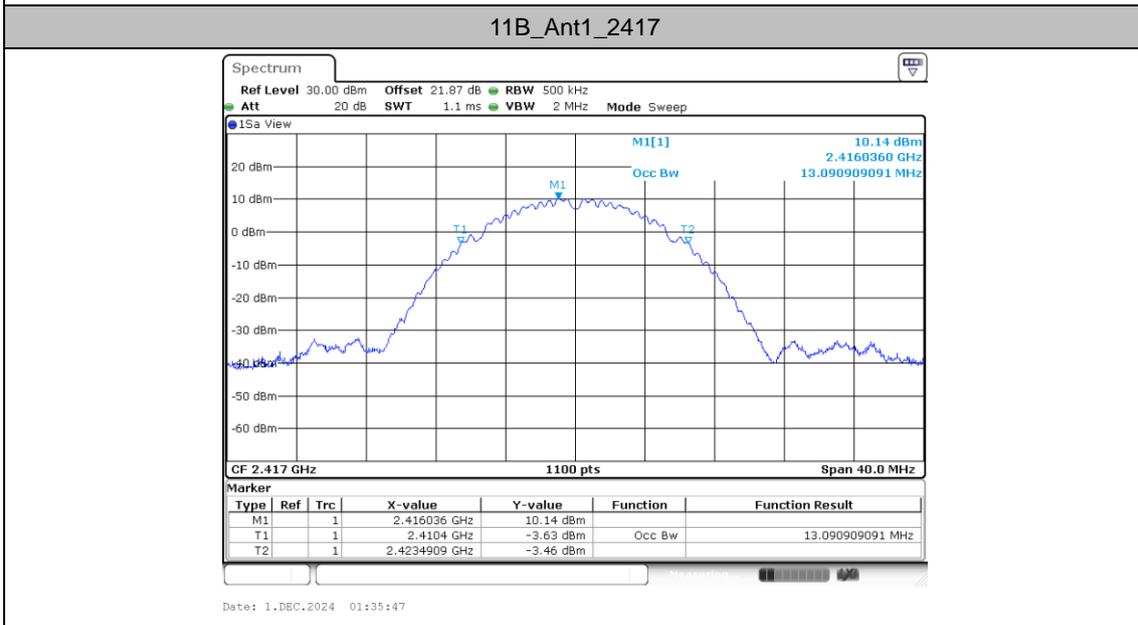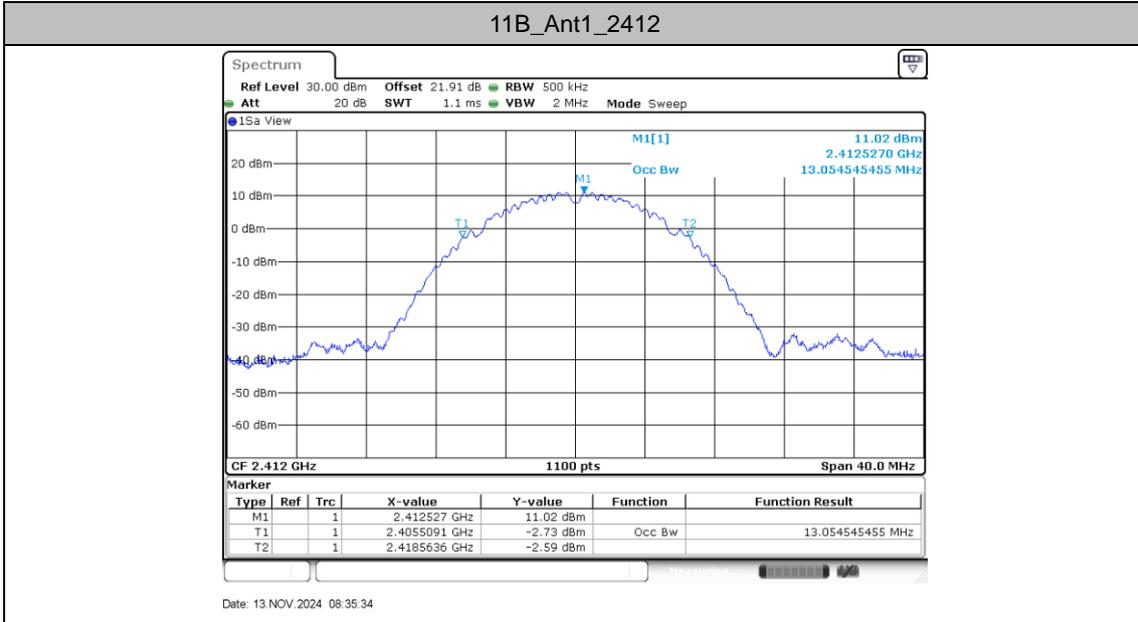

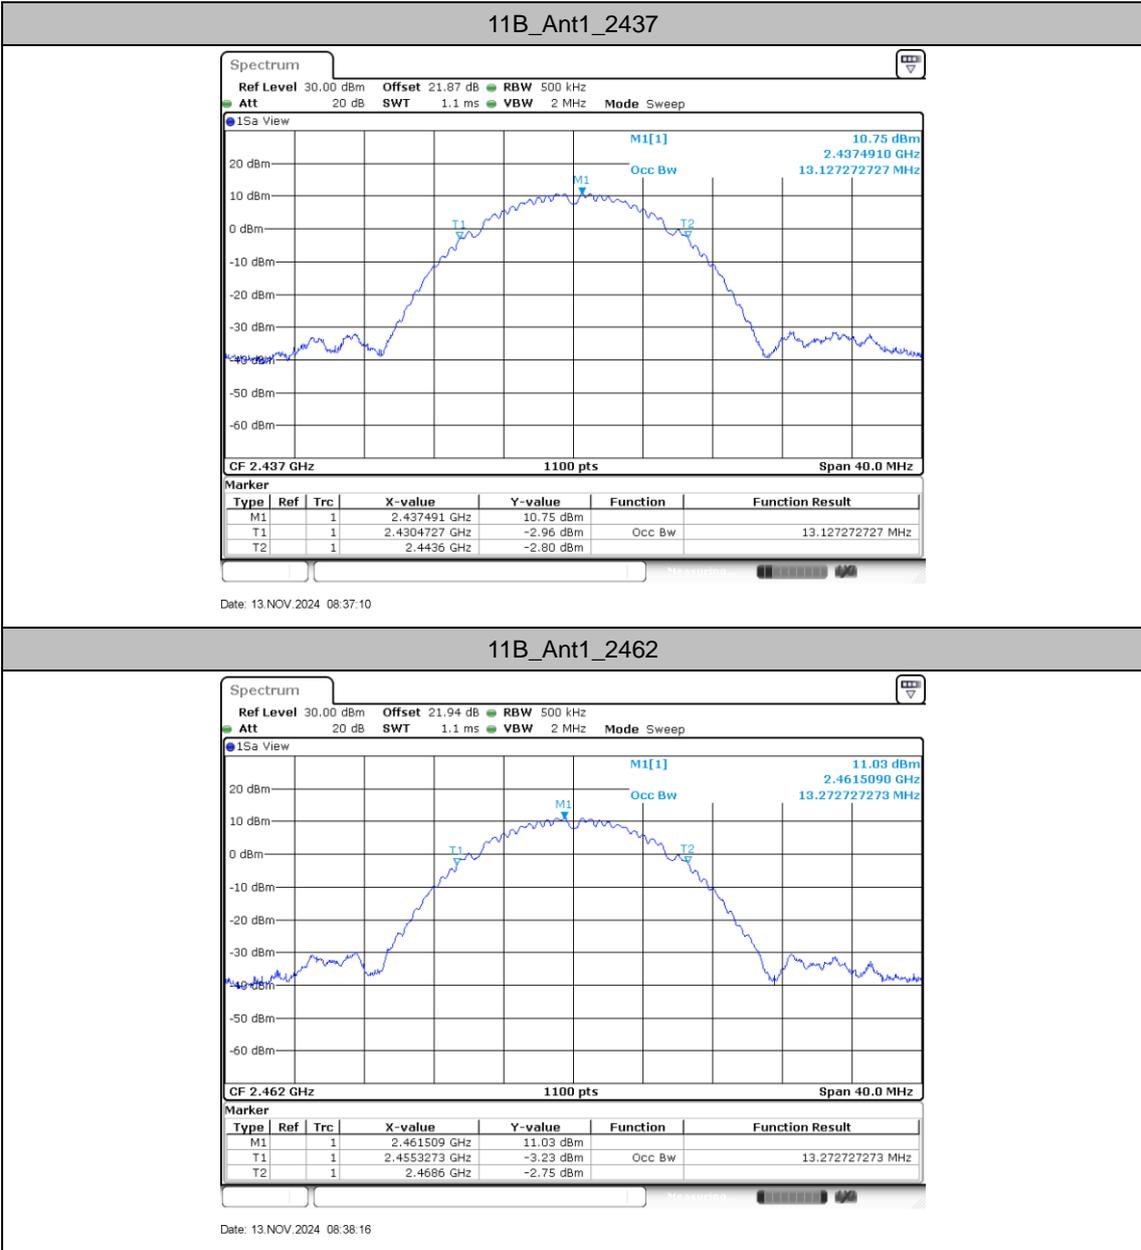




11G_Ant1_2412

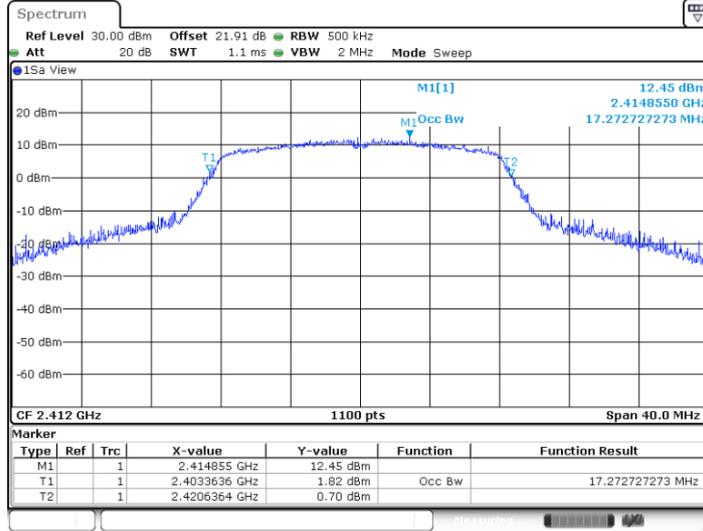

Date: 13 NOV. 2024 08:40:31


11G_Ant1_2437

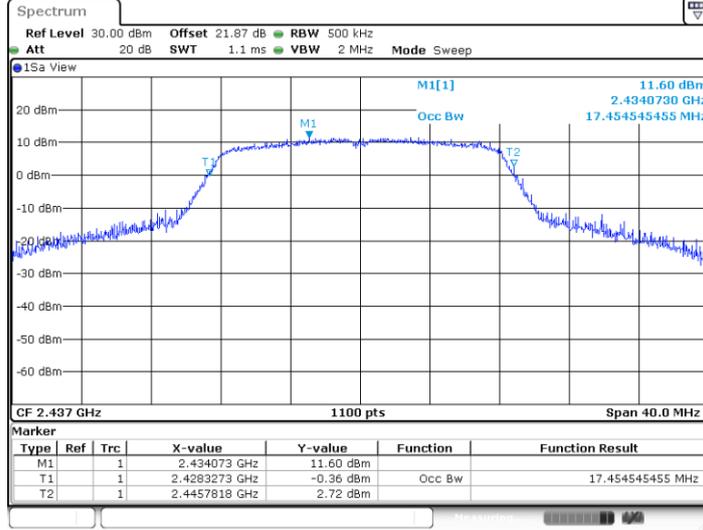

Date: 13 NOV. 2024 08:42:39




11G_Ant1_2462

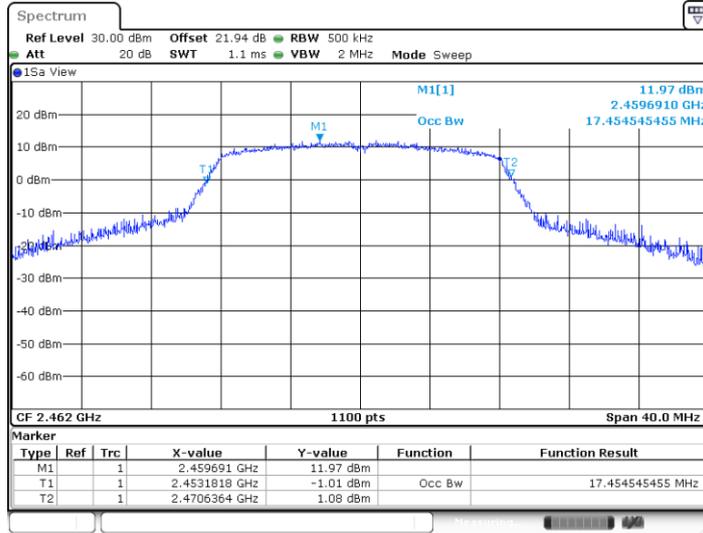

Date: 13 NOV. 2024 08:44:10


11N20SISO_Ant1_2412

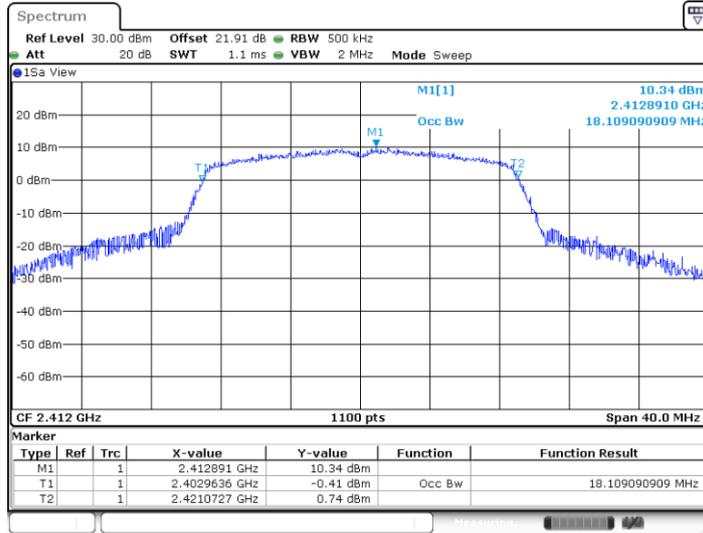

Date: 13 NOV. 2024 08:45:45




11N20SISO_Ant1_2437

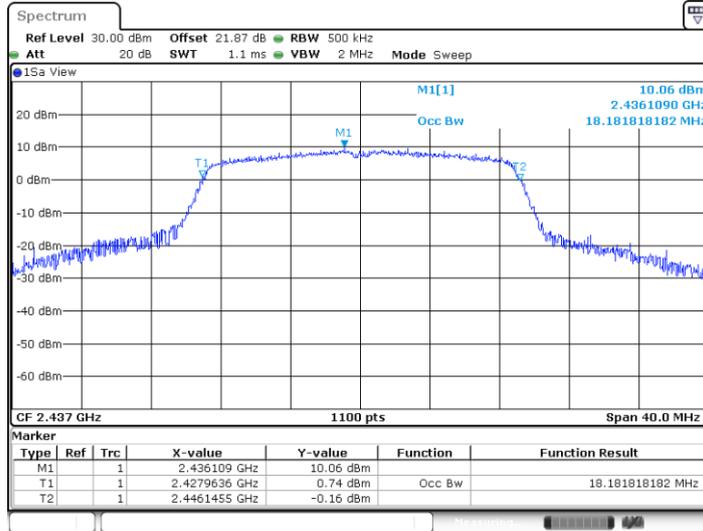

Date: 13 NOV, 2024 08:47:03

11N20SISO_Ant1_2462

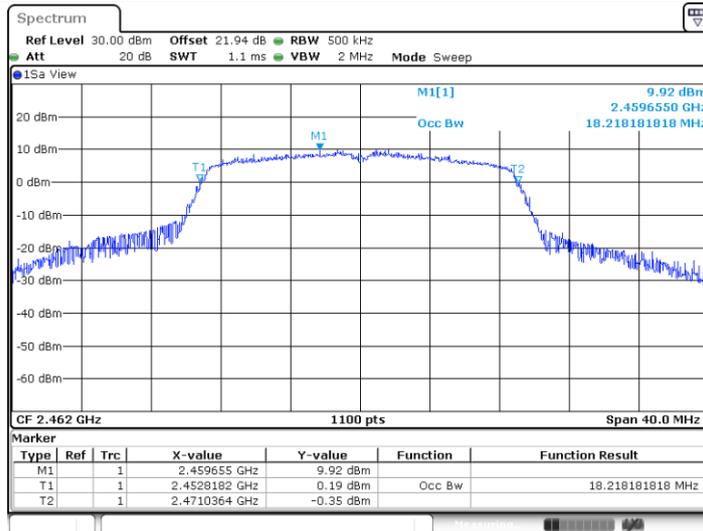

Date: 13 NOV, 2024 08:48:12





Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-3.48	≤8.00	PASS
		2417	-3.96	≤8.00	PASS
		2437	-6.53	≤8.00	PASS
		2462	-5.06	≤8.00	PASS
11G	Ant1	2412	-6.62	≤8.00	PASS
		2437	-6.21	≤8.00	PASS
		2462	-6.77	≤8.00	PASS
11N20SISO	Ant1	2412	-9.44	≤8.00	PASS
		2437	-9.75	≤8.00	PASS
		2462	-8.93	≤8.00	PASS




Test Graphs

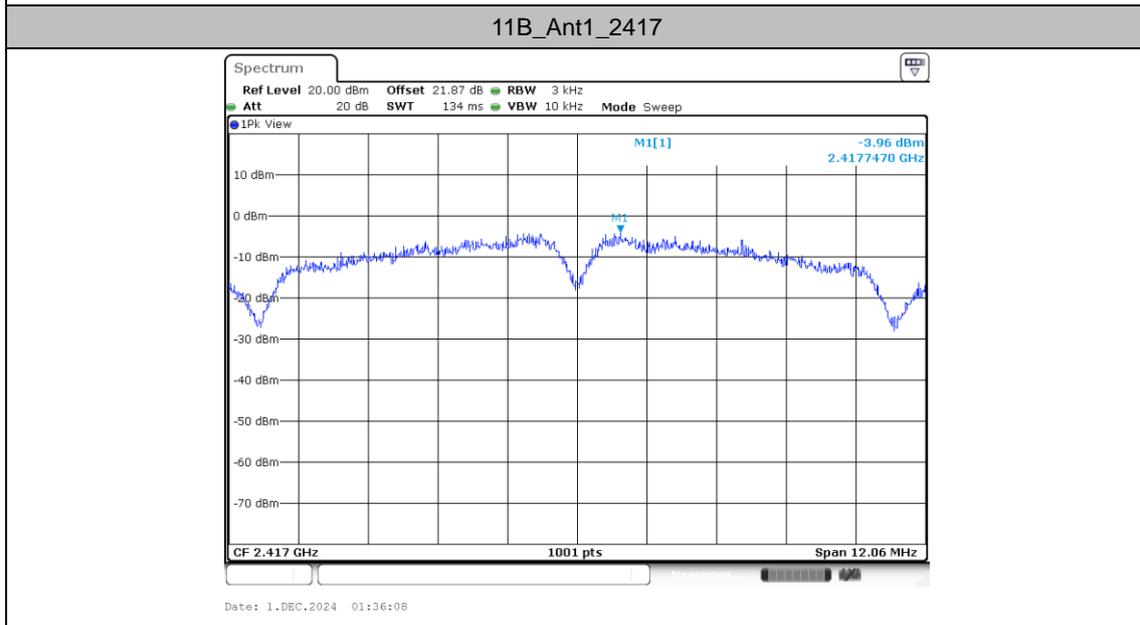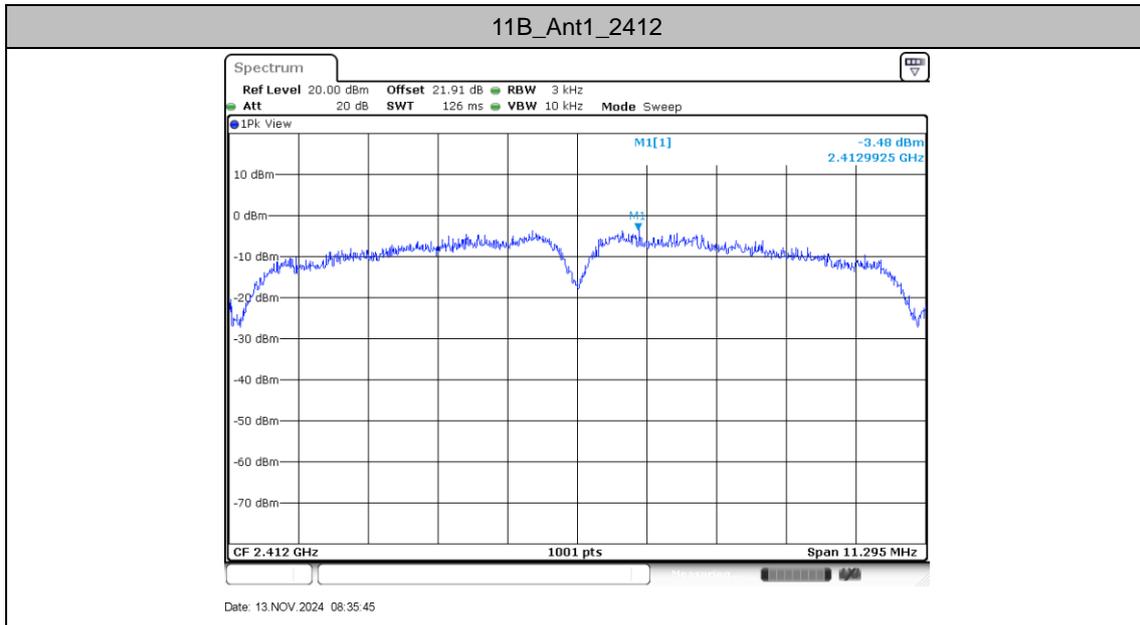




11B_Ant1_2437

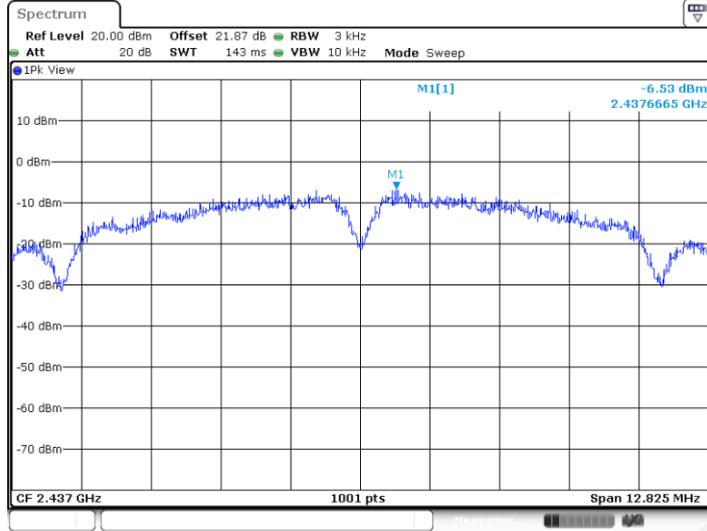


11B_Ant1_2462

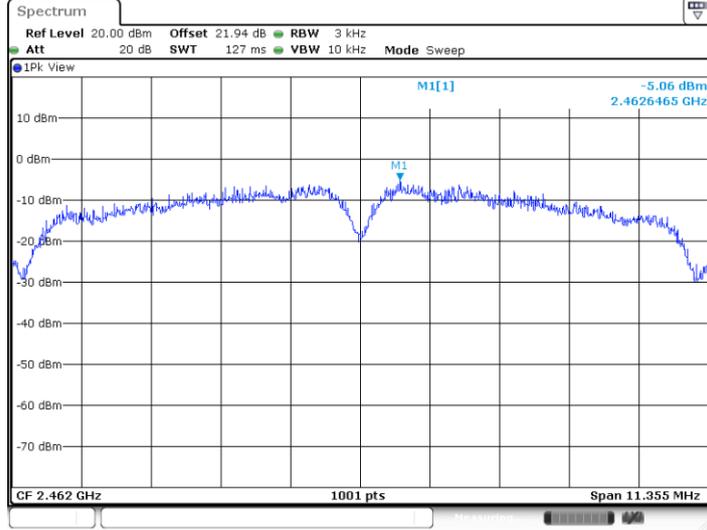




11G_Ant1_2412

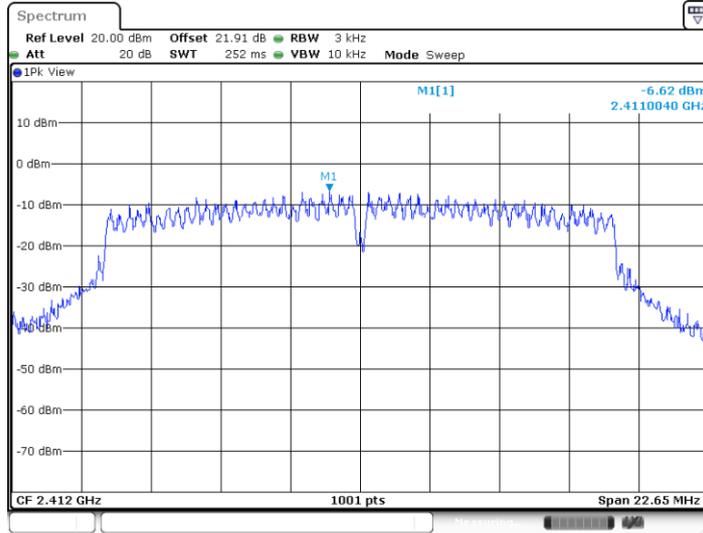

Date: 13 NOV. 2024 08:40:42


11G_Ant1_2437

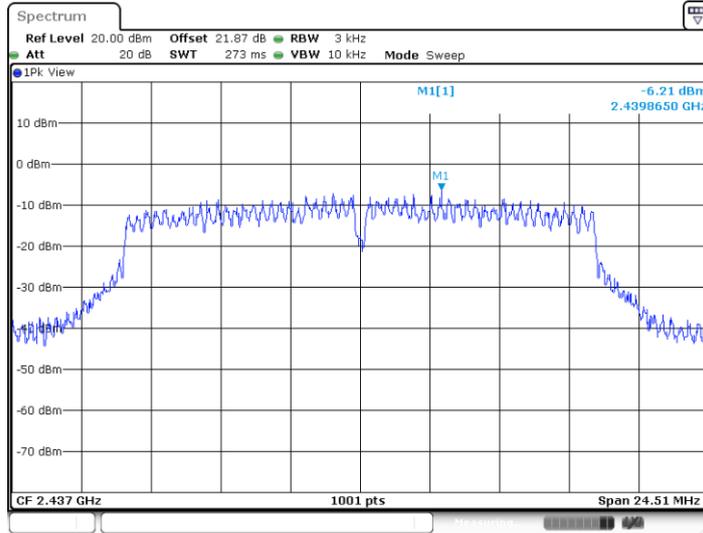

Date: 13 NOV. 2024 08:42:50




11G_Ant1_2462

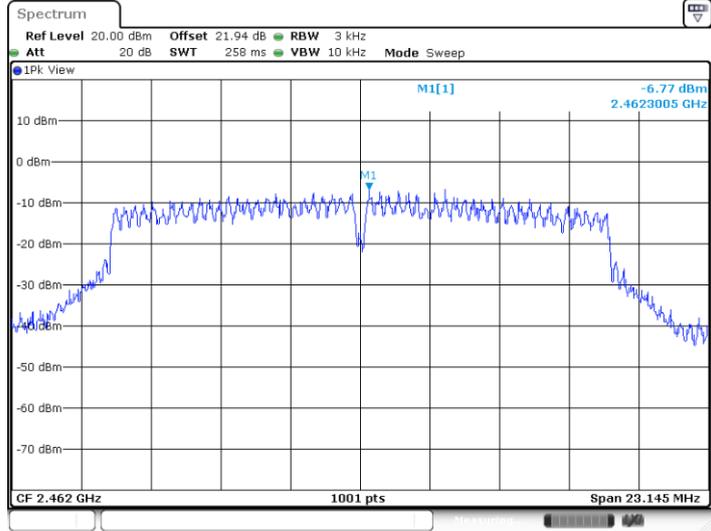

Date: 13 NOV. 2024 08:44:21


11N20SISO_Ant1_2412

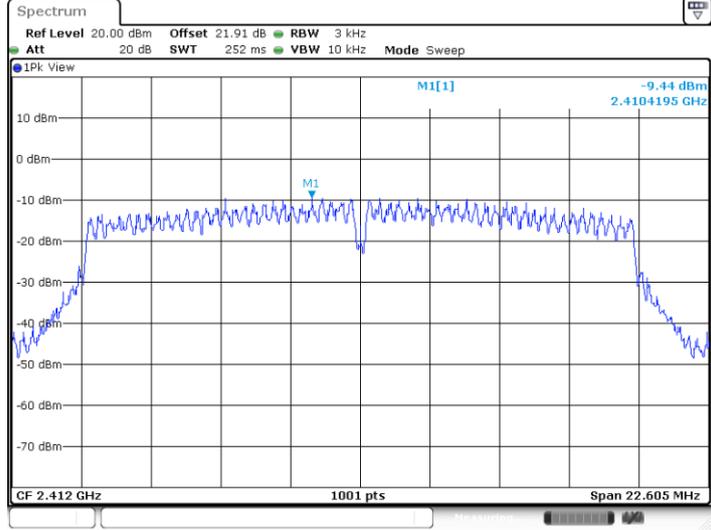

Date: 13 NOV. 2024 08:45:56




11N20SISO_Ant1_2437

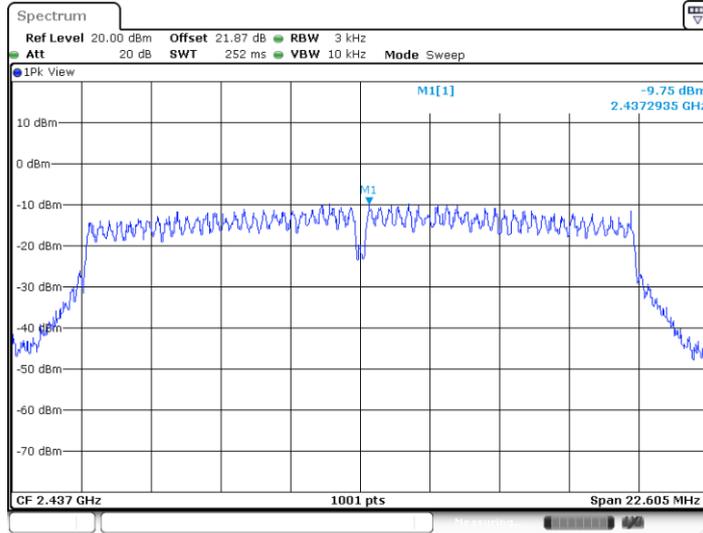

Date: 13 NOV. 2024 08:47:14

11N20SISO_Ant1_2462

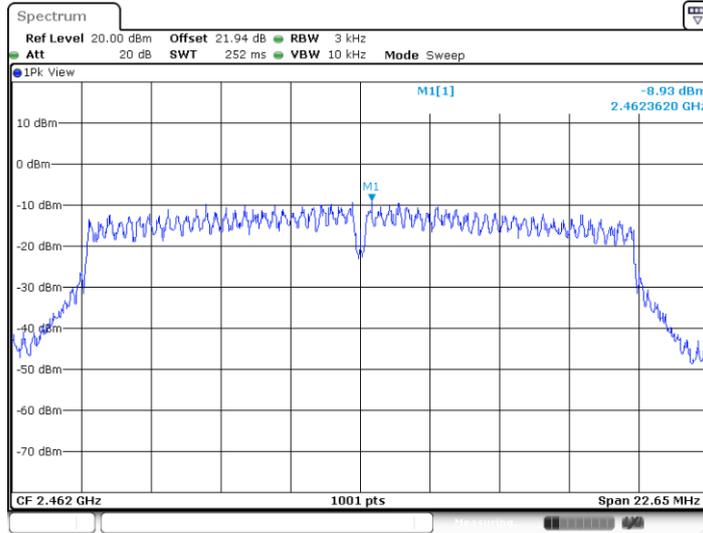

Date: 13 NOV. 2024 08:48:23





Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
11B	Ant1	2412	2412.51	10.89
		2417	2415.99	10.38
		2437	2436.00	10.59
		2462	2462.51	10.25
11G	Ant1	2412	2410.75	7.45
		2437	2435.76	7.09
		2462	2460.76	7.30
11N20SISO	Ant1	2412	2413.24	5.30
		2437	2435.72	5.09
		2462	2460.72	5.17




Test Graphs

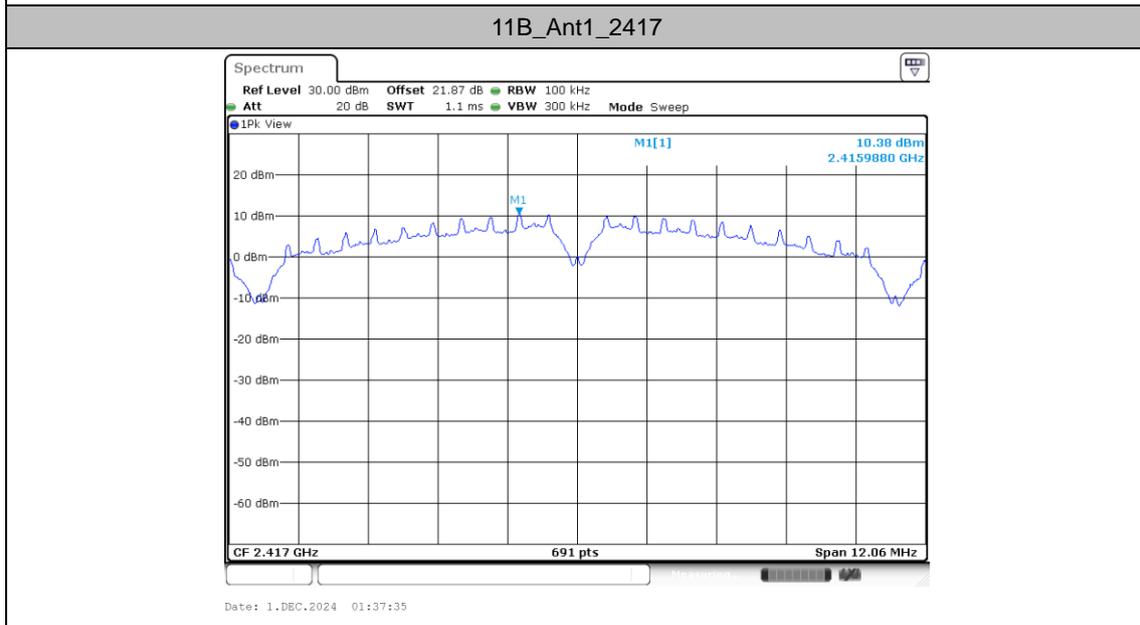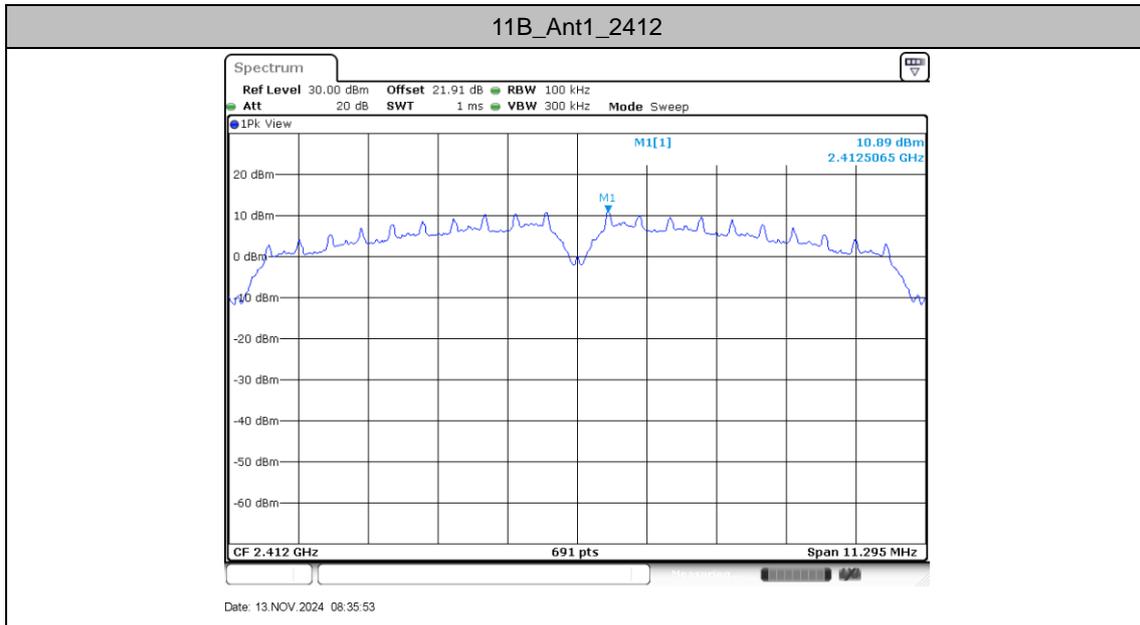




11B_Ant1_2437

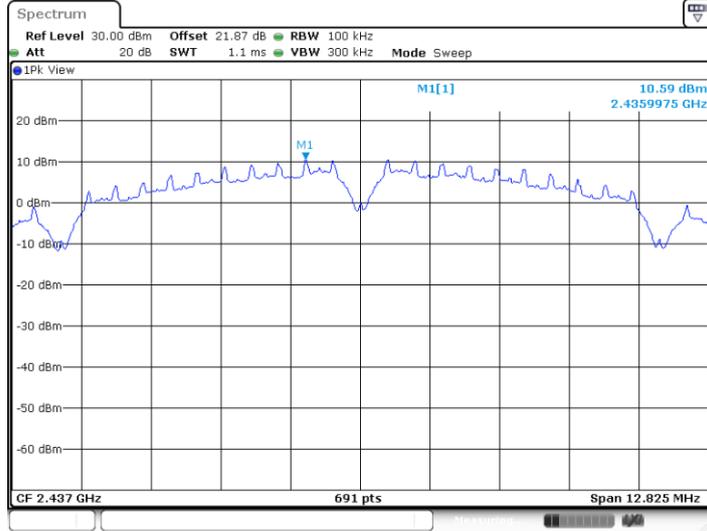

Date: 13 NOV. 2024 08:37:28


11B_Ant1_2462

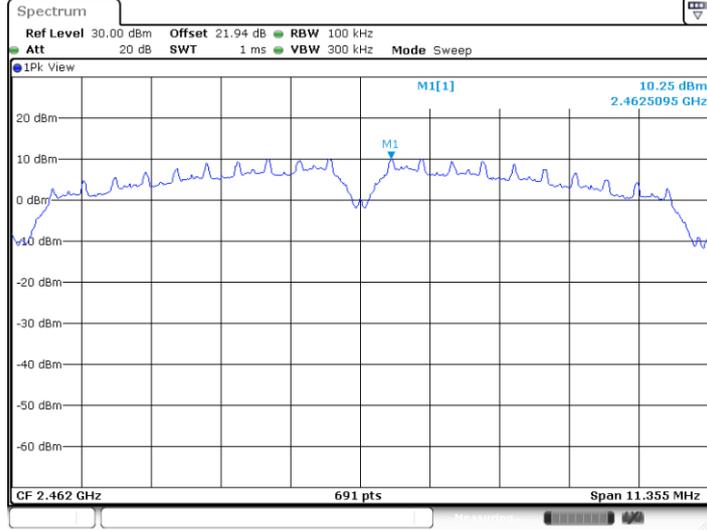

Date: 13 NOV. 2024 08:38:34




11G_Ant1_2412

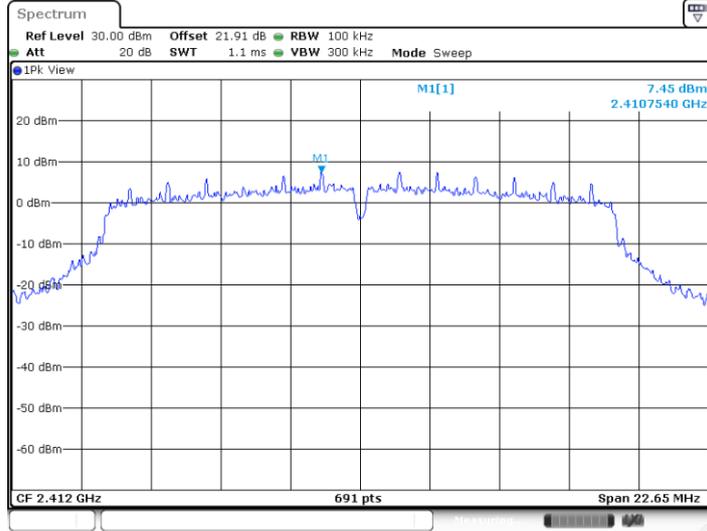

Date: 13 NOV. 2024 08:40:49


11G_Ant1_2437

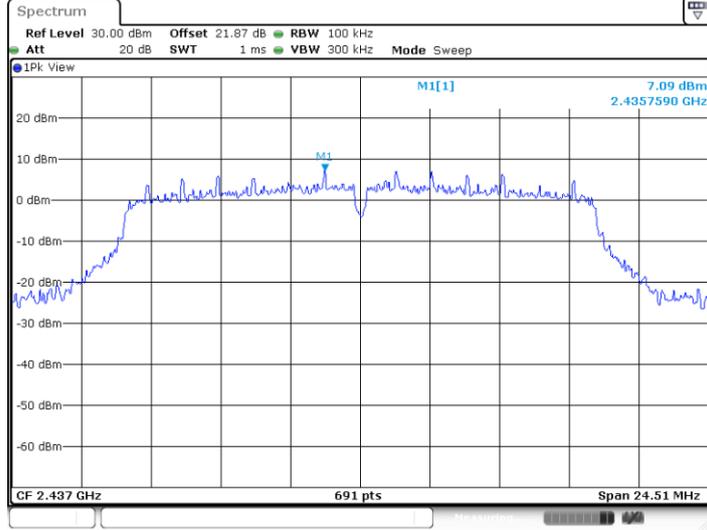

Date: 13 NOV. 2024 08:42:57




11G_Ant1_2462

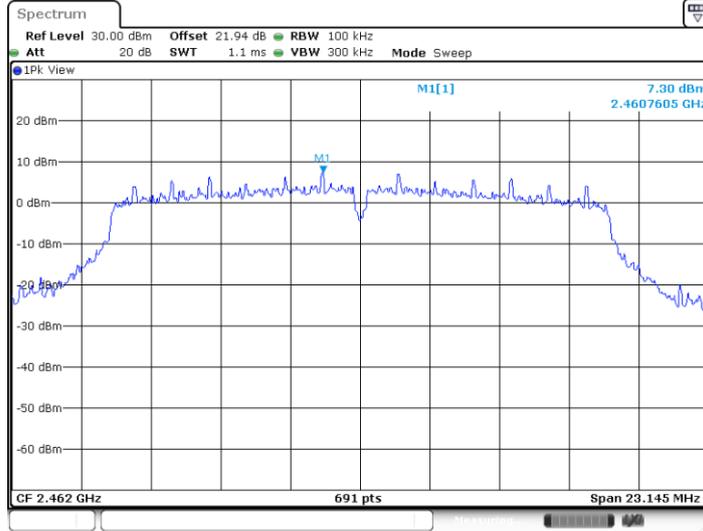

Date: 13 NOV. 2024 08:44:28


11N20SISO_Ant1_2412

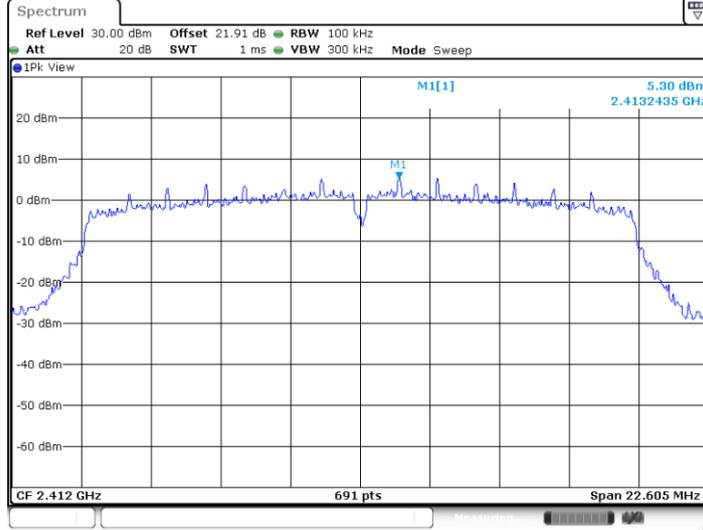

Date: 13 NOV. 2024 08:46:03




11N20SISO_Ant1_2437

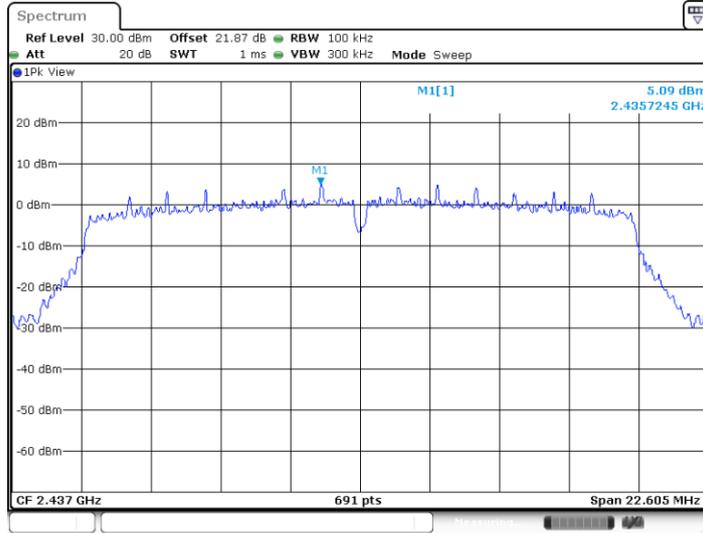

Date: 13 NOV. 2024 08:47:21

11N20SISO_Ant1_2462

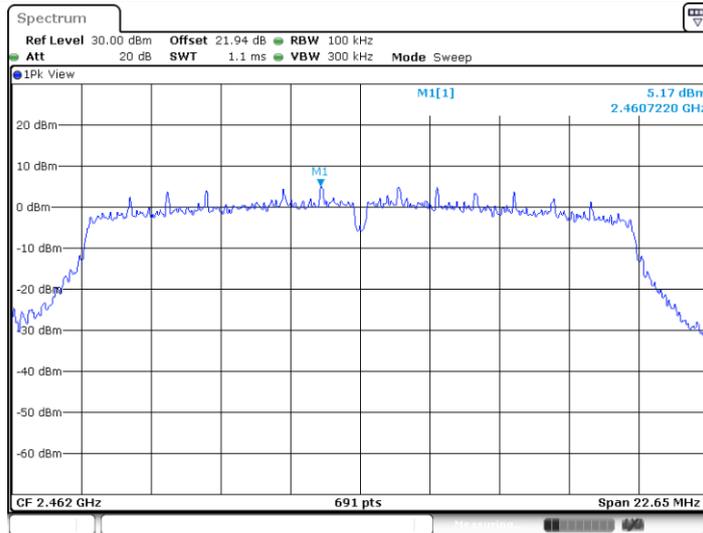

Date: 13 NOV. 2024 08:48:30





Band edge measurements

Test Result

Test Mode	Antenna	ChName	Freq (MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
11B	Ant1	Low	2412	10.89	-37.98	≤-9.11	PASS
			2417	10.38	-43.42	≤-9.62	PASS
		High	2462	10.25	-44.87	≤-9.75	PASS
11G	Ant1	Low	2412	7.45	-22.17	≤-12.55	PASS
		High	2462	7.30	-36.15	≤-12.7	PASS
11N20 SISO	Ant1	Low	2412	5.30	-25.71	≤-14.7	PASS
		High	2462	5.17	-40.2	≤-14.83	PASS




Test Graphs

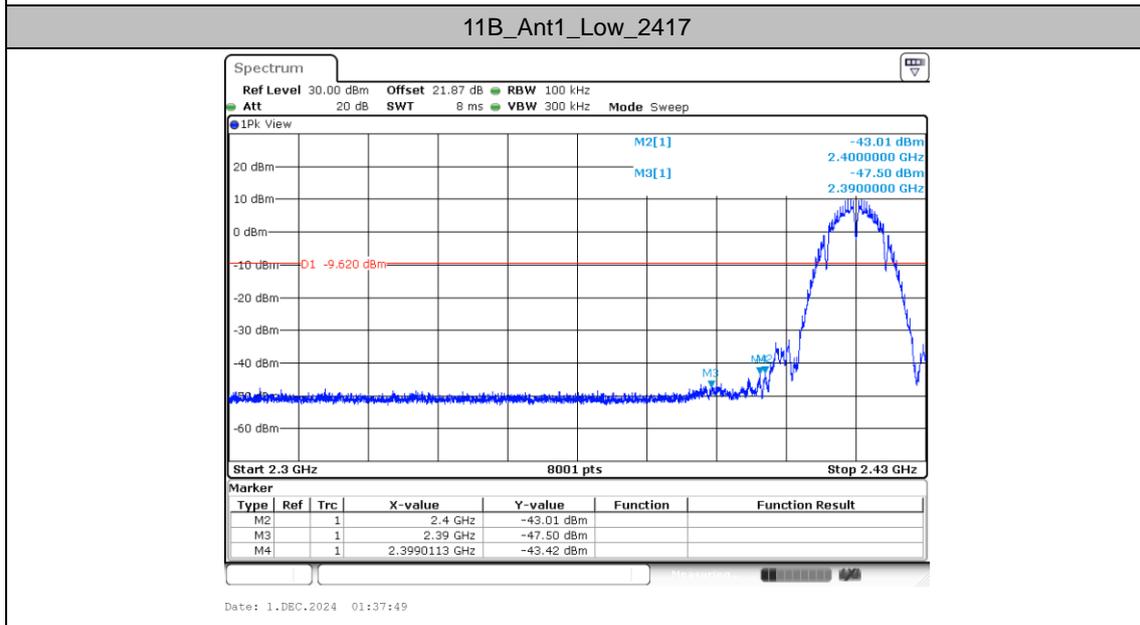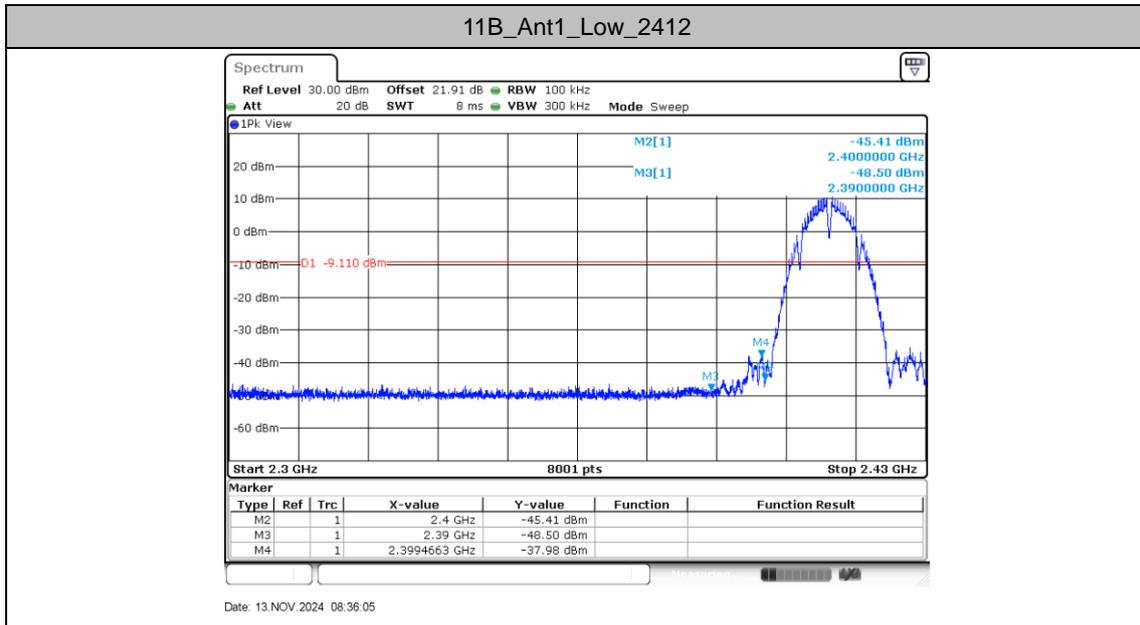




11B_Ant1_High_2462

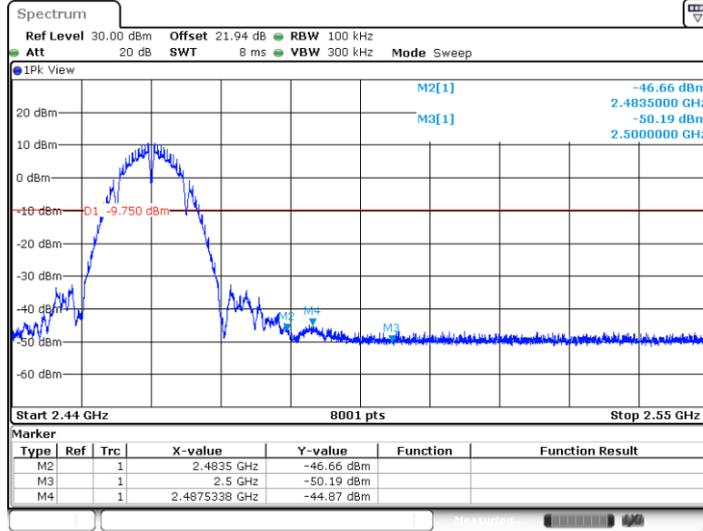

Date: 13 NOV, 2024 08:38:47


11G_Ant1_Low_2412

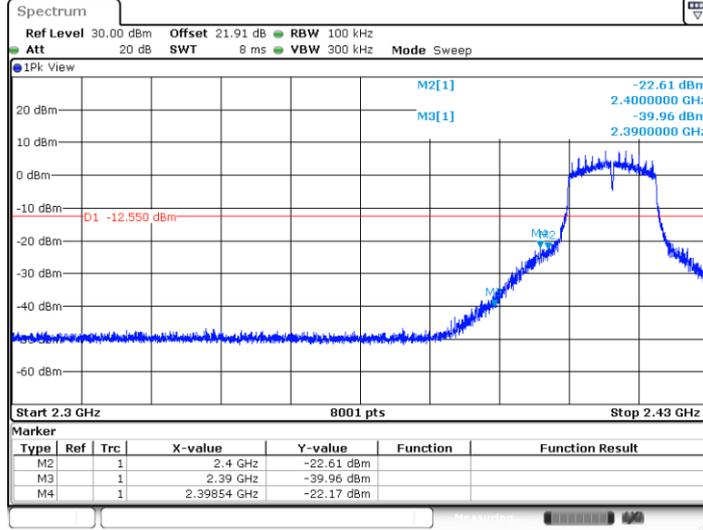


Date: 13 NOV, 2024 08:41:01




11G_Ant1_High_2462

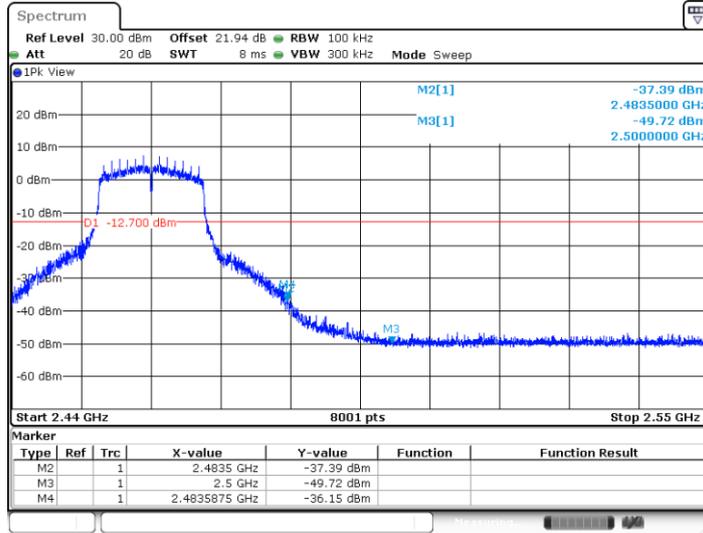

11N20SISO_Ant1_Low_2412

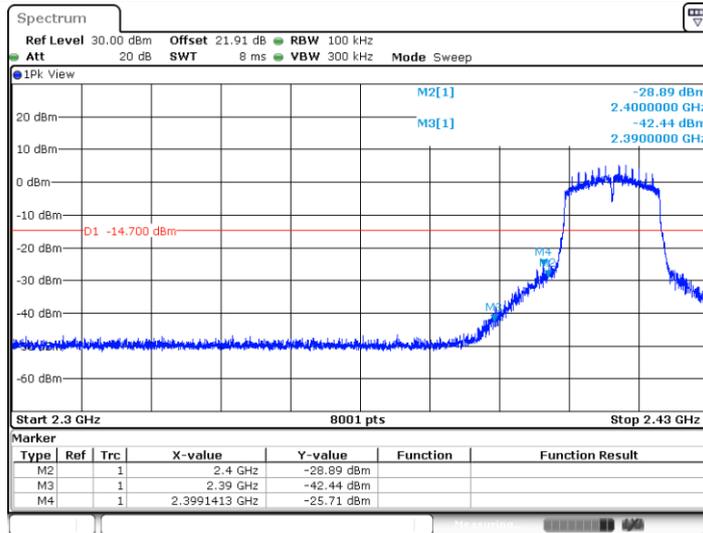

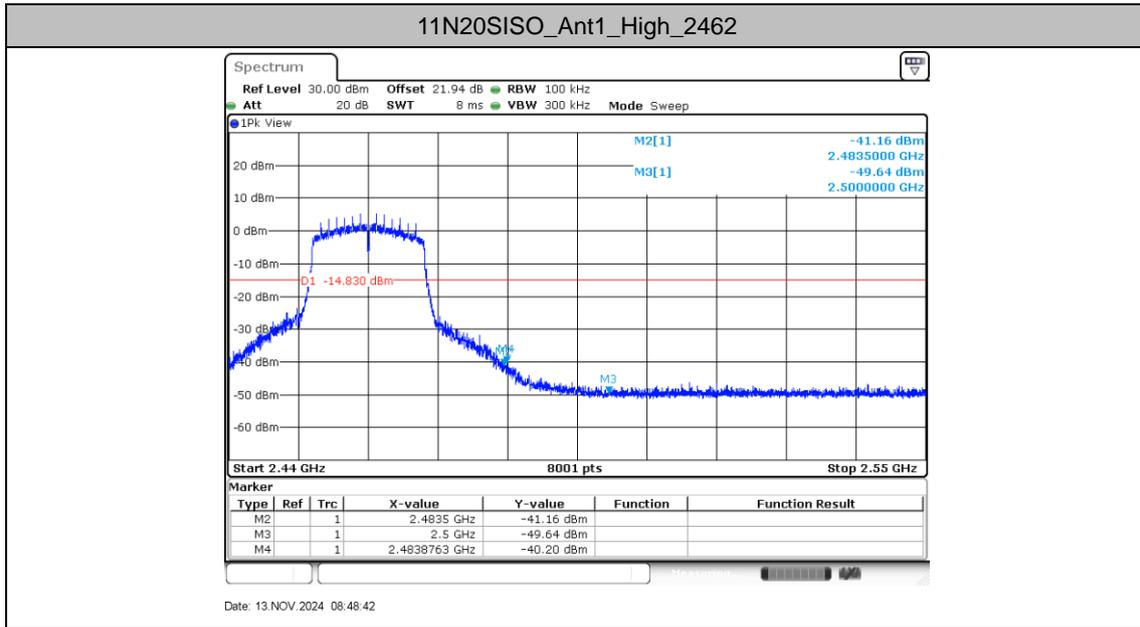





Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B	Ant1	2412	30~1000	10.89	-55.95	≤-9.11	PASS
			1000~26500	10.89	-40.09	≤-9.11	PASS
		2417	30~1000	10.38	-57.53	≤-9.62	PASS
			1000~26500	10.38	-40.86	≤-9.62	PASS
		2437	30~1000	10.59	-56.52	≤-9.41	PASS
			1000~26500	10.59	-40.43	≤-9.41	PASS
2462	30~1000	10.25	-56.04	≤-9.75	PASS		
	1000~26500	10.25	-40.89	≤-9.75	PASS		
11G	Ant1	2412	30~1000	7.45	-56.11	≤-12.55	PASS
			1000~26500	7.45	-51.04	≤-12.55	PASS
		2437	30~1000	7.09	-55.71	≤-12.91	PASS
			1000~26500	7.09	-51.01	≤-12.91	PASS
		2462	30~1000	7.30	-56.44	≤-12.7	PASS
			1000~26500	7.30	-51.01	≤-12.7	PASS
11N20SISO	Ant1	2412	30~1000	5.30	-56.73	≤-14.7	PASS
			1000~26500	5.30	-50.53	≤-14.7	PASS
		2437	30~1000	5.09	-55.59	≤-14.91	PASS
			1000~26500	5.09	-51.29	≤-14.91	PASS
		2462	30~1000	5.17	-56.11	≤-14.83	PASS
			1000~26500	5.17	-51.47	≤-14.83	PASS




Test Graphs

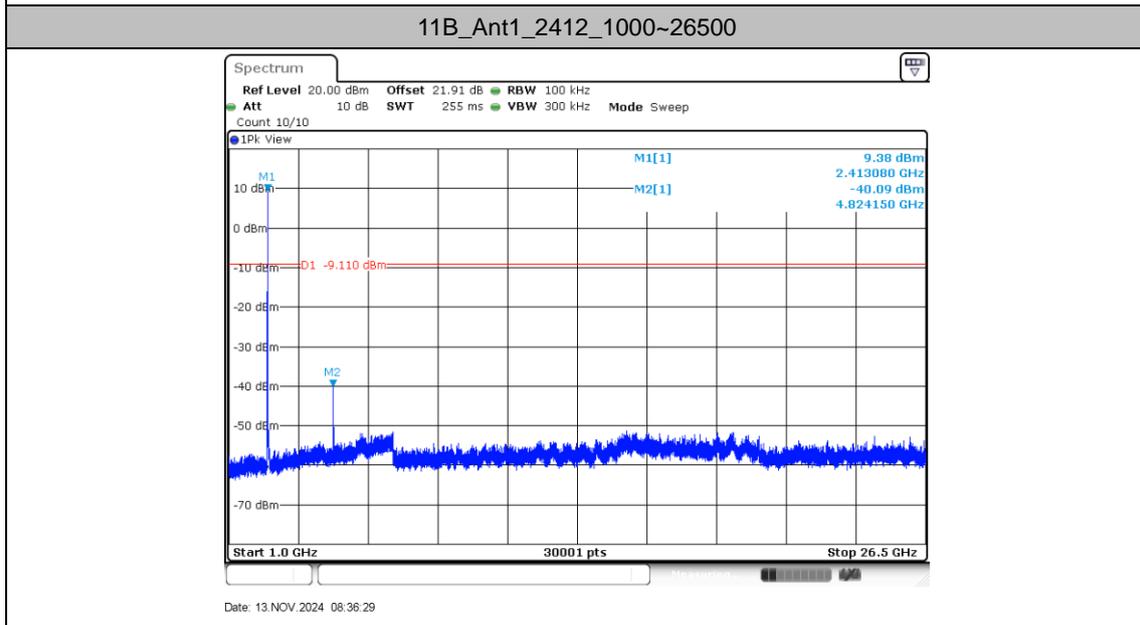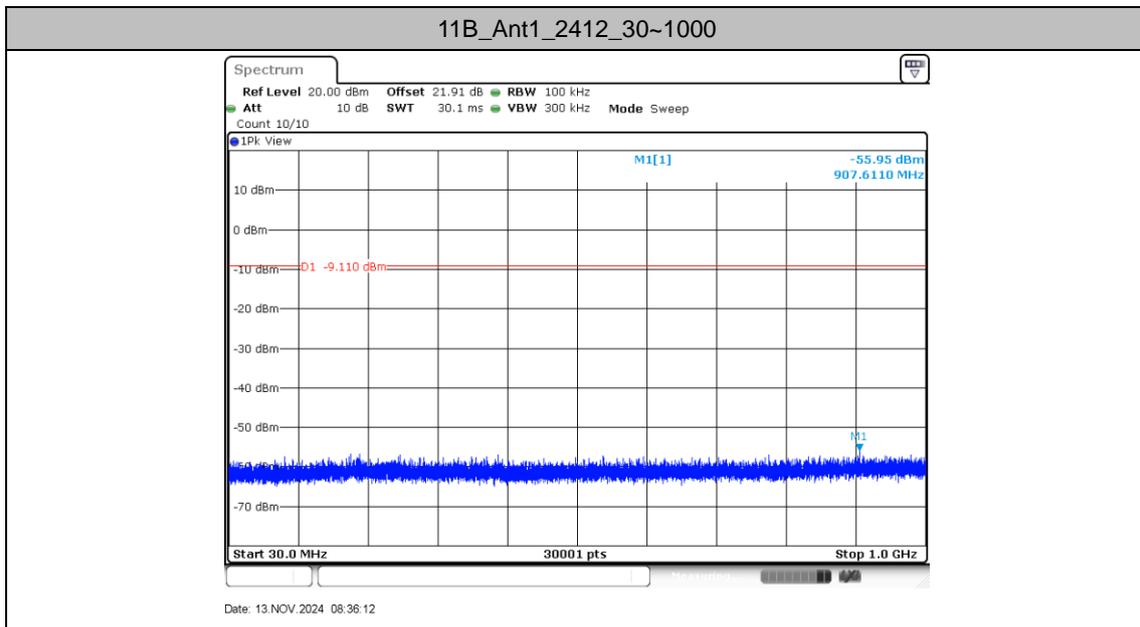




11B_Ant1_2417_30~1000

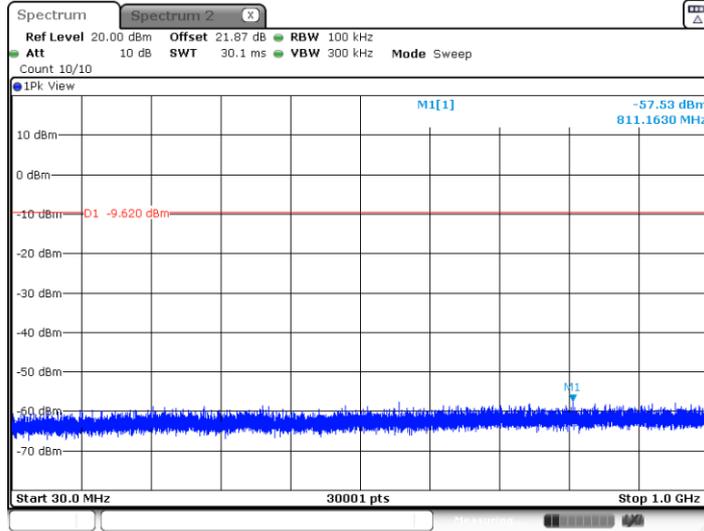

Date: 3.DEC.2024 02:16:22


11B_Ant1_2417_1000~26500

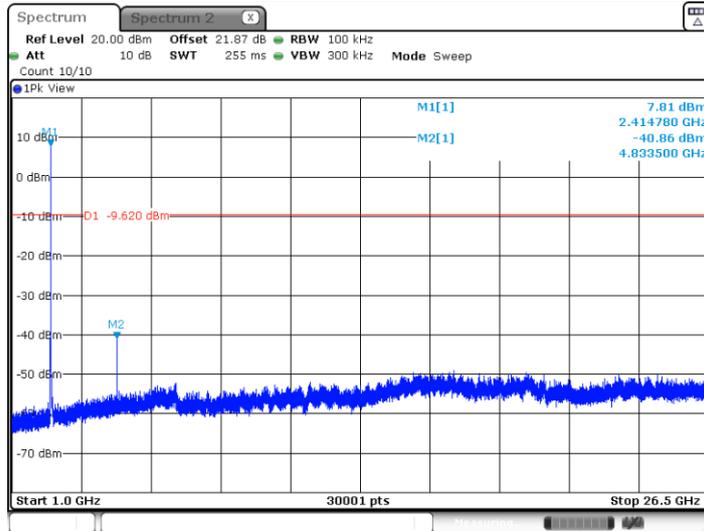

Date: 3.DEC.2024 02:16:40




11B_Ant1_2437_30~1000

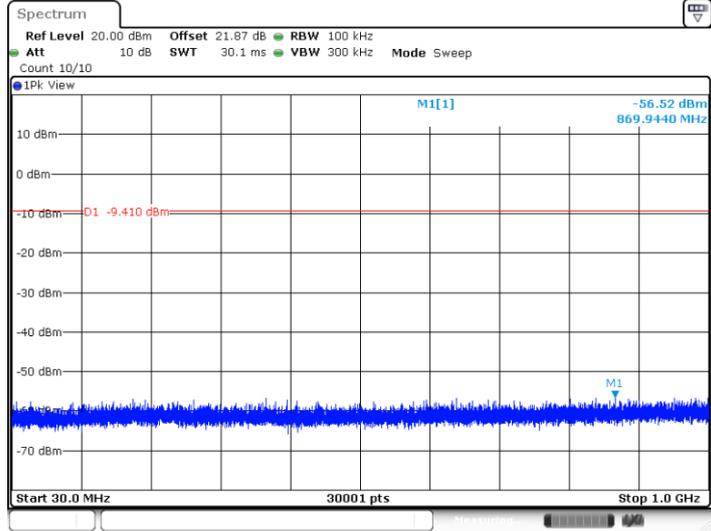

Date: 13 NOV. 2024 08:37:33


11B_Ant1_2437_1000~26500

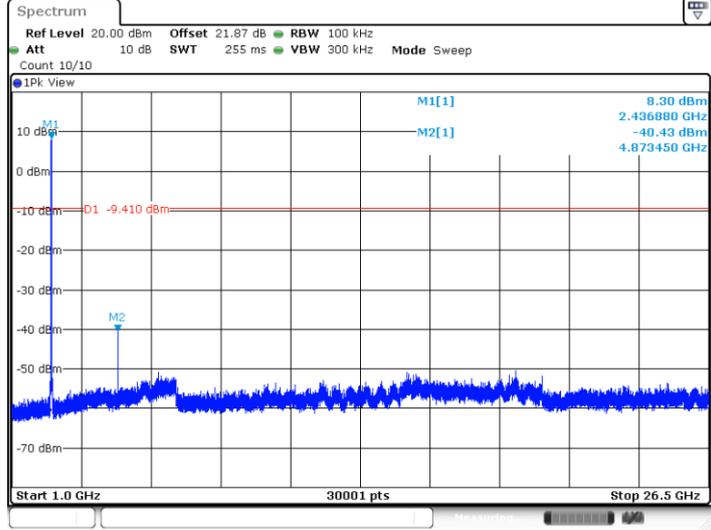

Date: 13 NOV. 2024 08:37:50




11B_Ant1_2462_30~1000

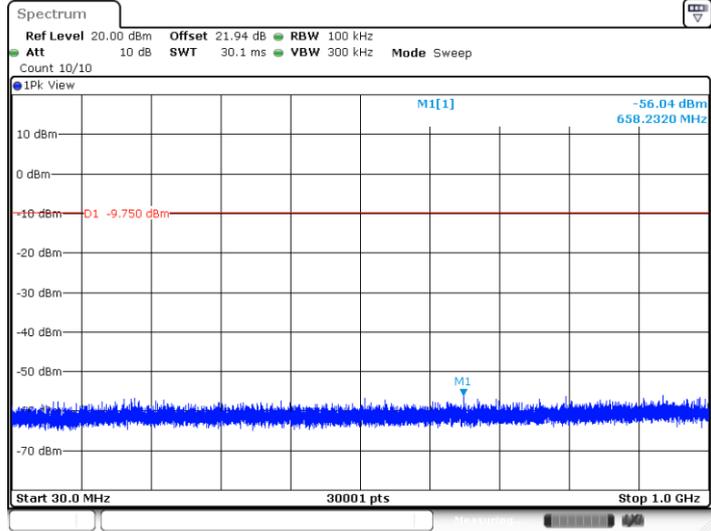

Date: 13 NOV. 2024 08:38:54


11B_Ant1_2462_1000~26500

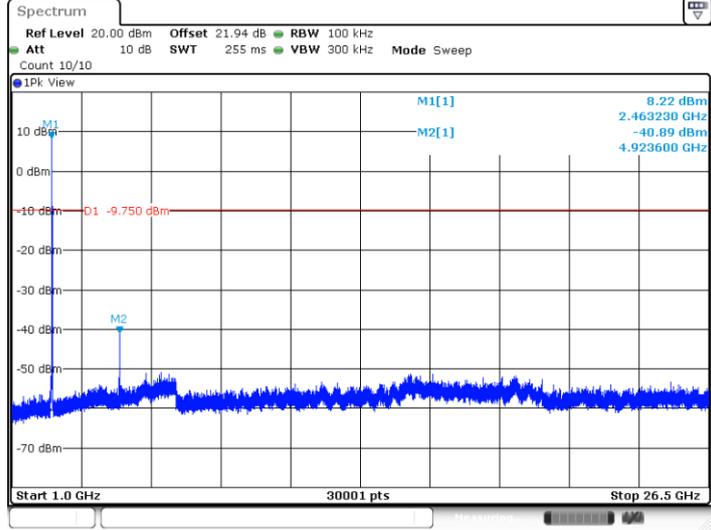

Date: 13 NOV. 2024 08:39:11




11G_Ant1_2412_30~1000

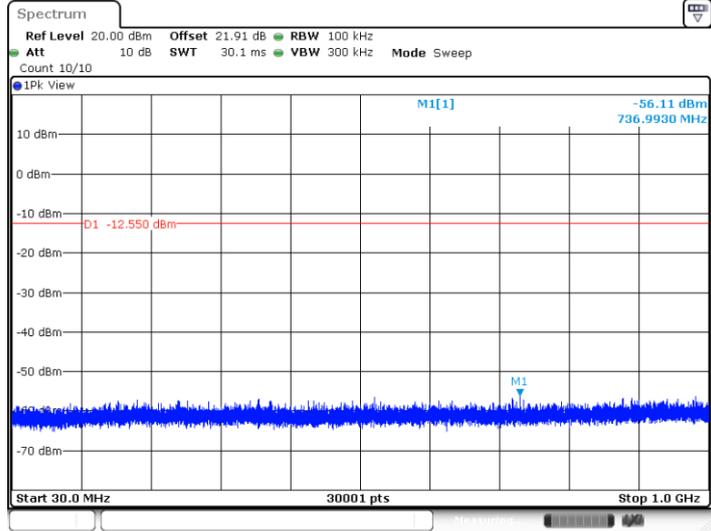

Date: 13 NOV. 2024 08:41:08


11G_Ant1_2412_1000~26500

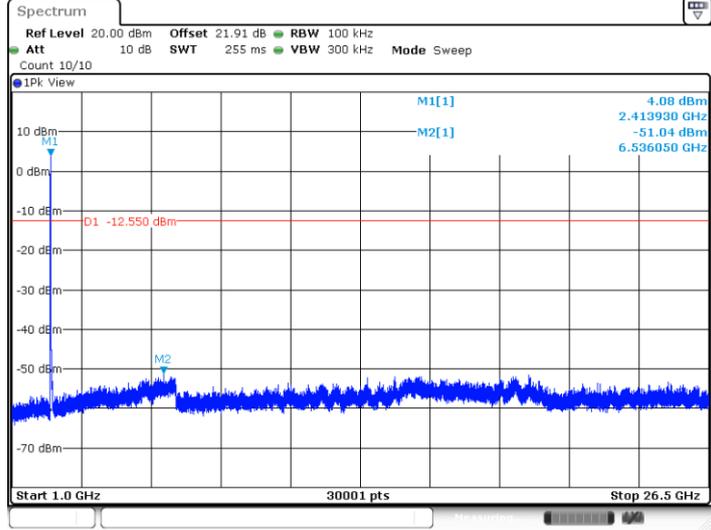

Date: 13 NOV. 2024 08:41:25




11G_Ant1_2437_30~1000

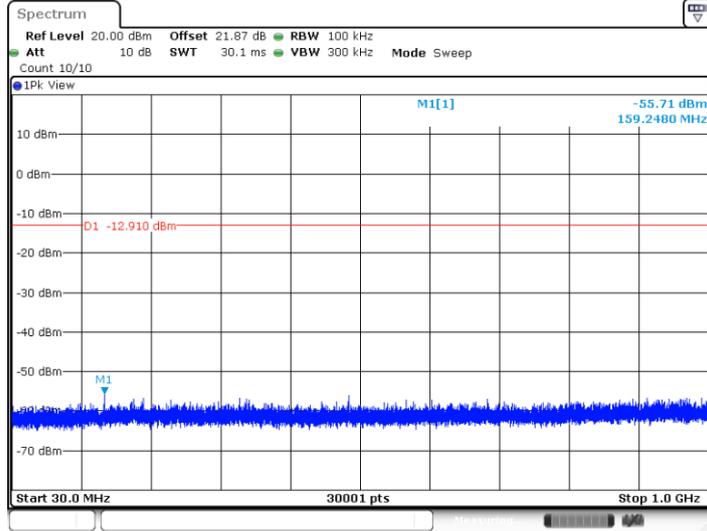

Date: 13 NOV, 2024 08:43:03


11G_Ant1_2437_1000~26500

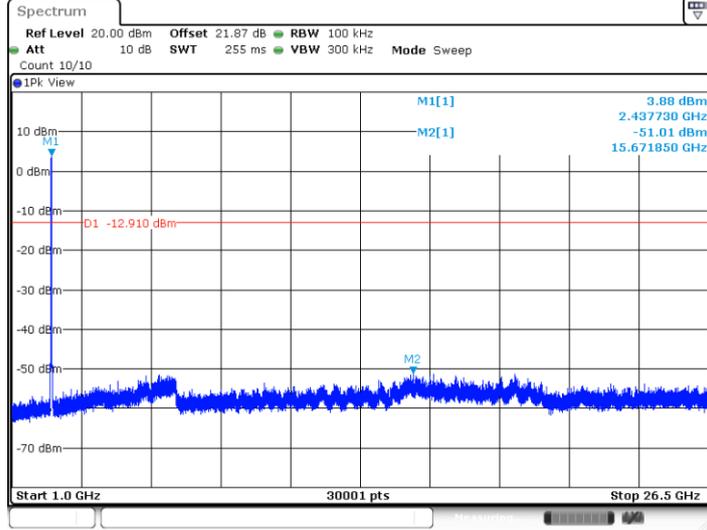

Date: 13 NOV, 2024 08:43:19




11G_Ant1_2462_30~1000

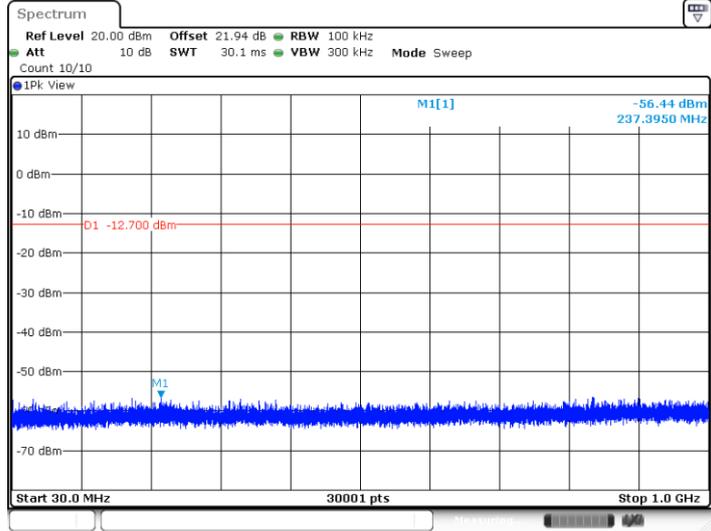

Date: 13 NOV, 2024 08:44:47


11G_Ant1_2462_1000~26500

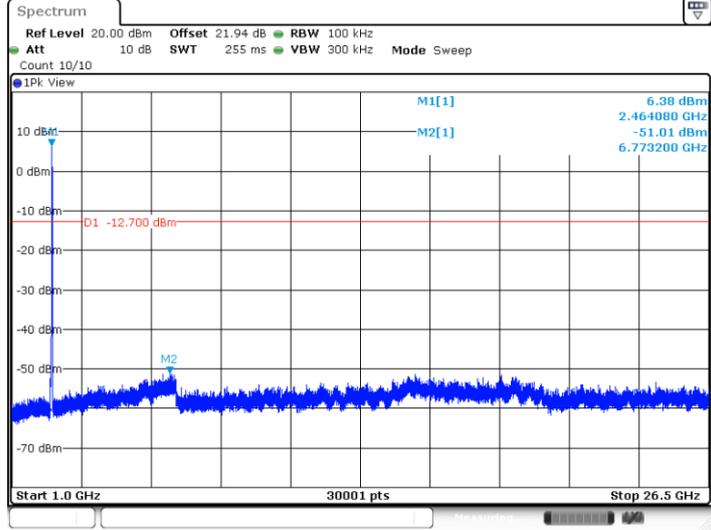

Date: 13 NOV, 2024 08:45:04




11N20SISO_Ant1_2412_30~1000

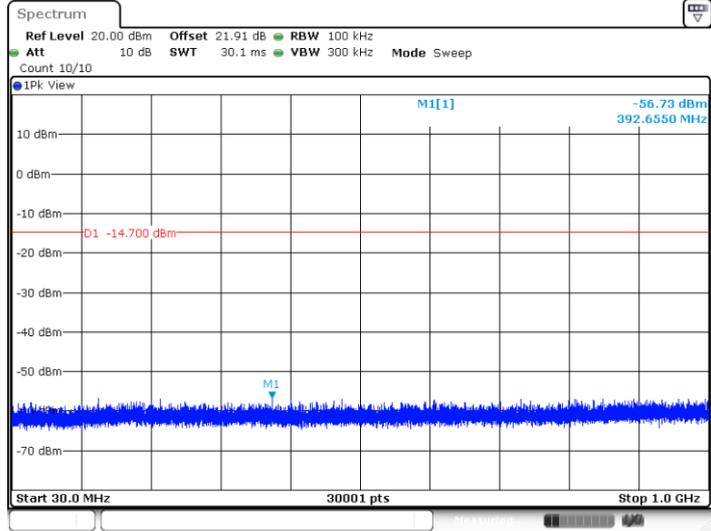

Date: 13 NOV. 2024 08:46:22


11N20SISO_Ant1_2412_1000~26500

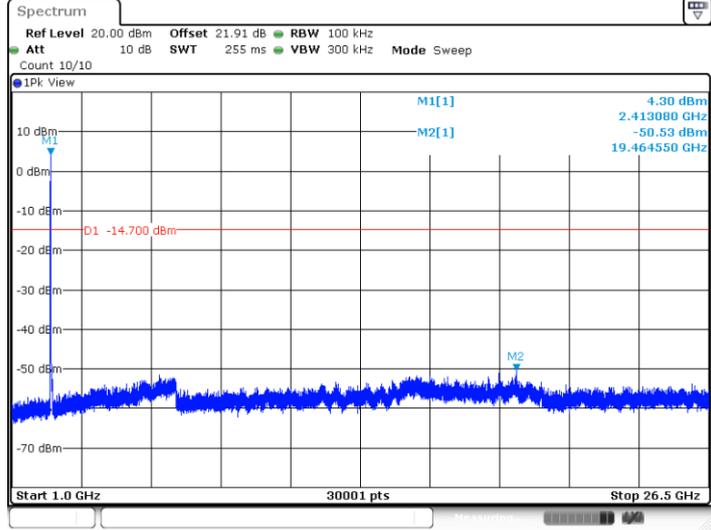

Date: 13 NOV. 2024 08:46:39




11N20SISO_Ant1_2437_30~1000

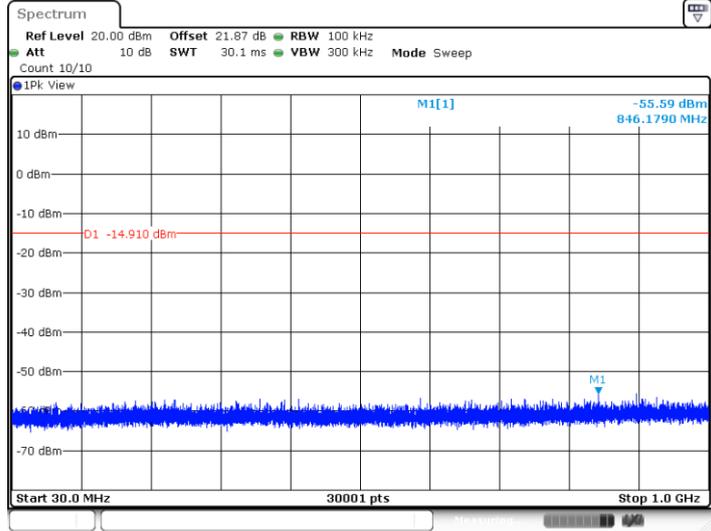

Date: 13 NOV, 2024 08:47:27


11N20SISO_Ant1_2437_1000~26500

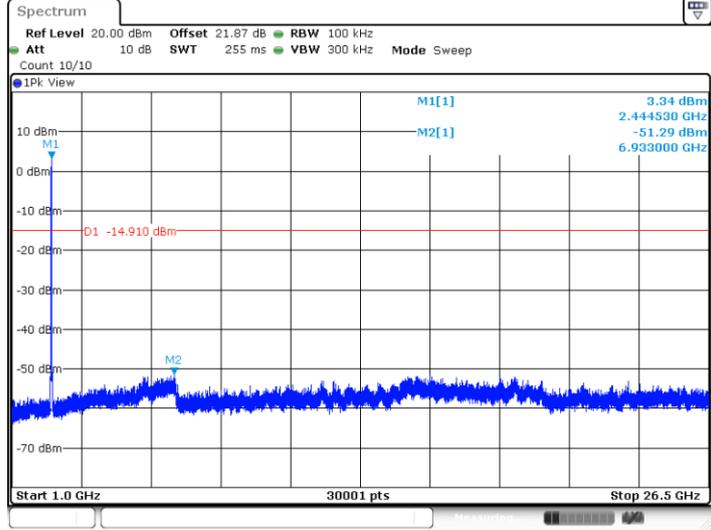

Date: 13 NOV, 2024 08:47:44




11N20SISO_Ant1_2462_30~1000

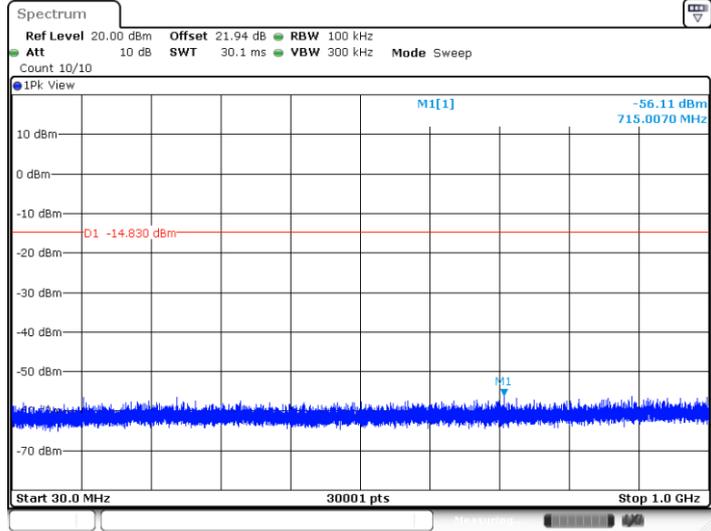

Date: 13 NOV, 2024 08:48:49

11N20SISO_Ant1_2462_1000~26500

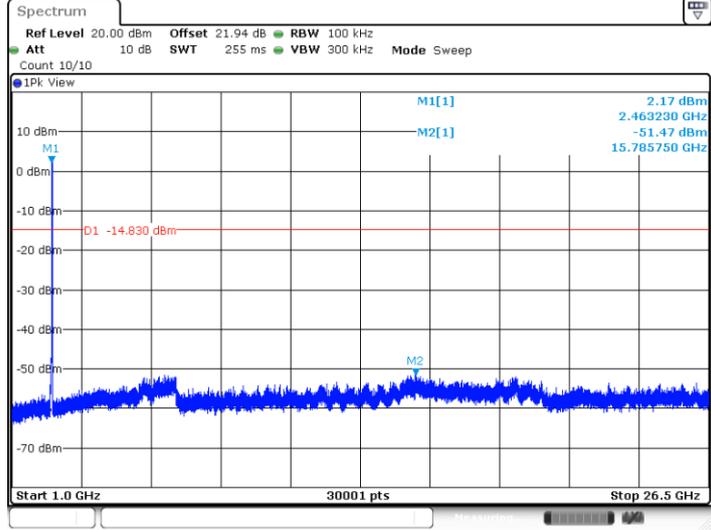


Date: 13 NOV, 2024 08:49:06



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

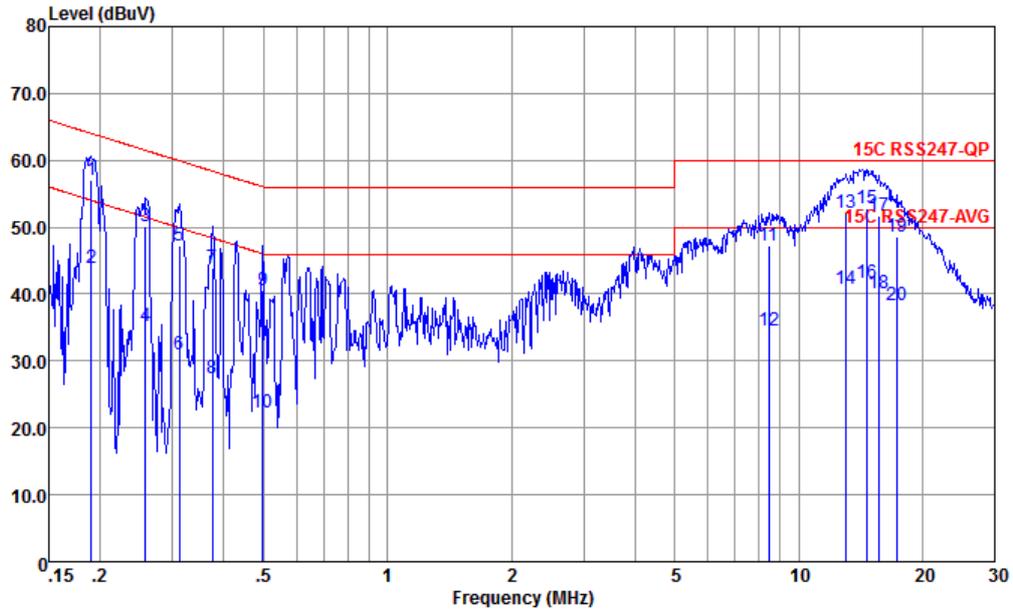


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.190	57.10	-6.92	64.02	46.60	0.09	10.41	QP
2	0.190	43.80	-10.22	54.02	33.30	0.09	10.41	Average
3	0.258	50.05	-11.46	61.51	39.60	0.09	10.36	QP
4	0.258	35.25	-16.26	51.51	24.80	0.09	10.36	Average
5	0.312	47.20	-12.73	59.93	36.80	0.07	10.33	QP
6	0.312	31.00	-18.93	49.93	20.60	0.07	10.33	Average
7	0.375	43.89	-14.50	58.39	33.60	0.00	10.29	QP
8	0.375	27.49	-20.90	48.39	17.20	0.00	10.29	Average
9	0.497	40.61	-15.44	56.05	30.50	-0.11	10.22	QP
10	0.497	22.31	-23.74	46.05	12.20	-0.11	10.22	Average
11	8.456	47.13	-12.87	60.00	36.89	-0.23	10.47	QP
12	8.456	34.43	-15.57	50.00	24.19	-0.23	10.47	Average
13	13.057	52.07	-7.93	60.00	41.20	-0.20	11.07	QP
14	13.057	40.77	-9.23	50.00	29.90	-0.20	11.07	Average
15	14.672	52.91	-7.09	60.00	41.90	-0.18	11.19	QP
16	14.672	41.61	-8.39	50.00	30.60	-0.18	11.19	Average
17	15.718	51.61	-8.39	60.00	40.60	-0.22	11.23	QP
18	15.718	40.21	-9.79	50.00	29.20	-0.22	11.23	Average
19	17.383	48.56	-11.44	60.00	37.60	-0.32	11.28	QP
20	17.383	38.26	-11.74	50.00	27.30	-0.32	11.28	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

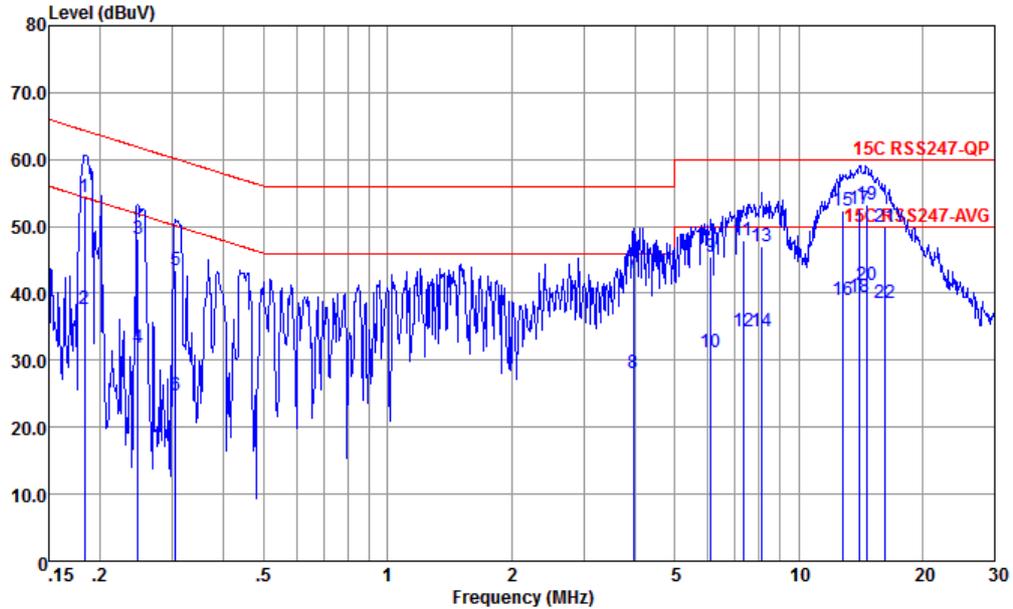

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.183	54.44	-9.89	64.33	43.90	0.13	10.41	QP
2	0.183	37.74	-16.59	54.33	27.20	0.13	10.41	Average
3	0.247	48.17	-13.69	61.86	37.80	0.00	10.37	QP
4	0.247	31.97	-19.89	51.86	21.60	0.00	10.37	Average
5	0.305	43.41	-16.69	60.10	33.20	-0.12	10.33	QP
6	0.305	24.81	-25.29	50.10	14.60	-0.12	10.33	Average
7	3.964	43.05	-12.95	56.00	33.20	-0.21	10.06	QP
8	3.964	28.05	-17.95	46.00	18.20	-0.21	10.06	Average
9	6.121	45.42	-14.58	60.00	35.50	-0.19	10.11	QP
10	6.121	31.12	-18.88	50.00	21.20	-0.19	10.11	Average
11	7.329	47.92	-12.08	60.00	37.80	-0.19	10.31	QP
12	7.329	34.32	-15.68	50.00	24.20	-0.19	10.31	Average
13	8.148	47.10	-12.90	60.00	36.90	-0.22	10.42	QP
14	8.148	34.40	-15.60	50.00	24.20	-0.22	10.42	Average
15	12.784	52.43	-7.57	60.00	41.60	-0.22	11.05	QP
16	12.784	39.03	-10.97	50.00	28.20	-0.22	11.05	Average
17	14.063	52.55	-7.45	60.00	41.60	-0.20	11.15	QP
18	14.063	39.55	-10.45	50.00	28.60	-0.20	11.15	Average
19 *	14.672	53.20	-6.80	60.00	42.20	-0.19	11.19	QP
20	14.672	41.20	-8.80	50.00	30.20	-0.19	11.19	Average
21	16.226	49.82	-10.18	60.00	38.79	-0.22	11.25	QP
22	16.226	38.62	-11.38	50.00	27.59	-0.22	11.25	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Bernie Liu	Relative Humidity :	40-42%
		Temperature :	22-26°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 11	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 12	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 14	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 15	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 17	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 18	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 19	2400-2483.5	1	802.11b	2	2417	1Mbps	-	-
Mode 20	2400-2483.5	1	802.11g	10	2457	6Mbps	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	01	2389.43	41.87	54.00	-12.13	V	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	48.88	54.00	-5.12	V	AVERAGE	Pass	Harmonic
11	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	4874.00	50.35	54.00	-3.65	H	AVERAGE	Pass	Harmonic
12	802.11b	11	2486.50	42.01	54.00	-11.99	H	AVERAGE	Pass	Band Edge
	802.11b	11	4924.00	48.39	54.00	-5.61	V	AVERAGE	Pass	Harmonic
13	802.11g	01	2389.56	50.19	54.00	-3.81	H	AVERAGE	Pass	Band Edge
	802.11g	01	7236.00	53.52	79.99	-26.47	H	Peak	Pass	Harmonic
14	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	43.41	54.00	-10.59	H	AVERAGE	Pass	Harmonic
15	802.11g	11	2483.50	49.91	54.00	-4.09	H	AVERAGE	Pass	Band Edge
	802.11g	11	7386.00	38.94	54.00	-15.06	H	AVERAGE	Pass	Harmonic
16	802.11n HT20	01	2389.04	70.19	74.00	-3.81	H	PEAK	Pass	Band Edge
	802.11n HT20	01	7236.00	48.55	78.69	-30.14	H	Peak	Pass	Harmonic
17	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
	802.11n HT20	06	7311.00	37.39	54.00	-16.61	H	AVERAGE	Pass	Harmonic
18	802.11n HT20	11	2483.50	50.52	54.00	-3.48	H	AVERAGE	Pass	Band Edge
	802.11n HT20	11	7386.00	34.99	54.00	-19.01	H	AVERAGE	Pass	Harmonic
19	802.11b	2	2388.52	43.02	54.00	-10.98	H	AVERAGE	Pass	Band Edge
	802.11b	2	7251.00	50.10	54.00	-3.90	H	AVERAGE	Pass	Harmonic
20	802.11g	10	2483.56	50.31	54.00	-3.69	H	AVERAGE	Pass	Band Edge
	802.11g	10	7371.00	42.92	54.00	-11.08	H	AVERAGE	Pass	Harmonic



Mode	10																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.66</td> <td>53.29</td> <td>74.00</td> <td>-20.71</td> <td>45.08</td> <td>32.16</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>100</td> <td>335</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.66	53.29	74.00	-20.71	45.08	32.16	7.10	37.05	6.00	100	335	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>109.09</td> <td>-----</td> <td>-----</td> <td>100.63</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>100</td> <td>335</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.09	-----	-----	100.63	32.33	7.14	37.01	6.00	100	335	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2385.66	53.29	74.00	-20.71	45.08	32.16	7.10	37.05	6.00	100	335	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	109.09	-----	-----	100.63	32.33	7.14	37.01	6.00	100	335	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>41.26</td> <td>54.00</td> <td>-12.74</td> <td>33.02</td> <td>32.19</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>100</td> <td>335</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	41.26	54.00	-12.74	33.02	32.19	7.10	37.05	6.00	100	335	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>105.03</td> <td>-----</td> <td>-----</td> <td>96.58</td> <td>32.32</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>100</td> <td>335</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.03	-----	-----	96.58	32.32	7.14	37.01	6.00	100	335	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.30	41.26	54.00	-12.74	33.02	32.19	7.10	37.05	6.00	100	335	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	105.03	-----	-----	96.58	32.32	7.14	37.01	6.00	100	335	AVERAGE																																																																								



Mode	10																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.18</td> <td>53.33</td> <td>74.00</td> <td>-20.67</td> <td>45.12</td> <td>32.16</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>389</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	53.33	74.00	-20.67	45.12	32.16	7.10	37.05	6.00	389	47	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>110.24</td> <td>-----</td> <td>-----</td> <td>101.78</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>389</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.24	-----	-----	101.78	32.33	7.14	37.01	6.00	389	47	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2386.18	53.33	74.00	-20.67	45.12	32.16	7.10	37.05	6.00	389	47	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	110.24	-----	-----	101.78	32.33	7.14	37.01	6.00	389	47	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>41.87</td> <td>54.00</td> <td>-12.13</td> <td>33.63</td> <td>32.19</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>389</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	41.87	54.00	-12.13	33.63	32.19	7.10	37.05	6.00	389	47	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>106.04</td> <td>-----</td> <td>-----</td> <td>97.59</td> <td>32.32</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>389</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.04	-----	-----	97.59	32.32	7.14	37.01	6.00	389	47	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.43	41.87	54.00	-12.13	33.63	32.19	7.10	37.05	6.00	389	47	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	106.04	-----	-----	97.59	32.32	7.14	37.01	6.00	389	47	AVERAGE																																																																								







Mode	10																																																																																																																																										
	Harmonic																																																																																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																										
ANT	1																																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																																									
Peak Avg																																																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>50.91</td> <td>74.00</td> <td>-23.09</td> <td>72.07</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>164</td> <td>3</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>48.41</td> <td>54.00</td> <td>-5.59</td> <td>69.57</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>164</td> <td>3</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7236.00</td> <td>55.17</td> <td>84.28</td> <td>-29.11</td> <td>72.86</td> <td>35.70</td> <td>12.71</td> <td>66.10</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.91	74.00	-23.09	72.07	34.10	10.23	65.49	0.00	164	3	PEAK	2	4824.00	48.41	54.00	-5.59	69.57	34.10	10.23	65.49	0.00	164	3	AVERAGE	3	7236.00	55.17	84.28	-29.11	72.86	35.70	12.71	66.10	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>72.03</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>227</td> <td>355</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>48.88</td> <td>54.00</td> <td>-5.12</td> <td>70.04</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>227</td> <td>355</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7237.00</td> <td>51.78</td> <td>82.35</td> <td>-30.57</td> <td>69.47</td> <td>35.70</td> <td>12.71</td> <td>66.10</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.87	74.00	-23.13	72.03	34.10	10.23	65.49	0.00	227	355	PEAK	2	4824.00	48.88	54.00	-5.12	70.04	34.10	10.23	65.49	0.00	227	355	AVERAGE	3	7237.00	51.78	82.35	-30.57	69.47	35.70	12.71	66.10	0.00	--	--
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	4824.00	50.91	74.00	-23.09	72.07	34.10	10.23	65.49	0.00	164	3	PEAK																																																																																																																															
2	4824.00	48.41	54.00	-5.59	69.57	34.10	10.23	65.49	0.00	164	3	AVERAGE																																																																																																																															
3	7236.00	55.17	84.28	-29.11	72.86	35.70	12.71	66.10	0.00	--	--	PEAK																																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																		
1	4824.00	50.87	74.00	-23.13	72.03	34.10	10.23	65.49	0.00	227	355	PEAK																																																																																																																															
2	4824.00	48.88	54.00	-5.12	70.04	34.10	10.23	65.49	0.00	227	355	AVERAGE																																																																																																																															
3	7237.00	51.78	82.35	-30.57	69.47	35.70	12.71	66.10	0.00	--	--	PEAK																																																																																																																															



Mode	11																																																																																																																																												
	Harmonic																																																																																																																																												
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																												
ANT	1																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>51.87</td> <td>74.00</td> <td>-22.13</td> <td>72.97</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>239</td> <td>356</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>50.35</td> <td>54.00</td> <td>-3.65</td> <td>71.45</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>239</td> <td>356</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>46.99</td> <td>74.00</td> <td>-27.01</td> <td>64.84</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	51.87	74.00	-22.13	72.97	34.14	10.29	65.53	0.00	239	356	PEAK	2	4874.00	50.35	54.00	-3.65	71.45	34.14	10.29	65.53	0.00	239	356	AVERAGE	3	7311.00	46.99	74.00	-27.01	64.84	35.72	12.72	66.29	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>52.10</td> <td>74.00</td> <td>-21.90</td> <td>73.20</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>192</td> <td>357</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>4874.00</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>71.26</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>192</td> <td>357</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>7311.00</td> <td>43.36</td> <td>74.00</td> <td>-30.64</td> <td>61.21</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	52.10	74.00	-21.90	73.20	34.14	10.29	65.53	0.00	192	357	PEAK	2	4874.00	50.16	54.00	-3.84	71.26	34.14	10.29	65.53	0.00	192	357	AVERAGE	3	7311.00	43.36	74.00	-30.64	61.21	35.72	12.72	66.29	0.00	--	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4874.00	51.87	74.00	-22.13	72.97	34.14	10.29	65.53	0.00	239	356	PEAK																																																																																																																																	
2	4874.00	50.35	54.00	-3.65	71.45	34.14	10.29	65.53	0.00	239	356	AVERAGE																																																																																																																																	
3	7311.00	46.99	74.00	-27.01	64.84	35.72	12.72	66.29	0.00	--	--	PEAK																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	4874.00	52.10	74.00	-21.90	73.20	34.14	10.29	65.53	0.00	192	357	PEAK																																																																																																																																	
2	4874.00	50.16	54.00	-3.84	71.26	34.14	10.29	65.53	0.00	192	357	AVERAGE																																																																																																																																	
3	7311.00	43.36	74.00	-30.64	61.21	35.72	12.72	66.29	0.00	--	--	PEAK																																																																																																																																	

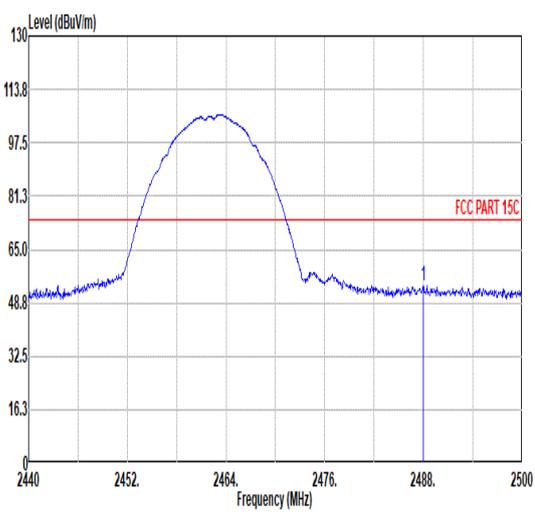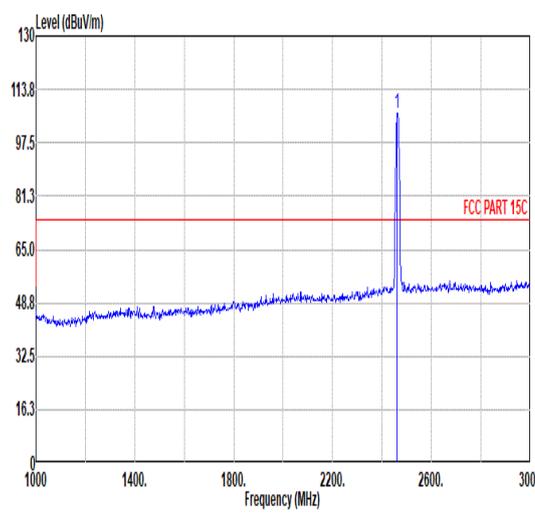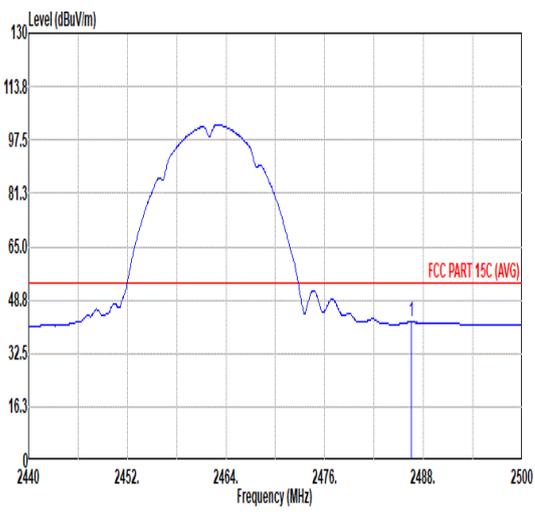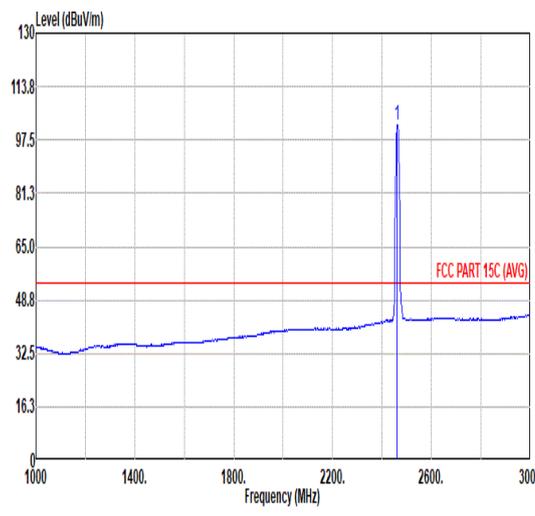

Mode	12																																																																										
	Band Edge																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																										
ANT	1																																																																										
Pol.	Horizontal	Fundamental																																																																									
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a broad signal between 2450 and 2475 MHz, peaking at approximately 105 dBuV/m. A red horizontal line indicates the FCC PART 15C limit at 74 dBuV/m. A vertical blue line marks the peak at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2467.94</td> <td>53.90</td> <td>74.00</td> <td>-20.10</td> <td>45.00</td> <td>32.48</td> <td>7.26</td> <td>36.84</td> <td>6.00</td> <td>261</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2467.94	53.90	74.00	-20.10	45.00	32.48	7.26	36.84	6.00	261	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a sharp peak at 2462 MHz with a level of approximately 106.5 dBuV/m. A red horizontal line indicates the FCC PART 15C limit at 74 dBuV/m. A vertical blue line marks the peak at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>106.50</td> <td>74.00</td> <td>32.50</td> <td>32.43</td> <td>7.22</td> <td>36.89</td> <td>6.00</td> <td>261</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	106.50	74.00	32.50	32.43	7.22	36.89	6.00	261	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2467.94	53.90	74.00	-20.10	45.00	32.48	7.26	36.84	6.00	261	360	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2462.00	106.50	74.00	32.50	32.43	7.22	36.89	6.00	261	360	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal polarization. The plot shows a broad signal between 2450 and 2475 MHz, peaking at approximately 95 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) limit at 54 dBuV/m. A vertical blue line marks the peak at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.50</td> <td>42.01</td> <td>54.00</td> <td>-11.99</td> <td>33.12</td> <td>32.47</td> <td>7.26</td> <td>36.84</td> <td>6.00</td> <td>261</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2486.50	42.01	54.00	-11.99	33.12	32.47	7.26	36.84	6.00	261	360	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Average Fundamental polarization. The plot shows a sharp peak at 2462 MHz with a level of approximately 102.27 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) limit at 54 dBuV/m. A vertical blue line marks the peak at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.27</td> <td>54.00</td> <td>48.27</td> <td>32.42</td> <td>7.22</td> <td>36.90</td> <td>6.00</td> <td>261</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	102.27	54.00	48.27	32.42	7.22	36.90	6.00	261	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2486.50	42.01	54.00	-11.99	33.12	32.47	7.26	36.84	6.00	261	360	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2462.00	102.27	54.00	48.27	32.42	7.22	36.90	6.00	261	360	AVERAGE																																																																



Mode	12																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical	Fundamental																																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.40</td> <td>54.00</td> <td>74.00</td> <td>-20.00</td> <td>45.11</td> <td>32.47</td> <td>7.26</td> <td>36.84</td> <td>6.00</td> <td>331</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	2487.40	54.00	74.00	-20.00	45.11	32.47	7.26	36.84	6.00	331	65	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.78</td> <td>-----</td> <td>-----</td> <td>97.02</td> <td>32.43</td> <td>7.22</td> <td>36.89</td> <td>6.00</td> <td>331</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	2462.00	105.78	-----	-----	97.02	32.43	7.22	36.89	6.00	331	65	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	2487.40	54.00	74.00	-20.00	45.11	32.47	7.26	36.84	6.00	331	65	PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	2462.00	105.78	-----	-----	97.02	32.43	7.22	36.89	6.00	331	65	PEAK																																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.52</td> <td>41.56</td> <td>54.00</td> <td>-12.44</td> <td>32.66</td> <td>32.48</td> <td>7.26</td> <td>36.84</td> <td>6.00</td> <td>331</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	2487.52	41.56	54.00	-12.44	32.66	32.48	7.26	36.84	6.00	331	65	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.61</td> <td>-----</td> <td>-----</td> <td>92.87</td> <td>32.42</td> <td>7.22</td> <td>36.90</td> <td>6.00</td> <td>331</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	2462.00	101.61	-----	-----	92.87	32.42	7.22	36.90	6.00	331	65	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	2487.52	41.56	54.00	-12.44	32.66	32.48	7.26	36.84	6.00	331	65	AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																				
1	2462.00	101.61	-----	-----	92.87	32.42	7.22	36.90	6.00	331	65	AVERAGE																																																																																				



Mode	12																																																																																																																																						
	Harmonic																																																																																																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																						
ANT	1																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																					
Peak Avg																																																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>45.26</td> <td>74.00</td> <td>-28.74</td> <td>66.28</td> <td>34.19</td> <td>10.35</td> <td>65.56</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>48.12</td> <td>74.00</td> <td>-25.88</td> <td>66.08</td> <td>35.00</td> <td>12.73</td> <td>66.49</td> <td>0.00</td> <td>300</td> <td>360 PEAK</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>42.53</td> <td>54.00</td> <td>-11.47</td> <td>60.49</td> <td>35.00</td> <td>12.73</td> <td>66.49</td> <td>0.00</td> <td>300</td> <td>360 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	45.26	74.00	-28.74	66.28	34.19	10.35	65.56	0.00	--	PEAK	2	7386.00	48.12	74.00	-25.88	66.08	35.00	12.73	66.49	0.00	300	360 PEAK	3	7386.00	42.53	54.00	-11.47	60.49	35.00	12.73	66.49	0.00	300	360 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>50.76</td> <td>74.00</td> <td>-23.24</td> <td>71.78</td> <td>34.19</td> <td>10.35</td> <td>65.56</td> <td>0.00</td> <td>197</td> <td>358 PEAK</td> </tr> <tr> <td>2</td> <td>4924.00</td> <td>48.39</td> <td>54.00</td> <td>-5.61</td> <td>69.41</td> <td>34.19</td> <td>10.35</td> <td>65.56</td> <td>0.00</td> <td>197</td> <td>358 AVERAGE</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>44.37</td> <td>74.00</td> <td>-29.63</td> <td>62.33</td> <td>35.00</td> <td>12.73</td> <td>66.49</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	50.76	74.00	-23.24	71.78	34.19	10.35	65.56	0.00	197	358 PEAK	2	4924.00	48.39	54.00	-5.61	69.41	34.19	10.35	65.56	0.00	197	358 AVERAGE	3	7386.00	44.37	74.00	-29.63	62.33	35.00	12.73	66.49	0.00	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4924.00	45.26	74.00	-28.74	66.28	34.19	10.35	65.56	0.00	--	PEAK																																																																																																																												
2	7386.00	48.12	74.00	-25.88	66.08	35.00	12.73	66.49	0.00	300	360 PEAK																																																																																																																												
3	7386.00	42.53	54.00	-11.47	60.49	35.00	12.73	66.49	0.00	300	360 AVERAGE																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	4924.00	50.76	74.00	-23.24	71.78	34.19	10.35	65.56	0.00	197	358 PEAK																																																																																																																												
2	4924.00	48.39	54.00	-5.61	69.41	34.19	10.35	65.56	0.00	197	358 AVERAGE																																																																																																																												
3	7386.00	44.37	74.00	-29.63	62.33	35.00	12.73	66.49	0.00	--	PEAK																																																																																																																												



Mode	13																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.26</td> <td>68.04</td> <td>74.00</td> <td>-5.96</td> <td>59.81</td> <td>32.18</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>101</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.26	68.04	74.00	-5.96	59.81	32.18	7.10	37.05	6.00	101	340	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>111.00</td> <td>-----</td> <td>-----</td> <td>102.62</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>101</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.00	-----	-----	102.62	32.33	7.14	37.01	6.00	101	340	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2388.26	68.04	74.00	-5.96	59.81	32.18	7.10	37.05	6.00	101	340	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	111.00	-----	-----	102.62	32.33	7.14	37.01	6.00	101	340	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>50.19</td> <td>54.00</td> <td>-3.81</td> <td>41.94</td> <td>32.20</td> <td>7.10</td> <td>37.05</td> <td>6.00</td> <td>101</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	50.19	54.00	-3.81	41.94	32.20	7.10	37.05	6.00	101	340	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.90</td> <td>-----</td> <td>-----</td> <td>93.44</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>101</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.90	-----	-----	93.44	32.33	7.14	37.01	6.00	101	340	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.56	50.19	54.00	-3.81	41.94	32.20	7.10	37.05	6.00	101	340	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	101.90	-----	-----	93.44	32.33	7.14	37.01	6.00	101	340	AVERAGE																																																																								



Mode	13																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>67.86</td> <td>74.00</td> <td>-6.14</td> <td>59.60</td> <td>32.20</td> <td>7.11</td> <td>37.05</td> <td>6.00</td> <td>266</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	67.86	74.00	-6.14	59.60	32.20	7.11	37.05	6.00	266	66	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>109.68</td> <td>-----</td> <td>-----</td> <td>101.22</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>266</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.68	-----	-----	101.22	32.33	7.14	37.01	6.00	266	66	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	67.86	74.00	-6.14	59.60	32.20	7.11	37.05	6.00	266	66	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	109.68	-----	-----	101.22	32.33	7.14	37.01	6.00	266	66	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>49.29</td> <td>54.00</td> <td>-4.71</td> <td>41.03</td> <td>32.20</td> <td>7.11</td> <td>37.05</td> <td>6.00</td> <td>266</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	49.29	54.00	-4.71	41.03	32.20	7.11	37.05	6.00	266	66	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>100.64</td> <td>-----</td> <td>-----</td> <td>92.18</td> <td>32.33</td> <td>7.14</td> <td>37.01</td> <td>6.00</td> <td>266</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.64	-----	-----	92.18	32.33	7.14	37.01	6.00	266	66	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.69	49.29	54.00	-4.71	41.03	32.20	7.11	37.05	6.00	266	66	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	100.64	-----	-----	92.18	32.33	7.14	37.01	6.00	266	66	AVERAGE																																																																								







Mode	13																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>43.37</td> <td>74.00</td> <td>-30.63</td> <td>64.53</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7236.00</td> <td>53.52</td> <td>79.99</td> <td>-26.47</td> <td>71.21</td> <td>35.70</td> <td>12.71</td> <td>66.10</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	43.37	74.00	-30.63	64.53	34.10	10.23	65.49	0.00	--	--	PEAK	2	7236.00	53.52	79.99	-26.47	71.21	35.70	12.71	66.10	0.00	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>45.31</td> <td>74.00</td> <td>-28.69</td> <td>66.47</td> <td>34.10</td> <td>10.23</td> <td>65.49</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7240.00</td> <td>47.82</td> <td>77.68</td> <td>-29.86</td> <td>65.52</td> <td>35.70</td> <td>12.71</td> <td>66.11</td> <td>0.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.31	74.00	-28.69	66.47	34.10	10.23	65.49	0.00	--	--	PEAK	2	7240.00	47.82	77.68	-29.86	65.52	35.70	12.71	66.11	0.00	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4824.00	43.37	74.00	-30.63	64.53	34.10	10.23	65.49	0.00	--	--	PEAK																																																																																																		
2	7236.00	53.52	79.99	-26.47	71.21	35.70	12.71	66.10	0.00	--	--	Peak																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4824.00	45.31	74.00	-28.69	66.47	34.10	10.23	65.49	0.00	--	--	PEAK																																																																																																		
2	7240.00	47.82	77.68	-29.86	65.52	35.70	12.71	66.11	0.00	--	--	Peak																																																																																																		



Mode	14																																																																																																																																													
	Harmonic																																																																																																																																													
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4874.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>68.70</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 4874.00</td> <td>37.21</td> <td>54.00</td> <td>-16.79</td> <td>58.31</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>3 7311.00</td> <td>55.30</td> <td>74.00</td> <td>-18.70</td> <td>73.15</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td></td> <td>3 PEAK</td> </tr> <tr> <td>4 7311.00</td> <td>43.41</td> <td>54.00</td> <td>-10.59</td> <td>61.26</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td></td> <td>3 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4874.00	47.60	74.00	-26.40	68.70	34.14	10.29	65.53	0.00	300	360	PEAK	2 4874.00	37.21	54.00	-16.79	58.31	34.14	10.29	65.53	0.00	300	360	AVERAGE	3 7311.00	55.30	74.00	-18.70	73.15	35.72	12.72	66.29	0.00	100		3 PEAK	4 7311.00	43.41	54.00	-10.59	61.26	35.72	12.72	66.29	0.00	100		3 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4874.00</td> <td>43.93</td> <td>74.00</td> <td>-30.07</td> <td>65.03</td> <td>34.14</td> <td>10.29</td> <td>65.53</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2 7311.00</td> <td>51.58</td> <td>74.00</td> <td>-22.42</td> <td>69.43</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>141</td> <td></td> <td>5 PEAK</td> </tr> <tr> <td>3 7311.00</td> <td>40.58</td> <td>54.00</td> <td>-13.42</td> <td>58.43</td> <td>35.72</td> <td>12.72</td> <td>66.29</td> <td>0.00</td> <td>141</td> <td></td> <td>5 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 4874.00	43.93	74.00	-30.07	65.03	34.14	10.29	65.53	0.00	--	--	PEAK	2 7311.00	51.58	74.00	-22.42	69.43	35.72	12.72	66.29	0.00	141		5 PEAK	3 7311.00	40.58	54.00	-13.42	58.43	35.72	12.72	66.29	0.00	141		5 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1 4874.00	47.60	74.00	-26.40	68.70	34.14	10.29	65.53	0.00	300	360	PEAK																																																																																																																																			
2 4874.00	37.21	54.00	-16.79	58.31	34.14	10.29	65.53	0.00	300	360	AVERAGE																																																																																																																																			
3 7311.00	55.30	74.00	-18.70	73.15	35.72	12.72	66.29	0.00	100		3 PEAK																																																																																																																																			
4 7311.00	43.41	54.00	-10.59	61.26	35.72	12.72	66.29	0.00	100		3 AVERAGE																																																																																																																																			
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Freq Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1 4874.00	43.93	74.00	-30.07	65.03	34.14	10.29	65.53	0.00	--	--	PEAK																																																																																																																																			
2 7311.00	51.58	74.00	-22.42	69.43	35.72	12.72	66.29	0.00	141		5 PEAK																																																																																																																																			
3 7311.00	40.58	54.00	-13.42	58.43	35.72	12.72	66.29	0.00	141		5 AVERAGE																																																																																																																																			

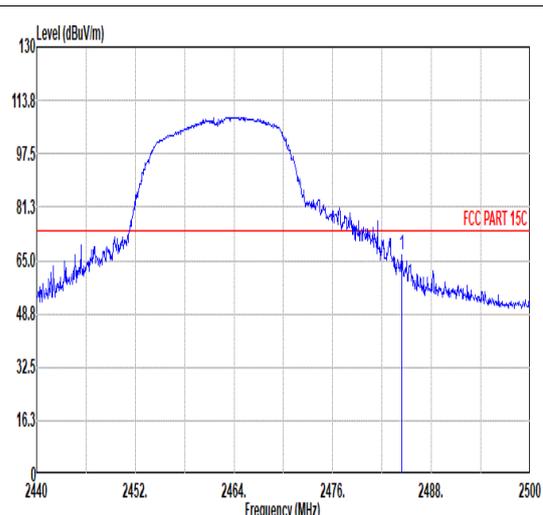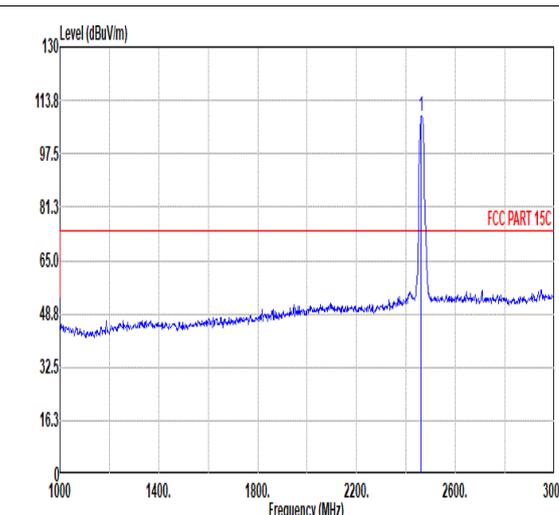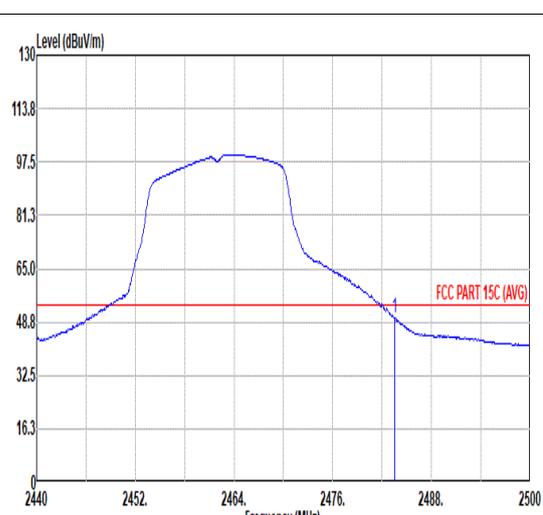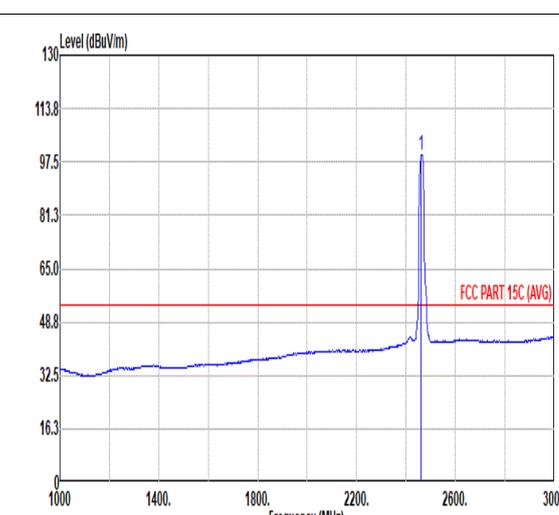

Mode	15																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal between 2440 and 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. A peak is observed at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.40</td> <td>66.60</td> <td>74.00</td> <td>-7.40</td> <td>57.72</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>6.00</td> <td>121</td> <td>315</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.40	66.60	74.00	-7.40	57.72	32.47	7.26	36.85	6.00	121	315	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal between 1000 and 3000 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. A sharp peak is observed at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>108.85</td> <td>-----</td> <td>-----</td> <td>100.11</td> <td>32.42</td> <td>7.22</td> <td>36.90</td> <td>6.00</td> <td>121</td> <td>315</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	108.85	-----	-----	100.11	32.42	7.22	36.90	6.00	121	315	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2484.40	66.60	74.00	-7.40	57.72	32.47	7.26	36.85	6.00	121	315	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2462.00	108.85	-----	-----	100.11	32.42	7.22	36.90	6.00	121	315	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, averaged. The plot shows a signal between 2440 and 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. A peak is observed at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.91</td> <td>54.00</td> <td>-4.09</td> <td>41.03</td> <td>32.47</td> <td>7.26</td> <td>36.85</td> <td>6.00</td> <td>121</td> <td>315</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.50	49.91	54.00	-4.09	41.03	32.47	7.26	36.85	6.00	121	315	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The plot shows a signal between 1000 and 3000 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. A sharp peak is observed at 2462 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.70</td> <td>-----</td> <td>-----</td> <td>90.94</td> <td>32.43</td> <td>7.22</td> <td>36.89</td> <td>6.00</td> <td>121</td> <td>315</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	99.70	-----	-----	90.94	32.43	7.22	36.89	6.00	121	315	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2483.50	49.91	54.00	-4.09	41.03	32.47	7.26	36.85	6.00	121	315	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	2462.00	99.70	-----	-----	90.94	32.43	7.22	36.89	6.00	121	315	AVERAGE																																																																