

01_GSM850_GPRS (3 TX slots)_Bottom Face_0mm_Ch128

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77
Medium: HSL_835_221012 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 42.526$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.55, 9.55, 9.55); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch128/Area Scan (91x91x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Ch128/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 3.105 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.51 W/kg
SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.361 W/kg
Maximum value of SAR (measured) = 1.82 W/kg

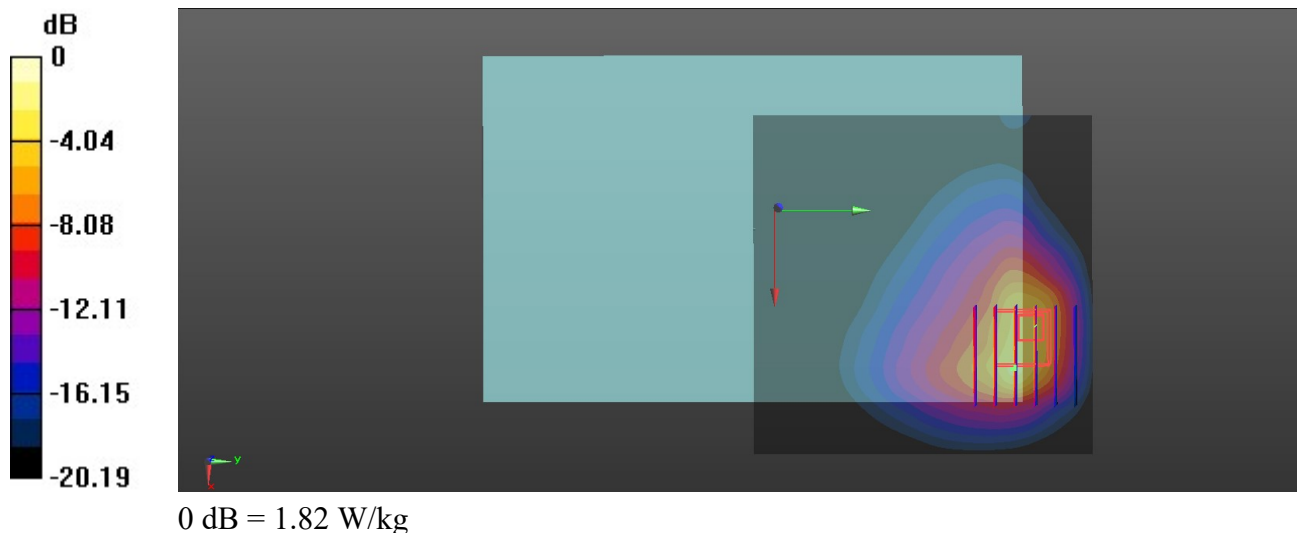

02_WCDMA V_RMC 12.2Kbps_Bottom Face_0mm_Ch4132


Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL_835_221012 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.497$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.55, 9.55, 9.55); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4132/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.94 W/kg

Ch4132/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.287 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.32 W/kg
SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.423 W/kg
Maximum value of SAR (measured) = 2.26 W/kg

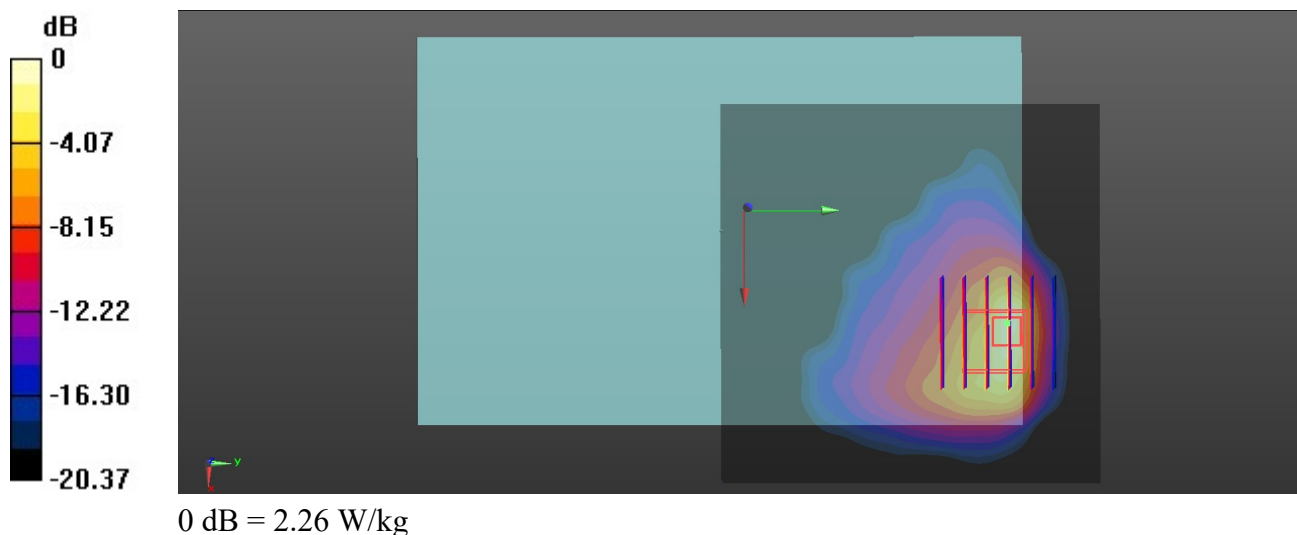

03_LTE Band 26_15M_QPSK_1RB_37Offset_Bottom Face_0mm_Ch26865

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835_221012 Medium parameters used: $f = 831.5 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.439$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.55, 9.55, 9.55); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26865/Area Scan (91x91x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.28 W/kg

Ch26865/Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.553 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 3.12 W/kg
SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.445 W/kg
 Maximum value of SAR (measured) = 2.25 W/kg

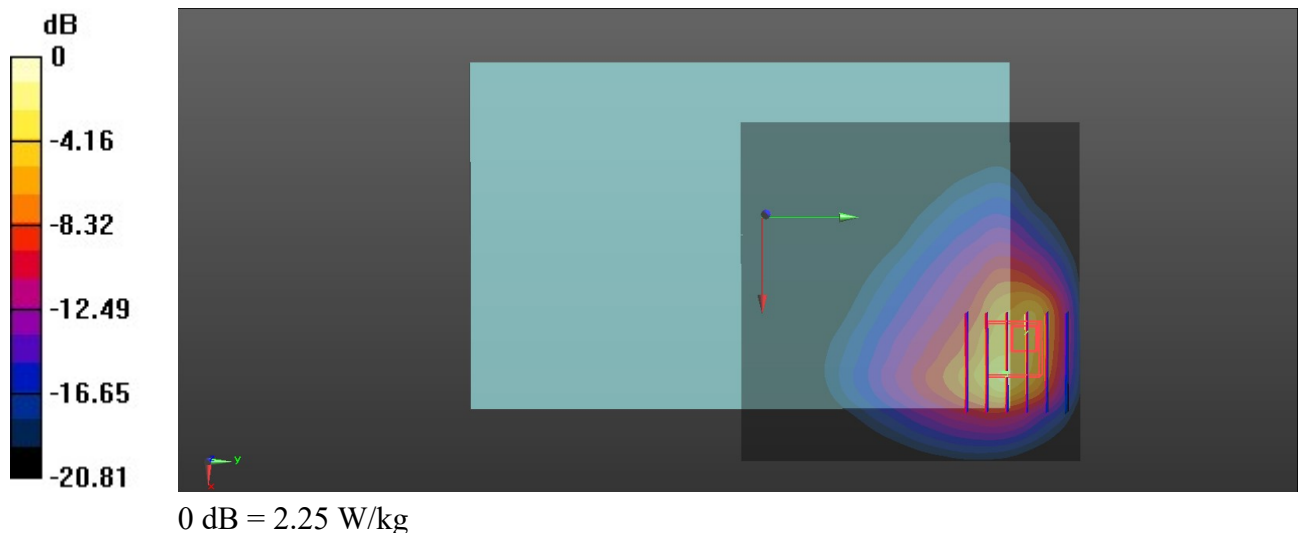

04_WCDMA IV_RMC 12.2Kbps_Bottom Face_0mm_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1750_221013 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.395$ S/m; $\epsilon_r = 40.563$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.4, 8.4, 8.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1513/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.01 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.044 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 2.80 W/kg
SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.445 W/kg
Maximum value of SAR (measured) = 1.89 W/kg

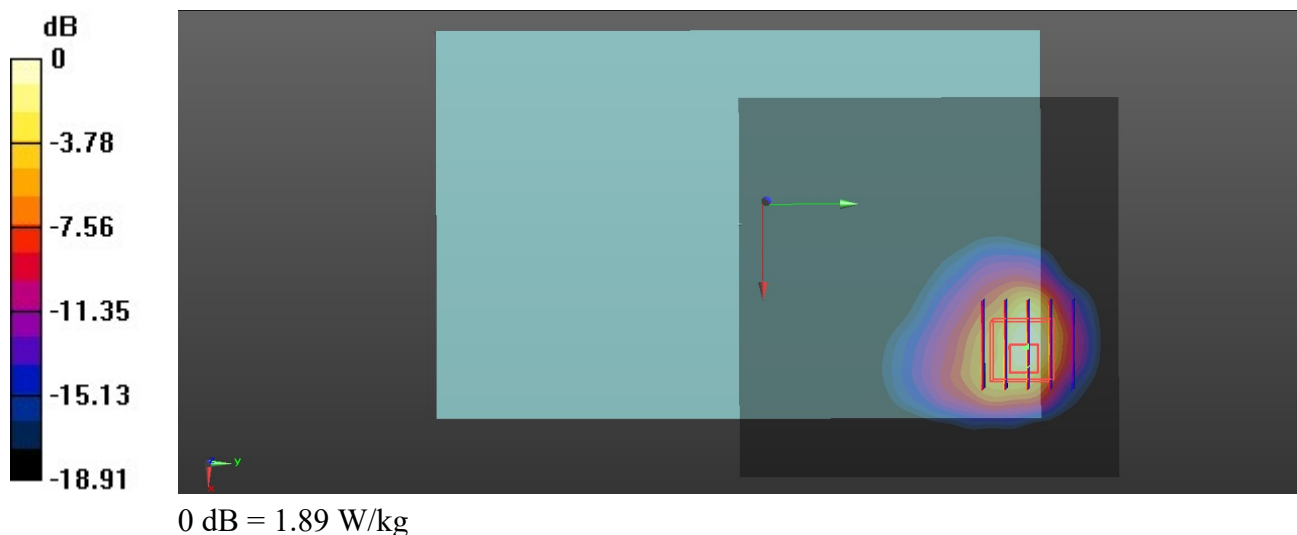

05_LTE Band 66_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch132572

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL_1750_221013 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.464$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.4, 8.4, 8.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132572/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.312 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.432 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

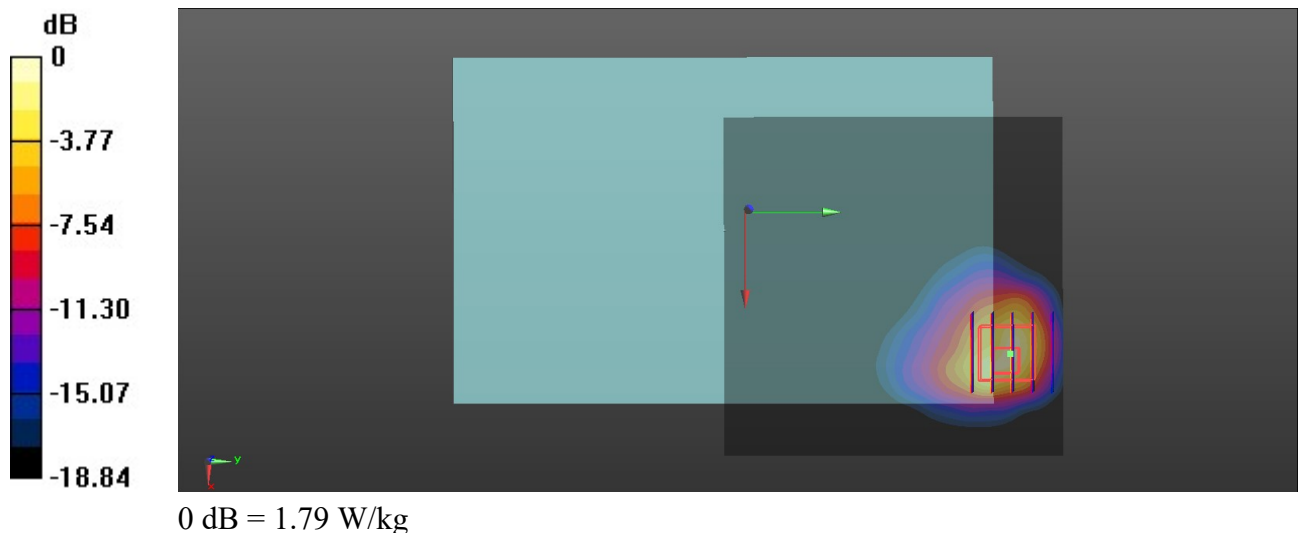

06_GSM1900_GPRS (3 TX slots)_Bottom Face_0mm_Ch512


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_221014 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 41.351$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.13, 8.13, 8.13); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch512/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.30 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.833 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.98 W/kg
SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.369 W/kg
Maximum value of SAR (measured) = 1.55 W/kg

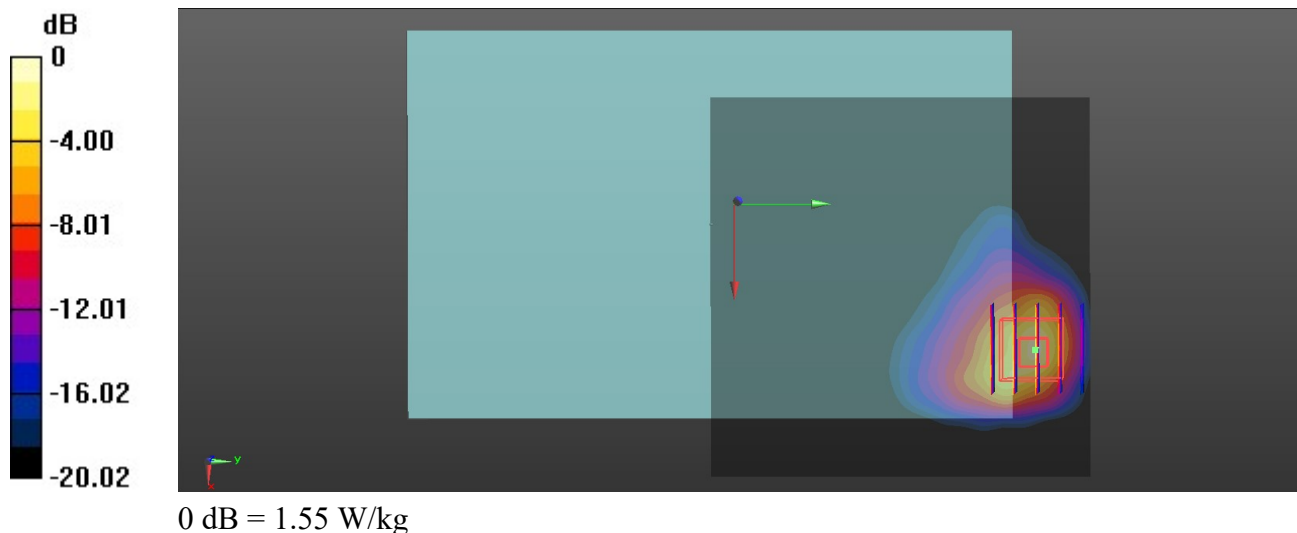

07_WCDMA II_RMC 12.2Kbps_Bottom Face_0mm_Ch9538


Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_221014 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.435$ S/m; $\epsilon_r = 41.189$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.13, 8.13, 8.13); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9538/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.91 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.248 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 2.42 W/kg
SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.414 W/kg
 Maximum value of SAR (measured) = 1.69 W/kg

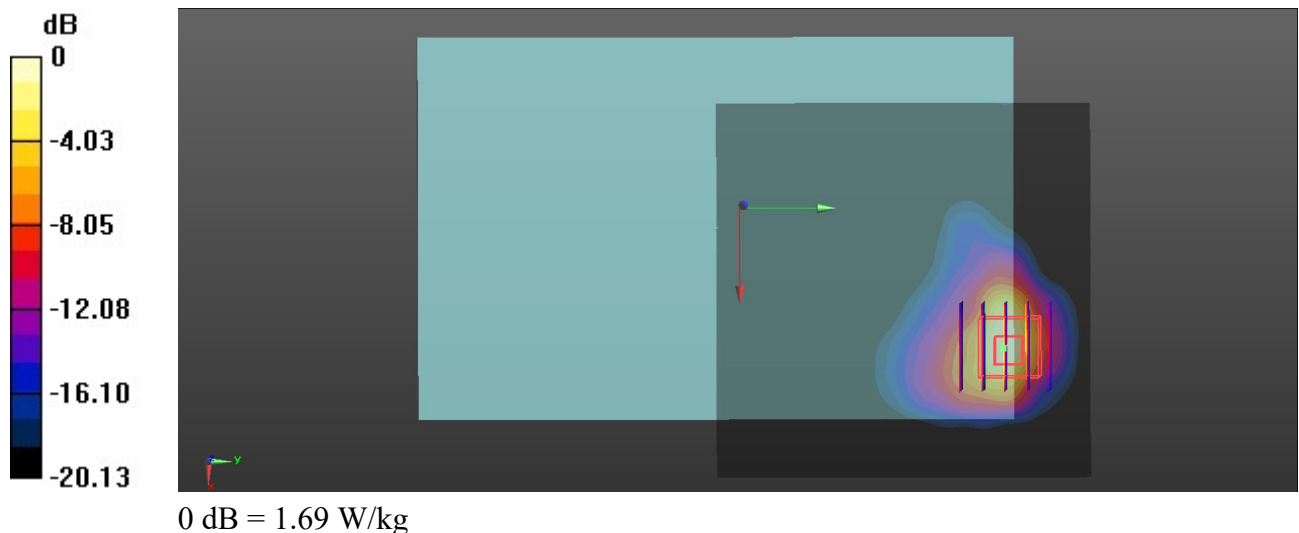

08_LTE Band 2_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch19100

Communication System: UID 0, LTE (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_221014 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 41.216$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.13, 8.13, 8.13); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch19100/Area Scan (91x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.16 W/kg

Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.616 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.429 W/kg
Maximum value of SAR (measured) = 1.62 W/kg

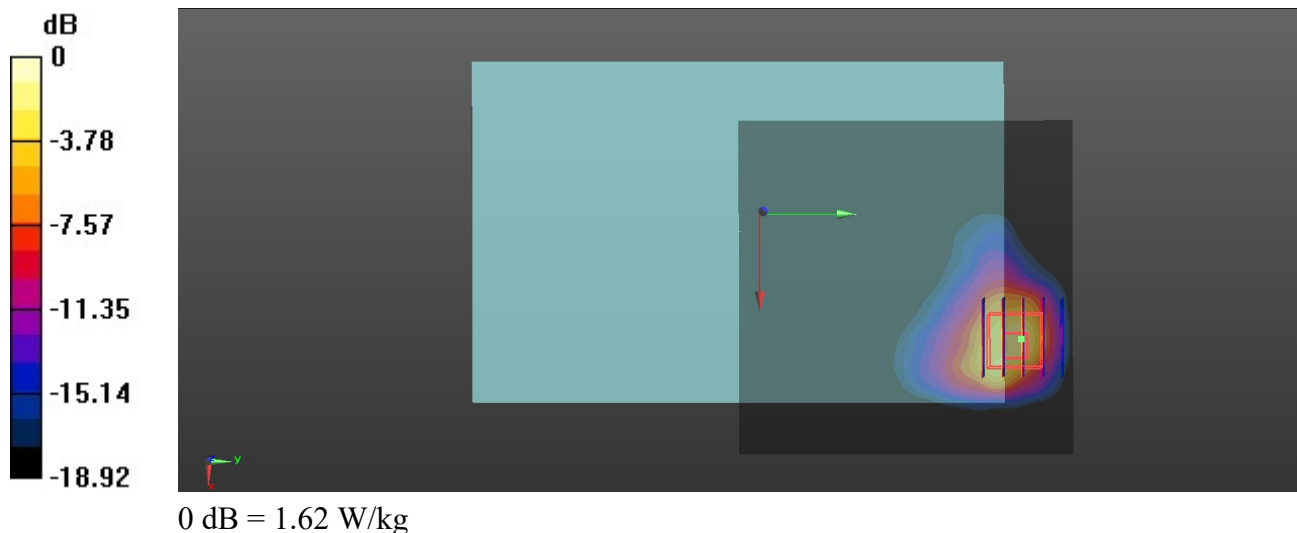

09_LTE Band 7_20M_QPSK_1RB_49Offset_Bottom Face_0mm_Ch21350

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL_2600_221015 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.846$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.68, 7.68, 7.68); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch21350/Area Scan (111x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.73 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.342 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 3.46 W/kg
SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.337 W/kg
Maximum value of SAR (measured) = 2.23 W/kg

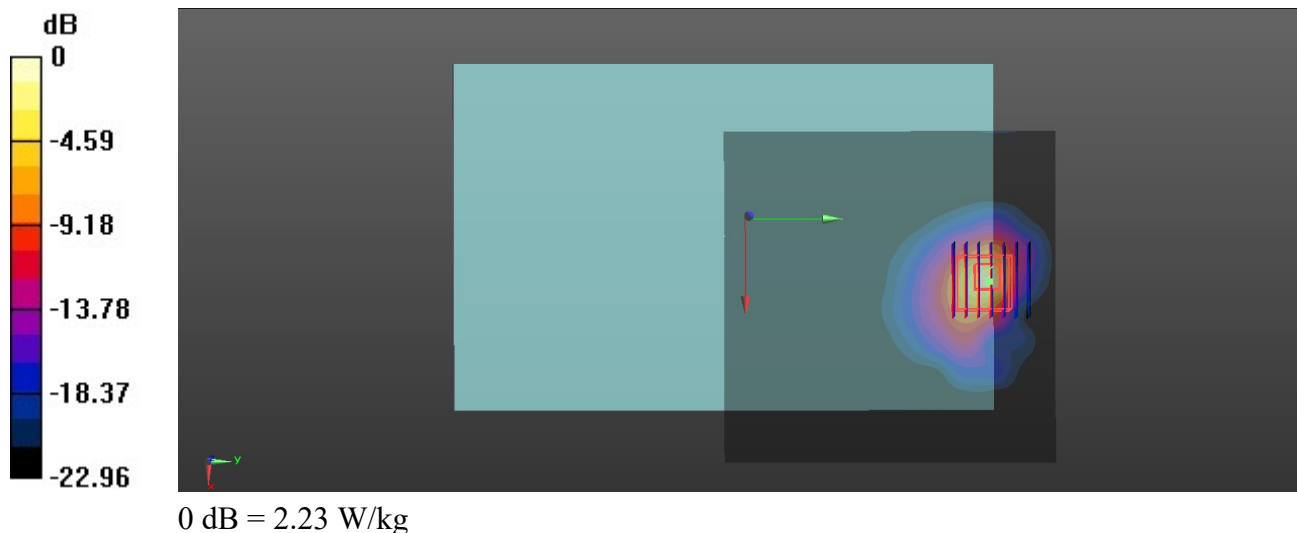

10_LTE Band 41_20M_QPSK_1RB_49Offset_Edge 4_0mm_Ch41055


Communication System: UID 0, LTE (0); Frequency: 2636.5 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_221015 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 40.164$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.68, 7.68, 7.68); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch41055/Area Scan (41x201x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.67 W/kg

Ch41055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.208 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 3.91 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.375 W/kg
Maximum value of SAR (measured) = 2.72 W/kg

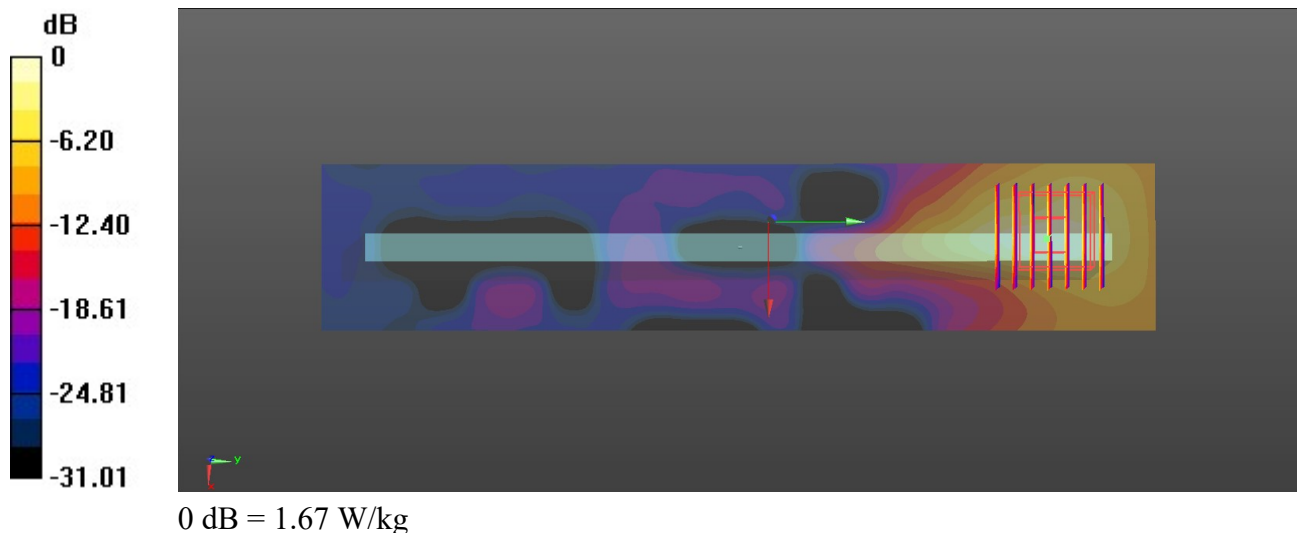

11_Bluetooth_DH5 1Mbps_Bottom Face_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.303

Medium: HSL_2450_221016 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.723$ S/m; $\epsilon_r = 40.799$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.03, 8.03, 8.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch39/Area Scan (111x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.555 W/kg


Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.866 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

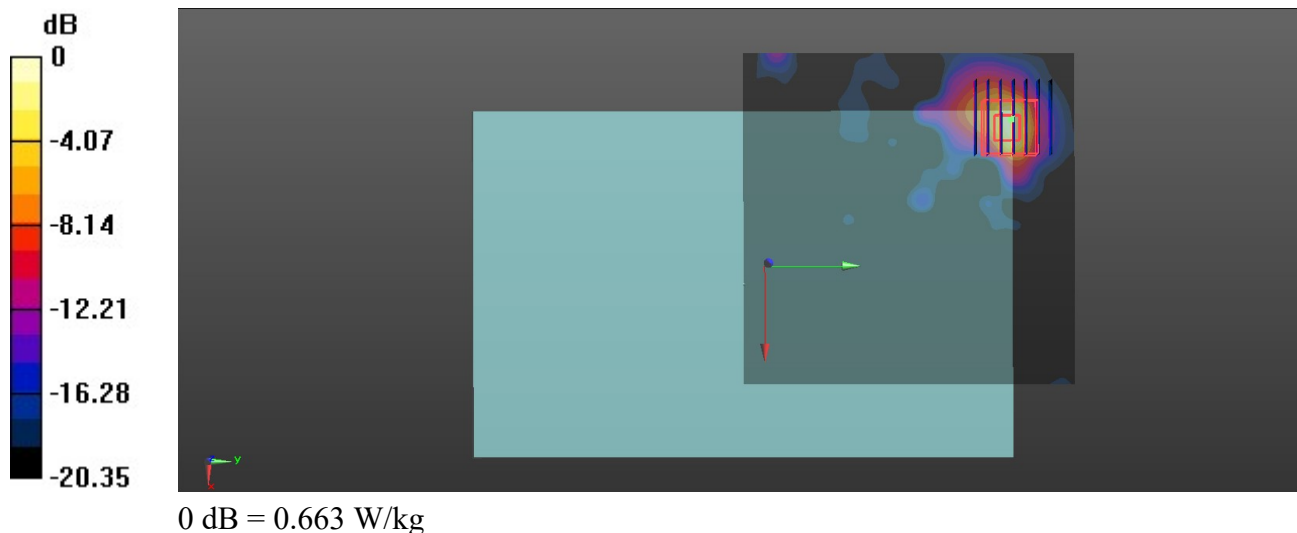

12_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0mm_Ch1

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_221016 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.693$ S/m; $\epsilon_r = 40.919$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.03, 8.03, 8.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1/Area Scan (111x111x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.15 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.929 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

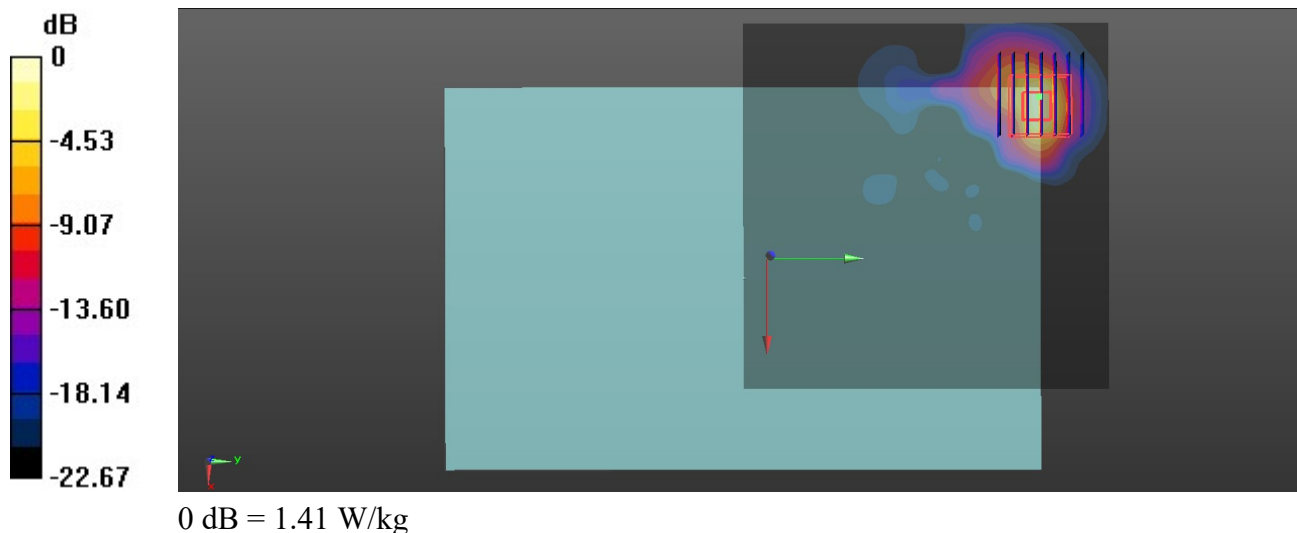

13_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch42

Communication System: UID 0, WIFI (0); Frequency: 5210 MHz; Duty Cycle: 1:1.134
 Medium: HSL_5250_221017 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.716$ S/m; $\epsilon_r = 37.062$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.4, 5.4, 5.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch42/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.49 W/kg

Ch42/Zoom Scan (9x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 1.956 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 2.37 W/kg
SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.167 W/kg
 Maximum value of SAR (measured) = 1.52 W/kg

Ch42/Zoom Scan (9x10x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 1.956 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 3.02 W/kg
SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.163 W/kg
 Maximum value of SAR (measured) = 1.45 W/kg

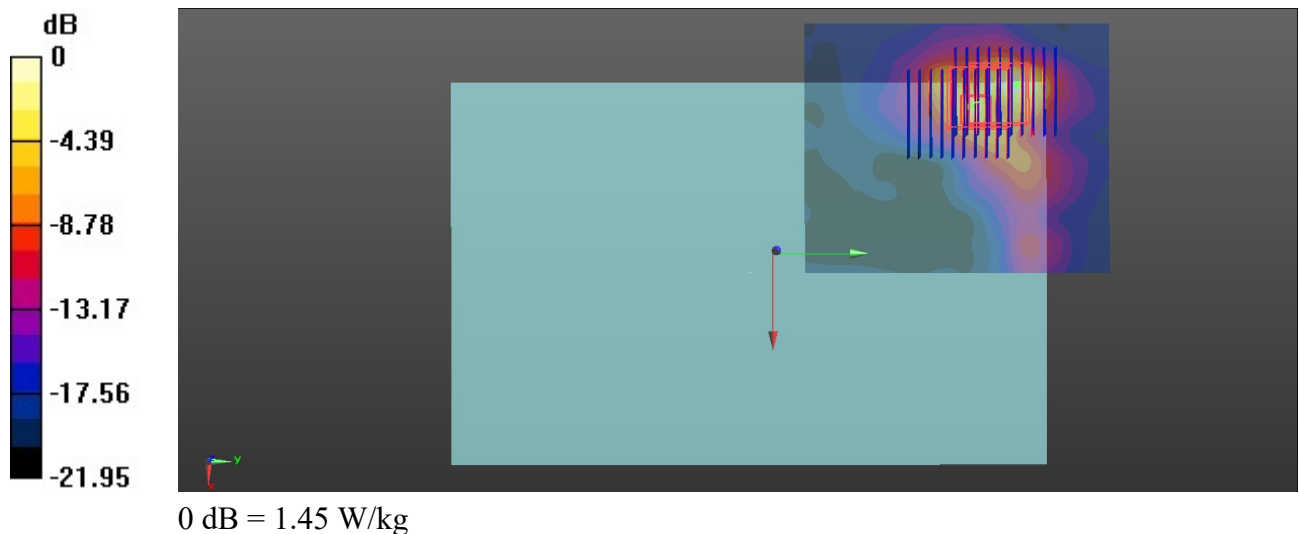

14_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch58


Communication System: UID 0, WIFI (0); Frequency: 5290 MHz; Duty Cycle: 1:1.134
Medium: HSL_5250_221017 Medium parameters used: $f = 5290$ MHz; $\sigma = 4.817$ S/m; $\epsilon_r = 36.904$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.4, 5.4, 5.4); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch58/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Ch58/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.371 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 3.54 W/kg
SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.219 W/kg
Maximum value of SAR (measured) = 1.91 W/kg

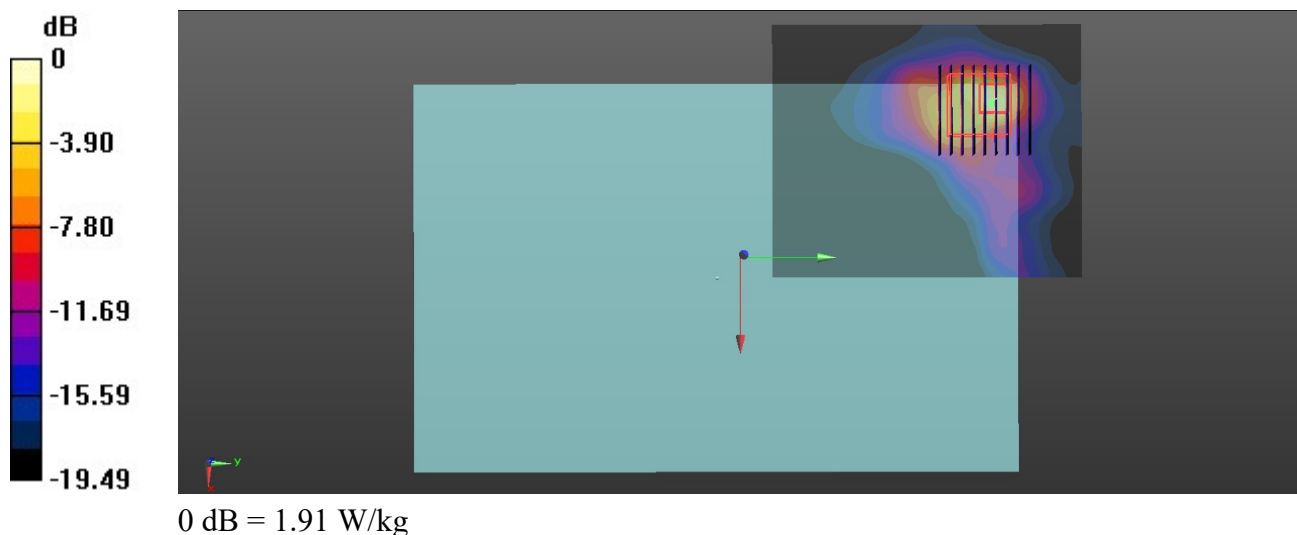

15_WLAN5GHz_802.11a 6Mbps_Edge 2_8mm_Ch100

Communication System: UID 0, WIFI (0); Frequency: 5500 MHz; Duty Cycle: 1:1.031

Medium: HSL_5600_221022 Medium parameters used: $f = 5500$ MHz; $\sigma = 4.742$ S/m; $\epsilon_r = 35.903$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(4.82, 4.82, 4.82); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch100/Area Scan (61x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.06 W/kg


Ch100/Zoom Scan (10x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.983 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

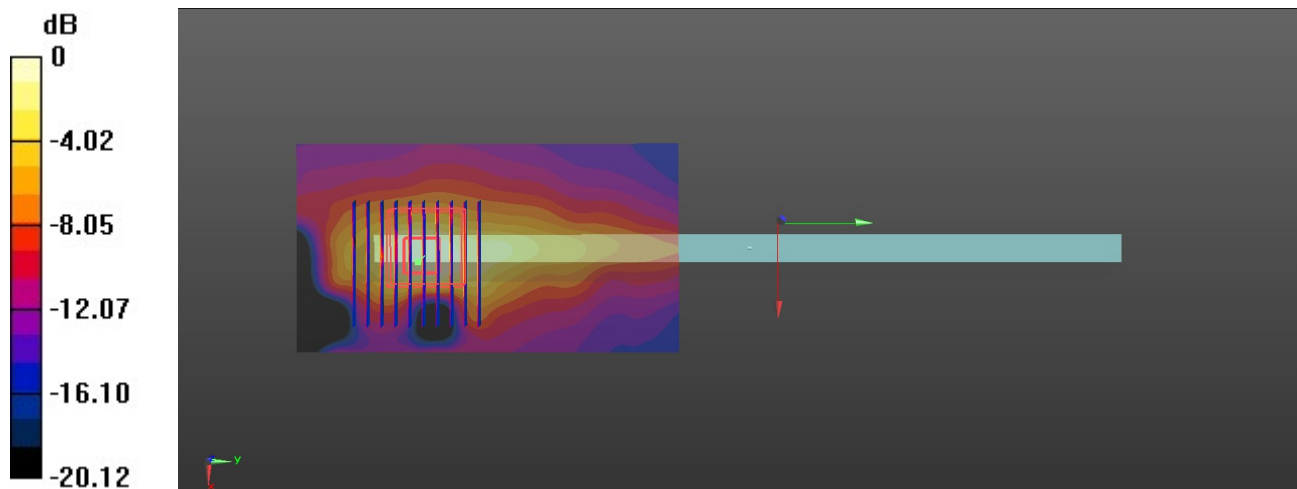

0 dB = 1.81 W/kg

16_WLAN5GHz_802.11ac-VHT80 MCS0_Bottom Face_0mm_Ch155

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.134

Medium: HSL_5750_221017 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.034$ S/m; $\epsilon_r = 35.54$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.03, 5.03, 5.03); Calibrated: 2021/11/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2021/10/26
- Phantom: ELI V8.0 (Left); Type: QD OVA 004 AA; Serial: 2131
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch155/Area Scan (91x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.909 W/kg

Ch155/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.014 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

