



# FCC RF Test Report

**APPLICANT** : Lenovo(Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : TB336ZJ  
**FCC ID** : O57TB336ZJ  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Jun. 07, 2025 ~ Jun. 26, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION.....5**

1.1 Applicant .....5

1.2 Manufacturer .....5

1.3 Product Feature of Equipment Under Test .....5

1.4 Product Specification of Equipment Under Test.....6

1.5 Modification of EUT .....7

1.6 Testing Location .....7

1.7 Test Software .....8

1.8 Applicable Standards .....8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....9**

2.1 Carrier Frequency and Channel .....9

2.2 Test Mode .....10

2.3 Connection Diagram of Test System .....12

2.4 Support Unit used in test configuration and system .....13

2.5 EUT Operation Test Setup.....13

2.6 Measurement Results Explanation Example .....13

**3 TEST RESULT .....14**

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement .....14

3.2 Maximum Conducted Output Power Measurement .....19

3.3 Power Spectral Density Measurement .....21

3.4 Unwanted Emissions Measurement .....25

3.5 AC Conducted Emission Measurement .....30

3.6 Antenna Requirements .....32

**4 LIST OF MEASURING EQUIPMENT .....33**

**5 MEASUREMENT UNCERTAINTY.....34**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR553003D	Rev. 01	Initial issue of report	Jul. 09, 2025



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.18 dB at 5458.80 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 4.27 dB at 0.158 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

<b>Conformity Assessment Condition:</b>
<ol style="list-style-type: none"> <li>The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.</li> <li>The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"</li> </ol>
<b>Disclaimer:</b>
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB336ZJ
FCC ID	O57TB336ZJ
IMEI Code	Conducted: 860228080004274/860228080004282 Conduction: 860228080002773/860228080002781 Radiation: 860228080001676
HW Version	TB336ZJ
SW Version	Lenovo ZUI 17.0
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT, for the differences please refer to the TB336ZJ\_Operational Description of Product Equality Declaration exhibit separately. After evaluation, the differences will not affect the RF performance, so we chose Sample 1 to full test.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 15.66 dBm / 0.0368 W  802.11n HT20 : 15.42 dBm / 0.0348 W  802.11n HT40 : 15.45 dBm / 0.0351 W  802.11ac VHT20: 15.40 dBm / 0.0347 W  802.11ac VHT40: 15.43 dBm / 0.0349 W  802.11ac VHT80: 11.74 dBm / 0.0149 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 15.63 dBm / 0.0366 W  802.11n HT20 : 15.53 dBm / 0.0357 W  802.11n HT40 : 15.41 dBm / 0.0348 W  802.11ac VHT20: 15.45 dBm / 0.0351 W  802.11ac VHT40: 15.40 dBm / 0.0347 W  802.11ac VHT80: 10.70 dBm / 0.0117 W</p> <p><b>&lt;5500 MHz ~ 5720 MHz &gt;</b>  802.11a : 15.99 dBm / 0.0397 W  802.11n HT20 : 15.74 dBm / 0.0375 W  802.11n HT40 : 15.77 dBm / 0.0378 W  802.11ac VHT20: 15.71 dBm / 0.0372 W  802.11ac VHT40: 15.75 dBm / 0.0376 W  802.11ac VHT80: 15.64 dBm / 0.0366 W</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 15.43 dBm / 0.0349 W  802.11n HT20 : 15.30 dBm / 0.0339 W  802.11n HT40 : 15.35 dBm / 0.0343 W  802.11ac VHT20: 15.27 dBm / 0.0337 W  802.11ac VHT40: 15.30 dBm / 0.0339 W  802.11ac VHT80: 15.18 dBm / 0.0330 W</p>
<b>99% Occupied Bandwidth</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 16.80 MHz  802.11n HT20 : 17.97 MHz  802.11n HT40 : 36.37 MHz  802.11ac VHT80 : 75.04 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 16.81 MHz  802.11n HT20 : 17.82 MHz  802.11n HT40 : 36.34 MHz  802.11ac VHT80 : 75.00 MHz</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b>  802.11a : 16.89 MHz  802.11n HT20 : 17.88 MHz  802.11n HT40 : 36.40 MHz  802.11ac VHT80 : 75.12 MHz</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 16.83 MHz  802.11n HT20 : 17.84 MHz  802.11n HT40 : 36.38 MHz  802.11ac VHT80 : 75.14 MHz</p>



<b>Antenna Type / Gain</b>	<p>&lt;5180 MHz ~ 5240 MHz&gt; PIPA Antenna type with gain -2.5 dBi</p> <p>&lt;5260 MHz ~ 5320 MHz&gt; PIPA Antenna type with gain -3.0 dBi</p> <p>&lt;5500 MHz ~ 5720 MHz&gt; PIPA Antenna type with gain -2.2 dBi</p> <p>&lt;5745 MHz ~ 5825 MHz&gt; PIPA Antenna type with gain -2.3 dBi</p>
<b>Type of Modulation</b>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)</p> <p>802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

**Note:** For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH03-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test case in section 3.1~3.3 of this report.

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 <sup>#</sup>	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "\*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#n" are 80MHz bandwidth.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : Bluetooth Link + WLAN Link (5G) + Earphone + USB Cable(Charging from Adapter)
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable.	

RSE Co-location
802.11ac VHT80 CH106 5530MHz_Tx + Part 96 n78 Tx




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

## 2.3 Connection Diagram of Test System

AC Conducted Emission:

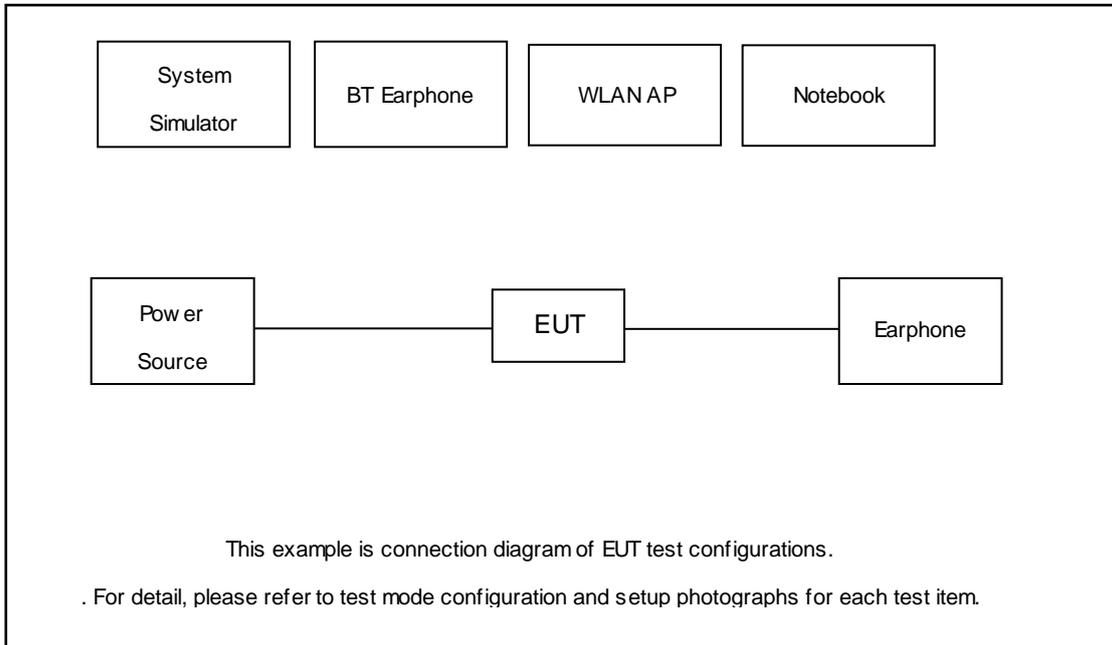

Radiated Emission:

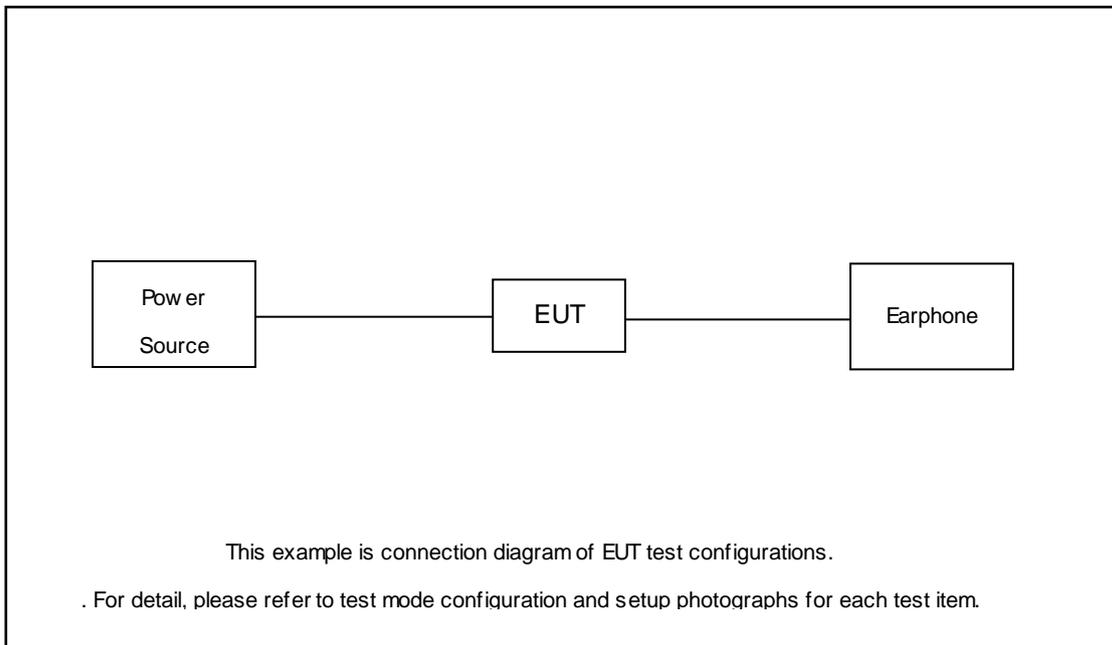

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC /P cable 1.8m
3.	WLANAP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
4.	Adapter	N/A	N/A	N/A	N/A	N/A
5.	USB Cable	N/A	N/A	N/A	N/A	N/A
6.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
7.	Earphone	N/A	N/A	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 2.80 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.80 + 10 = 12.80 \text{ (dB)}
 \end{aligned}$$



### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

##### 3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li> <li>For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.</li> <li>Measure and record the results in the test report.</li> </ol>
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> <li>Set RBW = 100kHz.</li> <li>Set the VBW ≥ 3 x RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 6 dB down from the peak of the emission.</li> <li>Measure and record the results in the test report.</li> </ol>



### 3.1.4 Test Setup







### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

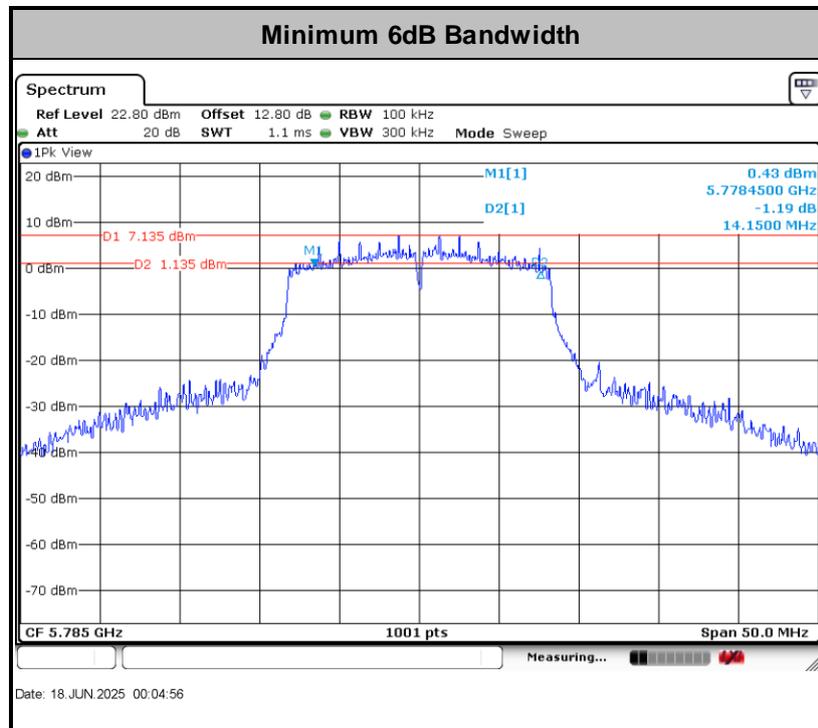

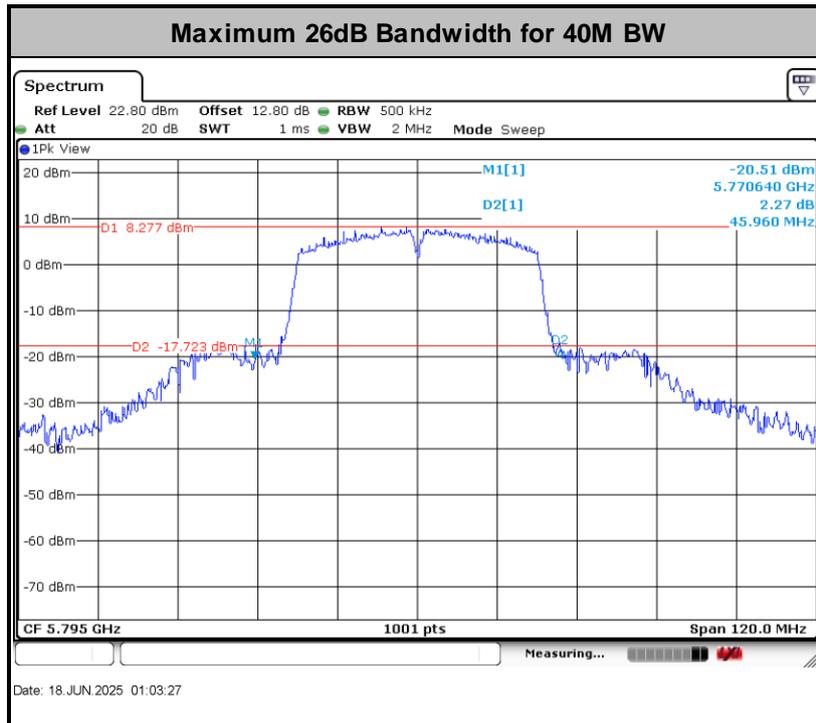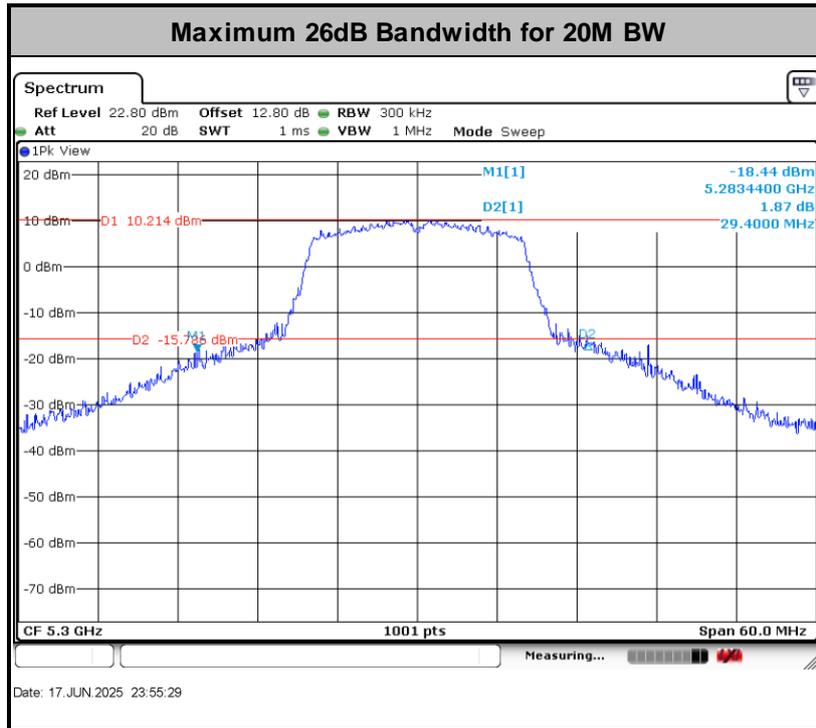

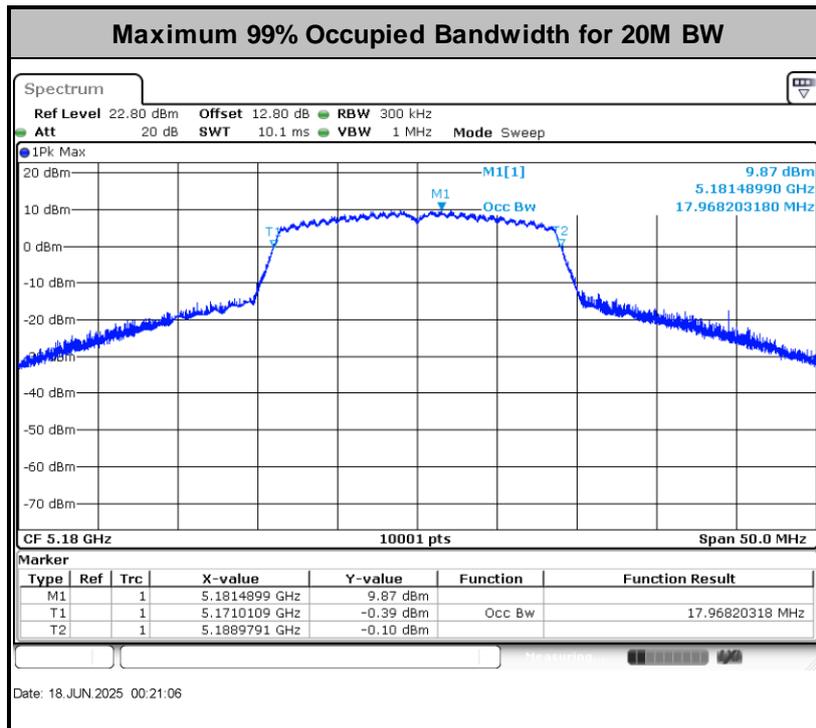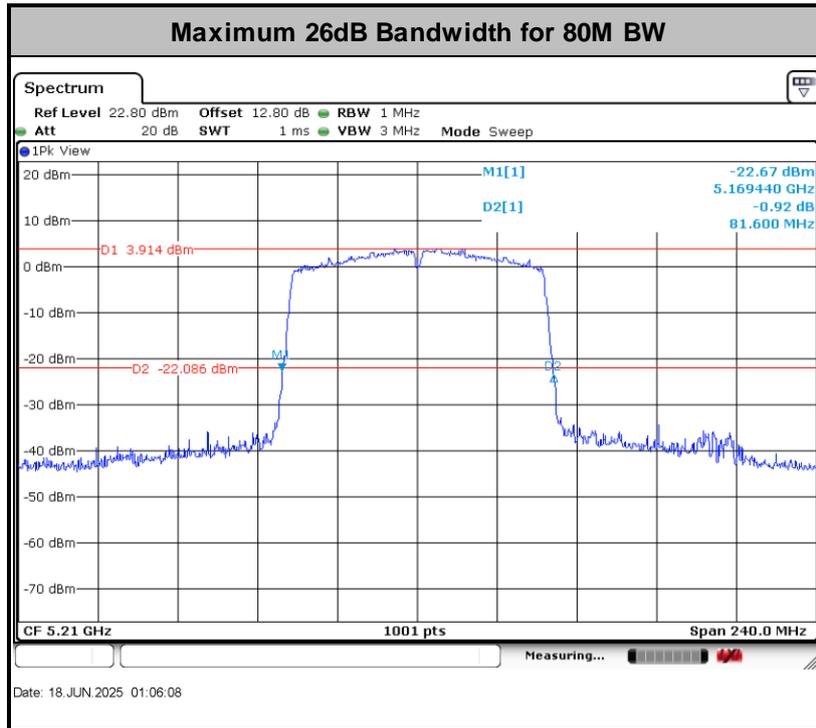

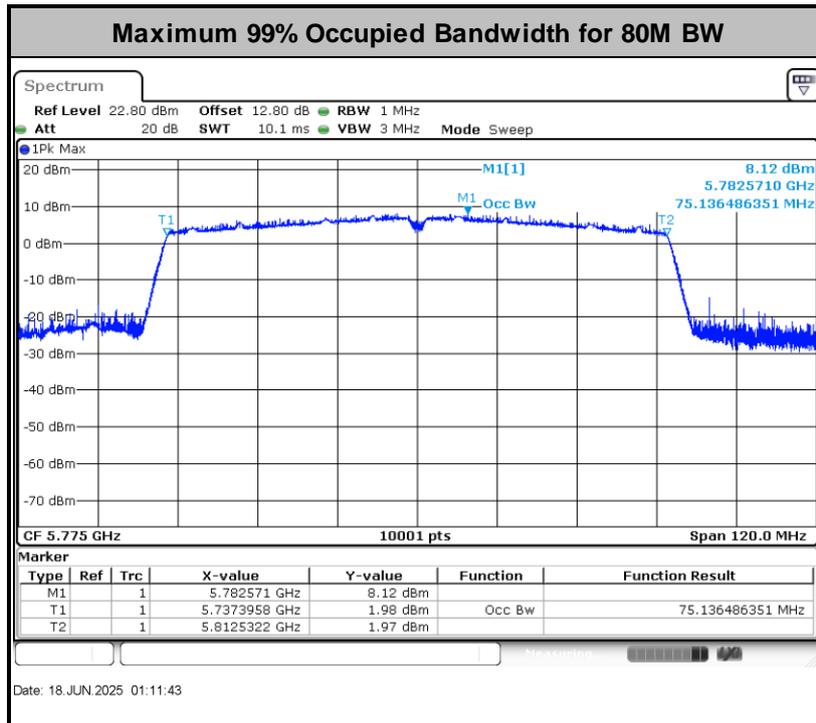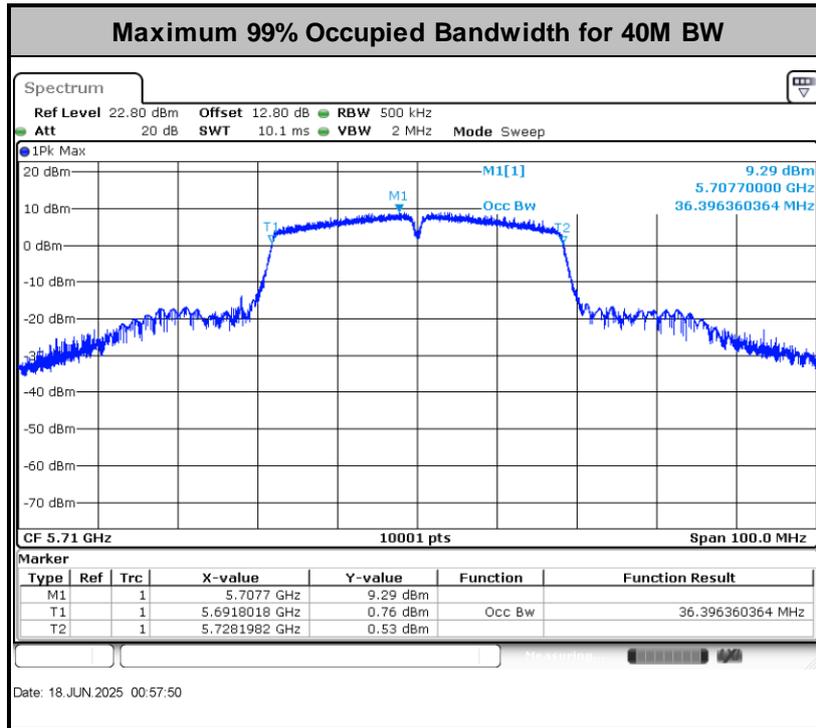

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log_{10} B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

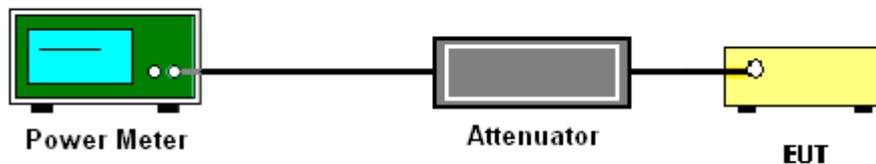

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section F) Maximum power spectral density.

#### **For devices operating in the bands UNII-1/2A/2C**

##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### **For devices operating in the band UNII-3**


##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


### 3.3.4 Test Setup



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


For devices operating in the bands UNII-1/2A/2C

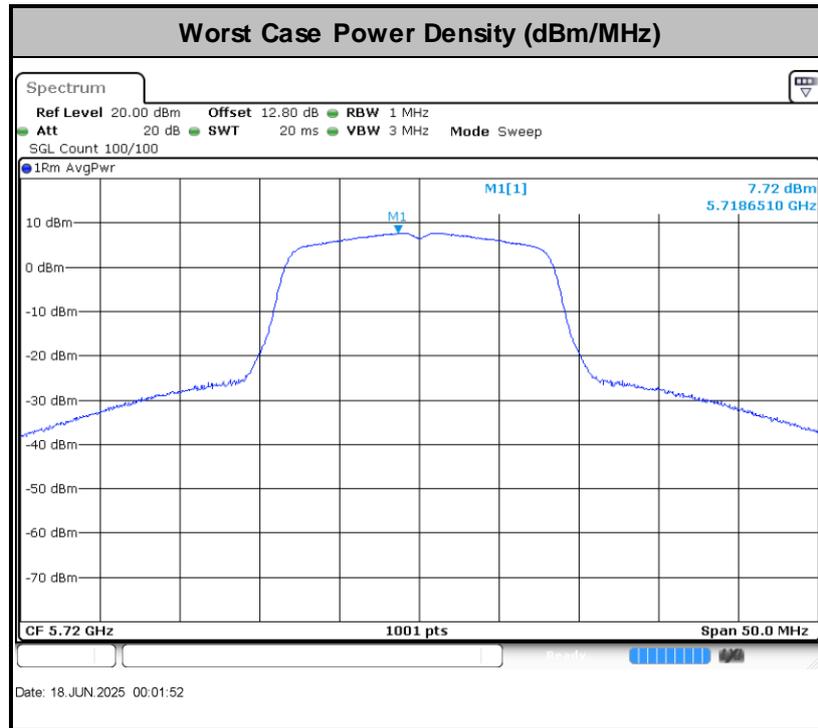

**Note:** Average Power Density (dB) = Measured value+ Duty Factor



For devices operating in the band UNII-3

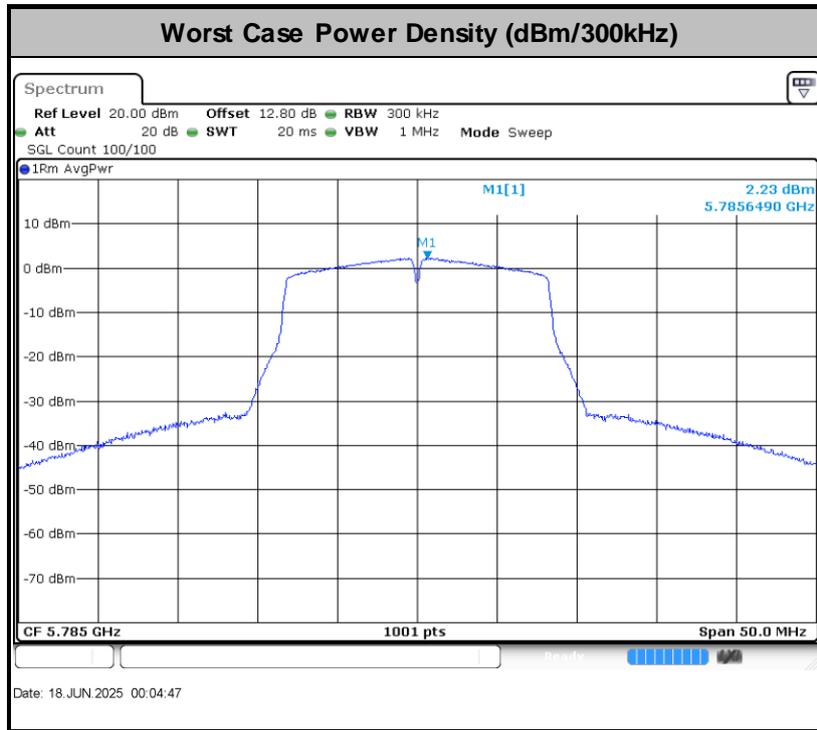

Note: Average Power Density (dB) = Measured value+ Duty Factor + 10 log(500kHz/RBW)



## 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27$  dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to  $10$  dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6$  dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27$  dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

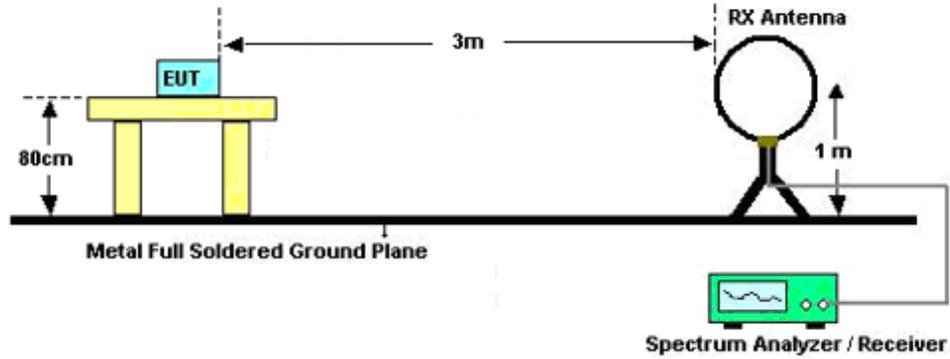

For radiated emissions from 30MHz to 1GHz

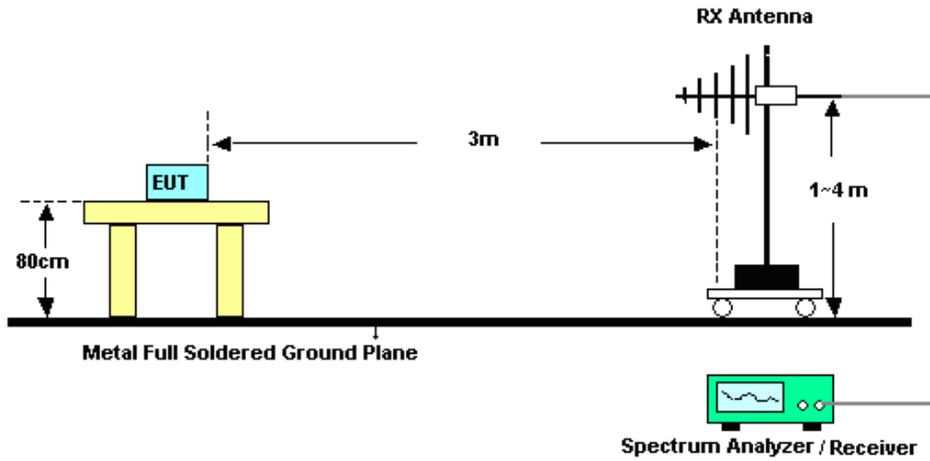

For radiated emissions above 1GHz

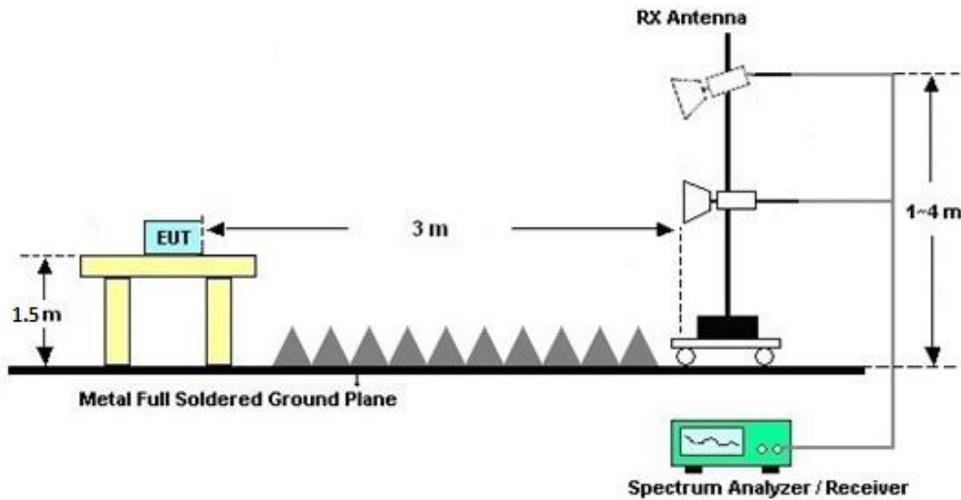



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

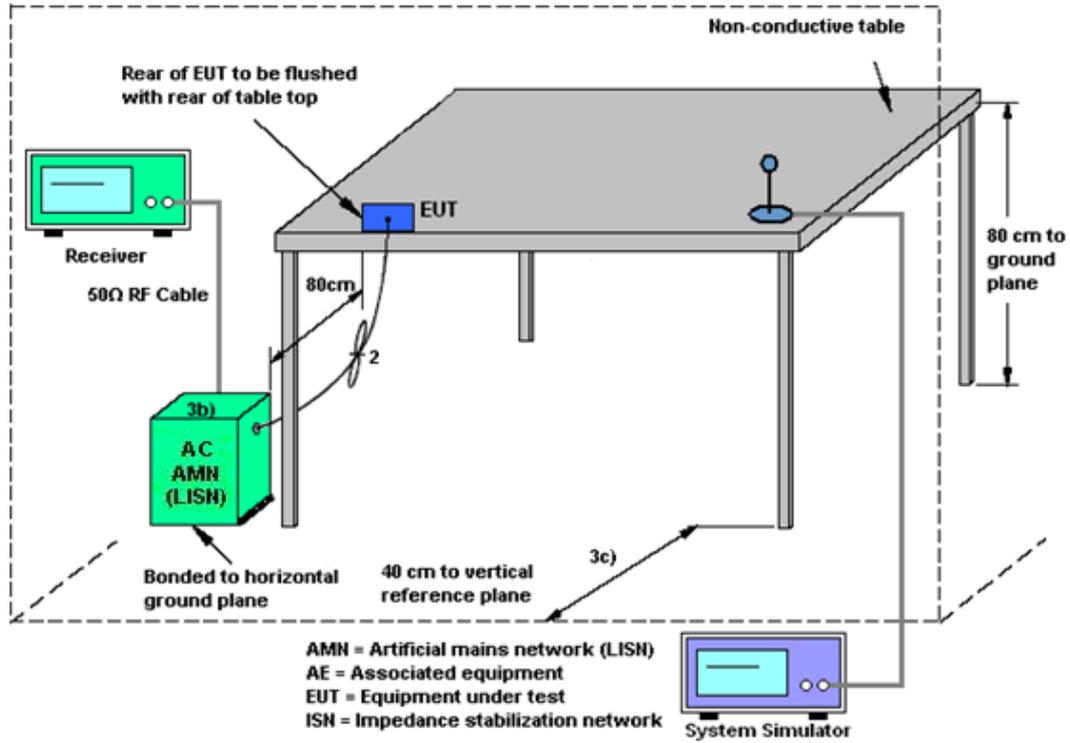

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jun. 17, 2025~ Jun. 18, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jun. 17, 2025~ Jun. 18, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2024	Jun. 17, 2025~ Jun. 18, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Jun. 26, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Jun. 26, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Jun. 26, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Jun. 26, 2025	Oct. 08, 2025	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 11, 2024	Jun. 07, 2025	Oct. 10, 2025	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2025	Jun. 07, 2025	Apr. 17, 2026	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Jun. 07, 2025	Sep. 07, 2025	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Nov. 23, 2024	Jun. 07, 2025	Nov. 22, 2025	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251982	1GHz~18GHz	Aug. 16, 2024	Jun. 07, 2025	Aug. 15, 2025	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Jun. 07, 2025	Oct. 21, 2025	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Jun. 07, 2025	Jul. 02, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Jan. 02, 2025	Jun. 07, 2025	Jan. 01, 2026	Radiation (03CH03-KS)
high gain Amplifier	EM	EM01G18GA	060834	1Ghz~18Ghz	Dec. 02, 2024	Jun. 07, 2025	Dec. 01, 2025	Radiation (03CH03-KS)
Amplifier	EM	EM01G18GA	EM	1GHz~26.5GHz	Oct. 09, 2024	Jun. 07, 2025	Oct. 08, 2025	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 07, 2025	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 07, 2025	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 07, 2025	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22 dB
---	---------

----- THE END -----



## Appendix A. Conducted Test Results

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2025/6/17~6/18	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-1										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	16.74	21.06	-	22.24		
11a	6Mbps	1	44	5220	16.79	25.44	-	22.25		
11a	6Mbps	1	48	5240	16.80	23.58	-	22.25		
HT20	MCS0	1	36	5180	17.97	22.98	-	22.54		
HT20	MCS0	1	44	5220	17.86	23.16	-	22.52		
HT20	MCS0	1	48	5240	17.81	24.30	-	22.51		
HT40	MCS0	1	38	5190	36.19	41.04	-	23.01		
HT40	MCS0	1	46	5230	36.37	45.60	-	23.01		
VHT80	MCS0	1	42	5210	75.04	81.60	-	23.01		

**TEST RESULTS DATA**  
**Average Power Table**

UNII-1										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.11	15.66	24.00	-2.50		Pass
11a	6Mbps	1	44	5220	0.11	15.56	24.00	-2.50		Pass
11a	6Mbps	1	48	5240	0.11	15.61	24.00	-2.50		Pass
HT20	MCS0	1	36	5180	0.12	15.38	24.00	-2.50		Pass
HT20	MCS0	1	44	5220	0.12	15.42	24.00	-2.50		Pass
HT20	MCS0	1	48	5240	0.12	15.40	24.00	-2.50		Pass
HT40	MCS0	1	38	5190	0.23	13.46	24.00	-2.50		Pass
HT40	MCS0	1	46	5230	0.23	15.45	24.00	-2.50		Pass
VHT20	MCS0	1	36	5180	0.12	15.35	24.00	-2.50		Pass
VHT20	MCS0	1	44	5220	0.12	15.40	24.00	-2.50		Pass
VHT20	MCS0	1	48	5240	0.12	15.38	24.00	-2.50		Pass
VHT40	MCS0	1	38	5190	0.23	13.39	24.00	-2.50		Pass
VHT40	MCS0	1	46	5230	0.23	15.43	24.00	-2.50		Pass
VHT80	MCS0	1	42	5210	0.47	11.74	24.00	-2.50		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.11	6.40	11.00	-2.50		Pass
11a	6Mbps	1	44	5220	0.11	7.63	11.00	-2.50		Pass
11a	6Mbps	1	48	5240	0.11	7.77	11.00	-2.50		Pass
HT20	MCS0	1	36	5180	0.12	6.22	11.00	-2.50		Pass
HT20	MCS0	1	44	5220	0.12	6.34	11.00	-2.50		Pass
HT20	MCS0	1	48	5240	0.12	6.42	11.00	-2.50		Pass
HT40	MCS0	1	38	5190	0.23	0.34	11.00	-2.50		Pass
HT40	MCS0	1	46	5230	0.23	3.59	11.00	-2.50		Pass
VHT80	MCS0	1	42	5210	0.47	-4.27	11.00	-2.50		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-2A										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.80	24.60	23.25	29.25	23.98	
11a	6M bps	1	60	5300	16.81	29.40	23.26	29.26	23.98	
11a	6M bps	1	64	5320	16.74	20.34	23.24	29.24	23.98	
HT20	MCS 0	1	52	5260	17.82	21.00	23.51	29.51	23.98	
HT20	MCS 0	1	60	5300	17.80	24.24	23.50	29.50	23.98	
HT20	MCS 0	1	64	5320	17.81	20.88	23.51	29.51	23.98	
HT40	MCS 0	1	54	5270	36.34	45.60	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.12	41.16	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.00	81.60	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.11	15.58	23.98	-3.00	26.99	Pass
11a	6M bps	1	60	5300	0.11	15.56	23.98	-3.00	26.99	Pass
11a	6M bps	1	64	5320	0.11	15.63	23.98	-3.00	26.99	Pass
HT20	MCS 0	1	52	5260	0.12	15.46	23.98	-3.00	26.99	Pass
HT20	MCS 0	1	60	5300	0.12	15.50	23.98	-3.00	26.99	Pass
HT20	MCS 0	1	64	5320	0.12	15.53	23.98	-3.00	26.99	Pass
HT40	MCS 0	1	54	5270	0.23	15.41	23.98	-3.00	26.99	Pass
HT40	MCS 0	1	62	5310	0.23	12.44	23.98	-3.00	26.99	Pass
VHT20	MCS 0	1	52	5260	0.12	15.39	23.98	-3.00	26.99	Pass
VHT20	MCS 0	1	60	5300	0.12	15.45	23.98	-3.00	26.99	Pass
VHT20	MCS 0	1	64	5320	0.12	15.41	23.98	-3.00	26.99	Pass
VHT40	MCS 0	1	54	5270	0.23	15.40	23.98	-3.00	26.99	Pass
VHT40	MCS 0	1	62	5310	0.23	12.30	23.98	-3.00	26.99	Pass
VHT80	MCS 0	1	58	5290	0.47	10.70	23.98	-3.00	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.11	7.79	11.00	-3.00		Pass
11a	6M bps	1	60	5300	0.11	7.52	11.00	-3.00		Pass
11a	6M bps	1	64	5320	0.11	5.38	11.00	-3.00		Pass
HT20	MCS 0	1	52	5260	0.12	6.58	11.00	-3.00		Pass
HT20	MCS 0	1	60	5300	0.12	6.35	11.00	-3.00		Pass
HT20	MCS 0	1	64	5320	0.12	5.13	11.00	-3.00		Pass
HT40	MCS 0	1	54	5270	0.23	3.63	11.00	-3.00		Pass
HT40	MCS 0	1	62	5310	0.23	-0.71	11.00	-3.00		Pass
VHT80	MCS 0	1	58	5290	0.47	-5.34	11.00	-3.00		Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-2C										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	16.73	21.24	23.23	29.23	23.98	
11a	6M bps	1	116	5580	16.89	23.58	23.28	29.28	23.98	
11a	6M bps	1	140	5700	16.66	20.28	23.22	29.22	23.98	
11a	6Mbps	1	144	5720	16.85	27.36	23.27	29.27	23.98	
HT20	MCS 0	1	100	5500	17.80	20.58	23.50	29.50	23.98	
HT20	MCS 0	1	116	5580	17.84	23.28	23.51	29.51	23.98	
HT20	MCS 0	1	140	5700	17.78	20.58	23.50	29.50	23.98	
HT20	MCS0	1	144	5720	17.88	24.24	23.52	29.52	23.98	
HT40	MCS 0	1	102	5510	36.12	41.16	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.40	42.48	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.16	41.16	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	36.40	43.56	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.02	81.36	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.08	81.60	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	75.12	81.60	23.98	30.00	23.98	

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2C										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.11	15.99	23.98	-2.20	26.99	Pass
11a	6M bps	1	116	5580	0.11	15.69	23.98	-2.20	26.99	Pass
11a	6M bps	1	140	5700	0.11	14.16	23.98	-2.20	26.99	Pass
11a	6M bps	1	144	5720	0.11	15.84	23.98	-2.20	26.99	Pass
HT20	MCS 0	1	100	5500	0.12	15.56	23.98	-2.20	26.99	Pass
HT20	MCS 0	1	116	5580	0.12	15.60	23.98	-2.20	26.99	Pass
HT20	MCS 0	1	140	5700	0.12	14.28	23.98	-2.20	26.99	Pass
HT20	MCS 0	1	144	5720	0.12	15.74	23.98	-2.20	26.99	Pass
HT40	MCS 0	1	102	5510	0.23	12.66	23.98	-2.20	26.99	Pass
HT40	MCS 0	1	110	5550	0.23	15.68	23.98	-2.20	26.99	Pass
HT40	MCS 0	1	134	5670	0.23	12.69	23.98	-2.20	26.99	Pass
HT40	MCS 0	1	142	5710	0.23	15.77	23.98	-2.20	26.99	Pass
VHT20	MCS 0	1	100	5500	0.12	15.03	23.98	-2.20	26.99	Pass
VHT20	MCS 0	1	116	5580	0.12	15.55	23.98	-2.20	26.99	Pass
VHT20	MCS 0	1	140	5700	0.12	14.14	23.98	-2.20	26.99	Pass
VHT20	MCS 0	1	144	5720	0.12	15.71	23.98	-2.20	26.99	Pass
VHT40	MCS 0	1	102	5510	0.23	12.50	23.98	-2.20	26.99	Pass
VHT40	MCS 0	1	110	5550	0.23	15.65	23.98	-2.20	26.99	Pass
VHT40	MCS 0	1	134	5670	0.23	12.57	23.98	-2.20	26.99	Pass
VHT40	MCS 0	1	142	5710	0.23	15.75	23.98	-2.20	26.99	Pass
VHT80	MCS 0	1	106	5530	0.47	12.41	23.98	-2.20	26.99	Pass
VHT80	MCS 0	1	122	5610	0.47	15.53	23.98	-2.20	26.99	Pass
VHT80	MCS 0	1	138	5690	0.47	15.64	23.98	-2.20	26.99	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-2C										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.11	6.14	11.00	-2.20		Pass
11a	6M bps	1	116	5580	0.11	7.62	11.00	-2.20		Pass
11a	6M bps	1	140	5700	0.11	4.15	11.00	-2.20		Pass
11a	6Mbps	1	144	5720	0.11	7.83	11.00	-2.20		Pass
HT20	MCS 0	1	100	5500	0.12	4.94	11.00	-2.20		Pass
HT20	MCS 0	1	116	5580	0.12	6.37	11.00	-2.20		Pass
HT20	MCS 0	1	140	5700	0.12	3.90	11.00	-2.20		Pass
HT20	MCS0	1	144	5720	0.12	6.63	11.00	-2.20		Pass
HT40	MCS 0	1	102	5510	0.23	-0.52	11.00	-2.20		Pass
HT40	MCS 0	1	110	5550	0.23	3.52	11.00	-2.20		Pass
HT40	MCS 0	1	134	5670	0.23	-0.74	11.00	-2.20		Pass
HT40	MCS0	1	142	5710	0.23	3.78	11.00	-2.20		Pass
VHT80	MCS 0	1	106	5530	0.47	-3.71	11.00	-2.20		Pass
VHT80	MCS 0	1	122	5610	0.47	-0.50	11.00	-2.20		Pass
VHT80	MCS0	1	138	5690	0.47	-0.59	11.00	-2.20		Pass

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

UNII-3									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.78	23.76	15.20	0.5	Pass
11a	6Mbps	1	157	5785	16.81	24.12	14.15	0.5	Pass
11a	6Mbps	1	165	5825	16.83	22.56	15.20	0.5	Pass
HT20	MCS 0	1	149	5745	17.83	22.86	15.15	0.5	Pass
HT20	MCS 0	1	157	5785	17.81	22.98	15.15	0.5	Pass
HT20	MCS 0	1	165	5825	17.84	24.12	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	36.38	42.36	35.28	0.5	Pass
HT40	MCS 0	1	159	5795	36.37	45.96	35.28	0.5	Pass
VHT80	MCS 0	1	155	5775	75.14	81.60	75.52	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

UNII-3										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.11	15.40	30.00	-2.30		Pass
11a	6Mbps	1	157	5785	0.11	15.43	30.00	-2.30		Pass
11a	6Mbps	1	165	5825	0.11	15.43	30.00	-2.30		Pass
HT20	MCS 0	1	149	5745	0.12	15.22	30.00	-2.30		Pass
HT20	MCS 0	1	157	5785	0.12	15.25	30.00	-2.30		Pass
HT20	MCS 0	1	165	5825	0.12	15.30	30.00	-2.30		Pass
HT40	MCS 0	1	151	5755	0.23	15.31	30.00	-2.30		Pass
HT40	MCS 0	1	159	5795	0.23	15.35	30.00	-2.30		Pass
VHT20	MCS 0	1	149	5745	0.12	15.21	30.00	-2.30		Pass
VHT20	MCS 0	1	157	5785	0.12	15.24	30.00	-2.30		Pass
VHT20	MCS 0	1	165	5825	0.12	15.27	30.00	-2.30		Pass
VHT40	MCS 0	1	151	5755	0.23	15.28	30.00	-2.30		Pass
VHT40	MCS 0	1	159	5795	0.23	15.30	30.00	-2.30		Pass
VHT80	MCS 0	1	155	5775	0.47	15.18	30.00	-2.30		Pass


**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-3										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.11	2.22	4.55	30.00	-2.30	Pass
11a	6Mbps	1	157	5785	0.11	2.22	4.56	30.00	-2.30	Pass
11a	6Mbps	1	165	5825	0.11	2.22	4.48	30.00	-2.30	Pass
HT20	MCS 0	1	149	5745	0.12	2.22	3.38	30.00	-2.30	Pass
HT20	MCS 0	1	157	5785	0.12	2.22	3.17	30.00	-2.30	Pass
HT20	MCS 0	1	165	5825	0.12	2.22	3.32	30.00	-2.30	Pass
HT40	MCS 0	1	151	5755	0.23	2.22	0.50	30.00	-2.30	Pass
HT40	MCS 0	1	159	5795	0.23	2.22	0.36	30.00	-2.30	Pass
VHT80	MCS 0	1	155	5775	0.47	2.22	-3.38	30.00	-2.30	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Eko	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

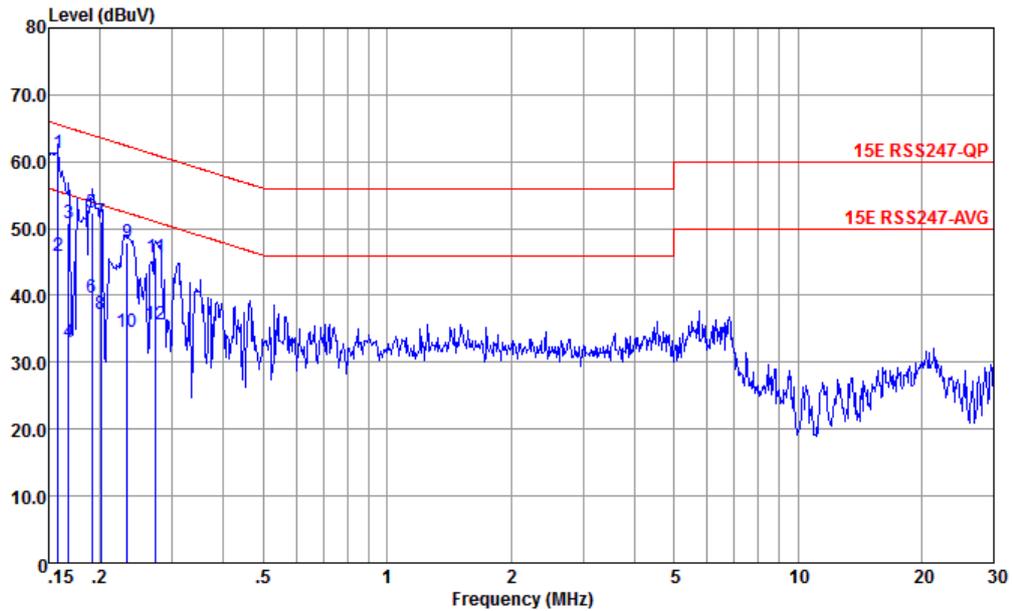


Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.158	61.29	-4.27	65.56	50.60	0.24	10.45	QP
2	0.158	45.89	-9.67	55.56	35.20	0.24	10.45	Average
3	0.168	50.80	-14.28	65.08	40.10	0.25	10.45	QP
4	0.168	33.00	-22.08	55.08	22.30	0.25	10.45	Average
5	0.191	52.41	-11.57	63.98	41.70	0.25	10.46	QP
6	0.191	39.61	-14.37	53.98	28.90	0.25	10.46	Average
7	0.201	51.01	-12.57	63.58	40.30	0.25	10.46	QP
8	0.201	37.21	-16.37	53.58	26.50	0.25	10.46	Average
9	0.233	47.94	-14.41	62.35	37.20	0.27	10.47	QP
10	0.233	34.64	-17.71	52.35	23.90	0.27	10.47	Average
11	0.273	45.67	-15.36	61.03	34.90	0.30	10.47	QP
12	0.273	35.67	-15.36	51.03	24.90	0.30	10.47	Average



Test Engineer :	Eko	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

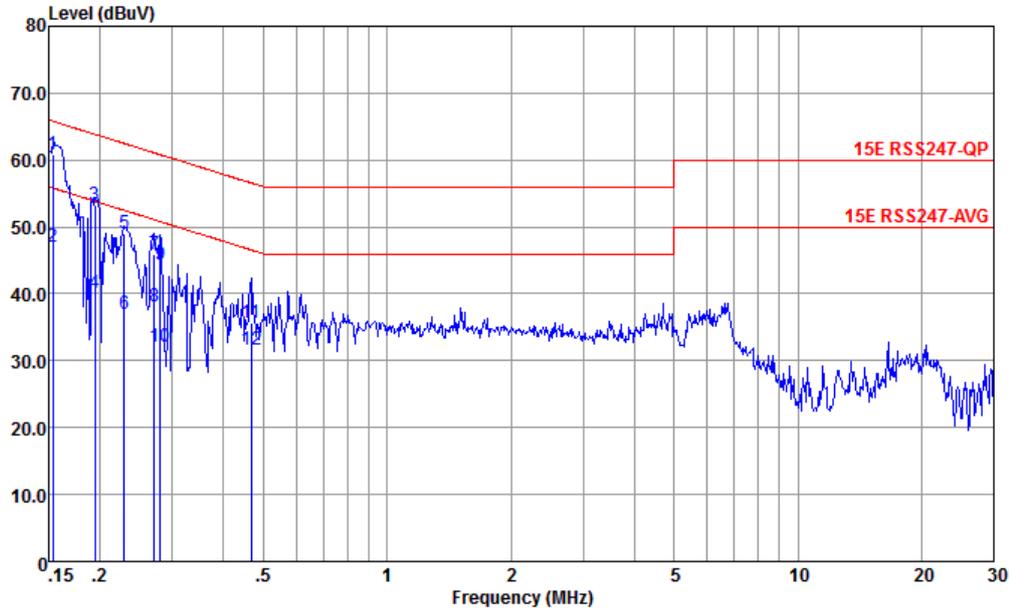

Site : CO01-KS  
 Condition : 15E RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.153	60.88	-4.94	65.82	50.20	0.23	10.45	QP
2	0.153	46.98	-8.84	55.82	36.30	0.23	10.45	Average
3	0.194	53.20	-10.64	63.84	42.50	0.24	10.46	QP
4	0.194	40.20	-13.64	53.84	29.50	0.24	10.46	Average
5	0.229	49.02	-13.46	62.48	38.29	0.26	10.47	QP
6	0.229	37.02	-15.46	52.48	26.29	0.26	10.47	Average
7	0.272	45.95	-15.12	61.07	35.20	0.28	10.47	QP
8	0.272	38.05	-13.02	51.07	27.30	0.28	10.47	Average
9	0.280	44.36	-16.45	60.81	33.61	0.28	10.47	QP
10	0.280	32.16	-18.65	50.81	21.41	0.28	10.47	Average
11	0.466	35.68	-20.90	56.58	24.91	0.34	10.43	QP
12	0.466	31.68	-14.90	46.58	20.91	0.34	10.43	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	Jake zhou	Relative Humidity :	52~56%
		Temperature :	22~25°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	SISO	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	SISO	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	SISO	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	SISO	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	SISO	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	SISO	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	SISO	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	SISO	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	SISO	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	SISO	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	SISO	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	SISO	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	SISO	802.11n HT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	SISO	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	SISO	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	SISO	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	SISO	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	SISO	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	SISO	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	SISO	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	SISO	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	SISO	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	SISO	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	SISO	802.11n HT40	110	5550	MCS0	-	-
Mode 25	U-NII-2C	5.47-5.725	SISO	802.11n HT40	134	5670	MCS0	-	-
Mode 26	U-NII-1	5.15-5.25	SISO	802.11ac VHT80	42	5210	MCS0	-	-
Mode 27	U-NII-2A	5.25-5.35	SISO	802.11ac VHT80	58	5290	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	SISO	802.11ac VHT80	106	5530	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.725	SISO	802.11ac VHT80	122	5610	MCS0	-	-
Mode 30	U-NII-3	5.725-5.85	SISO	802.11a	149	5745	6Mbps	-	-
Mode 31	U-NII-3	5.725-5.85	SISO	802.11a	157	5785	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	SISO	802.11a	165	5825	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	SISO	802.11n HT20	149	5745	MCS0	-	-
Mode 34	U-NII-3	5.725-5.85	SISO	802.11n HT20	157	5785	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	SISO	802.11n HT20	165	5825	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	SISO	802.11n HT40	151	5755	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	SISO	802.11n HT40	159	5795	MCS0	-	-



Mode 38	U-NII-3	5.725-5.85	SISO	802.11ac VHT80	155	5775	MCS0	-	-
Mode 39	U-NII-2C	5.47-5.725	SISO	802.11a	144	5720	6Mbps	-	-
Mode 40	U-NII-2C	5.47-5.725	SISO	802.11n HT20	144	5720	6Mbps	-	-
Mode 41	U-NII-2C	5.47-5.725	SISO	802.11n HT40	142	5710	6Mbps	-	-
Mode 42	U-NII-2C	5.47-5.725	SISO	802.11ac VHT80	138	5690	6Mbps	-	-

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.80	50.46	54.00	-3.54	H	AVERAGE	Pass	Band Edge
1	802.11a	36	15540.00	50.72	54.00	-3.28	H	AVERAGE	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	15660.00	50.52	54.00	-3.48	H	AVERAGE	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	15720.00	49.14	54.00	-4.86	H	AVERAGE	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	15780.00	45.91	54.00	-8.09	H	AVERAGE	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	44.96	54.00	-9.04	H	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.40	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	37.85	54.00	-16.15	H	AVERAGE	Pass	Harmonic
7	802.11a	100	5467.44	63.82	68.20	-4.38	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	49.01	68.20	-19.19	V	PEAK	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	42.63	54.00	-11.37	H	AVERAGE	Pass	Harmonic
9	802.11a	140	5727.00	63.45	68.20	-4.75	H	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	44.11	74.00	-29.89	H	PEAK	Pass	Harmonic
10	802.11n HT20	36	5149.70	50.09	54.00	-3.91	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	15540.00	48.74	54.00	-5.26	H	AVERAGE	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	15660.00	47.95	54.00	-6.05	H	AVERAGE	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	15720.00	48.50	54.00	-5.50	H	AVERAGE	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	15780.00	45.38	54.00	-8.62	H	AVERAGE	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	15900.00	39.10	54.00	-14.90	H	AVERAGE	Pass	Harmonic
15	802.11n HT20	64	5350.80	50.07	54.00	-3.93	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	38.73	54.00	-15.27	H	AVERAGE	Pass	Harmonic
16	802.11n HT20	100	5464.08	64.79	68.20	-3.41	H	PEAK	Pass	Band Edge
16	802.11n HT20	100	11000.00	38.34	54.00	-15.66	H	AVERAGE	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	11160.00	40.13	54.00	-13.87	H	AVERAGE	Pass	Harmonic
18	802.11n HT20	140	5726.60	65.00	68.20	-3.20	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	11400.00	38.22	54.00	-15.78	H	AVERAGE	Pass	Harmonic
19	802.11n HT40	38	5149.92	50.63	54.00	-3.37	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	15570.00	39.22	54.00	-14.78	H	AVERAGE	Pass	Harmonic
20	802.11n HT40	46	-	-	-	-	-	-	-	Band Edge



20	802.11n HT40	46	15690.00	45.31	54.00	-8.69	H	AVERAGE	Pass	Harmonic
21	802.11n HT40	54	-	-	-	-	-	-	-	Band Edge
21	802.11n HT40	54	15810.00	42.73	54.00	-11.27	H	AVERAGE	Pass	Harmonic
22	802.11n HT40	62	5353.60	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	15930.00	45.17	74.00	-28.83	V	PEAK	Pass	Harmonic
23	802.11n HT40	102	5462.96	64.7	68.20	-3.5	H	PEAK	Pass	Band Edge
23	802.11n HT40	102	16530.00	45.82	68.20	-22.38	H	PEAK	Pass	Harmonic
24	802.11n HT40	110	-	-	-	-	-	-	-	Band Edge
24	802.11n HT40	110	11100.00	37.83	54.00	-16.17	V	AVERAGE	Pass	Harmonic
25	802.11n HT40	134	5726.36	64.11	68.20	-4.09	H	PEAK	Pass	Band Edge
25	802.11n HT40	134	17010.00	44.75	68.20	-23.45	V	PEAK	Pass	Harmonic
26	802.11ac VHT80	42	5149.76	50.73	54.00	-3.27	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	42	15630.00	38.38	54.00	-15.62	H	AVERAGE	Pass	Harmonic
27	802.11ac VHT80	58	5350.40	50.78	54.00	-3.22	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	58	10580.00	42.86	68.20	-25.34	H	PEAK	Pass	Harmonic
28	802.11ac VHT80	106	5458.00	50.80	54.00	-3.20	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	106	11060.00	44.00	74.00	-30.00	H	PEAK	Pass	Harmonic
29	802.11ac VHT80	122	5729.88	64.77	68.20	-3.43	H	PEAK	Pass	Band Edge
29	802.11ac VHT80	122	11220.00	43.52	74.00	-30.48	V	PEAK	Pass	Harmonic
30	802.11a	149	5646.40	52.97	68.20	-15.23	H	PEAK	Pass	Band Edge
30	802.11a	149	11490.00	44.60	54.00	-9.40	H	AVERAGE	Pass	Harmonic
31	802.11a	157	-	-	-	-	-	-	-	Band Edge
31	802.11a	157	11570.00	43.95	54.00	-10.05	H	AVERAGE	Pass	Harmonic
32	802.11a	165	5933.20	52.36	68.20	-15.84	H	PEAK	Pass	Band Edge
32	802.11a	165	11650.00	41.82	54.00	-12.18	H	AVERAGE	Pass	Harmonic
33	802.11n HT20	149	5650.40	52.83	68.50	-15.67	H	PEAK	Pass	Band Edge
33	802.11n HT20	149	17235.00	47.85	68.20	-20.35	H	PEAK	Pass	Harmonic
34	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
34	802.11n HT20	157	11570.00	42.79	54.00	-11.21	H	AVERAGE	Pass	Harmonic
35	802.11n HT20	165	5928.00	52.84	68.20	-15.36	H	PEAK	Pass	Band Edge
35	802.11n HT20	165	17475.00	48.21	68.20	-19.99	H	PEAK	Pass	Harmonic
36	802.11n HT40	151	5635.34	57.60	68.20	-10.60	H	PEAK	Pass	Band Edge
36	802.11n HT40	151	17265.00	45.50	68.20	-22.70	H	PEAK	Pass	Harmonic
37	802.11n HT40	159	5933.20	56.08	68.20	-12.12	H	PEAK	Pass	Band Edge
37	802.11n HT40	159	17385.00	44.61	68.20	-23.59	H	PEAK	Pass	Harmonic
38	802.11ac VHT80	155	5635.60	60.73	68.20	-7.47	H	PEAK	Pass	Band Edge
38	802.11ac VHT80	155	17325.00	45.23	68.20	-22.97	H	PEAK	Pass	Harmonic
39	802.11a	144	-	-	-	-	-	-	-	Band Edge
39	802.11a	144	11440.00	41.74	54.00	-12.26	H	AVERAGE	Pass	Harmonic
40	802.11n HT20	144	-	-	-	-	-	-	-	Band Edge
40	802.11n HT20	144	11440.00	39.96	54.00	-14.04	H	AVERAGE	Pass	Harmonic
41	802.11n HT40	142	-	-	-	-	-	-	-	Band Edge
41	802.11n HT40	142	11420.00	39.31	54.00	-14.69	H	AVERAGE	Pass	Harmonic
42	802.11ac VHT80	138	-	-	-	-	-	-	-	Band Edge
42	802.11ac VHT80	138	17070.50	48.31	68.20	-19.89	V	Peak	Pass	Harmonic



### Co-location Mode:

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 43	U-NII-2C	5.47-5.725	SISO	802.11ac VHT80	106	5530	MCS0	-	-
	Part 96 N78 BW=100M								

### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
43	802.11ac VHT80	106	5458.80	50.82	54.00	-3.18	H	AVERAGE	Pass	Band Edge
43	802.11ac VHT80	106	11060.00	44.41	74.00	-29.59	V	PEAK	Pass	Harmonic



Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.20</td> <td>66.35</td> <td>74.00</td> <td>-7.65</td> <td>59.11</td> <td>34.03</td> <td>10.65</td> <td>37.44</td> <td>0.00</td> <td>132</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5144.20	66.35	74.00	-7.65	59.11	34.03	10.65	37.44	0.00	132	180	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>112.90</td> <td>-----</td> <td>-----</td> <td>105.51</td> <td>34.13</td> <td>10.68</td> <td>37.42</td> <td>0.00</td> <td>132</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	112.90	-----	-----	105.51	34.13	10.68	37.42	0.00	132	180	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5144.20	66.35	74.00	-7.65	59.11	34.03	10.65	37.44	0.00	132	180	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	112.90	-----	-----	105.51	34.13	10.68	37.42	0.00	132	180	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.80</td> <td>50.46</td> <td>54.00</td> <td>-3.54</td> <td>43.19</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>132</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.80	50.46	54.00	-3.54	43.19	34.05	10.65	37.43	0.00	132	180	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.60</td> <td>-----</td> <td>-----</td> <td>97.18</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>132</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	104.60	-----	-----	97.18	34.15	10.69	37.42	0.00	132	180	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.80	50.46	54.00	-3.54	43.19	34.05	10.65	37.43	0.00	132	180	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	104.60	-----	-----	97.18	34.15	10.69	37.42	0.00	132	180	AVERAGE																																																																														



Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.90</td> <td>61.53</td> <td>74.00</td> <td>-12.47</td> <td>54.28</td> <td>34.04</td> <td>10.65</td> <td>37.44</td> <td>0.00</td> <td>174</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.90	61.53	74.00	-12.47	54.28	34.04	10.65	37.44	0.00	174	184	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.54</td> <td>-----</td> <td>-----</td> <td>102.12</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>174</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	109.54	-----	-----	102.12	34.15	10.69	37.42	0.00	174	184	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.90	61.53	74.00	-12.47	54.28	34.04	10.65	37.44	0.00	174	184	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	109.54	-----	-----	102.12	34.15	10.69	37.42	0.00	174	184	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.90</td> <td>47.52</td> <td>54.00</td> <td>-6.48</td> <td>40.25</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>174</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.90	47.52	54.00	-6.48	40.25	34.05	10.65	37.43	0.00	174	184	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.58</td> <td>-----</td> <td>-----</td> <td>93.16</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>174</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	100.58	-----	-----	93.16	34.15	10.69	37.42	0.00	174	184	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.90	47.52	54.00	-6.48	40.25	34.05	10.65	37.43	0.00	174	184	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	100.58	-----	-----	93.16	34.15	10.69	37.42	0.00	174	184	AVERAGE																																																																														



Mode	1																																																																																																																																															
	Harmonic																																																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																															
ANT	SISO																																																																																																																																															
Pol.	Horizontal	Vertical																																																																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>10360.00</td><td>43.40</td><td>68.20</td><td>-24.80</td><td>58.17</td><td>37.35</td><td>15.29</td><td>67.41</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr> <tr> <td>2</td><td>15540.00</td><td>63.09</td><td>74.00</td><td>-10.91</td><td>69.88</td><td>39.98</td><td>19.08</td><td>65.85</td><td>0.00</td><td>100</td><td>168</td><td>PEAK</td></tr> <tr> <td>3</td><td>15540.00</td><td>50.72</td><td>54.00</td><td>-3.28</td><td>57.52</td><td>39.98</td><td>19.07</td><td>65.85</td><td>0.00</td><td>100</td><td>168</td><td>AVERAGE</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	10360.00	43.40	68.20	-24.80	58.17	37.35	15.29	67.41	0.00	---	---	PEAK	2	15540.00	63.09	74.00	-10.91	69.88	39.98	19.08	65.85	0.00	100	168	PEAK	3	15540.00	50.72	54.00	-3.28	57.52	39.98	19.07	65.85	0.00	100	168	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>10360.00</td><td>40.41</td><td>68.20</td><td>-27.79</td><td>55.16</td><td>37.35</td><td>15.30</td><td>67.40</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr> <tr> <td>2</td><td>15540.00</td><td>47.69</td><td>74.00</td><td>-26.31</td><td>54.48</td><td>39.98</td><td>19.08</td><td>65.85</td><td>0.00</td><td>300</td><td>0</td><td>PEAK</td></tr> <tr> <td>3</td><td>15540.00</td><td>37.80</td><td>54.00</td><td>-16.20</td><td>44.60</td><td>39.98</td><td>19.07</td><td>65.85</td><td>0.00</td><td>300</td><td>0</td><td>AVERAGE</td></tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1	10360.00	40.41	68.20	-27.79	55.16	37.35	15.30	67.40	0.00	---	---	Peak	2	15540.00	47.69	74.00	-26.31	54.48	39.98	19.08	65.85	0.00	300	0	PEAK	3	15540.00	37.80	54.00	-16.20	44.60	39.98	19.07	65.85	0.00	300	0	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																																																					
1	10360.00	43.40	68.20	-24.80	58.17	37.35	15.29	67.41	0.00	---	---	PEAK																																																																																																																																				
2	15540.00	63.09	74.00	-10.91	69.88	39.98	19.08	65.85	0.00	100	168	PEAK																																																																																																																																				
3	15540.00	50.72	54.00	-3.28	57.52	39.98	19.07	65.85	0.00	100	168	AVERAGE																																																																																																																																				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																							
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																																																																																																																					
1	10360.00	40.41	68.20	-27.79	55.16	37.35	15.30	67.40	0.00	---	---	Peak																																																																																																																																				
2	15540.00	47.69	74.00	-26.31	54.48	39.98	19.08	65.85	0.00	300	0	PEAK																																																																																																																																				
3	15540.00	37.80	54.00	-16.20	44.60	39.98	19.07	65.85	0.00	300	0	AVERAGE																																																																																																																																				



Mode	2																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>43.83</td> <td>68.20</td> <td>-24.37</td> <td>58.38</td> <td>37.40</td> <td>15.35</td> <td>67.30</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>62.18</td> <td>74.00</td> <td>-11.82</td> <td>68.94</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>242</td> <td>220</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>50.52</td> <td>54.00</td> <td>-3.48</td> <td>57.28</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>242</td> <td>220</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10440.00	43.83	68.20	-24.37	58.38	37.40	15.35	67.30	0.00	---	---	PEAK	2	15660.00	62.18	74.00	-11.82	68.94	40.06	19.17	65.99	0.00	242	220	PEAK	3	15660.00	50.52	54.00	-3.48	57.28	40.06	19.17	65.99	0.00	242	220	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>43.95</td> <td>68.20</td> <td>-24.25</td> <td>58.46</td> <td>37.41</td> <td>15.36</td> <td>67.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>57.82</td> <td>74.00</td> <td>-16.18</td> <td>64.58</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>310</td> <td>207</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>46.93</td> <td>54.00</td> <td>-7.07</td> <td>53.70</td> <td>40.06</td> <td>19.16</td> <td>65.99</td> <td>0.00</td> <td>310</td> <td>207</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10440.00	43.95	68.20	-24.25	58.46	37.41	15.36	67.28	0.00	---	---	PEAK	2	15660.00	57.82	74.00	-16.18	64.58	40.06	19.17	65.99	0.00	310	207	PEAK	3	15660.00	46.93	54.00	-7.07	53.70	40.06	19.16	65.99	0.00	310	207	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10440.00	43.83	68.20	-24.37	58.38	37.40	15.35	67.30	0.00	---	---	PEAK																																																																																																																																		
2	15660.00	62.18	74.00	-11.82	68.94	40.06	19.17	65.99	0.00	242	220	PEAK																																																																																																																																		
3	15660.00	50.52	54.00	-3.48	57.28	40.06	19.17	65.99	0.00	242	220	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10440.00	43.95	68.20	-24.25	58.46	37.41	15.36	67.28	0.00	---	---	PEAK																																																																																																																																		
2	15660.00	57.82	74.00	-16.18	64.58	40.06	19.17	65.99	0.00	310	207	PEAK																																																																																																																																		
3	15660.00	46.93	54.00	-7.07	53.70	40.06	19.16	65.99	0.00	310	207	AVERAGE																																																																																																																																		



Mode	3																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																												
ANT	SISO																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.03</td> <td>68.20</td> <td>-24.17</td> <td>58.45</td> <td>37.43</td> <td>15.38</td> <td>67.23</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>59.88</td> <td>74.00</td> <td>-14.12</td> <td>66.63</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>100</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>49.14</td> <td>54.00</td> <td>-4.86</td> <td>55.90</td> <td>40.10</td> <td>19.21</td> <td>66.07</td> <td>0.00</td> <td>100</td> <td>163</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	44.03	68.20	-24.17	58.45	37.43	15.38	67.23	0.00	---	---	PEAK	2	15720.00	59.88	74.00	-14.12	66.63	40.10	19.21	66.06	0.00	100	163	PEAK	3	15720.00	49.14	54.00	-4.86	55.90	40.10	19.21	66.07	0.00	100	163	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>43.23</td> <td>68.20</td> <td>-24.97</td> <td>57.62</td> <td>37.44</td> <td>15.39</td> <td>67.22</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>58.31</td> <td>74.00</td> <td>-15.69</td> <td>65.06</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>262</td> <td>207</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>52.79</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>262</td> <td>207</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	43.23	68.20	-24.97	57.62	37.44	15.39	67.22	0.00	---	---	PEAK	2	15720.00	58.31	74.00	-15.69	65.06	40.10	19.21	66.06	0.00	262	207	PEAK	3	15720.00	46.04	54.00	-7.96	52.79	40.10	19.21	66.06	0.00	262	207
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10480.00	44.03	68.20	-24.17	58.45	37.43	15.38	67.23	0.00	---	---	PEAK																																																																																																																																	
2	15720.00	59.88	74.00	-14.12	66.63	40.10	19.21	66.06	0.00	100	163	PEAK																																																																																																																																	
3	15720.00	49.14	54.00	-4.86	55.90	40.10	19.21	66.07	0.00	100	163	AVERAGE																																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10480.00	43.23	68.20	-24.97	57.62	37.44	15.39	67.22	0.00	---	---	PEAK																																																																																																																																	
2	15720.00	58.31	74.00	-15.69	65.06	40.10	19.21	66.06	0.00	262	207	PEAK																																																																																																																																	
3	15720.00	46.04	54.00	-7.96	52.79	40.10	19.21	66.06	0.00	262	207	AVERAGE																																																																																																																																	



Mode	4																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>43.35</td> <td>68.20</td> <td>-24.85</td> <td>57.64</td> <td>37.47</td> <td>15.42</td> <td>67.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>57.34</td> <td>74.00</td> <td>-16.66</td> <td>64.08</td> <td>40.15</td> <td>19.25</td> <td>66.14</td> <td>0.00</td> <td>100</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>45.91</td> <td>54.00</td> <td>-8.09</td> <td>52.64</td> <td>40.15</td> <td>19.26</td> <td>66.14</td> <td>0.00</td> <td>100</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	43.35	68.20	-24.85	57.64	37.47	15.42	67.18	0.00	---	---	PEAK	2	15780.00	57.34	74.00	-16.66	64.08	40.15	19.25	66.14	0.00	100	184	PEAK	3	15780.00	45.91	54.00	-8.09	52.64	40.15	19.26	66.14	0.00	100	184	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>43.54</td> <td>68.20</td> <td>-24.66</td> <td>57.83</td> <td>37.47</td> <td>15.42</td> <td>67.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.09</td> <td>74.00</td> <td>-26.91</td> <td>53.83</td> <td>40.15</td> <td>19.25</td> <td>66.14</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>37.17</td> <td>54.00</td> <td>-16.83</td> <td>43.91</td> <td>40.14</td> <td>19.25</td> <td>66.13</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	43.54	68.20	-24.66	57.83	37.47	15.42	67.18	0.00	---	---	PEAK	2	15780.00	47.09	74.00	-26.91	53.83	40.15	19.25	66.14	0.00	300	360	PEAK	3	15780.00	37.17	54.00	-16.83	43.91	40.14	19.25	66.13	0.00	300	360	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10520.00	43.35	68.20	-24.85	57.64	37.47	15.42	67.18	0.00	---	---	PEAK																																																																																																																																		
2	15780.00	57.34	74.00	-16.66	64.08	40.15	19.25	66.14	0.00	100	184	PEAK																																																																																																																																		
3	15780.00	45.91	54.00	-8.09	52.64	40.15	19.26	66.14	0.00	100	184	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10520.00	43.54	68.20	-24.66	57.83	37.47	15.42	67.18	0.00	---	---	PEAK																																																																																																																																		
2	15780.00	47.09	74.00	-26.91	53.83	40.15	19.25	66.14	0.00	300	360	PEAK																																																																																																																																		
3	15780.00	37.17	54.00	-16.83	43.91	40.14	19.25	66.13	0.00	300	360	AVERAGE																																																																																																																																		



Mode	5																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																
ANT	SISO																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.76</td> <td>74.00</td> <td>-29.24</td> <td>58.89</td> <td>37.52</td> <td>15.47</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>55.89</td> <td>74.00</td> <td>-18.11</td> <td>62.60</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>107</td> <td>161</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>44.96</td> <td>54.00</td> <td>-9.04</td> <td>51.67</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>107</td> <td>161</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.76	74.00	-29.24	58.89	37.52	15.47	67.12	0.00	---	---	PEAK	2	15900.00	55.89	74.00	-18.11	62.60	40.23	19.34	66.28	0.00	107	161	PEAK	3	15900.00	44.96	54.00	-9.04	51.67	40.23	19.34	66.28	0.00	107	161	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>43.37</td> <td>74.00</td> <td>-30.63</td> <td>57.50</td> <td>37.52</td> <td>15.47</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.19</td> <td>74.00</td> <td>-27.81</td> <td>52.90</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	43.37	74.00	-30.63	57.50	37.52	15.47	67.12	0.00	---	---	PEAK	2	15900.00	46.19	74.00	-27.81	52.90	40.23	19.34	66.28	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	10600.00	44.76	74.00	-29.24	58.89	37.52	15.47	67.12	0.00	---	---	PEAK																																																																																																																					
2	15900.00	55.89	74.00	-18.11	62.60	40.23	19.34	66.28	0.00	107	161	PEAK																																																																																																																					
3	15900.00	44.96	54.00	-9.04	51.67	40.23	19.34	66.28	0.00	107	161	AVERAGE																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	10600.00	43.37	74.00	-30.63	57.50	37.52	15.47	67.12	0.00	---	---	PEAK																																																																																																																					
2	15900.00	46.19	74.00	-27.81	52.90	40.23	19.34	66.28	0.00	---	---	PEAK																																																																																																																					



Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.60</td> <td>63.63</td> <td>74.00</td> <td>-10.37</td> <td>55.76</td> <td>34.36</td> <td>10.85</td> <td>37.34</td> <td>0.00</td> <td>135</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5355.60	63.63	74.00	-10.37	55.76	34.36	10.85	37.34	0.00	135	181	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>112.64</td> <td>-----</td> <td>-----</td> <td>104.87</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>135</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	112.64	-----	-----	104.87	34.32	10.81	37.36	0.00	135	181	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5355.60	63.63	74.00	-10.37	55.76	34.36	10.85	37.34	0.00	135	181	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	112.64	-----	-----	104.87	34.32	10.81	37.36	0.00	135	181	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>50.47</td> <td>54.00</td> <td>-3.53</td> <td>42.63</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>135</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.40	50.47	54.00	-3.53	42.63	34.35	10.84	37.35	0.00	135	181	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>104.25</td> <td>-----</td> <td>-----</td> <td>96.48</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>135</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	104.25	-----	-----	96.48	34.32	10.81	37.36	0.00	135	181	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.40	50.47	54.00	-3.53	42.63	34.35	10.84	37.35	0.00	135	181	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	104.25	-----	-----	96.48	34.32	10.81	37.36	0.00	135	181	AVERAGE																																																																														







Mode	6																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.40</td> <td>61.98</td> <td>74.00</td> <td>-12.02</td> <td>54.11</td> <td>34.36</td> <td>10.85</td> <td>37.34</td> <td>0.00</td> <td>182</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5357.40	61.98	74.00	-12.02	54.11	34.36	10.85	37.34	0.00	182	192	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.13</td> <td>-----</td> <td>-----</td> <td>99.36</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>182</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5320.00	107.13	-----	-----	99.36	34.32	10.81	37.36	0.00	182	192	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5357.40	61.98	74.00	-12.02	54.11	34.36	10.85	37.34	0.00	182	192	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5320.00	107.13	-----	-----	99.36	34.32	10.81	37.36	0.00	182	192	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.70</td> <td>45.24</td> <td>54.00</td> <td>-8.76</td> <td>37.40</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>182</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5350.70	45.24	54.00	-8.76	37.40	34.35	10.84	37.35	0.00	182	192	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.95</td> <td>-----</td> <td>-----</td> <td>91.18</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>182</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5320.00	98.95	-----	-----	91.18	34.32	10.81	37.36	0.00	182	192	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5350.70	45.24	54.00	-8.76	37.40	34.35	10.84	37.35	0.00	182	192	AVERAGE																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	5320.00	98.95	-----	-----	91.18	34.32	10.81	37.36	0.00	182	192	AVERAGE																																																																						







Mode	6																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>43.71</td> <td>74.00</td> <td>-30.29</td> <td>57.75</td> <td>37.55</td> <td>15.50</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.00</td> <td>74.00</td> <td>-25.00</td> <td>55.69</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>37.85</td> <td>54.00</td> <td>-16.15</td> <td>44.54</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	43.71	74.00	-30.29	57.75	37.55	15.50	67.09	0.00	---	---	PEAK	2	15960.00	49.00	74.00	-25.00	55.69	40.27	19.39	66.35	0.00	100	360	PEAK	3	15960.00	37.85	54.00	-16.15	44.54	40.27	19.39	66.35	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>43.23</td> <td>74.00</td> <td>-30.77</td> <td>57.27</td> <td>37.55</td> <td>15.50</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.33</td> <td>74.00</td> <td>-26.67</td> <td>54.02</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>37.70</td> <td>54.00</td> <td>-16.30</td> <td>44.39</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10640.00	43.23	74.00	-30.77	57.27	37.55	15.50	67.09	0.00	---	---	PEAK	2	15960.00	47.33	74.00	-26.67	54.02	40.27	19.39	66.35	0.00	300	360	PEAK	3	15960.00	37.70	54.00	-16.30	44.39	40.27	19.39	66.35	0.00	300	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10640.00	43.71	74.00	-30.29	57.75	37.55	15.50	67.09	0.00	---	---	PEAK																																																																																																																																		
2	15960.00	49.00	74.00	-25.00	55.69	40.27	19.39	66.35	0.00	100	360	PEAK																																																																																																																																		
3	15960.00	37.85	54.00	-16.15	44.54	40.27	19.39	66.35	0.00	100	360	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10640.00	43.23	74.00	-30.77	57.27	37.55	15.50	67.09	0.00	---	---	PEAK																																																																																																																																		
2	15960.00	47.33	74.00	-26.67	54.02	40.27	19.39	66.35	0.00	300	360	PEAK																																																																																																																																		
3	15960.00	37.70	54.00	-16.30	44.39	40.27	19.39	66.35	0.00	300	360	AVERAGE																																																																																																																																		

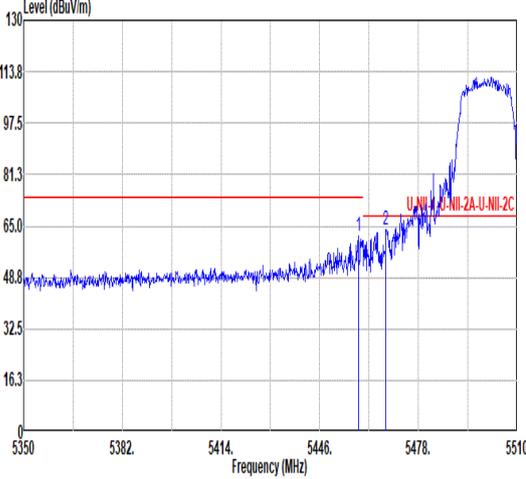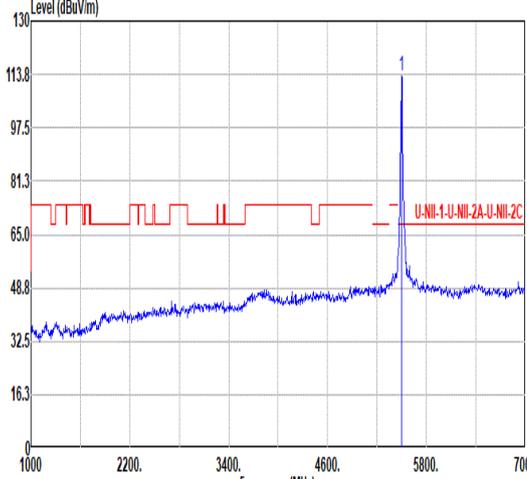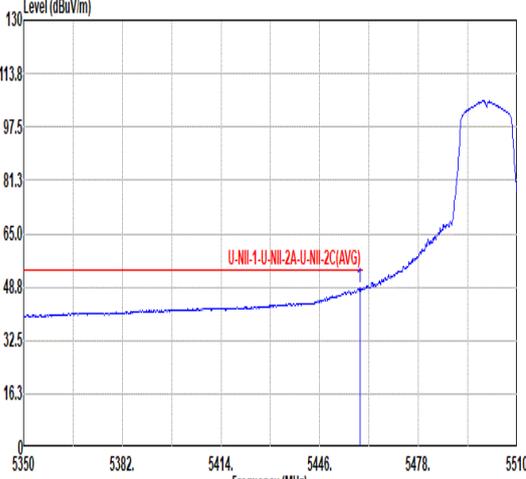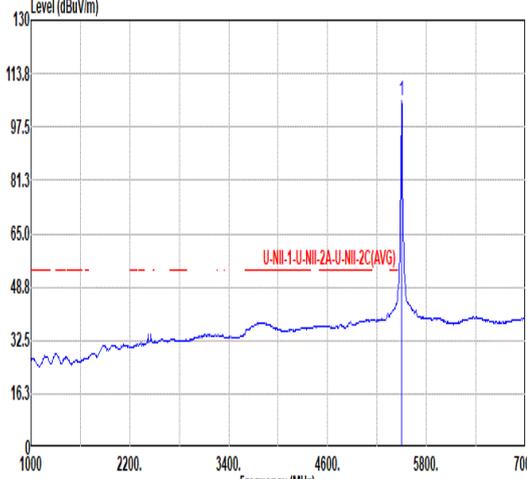

Mode	7																																																																														
	Band Edge																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																														
ANT	SISO																																																																														
Pol.	Horizontal	Fundamental																																																																													
Peak	 <table border="1" data-bbox="268 1102 794 1249"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.48</td> <td>61.86</td> <td>74.00</td> <td>-12.14</td> <td>53.85</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>162 PEAK</td> </tr> <tr> <td>2 5467.44</td> <td>63.82</td> <td>68.20</td> <td>-4.38</td> <td>55.81</td> <td>34.33</td> <td>10.98</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>162 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5458.48	61.86	74.00	-12.14	53.85	34.34	10.97	37.30	0.00	149	162 PEAK	2 5467.44	63.82	68.20	-4.38	55.81	34.33	10.98	37.30	0.00	149	162 PEAK	 <table border="1" data-bbox="906 1102 1433 1249"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>113.32</td> <td>-----</td> <td>-----</td> <td>105.28</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>149</td> <td>162 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	113.32	-----	-----	105.28	34.30	11.02	37.28	0.00	149	162 PEAK
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5458.48	61.86	74.00	-12.14	53.85	34.34	10.97	37.30	0.00	149	162 PEAK																																																																					
2 5467.44	63.82	68.20	-4.38	55.81	34.33	10.98	37.30	0.00	149	162 PEAK																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	113.32	-----	-----	105.28	34.30	11.02	37.28	0.00	149	162 PEAK																																																																					
Avg	 <table border="1" data-bbox="268 1783 794 1930"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.96</td> <td>48.38</td> <td>54.00</td> <td>-5.62</td> <td>40.37</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>162 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5458.96	48.38	54.00	-5.62	40.37	34.34	10.97	37.30	0.00	149	162 AVERAGE	 <table border="1" data-bbox="906 1783 1433 1930"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>105.35</td> <td>-----</td> <td>-----</td> <td>97.31</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>149</td> <td>162 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	105.35	-----	-----	97.31	34.30	11.02	37.28	0.00	149	162 AVERAGE											
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5458.96	48.38	54.00	-5.62	40.37	34.34	10.97	37.30	0.00	149	162 AVERAGE																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	105.35	-----	-----	97.31	34.30	11.02	37.28	0.00	149	162 AVERAGE																																																																					

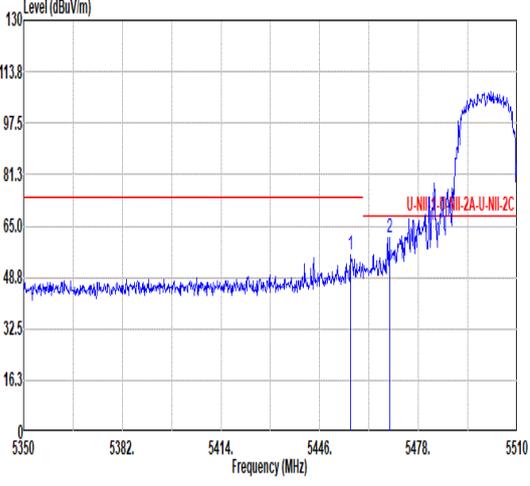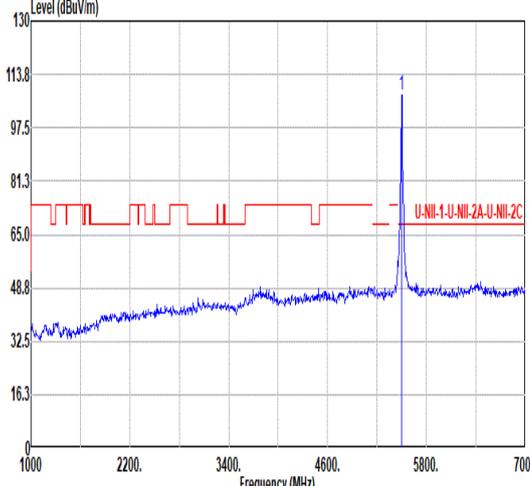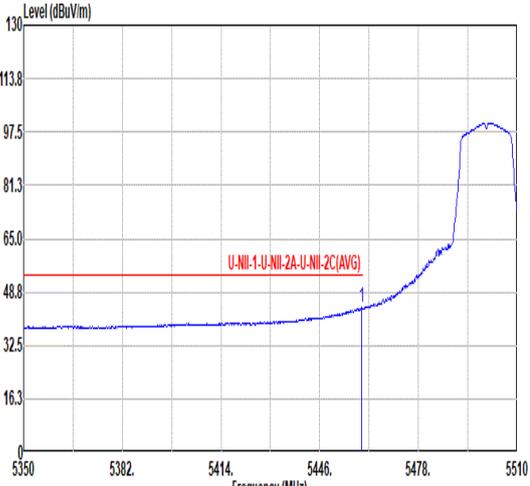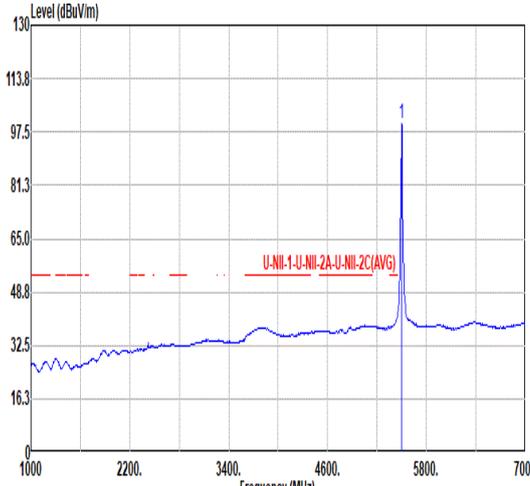

Mode	7																																																																														
	Band Edge																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																														
ANT	SISO																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	 <table border="1" data-bbox="268 1108 774 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5455.92</td> <td>55.88</td> <td>74.00</td> <td>-18.12</td> <td>47.88</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>225</td> <td>192 PEAK</td> </tr> <tr> <td>2 5468.56</td> <td>61.49</td> <td>68.20</td> <td>-6.71</td> <td>53.48</td> <td>34.33</td> <td>10.98</td> <td>37.30</td> <td>0.00</td> <td>225</td> <td>192 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5455.92	55.88	74.00	-18.12	47.88	34.34	10.96	37.30	0.00	225	192 PEAK	2 5468.56	61.49	68.20	-6.71	53.48	34.33	10.98	37.30	0.00	225	192 PEAK	 <table border="1" data-bbox="906 1108 1412 1243"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>107.40</td> <td>-----</td> <td>-----</td> <td>99.42</td> <td>34.31</td> <td>11.03</td> <td>37.28</td> <td>0.00</td> <td>225</td> <td>192 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	107.40	-----	-----	99.42	34.31	11.03	37.28	0.00	225	192 PEAK
	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5455.92	55.88	74.00	-18.12	47.88	34.34	10.96	37.30	0.00	225	192 PEAK																																																																					
2 5468.56	61.49	68.20	-6.71	53.48	34.33	10.98	37.30	0.00	225	192 PEAK																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	107.40	-----	-----	99.42	34.31	11.03	37.28	0.00	225	192 PEAK																																																																					
Avg	 <table border="1" data-bbox="268 1785 774 1919"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.60</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>35.93</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>225</td> <td>192 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5459.60	43.94	54.00	-10.06	35.93	34.34	10.97	37.30	0.00	225	192 AVERAGE	 <table border="1" data-bbox="906 1785 1412 1919"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Over Line</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>100.20</td> <td>-----</td> <td>-----</td> <td>92.16</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>225</td> <td>192 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5500.00	100.20	-----	-----	92.16	34.30	11.02	37.28	0.00	225	192 AVERAGE											
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5459.60	43.94	54.00	-10.06	35.93	34.34	10.97	37.30	0.00	225	192 AVERAGE																																																																					
Limit Freq	Level	Over Line	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5500.00	100.20	-----	-----	92.16	34.30	11.02	37.28	0.00	225	192 AVERAGE																																																																					



Mode	7																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																			
ANT	SISO																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>44.85</td> <td>74.00</td> <td>-29.15</td> <td>58.09</td> <td>37.80</td> <td>15.76</td> <td>66.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>48.18</td> <td>68.20</td> <td>-20.02</td> <td>54.18</td> <td>40.70</td> <td>19.70</td> <td>66.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11000.00	44.85	74.00	-29.15	58.09	37.80	15.76	66.80	0.00	---	---	PEAK	2	16500.00	48.18	68.20	-20.02	54.18	40.70	19.70	66.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>45.11</td> <td>74.00</td> <td>-28.89</td> <td>58.35</td> <td>37.80</td> <td>15.76</td> <td>66.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>49.01</td> <td>68.20</td> <td>-19.19</td> <td>55.02</td> <td>40.69</td> <td>19.70</td> <td>66.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11000.00	45.11	74.00	-28.89	58.35	37.80	15.76	66.80	0.00	---	---	PEAK	2	16500.00	49.01	68.20	-19.19	55.02	40.69	19.70	66.40	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11000.00	44.85	74.00	-29.15	58.09	37.80	15.76	66.80	0.00	---	---	PEAK																																																																																																								
2	16500.00	48.18	68.20	-20.02	54.18	40.70	19.70	66.40	0.00	---	---	PEAK																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	11000.00	45.11	74.00	-28.89	58.35	37.80	15.76	66.80	0.00	---	---	PEAK																																																																																																								
2	16500.00	49.01	68.20	-19.19	55.02	40.69	19.70	66.40	0.00	---	---	PEAK																																																																																																								



Mode	8																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																
ANT	SISO																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>65.00</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>271</td> <td>185</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>42.63</td> <td>54.00</td> <td>-11.37</td> <td>55.58</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>271</td> <td>185</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>55.61</td> <td>68.20</td> <td>-12.59</td> <td>61.62</td> <td>40.89</td> <td>19.83</td> <td>66.73</td> <td>0.00</td> <td>106</td> <td>160</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	52.05	74.00	-21.95	65.00	37.94	15.88	66.77	0.00	271	185	PEAK	2	11160.00	42.63	54.00	-11.37	55.58	37.94	15.88	66.77	0.00	271	185	AVERAGE	3	16740.00	55.61	68.20	-12.59	61.62	40.89	19.83	66.73	0.00	106	160	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>44.48</td> <td>74.00</td> <td>-29.52</td> <td>57.43</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.99</td> <td>68.20</td> <td>-19.21</td> <td>55.00</td> <td>40.89</td> <td>19.84</td> <td>66.74</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	44.48	74.00	-29.52	57.43	37.94	15.88	66.77	0.00	---	---	PEAK	2	16740.00	48.99	68.20	-19.21	55.00	40.89	19.84	66.74	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11160.00	52.05	74.00	-21.95	65.00	37.94	15.88	66.77	0.00	271	185	PEAK																																																																																																																					
2	11160.00	42.63	54.00	-11.37	55.58	37.94	15.88	66.77	0.00	271	185	AVERAGE																																																																																																																					
3	16740.00	55.61	68.20	-12.59	61.62	40.89	19.83	66.73	0.00	106	160	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11160.00	44.48	74.00	-29.52	57.43	37.94	15.88	66.77	0.00	---	---	PEAK																																																																																																																					
2	16740.00	48.99	68.20	-19.21	55.00	40.89	19.84	66.74	0.00	---	---	PEAK																																																																																																																					



Mode	9																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.00</td> <td>63.45</td> <td>68.20</td> <td>-4.75</td> <td>55.24</td> <td>34.44</td> <td>11.33</td> <td>37.56</td> <td>0.00</td> <td>128</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5727.00	63.45	68.20	-4.75	55.24	34.44	11.33	37.56	0.00	128	169	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>110.94</td> <td>-----</td> <td>-----</td> <td>102.79</td> <td>34.30</td> <td>11.29</td> <td>37.44</td> <td>0.00</td> <td>128</td> <td>169</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	110.94	-----	-----	102.79	34.30	11.29	37.44	0.00	128	169	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5727.00	63.45	68.20	-4.75	55.24	34.44	11.33	37.56	0.00	128	169	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	110.94	-----	-----	102.79	34.30	11.29	37.44	0.00	128	169	PEAK																																																																						
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.90</td> <td>-----</td> <td>-----</td> <td>94.75</td> <td>34.30</td> <td>11.29</td> <td>37.44</td> <td>0.00</td> <td>128</td> <td>169</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	102.90	-----	-----	94.75	34.30	11.29	37.44	0.00	128	169	AVERAGE																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5700.00	102.90	-----	-----	94.75	34.30	11.29	37.44	0.00	128	169	AVERAGE																																																																						



Mode	9																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.60</td> <td>55.70</td> <td>68.20</td> <td>-12.50</td> <td>47.48</td> <td>34.44</td> <td>11.34</td> <td>37.56</td> <td>0.00</td> <td>228</td> <td>177</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5728.60	55.70	68.20	-12.50	47.48	34.44	11.34	37.56	0.00	228	177	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>105.70</td> <td>-----</td> <td>-----</td> <td>97.63</td> <td>34.32</td> <td>11.30</td> <td>37.47</td> <td>0.00</td> <td>228</td> <td>177</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	105.70	-----	-----	97.63	34.32	11.30	37.47	0.00	228	177	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5728.60	55.70	68.20	-12.50	47.48	34.44	11.34	37.56	0.00	228	177	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5700.00	105.70	-----	-----	97.63	34.32	11.30	37.47	0.00	228	177	PEAK																																																																												
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>97.19</td> <td>-----</td> <td>-----</td> <td>89.04</td> <td>34.30</td> <td>11.29</td> <td>37.44</td> <td>0.00</td> <td>228</td> <td>177</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	97.19	-----	-----	89.04	34.30	11.29	37.44	0.00	228	177	AVERAGE																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5700.00	97.19	-----	-----	89.04	34.30	11.29	37.44	0.00	228	177	AVERAGE																																																																												







Mode	9																																																																																							
	Harmonic																																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>44.11</td> <td>74.00</td> <td>-29.89</td> <td>56.62</td> <td>38.16</td> <td>16.05</td> <td>66.72</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	44.11	74.00	-29.89	56.62	38.16	16.05	66.72	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>43.24</td> <td>74.00</td> <td>-30.76</td> <td>55.75</td> <td>38.16</td> <td>16.05</td> <td>66.72</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11400.00	43.24	74.00	-30.76	55.75	38.16	16.05	66.72	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11400.00	44.11	74.00	-29.89	56.62	38.16	16.05	66.72	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11400.00	43.24	74.00	-30.76	55.75	38.16	16.05	66.72	0.00	---	---	PEAK																																																																													



Mode	10																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>66.00</td> <td>74.00</td> <td>-8.00</td> <td>58.73</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>129</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.60	66.00	74.00	-8.00	58.73	34.05	10.65	37.43	0.00	129	181	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>112.60</td> <td>-----</td> <td>-----</td> <td>105.18</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>129</td> <td>181</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	112.60	-----	-----	105.18	34.15	10.69	37.42	0.00	129	181	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.60	66.00	74.00	-8.00	58.73	34.05	10.65	37.43	0.00	129	181	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	112.60	-----	-----	105.18	34.15	10.69	37.42	0.00	129	181	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.70</td> <td>50.09</td> <td>54.00</td> <td>-3.91</td> <td>42.82</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>129</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.70	50.09	54.00	-3.91	42.82	34.05	10.65	37.43	0.00	129	181	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.90</td> <td>-----</td> <td>-----</td> <td>96.48</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>129</td> <td>181</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	103.90	-----	-----	96.48	34.15	10.69	37.42	0.00	129	181	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.70	50.09	54.00	-3.91	42.82	34.05	10.65	37.43	0.00	129	181	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	103.90	-----	-----	96.48	34.15	10.69	37.42	0.00	129	181	AVERAGE																																																																														

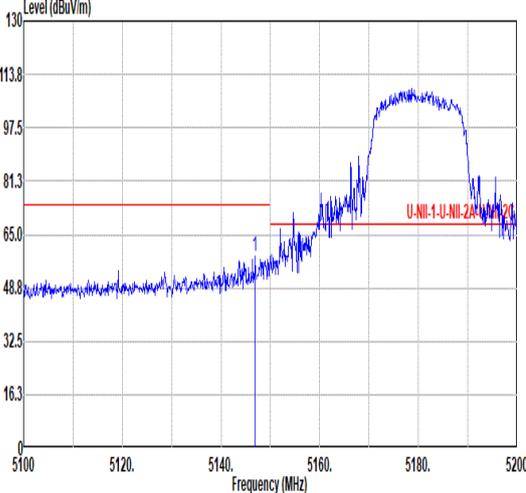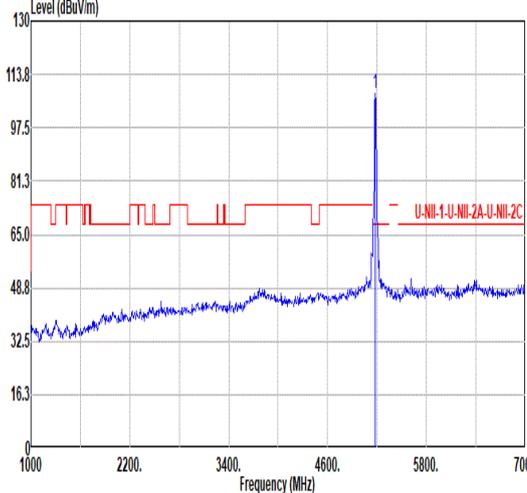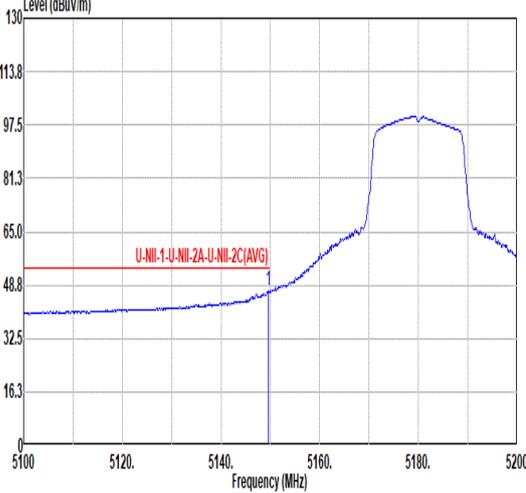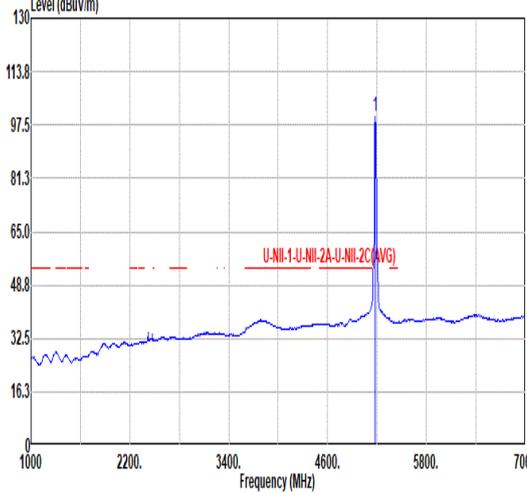

Mode	10																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <table border="1" data-bbox="268 1126 794 1249"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>58.62</td> <td>74.00</td> <td>-15.38</td> <td>51.37</td> <td>34.04</td> <td>10.65</td> <td>37.44</td> <td>0.00</td> <td>144</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.90	58.62	74.00	-15.38	51.37	34.04	10.65	37.44	0.00	144	189	PEAK	 <table border="1" data-bbox="906 1126 1433 1249"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.06</td> <td>-----</td> <td>-----</td> <td>100.67</td> <td>34.13</td> <td>10.68</td> <td>37.42</td> <td>0.00</td> <td>144</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	108.06	-----	-----	100.67	34.13	10.68	37.42	0.00	144	189	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5146.90	58.62	74.00	-15.38	51.37	34.04	10.65	37.44	0.00	144	189	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	108.06	-----	-----	100.67	34.13	10.68	37.42	0.00	144	189	PEAK																																																																														
Avg	 <table border="1" data-bbox="268 1809 794 1933"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>47.13</td> <td>54.00</td> <td>-6.87</td> <td>39.86</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>144</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.60	47.13	54.00	-6.87	39.86	34.05	10.65	37.43	0.00	144	189	AVERAGE	 <table border="1" data-bbox="906 1809 1433 1933"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.89</td> <td>-----</td> <td>-----</td> <td>92.47</td> <td>34.15</td> <td>10.69</td> <td>37.42</td> <td>0.00</td> <td>144</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	99.89	-----	-----	92.47	34.15	10.69	37.42	0.00	144	189	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.60	47.13	54.00	-6.87	39.86	34.05	10.65	37.43	0.00	144	189	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5180.00	99.89	-----	-----	92.47	34.15	10.69	37.42	0.00	144	189	AVERAGE																																																																														



Mode	10																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																																												
ANT	SISO																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>43.54</td> <td>68.20</td> <td>-24.66</td> <td>58.29</td> <td>37.35</td> <td>15.30</td> <td>67.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>60.80</td> <td>74.00</td> <td>-13.20</td> <td>67.59</td> <td>39.98</td> <td>19.08</td> <td>65.85</td> <td>0.00</td> <td>100</td> <td>315</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>48.74</td> <td>54.00</td> <td>-5.26</td> <td>55.54</td> <td>39.98</td> <td>19.07</td> <td>65.85</td> <td>0.00</td> <td>100</td> <td>315</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	43.54	68.20	-24.66	58.29	37.35	15.30	67.40	0.00	---	---	PEAK	2	15540.00	60.80	74.00	-13.20	67.59	39.98	19.08	65.85	0.00	100	315	PEAK	3	15540.00	48.74	54.00	-5.26	55.54	39.98	19.07	65.85	0.00	100	315	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.13</td> <td>68.20</td> <td>-24.07</td> <td>58.88</td> <td>37.35</td> <td>15.30</td> <td>67.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>57.68</td> <td>74.00</td> <td>-16.32</td> <td>64.47</td> <td>39.98</td> <td>19.08</td> <td>65.85</td> <td>0.00</td> <td>152</td> <td>340</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>45.70</td> <td>54.00</td> <td>-8.30</td> <td>52.49</td> <td>39.98</td> <td>19.08</td> <td>65.85</td> <td>0.00</td> <td>152</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	44.13	68.20	-24.07	58.88	37.35	15.30	67.40	0.00	---	---	PEAK	2	15540.00	57.68	74.00	-16.32	64.47	39.98	19.08	65.85	0.00	152	340	PEAK	3	15540.00	45.70	54.00	-8.30	52.49	39.98	19.08	65.85	0.00	152	340
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10360.00	43.54	68.20	-24.66	58.29	37.35	15.30	67.40	0.00	---	---	PEAK																																																																																																																																	
2	15540.00	60.80	74.00	-13.20	67.59	39.98	19.08	65.85	0.00	100	315	PEAK																																																																																																																																	
3	15540.00	48.74	54.00	-5.26	55.54	39.98	19.07	65.85	0.00	100	315	AVERAGE																																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10360.00	44.13	68.20	-24.07	58.88	37.35	15.30	67.40	0.00	---	---	PEAK																																																																																																																																	
2	15540.00	57.68	74.00	-16.32	64.47	39.98	19.08	65.85	0.00	152	340	PEAK																																																																																																																																	
3	15540.00	45.70	54.00	-8.30	52.49	39.98	19.08	65.85	0.00	152	340	AVERAGE																																																																																																																																	



Mode	11																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.89</td> <td>68.20</td> <td>-23.31</td> <td>59.40</td> <td>37.41</td> <td>15.36</td> <td>67.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>59.56</td> <td>74.00</td> <td>-14.44</td> <td>66.32</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>100</td> <td>316</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>47.95</td> <td>54.00</td> <td>-6.05</td> <td>54.71</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>100</td> <td>316</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10440.00	44.89	68.20	-23.31	59.40	37.41	15.36	67.28	0.00	---	---	PEAK	2	15660.00	59.56	74.00	-14.44	66.32	40.06	19.17	65.99	0.00	100	316	PEAK	3	15660.00	47.95	54.00	-6.05	54.71	40.06	19.17	65.99	0.00	100	316	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>44.63</td> <td>68.20</td> <td>-23.57</td> <td>59.14</td> <td>37.41</td> <td>15.36</td> <td>67.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>49.20</td> <td>74.00</td> <td>-24.80</td> <td>55.96</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>38.99</td> <td>54.00</td> <td>-15.01</td> <td>45.75</td> <td>40.06</td> <td>19.17</td> <td>65.99</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10440.00	44.63	68.20	-23.57	59.14	37.41	15.36	67.28	0.00	---	---	PEAK	2	15660.00	49.20	74.00	-24.80	55.96	40.06	19.17	65.99	0.00	300	360	PEAK	3	15660.00	38.99	54.00	-15.01	45.75	40.06	19.17	65.99	0.00	300	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10440.00	44.89	68.20	-23.31	59.40	37.41	15.36	67.28	0.00	---	---	PEAK																																																																																																																																		
2	15660.00	59.56	74.00	-14.44	66.32	40.06	19.17	65.99	0.00	100	316	PEAK																																																																																																																																		
3	15660.00	47.95	54.00	-6.05	54.71	40.06	19.17	65.99	0.00	100	316	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10440.00	44.63	68.20	-23.57	59.14	37.41	15.36	67.28	0.00	---	---	PEAK																																																																																																																																		
2	15660.00	49.20	74.00	-24.80	55.96	40.06	19.17	65.99	0.00	300	360	PEAK																																																																																																																																		
3	15660.00	38.99	54.00	-15.01	45.75	40.06	19.17	65.99	0.00	300	360	AVERAGE																																																																																																																																		



Mode	12																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																																																												
ANT	SISO																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>44.39</td> <td>68.20</td> <td>-23.81</td> <td>58.79</td> <td>37.44</td> <td>15.39</td> <td>67.23</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>60.85</td> <td>74.00</td> <td>-13.15</td> <td>67.60</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>101</td> <td>323</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>48.50</td> <td>54.00</td> <td>-5.50</td> <td>55.25</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>101</td> <td>323</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	44.39	68.20	-23.81	58.79	37.44	15.39	67.23	0.00	---	---	PEAK	2	15720.00	60.85	74.00	-13.15	67.60	40.10	19.21	66.06	0.00	101	323	PEAK	3	15720.00	48.50	54.00	-5.50	55.25	40.10	19.21	66.06	0.00	101	323	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.21</td> <td>68.20</td> <td>-22.99</td> <td>59.61</td> <td>37.44</td> <td>15.39</td> <td>67.23</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>48.60</td> <td>74.00</td> <td>-25.40</td> <td>55.35</td> <td>40.10</td> <td>19.21</td> <td>66.06</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>38.81</td> <td>54.00</td> <td>-15.19</td> <td>45.56</td> <td>40.10</td> <td>19.20</td> <td>66.05</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10480.00	45.21	68.20	-22.99	59.61	37.44	15.39	67.23	0.00	---	---	PEAK	2	15720.00	48.60	74.00	-25.40	55.35	40.10	19.21	66.06	0.00	300	360	PEAK	3	15720.00	38.81	54.00	-15.19	45.56	40.10	19.20	66.05	0.00	300	360
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10480.00	44.39	68.20	-23.81	58.79	37.44	15.39	67.23	0.00	---	---	PEAK																																																																																																																																	
2	15720.00	60.85	74.00	-13.15	67.60	40.10	19.21	66.06	0.00	101	323	PEAK																																																																																																																																	
3	15720.00	48.50	54.00	-5.50	55.25	40.10	19.21	66.06	0.00	101	323	AVERAGE																																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10480.00	45.21	68.20	-22.99	59.61	37.44	15.39	67.23	0.00	---	---	PEAK																																																																																																																																	
2	15720.00	48.60	74.00	-25.40	55.35	40.10	19.21	66.06	0.00	300	360	PEAK																																																																																																																																	
3	15720.00	38.81	54.00	-15.19	45.56	40.10	19.20	66.05	0.00	300	360	AVERAGE																																																																																																																																	



Mode	13																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																																																												
ANT	SISO																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.06</td> <td>68.20</td> <td>-23.14</td> <td>59.37</td> <td>37.46</td> <td>15.41</td> <td>67.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>56.39</td> <td>74.00</td> <td>-17.61</td> <td>63.13</td> <td>40.15</td> <td>19.25</td> <td>66.14</td> <td>0.00</td> <td>100</td> <td>316</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>45.38</td> <td>54.00</td> <td>-8.62</td> <td>52.12</td> <td>40.14</td> <td>19.25</td> <td>66.13</td> <td>0.00</td> <td>100</td> <td>316</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	45.06	68.20	-23.14	59.37	37.46	15.41	67.18	0.00	---	---	PEAK	2	15780.00	56.39	74.00	-17.61	63.13	40.15	19.25	66.14	0.00	100	316	PEAK	3	15780.00	45.38	54.00	-8.62	52.12	40.14	19.25	66.13	0.00	100	316	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>44.78</td> <td>68.20</td> <td>-23.42</td> <td>59.09</td> <td>37.46</td> <td>15.41</td> <td>67.18</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>53.94</td> <td>40.15</td> <td>19.25</td> <td>66.14</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15780.00</td> <td>38.07</td> <td>54.00</td> <td>-15.93</td> <td>44.80</td> <td>40.15</td> <td>19.26</td> <td>66.14</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	44.78	68.20	-23.42	59.09	37.46	15.41	67.18	0.00	---	---	PEAK	2	15780.00	47.20	74.00	-26.80	53.94	40.15	19.25	66.14	0.00	300	360	PEAK	3	15780.00	38.07	54.00	-15.93	44.80	40.15	19.26	66.14	0.00	300	360
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10520.00	45.06	68.20	-23.14	59.37	37.46	15.41	67.18	0.00	---	---	PEAK																																																																																																																																	
2	15780.00	56.39	74.00	-17.61	63.13	40.15	19.25	66.14	0.00	100	316	PEAK																																																																																																																																	
3	15780.00	45.38	54.00	-8.62	52.12	40.14	19.25	66.13	0.00	100	316	AVERAGE																																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10520.00	44.78	68.20	-23.42	59.09	37.46	15.41	67.18	0.00	---	---	PEAK																																																																																																																																	
2	15780.00	47.20	74.00	-26.80	53.94	40.15	19.25	66.14	0.00	300	360	PEAK																																																																																																																																	
3	15780.00	38.07	54.00	-15.93	44.80	40.15	19.26	66.14	0.00	300	360	AVERAGE																																																																																																																																	



Mode	14																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																																
ANT	SISO																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.81</td> <td>74.00</td> <td>-29.19</td> <td>58.94</td> <td>37.52</td> <td>15.47</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>50.63</td> <td>74.00</td> <td>-23.37</td> <td>57.34</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>39.10</td> <td>54.00</td> <td>-14.90</td> <td>45.81</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.81	74.00	-29.19	58.94	37.52	15.47	67.12	0.00	---	---	PEAK	2	15900.00	50.63	74.00	-23.37	57.34	40.23	19.34	66.28	0.00	100	360	PEAK	3	15900.00	39.10	54.00	-14.90	45.81	40.23	19.34	66.28	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.04</td> <td>74.00</td> <td>-29.96</td> <td>58.17</td> <td>37.52</td> <td>15.47</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.47</td> <td>74.00</td> <td>-27.53</td> <td>53.18</td> <td>40.23</td> <td>19.34</td> <td>66.28</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.04	74.00	-29.96	58.17	37.52	15.47	67.12	0.00	---	---	PEAK	2	15900.00	46.47	74.00	-27.53	53.18	40.23	19.34	66.28	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	10600.00	44.81	74.00	-29.19	58.94	37.52	15.47	67.12	0.00	---	---	PEAK																																																																																																																					
2	15900.00	50.63	74.00	-23.37	57.34	40.23	19.34	66.28	0.00	100	360	PEAK																																																																																																																					
3	15900.00	39.10	54.00	-14.90	45.81	40.23	19.34	66.28	0.00	100	360	AVERAGE																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	10600.00	44.04	74.00	-29.96	58.17	37.52	15.47	67.12	0.00	---	---	PEAK																																																																																																																					
2	15900.00	46.47	74.00	-27.53	53.18	40.23	19.34	66.28	0.00	---	---	PEAK																																																																																																																					



Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11n_HT20_CH64_5320MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.30</td> <td>68.87</td> <td>74.00</td> <td>-5.13</td> <td>61.03</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>138</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.30	68.87	74.00	-5.13	61.03	34.35	10.84	37.35	0.00	138	180	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>112.77</td> <td>-----</td> <td>-----</td> <td>105.00</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>138</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	112.77	-----	-----	105.00	34.32	10.81	37.36	0.00	138	180	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5352.30	68.87	74.00	-5.13	61.03	34.35	10.84	37.35	0.00	138	180	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	112.77	-----	-----	105.00	34.32	10.81	37.36	0.00	138	180	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>50.07</td> <td>54.00</td> <td>-3.93</td> <td>42.23</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>138</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.80	50.07	54.00	-3.93	42.23	34.35	10.84	37.35	0.00	138	180	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>103.79</td> <td>-----</td> <td>-----</td> <td>96.02</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>138</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	103.79	-----	-----	96.02	34.32	10.81	37.36	0.00	138	180	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.80	50.07	54.00	-3.93	42.23	34.35	10.84	37.35	0.00	138	180	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	103.79	-----	-----	96.02	34.32	10.81	37.36	0.00	138	180	AVERAGE																																																																														



Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.20</td> <td>65.09</td> <td>74.00</td> <td>-8.91</td> <td>57.25</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>183</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5352.20	65.09	74.00	-8.91	57.25	34.35	10.84	37.35	0.00	183	194	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.84</td> <td>-----</td> <td>-----</td> <td>99.07</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>183</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	106.84	-----	-----	99.07	34.32	10.81	37.36	0.00	183	194	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5352.20	65.09	74.00	-8.91	57.25	34.35	10.84	37.35	0.00	183	194	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	106.84	-----	-----	99.07	34.32	10.81	37.36	0.00	183	194	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>45.99</td> <td>54.00</td> <td>-8.01</td> <td>38.15</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>183</td> <td>194</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.50	45.99	54.00	-8.01	38.15	34.35	10.84	37.35	0.00	183	194	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.61</td> <td>-----</td> <td>-----</td> <td>90.84</td> <td>34.32</td> <td>10.81</td> <td>37.36</td> <td>0.00</td> <td>183</td> <td>194</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5320.00	98.61	-----	-----	90.84	34.32	10.81	37.36	0.00	183	194	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5350.50	45.99	54.00	-8.01	38.15	34.35	10.84	37.35	0.00	183	194	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5320.00	98.61	-----	-----	90.84	34.32	10.81	37.36	0.00	183	194	AVERAGE																																																																														



Mode	15																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																																					
ANT	SISO																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>44.83</td> <td>74.00</td> <td>-29.17</td> <td>58.87</td> <td>37.55</td> <td>15.50</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>48.86</td> <td>74.00</td> <td>-25.14</td> <td>55.55</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>38.73</td> <td>54.00</td> <td>-15.27</td> <td>45.42</td> <td>40.28</td> <td>19.39</td> <td>66.36</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10640.00	44.83	74.00	-29.17	58.87	37.55	15.50	67.09	0.00	---	---	PEAK	2	15960.00	48.86	74.00	-25.14	55.55	40.27	19.39	66.35	0.00	100	360	PEAK	3	15960.00	38.73	54.00	-15.27	45.42	40.28	19.39	66.36	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>43.90</td> <td>74.00</td> <td>-30.10</td> <td>57.94</td> <td>37.55</td> <td>15.50</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.15</td> <td>74.00</td> <td>-26.85</td> <td>53.84</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>37.99</td> <td>54.00</td> <td>-16.01</td> <td>44.68</td> <td>40.27</td> <td>19.39</td> <td>66.35</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	10640.00	43.90	74.00	-30.10	57.94	37.55	15.50	67.09	0.00	---	---	PEAK	2	15960.00	47.15	74.00	-26.85	53.84	40.27	19.39	66.35	0.00	300	360	PEAK	3	15960.00	37.99	54.00	-16.01	44.68	40.27	19.39	66.35	0.00	300	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	10640.00	44.83	74.00	-29.17	58.87	37.55	15.50	67.09	0.00	---	---	PEAK																																																																																																																										
2	15960.00	48.86	74.00	-25.14	55.55	40.27	19.39	66.35	0.00	100	360	PEAK																																																																																																																										
3	15960.00	38.73	54.00	-15.27	45.42	40.28	19.39	66.36	0.00	100	360	AVERAGE																																																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	10640.00	43.90	74.00	-30.10	57.94	37.55	15.50	67.09	0.00	---	---	PEAK																																																																																																																										
2	15960.00	47.15	74.00	-26.85	53.84	40.27	19.39	66.35	0.00	300	360	PEAK																																																																																																																										
3	15960.00	37.99	54.00	-16.01	44.68	40.27	19.39	66.35	0.00	300	360	AVERAGE																																																																																																																										



Mode	16																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11n_HT20_CH100_5500MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>61.66</td> <td>74.00</td> <td>-12.34</td> <td>53.65</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>168</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.08</td> <td>64.79</td> <td>68.20</td> <td>-3.41</td> <td>56.78</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	61.66	74.00	-12.34	53.65	34.34	10.97	37.30	0.00	149	168	PEAK	2	5464.08	64.79	68.20	-3.41	56.78	34.34	10.97	37.30	0.00	149	168	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>112.29</td> <td>-----</td> <td>-----</td> <td>104.25</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>149</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	112.29	-----	-----	104.25	34.30	11.02	37.28	0.00	149	168	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.92	61.66	74.00	-12.34	53.65	34.34	10.97	37.30	0.00	149	168	PEAK																																																																																									
2	5464.08	64.79	68.20	-3.41	56.78	34.34	10.97	37.30	0.00	149	168	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	112.29	-----	-----	104.25	34.30	11.02	37.28	0.00	149	168	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>46.13</td> <td>54.00</td> <td>-7.87</td> <td>38.12</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>149</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	46.13	54.00	-7.87	38.12	34.34	10.97	37.30	0.00	149	168	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.93</td> <td>-----</td> <td>-----</td> <td>95.89</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>149</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.93	-----	-----	95.89	34.30	11.02	37.28	0.00	149	168	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.92	46.13	54.00	-7.87	38.12	34.34	10.97	37.30	0.00	149	168	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	103.93	-----	-----	95.89	34.30	11.02	37.28	0.00	149	168	AVERAGE																																																																																									



Mode	16																																																																																																				
	Band Edge																																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Vertical	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.56</td> <td>53.06</td> <td>74.00</td> <td>-20.94</td> <td>45.06</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>226</td> <td>187</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>58.74</td> <td>68.20</td> <td>-9.46</td> <td>50.72</td> <td>34.33</td> <td>10.98</td> <td>37.29</td> <td>0.00</td> <td>226</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.56	53.06	74.00	-20.94	45.06	34.34	10.96	37.30	0.00	226	187	PEAK	2	5469.52	58.74	68.20	-9.46	50.72	34.33	10.98	37.29	0.00	226	187	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.86</td> <td>-----</td> <td>-----</td> <td>99.82</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>226</td> <td>187</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	107.86	-----	-----	99.82	34.30	11.02	37.28	0.00	226	187	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5456.56	53.06	74.00	-20.94	45.06	34.34	10.96	37.30	0.00	226	187	PEAK																																																																																									
2	5469.52	58.74	68.20	-9.46	50.72	34.33	10.98	37.29	0.00	226	187	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	107.86	-----	-----	99.82	34.30	11.02	37.28	0.00	226	187	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.56</td> <td>42.24</td> <td>54.00</td> <td>-11.76</td> <td>34.24</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>226</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.56	42.24	54.00	-11.76	34.24	34.34	10.96	37.30	0.00	226	187	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>98.76</td> <td>-----</td> <td>-----</td> <td>90.72</td> <td>34.30</td> <td>11.02</td> <td>37.28</td> <td>0.00</td> <td>226</td> <td>187</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	98.76	-----	-----	90.72	34.30	11.02	37.28	0.00	226	187	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5456.56	42.24	54.00	-11.76	34.24	34.34	10.96	37.30	0.00	226	187	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5500.00	98.76	-----	-----	90.72	34.30	11.02	37.28	0.00	226	187	AVERAGE																																																																																									



Mode	16																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																																											
ANT	SISO																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>48.40</td> <td>74.00</td> <td>-25.60</td> <td>61.64</td> <td>37.80</td> <td>15.76</td> <td>66.80</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2 11000.00</td> <td>38.34</td> <td>54.00</td> <td>-15.66</td> <td>51.58</td> <td>37.80</td> <td>15.76</td> <td>66.80</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>3 16500.00</td> <td>49.00</td> <td>68.20</td> <td>-19.12</td> <td>55.09</td> <td>40.69</td> <td>19.70</td> <td>66.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11000.00	48.40	74.00	-25.60	61.64	37.80	15.76	66.80	0.00	100	360	PEAK	2 11000.00	38.34	54.00	-15.66	51.58	37.80	15.76	66.80	0.00	100	360	AVERAGE	3 16500.00	49.00	68.20	-19.12	55.09	40.69	19.70	66.40	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.80</td> <td>74.00</td> <td>-28.20</td> <td>59.04</td> <td>37.80</td> <td>15.76</td> <td>66.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2 16500.00</td> <td>48.68</td> <td>68.20</td> <td>-19.52</td> <td>54.68</td> <td>40.70</td> <td>19.70</td> <td>66.40</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11000.00	45.80	74.00	-28.20	59.04	37.80	15.76	66.80	0.00	---	---	PEAK	2 16500.00	48.68	68.20	-19.52	54.68	40.70	19.70	66.40	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1 11000.00	48.40	74.00	-25.60	61.64	37.80	15.76	66.80	0.00	100	360	PEAK																																																																																																																	
2 11000.00	38.34	54.00	-15.66	51.58	37.80	15.76	66.80	0.00	100	360	AVERAGE																																																																																																																	
3 16500.00	49.00	68.20	-19.12	55.09	40.69	19.70	66.40	0.00	---	---	PEAK																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1 11000.00	45.80	74.00	-28.20	59.04	37.80	15.76	66.80	0.00	---	---	PEAK																																																																																																																	
2 16500.00	48.68	68.20	-19.52	54.68	40.70	19.70	66.40	0.00	---	---	PEAK																																																																																																																	



Mode	17																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																
ANT	SISO																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.68</td> <td>74.00</td> <td>-23.32</td> <td>63.63</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11160.00</td> <td>40.13</td> <td>54.00</td> <td>-13.87</td> <td>53.08</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>16740.00</td> <td>51.48</td> <td>68.20</td> <td>-16.72</td> <td>57.49</td> <td>40.90</td> <td>19.84</td> <td>66.75</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	50.68	74.00	-23.32	63.63	37.94	15.88	66.77	0.00	100	360	PEAK	2	11160.00	40.13	54.00	-13.87	53.08	37.94	15.88	66.77	0.00	100	360	AVERAGE	3	16740.00	51.48	68.20	-16.72	57.49	40.90	19.84	66.75	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>45.00</td> <td>74.00</td> <td>-29.00</td> <td>57.95</td> <td>37.94</td> <td>15.88</td> <td>66.77</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>48.07</td> <td>68.20</td> <td>-20.13</td> <td>54.07</td> <td>40.89</td> <td>19.83</td> <td>66.72</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11160.00	45.00	74.00	-29.00	57.95	37.94	15.88	66.77	0.00	---	---	PEAK	2	16740.00	48.07	68.20	-20.13	54.07	40.89	19.83	66.72	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11160.00	50.68	74.00	-23.32	63.63	37.94	15.88	66.77	0.00	100	360	PEAK																																																																																																																					
2	11160.00	40.13	54.00	-13.87	53.08	37.94	15.88	66.77	0.00	100	360	AVERAGE																																																																																																																					
3	16740.00	51.48	68.20	-16.72	57.49	40.90	19.84	66.75	0.00	---	---	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11160.00	45.00	74.00	-29.00	57.95	37.94	15.88	66.77	0.00	---	---	PEAK																																																																																																																					
2	16740.00	48.07	68.20	-20.13	54.07	40.89	19.83	66.72	0.00	---	---	PEAK																																																																																																																					



Mode	18																																																																															
	Band Edge																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																															
ANT	SISO																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.60</td> <td>65.00</td> <td>68.20</td> <td>-3.20</td> <td>56.80</td> <td>34.43</td> <td>11.33</td> <td>37.56</td> <td>0.00</td> <td>125</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5726.60	65.00	68.20	-3.20	56.80	34.43	11.33	37.56	0.00	125	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>109.56</td> <td>-----</td> <td>-----</td> <td>101.41</td> <td>34.32</td> <td>11.30</td> <td>37.47</td> <td>0.00</td> <td>125</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	109.56	-----	-----	101.41	34.32	11.30	37.47	0.00	125	0 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5726.60	65.00	68.20	-3.20	56.80	34.43	11.33	37.56	0.00	125	0 PEAK																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5700.00	109.56	-----	-----	101.41	34.32	11.30	37.47	0.00	125	0 PEAK																																																																					
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.43</td> <td>-----</td> <td>-----</td> <td>92.28</td> <td>34.30</td> <td>11.29</td> <td>37.44</td> <td>0.00</td> <td>125</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5700.00	100.43	-----	-----	92.28	34.30	11.29	37.44	0.00	125	0 AVERAGE																																							
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	5700.00	100.43	-----	-----	92.28	34.30	11.29	37.44	0.00	125	0 AVERAGE																																																																					



Mode	18																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.12</td> <td>60.76</td> <td>68.20</td> <td>-7.44</td> <td>52.55</td> <td>34.43</td> <td>11.33</td> <td>37.55</td> <td>0.00</td> <td>280</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5726.12	60.76	68.20	-7.44	52.55	34.43	11.33	37.55	0.00	280	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.45</td> <td>-----</td> <td>-----</td> <td>95.30</td> <td>34.32</td> <td>11.30</td> <td>37.47</td> <td>0.00</td> <td>280</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	103.45	-----	-----	95.30	34.32	11.30	37.47	0.00	280	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5726.12	60.76	68.20	-7.44	52.55	34.43	11.33	37.55	0.00	280	360	PEAK																																																																												
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5700.00	103.45	-----	-----	95.30	34.32	11.30	37.47	0.00	280	360	PEAK																																																																												
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>95.31</td> <td>-----</td> <td>-----</td> <td>87.16</td> <td>34.30</td> <td>11.29</td> <td>37.44</td> <td>0.00</td> <td>280</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5700.00	95.31	-----	-----	87.16	34.30	11.29	37.44	0.00	280	360	AVERAGE																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5700.00	95.31	-----	-----	87.16	34.30	11.29	37.44	0.00	280	360	AVERAGE																																																																												



Mode	18																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																																																
ANT	SISO																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.28</td> <td>74.00</td> <td>-25.72</td> <td>60.79</td> <td>38.16</td> <td>16.05</td> <td>66.72</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>38.22</td> <td>54.00</td> <td>-15.78</td> <td>50.73</td> <td>38.16</td> <td>16.05</td> <td>66.72</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>49.53</td> <td>68.20</td> <td>-18.67</td> <td>55.47</td> <td>41.12</td> <td>20.06</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	48.28	74.00	-25.72	60.79	38.16	16.05	66.72	0.00	100	360	PEAK	2	11400.00	38.22	54.00	-15.78	50.73	38.16	16.05	66.72	0.00	100	360	AVERAGE	3	17100.00	49.53	68.20	-18.67	55.47	41.12	20.06	67.12	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.66</td> <td>74.00</td> <td>-28.34</td> <td>58.17</td> <td>38.16</td> <td>16.05</td> <td>66.72</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.53</td> <td>68.20</td> <td>-20.67</td> <td>53.47</td> <td>41.12</td> <td>20.06</td> <td>67.12</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11400.00	45.66	74.00	-28.34	58.17	38.16	16.05	66.72	0.00	---	---	PEAK	2	17100.00	47.53	68.20	-20.67	53.47	41.12	20.06	67.12	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11400.00	48.28	74.00	-25.72	60.79	38.16	16.05	66.72	0.00	100	360	PEAK																																																																																																																					
2	11400.00	38.22	54.00	-15.78	50.73	38.16	16.05	66.72	0.00	100	360	AVERAGE																																																																																																																					
3	17100.00	49.53	68.20	-18.67	55.47	41.12	20.06	67.12	0.00	---	---	PEAK																																																																																																																					
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1	11400.00	45.66	74.00	-28.34	58.17	38.16	16.05	66.72	0.00	---	---	PEAK																																																																																																																					
2	17100.00	47.53	68.20	-20.67	53.47	41.12	20.06	67.12	0.00	---	---	PEAK																																																																																																																					



Mode	19																																																																					
	Band Edge - L																																																																					
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_5190MHz																																																																					
ANT	SISO																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.60</td> <td>68.90</td> <td>74.00</td> <td>-5.10</td> <td>61.63</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>153</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5149.60	68.90	74.00	-5.10	61.63	34.05	10.65	37.43	0.00	153	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>106.52</td> <td>-----</td> <td>-----</td> <td>99.06</td> <td>34.18</td> <td>10.70</td> <td>37.42</td> <td>0.00</td> <td>153</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5190.00	106.52	-----	-----	99.06	34.18	10.70	37.42	0.00	153	0 PEAK		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																													
1	5149.60	68.90	74.00	-5.10	61.63	34.05	10.65	37.43	0.00	153	0 PEAK																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																											
1	5190.00	106.52	-----	-----	99.06	34.18	10.70	37.42	0.00	153	0 PEAK																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>50.63</td> <td>54.00</td> <td>-3.37</td> <td>43.36</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>153</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5149.92	50.63	54.00	-3.37	43.36	34.05	10.65	37.43	0.00	153	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>97.69</td> <td>-----</td> <td>-----</td> <td>90.25</td> <td>34.16</td> <td>10.70</td> <td>37.42</td> <td>0.00</td> <td>153</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	1	5190.00	97.69	-----	-----	90.25	34.16	10.70	37.42	0.00	153	0 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																											
1	5149.92	50.63	54.00	-3.37	43.36	34.05	10.65	37.43	0.00	153	0 AVERAGE																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																											
1	5190.00	97.69	-----	-----	90.25	34.16	10.70	37.42	0.00	153	0 AVERAGE																																																											



Mode	19																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.65</td> <td>50.84</td> <td>74.00</td> <td>-23.16</td> <td>43.00</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>153</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.65	50.84	74.00	-23.16	43.00	34.35	10.84	37.35	0.00	153	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5350.65	50.84	74.00	-23.16	43.00	34.35	10.84	37.35	0.00	153	0 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.43</td> <td>40.75</td> <td>54.00</td> <td>-13.25</td> <td>32.90</td> <td>34.35</td> <td>10.84</td> <td>37.34</td> <td>0.00</td> <td>153</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5354.43	40.75	54.00	-13.25	32.90	34.35	10.84	37.34	0.00	153	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5354.43	40.75	54.00	-13.25	32.90	34.35	10.84	37.34	0.00	153	0 AVERAGE																																		



Mode	19																																																																			
	Band Edge - L																																																																			
	U-NII-1_5.15-5.25_802.11n_HT40_CH38_5190MHz																																																																			
ANT	SISO																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>65.97</td> <td>74.00</td> <td>-8.03</td> <td>58.70</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>194</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5149.76	65.97	74.00	-8.03	58.70	34.05	10.65	37.43	0.00	194	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>101.74</td> <td>-----</td> <td>-----</td> <td>94.30</td> <td>34.16</td> <td>10.70</td> <td>37.42</td> <td>0.00</td> <td>194</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5190.00	101.74	-----	-----	94.30	34.16	10.70	37.42	0.00	194	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																											
1	5149.76	65.97	74.00	-8.03	58.70	34.05	10.65	37.43	0.00	194	360	PEAK																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																											
1	5190.00	101.74	-----	-----	94.30	34.16	10.70	37.42	0.00	194	360	PEAK																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>46.30</td> <td>54.00</td> <td>-7.70</td> <td>39.03</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>194</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5149.92	46.30	54.00	-7.70	39.03	34.05	10.65	37.43	0.00	194	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>93.42</td> <td>-----</td> <td>-----</td> <td>85.96</td> <td>34.18</td> <td>10.70</td> <td>37.42</td> <td>0.00</td> <td>194</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	1	5190.00	93.42	-----	-----	85.96	34.18	10.70	37.42	0.00	194	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																											
1	5149.92	46.30	54.00	-7.70	39.03	34.05	10.65	37.43	0.00	194	360	AVERAGE																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																											
1	5190.00	93.42	-----	-----	85.96	34.18	10.70	37.42	0.00	194	360	AVERAGE																																																								



Mode	19																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																												
ANT	SISO																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.91</td> <td>47.64</td> <td>74.00</td> <td>-26.36</td> <td>39.77</td> <td>34.36</td> <td>10.85</td> <td>37.34</td> <td>0.00</td> <td>194</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5360.91	47.64	74.00	-26.36	39.77	34.36	10.85	37.34	0.00	194	360	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5360.91	47.64	74.00	-26.36	39.77	34.36	10.85	37.34	0.00	194	360	PEAK																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.11</td> <td>39.01</td> <td>54.00</td> <td>-14.99</td> <td>31.17</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>194</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.11	39.01	54.00	-14.99	31.17	34.35	10.84	37.35	0.00	194	360	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5350.11	39.01	54.00	-14.99	31.17	34.35	10.84	37.35	0.00	194	360	AVERAGE																																	



Mode	19																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>43.94</td> <td>68.20</td> <td>-24.26</td> <td>58.63</td> <td>37.37</td> <td>15.31</td> <td>67.37</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>51.05</td> <td>74.00</td> <td>-22.95</td> <td>57.83</td> <td>40.00</td> <td>19.10</td> <td>65.88</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15570.00</td> <td>39.22</td> <td>54.00</td> <td>-14.78</td> <td>46.01</td> <td>40.00</td> <td>19.10</td> <td>65.89</td> <td>0.00</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10380.00	43.94	68.20	-24.26	58.63	37.37	15.31	67.37	0.00	---	---	PEAK	2	15570.00	51.05	74.00	-22.95	57.83	40.00	19.10	65.88	0.00	100	360	PEAK	3	15570.00	39.22	54.00	-14.78	46.01	40.00	19.10	65.89	0.00	100	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>44.51</td> <td>68.20</td> <td>-23.69</td> <td>59.20</td> <td>37.37</td> <td>15.31</td> <td>67.37</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>48.94</td> <td>74.00</td> <td>-25.06</td> <td>55.72</td> <td>40.00</td> <td>19.10</td> <td>65.88</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15570.00</td> <td>38.01</td> <td>54.00</td> <td>-15.99</td> <td>44.79</td> <td>40.00</td> <td>19.10</td> <td>65.88</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10380.00	44.51	68.20	-23.69	59.20	37.37	15.31	67.37	0.00	---	---	PEAK	2	15570.00	48.94	74.00	-25.06	55.72	40.00	19.10	65.88	0.00	300	360	PEAK	3	15570.00	38.01	54.00	-15.99	44.79	40.00	19.10	65.88	0.00	300	360	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10380.00	43.94	68.20	-24.26	58.63	37.37	15.31	67.37	0.00	---	---	PEAK																																																																																																																																		
2	15570.00	51.05	74.00	-22.95	57.83	40.00	19.10	65.88	0.00	100	360	PEAK																																																																																																																																		
3	15570.00	39.22	54.00	-14.78	46.01	40.00	19.10	65.89	0.00	100	360	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10380.00	44.51	68.20	-23.69	59.20	37.37	15.31	67.37	0.00	---	---	PEAK																																																																																																																																		
2	15570.00	48.94	74.00	-25.06	55.72	40.00	19.10	65.88	0.00	300	360	PEAK																																																																																																																																		
3	15570.00	38.01	54.00	-15.99	44.79	40.00	19.10	65.88	0.00	300	360	AVERAGE																																																																																																																																		



Mode	20																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																																																																													
ANT	SISO																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>43.76</td> <td>68.20</td> <td>-24.44</td> <td>58.23</td> <td>37.42</td> <td>15.37</td> <td>67.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>54.79</td> <td>74.00</td> <td>-19.21</td> <td>61.55</td> <td>40.08</td> <td>19.19</td> <td>66.03</td> <td>0.00</td> <td>100</td> <td>322</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15690.00</td> <td>45.31</td> <td>54.00</td> <td>-8.69</td> <td>52.07</td> <td>40.08</td> <td>19.19</td> <td>66.03</td> <td>0.00</td> <td>100</td> <td>322</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10460.00	43.76	68.20	-24.44	58.23	37.42	15.37	67.26	0.00	---	---	PEAK	2	15690.00	54.79	74.00	-19.21	61.55	40.08	19.19	66.03	0.00	100	322	PEAK	3	15690.00	45.31	54.00	-8.69	52.07	40.08	19.19	66.03	0.00	100	322	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>43.98</td> <td>68.20</td> <td>-24.22</td> <td>58.45</td> <td>37.42</td> <td>15.37</td> <td>67.26</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>48.28</td> <td>74.00</td> <td>-25.72</td> <td>55.04</td> <td>40.08</td> <td>19.19</td> <td>66.03</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15690.00</td> <td>38.93</td> <td>54.00</td> <td>-15.07</td> <td>45.68</td> <td>40.09</td> <td>19.19</td> <td>66.03</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10460.00	43.98	68.20	-24.22	58.45	37.42	15.37	67.26	0.00	---	---	PEAK	2	15690.00	48.28	74.00	-25.72	55.04	40.08	19.19	66.03	0.00	300	360	PEAK	3	15690.00	38.93	54.00	-15.07	45.68	40.09	19.19	66.03	0.00	300	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10460.00	43.76	68.20	-24.44	58.23	37.42	15.37	67.26	0.00	---	---	PEAK																																																																																																																																		
2	15690.00	54.79	74.00	-19.21	61.55	40.08	19.19	66.03	0.00	100	322	PEAK																																																																																																																																		
3	15690.00	45.31	54.00	-8.69	52.07	40.08	19.19	66.03	0.00	100	322	AVERAGE																																																																																																																																		
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	10460.00	43.98	68.20	-24.22	58.45	37.42	15.37	67.26	0.00	---	---	PEAK																																																																																																																																		
2	15690.00	48.28	74.00	-25.72	55.04	40.08	19.19	66.03	0.00	300	360	PEAK																																																																																																																																		
3	15690.00	38.93	54.00	-15.07	45.68	40.09	19.19	66.03	0.00	300	360	AVERAGE																																																																																																																																		



Mode	21																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																																																																												
ANT	SISO																																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																																											
Peak Avg																																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>43.75</td> <td>68.20</td> <td>-24.45</td> <td>58.01</td> <td>37.48</td> <td>15.43</td> <td>67.17</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>52.68</td> <td>74.00</td> <td>-21.32</td> <td>59.40</td> <td>40.17</td> <td>19.28</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>321</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>42.73</td> <td>54.00</td> <td>-11.27</td> <td>49.45</td> <td>40.17</td> <td>19.28</td> <td>66.17</td> <td>0.00</td> <td>100</td> <td>321</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10540.00	43.75	68.20	-24.45	58.01	37.48	15.43	67.17	0.00	---	---	PEAK	2	15810.00	52.68	74.00	-21.32	59.40	40.17	19.28	66.17	0.00	100	321	PEAK	3	15810.00	42.73	54.00	-11.27	49.45	40.17	19.28	66.17	0.00	100	321	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>43.23</td> <td>68.20</td> <td>-24.97</td> <td>57.49</td> <td>37.48</td> <td>15.43</td> <td>67.17</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>47.58</td> <td>74.00</td> <td>-26.42</td> <td>54.30</td> <td>40.17</td> <td>19.28</td> <td>66.17</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15810.00</td> <td>38.14</td> <td>54.00</td> <td>-15.86</td> <td>44.86</td> <td>40.18</td> <td>19.29</td> <td>66.19</td> <td>0.00</td> <td>300</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10540.00	43.23	68.20	-24.97	57.49	37.48	15.43	67.17	0.00	---	---	PEAK	2	15810.00	47.58	74.00	-26.42	54.30	40.17	19.28	66.17	0.00	300	360	PEAK	3	15810.00	38.14	54.00	-15.86	44.86	40.18	19.29	66.19	0.00	300	360
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10540.00	43.75	68.20	-24.45	58.01	37.48	15.43	67.17	0.00	---	---	PEAK																																																																																																																																	
2	15810.00	52.68	74.00	-21.32	59.40	40.17	19.28	66.17	0.00	100	321	PEAK																																																																																																																																	
3	15810.00	42.73	54.00	-11.27	49.45	40.17	19.28	66.17	0.00	100	321	AVERAGE																																																																																																																																	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	10540.00	43.23	68.20	-24.97	57.49	37.48	15.43	67.17	0.00	---	---	PEAK																																																																																																																																	
2	15810.00	47.58	74.00	-26.42	54.30	40.17	19.28	66.17	0.00	300	360	PEAK																																																																																																																																	
3	15810.00	38.14	54.00	-15.86	44.86	40.18	19.29	66.19	0.00	300	360	AVERAGE																																																																																																																																	







Mode	22																																																																																							
	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5106.08</td> <td>49.95</td> <td>74.00</td> <td>-24.05</td> <td>42.87</td> <td>33.92</td> <td>10.61</td> <td>37.45</td> <td>0.00</td> <td>155</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5106.08	49.95	74.00	-24.05	42.87	33.92	10.61	37.45	0.00	155	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>106.10</td> <td>-----</td> <td>-----</td> <td>98.35</td> <td>34.31</td> <td>10.80</td> <td>37.36</td> <td>0.00</td> <td>155</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	106.10	-----	-----	98.35	34.31	10.80	37.36	0.00	155	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5106.08	49.95	74.00	-24.05	42.87	33.92	10.61	37.45	0.00	155	0 PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5310.00	106.10	-----	-----	98.35	34.31	10.80	37.36	0.00	155	0 PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.20</td> <td>40.26</td> <td>54.00</td> <td>-13.74</td> <td>33.04</td> <td>34.02</td> <td>10.64</td> <td>37.44</td> <td>0.00</td> <td>155</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5139.20	40.26	54.00	-13.74	33.04	34.02	10.64	37.44	0.00	155	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>97.63</td> <td>-----</td> <td>-----</td> <td>89.89</td> <td>34.31</td> <td>10.80</td> <td>37.37</td> <td>0.00</td> <td>155</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	97.63	-----	-----	89.89	34.31	10.80	37.37	0.00	155	0 AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5139.20	40.26	54.00	-13.74	33.04	34.02	10.64	37.44	0.00	155	0 AVERAGE																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5310.00	97.63	-----	-----	89.89	34.31	10.80	37.37	0.00	155	0 AVERAGE																																																																													



Mode	22																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.70</td> <td>66.68</td> <td>74.00</td> <td>-7.32</td> <td>58.81</td> <td>34.36</td> <td>10.85</td> <td>37.34</td> <td>0.00</td> <td>155</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5355.70	66.68	74.00	-7.32	58.81	34.36	10.85	37.34	0.00	155	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5355.70	66.68	74.00	-7.32	58.81	34.36	10.85	37.34	0.00	155	0 PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.60</td> <td>50.15</td> <td>54.00</td> <td>-3.85</td> <td>42.31</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>155</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.60	50.15	54.00	-3.85	42.31	34.35	10.84	37.35	0.00	155	0 AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5353.60	50.15	54.00	-3.85	42.31	34.35	10.84	37.35	0.00	155	0 AVERAGE																																		

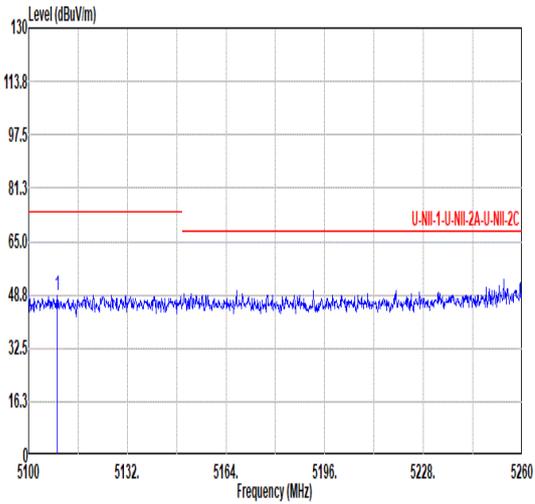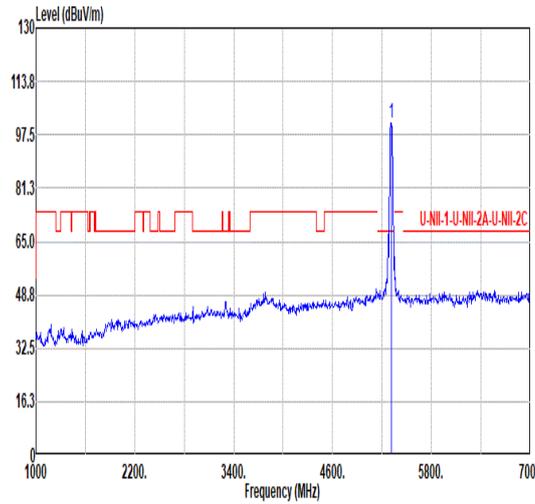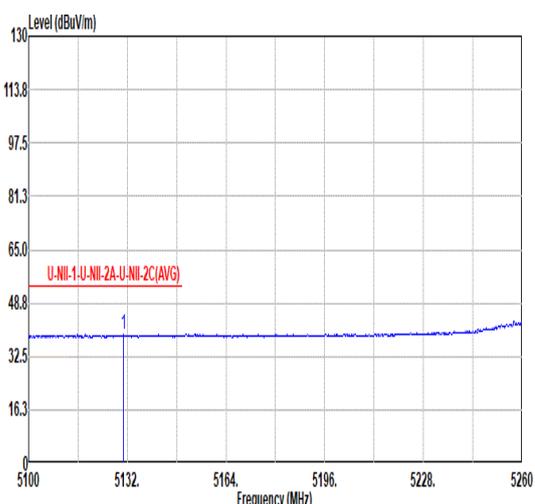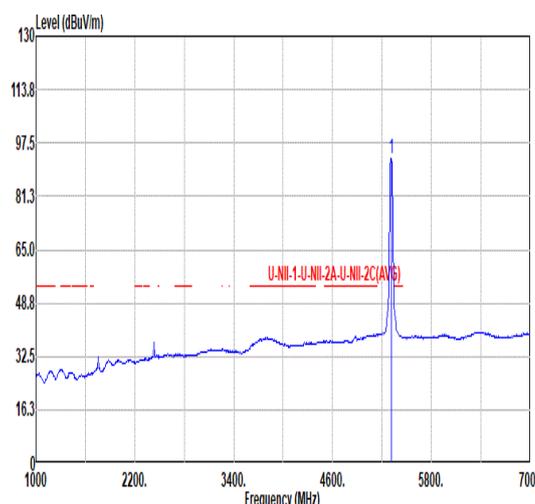

Mode	22																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <table border="1" data-bbox="263 1120 798 1243"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5109.28</td> <td>48.80</td> <td>74.00</td> <td>-25.20</td> <td>41.71</td> <td>33.93</td> <td>10.61</td> <td>37.45</td> <td>0.00</td> <td>227</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5109.28	48.80	74.00	-25.20	41.71	33.93	10.61	37.45	0.00	227	360	PEAK	 <table border="1" data-bbox="901 1120 1436 1243"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>101.00</td> <td>-----</td> <td>-----</td> <td>93.33</td> <td>34.31</td> <td>10.80</td> <td>37.36</td> <td>0.00</td> <td>227</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	101.00	-----	-----	93.33	34.31	10.80	37.36	0.00	227	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5109.28	48.80	74.00	-25.20	41.71	33.93	10.61	37.45	0.00	227	360	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5310.00	101.00	-----	-----	93.33	34.31	10.80	37.36	0.00	227	360	PEAK																																																																														
Avg	 <table border="1" data-bbox="263 1792 798 1915"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5130.72</td> <td>39.11</td> <td>54.00</td> <td>-14.89</td> <td>31.93</td> <td>33.99</td> <td>10.63</td> <td>37.44</td> <td>0.00</td> <td>227</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5130.72	39.11	54.00	-14.89	31.93	33.99	10.63	37.44	0.00	227	360	AVERAGE	 <table border="1" data-bbox="901 1792 1436 1915"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>92.96</td> <td>-----</td> <td>-----</td> <td>85.22</td> <td>34.31</td> <td>10.80</td> <td>37.37</td> <td>0.00</td> <td>227</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5310.00	92.96	-----	-----	85.22	34.31	10.80	37.37	0.00	227	360	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5130.72	39.11	54.00	-14.89	31.93	33.99	10.63	37.44	0.00	227	360	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5310.00	92.96	-----	-----	85.22	34.31	10.80	37.37	0.00	227	360	AVERAGE																																																																														



Mode	22																																												
	Band Edge - R																																												
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																												
ANT	SISO																																												
Pol.	Vertical	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.80</td> <td>63.65</td> <td>74.00</td> <td>-10.35</td> <td>55.81</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>227</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.80	63.65	74.00	-10.35	55.81	34.35	10.84	37.35	0.00	227	360	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5352.80	63.65	74.00	-10.35	55.81	34.35	10.84	37.35	0.00	227	360	PEAK																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>45.87</td> <td>54.00</td> <td>-8.13</td> <td>38.03</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>227</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.40	45.87	54.00	-8.13	38.03	34.35	10.84	37.35	0.00	227	360	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5350.40	45.87	54.00	-8.13	38.03	34.35	10.84	37.35	0.00	227	360	AVERAGE																																	



Mode	22																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																																			
ANT	SISO																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>43.75</td> <td>74.00</td> <td>-30.25</td> <td>57.83</td> <td>37.53</td> <td>15.49</td> <td>67.10</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>44.39</td> <td>74.00</td> <td>-29.61</td> <td>51.09</td> <td>40.25</td> <td>19.37</td> <td>66.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10620.00	43.75	74.00	-30.25	57.83	37.53	15.49	67.10	0.00	---	---	PEAK	2	15930.00	44.39	74.00	-29.61	51.09	40.25	19.37	66.32	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>43.25</td> <td>74.00</td> <td>-30.75</td> <td>57.33</td> <td>37.53</td> <td>15.49</td> <td>67.10</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>45.17</td> <td>74.00</td> <td>-28.83</td> <td>51.87</td> <td>40.25</td> <td>19.37</td> <td>66.32</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10620.00	43.25	74.00	-30.75	57.33	37.53	15.49	67.10	0.00	---	---	PEAK	2	15930.00	45.17	74.00	-28.83	51.87	40.25	19.37	66.32	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10620.00	43.75	74.00	-30.25	57.83	37.53	15.49	67.10	0.00	---	---	PEAK																																																																																																								
2	15930.00	44.39	74.00	-29.61	51.09	40.25	19.37	66.32	0.00	---	---	PEAK																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10620.00	43.25	74.00	-30.75	57.33	37.53	15.49	67.10	0.00	---	---	PEAK																																																																																																								
2	15930.00	45.17	74.00	-28.83	51.87	40.25	19.37	66.32	0.00	---	---	PEAK																																																																																																								







Mode	23																																																																																														
	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11n_HT40_CH102_5510MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.92</td> <td>61.62</td> <td>74.00</td> <td>-12.38</td> <td>53.61</td> <td>34.35</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>131</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5462.96</td> <td>64.70</td> <td>68.20</td> <td>-3.50</td> <td>56.69</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>131</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5451.92	61.62	74.00	-12.38	53.61	34.35	10.96	37.30	0.00	131	0	PEAK	2	5462.96	64.70	68.20	-3.50	56.69	34.34	10.97	37.30	0.00	131	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>107.06</td> <td>-----</td> <td>-----</td> <td>99.00</td> <td>34.31</td> <td>11.03</td> <td>37.28</td> <td>0.00</td> <td>131</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	107.06	-----	-----	99.00	34.31	11.03	37.28	0.00	131	0	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5451.92	61.62	74.00	-12.38	53.61	34.35	10.96	37.30	0.00	131	0	PEAK																																																																																			
2	5462.96	64.70	68.20	-3.50	56.69	34.34	10.97	37.30	0.00	131	0	PEAK																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	107.06	-----	-----	99.00	34.31	11.03	37.28	0.00	131	0	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>46.66</td> <td>54.00</td> <td>-7.34</td> <td>38.65</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>131</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.92	46.66	54.00	-7.34	38.65	34.34	10.97	37.30	0.00	131	0	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>98.20</td> <td>-----</td> <td>-----</td> <td>90.14</td> <td>34.31</td> <td>11.03</td> <td>37.28</td> <td>0.00</td> <td>131</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5510.00	98.20	-----	-----	90.14	34.31	11.03	37.28	0.00	131	0	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5459.92	46.66	54.00	-7.34	38.65	34.34	10.97	37.30	0.00	131	0	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5510.00	98.20	-----	-----	90.14	34.31	11.03	37.28	0.00	131	0	AVERAGE																																																																																			



Mode	23																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p>	Blank																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5738.36</td> <td>50.04</td> <td>68.20</td> <td>-18.16</td> <td>41.80</td> <td>34.49</td> <td>11.35</td> <td>37.60</td> <td>0.00</td> <td>131</td> <td>0 PEAK</td> </tr> </tbody> </table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5738.36	50.04	68.20	-18.16	41.80	34.49	11.35	37.60	0.00	131	0 PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5738.36	50.04	68.20	-18.16	41.80	34.49	11.35	37.60	0.00	131	0 PEAK																																		

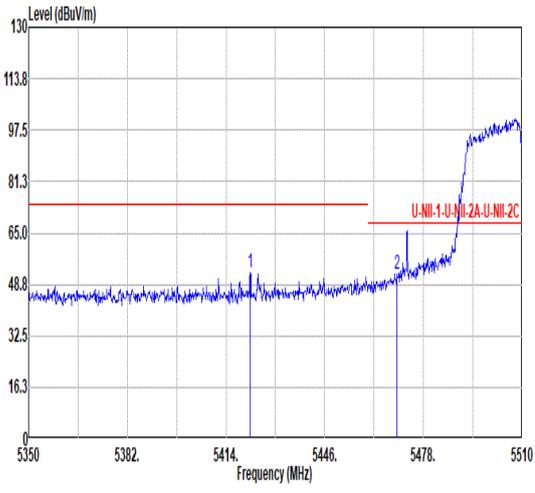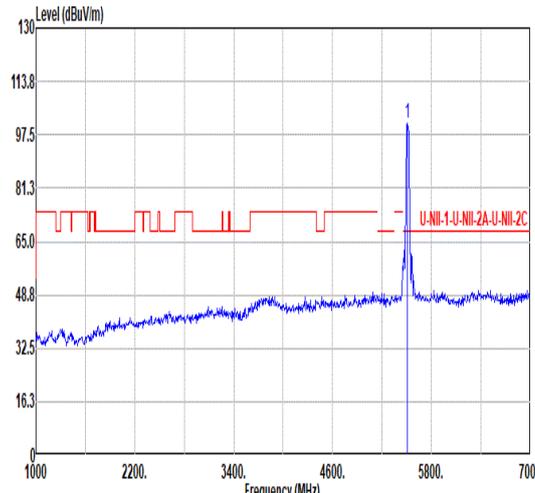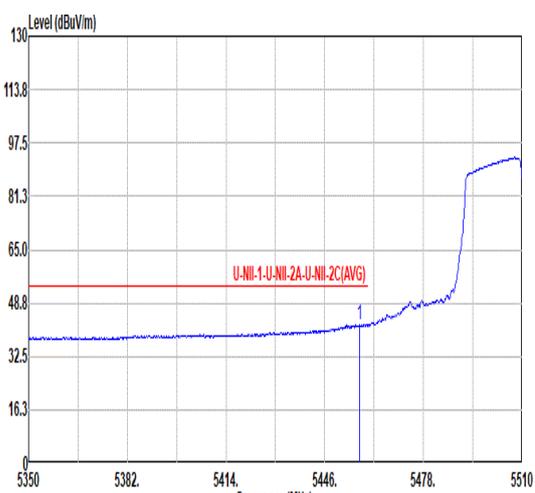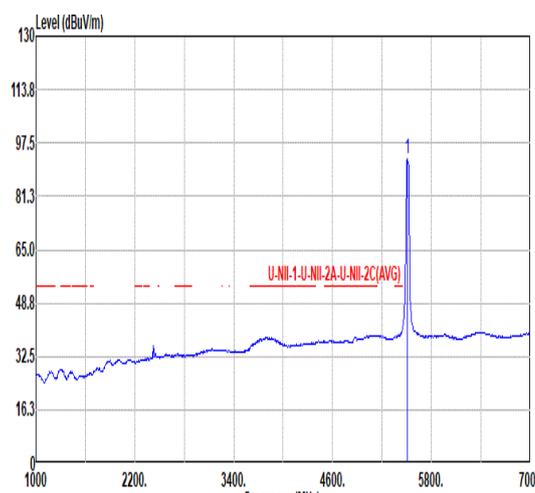

Mode	23																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																						
ANT	SISO																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5421.84</td> <td>52.34</td> <td>74.00</td> <td>-21.66</td> <td>44.36</td> <td>34.38</td> <td>10.92</td> <td>37.32</td> <td>0.00</td> <td>218</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>52.21</td> <td>68.20</td> <td>-15.99</td> <td>44.19</td> <td>34.33</td> <td>10.98</td> <td>37.29</td> <td>0.00</td> <td>218</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5421.84	52.34	74.00	-21.66	44.36	34.38	10.92	37.32	0.00	218	360	PEAK	2	5469.52	52.21	68.20	-15.99	44.19	34.33	10.98	37.29	0.00	218	360	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>101.22</td> <td>-----</td> <td>-----</td> <td>93.16</td> <td>34.31</td> <td>11.03</td> <td>37.28</td> <td>0.00</td> <td>218</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5510.00	101.22	-----	-----	93.16	34.31	11.03	37.28	0.00	218	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5421.84	52.34	74.00	-21.66	44.36	34.38	10.92	37.32	0.00	218	360	PEAK																																																																																											
2	5469.52	52.21	68.20	-15.99	44.19	34.33	10.98	37.29	0.00	218	360	PEAK																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5510.00	101.22	-----	-----	93.16	34.31	11.03	37.28	0.00	218	360	PEAK																																																																																											
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.36</td> <td>42.31</td> <td>54.00</td> <td>-11.69</td> <td>34.31</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>218</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5457.36	42.31	54.00	-11.69	34.31	34.34	10.96	37.30	0.00	218	360	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.64</td> <td>-----</td> <td>-----</td> <td>84.58</td> <td>34.31</td> <td>11.03</td> <td>37.28</td> <td>0.00</td> <td>218</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5510.00	92.64	-----	-----	84.58	34.31	11.03	37.28	0.00	218	360	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5457.36	42.31	54.00	-11.69	34.31	34.34	10.96	37.30	0.00	218	360	AVERAGE																																																																																											
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																													
1	5510.00	92.64	-----	-----	84.58	34.31	11.03	37.28	0.00	218	360	AVERAGE																																																																																											



Mode	23																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																													
ANT	SISO																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p>	Blank																																												
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5764.04</td> <td>49.52</td> <td>68.20</td> <td>-18.68</td> <td>41.21</td> <td>34.62</td> <td>11.39</td> <td>37.70</td> <td>0.00</td> <td>218</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5764.04	49.52	68.20	-18.68	41.21	34.62	11.39	37.70	0.00	218	360	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5764.04	49.52	68.20	-18.68	41.21	34.62	11.39	37.70	0.00	218	360	PEAK																																		







Mode	23																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																											
ANT	SISO																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>44.39</td> <td>74.00</td> <td>-29.61</td> <td>57.60</td> <td>37.82</td> <td>15.77</td> <td>66.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>45.82</td> <td>68.20</td> <td>-22.38</td> <td>51.81</td> <td>40.71</td> <td>19.71</td> <td>66.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11020.00	44.39	74.00	-29.61	57.60	37.82	15.77	66.80	0.00	---	---	PEAK	2	16530.00	45.82	68.20	-22.38	51.81	40.71	19.71	66.41	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>45.45</td> <td>74.00</td> <td>-28.55</td> <td>58.66</td> <td>37.82</td> <td>15.77</td> <td>66.80</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>44.84</td> <td>68.20</td> <td>-23.36</td> <td>50.83</td> <td>40.71</td> <td>19.71</td> <td>66.41</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11020.00	45.45	74.00	-28.55	58.66	37.82	15.77	66.80	0.00	---	---	PEAK	2	16530.00	44.84	68.20	-23.36	50.83	40.71	19.71	66.41	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11020.00	44.39	74.00	-29.61	57.60	37.82	15.77	66.80	0.00	---	---	PEAK																																																																																																
2	16530.00	45.82	68.20	-22.38	51.81	40.71	19.71	66.41	0.00	---	---	PEAK																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11020.00	45.45	74.00	-28.55	58.66	37.82	15.77	66.80	0.00	---	---	PEAK																																																																																																
2	16530.00	44.84	68.20	-23.36	50.83	40.71	19.71	66.41	0.00	---	---	PEAK																																																																																																



Mode	24																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-2C_5.47-5.725_802.11n HT40_CH110_5550MHz																																																																																																																								
ANT	SISO																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																							
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>44.16</td> <td>74.00</td> <td>-29.84</td> <td>57.22</td> <td>37.89</td> <td>15.83</td> <td>66.78</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>46.14</td> <td>68.20</td> <td>-22.06</td> <td>52.15</td> <td>40.00</td> <td>19.77</td> <td>66.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11100.00	44.16	74.00	-29.84	57.22	37.89	15.83	66.78	0.00	---	---	PEAK	2	16650.00	46.14	68.20	-22.06	52.15	40.00	19.77	66.58	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>47.88</td> <td>74.00</td> <td>-26.12</td> <td>60.94</td> <td>37.89</td> <td>15.83</td> <td>66.78</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>11100.00</td> <td>37.83</td> <td>54.00</td> <td>-16.17</td> <td>50.88</td> <td>37.89</td> <td>15.84</td> <td>66.78</td> <td>0.00</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> <tr> <td>3</td> <td>16650.00</td> <td>46.98</td> <td>68.20</td> <td>-21.22</td> <td>52.99</td> <td>40.00</td> <td>19.77</td> <td>66.58</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11100.00	47.88	74.00	-26.12	60.94	37.89	15.83	66.78	0.00	100	0	PEAK	2	11100.00	37.83	54.00	-16.17	50.88	37.89	15.84	66.78	0.00	100	0	AVERAGE	3	16650.00	46.98	68.20	-21.22	52.99	40.00	19.77	66.58	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	11100.00	44.16	74.00	-29.84	57.22	37.89	15.83	66.78	0.00	---	---	PEAK																																																																																																													
2	16650.00	46.14	68.20	-22.06	52.15	40.00	19.77	66.58	0.00	---	---	PEAK																																																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																	
1	11100.00	47.88	74.00	-26.12	60.94	37.89	15.83	66.78	0.00	100	0	PEAK																																																																																																													
2	11100.00	37.83	54.00	-16.17	50.88	37.89	15.84	66.78	0.00	100	0	AVERAGE																																																																																																													
3	16650.00	46.98	68.20	-21.22	52.99	40.00	19.77	66.58	0.00	---	---	PEAK																																																																																																													

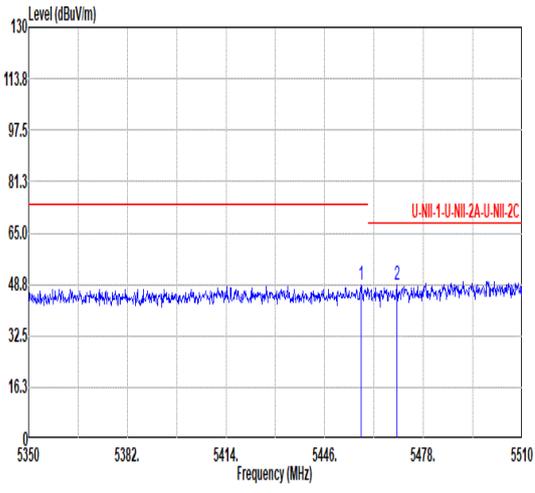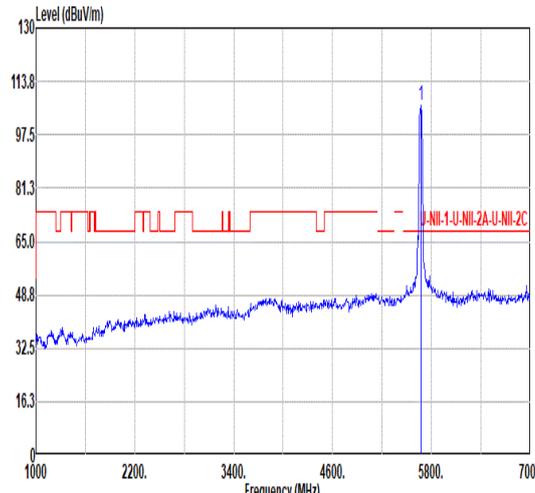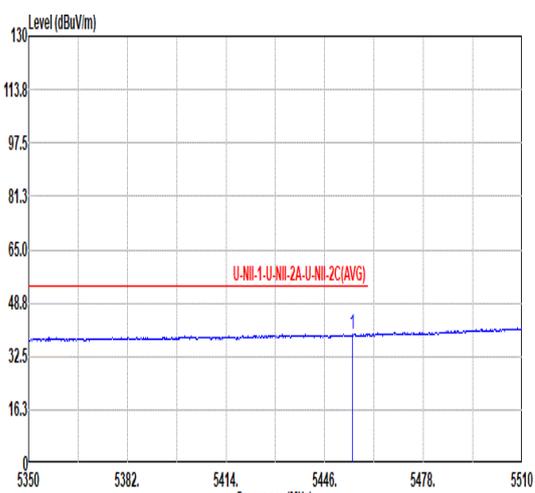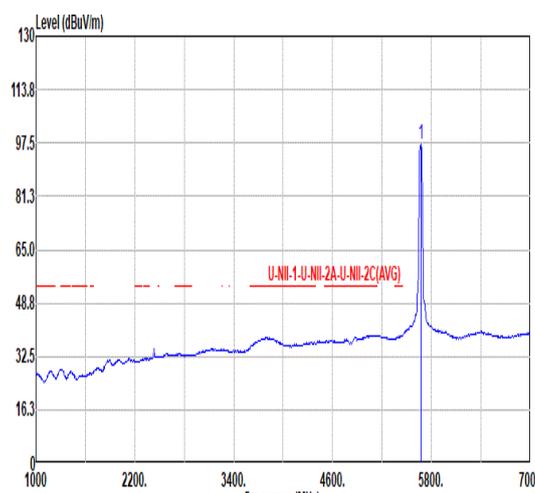

Mode	25																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																		
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.68</td> <td>48.46</td> <td>74.00</td> <td>-25.54</td> <td>40.46</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>118</td> <td>0 PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>48.70</td> <td>68.20</td> <td>-19.50</td> <td>40.68</td> <td>34.33</td> <td>10.98</td> <td>37.29</td> <td>0.00</td> <td>118</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5457.68	48.46	74.00	-25.54	40.46	34.34	10.96	37.30	0.00	118	0 PEAK	2	5469.52	48.70	68.20	-19.50	40.68	34.33	10.98	37.29	0.00	118	0 PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>106.22</td> <td>-----</td> <td>-----</td> <td>97.94</td> <td>34.36</td> <td>11.25</td> <td>37.33</td> <td>0.00</td> <td>118</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	106.22	-----	-----	97.94	34.36	11.25	37.33	0.00	118	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5457.68	48.46	74.00	-25.54	40.46	34.34	10.96	37.30	0.00	118	0 PEAK																																																																																									
2	5469.52	48.70	68.20	-19.50	40.68	34.33	10.98	37.29	0.00	118	0 PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5670.00	106.22	-----	-----	97.94	34.36	11.25	37.33	0.00	118	0 PEAK																																																																																									
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.96</td> <td>39.10</td> <td>54.00</td> <td>-14.90</td> <td>31.09</td> <td>34.35</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>118</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5454.96	39.10	54.00	-14.90	31.09	34.35	10.96	37.30	0.00	118	0 AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>97.00</td> <td>-----</td> <td>-----</td> <td>88.80</td> <td>34.36</td> <td>11.25</td> <td>37.33</td> <td>0.00</td> <td>118</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	97.00	-----	-----	88.80	34.36	11.25	37.33	0.00	118	0 AVERAGE												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5454.96	39.10	54.00	-14.90	31.09	34.35	10.96	37.30	0.00	118	0 AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5670.00	97.00	-----	-----	88.80	34.36	11.25	37.33	0.00	118	0 AVERAGE																																																																																									



Mode	25																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.36</td> <td>64.11</td> <td>68.20</td> <td>-4.09</td> <td>55.90</td> <td>34.43</td> <td>11.33</td> <td>37.55</td> <td>0.00</td> <td>118</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5726.36	64.11	68.20	-4.09	55.90	34.43	11.33	37.55	0.00	118	0 PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1	5726.36	64.11	68.20	-4.09	55.90	34.43	11.33	37.55	0.00	118	0 PEAK																																		



Mode	25																																																																																																				
	Band Edge - L																																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Vertical	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.40</td> <td>48.13</td> <td>74.00</td> <td>-25.87</td> <td>40.13</td> <td>34.35</td> <td>10.95</td> <td>37.30</td> <td>0.00</td> <td>223</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5460.08</td> <td>47.75</td> <td>68.20</td> <td>-20.45</td> <td>39.74</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>223</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.40	48.13	74.00	-25.87	40.13	34.35	10.95	37.30	0.00	223	360	PEAK	2	5460.08	47.75	68.20	-20.45	39.74	34.34	10.97	37.30	0.00	223	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>101.67</td> <td>-----</td> <td>-----</td> <td>93.39</td> <td>34.36</td> <td>11.25</td> <td>37.33</td> <td>0.00</td> <td>223</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	101.67	-----	-----	93.39	34.36	11.25	37.33	0.00	223	360	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5448.40	48.13	74.00	-25.87	40.13	34.35	10.95	37.30	0.00	223	360	PEAK																																																																																									
2	5460.08	47.75	68.20	-20.45	39.74	34.34	10.97	37.30	0.00	223	360	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5670.00	101.67	-----	-----	93.39	34.36	11.25	37.33	0.00	223	360	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>38.06</td> <td>54.00</td> <td>-15.94</td> <td>30.05</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>223</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	38.06	54.00	-15.94	30.05	34.34	10.97	37.30	0.00	223	360	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.44</td> <td>-----</td> <td>-----</td> <td>84.16</td> <td>34.36</td> <td>11.25</td> <td>37.33</td> <td>0.00</td> <td>223</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	92.44	-----	-----	84.16	34.36	11.25	37.33	0.00	223	360	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.92	38.06	54.00	-15.94	30.05	34.34	10.97	37.30	0.00	223	360	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5670.00	92.44	-----	-----	84.16	34.36	11.25	37.33	0.00	223	360	AVERAGE																																																																																									



Mode	25																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																														
ANT	SISO																																														
Pol.	Vertical	Fundamental																																													
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.04</td> <td>57.68</td> <td>68.20</td> <td>-10.52</td> <td>49.47</td> <td>34.43</td> <td>11.33</td> <td>37.55</td> <td>0.00</td> <td>223</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5726.04	57.68	68.20	-10.52	49.47	34.43	11.33	37.55	0.00	223	360	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1	5726.04	57.68	68.20	-10.52	49.47	34.43	11.33	37.55	0.00	223	360	PEAK																																			



Mode	25																																																																																																											
	Harmonic																																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																											
ANT	SISO																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>56.78</td> <td>38.11</td> <td>16.01</td> <td>66.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>44.64</td> <td>68.20</td> <td>-23.56</td> <td>50.67</td> <td>41.09</td> <td>19.97</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11340.00	44.17	74.00	-29.83	56.78	38.11	16.01	66.73	0.00	---	---	PEAK	2	17010.00	44.64	68.20	-23.56	50.67	41.09	19.97	67.09	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>43.52</td> <td>74.00</td> <td>-30.48</td> <td>56.13</td> <td>38.11</td> <td>16.01</td> <td>66.73</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>44.75</td> <td>68.20</td> <td>-23.45</td> <td>50.78</td> <td>41.09</td> <td>19.97</td> <td>67.09</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11340.00	43.52	74.00	-30.48	56.13	38.11	16.01	66.73	0.00	---	---	PEAK	2	17010.00	44.75	68.20	-23.45	50.78	41.09	19.97	67.09	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11340.00	44.17	74.00	-29.83	56.78	38.11	16.01	66.73	0.00	---	---	PEAK																																																																																																
2	17010.00	44.64	68.20	-23.56	50.67	41.09	19.97	67.09	0.00	---	---	PEAK																																																																																																
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																				
1	11340.00	43.52	74.00	-30.48	56.13	38.11	16.01	66.73	0.00	---	---	PEAK																																																																																																
2	17010.00	44.75	68.20	-23.45	50.78	41.09	19.97	67.09	0.00	---	---	PEAK																																																																																																



Mode	26																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>58.88</td> <td>74.00</td> <td>-15.12</td> <td>51.61</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>100</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	58.88	74.00	-15.12	51.61	34.05	10.65	37.43	0.00	100	180	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>102.16</td> <td>-----</td> <td>-----</td> <td>94.62</td> <td>34.22</td> <td>10.72</td> <td>37.40</td> <td>0.00</td> <td>100</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	102.16	-----	-----	94.62	34.22	10.72	37.40	0.00	100	180	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.76	58.88	74.00	-15.12	51.61	34.05	10.65	37.43	0.00	100	180	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5210.00	102.16	-----	-----	94.62	34.22	10.72	37.40	0.00	100	180	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>50.73</td> <td>54.00</td> <td>-3.27</td> <td>43.46</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>100</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.76	50.73	54.00	-3.27	43.46	34.05	10.65	37.43	0.00	100	180	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>93.14</td> <td>-----</td> <td>-----</td> <td>85.62</td> <td>34.21</td> <td>10.72</td> <td>37.41</td> <td>0.00</td> <td>100</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	93.14	-----	-----	85.62	34.21	10.72	37.41	0.00	100	180	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.76	50.73	54.00	-3.27	43.46	34.05	10.65	37.43	0.00	100	180	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5210.00	93.14	-----	-----	85.62	34.21	10.72	37.41	0.00	100	180	AVERAGE																																																																														



Mode	26																																												
	Band Edge - R																																												
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.30</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>42.73</td> <td>34.36</td> <td>10.85</td> <td>37.34</td> <td>0.00</td> <td>100</td> <td>180</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5361.30	50.60	74.00	-23.40	42.73	34.36	10.85	37.34	0.00	100	180	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																				
1	5361.30	50.60	74.00	-23.40	42.73	34.36	10.85	37.34	0.00	100	180	PEAK																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.10</td> <td>41.67</td> <td>54.00</td> <td>-12.33</td> <td>33.83</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>100</td> <td>180</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5354.10	41.67	54.00	-12.33	33.83	34.35	10.84	37.35	0.00	100	180	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																				
1	5354.10	41.67	54.00	-12.33	33.83	34.35	10.84	37.35	0.00	100	180	AVERAGE																																	





Mode	26																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.28</td> <td>56.24</td> <td>74.00</td> <td>-17.76</td> <td>48.97</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>203</td> <td>178</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.28	56.24	74.00	-17.76	48.97	34.05	10.65	37.43	0.00	203	178	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>97.39</td> <td>-----</td> <td>-----</td> <td>89.87</td> <td>34.21</td> <td>10.72</td> <td>37.41</td> <td>0.00</td> <td>203</td> <td>178</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	97.39	-----	-----	89.87	34.21	10.72	37.41	0.00	203	178	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.28	56.24	74.00	-17.76	48.97	34.05	10.65	37.43	0.00	203	178	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5210.00	97.39	-----	-----	89.87	34.21	10.72	37.41	0.00	203	178	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.92</td> <td>46.96</td> <td>54.00</td> <td>-7.04</td> <td>39.69</td> <td>34.05</td> <td>10.65</td> <td>37.43</td> <td>0.00</td> <td>203</td> <td>178</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.92	46.96	54.00	-7.04	39.69	34.05	10.65	37.43	0.00	203	178	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.74</td> <td>-----</td> <td>-----</td> <td>81.22</td> <td>34.21</td> <td>10.72</td> <td>37.41</td> <td>0.00</td> <td>203</td> <td>178</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5210.00	88.74	-----	-----	81.22	34.21	10.72	37.41	0.00	203	178	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5149.92	46.96	54.00	-7.04	39.69	34.05	10.65	37.43	0.00	203	178	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5210.00	88.74	-----	-----	81.22	34.21	10.72	37.41	0.00	203	178	AVERAGE																																																																														



Mode	26																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																													
ANT	SISO																																													
Pol.	Vertical	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.80</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>39.26</td> <td>34.39</td> <td>10.88</td> <td>37.33</td> <td>0.00</td> <td>203</td> <td>178</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5392.80	47.20	74.00	-26.80	39.26	34.39	10.88	37.33	0.00	203	178	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5392.80	47.20	74.00	-26.80	39.26	34.39	10.88	37.33	0.00	203	178	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.02</td> <td>39.03</td> <td>54.00</td> <td>-14.97</td> <td>31.19</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>203</td> <td>178</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5353.02	39.03	54.00	-14.97	31.19	34.35	10.84	37.35	0.00	203	178	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5353.02	39.03	54.00	-14.97	31.19	34.35	10.84	37.35	0.00	203	178	AVERAGE																																		

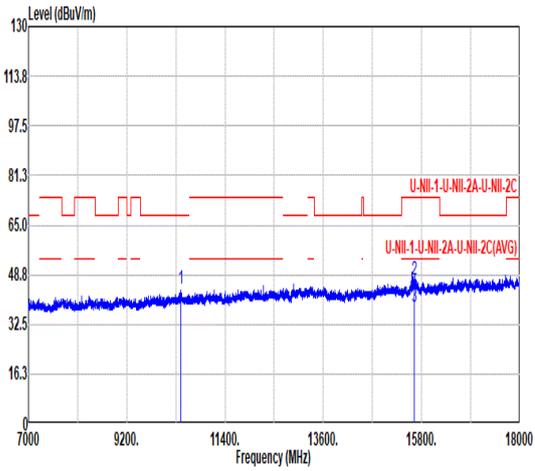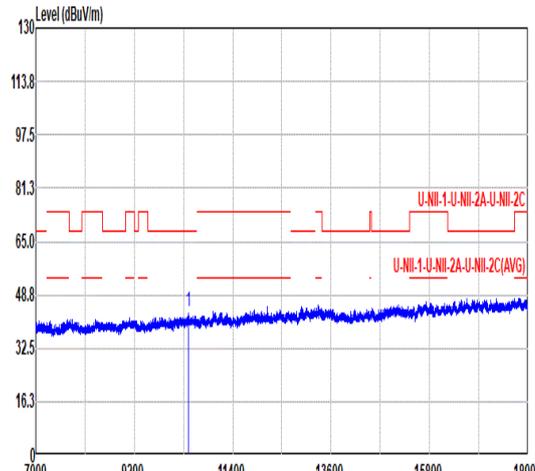

Mode	26																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																																			
ANT	SISO																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>44.24</td> <td>68.20</td> <td>-23.96</td> <td>58.82</td> <td>37.39</td> <td>15.34</td> <td>67.31</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>53.94</td> <td>40.04</td> <td>19.14</td> <td>65.96</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>15630.00</td> <td>38.38</td> <td>54.00</td> <td>-15.62</td> <td>45.16</td> <td>40.02</td> <td>19.12</td> <td>65.92</td> <td>0.00</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10420.00	44.24	68.20	-23.96	58.82	37.39	15.34	67.31	0.00	---	---	PEAK	2	15630.00	47.16	74.00	-26.84	53.94	40.04	19.14	65.96	0.00	100	0	PEAK	3	15630.00	38.38	54.00	-15.62	45.16	40.02	19.12	65.92	0.00	100	0	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>43.84</td> <td>68.20</td> <td>-24.36</td> <td>58.42</td> <td>37.39</td> <td>15.34</td> <td>67.31</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10420.00	43.84	68.20	-24.36	58.42	37.39	15.34	67.31	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10420.00	44.24	68.20	-23.96	58.82	37.39	15.34	67.31	0.00	---	---	PEAK																																																																																																								
2	15630.00	47.16	74.00	-26.84	53.94	40.04	19.14	65.96	0.00	100	0	PEAK																																																																																																								
3	15630.00	38.38	54.00	-15.62	45.16	40.02	19.12	65.92	0.00	100	0	AVERAGE																																																																																																								
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	10420.00	43.84	68.20	-24.36	58.42	37.39	15.34	67.31	0.00	---	---	PEAK																																																																																																								



Mode	27																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5123.04</td> <td>54.79</td> <td>74.00</td> <td>-19.21</td> <td>42.64</td> <td>34.25</td> <td>9.86</td> <td>31.96</td> <td>0.00</td> <td>193</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5123.04	54.79	74.00	-19.21	42.64	34.25	9.86	31.96	0.00	193	344	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>99.58</td> <td>-----</td> <td>-----</td> <td>87.17</td> <td>34.38</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>193</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5290.00	99.58	-----	-----	87.17	34.38	10.02	31.99	0.00	193	344	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5123.04	54.79	74.00	-19.21	42.64	34.25	9.86	31.96	0.00	193	344	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5290.00	99.58	-----	-----	87.17	34.38	10.02	31.99	0.00	193	344	PEAK																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.64</td> <td>45.47</td> <td>54.00</td> <td>-8.53</td> <td>33.28</td> <td>34.30</td> <td>9.84</td> <td>31.95</td> <td>0.00</td> <td>193</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5100.64	45.47	54.00	-8.53	33.28	34.30	9.84	31.95	0.00	193	344	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>91.81</td> <td>-----</td> <td>-----</td> <td>79.40</td> <td>34.38</td> <td>10.02</td> <td>31.99</td> <td>0.00</td> <td>193</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5290.00	91.81	-----	-----	79.40	34.38	10.02	31.99	0.00	193	344	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5100.64	45.47	54.00	-8.53	33.28	34.30	9.84	31.95	0.00	193	344	AVERAGE																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	5290.00	91.81	-----	-----	79.40	34.38	10.02	31.99	0.00	193	344	AVERAGE																																																																														



Mode	27																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																													
ANT	SISO																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.60</td> <td>59.49</td> <td>74.00</td> <td>-14.51</td> <td>46.73</td> <td>34.60</td> <td>10.00</td> <td>31.92</td> <td>0.00</td> <td>193</td> <td>344</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5354.60	59.49	74.00	-14.51	46.73	34.60	10.00	31.92	0.00	193	344	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5354.60	59.49	74.00	-14.51	46.73	34.60	10.00	31.92	0.00	193	344	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>50.78</td> <td>54.00</td> <td>-3.22</td> <td>38.03</td> <td>34.60</td> <td>10.00</td> <td>31.93</td> <td>0.00</td> <td>193</td> <td>344</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.40	50.78	54.00	-3.22	38.03	34.60	10.00	31.93	0.00	193	344	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5350.40	50.78	54.00	-3.22	38.03	34.60	10.00	31.93	0.00	193	344	AVERAGE																																		



		27																																												
Mode		Band Edge - L																																												
		U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																												
ANT		SISO																																												
Pol.		Vertical					Fundamental																																							
Peak	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5108.32</td> <td>49.29</td> <td>74.00</td> <td>-24.71</td> <td>42.21</td> <td>33.92</td> <td>10.61</td> <td>37.45</td> <td>0.00</td> <td>211</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5108.32	49.29	74.00	-24.71	42.21	33.92	10.61	37.45	0.00	211	190	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5108.32	49.29	74.00	-24.71	42.21	33.92	10.61	37.45	0.00	211	190	PEAK																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>97.37</td> <td>-----</td> <td>-----</td> <td>89.67</td> <td>34.29</td> <td>10.78</td> <td>37.37</td> <td>0.00</td> <td>211</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5290.00	97.37	-----	-----	89.67	34.29	10.78	37.37	0.00	211	190	PEAK	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5290.00	97.37	-----	-----	89.67	34.29	10.78	37.37	0.00	211	190	PEAK																																		
Avg	Vertical	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5109.76</td> <td>39.95</td> <td>54.00</td> <td>-14.05</td> <td>32.86</td> <td>33.93</td> <td>10.61</td> <td>37.45</td> <td>0.00</td> <td>211</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5109.76	39.95	54.00	-14.05	32.86	33.93	10.61	37.45	0.00	211	190	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5109.76	39.95	54.00	-14.05	32.86	33.93	10.61	37.45	0.00	211	190	AVERAGE																																		
Fundamental	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>89.38</td> <td>-----</td> <td>-----</td> <td>81.70</td> <td>34.28</td> <td>10.78</td> <td>37.38</td> <td>0.00</td> <td>211</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	1	5290.00	89.38	-----	-----	81.70	34.28	10.78	37.38	0.00	211	190	AVERAGE	
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg																																				
1	5290.00	89.38	-----	-----	81.70	34.28	10.78	37.38	0.00	211	190	AVERAGE																																		



Mode	27																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																													
ANT	SISO																																													
Pol.	Vertical	Fundamental																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>54.47</td> <td>74.00</td> <td>-19.53</td> <td>46.63</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>211</td> <td>190</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.10	54.47	74.00	-19.53	46.63	34.35	10.84	37.35	0.00	211	190	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5350.10	54.47	74.00	-19.53	46.63	34.35	10.84	37.35	0.00	211	190	PEAK																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>45.81</td> <td>54.00</td> <td>-8.19</td> <td>37.97</td> <td>34.35</td> <td>10.84</td> <td>37.35</td> <td>0.00</td> <td>211</td> <td>190</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5350.50	45.81	54.00	-8.19	37.97	34.35	10.84	37.35	0.00	211	190	AVERAGE	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5350.50	45.81	54.00	-8.19	37.97	34.35	10.84	37.35	0.00	211	190	AVERAGE																																		



Mode	27																																																																																									
	Harmonic																																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>42.86</td> <td>68.20</td> <td>-25.34</td> <td>57.03</td> <td>37.51</td> <td>15.46</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10580.00	42.86	68.20	-25.34	57.03	37.51	15.46	67.14	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>42.61</td> <td>68.20</td> <td>-25.59</td> <td>56.78</td> <td>37.51</td> <td>15.46</td> <td>67.14</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10580.00	42.61	68.20	-25.59	56.78	37.51	15.46	67.14	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10580.00	42.86	68.20	-25.34	57.03	37.51	15.46	67.14	0.00	---	---	PEAK																																																																														
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	10580.00	42.61	68.20	-25.59	56.78	37.51	15.46	67.14	0.00	---	---	PEAK																																																																														



Mode	28																																																																																														
	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.72</td> <td>59.55</td> <td>74.00</td> <td>-14.45</td> <td>51.55</td> <td>34.34</td> <td>10.96</td> <td>37.30</td> <td>0.00</td> <td>153</td> <td>184</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.56</td> <td>61.40</td> <td>68.20</td> <td>-6.80</td> <td>53.39</td> <td>34.33</td> <td>10.98</td> <td>37.30</td> <td>0.00</td> <td>153</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5456.72	59.55	74.00	-14.45	51.55	34.34	10.96	37.30	0.00	153	184	PEAK	2	5468.56	61.40	68.20	-6.80	53.39	34.33	10.98	37.30	0.00	153	184	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>102.11</td> <td>-----</td> <td>-----</td> <td>93.96</td> <td>34.36</td> <td>11.06</td> <td>37.27</td> <td>0.00</td> <td>153</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	102.11	-----	-----	93.96	34.36	11.06	37.27	0.00	153	184	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5456.72	59.55	74.00	-14.45	51.55	34.34	10.96	37.30	0.00	153	184	PEAK																																																																																			
2	5468.56	61.40	68.20	-6.80	53.39	34.33	10.98	37.30	0.00	153	184	PEAK																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5530.00	102.11	-----	-----	93.96	34.36	11.06	37.27	0.00	153	184	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.00</td> <td>50.80</td> <td>54.00</td> <td>-3.20</td> <td>42.79</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>153</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5458.00	50.80	54.00	-3.20	42.79	34.34	10.97	37.30	0.00	153	184	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>94.36</td> <td>-----</td> <td>-----</td> <td>86.21</td> <td>34.36</td> <td>11.06</td> <td>37.27</td> <td>0.00</td> <td>153</td> <td>184</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5530.00	94.36	-----	-----	86.21	34.36	11.06	37.27	0.00	153	184	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5458.00	50.80	54.00	-3.20	42.79	34.34	10.97	37.30	0.00	153	184	AVERAGE																																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																							
1	5530.00	94.36	-----	-----	86.21	34.36	11.06	37.27	0.00	153	184	AVERAGE																																																																																			



Mode	28																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																													
ANT	SISO																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p>	Blank																																												
<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5733.08</td> <td>50.87</td> <td>68.20</td> <td>-17.33</td> <td>42.64</td> <td>34.47</td> <td>11.34</td> <td>37.58</td> <td>0.00</td> <td>153</td> <td>184</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5733.08	50.87	68.20	-17.33	42.64	34.47	11.34	37.58	0.00	153	184	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5733.08	50.87	68.20	-17.33	42.64	34.47	11.34	37.58	0.00	153	184	PEAK																																		



Mode	28																																																																																																				
	Band Edge - L																																																																																																				
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Vertical	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>54.51</td> <td>74.00</td> <td>-19.49</td> <td>46.50</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>240</td> <td>189</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.20</td> <td>56.40</td> <td>68.20</td> <td>-11.80</td> <td>48.30</td> <td>34.33</td> <td>10.98</td> <td>37.29</td> <td>0.00</td> <td>240</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.92	54.51	74.00	-19.49	46.50	34.34	10.97	37.30	0.00	240	189	PEAK	2	5469.20	56.40	68.20	-11.80	48.30	34.33	10.98	37.29	0.00	240	189	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>97.71</td> <td>-----</td> <td>-----</td> <td>89.54</td> <td>34.37</td> <td>11.07</td> <td>37.27</td> <td>0.00</td> <td>240</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	97.71	-----	-----	89.54	34.37	11.07	37.27	0.00	240	189	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.92	54.51	74.00	-19.49	46.50	34.34	10.97	37.30	0.00	240	189	PEAK																																																																																									
2	5469.20	56.40	68.20	-11.80	48.30	34.33	10.98	37.29	0.00	240	189	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5530.00	97.71	-----	-----	89.54	34.37	11.07	37.27	0.00	240	189	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.12</td> <td>45.34</td> <td>54.00</td> <td>-8.66</td> <td>37.33</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>240</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	45.34	54.00	-8.66	37.33	34.34	10.97	37.30	0.00	240	189	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>88.79</td> <td>-----</td> <td>-----</td> <td>80.62</td> <td>34.37</td> <td>11.07</td> <td>37.27</td> <td>0.00</td> <td>240</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	88.79	-----	-----	80.62	34.37	11.07	37.27	0.00	240	189	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.12	45.34	54.00	-8.66	37.33	34.34	10.97	37.30	0.00	240	189	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5530.00	88.79	-----	-----	80.62	34.37	11.07	37.27	0.00	240	189	AVERAGE																																																																																									





Mode	28																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																													
ANT	SISO																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>U-NII-1-U-NII-2A-U-NII-2C</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5732.92</td> <td>47.99</td> <td>68.20</td> <td>-20.21</td> <td>39.77</td> <td>34.46</td> <td>11.34</td> <td>37.58</td> <td>0.00</td> <td>240</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5732.92	47.99	68.20	-20.21	39.77	34.46	11.34	37.58	0.00	240	189	PEAK	Blank
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5732.92	47.99	68.20	-20.21	39.77	34.46	11.34	37.58	0.00	240	189	PEAK																																		



Mode	28																																																																																							
	Harmonic																																																																																							
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																							
ANT	SISO																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>44.00</td> <td>74.00</td> <td>-30.00</td> <td>57.14</td> <td>37.85</td> <td>15.80</td> <td>66.79</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11060.00	44.00	74.00	-30.00	57.14	37.85	15.80	66.79	0.00	---	---	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11060.00</td> <td>43.51</td> <td>74.00</td> <td>-30.49</td> <td>56.65</td> <td>37.85</td> <td>15.80</td> <td>66.79</td> <td>0.00</td> <td>---</td> <td>---</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 11060.00	43.51	74.00	-30.49	56.65	37.85	15.80	66.79	0.00	---	---	PEAK
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11060.00	44.00	74.00	-30.00	57.14	37.85	15.80	66.79	0.00	---	---	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 11060.00	43.51	74.00	-30.49	56.65	37.85	15.80	66.79	0.00	---	---	PEAK																																																																													

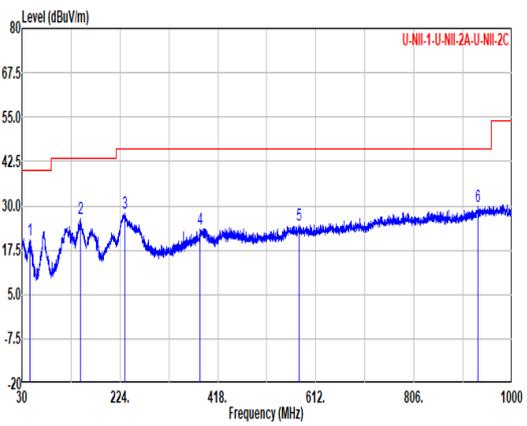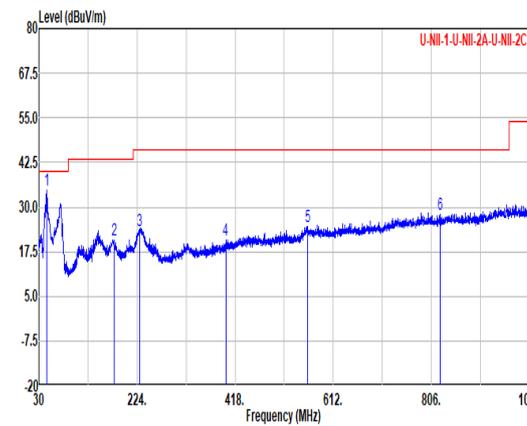

Mode	28																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																																																																																																																	
ANT	SISO																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>46.01</td><td>20.32</td><td>40.00</td><td>-19.68</td><td>35.98</td><td>16.51</td><td>0.60</td><td>32.77</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>145.67</td><td>26.45</td><td>43.50</td><td>-17.05</td><td>40.61</td><td>17.33</td><td>1.22</td><td>32.71</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>233.94</td><td>28.09</td><td>46.00</td><td>-17.91</td><td>42.69</td><td>16.65</td><td>1.60</td><td>32.85</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>383.32</td><td>23.58</td><td>46.00</td><td>-22.42</td><td>33.30</td><td>21.17</td><td>2.08</td><td>32.97</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>579.02</td><td>24.59</td><td>46.00</td><td>-21.41</td><td>29.23</td><td>26.12</td><td>2.51</td><td>33.27</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>932.59</td><td>29.75</td><td>46.00</td><td>-16.25</td><td>28.15</td><td>30.32</td><td>3.18</td><td>31.90</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	46.01	20.32	40.00	-19.68	35.98	16.51	0.60	32.77	0.00	---	Peak	2	145.67	26.45	43.50	-17.05	40.61	17.33	1.22	32.71	0.00	---	Peak	3	233.94	28.09	46.00	-17.91	42.69	16.65	1.60	32.85	0.00	---	Peak	4	383.32	23.58	46.00	-22.42	33.30	21.17	2.08	32.97	0.00	---	Peak	5	579.02	24.59	46.00	-21.41	29.23	26.12	2.51	33.27	0.00	---	Peak	6	932.59	29.75	46.00	-16.25	28.15	30.32	3.18	31.90	0.00	---	Peak	 <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>46.01</td><td>34.87</td><td>40.00</td><td>-5.13</td><td>50.53</td><td>16.51</td><td>0.60</td><td>32.77</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>178.17</td><td>20.65</td><td>43.50</td><td>-22.85</td><td>36.99</td><td>15.02</td><td>1.38</td><td>32.74</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>228.37</td><td>23.41</td><td>46.00</td><td>-22.59</td><td>38.63</td><td>16.05</td><td>1.57</td><td>32.84</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>399.09</td><td>20.86</td><td>46.00</td><td>-25.14</td><td>29.95</td><td>21.81</td><td>2.13</td><td>33.03</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>560.59</td><td>24.46</td><td>46.00</td><td>-21.54</td><td>28.91</td><td>26.34</td><td>2.45</td><td>33.24</td><td>0.00</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>822.49</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>29.21</td><td>28.53</td><td>2.99</td><td>32.82</td><td>0.00</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	46.01	34.87	40.00	-5.13	50.53	16.51	0.60	32.77	0.00	---	Peak	2	178.17	20.65	43.50	-22.85	36.99	15.02	1.38	32.74	0.00	---	Peak	3	228.37	23.41	46.00	-22.59	38.63	16.05	1.57	32.84	0.00	---	Peak	4	399.09	20.86	46.00	-25.14	29.95	21.81	2.13	33.03	0.00	---	Peak	5	560.59	24.46	46.00	-21.54	28.91	26.34	2.45	33.24	0.00	---	Peak	6	822.49	27.91	46.00	-18.09	29.21	28.53	2.99	32.82	0.00	---	Peak
	Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	46.01	20.32	40.00	-19.68	35.98	16.51	0.60	32.77	0.00	---	Peak																																																																																																																																																																																							
2	145.67	26.45	43.50	-17.05	40.61	17.33	1.22	32.71	0.00	---	Peak																																																																																																																																																																																							
3	233.94	28.09	46.00	-17.91	42.69	16.65	1.60	32.85	0.00	---	Peak																																																																																																																																																																																							
4	383.32	23.58	46.00	-22.42	33.30	21.17	2.08	32.97	0.00	---	Peak																																																																																																																																																																																							
5	579.02	24.59	46.00	-21.41	29.23	26.12	2.51	33.27	0.00	---	Peak																																																																																																																																																																																							
6	932.59	29.75	46.00	-16.25	28.15	30.32	3.18	31.90	0.00	---	Peak																																																																																																																																																																																							
Peak	Freq	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	46.01	34.87	40.00	-5.13	50.53	16.51	0.60	32.77	0.00	---	Peak																																																																																																																																																																																							
2	178.17	20.65	43.50	-22.85	36.99	15.02	1.38	32.74	0.00	---	Peak																																																																																																																																																																																							
3	228.37	23.41	46.00	-22.59	38.63	16.05	1.57	32.84	0.00	---	Peak																																																																																																																																																																																							
4	399.09	20.86	46.00	-25.14	29.95	21.81	2.13	33.03	0.00	---	Peak																																																																																																																																																																																							
5	560.59	24.46	46.00	-21.54	28.91	26.34	2.45	33.24	0.00	---	Peak																																																																																																																																																																																							
6	822.49	27.91	46.00	-18.09	29.21	28.53	2.99	32.82	0.00	---	Peak																																																																																																																																																																																							



Mode	28	
	18-40G	
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz	
ANT	SISO	
Pol.	Horizontal	Vertical
Peak		
Avg		



Mode	29																																																																																																				
	Band Edge - L																																																																																																				
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH122_5610MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Horizontal	Fundamental																																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5435.60</td> <td>56.73</td> <td>74.00</td> <td>-17.27</td> <td>48.74</td> <td>34.36</td> <td>10.94</td> <td>37.31</td> <td>0.00</td> <td>185</td> <td>186</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>60.25</td> <td>68.20</td> <td>-7.95</td> <td>52.23</td> <td>34.33</td> <td>10.98</td> <td>37.29</td> <td>0.00</td> <td>185</td> <td>186</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5435.60	56.73	74.00	-17.27	48.74	34.36	10.94	37.31	0.00	185	186	PEAK	2	5469.04	60.25	68.20	-7.95	52.23	34.33	10.98	37.29	0.00	185	186	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>106.09</td> <td>-----</td> <td>-----</td> <td>97.68</td> <td>34.48</td> <td>11.16</td> <td>37.23</td> <td>0.00</td> <td>185</td> <td>186</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	106.09	-----	-----	97.68	34.48	11.16	37.23	0.00	185	186	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5435.60	56.73	74.00	-17.27	48.74	34.36	10.94	37.31	0.00	185	186	PEAK																																																																																									
2	5469.04	60.25	68.20	-7.95	52.23	34.33	10.98	37.29	0.00	185	186	PEAK																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5610.00	106.09	-----	-----	97.68	34.48	11.16	37.23	0.00	185	186	PEAK																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.60</td> <td>46.40</td> <td>54.00</td> <td>-7.60</td> <td>38.39</td> <td>34.34</td> <td>10.97</td> <td>37.30</td> <td>0.00</td> <td>185</td> <td>186</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	46.40	54.00	-7.60	38.39	34.34	10.97	37.30	0.00	185	186	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>97.91</td> <td>-----</td> <td>-----</td> <td>89.50</td> <td>34.47</td> <td>11.17</td> <td>37.23</td> <td>0.00</td> <td>185</td> <td>186</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	97.91	-----	-----	89.50	34.47	11.17	37.23	0.00	185	186	AVERAGE													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.60	46.40	54.00	-7.60	38.39	34.34	10.97	37.30	0.00	185	186	AVERAGE																																																																																									
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5610.00	97.91	-----	-----	89.50	34.47	11.17	37.23	0.00	185	186	AVERAGE																																																																																									