

FCC SAR Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB352FU
FCC ID : O57TB352FU
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied 5
4. Equipment Under Test (EUT) Information 6
4.1 General Information 6
5. Proximity Sensor Triggering Test 7
6. RF Exposure Limits 10
6.1 Uncontrolled Environment 10
6.2 Controlled Environment 10
7. Specific Absorption Rate (SAR) 11
7.1 Introduction 11
7.2 SAR Definition 11
8. System Description and Setup 12
8.1 E-Field Probe 13
8.2 Data Acquisition Electronics (DAE) 13
8.3 Phantom 14
8.4 Device Holder 15
9. Measurement Procedures 16
9.1 Spatial Peak SAR Evaluation 16
9.2 Power Reference Measurement 17
9.3 Area Scan 17
9.4 Zoom Scan 18
9.5 Volume Scan Procedures 18
9.6 Power Drift Monitoring 18
10. Test Equipment List 19
11. System Verification 20
11.1 Tissue Simulating Liquids 20
11.2 Tissue Verification 21
11.3 System Performance Check Results 22
12. RF Exposure Positions 23
12.1 SAR Testing for Tablet 23
13. Conducted RF Output Power (Unit: dBm) 24
14. Antenna Location 26
15. SAR Test Results 27
15.1 Body SAR 28
15.2 Repeated SAR Measurement 29
16. Simultaneous Transmission Analysis 30
16.1 Body Exposure Conditions 30
16.2 SPLSR Evaluation and Analysis 31
17. Uncertainty Assessment 32
18. References 33
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos
Appendix E. Conducted RF Output Power Table

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Lenovo (Shanghai) Electronics Technology Co., Ltd., Portable Tablet Computer, TB352FU**, are as follows.

Highest 1g SAR Summary				
Equipment Class	Frequency Band		Body (Separation 0mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	1.17	1.27
NII		5GHz WLAN	1.12	1.57
DSS	Bluetooth	2.4GHz Bluetooth	0.44	1.57
Date of Testing:			2024/12/1 ~ 2024/12/4	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR05-SZ	CN1256	421272

Applicant	
Company Name	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer	
Company Name	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

4. Equipment Under Test (EUT) Information


4.1 General Information

Product Feature & Specification	
Equipment Name	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB352FU
FCC ID	O57TB352FU
S/N Code	Sample 1: HA2345KV Sample 4: HA233Z5V
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/HE20/HE40/HE80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	TB352FU
SW Version	TB352FU_RF01_241110
EUT Stage	Identical Prototype
Remark: <ol style="list-style-type: none"> This device does not support voice function. The 2.4GHz/5GHz WLAN can transmit in SISO and MIMO antenna mode. 802.11b supports SISO mode for 2.4GHz WLAN Ant.0 only. The device implements Proximity sensors mechanism for the power management for SAR compliance at different exposure conditions (Body). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. There are four samples. The difference between them could be referred to the TB352FU_Operational Description of Product Equality Declaration which is exhibited separately. According to the differences, sample 1 was chosen to perform full test, and the sample 4 are verified the difference with the sample 1. For sample 2/3, the differences do not affect the test, so sample 2/3 are not tested. This device has NFC function and the NFC SAR report will be separately submitted. 	

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency 5825MHz and lowest 2412MHz frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with antenna elements at the Bottom Face of the device are utilized to determine when the device comes in proximity of the user's body at the Bottom Face of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
3. When the sensor is active, all WLAN bands reduced power will be active.
4. The sensors used to detect the proximity of the user's body at the Bottom Face for Ant0 of the device use a detection threshold distance. The data shown in the sections below shows the distance(s).

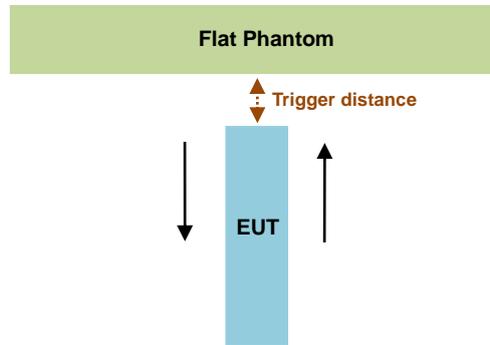

<Ant0 Frequency Bands>

Proximity Sensor Triggering Distance (mm)		
Position	Bottom Face	
	Moving away	Moving towards
Minimum	10	14

<Proximity Sensor Triggering Coverage (KDB 616217 D04 section 6.3)>:

If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and "along the direction of maximum antenna and sensor offset".

Illustrated in the internal photo exhibit, although the sensor is spatially offset, there is no trigger condition where the antenna is next to the user but the sensor is laterally further away, therefore proximity sensor coverage testing is not required.

This procedure is not required because antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Proximity sensor power reduction



Exposure Position / wireless mode for Ant0	Bottom Face ⁽¹⁾	Edge 1	Edge 2	Edge 3	Edge 4
WLAN 2.4GHz	5.50 dB	0 dB	0 dB	0 dB	0 dB
WLAN 5.2GHz	7.00 dB	0 dB	0 dB	0 dB	0 dB
WLAN 5.3GHz	7.00 dB	0 dB	0 dB	0 dB	0 dB
WLAN 5.5GHz	5.50 dB	0 dB	0 dB	0 dB	0 dB
WLAN 5.8GHz	7.00 dB	0 dB	0 dB	0 dB	0 dB

Remark:

1. ⁽¹⁾: Reduced maximum limit applied by activation of proximity sensor.
2. Power reduction is not applicable for Bluetooth.
3. Tests were performed in accordance with KDB 616217 D04 section 6.1, 6.2, 6.3, 6.4 and 6.5 and compliant results are shown and described in exhibit "P-Sensor operational description"
4. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
For Ant0:
 - Bottom Face: 9mm

Power Measurement during Sensor Trigger distance testing

Band/Mode for Ant0	Measured power reduction (dBm)		Reduction Levels (dB)
	w/o power back-off	w/ power back-off	
WLAN 2.4GHz	20.00	14.50	5.50
WLAN 5.2GHz	18.50	11.50	7.00
WLAN 5.3GHz	18.50	11.50	7.00
WLAN 5.5GHz	18.50	13.00	5.50
WLAN 5.8GHz	18.50	11.50	7.00

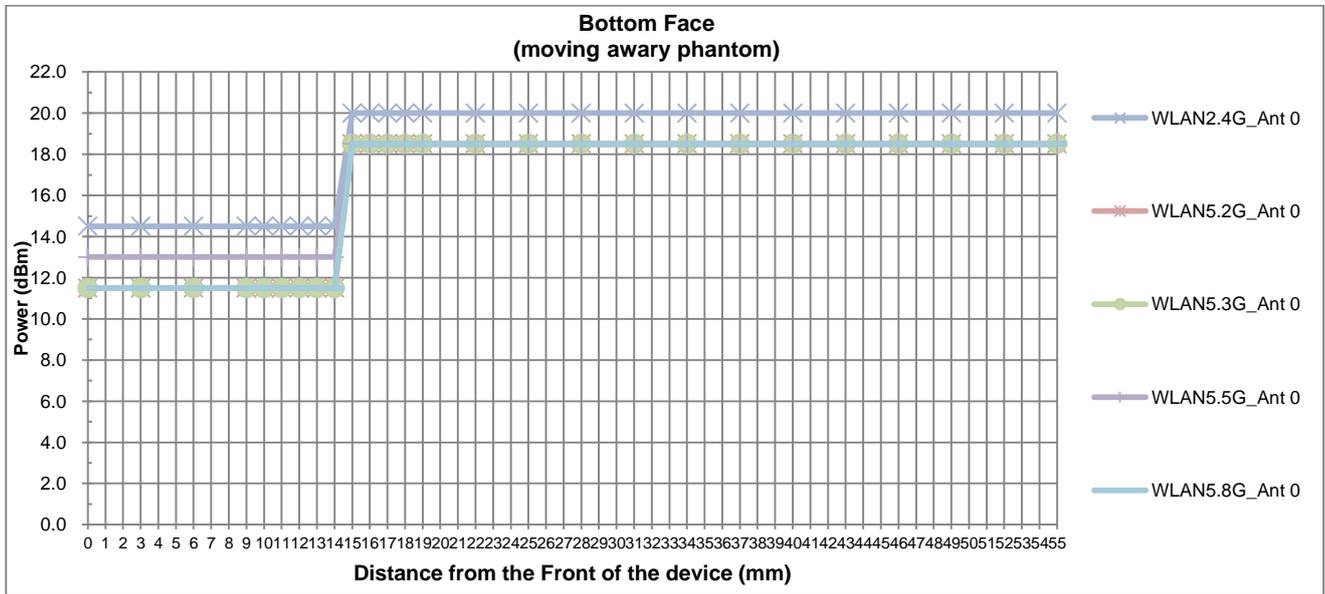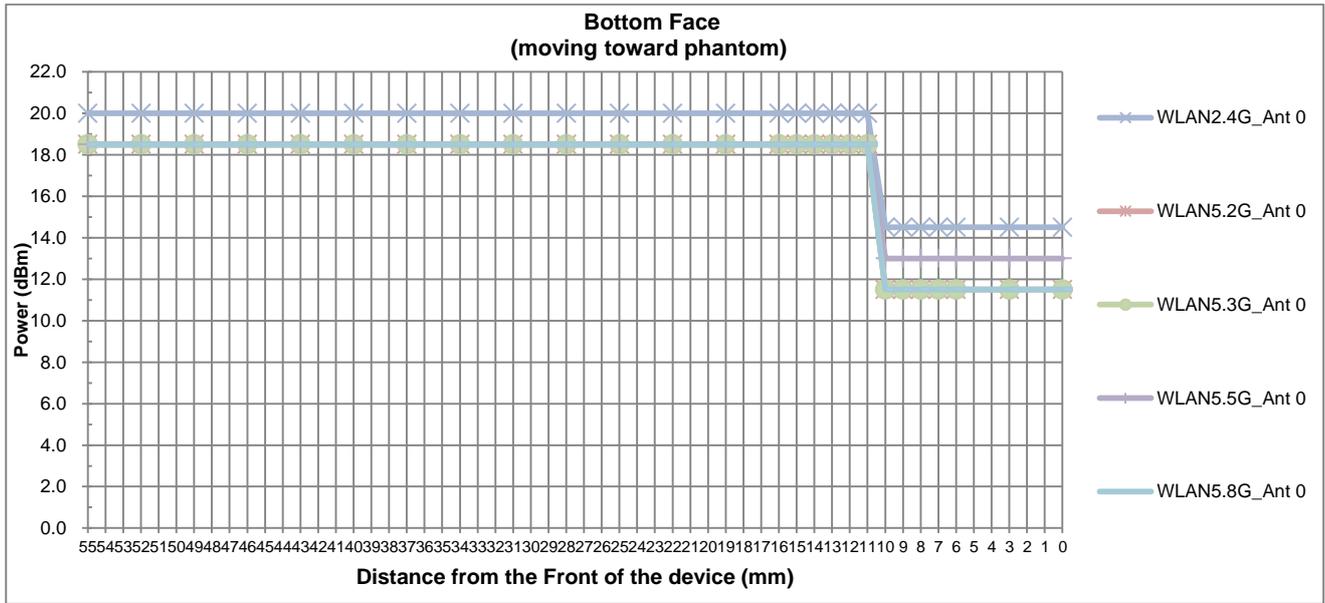

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

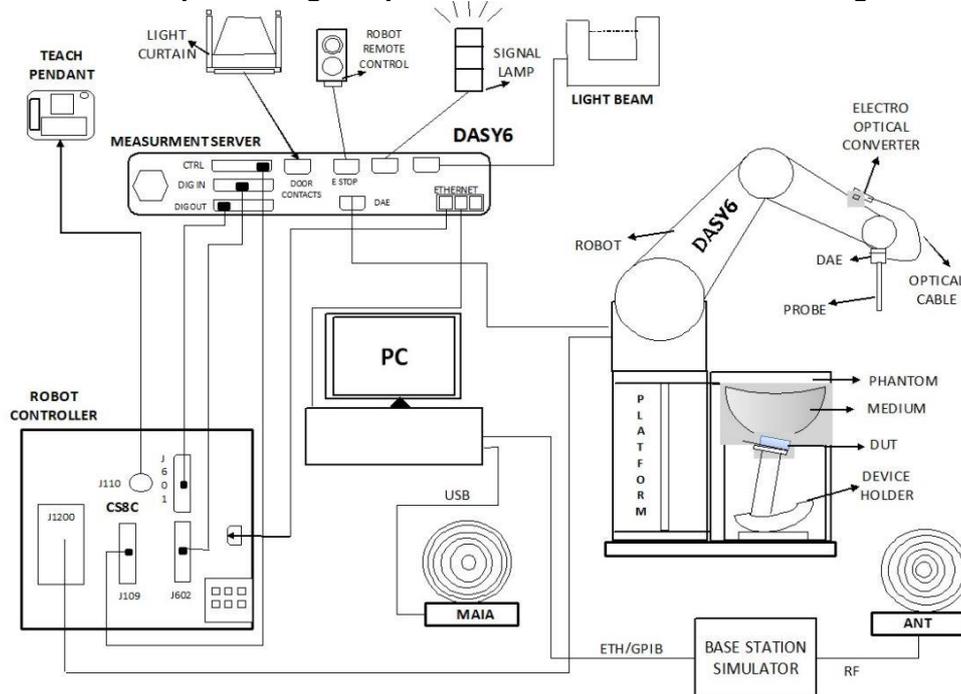

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 03, 2023	Nov. 02, 2026
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	Dec. 13, 2021	Dec. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	715	Jan. 25, 2024	Jan. 24, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7641	Jun. 03, 2024	Jun. 02, 2025
SPEAG	ELI Phantom	QD OVA 004 AA	2131	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Jul. 03, 2024	Jul. 02, 2025
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 15, 2024	Oct. 14, 2025
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 19, 2024	Feb. 18, 2025
Agilent	Signal Generator	N5181A	MY50145381	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Sensor	MA2411B	1306099	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Meter	ML2495A	1349001	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Sensor	MA2411B	1542004	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Meter	ML2495A	1339473	Dec. 28, 2023	Dec. 27, 2024
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 28, 2023	Dec. 27, 2024
R&S	Spectrum Analyzer	FSP7	100818	Jul. 04, 2024	Jul. 03, 2025
TES	Hygrometer	1310	200505600	Jul. 08, 2024	Jul. 07, 2025
Anymetre	Thermo-Hygrometer	JR593	2023110804	Oct. 17, 2024	Oct. 16, 2025
AR	Amplifier	5S1G4	0333096	Apr. 08, 2024	Apr. 07, 2025
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Apr. 08, 2024	Apr. 07, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
ARRA	Power Divider	A3200-2	N/A	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
Jinkexinhua	Attenuator	10db-8G	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.



Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	Head	22.4	1.792	38.945	1.80	39.20	-0.44	-0.65	±5	2024/12/1
5250	Head	22.8	4.637	36.047	4.71	35.95	-1.55	0.27	±5	2024/12/2
5600	Head	22.7	5.061	35.465	5.07	35.50	-0.18	-0.10	±5	2024/12/3
5750	Head	22.3	5.225	35.270	5.22	35.35	0.10	-0.23	±5	2024/12/4

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/12/1	2450	Head	250	924	7641	715	13.400	52.300	53.6	2.49
2024/12/2	5250	Head	100	1341	7641	715	7.770	80.700	77.7	-3.72
2024/12/3	5600	Head	100	1341	7641	715	8.350	84.500	83.5	-1.18
2024/12/4	5750	Head	100	1341	7641	715	8.450	80.600	84.5	4.84

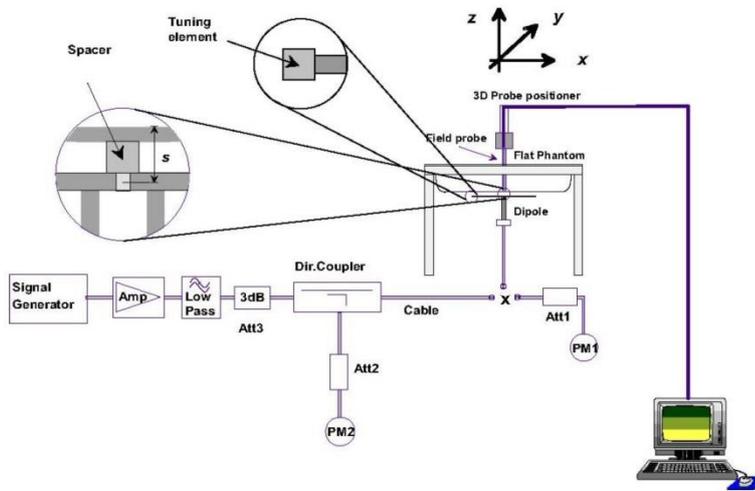


Fig 10.3.1 System Performance Check Setup



Fig 10.3.2 Setup Photo



12. RF Exposure Positions

12.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v06 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<WLAN Conducted Power>


General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. The 2.4GHz/5GHz WLAN can transmit in SISO/MIMO antenna mode.
7. 802.11 ax supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
8. For each antenna, transmit power in SISO operation is larger than or equal to the power in MIMO operation, RF exposure compliance of MIMO mode can be deduced from the compliance simultaneous transmission of antennas operating in SISO mode. So WLAN SAR testing was performed on SISO antenna, MIMO SAR base on standalone SAR summed together as MIMO SAR.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 77.02 % as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

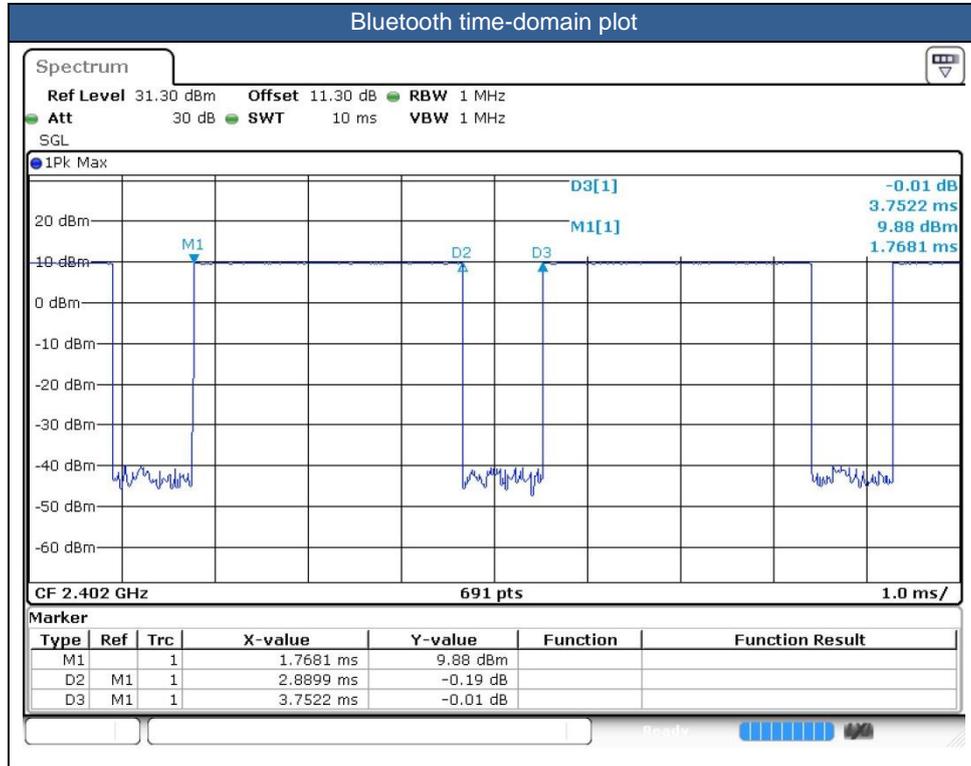

14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v06, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v06, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:
 - $[(max. \text{ power of channel, including tune-up tolerance, mW}) / (min. \text{ test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	BT ANT 0	2.4GHz WLAN ANT 0	2.4GHz WLAN ANT 1	5GHz WLAN ANT 0	5GHz WLAN ANT 1
	Calculated Frequency (MHz)	2480	2462	2462	5825	5825
	Maximum power (dBm)	11.0	20.0	19.5	18.5	18.5
	Maximum rated power(mW)	12.59	100.00	89.13	70.79	70.79
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	4.0	31.4	28.0	34.2	34.2
	Testing required?	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	15.0	15.0	5.0	15.0	5.0
	exclusion threshold	1.3	10.5	28.0	11.4	34.2
	Testing required?	No	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	215.0	215.0	23.0	215.0	23.0
	exclusion threshold	1745.0	1746.0	6.1	1712.0	7.4
	Testing required?	No	No	Yes	No	Yes
Edge 3	Separation distance(mm)	132.0	132.0	167.0	132.0	167.0
	exclusion threshold	915.0	916.0	1266.0	882.0	1232.0
	Testing required?	No	No	No	No	No
Edge 4	Separation distance(mm)	26.0	26.0	202.8	26.0	202.8
	exclusion threshold	0.8	6.0	1624.0	6.6	1590.0
	Testing required?	No	Yes	No	Yes	No

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN/Bluetooth signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. The device implements Proximity sensors mechanism for the power management for SAR compliance at different exposure conditions (Body). The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table.
5. The following table "n/a" means the measured SAR is too small to find the 1g cube SAR.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Body SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
01	Bluetooth	DH5 1Mbps	Bottom Face	0mm	Ant 0	Full	39	2441	1	10.60	11.00	1.096	77.02	1.298	0.03	0.307	0.437
	Bluetooth	DH5 1Mbps	Bottom Face	0mm	Ant 0	Full	39	2441	4	10.60	11.00	1.096	77.02	1.298	0.05	0.275	0.391
	Bluetooth	DH5 1Mbps	Edge 1	0mm	Ant 0	Full	39	2441	1	10.60	11.00	1.096	77.02	1.298	-0.13	0.021	0.030
	Bluetooth	DH5 1Mbps	Edge 2	0mm	Ant 0	Full	39	2441	1	10.60	11.00	1.096	77.02	1.298	0.11	0.011	0.016
	Bluetooth	DH5 1Mbps	Edge 3	0mm	Ant 0	Full	39	2441	1	10.60	11.00	1.096	77.02	1.298	0.07	0.009	0.013
	Bluetooth	DH5 1Mbps	Edge 4	0mm	Ant 0	Full	39	2441	1	10.60	11.00	1.096	77.02	1.298	0.04	0.014	0.019
	Bluetooth	DH5 1Mbps	Bottom Face	0mm	Ant 0	Full	0	2402	1	9.70	11.00	1.349	77.02	1.298	0.02	0.243	0.425
	Bluetooth	DH5 1Mbps	Bottom Face	0mm	Ant 0	Full	78	2480	1	9.30	11.00	1.479	77.02	1.298	-0.03	0.203	0.390
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 0	Sensor on	11	2462	1	13.78	14.50	1.180	98.35	1.017	-0.02	0.693	0.832
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 0	Full	11	2462	1	19.30	20.00	1.175	98.35	1.017	0.07	0.041	0.049
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	Ant 0	Full	11	2462	1	19.30	20.00	1.175	98.35	1.017	-0.02	0.018	0.022
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 0	Full	11	2462	1	19.30	20.00	1.175	98.35	1.017	-0.08	0.011	0.013
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 0	Full	11	2462	1	19.30	20.00	1.175	98.35	1.017	0.11	0.025	0.030
02	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 0	Sensor on	1	2412	1	12.68	14.50	1.521	98.35	1.017	0.08	0.756	1.169
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	9mm	Ant 0	Full	1	2412	1	18.20	20.00	1.514	98.35	1.017	-0.12	0.433	0.667
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 0	Sensor on	1	2412	4	12.68	14.50	1.521	98.35	1.017	0.05	0.633	0.979
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 0	Sensor on	6	2437	1	12.98	14.50	1.419	98.35	1.017	0.01	0.646	0.932
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0mm	Ant 1	Full	1	2412	1	18.40	19.50	1.288	90.51	1.105	0.09	0.052	0.074
	WLAN2.4GHz	802.11g 6Mbps	Edge 1	0mm	Ant 1	Full	1	2412	1	18.40	19.50	1.288	90.51	1.105	0.13	0.266	0.379
	WLAN2.4GHz	802.11g 6Mbps	Edge 2	0mm	Ant 1	Full	1	2412	1	18.40	19.50	1.288	90.51	1.105	0.12	0.023	0.033
	WLAN2.4GHz	802.11g 6Mbps	Edge 3	0mm	Ant 1	Full	1	2412	1	18.40	19.50	1.288	90.51	1.105	-	n/a	n/a
	WLAN2.4GHz	802.11g 6Mbps	Edge 4	0mm	Ant 1	Full	1	2412	1	18.40	19.50	1.288	90.51	1.105	-	n/a	n/a
	WLAN2.4GHz	802.11g 6Mbps	Edge 1	0mm	Ant 1	Full	6	2437	1	18.30	19.50	1.318	90.51	1.105	0.14	0.298	0.434
	WLAN2.4GHz	802.11g 6Mbps	Edge 1	0mm	Ant 1	Full	11	2462	1	18.30	19.50	1.318	90.51	1.105	0.12	0.358	0.521
	WLAN2.4GHz	802.11g 6Mbps	Edge 1	0mm	Ant 1	Full	11	2462	4	18.30	19.50	1.318	90.51	1.105	0.05	0.335	0.488
5000MHz																	
03	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	54	5270	1	10.67	11.50	1.211	87.54	1.142	0.03	0.808	1.117
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	54	5270	1	10.67	11.50	1.211	87.54	1.142	-0.01	0.801	1.107
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	9mm	Ant 0	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	0.11	0.672	0.994
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	54	5270	4	10.67	11.50	1.211	87.54	1.142	-0.02	0.695	0.961
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 0	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	0.02	0.143	0.211
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 0	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	-	n/a	n/a
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 0	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	-0.13	0.063	0.093
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 0	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	-0.13	0.072	0.106
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	62	5310	1	10.52	11.50	1.253	87.54	1.142	-0.14	0.753	1.078
	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 1	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	-0.02	0.114	0.169
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	0.15	0.463	0.685
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 1	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	-0.06	0.128	0.189
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 1	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	0.08	0.081	0.120
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 1	Full	54	5270	1	17.38	18.50	1.295	87.54	1.142	0.11	0.025	0.037
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	62	5310	1	14.10	15.00	1.231	87.54	1.142	0.05	0.254	0.357
	WLAN5.3GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	54	5270	4	17.38	18.50	1.295	87.54	1.142	0.04	0.501	0.741
	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	110	5550	1	11.99	13.00	1.262	87.54	1.142	0.07	0.745	1.074
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 0	Full	110	5550	1	17.46	18.50	1.271	87.54	1.142	-0.14	0.161	0.234
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 0	Full	110	5550	1	17.46	18.50	1.271	87.54	1.142	-	n/a	n/a
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 0	Full	110	5550	1	17.46	18.50	1.271	87.54	1.142	-0.14	0.063	0.091
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 0	Full	110	5550	1	17.46	18.50	1.271	87.54	1.142	-0.01	0.080	0.116
04	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	102	5510	1	11.97	13.00	1.268	87.54	1.142	0.11	0.768	1.112
	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	9mm	Ant 0	Full	110	5550	1	17.46	18.50	1.271	87.54	1.142	-0.13	0.751	1.090
	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	102	5510	4	11.97	13.00	1.268	87.54	1.142	-0.06	0.688	0.996
	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	134	5670	1	11.87	13.00	1.297	87.54	1.142	-0.11	0.699	1.035

	WLAN5.5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 1	Full	110	5550	1	17.44	18.50	1.277	87.54	1.142	0.09	0.101	0.147
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	110	5550	1	17.44	18.50	1.277	87.54	1.142	-0.04	0.589	0.859
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 1	Full	110	5550	1	17.44	18.50	1.277	87.54	1.142	0.05	0.135	0.197
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 1	Full	110	5550	1	17.44	18.50	1.277	87.54	1.142	0.12	0.085	0.124
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 1	Full	110	5550	1	17.44	18.50	1.277	87.54	1.142	-0.12	0.035	0.051
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	102	5510	1	16.70	17.50	1.203	87.54	1.142	0.02	0.423	0.581
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	134	5670	1	16.60	18.50	1.550	87.54	1.142	-0.03	0.626	1.108
	WLAN5.5GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	134	5670	4	16.60	18.50	1.550	87.54	1.142	-0.09	0.611	1.081
05	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	151	5755	1	10.13	11.50	1.371	87.54	1.142	0.09	0.715	1.119
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom Face	9mm	Ant 0	Full	151	5755	1	17.06	18.50	1.394	87.54	1.142	-0.01	0.702	1.117
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	151	5755	4	10.13	11.50	1.371	87.54	1.142	-0.06	0.697	1.091
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 0	Full	151	5755	1	17.06	18.50	1.394	87.54	1.142	0.12	0.272	0.433
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 0	Full	151	5755	1	17.06	18.50	1.394	87.54	1.142	-	n/a	n/a
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 0	Full	151	5755	1	17.06	18.50	1.394	87.54	1.142	-0.12	0.069	0.110
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 0	Full	151	5755	1	17.06	18.50	1.394	87.54	1.142	0.07	0.080	0.127
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	159	5795	1	9.98	11.50	1.419	87.54	1.142	-0.06	0.544	0.882
	WLAN5.8GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 1	Full	159	5795	1	17.42	18.50	1.283	87.54	1.142	-0.03	0.118	0.173
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	159	5795	1	17.42	18.50	1.283	87.54	1.142	0.13	0.751	1.100
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	159	5795	4	17.42	18.50	1.283	87.54	1.142	0.02	0.704	1.031
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 2	0mm	Ant 1	Full	159	5795	1	17.42	18.50	1.283	87.54	1.142	-0.07	0.164	0.240
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 3	0mm	Ant 1	Full	159	5795	1	17.42	18.50	1.283	87.54	1.142	-0.01	0.102	0.149
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 4	0mm	Ant 1	Full	159	5795	1	17.42	18.50	1.283	87.54	1.142	0.1	0.048	0.071
	WLAN5.8GHz	802.11n-HT40 MCS0	Edge 1	0mm	Ant 1	Full	151	5755	1	17.36	18.50	1.301	87.54	1.142	-0.06	0.714	1.061

15.2 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	54	5270	1	10.67	11.50	1.211	87.54	1.142	0.03	0.808	1	1.117
2nd	WLAN5.3GHz	802.11n-HT40 MCS0	Bottom Face	0mm	Ant 0	Sensor on	54	5270	1	10.67	11.50	1.211	87.54	1.142	-0.01	0.801	1.009	1.107

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Tablet
		Body
1.	5GHz WLAN+ Bluetooth	Yes
2.	2.4GHz WLAN+ NFC	Yes
3.	5GHz WLAN+ NFC	Yes
4.	5GHz WLAN+ Bluetooth + NFC	Yes

General Note:

- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- NFC can transmit simultaneously with other Radios in extremity exposure condition.
- For simultaneously analysis, since the SAR summation of 3 transmitters can cover others combination of 2 transmitters, therefore in this section did not additional to evaluate 2TX combination of simultaneously transmission.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- For distance SAR and non-distance SAR always chose higher SAR to do co-located analysis.
- The reported SAR summation is calculated based on the same configuration and test position
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - The SPLSR calculated results please refer to section 16.2.


16.1 Body Exposure Conditions

Exposure Position	3		4		6		7		9		10		3+4+10		6+7+9+10		SPLSR
	WLAN2.4GHz		WLAN2.4GHz		WLAN5GHz		WLAN5GHz		Bluetooth		NFC		Summed		Summed		
	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	1g SAR (W/kg)						
Bottom Face at 0mm	1.169	0.066	1.119	0.173	0.437	0.035							1.27	1.76	#1		
Edge 1 at 0mm	0.049	0.521	0.433	1.108	0.030								0.57	1.57			
Edge 2 at 0mm	0.022	0.029		0.240	0.016								0.05	0.26			
Edge 3 at 0mm	0.013		0.110	0.149	0.013								0.01	0.27			
Edge 4 at 0mm	0.030		0.127	0.071	0.019								0.03	0.22			

16.2 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$ for 1g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, NFC antenna was summed algebraically with the BT/WIFI Antenna 0 separately for the purposes of hybrid SPLSR combination and they are located at the side of the device.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.

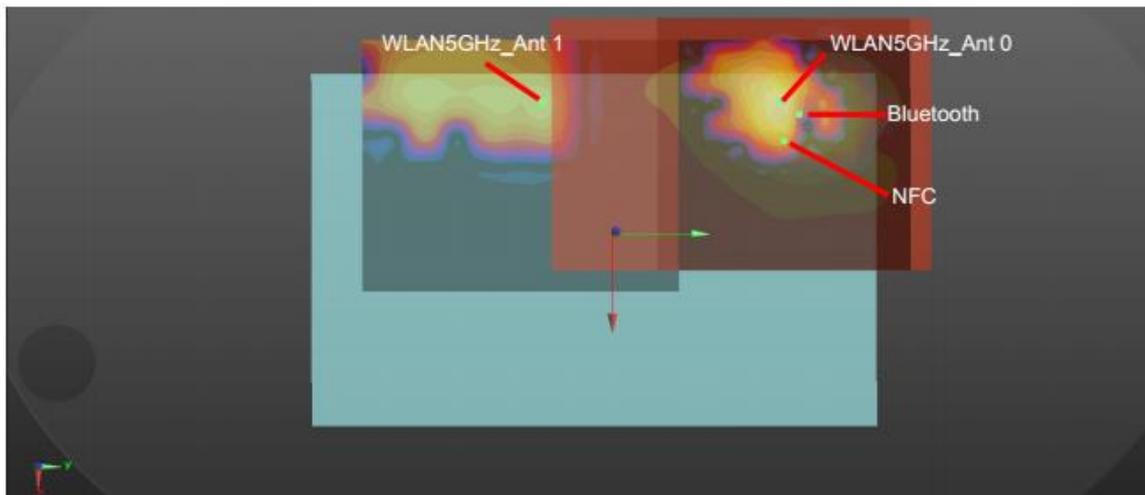

5G WLAN + Bluetooth + NFC_ Bottom Face

<5G WLAN + Bluetooth + NFC >

	Band	Position	SAR (W/kg)	Summed 1g SAR	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case #1	WLAN5GHz Ant 0	Bottom Face at 0mm	1.119	1.591	0	-0.067	0.086	-0.177	160.9	1.76	0.01	Not required
	Bluetooth Ant 0		0.437		0							
	NFC		0.035		0							
	WLAN5GHz Ant 1		0.173	0.173	0	-0.084	-0.074	-0.177				
	WLAN5GHz Ant 0	Bottom Face at 0mm	1.119	1.591	0				161.3	1.76	0.01	Not required
	Bluetooth Ant 0		0.437		0	-0.0716	0.0868	-0.177				
	NFC		0.035		0							
	WLAN5GHz Ant 1		0.173	0.173	0	-0.084	-0.074	-0.177				
	WLAN5GHz Ant 0	Bottom Face at 0mm	1.119	1.591	0				182.9	1.76	0.01	Not required
	Bluetooth Ant 0		0.437		0							
	NFC		0.035		0	-0.0515	0.106	-0.177				
	WLAN5GHz Ant 1		0.173	0.173	0	-0.084	-0.074	-0.177				

Test Engineer : Hank Huang, Kevin Xu, David Dai, Bin He



17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.



18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015

-----THE END-----