

FCC Radio Test Report

FCC ID: O57TB3710I

This report concerns (check one): Original Grant Class II Change

Project No. : 1512C068
Equipment : Portable Tablet Computer
Model Name : Lenovo TB3-710I
Applicant : LENOVO (SHANGHAI) ELECTRONICS
TECHNOLOGY CO LTD
Address : NO 68 BUILDING 199 FENJU RD, CHINA
(SHANGHAI) PILOT FREE TRADE
ZONE, SHANGHAI, 200131 CHINA

Date of Receipt : Dec. 08, 2015
Date of Test : Dec. 08, 2015 ~ Jan. 07, 2016
Issued Date : Jan. 07, 2016
Tested by : BTL Inc.

Technical Engineer :

Shawn Xiao
(Shawn Xiao)

Authorized Signatory :

Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	12
3.3 BLOCKDIGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	13
3.4 DESCRIPTION OF SUPPORT UNITS	13
4 . TEST RESULT	14
4.1 OUTPUT POWER MEASUREMENT	14
4.1.1 LIMIT	14
4.1.2 TEST PROCEDURE	14
4.1.3 TESTSETUP LAYOUT	15
4.1.4 TEST DEVIATION	15
4.1.5 TEST RESULTS	15
4.2 OCCUPIED BANDWIDTH MEASUREMENT	16
4.2.1 TEST PROCEDURE	16
4.2.2 TEST SETUP LAYOUT	16
4.2.3 TEST DEVIATION	16
4.2.4 TEST RESULTS	16
4.3 CONDUCTED EMISSIONS MEASUREMENT	17
4.3.1 LIMIT	17
4.3.2 TEST PROCEDURES	17
4.3.3 TESTSETUP LAYOUT	17
4.3.4 TESTDEVIATION	17
4.3.5 TEST RESULTS	17
4.4 RADIATED EMISSIONS MEASUREMENT	18
4.4.1 LIMIT	18
4.4.2 TEST PROCEDURES	18
4.4.3 TESTSETUP LAYOUT	18
4.4.4 TESTDEVIATION	18
4.4.5 TEST RESULTS	18
4.5 BAND EDGE MEASUREMENT	19
4.5.1 LIMIT	19

Table of Contents	Page
4.5.2 TEST PROCEDURES	19
4.5.3 TESTSETUP LAYOUT	19
4.5.4 TESTDEVIATION	19
4.5.5 TEST RESULTS	19
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	20
4.6.1 LIMIT	20
4.6.2 TEST PROCEDURES	20
4.6.3 TESTSETUP LAYOUT	20
4.6.4 TESTDEVIATION	20
4.6.5 TEST RESULTS	20
4.7 FREQUENCY STABILITY MEASUREMENT	21
4.7.1 LIMIT	21
4.7.2 TEST PROCEDURES	21
4.7.3 TESTSETUP LAYOUT	21
4.7.4 TESTDEVIATION	21
4.7.5 TEST RESULTS	21
5. LIST OF MEASUREMENT EQUIPMENTS	22
6. EUT TEST PHOTO	24
ATTACHMENT A - OUTPUT POWER	27
ATTACHMENT B - OCCUPIED BANDWIDTH	30
ATTACHMENT C – CONDUCTED EMISSIONS	34
ATTACHMENT D - RADIATED EMISSION	37
ATTACHMENT E - BAND EDGE	53
ATTACHMENT F – PEAK TO AVERAGE RATIO	56
ATTACHMENT G - FREQUENCY STABILITY	59

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-4-1512C068	Original Issue.	Jan. 07, 2016

1. CERTIFICATION

Equipment : Portable Tablet Computer
Brand Name : Lenovo
Model Name : Lenovo TB3-710I
Applicant : LENOVO (SHANGHAI) ELECTRONICS TECHNOLOGY CO LTD
Manufacturer : Lenovo PC HK Limited
Address : 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong
Date of Test : Dec. 08, 2015 ~ Jan. 07, 2016
Test Sample : Engineering Sample
Standard(s) : 47 CFR FCC Part 22 Subpart H
47 CFR FCC Part 2
ANSI/TIA-603-D-2010
KDB 971168 D01 Power Meas License Digital Systems v02r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1512C068) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the GSM850 and WCDMA Band V part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H& Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 22.913(a)	Radiated power	PASS	Robert Luo
2.1046 24.232(c)	Conducted Output Power	PASS	Allen Li
2.1049(h) 22.917(a)	Occupied Bandwidth	PASS	Allen Li
2.1051 22.917(a)	Conducted Spurious Emissions	PASS	Allen Li
2.1053 22.917(a)	Radiated Spurious Emissions	PASS	Robert Luo
22.917(a)	Band Edge Measurements	PASS	Allen Li
-	Peak To Average Ratio	PASS	Allen Li
2.1055 22.355	Frequency Stability	PASS	Allen Li

NOTE:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Portable Tablet Computer	
Brand Name	Lenovo	
Model Name	Lenovo TB3-710I	
Model Difference	This model has two configurations: main supply, secondary supply. Please refer to note 3.	
Modulation Type	GSM	GMSK
	EDGE	GMSK, 8PSK
	WCDMA	Uplink: BPSK Downlink: QPSK
	WCDMA(HSDPA/HSUPA)	16QAM/64QAM
Operation Frequency	GSM /EDGE	824.2 ~ 848.8 MHz
	WCDMA	826.4 ~ 846.6 MHz
Max. ERP Power	GSM	29.09dBm
	EDGE	24.98dBm
	WCDMA	21.77dBm
Antenna Type	Fixed Internal Antenna	
Antenna Gain	-0.2dBi	
Hardware Version	A1901_MB_PCB_V4.0	
Software Version	TB3-710I_S000012_151209_ROW	
IMEI No.	868981020013829	
Power Source	#1 DC voltage supplied from AC/DC adapter. #2 Supplied from USB port. #3 Supplied from rechargeable Li-Polymer battery.	
Power Rating	Please refer to note 2	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	Huntkey	C-P56	I/P: 100-240V~ 50/60Hz, 0.15A O/P: 5.0V, 1.0A
	Acbel	C-P56	I/P: 100-240V~ 50/60Hz, 0.13A O/P: 5.0V, 1.0A
Battery	lenovo (SUNWODA)	L13D1P31	3.8VDC, 3450mAh
	lenovo (SCUD)	L13D1P31	3.8VDC, 3450mAh
USB Cable	LIQI	L16B-05100070L	70cm shielded cable w/o core

3.

Main Supply			
Part Name	Model Name	Description	Supplier
PCB--MB	A1901_MB_PCB_V4.0_HF	A1901_PCB_V4.0	HUASHEN
Baseband chip	MT8321A/B	WCDMA	MTK
PMIC	MT6350V/A	-	MTK
PA	AP7169-R95MOG	RFPA_3G_two in one PA_BANDS I, II, III, IV, V, VIII	Airoha
	AP6690-R95MOG	RFPA_850/900/1800/1900/TD1900/TD2010	Airoha
Duplexer	RFDIP1608060TM7T62	Electromagnetic interference two-way stopband filters_1.575 GHz/2.4 GHz/5GHz	Walsin
	SAYFH897MHA0F00	Electromagnetic interference two-way stopband filters_W900	MURATA
	SAYFH836MCC0F0A	Electromagnetic interference two-way stopband filters_band5_W850	MURATA
	SAYRF1G88CA0B0A	Electromagnetic interference two-way stopband filters_band2_W1900	MURATA
	SAYRF1G95HQ0F0A	Electromagnetic interference two-way stopband filters_band1_W2100	MURATA
	MDBF21L914H1897M-DB02H	Electromagnetic interference difference converter_GSM850/GSM900/DCS1800/PCS1900	MICROGATE
G-sensor	KXTJ2-1009		Kionix
EMMC+DDR3	KMF820012M-B305	MCP_16GB-eMMC_8Gb-LPDDR3	Samsung
Crystal	7L26002009	26M_0.5ppm_2.8V_2520	TXC
audio frequency amplifier	AW8155AFCR	AB type/Dype_sgle-way	Awinic
RF Switch	SKY13489-001	RF Switch_SPDT	Skyworks
LNA	WS7916	GPS_LNA	Will
SAW FILTER	SAFFB1G56KB0F0A	GPS BEIDOU_RX1109	MURATA
TP	TTCT070121	A1900A	Top-Touch
LCD	TXDT700EPLA-68	7Inch_1024*600	TXD
Camera_Front	BLX0A20H-A1900-F	Camera_5x5x2.95mm_30w	BRODSANDS
Camera_Back	BLX2508H-A1900-B	Camera_6.5x6.5x4.2mm_200w	BRODSANDS
5M AF(3G)	O9B5-AW1507BHQ	Camera_8.5*8.5*4.66mm_500W	HUAQUAN
MIC	OB-F15LX42-1592-C10C33EP	-	HUAFENG
Motor(3G)	HZF-Z04B-RL126B20-90	-	HONGZHIFA
SPK	XHS151118SW43P38-02	-	HAOSHENG
Battery	L13D1P31	3450mAh	SUNWODA
Adapter(US)	C-P56	5V/1A	Huntkey
USB Cable	L16B-05100070L	70cm	LIQI

Secondary Supply			
Part Name	Model Name	Description	Supplier
PCB--MB	A1901_MB_PCB_V4.0_HF	A1901_PCB_V4.0	HUASHEN
G-sensor	BMA253		Bosch
EMMC+DDR3	H9TQ17A8GTMCUR-KUM	MCP_16GB-eMMC_8Gb-LPDDR3	Hynix
Crystal	X1E000021043400	26M_10ppm_7.4pF_3225	Epson Toyocom
TP	YCB0880700801A	A1900A	YEJI
LCD	KD070D54-39NH-B2	7Inch_1024*600	GUOXIAN
Camera_Front	GI5953A1D-1P0J0	Camera_5x5x2.95mm_30w	QUNHUI
Camera_Back	GV5954B1S-1P0J0	Camera_6.5x6.5x4.25_200w	QUNHUI
5M AF(3G)	HNW5889B1S-0P0J0	Camera_8.5*8.5*4.66mm_500W	QUNHUI
MIC	CM4015BC-423-WR138	-	JINZUN
Motor(3G)	CY0408L-021HB-047	-	KUNWANG
SPK	KFSC1115G3.5-08-0.7W-D	-	XICHUN
Battery	L13D1P31	3450mAh	SCUD
Adapter(US)	C-P56	5V/1A	Acbel
USB Cable	R16B-05100070	70cm	RIDONGSHENG

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports
 The worst case was found when positioned on X-plane for ERP and X-axis for radiated emission.
 Following channel(s) was (were) selected for the final test as listed below:

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
ERP	128 to 251	128, 190, 251	GSM, EDGE
Conducted Output Power	128 to 251	128, 190, 251	GSM, EDGE
Occupied Bandwidth	128 to 251	128, 190, 251	GSM, EDGE
Condcudeted Emission	128 to 251	190	GSM, EDGE
Radiated Emission	128 to 251	190	GSM, EDGE
Band Edge	128 to 251	128, 251	GSM, EDGE
Peak to Average Ratio	128 to 251	128, 190, 251	GSM, EDGE
Frequency Stability	128 to 251	190	GSM, EDGE


WCDMA MODE			
Test Item	Available Channel	Tested Channel	Mode
ERP	4132 to 4233	4132, 4182, 4233	WCDMA
Conducted Output Power	4132 to 4233	4132, 4182, 4233	WCDMA
Condcudeted Emission	4132 to 4233	4182	WCDMA
Radiated Emission	4132 to 4233	4182	WCDMA
Band Edge	4132 to 4233	4132, 4233	WCDMA
Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
Frequency Stability	4132 to 4233	4182	WCDMA

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in **QPSK** modulation.

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
ERP	24°C, 63%RH	AC120V/60Hz
Conducted Output Power	25°C, 65%RH	AC120V/60Hz
Occupied Bandwidth	25°C, 65%RH	AC120V/60Hz
Conducted Emission	25°C, 65%RH	AC120V/60Hz
Radiated Emission	24°C, 63%RH	AC120V/60Hz
Band Edge	25°C, 65%RH	AC120V/60Hz
Peak to Average Ratio	25°C, 65%RH	AC120V/60Hz
Frequency Stability	25°C, 65%RH	AC120V/60Hz

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

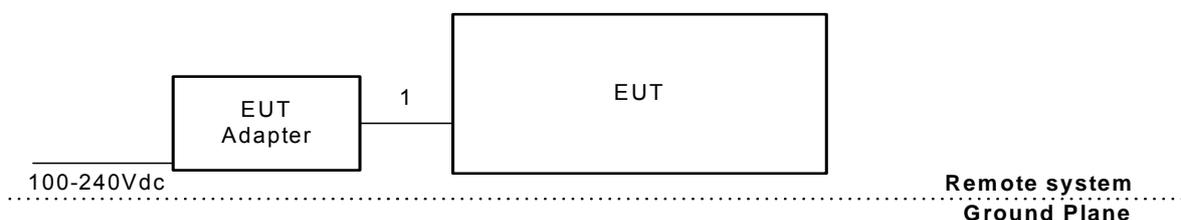

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	0.7m	USB Cable

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 7 watts e.r.p.

4.1.2 TEST PROCEDURE

EIRP/ERP:

1. All measurements were done at low, middle and high operational frequency range. RBW and VBW setting:
Set the RBW \geq OBW.
Set VBW $\geq 3 \times$ RBW.
Set span $\geq 2 \times$ RBW
Sweep time=auto couple
Detector=peak
Ensure that the number of measurement points \geq span/RBW
Trace mode=max hold
Allow trace to fully stabilize
Use the peak marker function to determine the peak amplitude level
2. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
3. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G
5. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of Integral, E.R.P power=E.I.P.R power-2.15dBi.


Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 TESTSETUP LAYOUT

ERP Power Measurement

Below 1G

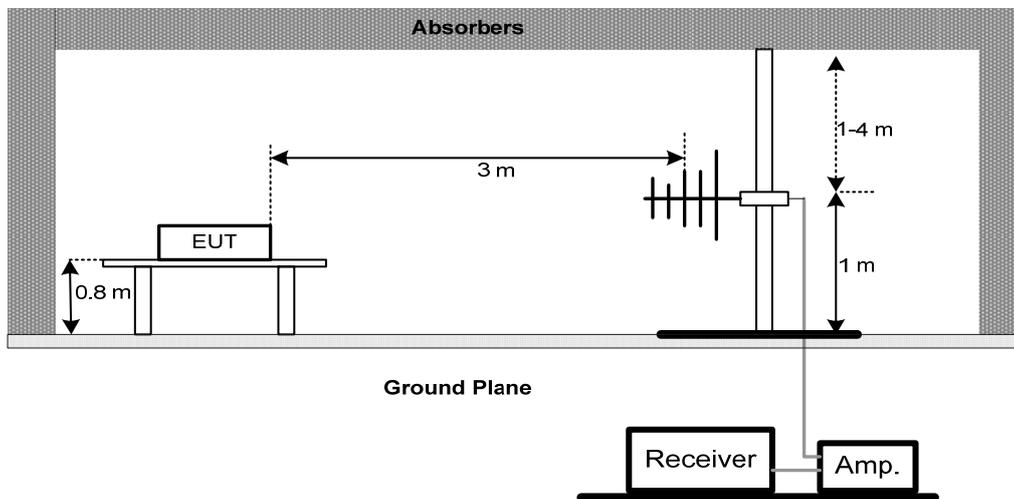

Above 1G

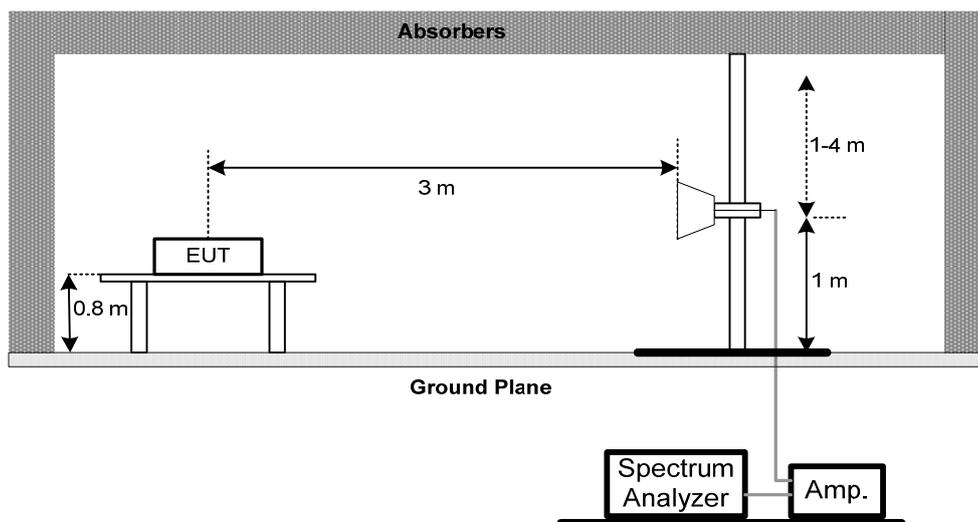

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Attachment A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

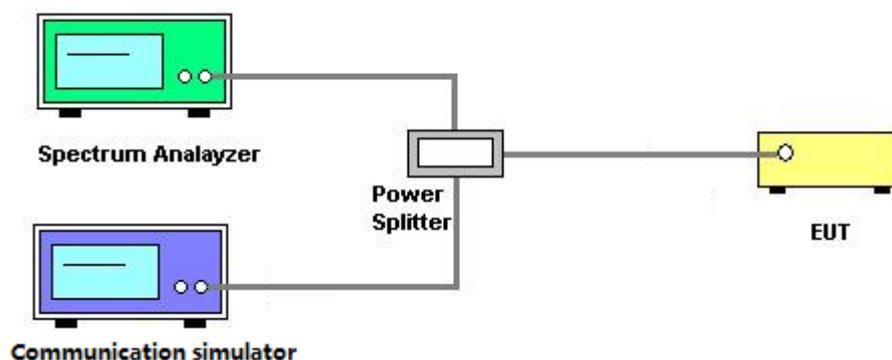

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Attachment B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43+10\log(P)$ dB below the transmitter power P(Watts)
 $=P(W)-[43+10\log(P)](dB)$
 $=[30+10\log(P)](dBm)-[43+10\log(P)](dB)$
 $=-13dBm$

4.3.3 TESTSETUP LAYOUT

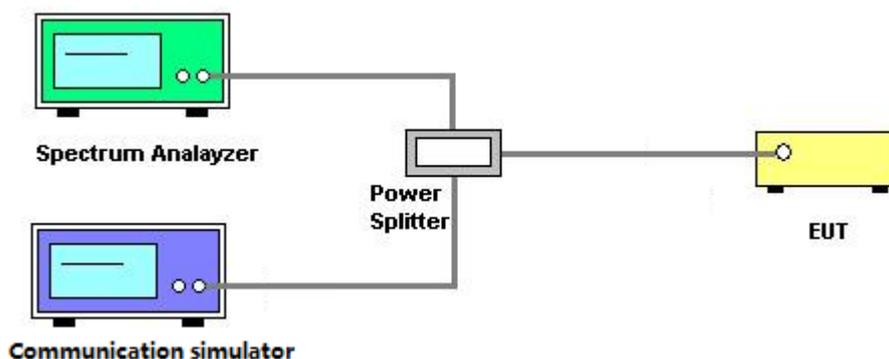

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Attachment C.

4.4 RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.4.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.3 TESTSETUP LAYOUT

This test setup layout is the same as that shown in **section 4.1.3**.

4.4.4 TESTDEVIATION

No deviation

4.4.5 TEST RESULTS

Please refer to the Attachment D.

4.5 BAND EDGE MEASUREMENT


4.5.1 LIMIT

A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
4. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 13kHz and VB of the spectrum is 51kHz (LTE Bandwidth 1.4MHz).
5. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz (LTE Bandwidth 3MHz).
6. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (LTE Bandwidth 5MHz/10MHz).
7. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

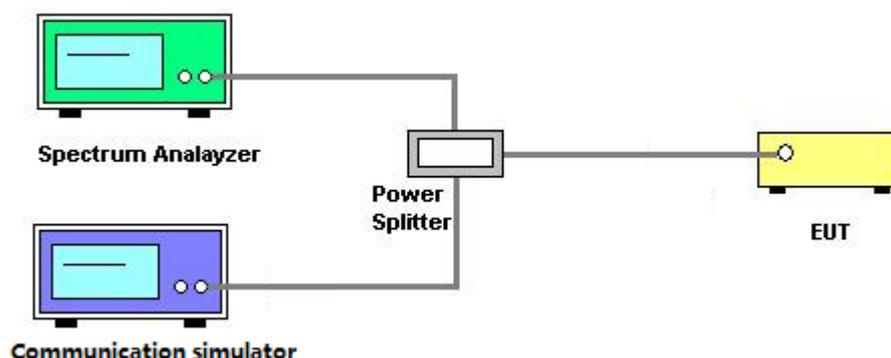

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Attachment E.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT


4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TESTSETUP LAYOUT

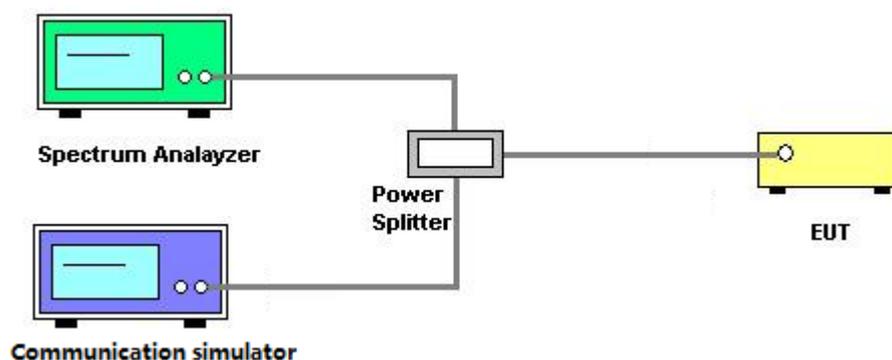

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Attachment F.

4.7 FREQUENCY STABILITY MEASUREMENT


4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

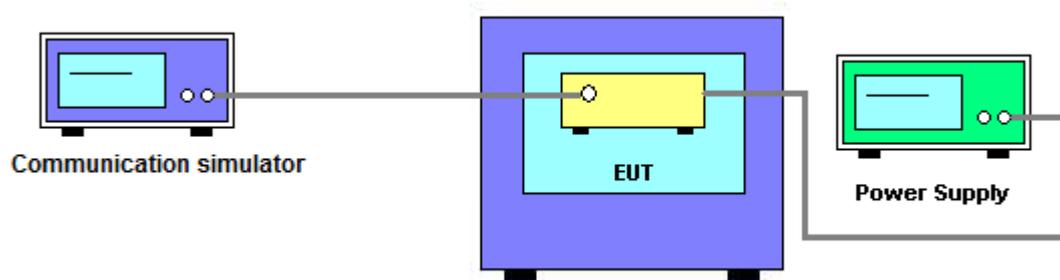

4.7.4 TESTDEVIATION

No deviation

4.7.5 TEST RESULTS

Please refer to the Attachment G.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission & ERP or EIRP Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 28, 2016
5	Controller	CT	SC100	N/A	N/A
6	Antenna	ETS	3115	00075789	Mar. 28, 2016
7	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz-26.5GHz)	C-68	Jun. 28, 2016
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
10	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
12	Wireless Communication Test Set	(8960 Series) Agilent	E5515C	MY48364183	Mar. 28, 2016
13	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/86 3-60/9SS	7	Mar. 04, 2016
14	HighPass Filter	Wairwright Instruments Gmbh Gmbh	WHK 1.5/15G-10ST	11	Jul. 06, 2016
15	HighPass Filter	Wairwright Instruments Gmbh	WHK 3.1/18G-10SS	24	Mar. 04, 2016
16	HighPass Filter	ZHPF-M1000-4000-1	WHK 1000-4000MHz	B2015073762	Aug. 05, 2016
17	HighPass Filter	ZHPF-M3-12.75G-3869	WHK 3000-12750MHz	B2015073763	Aug. 05, 2016
18	HighPass Filter	ZHPF-M6-18G-1727	WHK 6000-18000MHz	B2015073764	Aug. 05, 2016
19	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Wireless Communication Test Set	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016
3	wideband radio communication tester	R&S	CMW500	152372	Jan.30, 2016
4	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 17, 2016
5	Test Cable	N/A	RG316	Cable4-001	Jul. 15, 2016
6	Test Cable	N/A	RG316	Cable4-002	Jul. 15, 2016
7	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test Set	(8960 Series)Agilent	E5515C	MY48364183	Mar. 28, 2016
2	wideband radio communication tester	R&S	CMW500	152372	Jan.30, 2016
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 17, 2016
4	Test Cable	N/A	RG316	Cable4-001	Jul. 15, 2016
5	Const Temp. & Humidity Chamber	GIANT FORCE	ITH-225-20-S	IAB0309-001	Dec.04, 2016
6	DC power supply	GW Instek	GPC-30300N	EK880675	Oct. 13, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

6. EUT TEST PHOTO

Radiated Measurement Photos 9KHz to 30MHz



**Radiated Measurement Photos
Below 1G**



**Radiated Measurement Photos
Above 1G**



ATTACHMENT A - OUTPUT POWER

Conducted Power:

GSM850 (Capsensor Off)	Tune-up	Max Burst Average Power (dBm)			Tune-up	Max Frame Average Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM (CS)	32.50	32.28	32.30	32.25	23.31	23.09	23.11	23.06
GPRS/EDGE (GMSK)	32.50	32.32	32.35	32.22	23.31	23.13	23.16	23.03
	32.00	31.58	31.54	31.52	25.87	25.45	25.41	25.39
	30.00	29.82	29.80	29.77	25.58	25.40	25.38	25.35
	29.00	28.94	28.93	28.91	25.82	25.76	25.75	25.73
EDGE (8PSK)	27.50	27.26	27.28	26.97	18.31	18.07	18.09	17.78
	26.50	26.13	26.22	26.06	20.37	20.00	20.09	19.93
	24.50	24.43	24.36	24.31	20.08	20.01	19.94	19.89
	23.00	22.97	22.95	22.91	19.82	19.79	19.77	19.73

Band	WCDMA V(Capsensor Off)			
Tx Channel	Max. Tune-up Power	4132CH	4182CH	4233CH
Rx Channel		4357CH	4407CH	4458CH
Frequency		826.4MHz	836.4MHz	846.6MHz
RMC 12.2K	23.00	22.71	22.73	22.69
RMC 64K	23.00	22.68	22.72	22.64
RMC 144K	23.00	22.70	22.69	22.65
RMC 384K	23.00	22.72	22.70	22.64
HSDPA Subtest-1	22.00	21.82	21.71	21.85
HSDPA Subtest-2	22.00	21.76	21.69	21.80
HSDPA Subtest-3	22.00	21.35	21.21	21.36
HSDPA Subtest-4	22.00	21.32	21.19	21.33
HSUPA Subtest-1	22.00	21.76	21.68	21.84
HSUPA Subtest-2	22.00	21.80	21.72	21.85
HSUPA Subtest-3	22.00	21.36	21.22	21.37
HSUPA Subtest-4	22.00	21.82	21.72	21.88
HSUPA Subtest-5	22.00	21.82	21.69	21.84

E. R.P Power


GSM850					
Plane	Channel	Frequency (MHz)	GSM ERP(dBm)	EDGE ERP(dBm)	Polarization (H/V)
X	128	824.2	28.60	24.51	H
	190	836.6	27.41	24.98	H
	251	848.8	29.09	23.83	H
	128	824.2	21.46	17.21	V
	190	836.6	19.79	13.90	V
	251	848.8	20.50	14.28	V

WCDMA Band V				
Plane	Channel	Frequency (MHz)	ERP(dBm)	Polarization (H/V)
X	4132	826.4	20.70	H
	4182	836.4	21.77	H
	4233	846.6	20.92	H
	4132	826.4	13.57	V
	4182	836.4	10.56	V
	4233	846.6	14.16	V


ATTACHMENT B - OCCUPIED BANDWIDTH

GSM850					
GSM			EDGE		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
128	824.2	0.244	128	824.2	0.249
190	836.6	0.246	190	836.6	0.249
251	848.8	0.245	251	848.8	0.251
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
128	824.2	0.306	128	824.2	0.325
190	836.6	0.307	190	836.6	0.320
251	848.8	0.320	251	848.8	0.326

Spectrum Plot

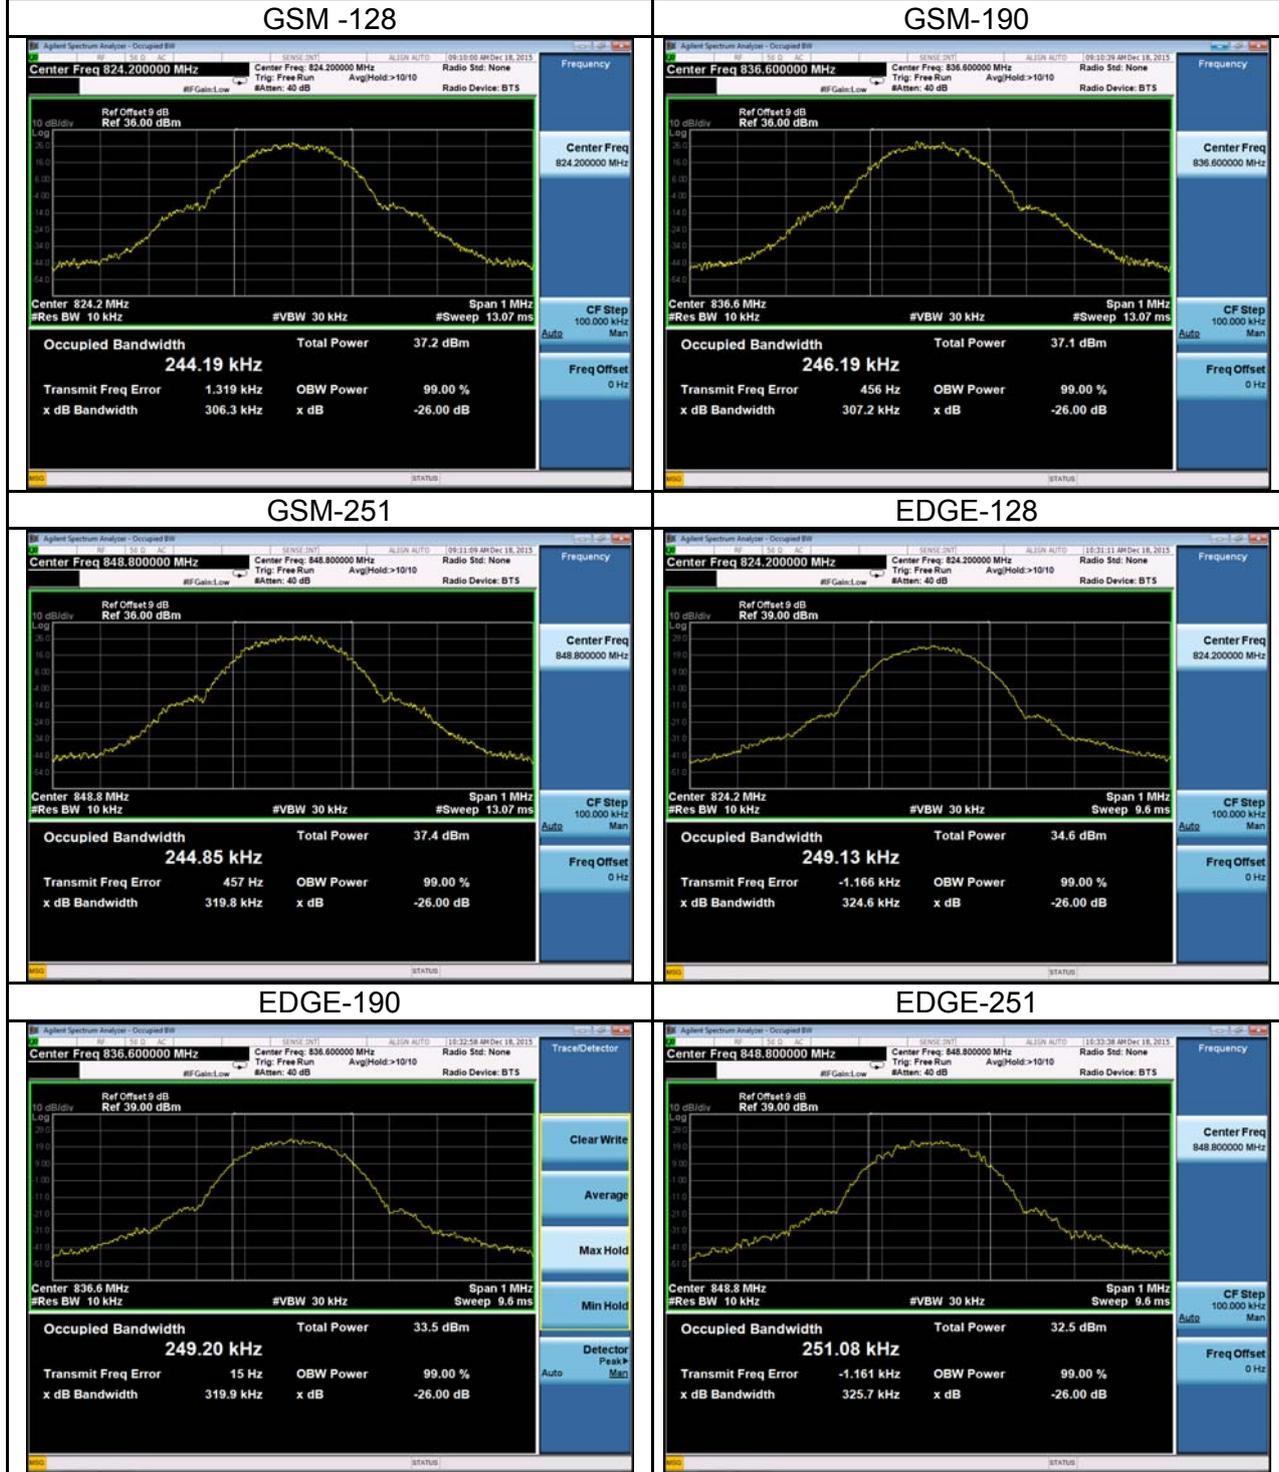

WCDMA Band V					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
4132	826.4	4.157	4132	826.4	4.703
4182	836.4	4.162	4182	836.4	4.695
4233	846.6	4.154	4233	846.6	4.703

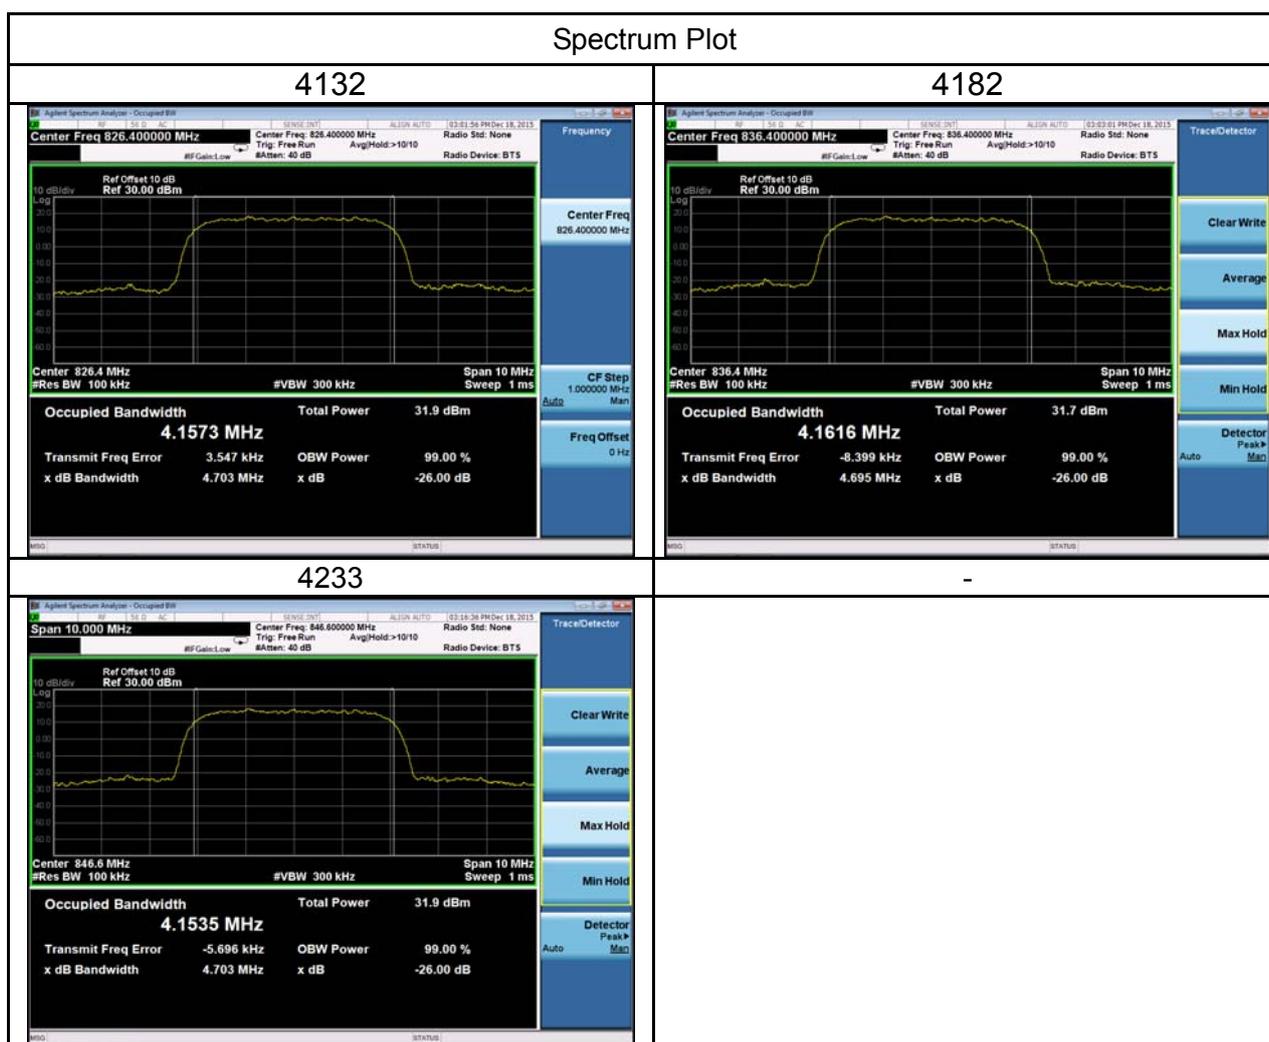

ATTACHMENT C – CONDUCTED EMISSIONS

GSM850			
GSM		GSM	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
190	836.6	190	836.6
Date: 6, JAN, 2016 18:59:42		Date: 6, JAN, 2016 18:58:49	
GSM		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
190	836.6	190	836.6
Date: 6, JAN, 2016 18:59:32		Date: 6, JAN, 2016 18:59:32	
EDGE		EDGE	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
190	836.6	190	836.6
Date: 6, JAN, 2016 18:59:05		Date: 6, JAN, 2016 18:59:05	

WCDMA Band V

Channel	Frequency(MHz)	Channel	Frequency(MHz)
4182	836.4	4182	836.4
Date: 6, JAN, 2016 18:56:56		Date: 6, JAN, 2016 18:57:24	
Channel	Frequency(MHz)	-	-
4182	836.4	-	-

ATTACHMENT D - RADIATED EMISSION

Test Mode:	GSM850_TX CH190_GSM
------------	---------------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0113	0°	13.52	24.85	38.37	126.54	-88.17	AVG
0.0113	0°	14.61	24.85	39.46	146.54	-107.08	PK
0.0241	0°	6.19	24.04	30.23	119.96	-89.73	AVG
0.0241	0°	8.23	24.04	32.27	139.96	-107.69	PK
0.0363	0°	3.71	23.27	26.98	116.41	-89.43	AVG
0.0363	0°	5.92	23.27	29.19	136.41	-107.22	PK
0.0518	0°	1.74	22.36	24.10	113.32	-89.21	AVG
0.0518	0°	2.29	22.36	24.65	133.32	-108.66	PK
0.5033	0°	19.54	19.81	39.35	73.57	-34.22	QP
1.9513	0°	23.34	19.50	42.84	69.54	-26.70	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0152	90°	13.72	24.30	38.02	123.97	-85.95	AVG
0.0152	90°	14.38	24.30	38.68	143.97	-105.29	PK
0.0237	90°	7.71	24.07	31.78	120.11	-88.33	AVG
0.0237	90°	8.52	24.07	32.59	140.11	-107.52	PK
0.0462	90°	5.64	22.64	28.28	114.31	-86.03	AVG
0.0462	90°	6.83	22.64	29.47	134.31	-104.84	PK
0.0552	90°	1.49	22.30	23.79	112.77	-88.98	AVG
0.0552	90°	2.56	22.30	24.86	132.77	-107.91	PK
0.6224	90°	22.21	20.19	42.40	71.72	-29.32	QP
2.0578	90°	24.52	19.47	43.99	69.54	-25.55	QP

Test Mode:	GSM850_TX CH190_EDGE
------------	----------------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0124	0°	13.13	24.78	37.91	125.74	-87.82	AVG
0.0124	0°	14.38	24.78	39.16	145.74	-106.57	PK
0.0266	0°	6.38	23.88	30.26	119.11	-88.84	AVG
0.0266	0°	8.25	23.88	32.13	139.11	-106.97	PK
0.0374	0°	3.24	23.20	26.44	116.15	-89.71	AVG
0.0374	0°	5.36	23.20	28.56	136.15	-107.59	PK
0.0541	0°	1.29	22.32	23.61	112.94	-89.33	AVG
0.0541	0°	2.62	22.32	24.94	132.94	-108.00	PK
0.5015	0°	19.24	19.80	39.04	73.60	-34.55	QP
1.9581	0°	23.67	19.50	43.17	69.54	-26.37	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0131	90°	13.38	24.30	37.68	125.26	-87.58	AVG
0.0131	90°	14.79	24.30	39.09	145.26	-106.17	PK
0.0254	90°	7.46	23.96	31.42	119.51	-88.09	AVG
0.0254	90°	8.72	23.96	32.68	139.51	-106.83	PK
0.0411	90°	5.37	22.96	28.33	115.33	-86.99	AVG
0.0411	90°	6.39	22.96	29.35	135.33	-105.97	PK
0.0564	90°	1.41	22.27	23.68	112.58	-88.90	AVG
0.0564	90°	2.53	22.27	24.80	132.58	-107.78	PK
0.6232	90°	22.32	20.19	42.51	71.71	-29.20	QP
2.0591	90°	24.46	19.46	43.92	69.54	-25.62	QP

Test Mode:	WCDMA Band V_TX CH4182
------------	------------------------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0119	0°	13.06	24.81	37.87	126.09	-88.22	AVG
0.0119	0°	14.15	24.81	38.96	146.09	-107.13	PK
0.0243	0°	6.07	24.03	30.10	119.89	-89.79	AVG
0.0243	0°	8.13	24.03	32.16	139.89	-107.73	PK
0.0364	0°	3.16	23.26	26.42	116.38	-89.96	AVG
0.0364	0°	5.31	23.26	28.57	136.38	-107.81	PK
0.0536	0°	1.62	22.33	23.95	113.02	-89.07	AVG
0.0536	0°	2.73	22.33	25.06	133.02	-107.96	PK
0.5009	0°	19.46	19.80	39.26	73.61	-34.35	QP
1.9517	0°	23.06	19.50	42.56	69.54	-26.98	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0134	90°	13.32	24.30	37.62	125.06	-87.44	AVG
0.0134	90°	14.73	24.30	39.03	145.06	-106.03	PK
0.0255	90°	7.13	23.95	31.08	119.47	-88.39	AVG
0.0255	90°	8.61	23.95	32.56	139.47	-106.91	PK
0.0457	90°	5.34	22.67	28.01	114.41	-86.39	AVG
0.0457	90°	6.31	22.67	28.98	134.41	-105.42	PK
0.0529	90°	1.38	22.34	23.72	113.14	-89.41	AVG
0.0529	90°	2.46	22.34	24.80	133.14	-108.33	PK
0.6271	90°	22.25	20.21	42.46	71.66	-29.20	QP
2.0538	90°	24.12	19.47	43.59	69.54	-25.95	QP


Test Mode: GSM850_TX CH190_GSM

Vertical



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		64.9200	-81.70	-2.81	-84.51	-13.00	-71.51	peak	
2	*	143.4900	-67.24	-2.86	-70.10	-13.00	-57.10	peak	
3		229.8200	-74.74	-0.70	-75.44	-13.00	-62.44	peak	
4		360.7700	-79.44	-0.29	-79.73	-13.00	-66.73	peak	
5		522.7600	-79.63	2.84	-76.79	-13.00	-63.79	peak	
6		598.4200	-79.56	5.54	-74.02	-13.00	-61.02	peak	


Test Mode: GSM850_TX CH190_GSM

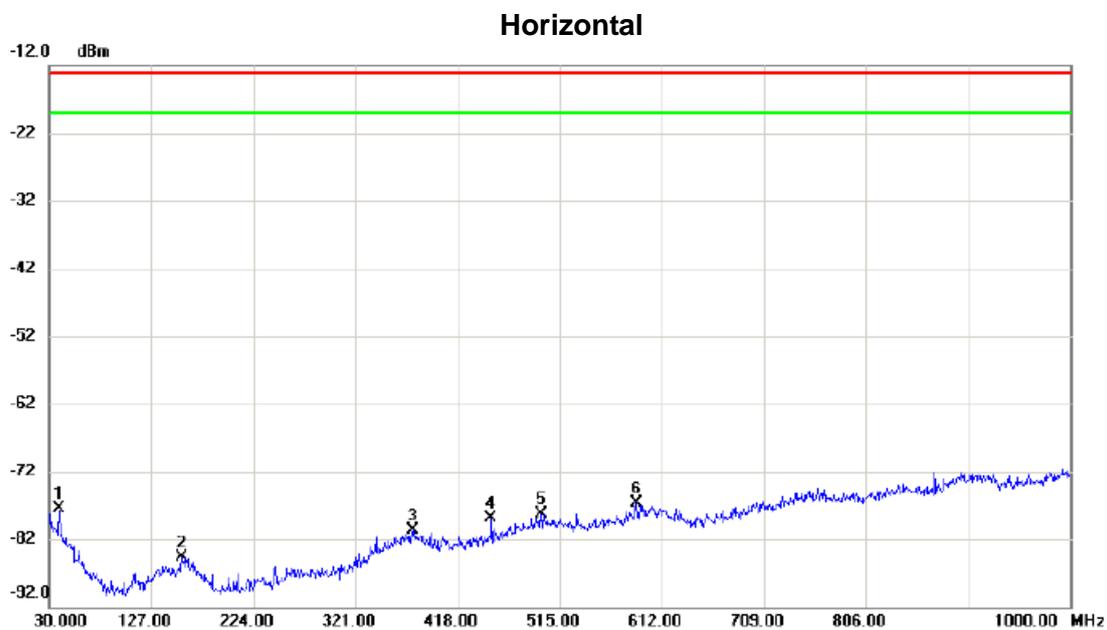

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		39.7000	-78.05	0.45	-77.60	-13.00	-64.60	peak	
2		156.1000	-79.89	-4.80	-84.69	-13.00	-71.69	peak	
3		375.3200	-80.08	-0.59	-80.67	-13.00	-67.67	peak	
4		450.0100	-77.79	-1.08	-78.87	-13.00	-65.87	peak	
5		497.5400	-79.16	0.88	-78.28	-13.00	-65.28	peak	
6	*	587.7500	-78.60	1.96	-76.64	-13.00	-63.64	peak	

Test Mode: GSM850_TX CH190_EDGE

Vertical

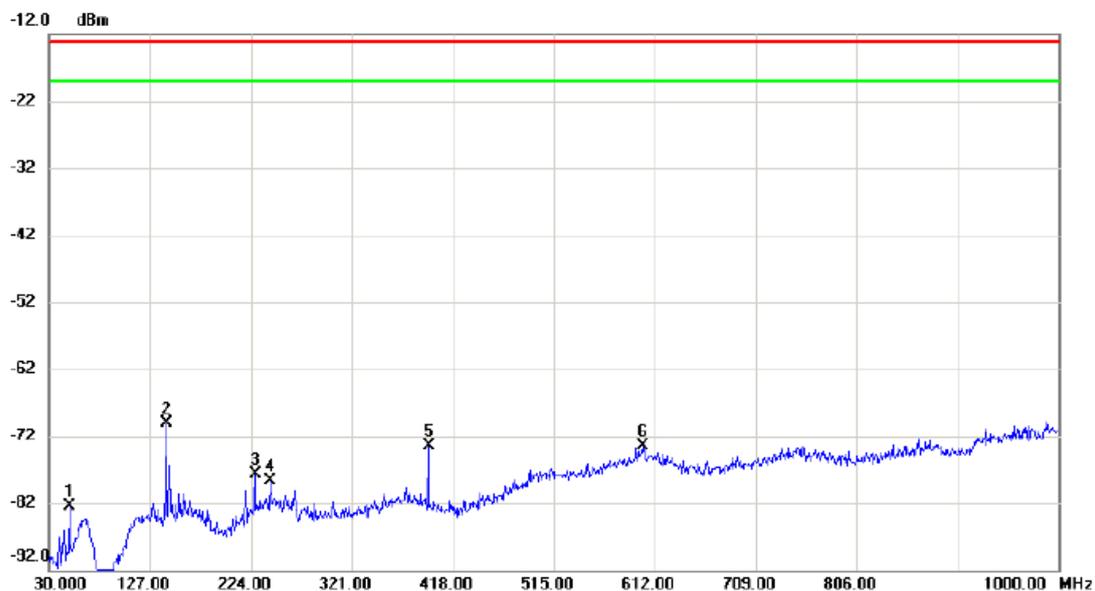

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		49.4000	-74.59	-7.91	-82.50	-13.00	-69.50	peak	
2	*	142.5200	-67.22	-2.87	-70.09	-13.00	-57.09	peak	
3		227.8800	-76.64	-1.16	-77.80	-13.00	-64.80	peak	
4		242.4300	-78.24	-0.52	-78.76	-13.00	-65.76	peak	
5		394.7200	-72.30	-1.16	-73.46	-13.00	-60.46	peak	
6		600.3600	-79.10	5.60	-73.50	-13.00	-60.50	peak	

Test Mode: GSM850_TX CH190_EDGE


Horizontal



No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	39.7000	-78.76	0.45	-78.31	-13.00	-65.31	peak	
2	159.0100	-76.73	-4.36	-81.09	-13.00	-68.09	peak	
3	256.9800	-72.42	-5.62	-78.04	-13.00	-65.04	peak	
4	374.3500	-80.09	-0.61	-80.70	-13.00	-67.70	peak	
5	520.8200	-79.40	0.64	-78.76	-13.00	-65.76	peak	
6 *	609.0900	-78.91	2.18	-76.73	-13.00	-63.73	peak	

Test Mode: WCDMA Band V_TX CH4182

Vertical

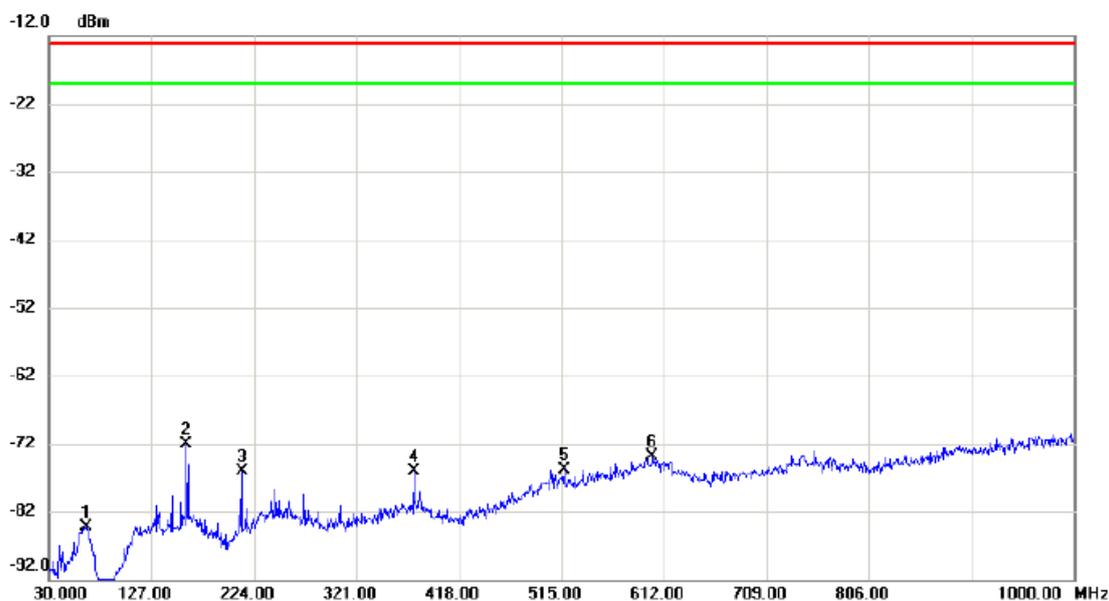

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		64.9200	-81.48	-2.81	-84.29	-13.00	-71.29	peak	
2	*	159.9800	-70.53	-1.66	-72.19	-13.00	-59.19	peak	
3		212.3600	-72.53	-3.49	-76.02	-13.00	-63.02	peak	
4		375.3200	-75.99	-0.09	-76.08	-13.00	-63.08	peak	
5		517.9100	-78.65	2.78	-75.87	-13.00	-62.87	peak	
6		601.3300	-79.42	5.56	-73.86	-13.00	-60.86	peak	

Test Mode: WCDMA Band V_TX CH4182


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		39.7000	-77.54	0.45	-77.09	-13.00	-64.09	peak	
2		159.9800	-79.98	-4.21	-84.19	-13.00	-71.19	peak	
3		378.2300	-80.50	-0.55	-81.05	-13.00	-68.05	peak	
4		449.0400	-79.58	-1.13	-80.71	-13.00	-67.71	peak	
5		595.5100	-79.20	2.33	-76.87	-13.00	-63.87	peak	
6	*	740.0400	-78.76	4.06	-74.70	-13.00	-61.70	peak	

Test Mode: GSM850_TX CH190_GSM


Vertical

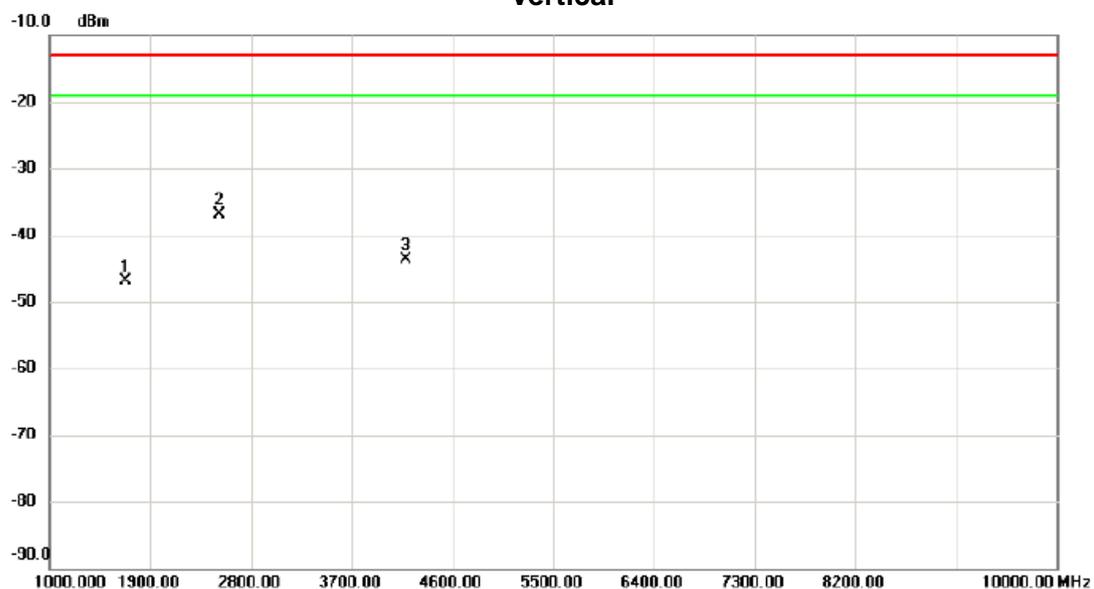

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	1675.000	-53.38	6.52	-46.86	-13.00	-33.86	peak	
2 *	2512.000	-49.09	12.21	-36.88	-13.00	-23.88	peak	
3	4186.000	-58.27	14.62	-43.65	-13.00	-30.65	peak	

Test Mode: GSM850_TX CH190_GSM


Horizontal

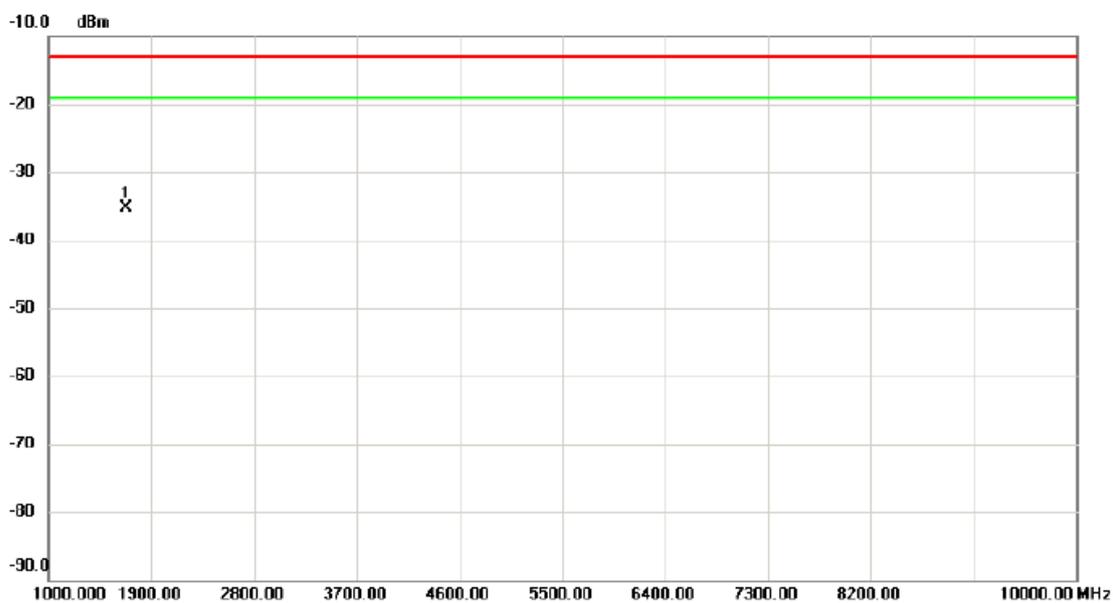

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1675.000	-43.45	8.16	-35.29	-13.00	-22.29	peak	

Test Mode: GSM850_TX CH190_EDGE


Vertical

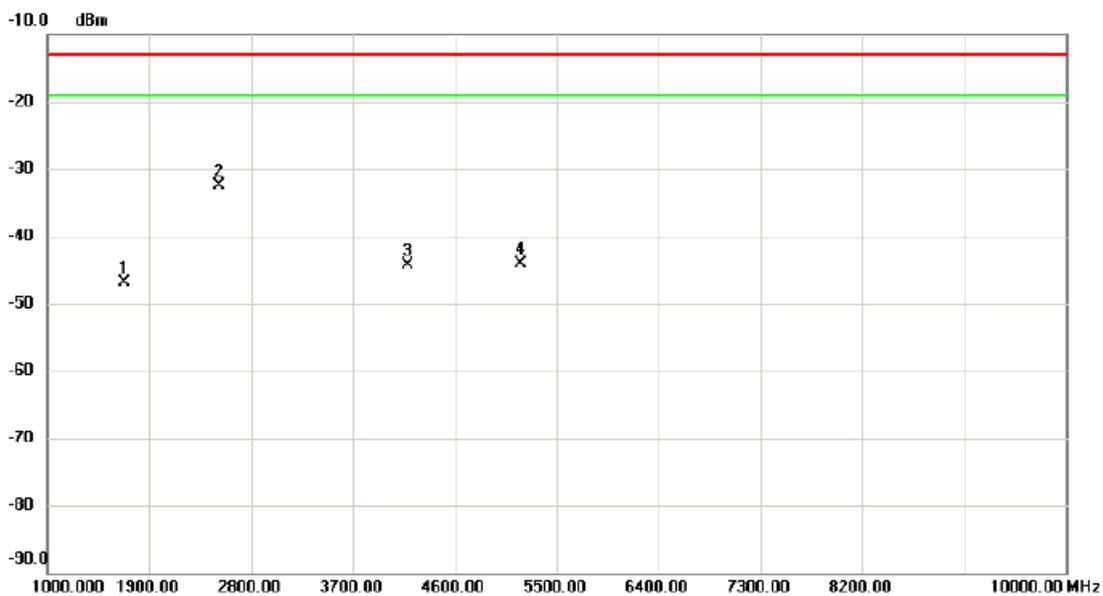

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		1675.000	-53.50	6.52	-46.98	-13.00	-33.98	peak	
2	*	2512.000	-44.80	12.21	-32.59	-13.00	-19.59	peak	
3		4186.000	-58.93	14.62	-44.31	-13.00	-31.31	peak	
4		5185.000	-59.31	15.13	-44.18	-13.00	-31.18	peak	

Test Mode: GSM850_TX CH190_EDGE


Horizontal

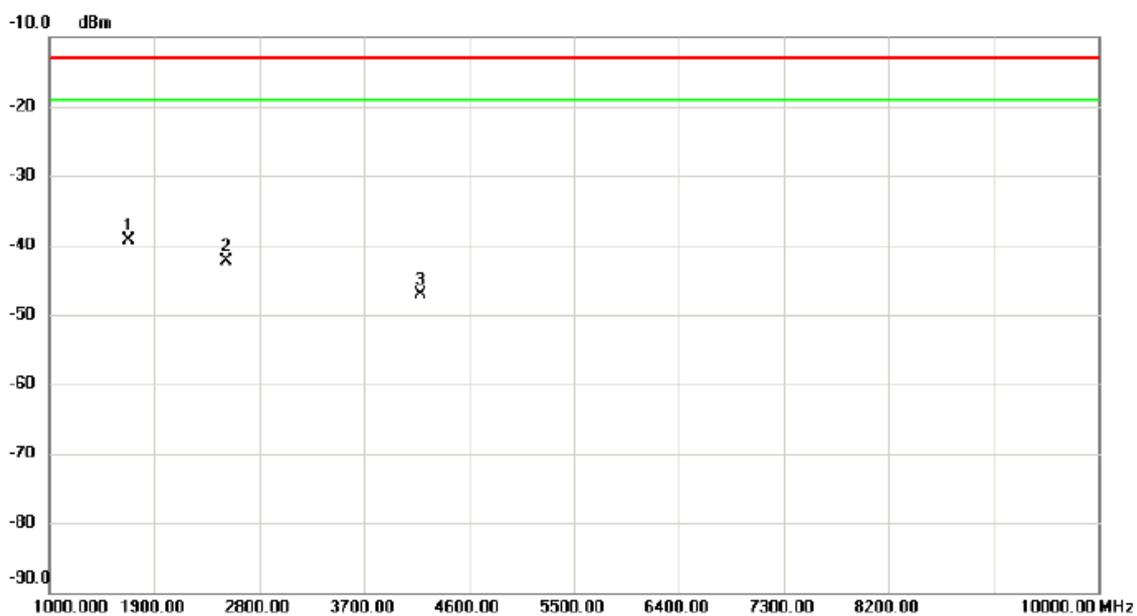

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1675.000	-47.49	8.16	-39.33	-13.00	-26.33	peak	
2		2512.000	-47.65	5.29	-42.36	-13.00	-29.36	peak	
3		4186.000	-59.52	12.41	-47.11	-13.00	-34.11	peak	

Test Mode: WCDMA Band V_TX CH4182


Vertical

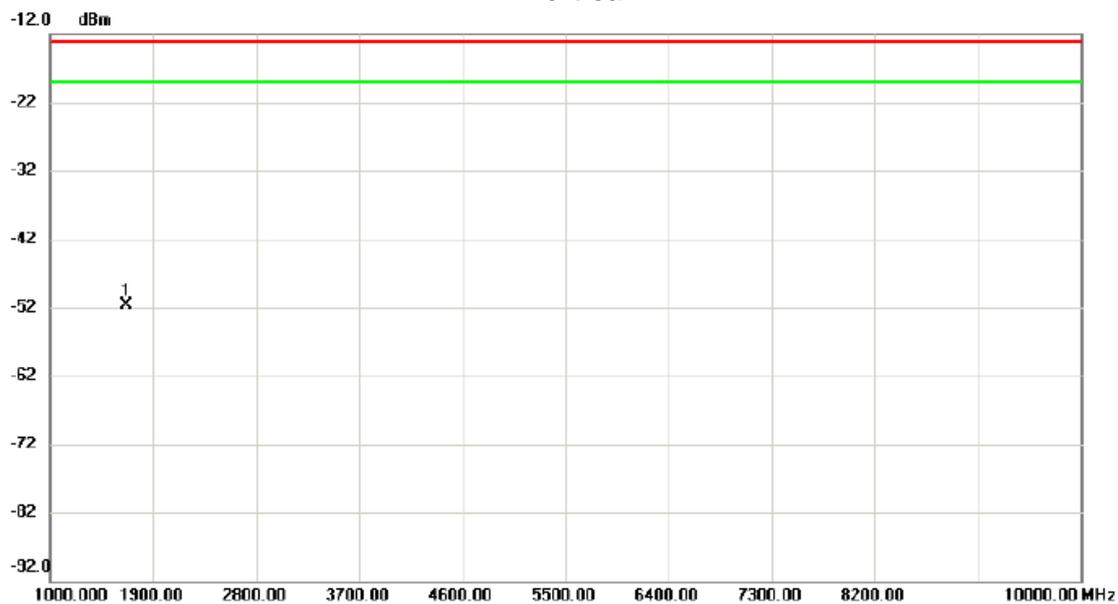

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1666.000	-58.09	6.40	-51.69	-13.00	-38.69	peak	


Test Mode: WCDMA Band V_TX CH4182

Horizontal

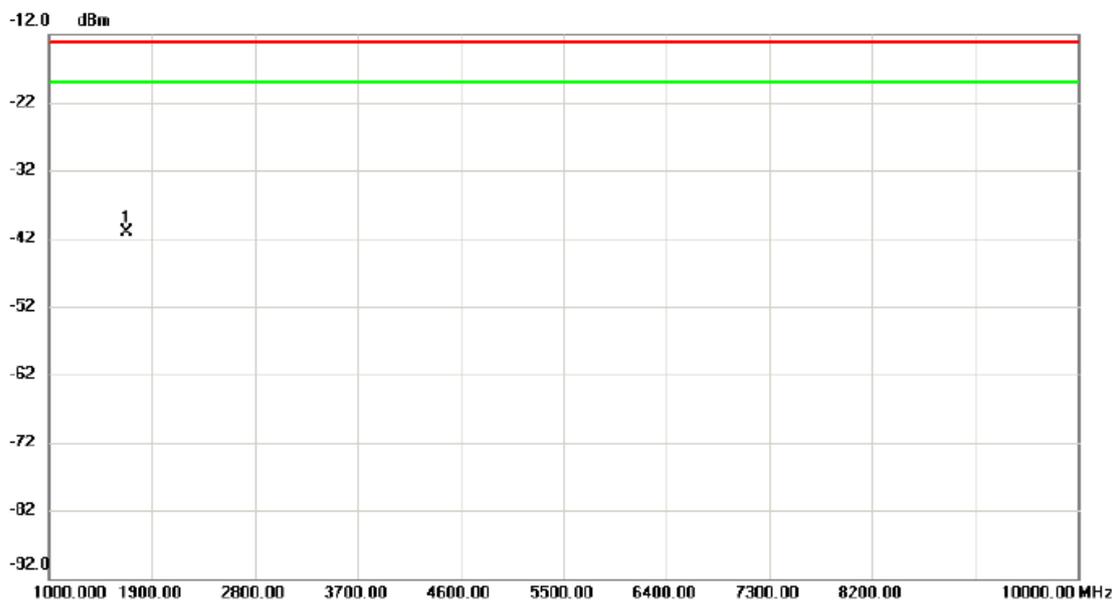


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1675.000	-49.23	8.16	-41.07	-13.00	-28.07	peak	

ATTACHMENT E - BAND EDGE

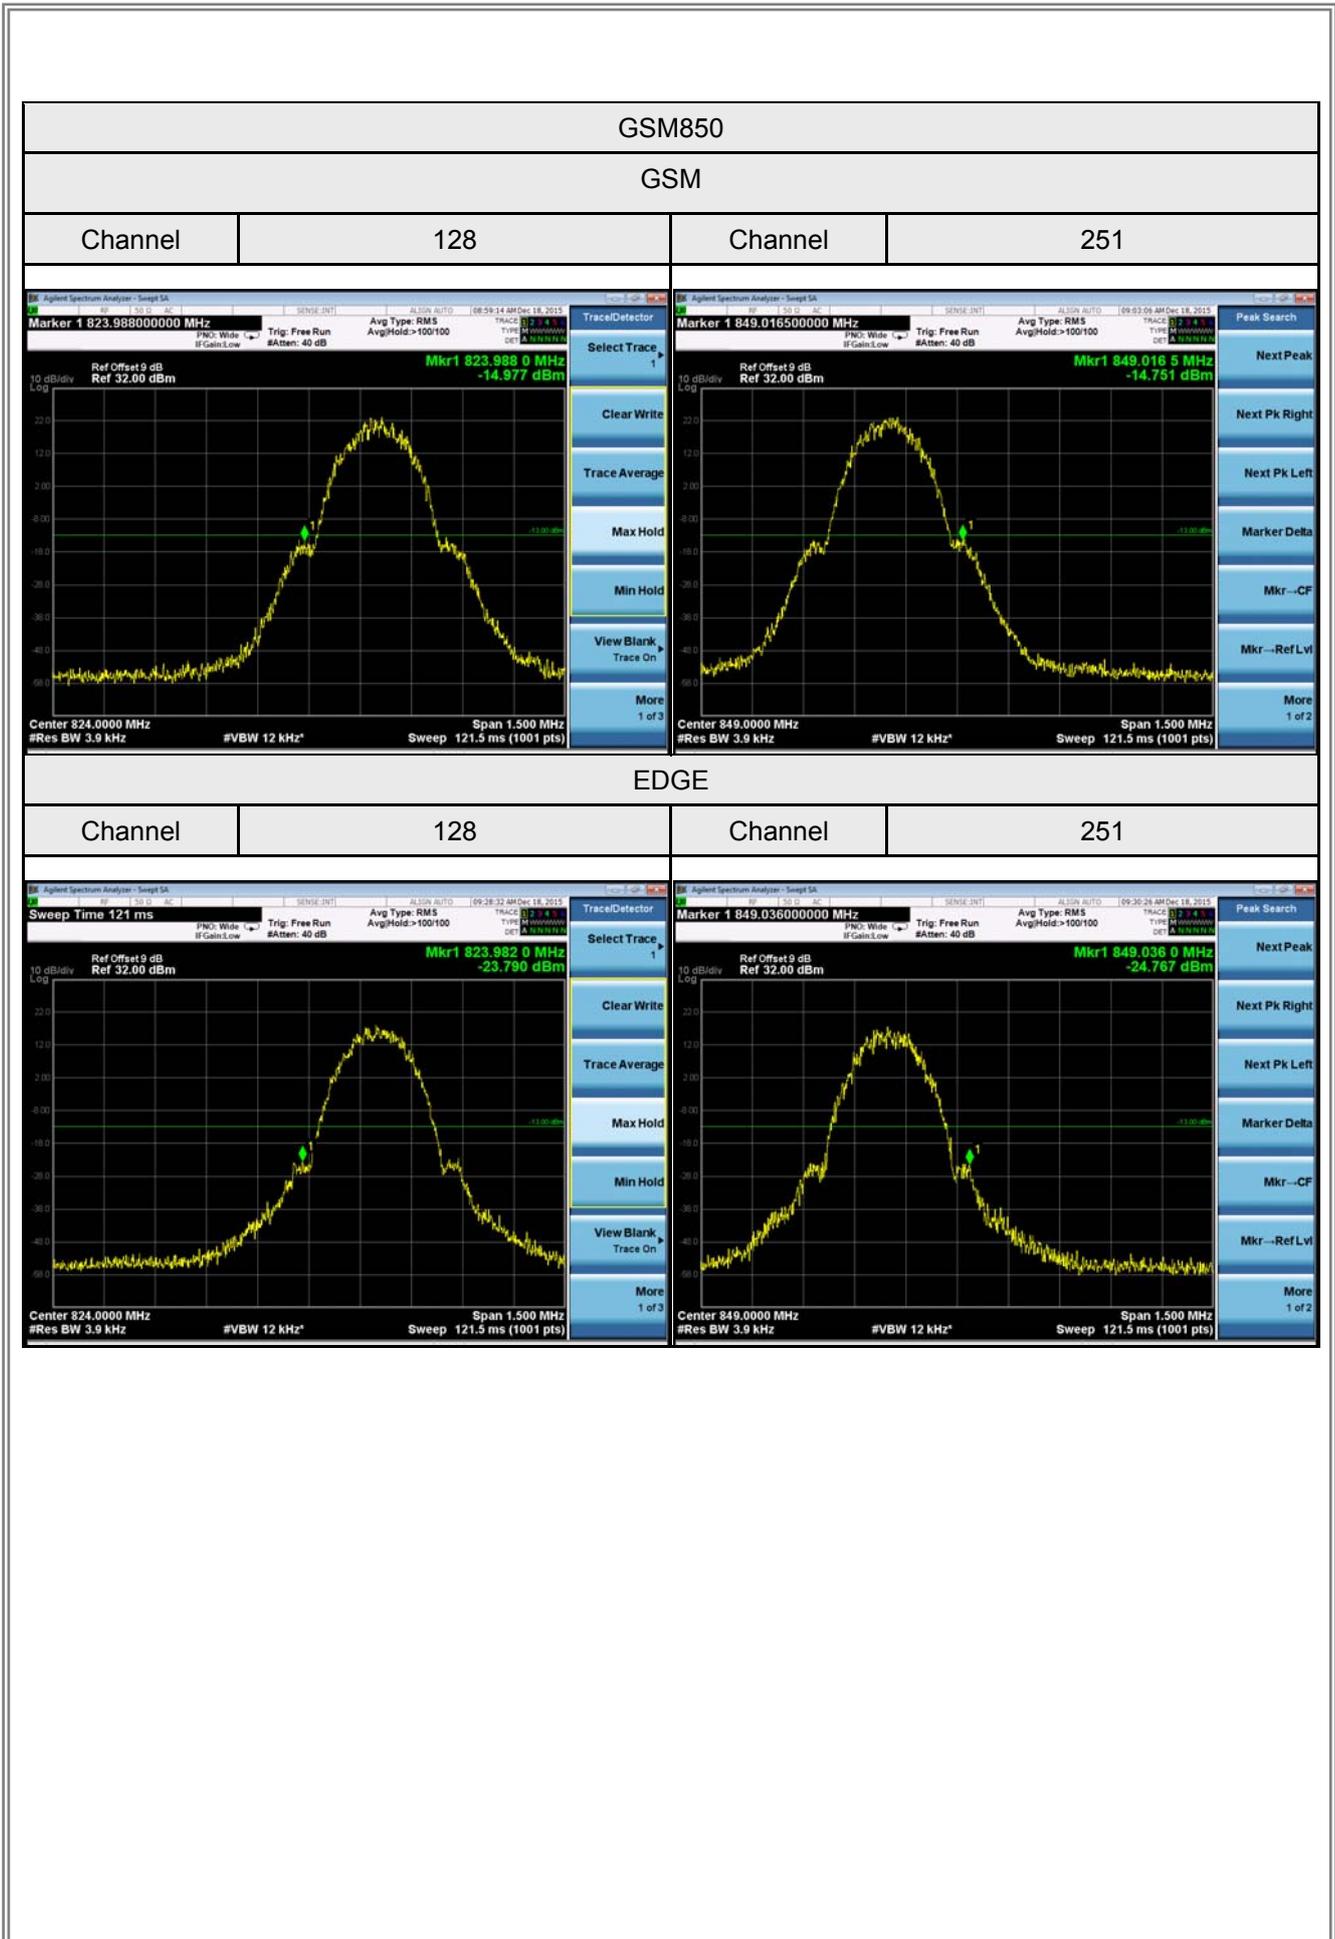


WCDMA Band V

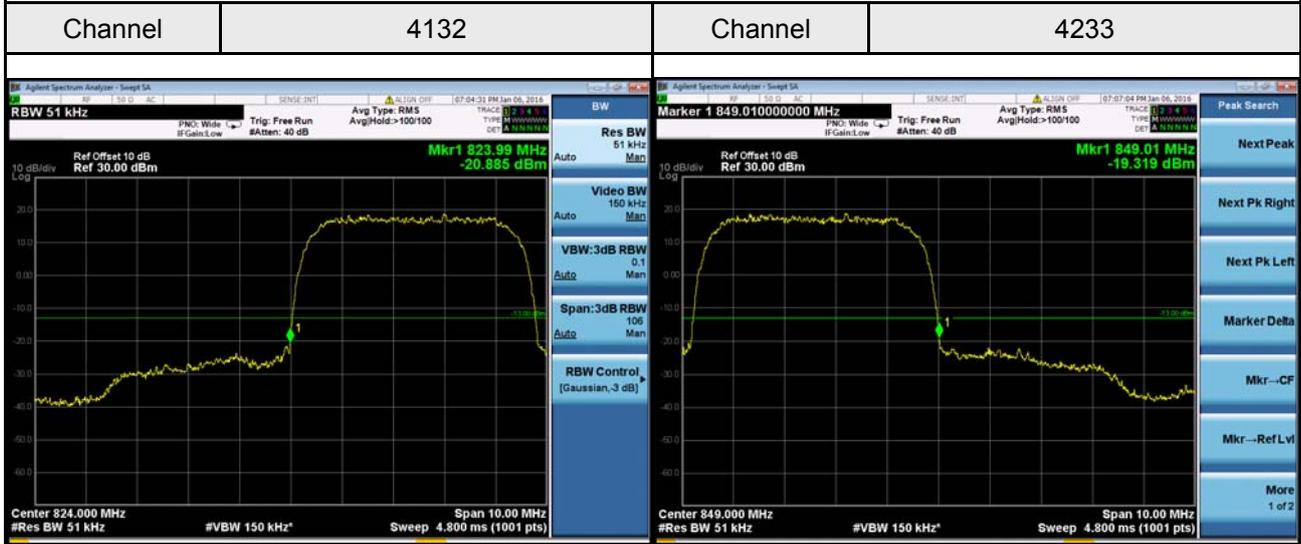


ATTACHMENT F – PEAK TO AVERAGE RATIO

GSM 850 Spectrum Plot


GSM -128

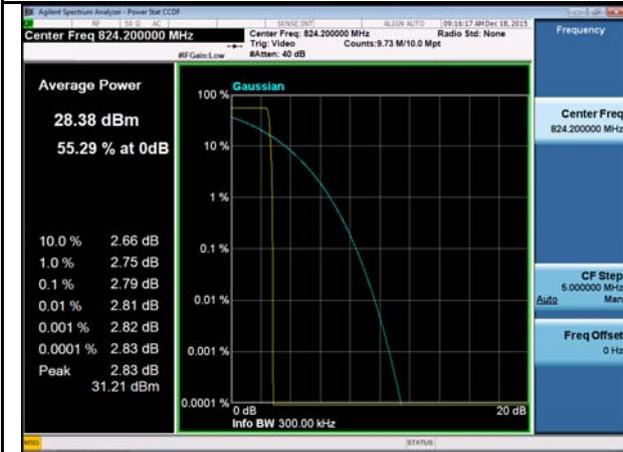


GSM-190

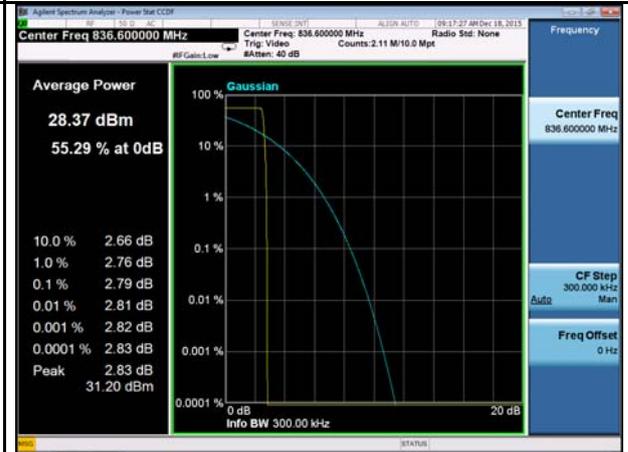


GSM-251

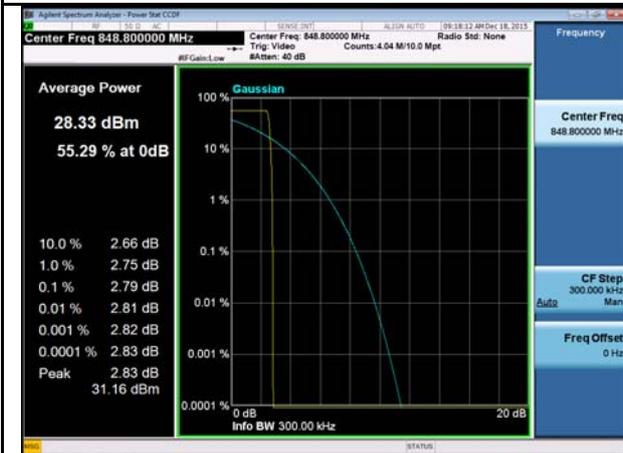


EDGE-128

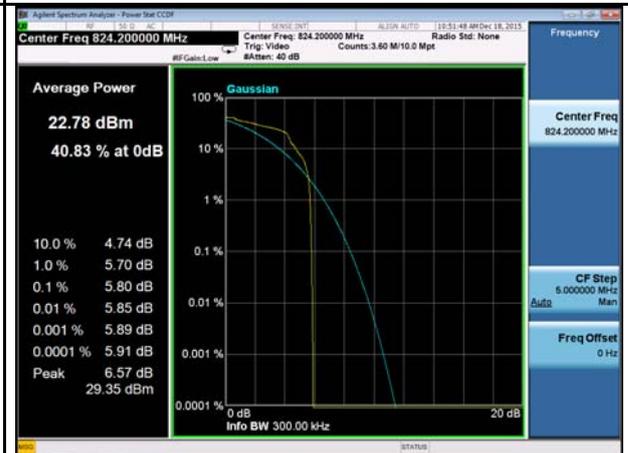

EDGE-190

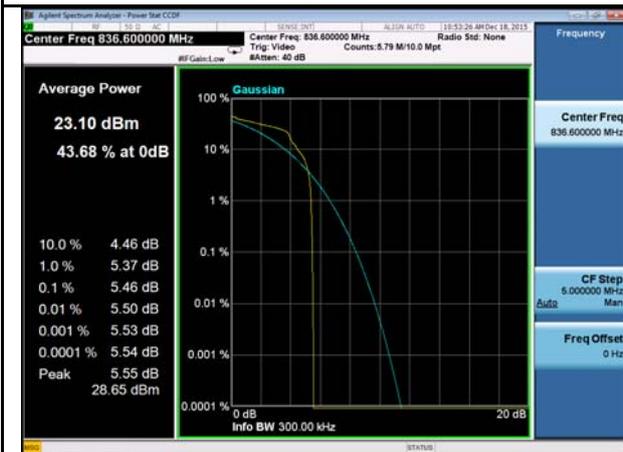


EDGE-251

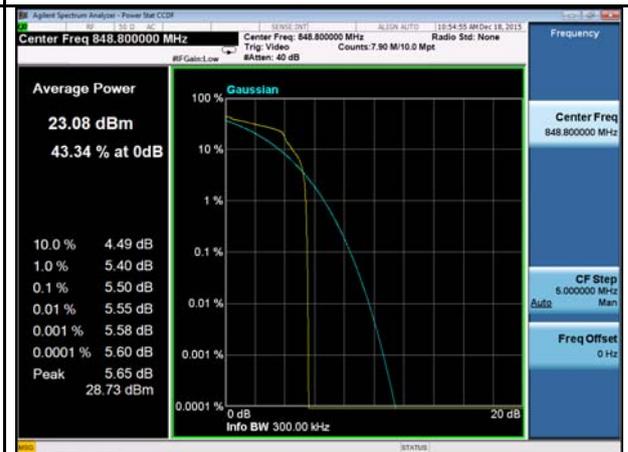


WCDMA Band V Spectrum Plot


4132

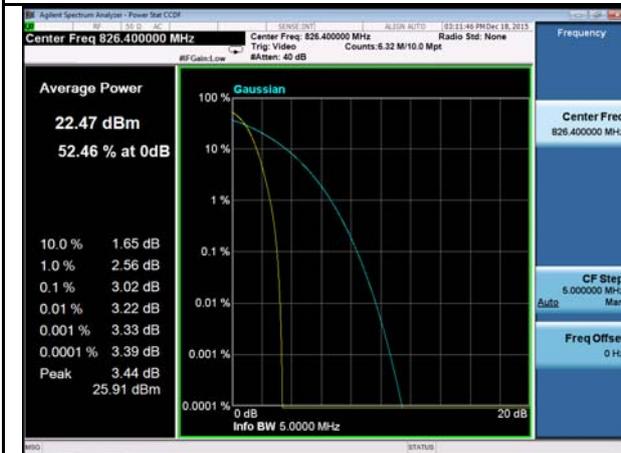


4182

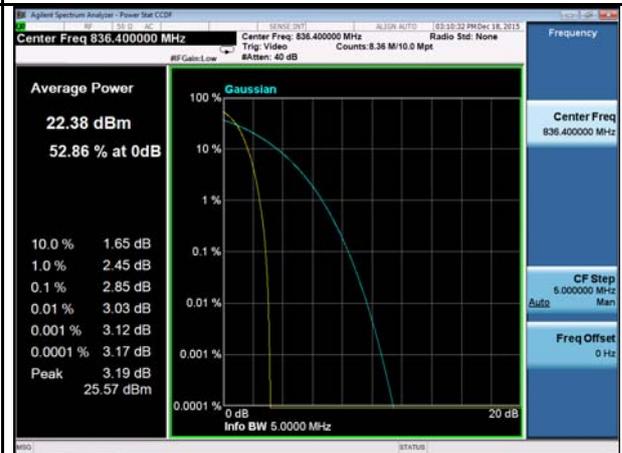

4233

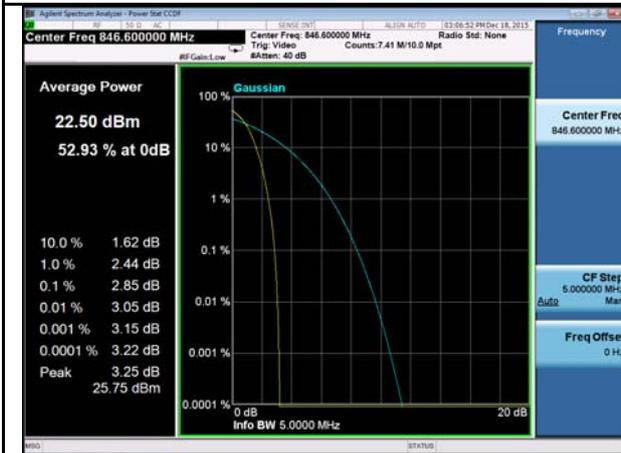

-



ATTACHMENT G - FREQUENCY STABILITY

Test Mode:	GSM850_CH190
------------	--------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	1.37	0.001662218	2.5
-20	2.56	0.003106042	2.5
-10	3.62	0.004392138	2.5
0	6.89	0.008359621	2.5
10	5.93	0.007194856	2.5
20	3.48	0.004222276	2.5
30	4.55	0.005520505	2.5
40	5.09	0.006175686	2.5
50	4.21	0.005107983	2.5
Max. Deviation (ppm)	6.89	0.008359621	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.8	2.73	0.003312303	2.5
3.5	3.59	0.004355739	2.5
4.2	0.56	0.000679447	2.5
Max. Deviation (ppm)	3.59	0.004355739	2.5

Test Mode:	WCDMA Band V_CH4182
------------	---------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	3.23	0.003861789	2.5
-20	4.26	0.005093257	2.5
-10	5.11	0.006109517	2.5
0	6.73	0.008046389	2.5
10	3.59	0.004292205	2.5
20	5.26	0.006288857	2.5
30	1.34	0.001602104	2.5
40	7.66	0.009158297	2.5
50	5.13	0.006133429	2.5
Max. Deviation (ppm)	7.66	0.009158297	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.8	2.76	0.003299857	2.5
3.5	4.09	0.004890005	2.5
4.2	5.99	0.007161645	2.5
Max. Deviation (ppm)	5.99	0.007161645	2.5