



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB571FU
FCC ID : O57TB571FU
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S) : Feb. 20, 2025 ~ Mar. 06, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

 1.1 Applicant.....5

 1.2 Manufacturer5

 1.3 Product Feature of Equipment Under Test5

 1.4 Modification of EUT5

 1.5 Test Location6

 1.6 Test Software6

 1.7 Applied Standards6

2 Test Configuration of Equipment Under Test7

 2.1 Test Mode7

 2.2 Connection Diagram of Test System7

 2.3 Support Unit used in test configuration and system8

3 Test Result9

 3.1 20dB and 99% Occupied Bandwidth Measurement9

 3.2 Radiated Emission Measurement11

 3.3 AC Conducted Emission Measurement20

 3.4 Antenna Requirements.....24

4 List of Measuring Equipment.....25

5 Measurement Uncertainty26

Appendix A. Setup Photographs



History of this test report

Report No.	Version	Description	Issued Date
FR4D1631E	01	Initial issue of report	Mar. 13, 2025



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 8.03 dB at 39.46 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 3.63 dB at 13.057 MHz
3.4	15.203	Antenna Requirements	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB571FU
FCC ID	O57TB571FU
HW Version	TB571FU
SW Version	Lenovo ZUI 17.0
SN Code	Conduction: HA24V60L Radiation/ Conducted: HA24V83L
WPT Frequency Range	111 ~ 145kHz
WPT Type of Modulation	ASK
WPT Antenna Type	Coil Antenna
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The device supports two WPT antennas, one at the top and one at the bottom. The two WPT antennas can transmit simultaneously and operate at the same frequency, so the test is performed in a simultaneous working state

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).
- b. AC power line Conducted Emission was tested under maximum output power.


Test Items	Function Type
AC Conducted Emission	Mode 1 : WPT Charging the Stylus(Top)
	Mode 2 : WPT Charging the Stylus(Bottom)
Radiated Emission	Mode 1 : WPT Charging the Stylus(TOP + Bottom)
Remark:	
1. The worst case of conducted emission is mode 2; only the test data of it was reported.	
2. The tests were performed with Adapter and USB Cable.	

2.2 Connection Diagram of Test System

AC Conducted Emission:

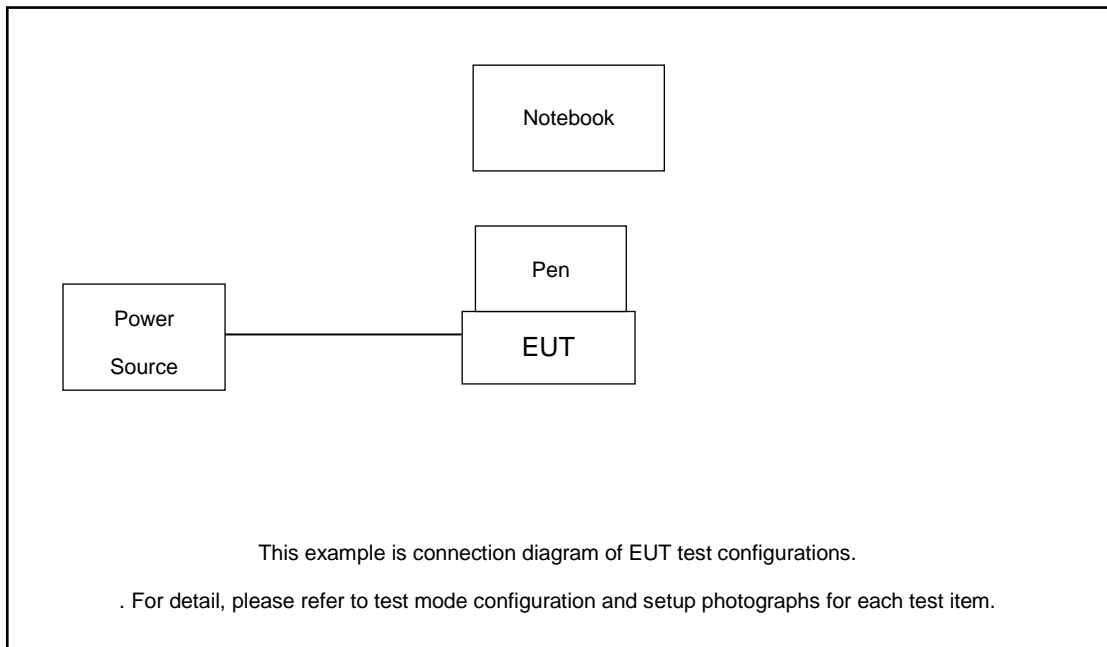

Radiated Emission:

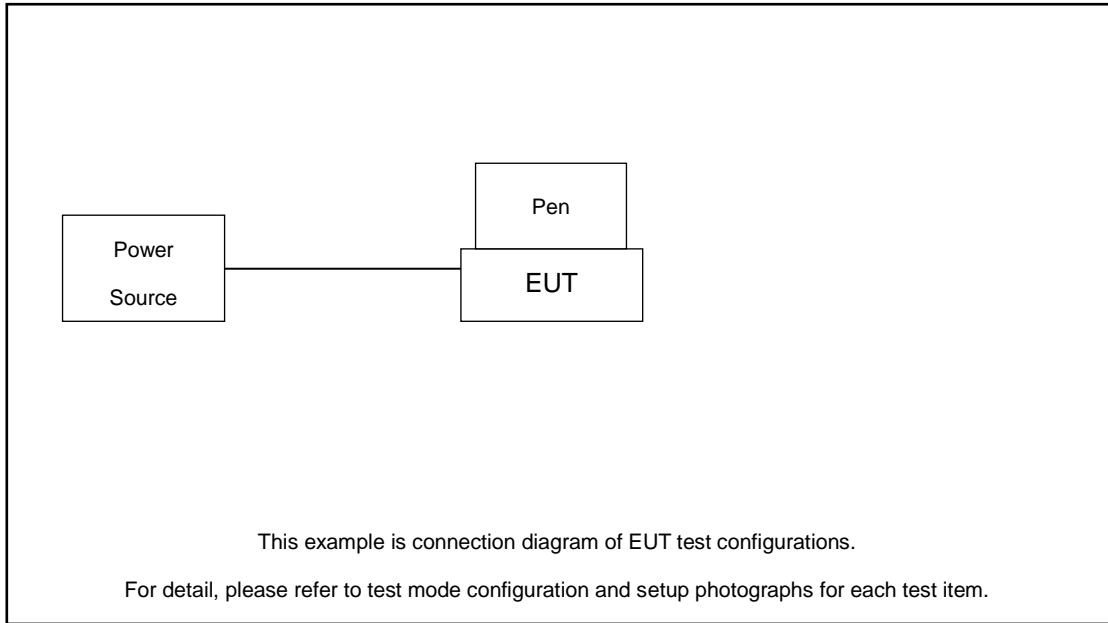

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only, 99% OBW shall not located within 15.205 restricted bands.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
3. Measure and record the results in the test report.

3.1.4 Test Setup

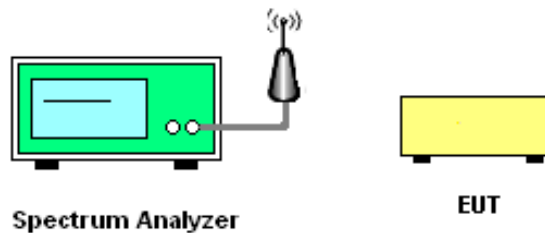




3.1.5 Test Result of 20dB and 99% Bandwidth

Test Engineer :	Smile	Temperature :	22~24°C
		Relative Humidity :	53~55%


Occupied Bandwidth (kHz)	Frequency (kHz)
20dB Bandwidth(KHz)	0.747
99% Bandwidth(KHz)	0.630

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

20 dB Bandwidth Plot

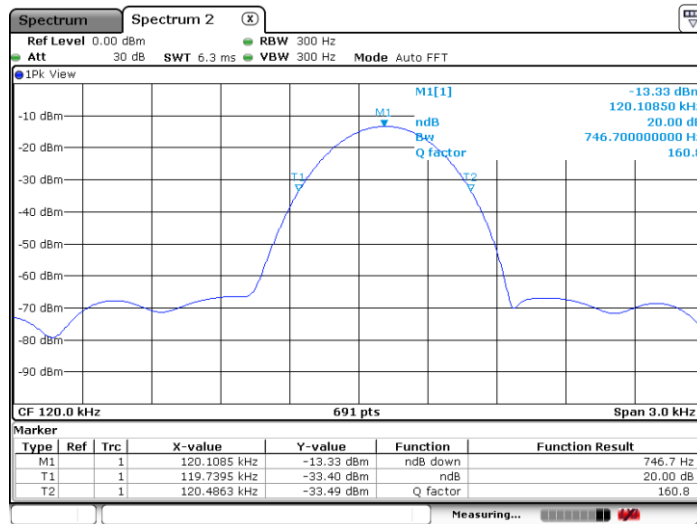

99% Occupied Bandwidth Plot

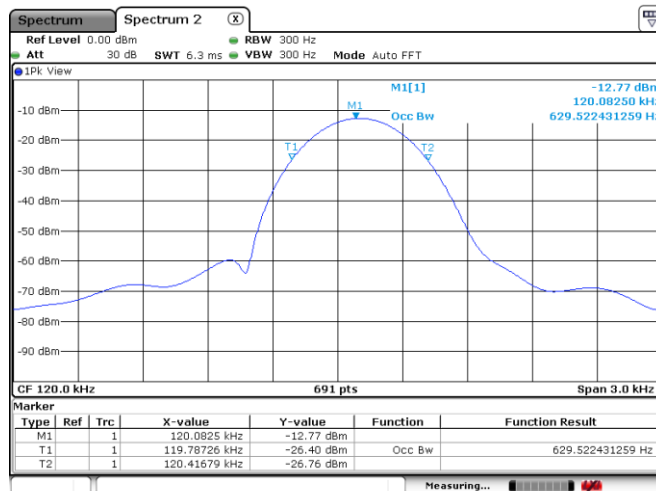



3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. specific line (dBµV/m) = 20 log Emission level (µV/m)
4. Limit line = specific limits (dBµV/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.2.4 Test Setup of Radiated Emission


For radiated emissions below 30MHz

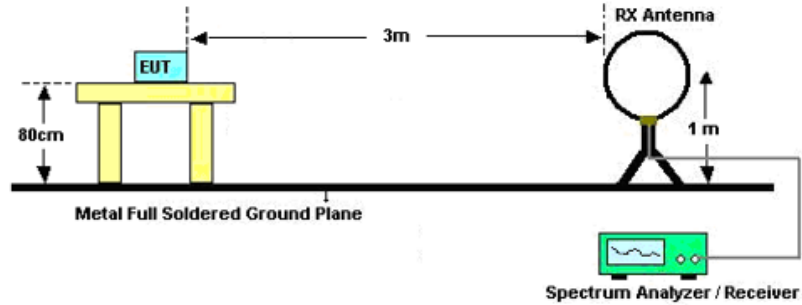

Note:

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.

For radiated emissions above 30MHz

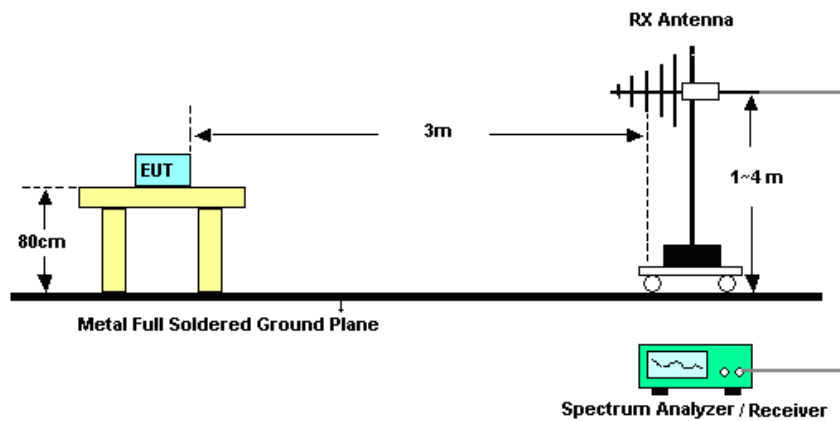



3.2.5 Test Result of Fundamental Emission

Frequency (MHz)	Level (dBuV/m) @3m	Distance Factor (dB)	Corrected level @300m (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.12025	80.63	80	0.63	26	-25.37	60.92	19.69	0.02	AV	Perpendicular
0.12035	77.55	80	-2.45	25.99	-28.44	57.84	19.69	0.02	AV	Parallel

Note: The field strength is tested at 3m distance then convert to 300m by adding distance factor $40 \cdot \log(d1/d2)$


Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

Site : 03CH02-KS
Condition : 3m HFH2-Z2E-101125, HORIZONTAL

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 a	0.1203	80.63	-----	-----	60.92	19.69	0.02	---	---	Average



Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

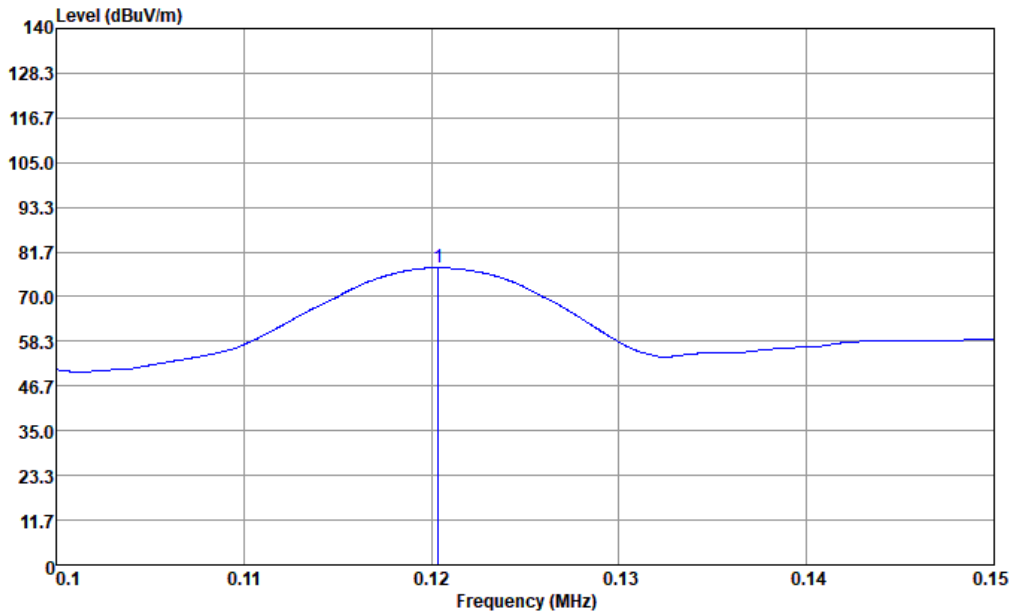

Site : 03CH02-KS
 Condition : 3m HFH2-Z2E-101125, VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 a	0.1204	77.55	-----	-----	57.84	19.69	0.02	---	---	Average



3.2.6 Test Result of Radiated Emission (9kHz ~ 30MHz)


Frequency (MHz)	Level 3m (dBuV/m)	Distance Factor (dB)	Corrected Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.03	54.16	80	-25.84	38.09	-63.93	34.34	19.8	0.02	Average	Horizontal
0.10	58.93	40	18.93	28.04	-9.11	39.21	19.7	0.02	QP	Horizontal
0.36	62.02	80	-17.98	16.45	-34.43	42.42	19.57	0.03	Average	Horizontal
7.78	30.5	40	-9.5	29.5	-39	10.79	19.48	0.23	QP	Horizontal
24.46	32.42	40	-7.58	29.5	-37.08	11.77	20.02	0.63	QP	Horizontal
26.31	34.86	40	-5.14	29.5	-34.64	14.07	20.12	0.67	QP	Horizontal
0.03	46.6	80	-33.4	38.09	-71.49	26.78	19.8	0.02	Average	Vertical
0.10	55.45	40	15.45	27.95	-12.5	35.73	19.7	0.02	QP	Vertical
0.36	57.11	80	-22.89	16.45	-39.34	37.51	19.57	0.03	Average	Vertical
7.20	30.88	40	-9.12	29.5	-38.62	11.25	19.42	0.21	QP	Vertical
24.37	40.59	40	0.59	29.5	-28.91	19.94	20.02	0.63	QP	Vertical
25.93	42.79	40	2.79	29.5	-26.71	22.03	20.1	0.66	QP	Vertical

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. Corrected Level = Level @3m (dBuV/m) - distance extrapolation factor.



Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Perpendicular	Relative Humidity :	45~46%

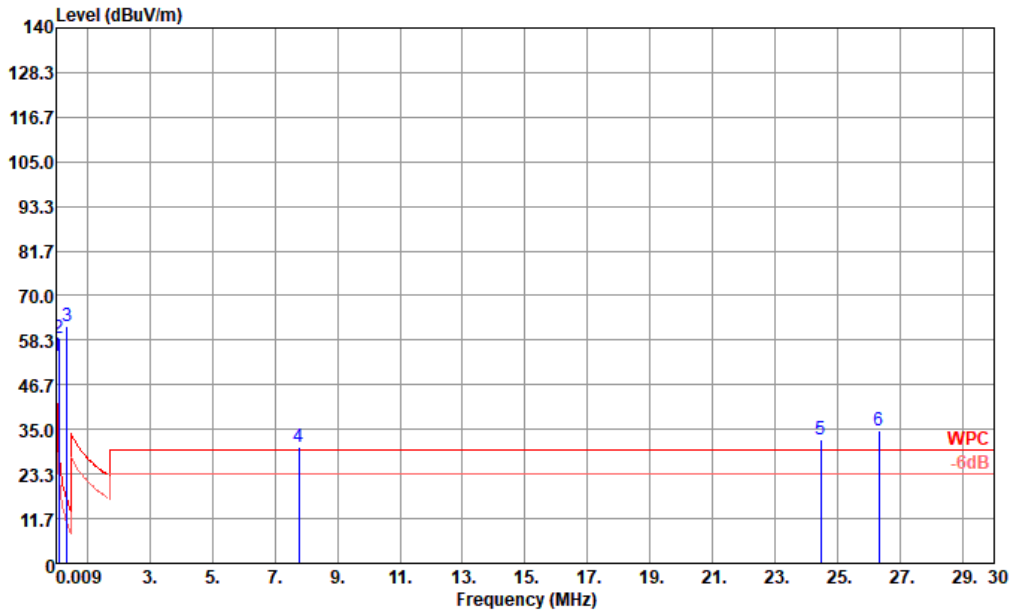


Site : 03CH02-KS
 Condition : WPC 3m HFH2-Z2E-101125, HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 *	0.0299	54.16	16.07	38.09	34.34	19.80	0.02	---	---	Average
2 q	0.0950	58.93	30.89	28.04	39.21	19.70	0.02	---	---	QP
3 a	0.3609	62.02	45.57	16.45	42.42	19.57	0.03	---	---	Average
4 *	7.7780	30.50	1.00	29.50	10.79	19.48	0.23	---	---	QP
5 *	24.4560	32.42	2.92	29.50	11.77	20.02	0.63	---	---	QP
6 *	26.3050	34.86	5.36	29.50	14.07	20.12	0.67	---	---	QP



Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Parallel	Relative Humidity :	45~46%

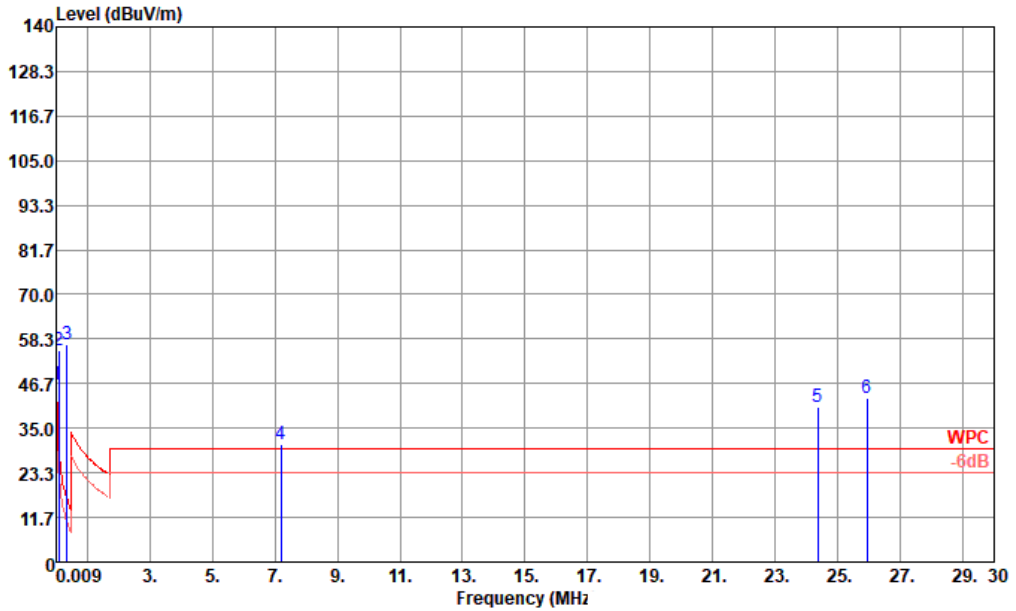


Site : 03CH02-KS
 Condition : WPC 3m HFH2-Z2E-101125, VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1 *	0.0299	46.60	8.51	38.09	26.78	19.80	0.02	---	Average
2 q	0.0960	55.45	27.50	27.95	35.73	19.70	0.02	---	QP
3 a	0.3609	57.11	40.66	16.45	37.51	19.57	0.03	---	Average
4 *	7.2020	30.88	1.38	29.50	11.25	19.42	0.21	---	QP
5 *	24.3710	40.59	11.09	29.50	19.94	20.02	0.63	---	QP
6 *	25.9300	42.79	13.29	29.50	22.03	20.10	0.66	---	QP



3.2.7 Test Result of Radiated Emission (30MHz ~ 1000MHz)

Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

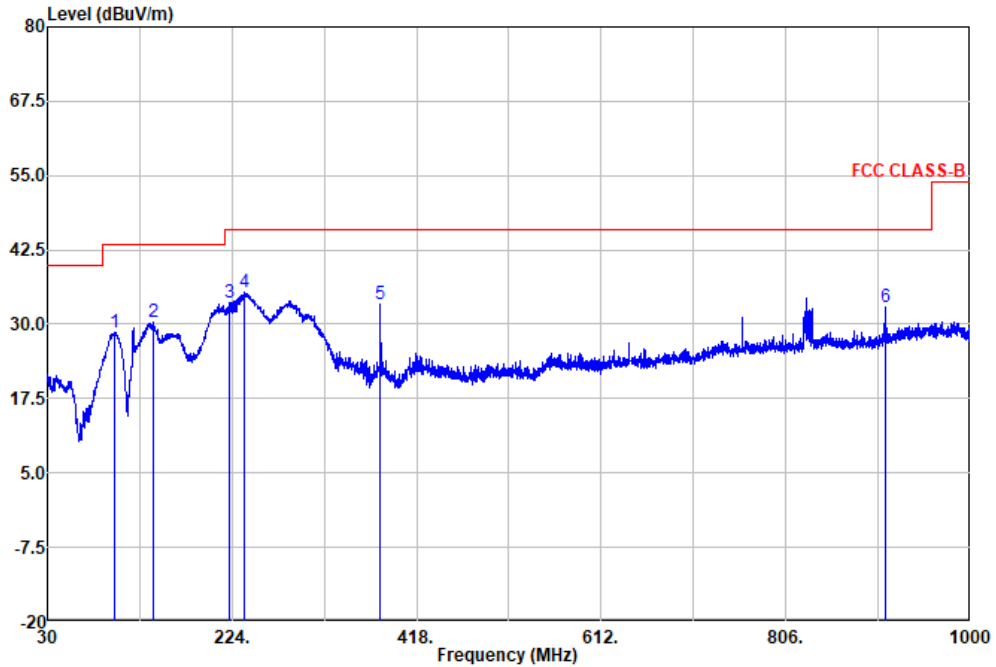


Site : 03CH02-KS
 Condition: FCC CLASS-B 3m CBL6111D SN 59915 Horizontal

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	100.57	28.67	43.50	-14.83	44.25	16.02	1.05	32.65	--	--	Peak
2	140.58	30.41	43.50	-13.09	44.56	17.38	1.17	32.70	--	--	Peak
3	221.58	33.52	46.00	-12.48	49.38	15.38	1.57	32.81	--	--	Peak
4	237.58	35.32	46.00	-10.68	49.53	17.02	1.63	32.86	--	--	Peak
5	379.93	33.43	46.00	-12.57	43.28	21.06	2.05	32.96	--	--	Peak
6	910.03	32.97	46.00	-13.03	32.75	29.30	3.13	32.21	--	--	Peak



Test Engineer :	Fang	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

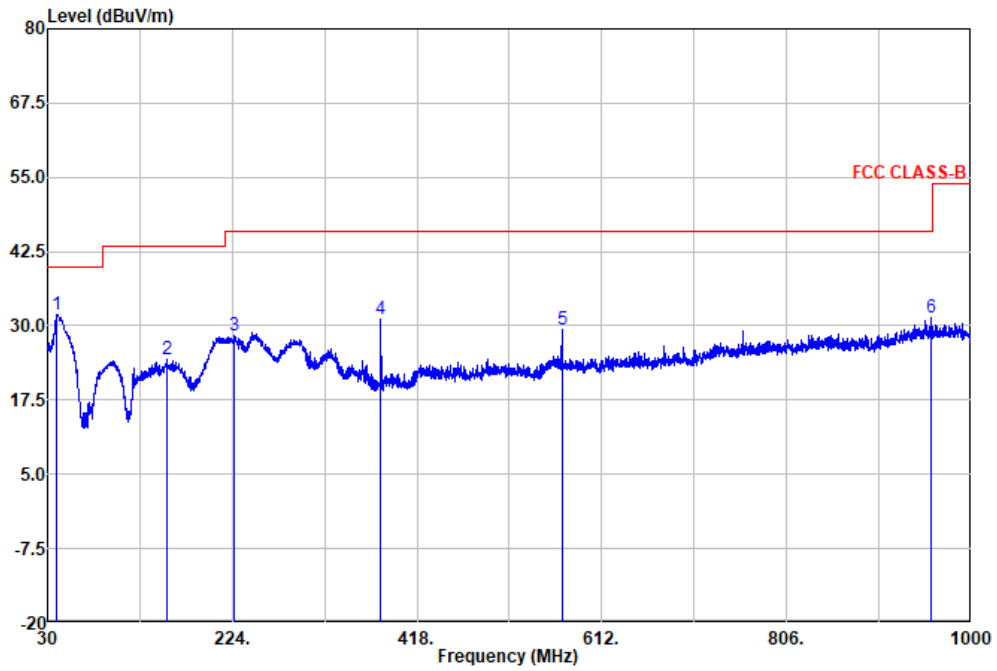

Site : 03CH02-KS
 Condition: FCC CLASS-B 3m CBL6111D SN 59915 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	39.46	31.97	40.00	-8.03	43.99	20.23	0.60	32.85	--	--	Peak
2	155.86	24.39	43.50	-19.11	38.99	16.85	1.27	32.72	--	--	Peak
3	225.46	28.28	46.00	-17.72	43.82	15.72	1.57	32.83	--	--	Peak
4	379.93	31.19	46.00	-14.81	41.04	21.06	2.05	32.96	--	--	Peak
5	570.05	29.28	46.00	-16.72	33.73	26.30	2.51	33.26	--	--	Peak
6	957.56	31.35	46.00	-14.65	29.04	30.65	3.25	31.59	--	--	Peak



3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

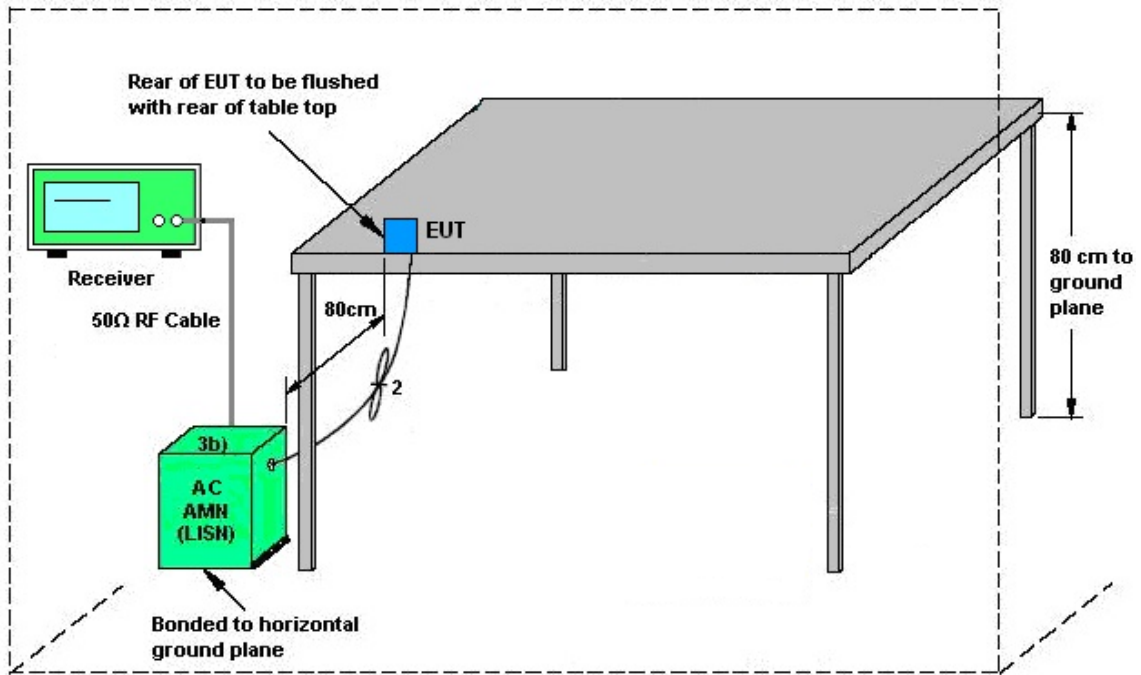


AMN = Artificial mains network (LISN)
 AE = Associated equipment
 EUT = Equipment under test
 ISN = Impedance stabilization network



3.3.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

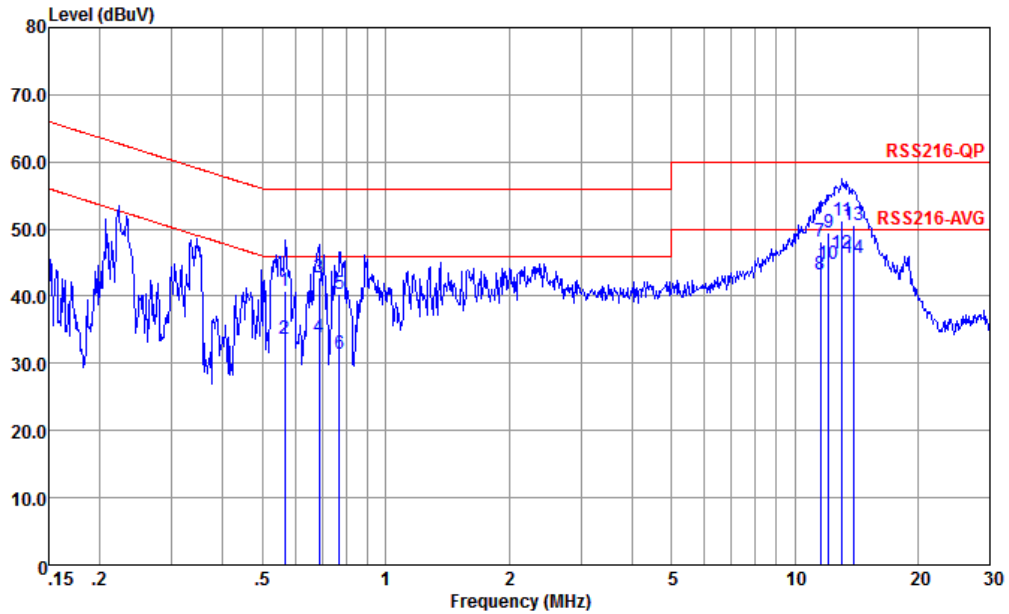


Site : CO01-KS
 Condition : RSS216-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.567	40.86	-15.14	56.00	30.61	-0.13	10.38	QP
2	0.567	33.56	-12.44	46.00	23.31	-0.13	10.38	Average
3	0.686	42.70	-13.30	56.00	32.51	-0.15	10.34	QP
4	0.686	33.80	-12.20	46.00	23.61	-0.15	10.34	Average
5	0.771	40.36	-15.64	56.00	30.20	-0.16	10.32	QP
6	0.771	31.36	-14.64	46.00	21.20	-0.16	10.32	Average
7	11.559	48.13	-11.87	60.00	38.10	-0.22	10.25	QP
8	11.559	43.23	-6.77	50.00	33.20	-0.22	10.25	Average
9	12.124	49.55	-10.45	60.00	39.50	-0.21	10.26	QP
10	12.124	44.85	-5.15	50.00	34.80	-0.21	10.26	Average
11	13.057	51.27	-8.73	60.00	41.20	-0.20	10.27	QP
12 *	13.057	46.37	-3.63	50.00	36.30	-0.20	10.27	Average
13	13.915	50.58	-9.42	60.00	40.50	-0.19	10.27	QP
14	13.915	45.68	-4.32	50.00	35.60	-0.19	10.27	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

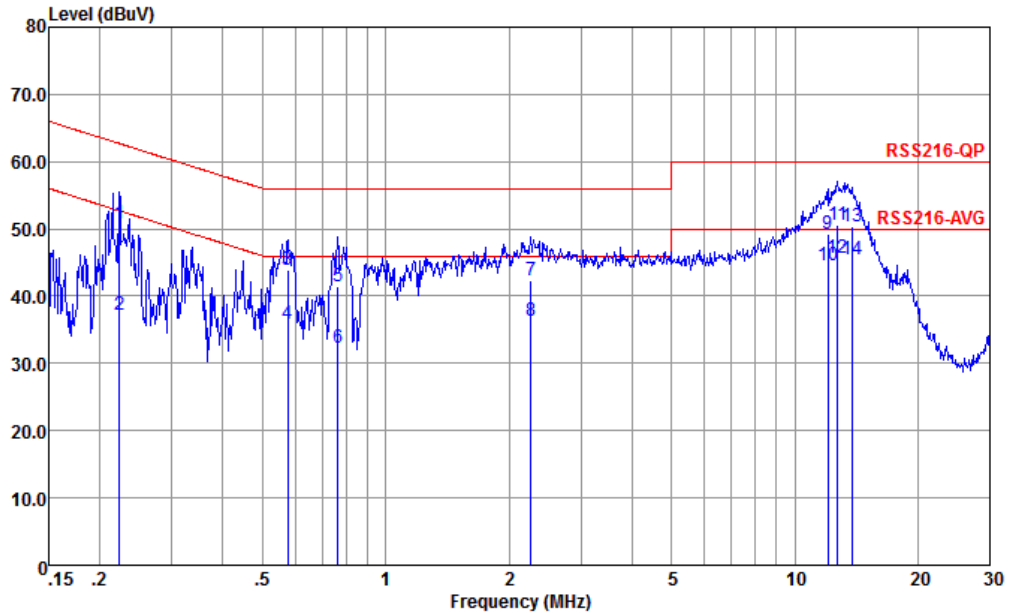

Site : CO01-KS
 Condition : RSS216-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.223	50.72	-11.98	62.70	40.20	0.06	10.46	QP
2	0.223	37.12	-15.58	52.70	26.60	0.06	10.46	Average
3	0.576	43.82	-12.18	56.00	33.60	-0.16	10.38	QP
4	0.576	35.82	-10.18	46.00	25.60	-0.16	10.38	Average
5	0.763	41.35	-14.65	56.00	31.20	-0.17	10.32	QP
6	0.763	32.35	-13.65	46.00	22.20	-0.17	10.32	Average
7	2.261	42.24	-13.76	56.00	32.21	-0.20	10.23	QP
8	2.261	36.34	-9.66	46.00	26.31	-0.20	10.23	Average
9	12.060	49.33	-10.67	60.00	39.30	-0.23	10.26	QP
10	12.060	44.53	-5.47	50.00	34.50	-0.23	10.26	Average
11	12.716	50.54	-9.46	60.00	40.49	-0.22	10.27	QP
12 *	12.716	45.64	-4.36	50.00	35.59	-0.22	10.27	Average
13	13.768	50.27	-9.73	60.00	40.20	-0.20	10.27	QP
14	13.768	45.37	-4.63	50.00	35.30	-0.20	10.27	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Feb. 28, 2025	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 28, 2025	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Feb. 28, 2025	Aug. 17, 2025	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 02, 2025	Feb. 28, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Feb. 28, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Feb. 28, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Feb. 28, 2025	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 18, 2024	Mar. 06, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Mar. 06, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Mar. 06, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Mar. 06, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 20, 2025	Oct. 09, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Occupied Channel Bandwidth	±0.1%
----------------------------	-------

Uncertainty of AC Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------

----- THE END -----