

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509
Rev.: 01
Page: 1 of 23

TEST REPORT

Application No.: SUCR2506000525IT
Applicant: Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address of Applicant: Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone
Manufacturer: Lenovo PC HK Limited
Address of Manufacturer: 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China
EUT Description: Portable Tablet Computer
Model No.: TB710FU
Trade Mark: Lenovo
FCC ID: O57TB710FU
Standards: FCC 47 CFR Part 15
Date of Receipt: June 5, 2025
Date of Test: June 25, 2025 to July 7, 2025
Date of Issue: July 22, 2025

| | |
|----------------------|---------------|
| Test Result : | PASS * |
|----------------------|---------------|

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 2 of 23

Version

| <i>Revision Record</i> | | | |
|------------------------|--------------------|---------------|---------------|
| <i>Version</i> | <i>Description</i> | <i>Date</i> | <i>Remark</i> |
| 01 | Original | July 22, 2025 | / |
| | | | |
| | | | |

| | | | |
|--------------------------|---|--|--|
| Authorized for issue by: | | | |
| Tested By |  | | |
| | _____ Hayley Zhang / Project Manager | | |
| Approved By |  | | |
| | _____ Cloud Peng/Technical Manager | | |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 3 of 23

Contents

| | |
|---|-----------|
| Version | 2 |
| 1 Test Summary | 4 |
| 2 General Information | 5 |
| 2.1 Details of Client | 5 |
| 2.2 Test Location | 5 |
| 2.3 Test Facility | 5 |
| 2.4 General Description of EUT | 6 |
| 2.5 Test Environment | 6 |
| 2.6 Description of Support Units..... | 6 |
| 3 Equipment List | 7 |
| 4 Measurement Uncertainty (95% confidence levels, k=2) | 9 |
| 5 Test results and Measurement Data | 10 |
| 5.1 AC Power Line Conducted Emissions..... | 10 |
| 5.2 20dB Spectrum Bandwidth & 99% Occupied Bandwidth | 13 |
| 5.3 Field Strength of Fundamental Emissions..... | 14 |
| 5.4 Radiated Emissions..... | 16 |
| 6 Photographs - Setup Photos | 18 |
| 7 Appendix | 19 |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 4 of 23

1 Test Summary

| Radio Spectrum Matter Part | | | | |
|--|---------------------------|----------------------------------|---|--------|
| Item | Standard | Method | Requirement | Result |
| AC Power Line Conducted Emission | 47 CFR Part 15, Subpart C | ANSI C63.10 (2013) Section 6.2 | 47 CFR Part 15, Subpart C 15.207 | Pass |
| 20dB Spectrum Bandwidth & 99% Occupied Bandwidth | | ANSI C63.10 (2013) Section 6.9.2 | 47 CFR Part 15, Subpart C 15.215 | Pass |
| Field Strength of Fundamental Emissions | | ANSI C63.10 (2013) Section 6.4.7 | 47 CFR Part 15, Subpart C 15.225 | Pass |
| Radiated Emissions (9kHz-30MHz) | | ANSI C63.10 (2013) Section 6.4 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |
| Radiated Emissions (30MHz-1GHz) | | ANSI C63.10 (2013) Section 6.5 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 5 of 23

2 General Information

2.1 Details of Client

| | |
|--------------------------|---|
| Applicant: | Lenovo (Shanghai) Electronics Technology Co., Ltd. |
| Address of Applicant: | Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone |
| Manufacturer: | Lenovo PC HK Limited |
| Address of Manufacturer: | 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China |

2.2 Test Location

| | |
|----------------|--|
| Company: | SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. |
| Address: | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone |
| Post code: | 215000 |
| Test engineer: | Ives Cheng, King-p Li |

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 6 of 23

2.4 General Description of EUT

| | |
|----------------------|---|
| Hardware Version: | TB710FU |
| Software Version: | Lenovo ZUI 17.0 |
| Power Supply: | 3.86V from battery |
| Operation Frequency: | 111KHz to145KHz |
| Modulation Type: | ASK |
| Antenna Type: | Loop Antenna |
| Remark: | As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information. |

2.5 Test Environment

| Environment Parameter | 101 kPa Selected Values During Tests | |
|--|--------------------------------------|------------|
| Relative Humidity | 44-46 % RH Ambient | |
| Value | Temperature(°C) | Voltage(V) |
| NTNV | 22~23 | 3.86 |
| Remark: The extreme Voltage and extreme Temperature are refer to the test data of Frequency Stability. | | |

2.6 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-------------|--------------|-----------|------------|
| *Pen | Lenovo | AP600U | / |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 7 of 23

3 Equipment List

| RF Test Equipment | | | | | |
|-------------------------------------|---------------|----------------------------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Shielding Room | Brilliant-emc | N/A | SUWI-04-08-01 | 11/9/2022 | 11/8/2025 |
| Temperature and humidity meter | MingGao | TH101B | SUWI-01-01-07 | 2/13/2025 | 2/12/2026 |
| Measurement Software | Tonscend | TST272 V2.0 | SUWI-03-55-03 | NCR | NCR |
| Signal Analyzer | ROHDE&SCHWARZ | FSW43 | SUWI-01-02-04 | 1/20/2025 | 1/19/2026 |
| Temperature Chamber | ESPEC | SU-242 | SUWI-01-13-02 | 5/7/2025 | 5/6/2026 |
| Wideband Radio Communication Tester | ROHDE&SCHWARZ | CMW500 | SUWI-01-16-05 | 1/21/2025 | 1/20/2026 |
| DC Power Supply | HYELEC | HY3005B | SUWI-01-18-01 | 1/15/2025 | 1/14/2026 |
| Power meter | Anritsu | ML2495A | SUWI-01-31-01 | 11/19/2024 | 11/18/2025 |
| Pulse power sensor | Anritsu | MA2411B | SUWI-01-32-01 | 11/19/2024 | 11/18/2025 |
| MXG Vector signal genitor | KEYSIGHT | N5182B | SUWI-01-38-01 | 1/15/2025 | 1/14/2026 |
| Router | ASUS | GT-AXE11000(FCC ID MSQ-RTAXJF00) | SUWI-03-14-02 | NCR | NCR |
| Signal Analyzer | KEYSIGHT | N9020A | SUWI-01-02-07 | 11/19/2024 | 11/18/2025 |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 8 of 23

| CE Test System | | | | | |
|--------------------------------|---------------|-----------------|---------------|-----------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Test receiver | ROHDE&SCHWARZ | ESR7 | SUWI-01-10-01 | 1/15/2025 | 1/14/2026 |
| Temperature and humidity meter | MingGao | TH101B | SUWI-01-01-06 | 2/13/2025 | 2/12/2026 |
| Artificial network | ROHDE&SCHWARZ | ENV216 | SUWI-01-19-03 | 5/8/2025 | 5/7/2026 |
| Artificial network | ROHDE&SCHWARZ | ENV216 | SUWI-01-19-04 | 5/8/2025 | 5/7/2026 |
| Measurement Software | Tonscend | JS32-CE 4.0.0.2 | SUWI-02-09-05 | NCR | NCR |

| RSE Test Equipment | | | | | |
|--------------------------------|----------------------------|------------------|---------------|------------|--------------|
| Equipment | Manufacturer | Model No. | Inventory No. | Cal Date | Cal Due Date |
| Semi-Anechoic Chamber | Brilliant-emc | N/A | SUWI-04-02-01 | 6/3/2023 | 6/2/2026 |
| Temperature and humidity meter | MingGao | TH101B | SUWI-01-01-05 | 2/13/2025 | 2/12/2026 |
| Signal Analyzer | ROHDE&SCHWARZ | FSW43 | SUWI-01-02-04 | 1/20/2025 | 1/19/2026 |
| Signal Analyzer | KEYSIGHT | N9020A | SUWI-01-02-07 | 11/21/2024 | 11/20/2025 |
| Test receiver | ROHDE&SCHWARZ | ESR7 | SUWI-01-10-01 | 1/15/2025 | 1/14/2026 |
| Receiving antenna | SCHWRZBECK MESS-ELEKTRONIK | VULB 9163 | SUWI-01-11-01 | 5/7/2025 | 5/6/2027 |
| Receiving antenna | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9120D | SUWI-01-11-02 | 5/7/2025 | 5/6/2027 |
| Receiving antenna | SCHWRZBECK MESS-ELEKTRONIK | BBHA 9170 | SUWI-01-11-03 | 5/7/2025 | 5/6/2027 |
| Active Loop Antenna | SCHWRZBECK MESS-ELEKTRONIK | FMZB 1519B | SUWI-01-21-01 | 5/7/2025 | 5/6/2027 |
| Amplifier | Tonscend | TAP9K3G32 | SUWI-01-14-06 | 11/19/2024 | 11/24/2025 |
| Amplifier | Tonscend | TAP01018050 | SUWI-01-14-04 | 11/19/2024 | 11/24/2025 |
| Amplifier | Tonscend | TAP30M7G30 | SUWI-01-14-05 | 11/19/2024 | 11/24/2025 |
| Measurement Software | Tonscend | JS32-RE V4.0.0.0 | SUWI-02-09-04 | NCR | NCR |

Remark: NCR=No Calibration Requirement.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 9 of 23

4 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------|----------------------------|
| 1 | Occupied Bandwidth | 1% |
| 2 | Conduction Emission | ± 2.90dB (150kHz to 30MHz) |
| 3 | Radiated Emission | ± 3.13dB (9k -30MHz) |
| | | ± 4.80dB (30M -1GHz) |

Remark:
 The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results
 – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

5 Test results and Measurement Data


5.1 AC Power Line Conducted Emissions


| | | | |
|--|---|--------------|-----------|
| Test Requirement: | 47 CFR Part 15C Section 15.207 | | |
| Test Method: | ANSI C63.10: 2013 | | |
| Test Frequency Range: | 150kHz to 30MHz | | |
| Limit: | Frequency range(MHz) | Limit (dBuV) | |
| | | Quasi-peak | Average |
| | 0.15-0.5 | 66 to 56* | 56 to 46* |
| | 0.5-5 | 56 | 46 |
| | 5-30 | 60 | 50 |
| * Decreases with the logarithm of the frequency. | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. | | |
| Test Setup: | | | |
| Instruments Used: | Refer to section 3 for details. | | |
| Test Results: | Pass | | |

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

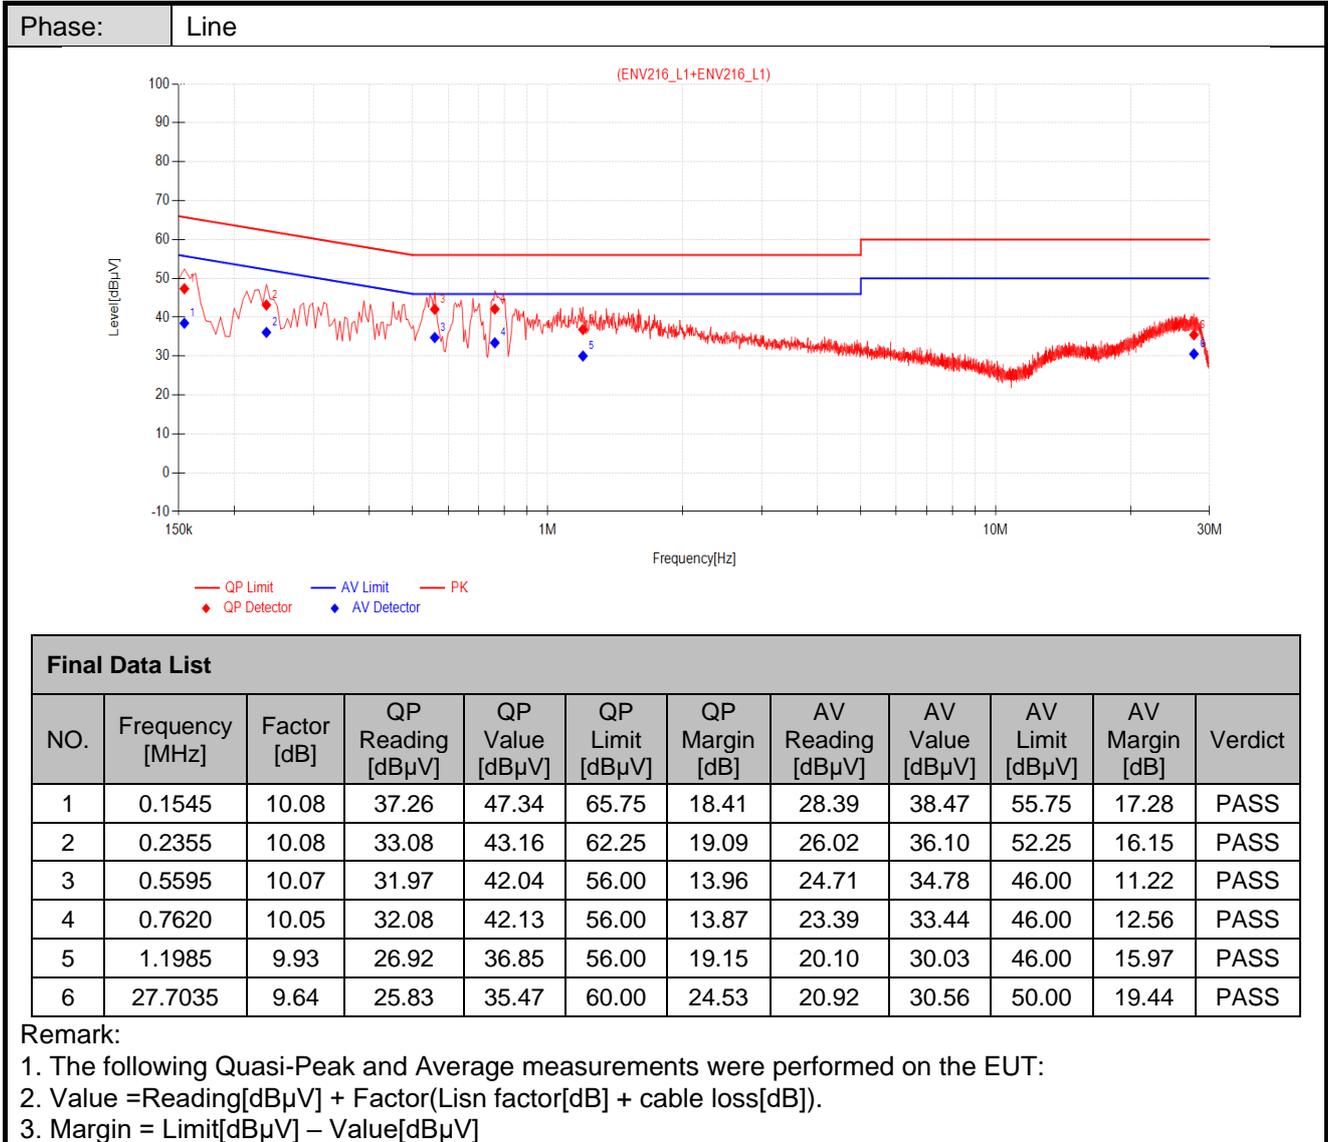

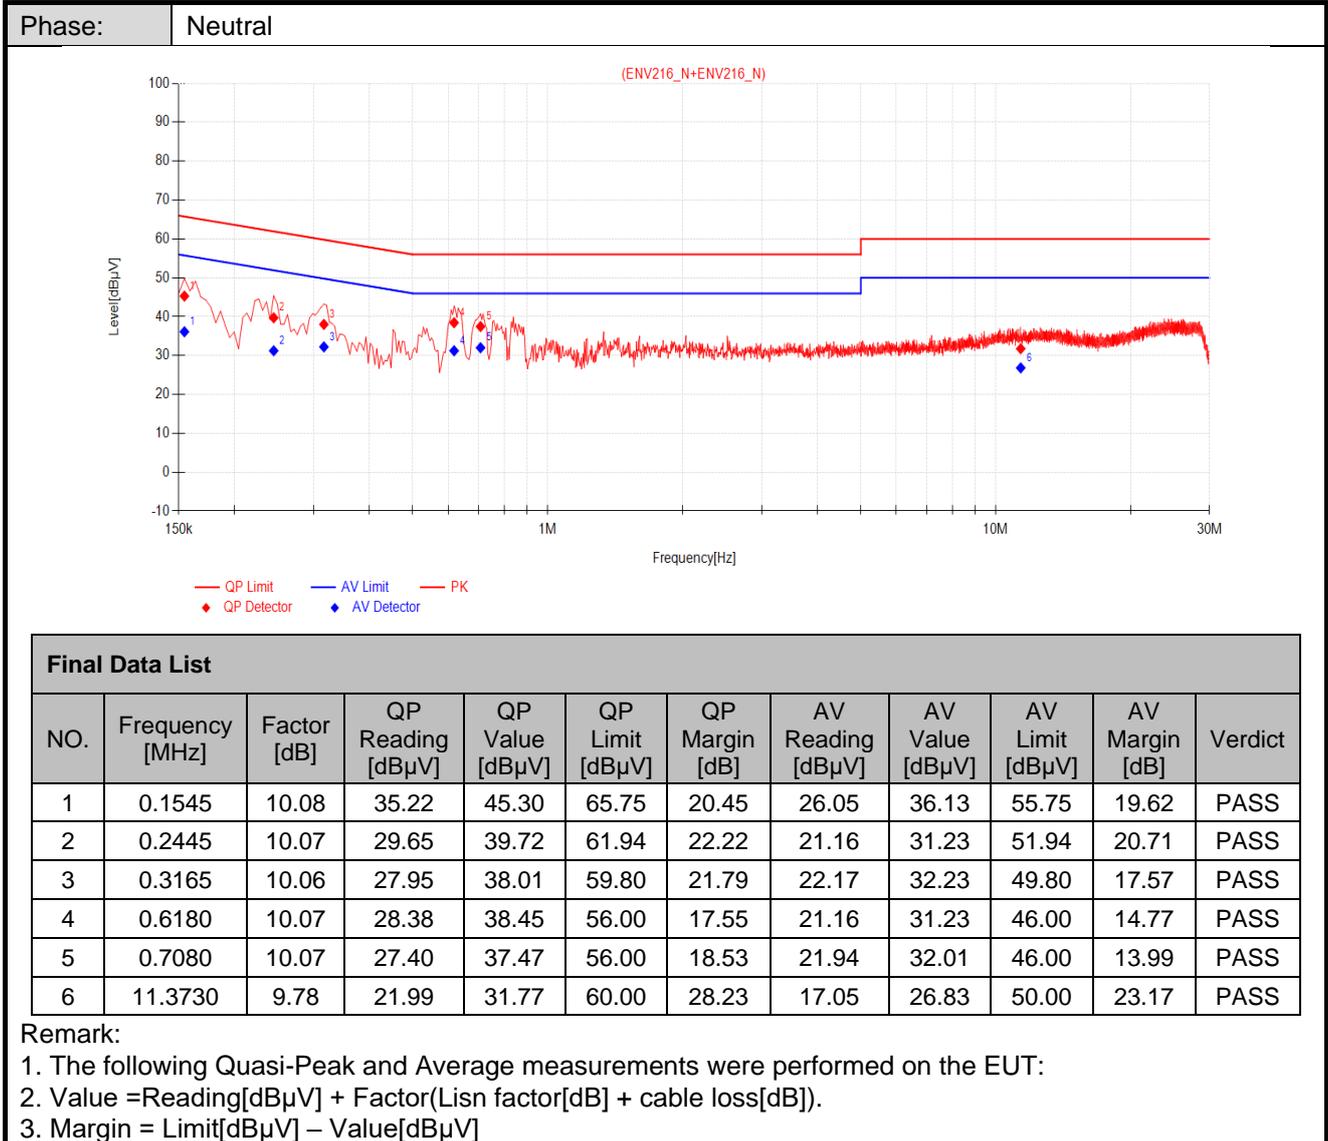

5.2 20dB Spectrum Bandwidth & 99% Occupied Bandwidth
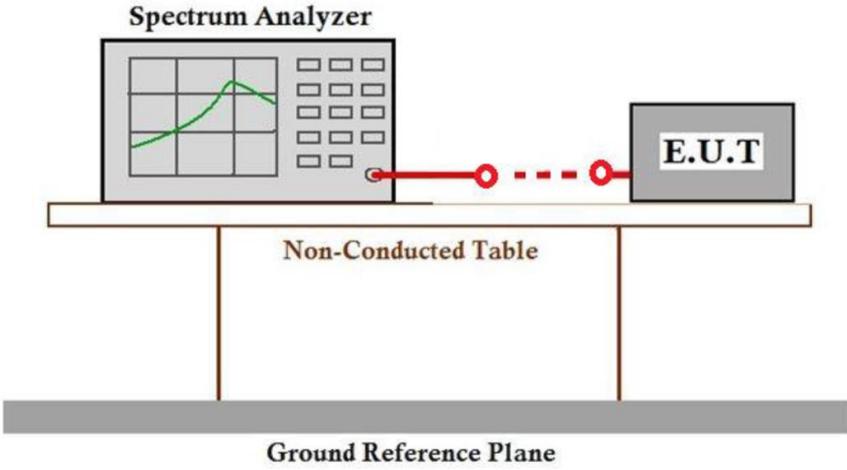
| | |
|---|---|
| Test Requirement: | 47 CFR Part 15, Subpart C 15.215 |
| Test Method: | ANSI C63.10 (2013) Section 6.9.2(20dB); 6.10.5(99%OB) |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Instruments Used: | Refer to section 3 for details |
| Limit: | For report reference only |
| Test Results: | Pass |
| The detailed test data see: Appendix | |

5.3 Field Strength of Fundamental Emissions

| | | | | | |
|-------------------|--|------------------------------------|--------------------------------------|--------------------------------------|-------------------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.225 | | | | |
| Test Method: | ANSI C63.10 :2013 Section 6.4 | | | | |
| Test Site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | |
| Limit: | Frequency | Field Strength (μ V/m) at 30m | Field Strength (dB μ V/m) at 30m | Field Strength (dB μ V/m) at 10m | Field Strength (dB μ V/m) at 3m |
| | 1.705~13.110 MHz | 30 | 29.5 | 48.58 | 69.5 |
| | 13.110-13.410 MHz | 106 | 40.5 | 59.58 | 80.5 |
| | 13.410-13.553 MHz | 334 | 50.5 | 69.58 | 90.5 |
| | 13.553-13.567 MHz | 15,848 | 84.0 | 103.08 | 124.0 |
| | 13.567-13.710 MHz | 334 | 50.5 | 69.58 | 90.5 |
| | 13.710-14.010 MHz | 106 | 40.5 | 59.58 | 80.5 |
| | 14.010~30.000 MHz | 30 | 29.5 | 48.58 | 69.5 |

Test Setup:

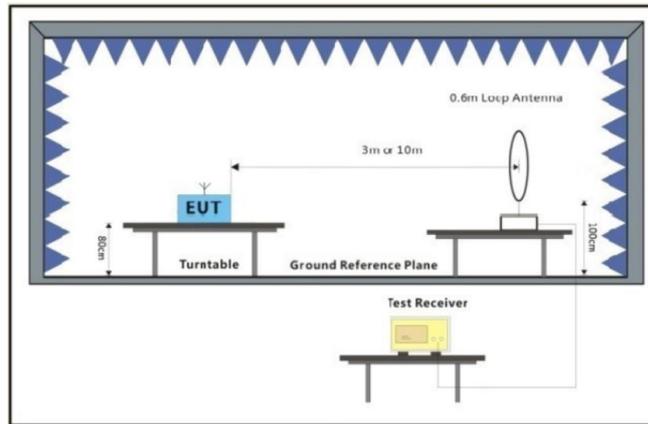


Figure 1. Below 30MHz

| | |
|------------------|--|
| Test Procedure: | <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. RBW set to 9kHz. |
| Exploratory Test | Transmitting with modulation. |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 15 of 23

| | |
|---|---|
| Mode: | Charge + Transmitting mode. |
| Final Test Mode: | Transmitting with modulation. Pretest the EUT at Charge + Transmitting mode. Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 3 for details |
| Test Results: | Pass |
| The detailed test data see: Appendix | |

5.4 Radiated Emissions

| | | | |
|--|---|----------------------------------|--------------------------|
| Test Requirement: | 47 CFR Part 15, Subpart C 15.205 & 15.209 | | |
| Test Method: | ANSI C63.10 (2013) Section 6.4 & 6.5 | | |
| Test Site: | Measurement Distance: 3m | | |
| Limit: | Frequency(MHz) | Field strength (microvolt/meter) | Measurement distance (m) |
| | 0.009-0.490 | 2400/F(kHz) | 300 |
| | 0.490-1.705 | 24000/F(kHz) | 30 |
| | 1.705-30.0 | 30 | 30 |
| | 30-88 | 100 | 3 |
| | 88-216 | 150 | 3 |
| | 216-960 | 200 | 3 |
| | Above 960 | 500 | 3 |
| Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. | | | |

Test Setup:

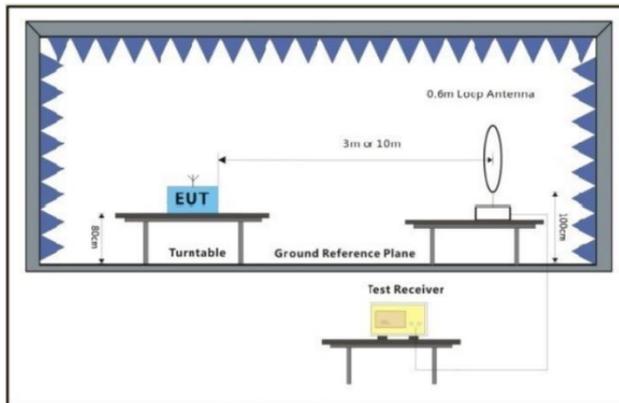


Figure 1. Below 30MHz

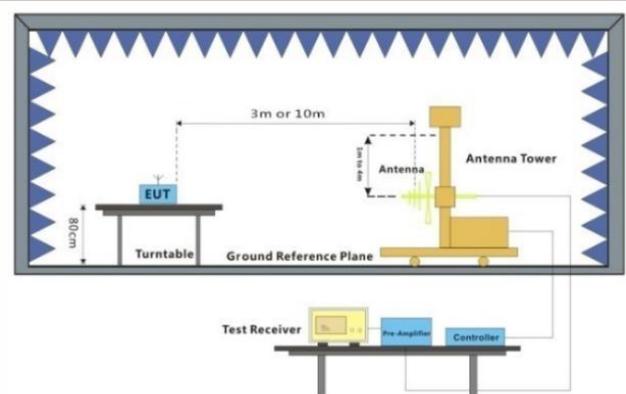


Figure 2. Above 30MHz

Test Procedure:

- i. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- j. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- k. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- l. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- m. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- n. If the emission level of the EUT in peak mode was 10dB lower than the limit



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509

Rev.: 01

Page: 17 of 23

| | |
|---|--|
| | <p>specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <ul style="list-style-type: none">o. Test the EUT in the lowest channel,the middle channel,the Highest channelp. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.q. Repeat above procedures until all frequencies measured was complete. <p>Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor</p> |
| Exploratory Test Mode: | Transmitting with modulation. Charge + Transmitting mode. |
| Final Test Mode: | Transmitting with modulation. Pretest the EUT at Charge + Transmitting mode.Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 3 for details |
| Test Results: | Pass |
| The detailed test data see: Appendix | |



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250600052509


Rev.: 01

Page: 18 of 23


6 Photographs - Setup Photos

Refer to Appendix A.2 BT&WLAN&WPT Setup Photos.

7 Appendix 20dB Bandwidth

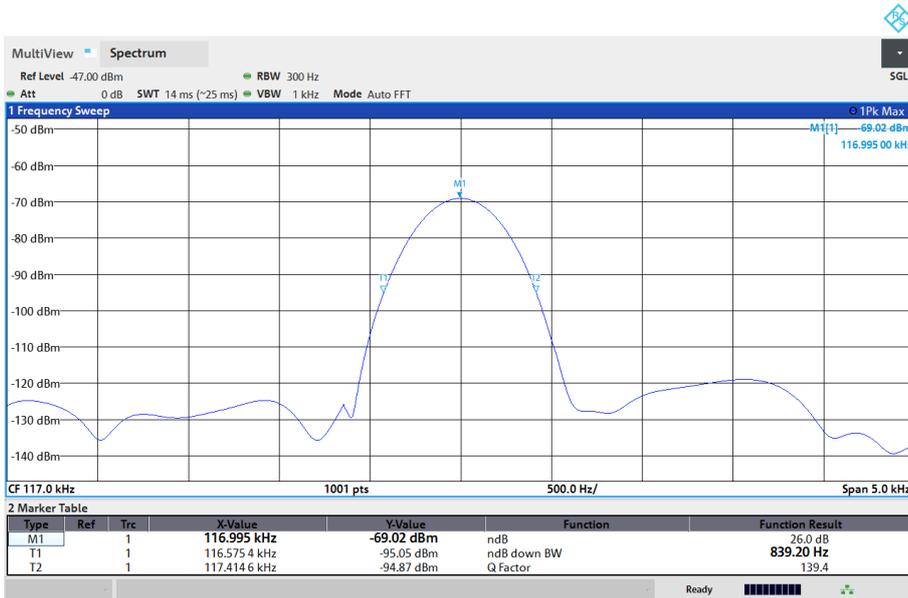


99% Occupied Bandwidth

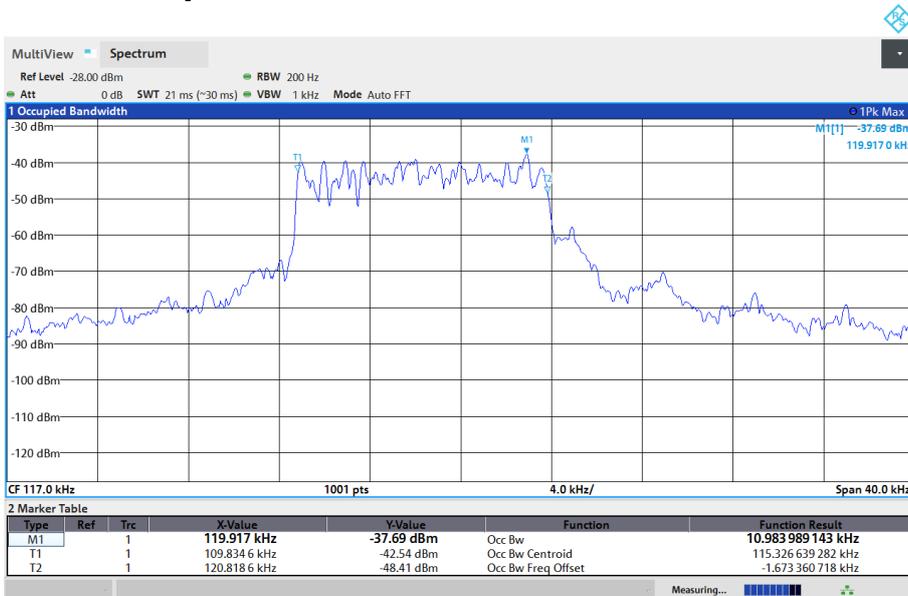


Radiated Emissions

9K~30M

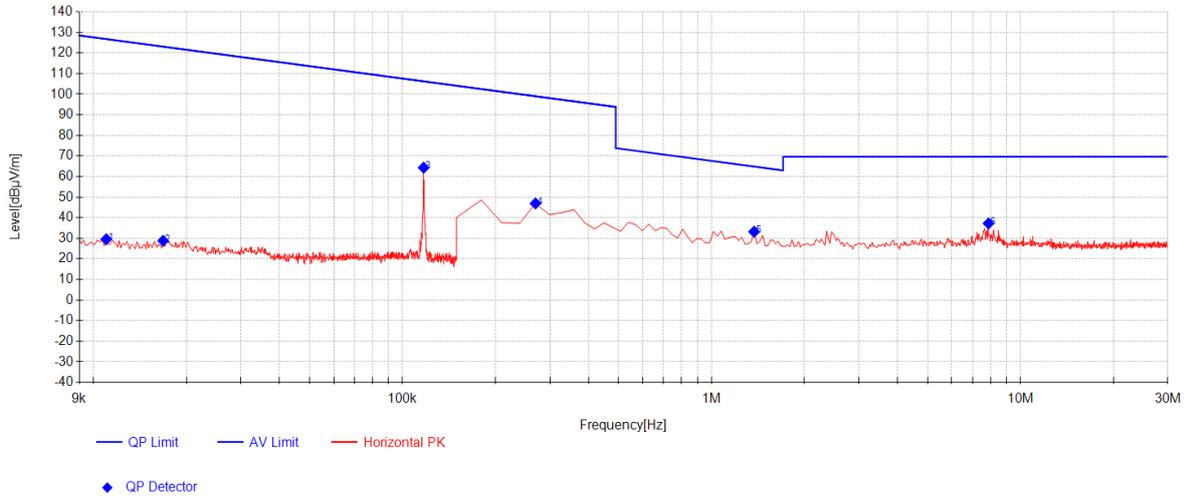


| Final Data List | | | | | | | | | | |
|-----------------|-----------------|-------------------|-----------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 5 | 1.3738 | 12.83 | 19.88 | 0.46 | 33.17 | 64.85 | 31.68 | 100 | 270 | Coaxial |
| 6 | 7.8812 | 16.52 | 20.10 | 0.58 | 37.20 | 69.54 | 32.34 | 100 | 290 | Coaxial |
| NO. | Frequency [MHz] | AV Reading [dBµV] | AF [dB/m] | Factor [dB] | AV Value [dBµV/m] | AV Limit [dBµV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 0.011 | 9.12 | 19.97 | 0.43 | 29.52 | 126.77 | 97.25 | 100 | 170 | Coaxial |
| 2 | 0.0168 | 8.33 | 20.01 | 0.43 | 28.77 | 123.09 | 94.32 | 100 | 70 | Coaxial |
| 3 | 0.1171 | 43.58 | 20.26 | 0.43 | 64.28 | 106.23 | 41.95 | 100 | 60 | Coaxial |
| 4 | 0.2694 | 26.22 | 20.27 | 0.43 | 46.92 | 98.99 | 52.07 | 100 | 240 | Coaxial |

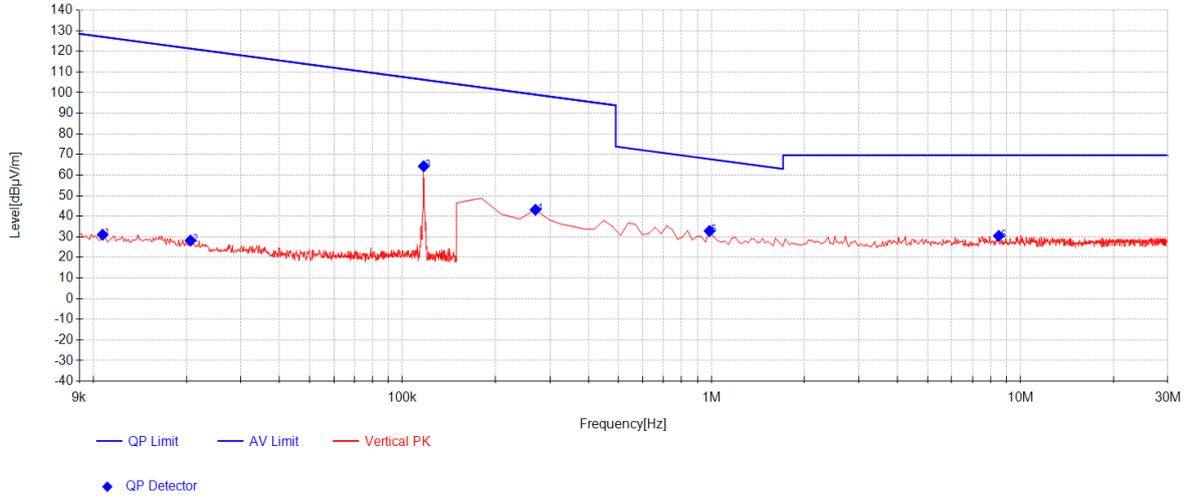


| Final Data List | | | | | | | | | | |
|-----------------|-----------------|-------------------|-----------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 5 | 0.9858 | 12.51 | 19.91 | 0.45 | 32.87 | 67.73 | 34.86 | 100 | 260 | Coplanar |
| 6 | 8.508 | 9.80 | 20.10 | 0.59 | 30.49 | 69.54 | 39.05 | 100 | 170 | Coplanar |
| NO. | Frequency [MHz] | AV Reading [dBµV] | AF [dB/m] | Factor [dB] | AV Value [dBµV/m] | AV Limit [dBµV/m] | AV Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 0.0107 | 10.68 | 19.97 | 0.43 | 31.08 | 127.01 | 95.93 | 100 | 220 | Coplanar |
| 2 | 0.0206 | 7.74 | 20.03 | 0.43 | 28.21 | 121.32 | 93.11 | 100 | 180 | Coplanar |
| 3 | 0.1171 | 43.56 | 20.26 | 0.43 | 64.26 | 106.23 | 41.97 | 100 | 170 | Coplanar |
| 4 | 0.2694 | 22.46 | 20.27 | 0.43 | 43.16 | 98.99 | 55.83 | 100 | 240 | Coplanar |

30M~1G

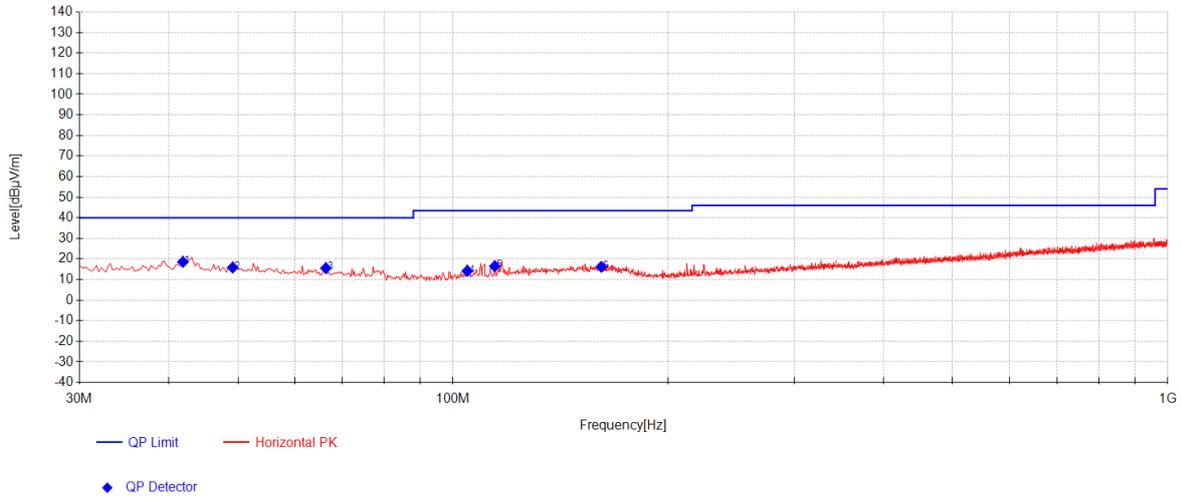

| Final Data List | | | | | | | | | | |
|-----------------|-----------------|----------------|-----------|-------------|-------------------|-------------------|----------------|-------------|-----------|------------|
| NO. | Frequency [MHz] | Reading [dBμV] | AF [dB/m] | Factor [dB] | QP Value [dBμV/m] | QP Limit [dBμV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 41.8825 | 34.04 | 18.71 | -34.18 | 18.57 | 40.00 | 21.43 | 196 | 227 | Horizontal |
| 2 | 49.1575 | 31.22 | 18.77 | -34.18 | 15.81 | 40.00 | 24.19 | 235 | 164 | Horizontal |
| 3 | 66.375 | 32.35 | 17.23 | -34.04 | 15.53 | 40.00 | 24.47 | 187 | 266 | Horizontal |
| 4 | 104.69 | 32.49 | 15.44 | -33.77 | 14.15 | 43.50 | 29.35 | 203 | 273 | Horizontal |
| 5 | 114.39 | 34.33 | 15.86 | -33.73 | 16.46 | 43.50 | 27.04 | 199 | 211 | Horizontal |
| 6 | 161.1925 | 30.52 | 19.10 | -33.45 | 16.17 | 43.50 | 27.33 | 154 | 1 | Horizontal |

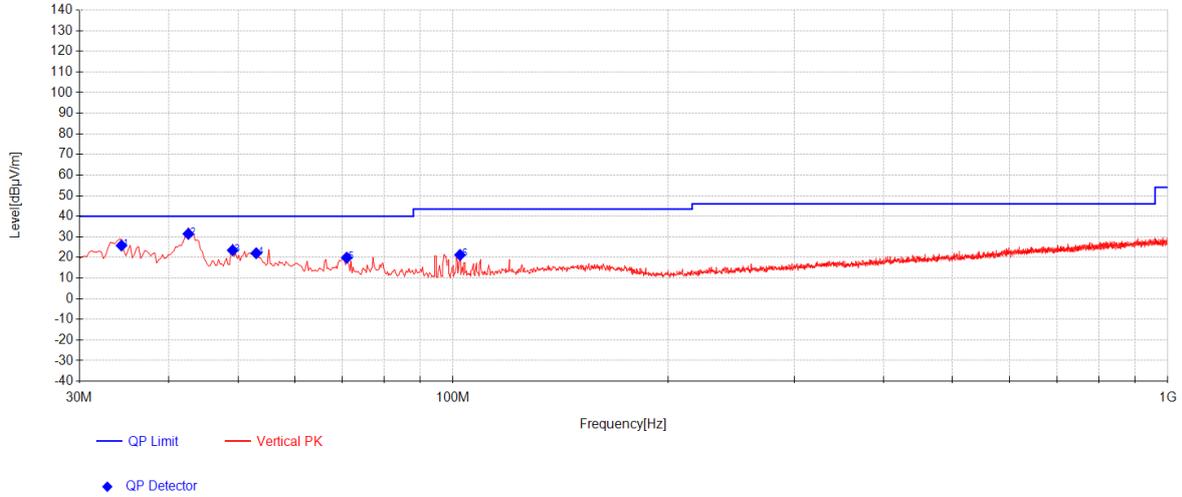

| Final Data List | | | | | | | | | | |
|-----------------|-----------------|----------------|-----------|-------------|-------------------|-------------------|----------------|-------------|-----------|----------|
| NO. | Frequency [MHz] | Reading [dBµV] | AF [dB/m] | Factor [dB] | QP Value [dBµV/m] | QP Limit [dBµV/m] | QP Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 34.365 | 41.81 | 18.20 | -34.18 | 25.83 | 40.00 | 14.17 | 235 | 306 | Vertical |
| 2 | 42.61 | 46.88 | 18.76 | -34.18 | 31.46 | 40.00 | 8.54 | 196 | 96 | Vertical |
| 3 | 49.1575 | 38.93 | 18.77 | -34.18 | 23.52 | 40.00 | 16.48 | 238 | 119 | Vertical |
| 4 | 53.0375 | 38.03 | 18.20 | -34.15 | 22.07 | 40.00 | 17.93 | 225 | 259 | Vertical |
| 5 | 70.9825 | 37.81 | 16.10 | -34.00 | 19.91 | 40.00 | 20.09 | 179 | 259 | Vertical |
| 6 | 102.265 | 40.06 | 14.98 | -33.78 | 21.25 | 43.50 | 22.25 | 245 | 268 | Vertical |

---End of Report---