



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo TB-8505XC
FCC ID : O57TB8505XC
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 28, 2020 and testing was completed on Jul. 03, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Test Software 7

 1.8 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 11

 2.4 Support Unit used in test configuration and system 12

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 26dB & 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement 24

 3.6 Automatically Discontinue Transmission 26

 3.7 Antenna Requirements 27

4 LIST OF MEASURING EQUIPMENT 28

5 UNCERTAINTY OF EVALUATION 29

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR981204-07D	Rev. 01	Initial issue of report	Jul. 06, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.01 dB at 5150.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.46 dB at 0.507 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo TB-8505XC
FCC ID	O57TB8505XC
EUT supports Radios application	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver and GNSS
IMEI Code	Conducted: N/A Conduction/Radiation: 860949040008119
HW Version	Lenovo TB-8505XC
SW Version	TB-8505XC_RF01_200508
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For the difference between sample 1 and sample 2, please refer to the Product Equality Declaration which is exhibit separately. According to the difference, the sample 1 to perform full test.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.45 dBm / 0.0556 W 802.11n HT20 : 16.48 dBm / 0.0445 W 802.11n HT40 : 16.11 dBm / 0.0408 W 802.11ac VHT20 : 16.43 dBm / 0.0440 W 802.11ac VHT40 : 16.09 dBm / 0.0406 W 802.11ac VHT80 : 12.98 dBm / 0.0199 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 16.94 dBm / 0.0494 W 802.11n HT20 : 16.22 dBm / 0.0419 W 802.11n HT40 : 15.79 dBm / 0.0379 W 802.11ac VHT20 : 16.26 dBm / 0.0423 W 802.11ac VHT40 : 15.72 dBm / 0.0373 W 802.11ac VHT80 : 13.79 dBm / 0.0239 W</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 16.87 dBm / 0.0486 W 802.11n HT20 : 16.34 dBm / 0.0431 W 802.11n HT40 : 16.29 dBm / 0.0426 W 802.11ac VHT20 : 16.32 dBm / 0.0429 W 802.11ac VHT40 : 16.24 dBm / 0.0421 W 802.11ac VHT80 : 15.44 dBm / 0.0350 W</p>
99% Occupied Bandwidth	<p><5180 MHz ~ 5240 MHz> 802.11a : 18.48 MHz 802.11n HT20 : 18.73 MHz 802.11n HT40 : 36.86 MHz 802.11ac VHT80 : 75.52 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 18.93 MHz 802.11ac VHT20 : 18.53 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.40 MHz</p> <p><5500 MHz ~ 5700 MHz > 802.11a : 18.03 MHz 802.11n HT20 : 18.58 MHz 802.11n HT40 : 36.76 MHz 802.11ac VHT80 : 75.52 MHz</p>
Antenna Type / Gain	<p><5180 MHz ~ 5240 MHz> Fixed Internal Antenna with gain -2.45 dBi</p> <p><5260 MHz ~ 5320 MHz> Fixed Internal Antenna with gain -2.49 dBi</p> <p><5500 MHz ~ 5700 MHz > Fixed Internal Antenna with gain -2.07 dBi</p>
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: WLAN operation in 5600 MHz ~ 5650 MHz is notched.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link(5G) + Earphone + Battery 1 + USB Cable 2(Charging from Adapter 2) for Sample 1
Remark: For Radiated Test Cases, The tests were performance with Adapter 1, Earphone, Battery 1, USB Cable 1 and Sample 1.	



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT20	802.11ac VHT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

2.3 Connection Diagram of Test System

For Radiation Spurious Emission

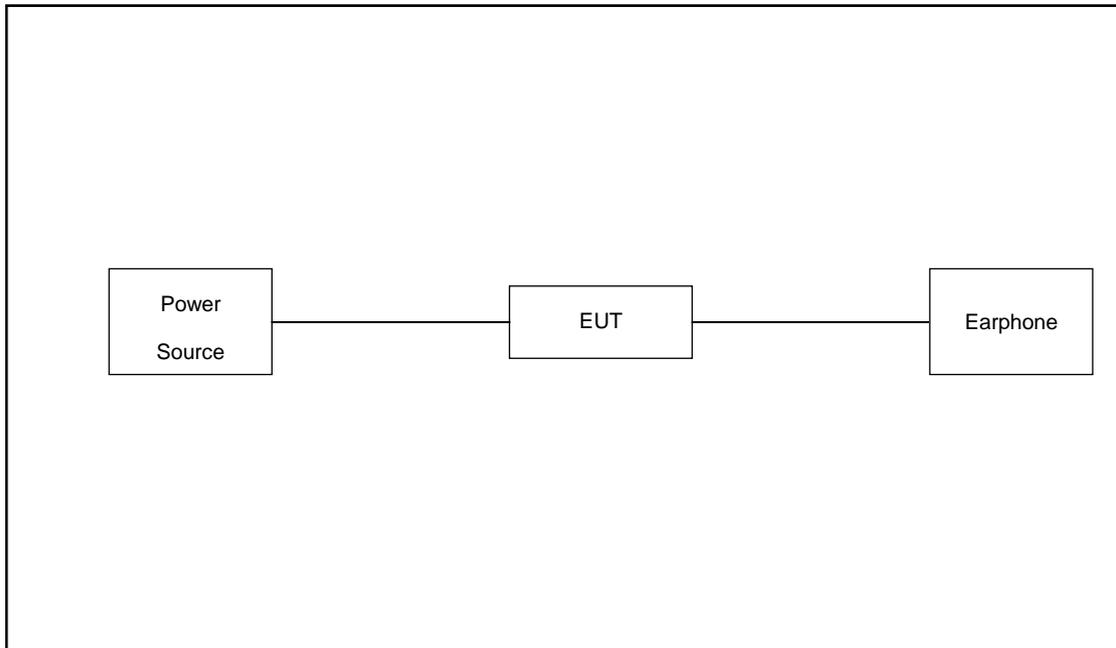

For AC Conducted Emission

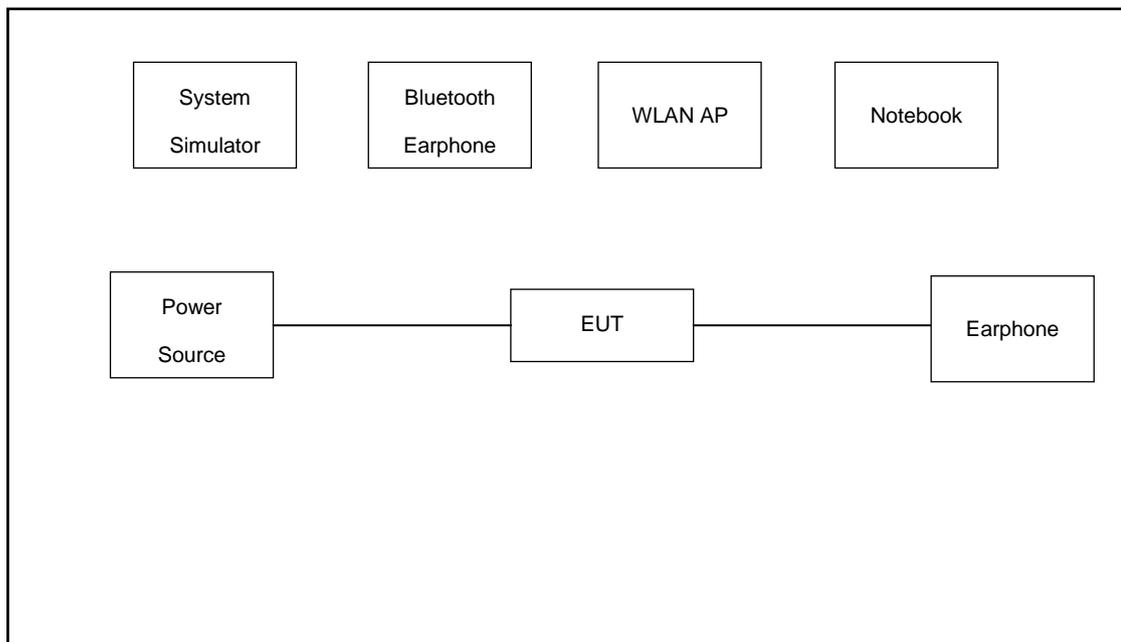



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	SD Card	Kingston	8GB	N/A	N/A	N/A
6.	Earphone	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 7.6 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

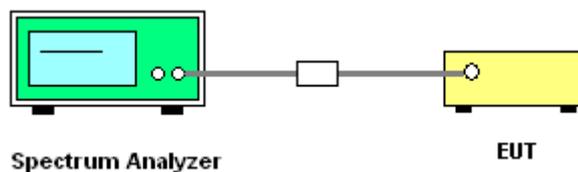

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

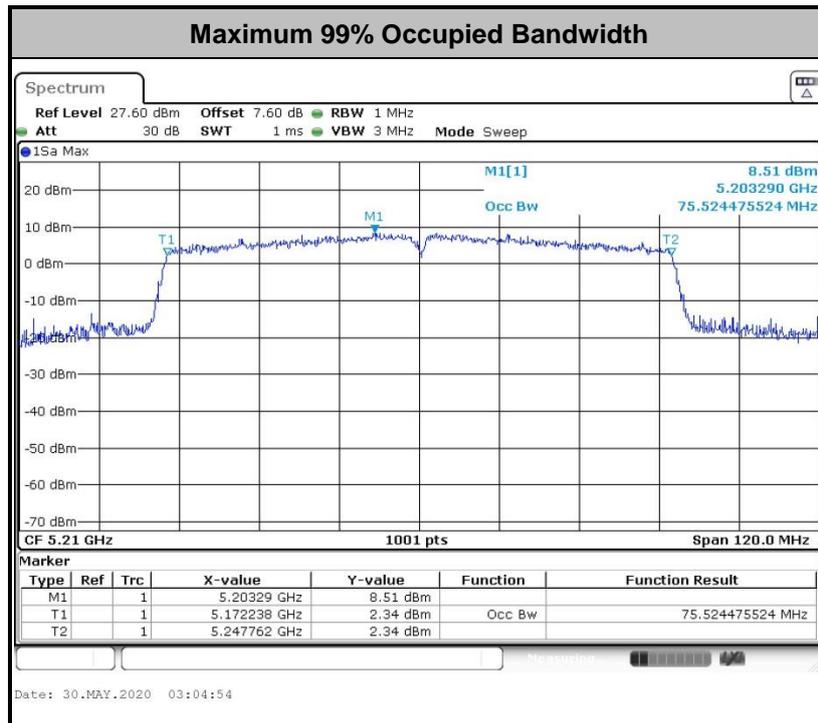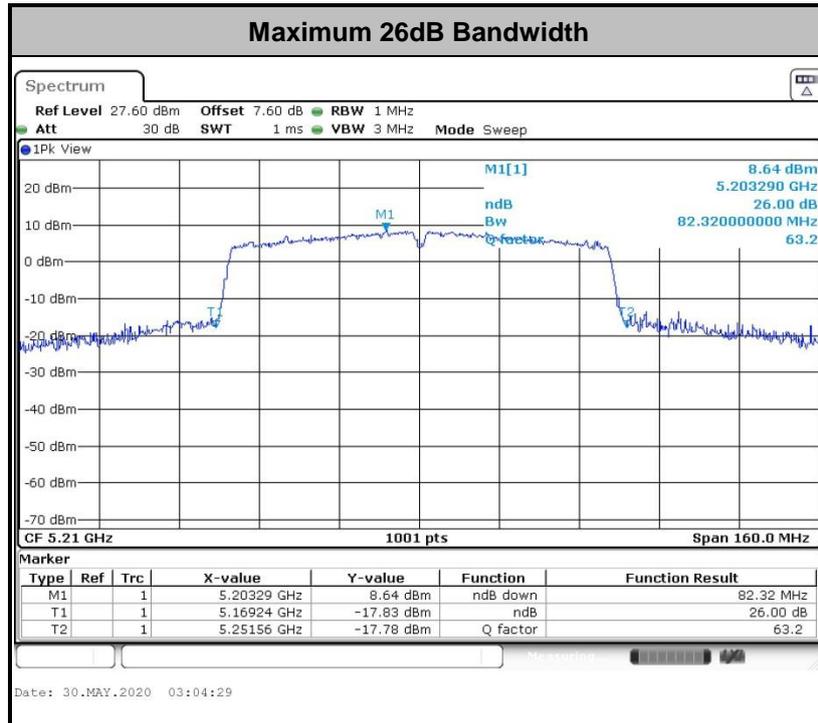

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log B$, dBm, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

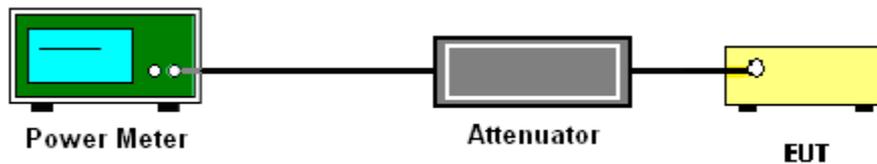

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

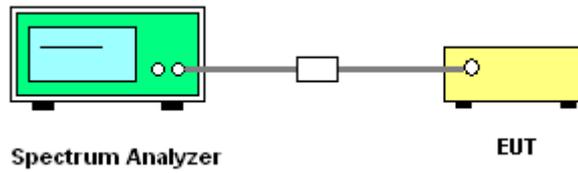

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

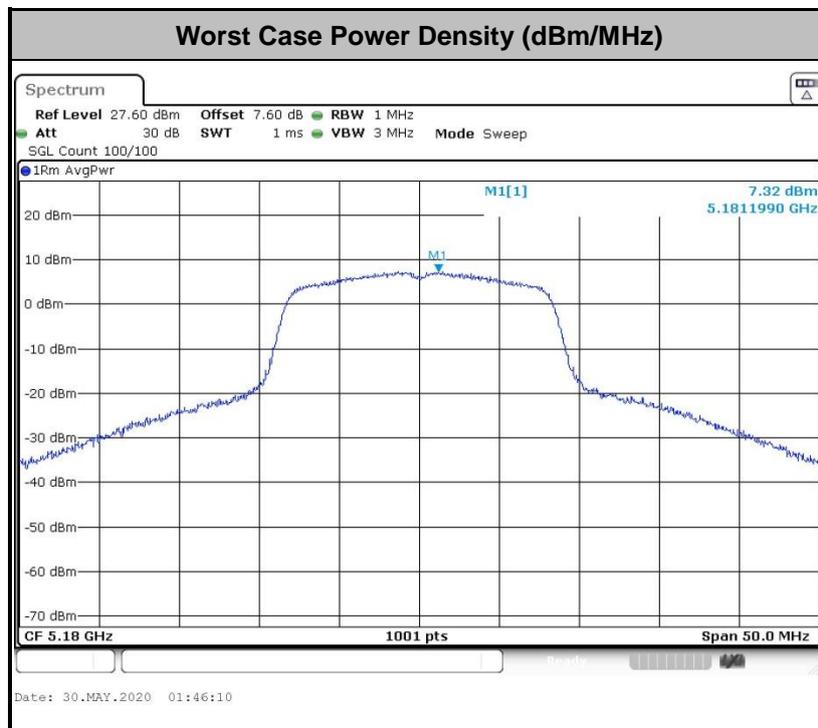

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

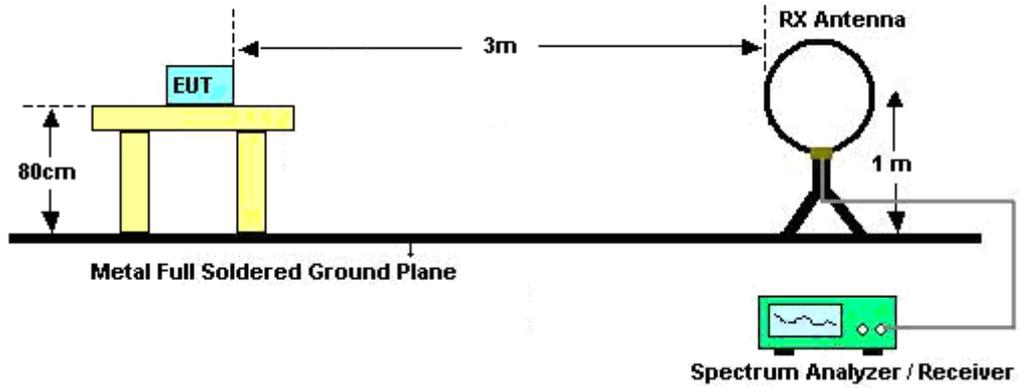

For radiated emissions from 30MHz to 1GHz

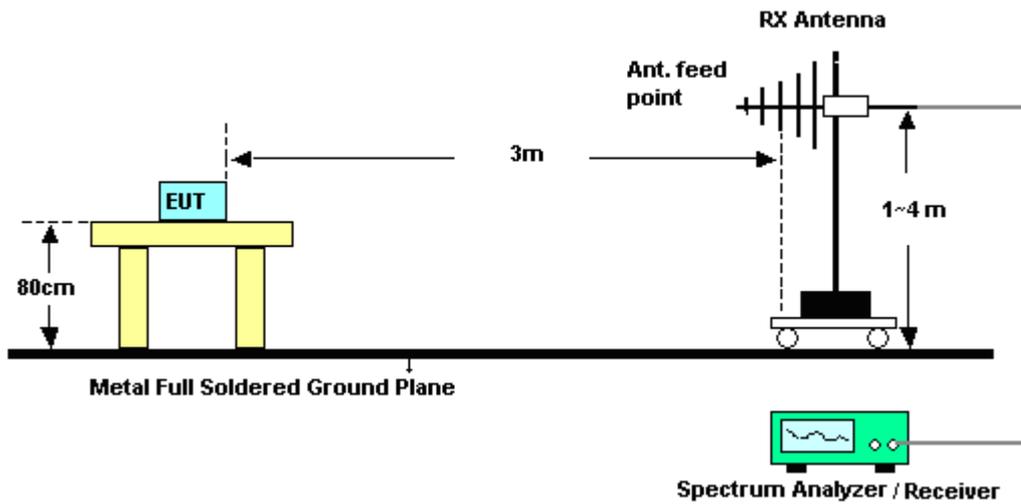

For radiated emissions above 1GHz

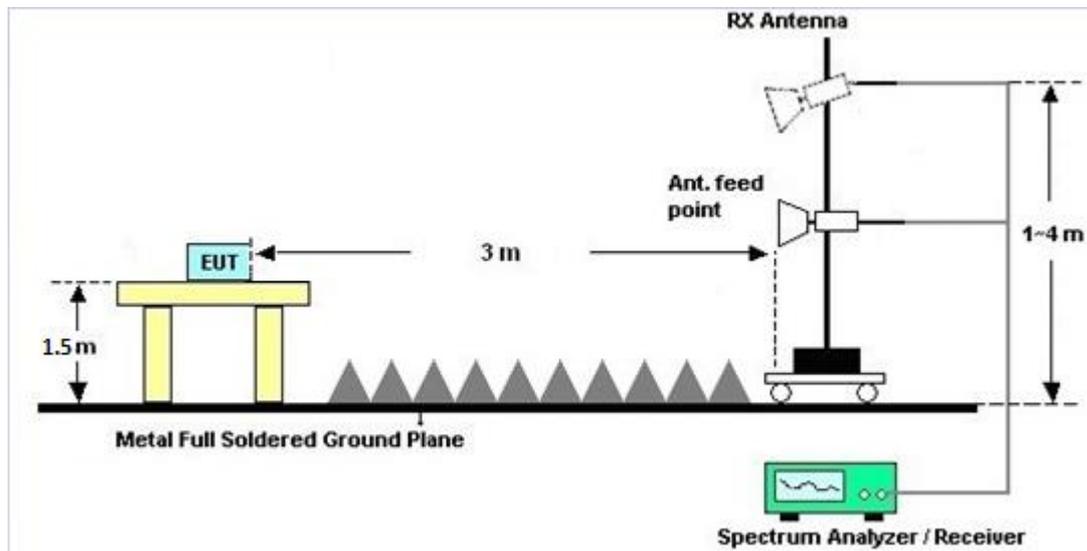

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

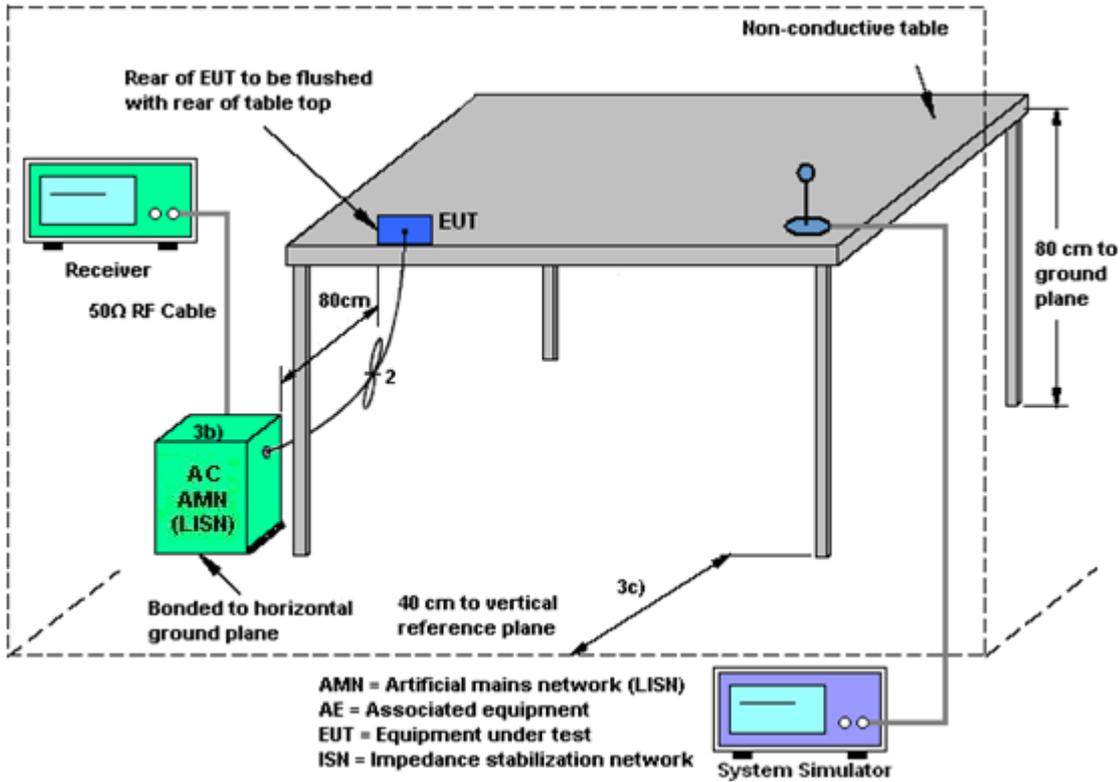

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	May 30, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	May 30, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	May 30, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 18, 2019	Jul. 03, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 18, 2019	Jul. 03, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Jul. 03, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 30, 2019	Jul. 03, 2020	Dec. 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 10, 2019	Jul. 03, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jul. 03, 2020	Nov. 09, 2020	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Aug. 06, 2019	Jul. 03, 2020	Aug. 05, 2020	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jul. 03, 2020	Oct. 17, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 08, 2020	Jul. 03, 2020	Jan. 07, 2021	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jul. 03, 2020	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 03, 2020	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 03, 2020	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Jun. 01, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jun. 01, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jun. 01, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jun. 01, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Aaron shen	Temperature:	21~25	°C
Test Date:	2020/5/30	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.88	26.02	-	22.52		
11a	6Mbps	1	44	5220	18.43	28.57	-	22.66		
11a	6Mbps	1	48	5240	18.48	28.62	-	22.67		
HT20	MCS0	1	36	5180	18.58	25.18	-	22.69		
HT20	MCS0	1	44	5220	18.73	28.77	-	22.73		
HT20	MCS0	1	48	5240	18.63	25.57	-	22.70		
HT40	MCS0	1	38	5190	36.86	44.33	-	23.01		
HT40	MCS0	1	46	5230	36.56	45.58	-	23.01		
VHT80	MCS0	1	42	5210	75.52	82.32	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.00	17.27	24.00	-2.45		Pass
11a	6Mbps	1	44	5220	0.00	17.33	24.00	-2.45		Pass
11a	6Mbps	1	48	5240	0.00	17.45	24.00	-2.45		Pass
HT20	MCS0	1	36	5180	0.00	16.23	24.00	-2.45		Pass
HT20	MCS0	1	44	5220	0.00	16.25	24.00	-2.45		Pass
HT20	MCS0	1	48	5240	0.00	16.48	24.00	-2.45		Pass
HT40	MCS0	1	38	5190	0.00	15.31	24.00	-2.45		Pass
HT40	MCS0	1	46	5230	0.00	16.11	24.00	-2.45		Pass
VHT20	MCS0	1	36	5180	0.00	16.35	24.00	-2.45		Pass
VHT20	MCS0	1	44	5220	0.00	16.28	24.00	-2.45		Pass
VHT20	MCS0	1	48	5240	0.00	16.43	24.00	-2.45		Pass
VHT40	MCS0	1	38	5190	0.00	15.28	24.00	-2.45		Pass
VHT40	MCS0	1	46	5230	0.00	16.09	24.00	-2.45		Pass
VHT80	MCS0	1	42	5210	0.00	12.98	24.00	-2.45		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.00	7.32	11.00	-2.45		Pass
11a	6Mbps	1	44	5220	0.00	7.26	11.00	-2.45		Pass
11a	6Mbps	1	48	5240	0.00	7.25	11.00	-2.45		Pass
HT20	MCS0	1	36	5180	0.00	6.17	11.00	-2.45		Pass
HT20	MCS0	1	44	5220	0.00	5.63	11.00	-2.45		Pass
HT20	MCS0	1	48	5240	0.00	5.70	11.00	-2.45		Pass
HT40	MCS0	1	38	5190	0.00	1.85	11.00	-2.45		Pass
HT40	MCS0	1	46	5230	0.00	3.10	11.00	-2.45		Pass
VHT80	MCS0	1	42	5210	0.00	-3.65	11.00	-2.45		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	18.08	26.92	23.57	29.57	23.98	
11a	6M bps	1	60	5300	18.08	24.73	23.57	29.57	23.98	
11a	6M bps	1	64	5320	18.93	25.08	23.77	29.77	23.98	
HT40	MCS 0	1	54	5270	36.26	42.62	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.56	42.79	23.98	30.00	23.98	
VHT20	MCS 0	1	52	5260	18.53	25.08	23.68	29.68	23.98	
VHT20	MCS 0	1	60	5300	18.53	25.28	23.68	29.68	23.98	
VHT20	MCS 0	1	64	5320	18.48	23.43	23.67	29.67	23.98	
VHT80	MCS 0	1	58	5290	75.40	81.36	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	52	5260	0.00	16.77	23.98	-2.49	26.99	Pass
11a	6M bps	1	60	5300	0.00	16.75	23.98	-2.49	26.99	Pass
11a	6M bps	1	64	5320	0.00	16.94	23.98	-2.49	26.99	Pass
HT20	MCS 0	1	52	5260	0.00	16.12	23.98	-2.49	26.99	Pass
HT20	MCS 0	1	60	5300	0.00	16.11	23.98	-2.49	26.99	Pass
HT20	MCS 0	1	64	5320	0.00	16.22	23.98	-2.49	26.99	Pass
HT40	MCS 0	1	54	5270	0.00	15.79	23.98	-2.49	26.99	Pass
HT40	MCS 0	1	62	5310	0.00	15.12	23.98	-2.49	26.99	Pass
VHT20	MCS 0	1	52	5260	0.00	16.06	23.98	-2.49	26.99	Pass
VHT20	MCS 0	1	60	5300	0.00	16.18	23.98	-2.49	26.99	Pass
VHT20	MCS 0	1	64	5320	0.00	16.26	23.98	-2.49	26.99	Pass
VHT40	MCS 0	1	54	5270	0.00	15.72	23.98	-2.49	26.99	Pass
VHT40	MCS 0	1	62	5310	0.00	15.10	23.98	-2.49	26.99	Pass
VHT80	MCS 0	1	58	5290	0.00	13.79	23.98	-2.49	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.00	6.95	11.00	-2.49		Pass
11a	6M bps	1	60	5300	0.00	7.32	11.00	-2.49		Pass
11a	6M bps	1	64	5320	0.00	7.29	11.00	-2.49		Pass
HT40	MCS 0	1	54	5270	0.00	2.84	11.00	-2.49		Pass
HT40	MCS 0	1	62	5310	0.00	1.70	11.00	-2.49		Pass
VHT20	MCS 0	1	52	5260	0.00	6.29	11.00	-2.49		Pass
VHT20	MCS 0	1	60	5300	0.00	6.23	11.00	-2.49		Pass
VHT20	MCS 0	1	64	5320	0.00	5.99	11.00	-2.49		Pass
VHT80	MCS 0	1	58	5290	0.00	-2.66	11.00	-2.49		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	18.03	24.93	23.56	29.56	23.98	
11a	6M bps	1	116	5580	17.78	22.38	23.50	29.50	23.98	
11a	6M bps	1	140	5700	17.83	23.08	23.51	29.51	23.98	
HT20	MCS 0	1	100	5500	18.53	29.67	23.68	29.68	23.98	
HT20	MCS 0	1	116	5580	18.58	25.82	23.69	29.69	23.98	
HT20	MCS 0	1	140	5700	18.53	24.03	23.68	29.68	23.98	
HT40	MCS 0	1	102	5510	36.76	49.63	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.76	43.34	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.56	45.23	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.52	81.68	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.40	81.52	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band III										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
11a	6M bps	1	100	5500	0.00	16.87	23.98	-2.07	26.99	Pass
11a	6M bps	1	116	5580	0.00	16.33	23.98	-2.07	26.99	Pass
11a	6M bps	1	140	5700	0.00	15.81	23.98	-2.07	26.99	Pass
HT20	MCS 0	1	100	5500	0.00	16.34	23.98	-2.07	26.99	Pass
HT20	MCS 0	1	116	5580	0.00	15.98	23.98	-2.07	26.99	Pass
HT20	MCS 0	1	140	5700	0.00	15.93	23.98	-2.07	26.99	Pass
HT40	MCS 0	1	102	5510	0.00	16.15	23.98	-2.07	26.99	Pass
HT40	MCS 0	1	110	5550	0.00	16.29	23.98	-2.07	26.99	Pass
HT40	MCS 0	1	134	5670	0.00	15.95	23.98	-2.07	26.99	Pass
VHT20	MCS 0	1	100	5500	0.00	16.32	23.98	-2.07	26.99	Pass
VHT20	MCS 0	1	116	5580	0.00	15.82	23.98	-2.07	26.99	Pass
VHT20	MCS 0	1	140	5700	0.00	16.06	23.98	-2.07	26.99	Pass
VHT40	MCS 0	1	102	5510	0.00	16.16	23.98	-2.07	26.99	Pass
VHT40	MCS 0	1	110	5550	0.00	16.24	23.98	-2.07	26.99	Pass
VHT40	MCS 0	1	134	5670	0.00	16.12	23.98	-2.07	26.99	Pass
VHT80	MCS 0	1	106	5530	0.00	13.54	23.98	-2.07	26.99	Pass
VHT80	MCS 0	1	122	5610	0.00	15.44	23.98	-2.07	26.99	Pass


TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.00	6.53	11.00	-2.07		Pass
11a	6M bps	1	116	5580	0.00	6.18	11.00	-2.07		Pass
11a	6M bps	1	140	5700	0.00	5.86	11.00	-2.07		Pass
HT20	MCS 0	1	100	5500	0.00	6.41	11.00	-2.07		Pass
HT20	MCS 0	1	116	5580	0.00	5.97	11.00	-2.07		Pass
HT20	MCS 0	1	140	5700	0.00	6.10	11.00	-2.07		Pass
HT40	MCS 0	1	102	5510	0.00	3.34	11.00	-2.07		Pass
HT40	MCS 0	1	110	5550	0.00	3.73	11.00	-2.07		Pass
HT40	MCS 0	1	134	5670	0.00	2.97	11.00	-2.07		Pass
VHT80	MCS 0	1	106	5530	0.00	-2.70	11.00	-2.07		Pass
VHT80	MCS 0	1	122	5610	0.00	-0.67	11.00	-2.07		Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line

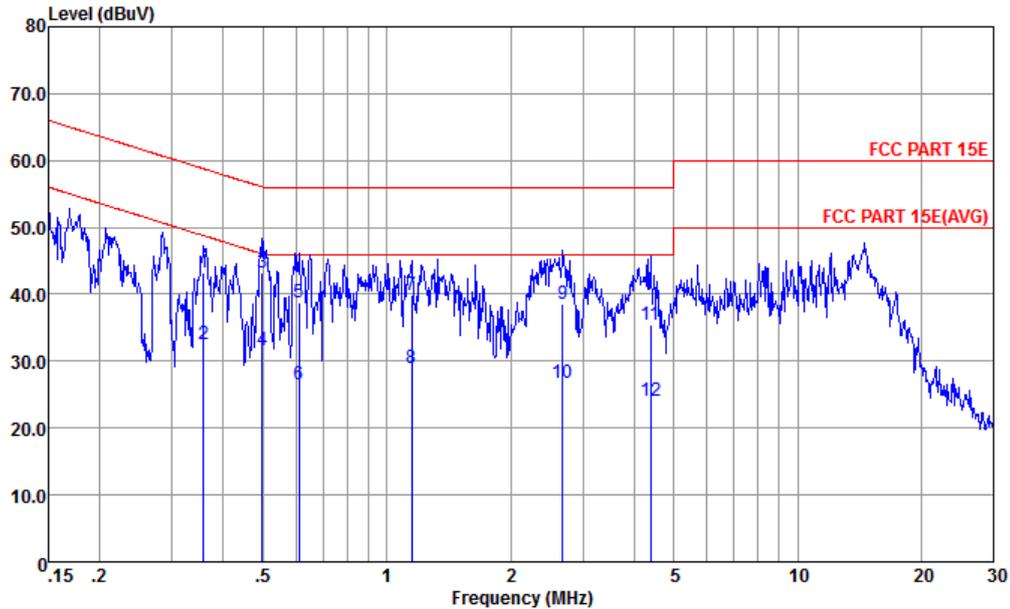


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-191028-060105 LINE

mode : Mode 1
 : 860949040008119 #6

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.358	43.23	-15.55	58.78	32.90	0.05	10.28	QP
2	0.358	32.63	-16.15	48.78	22.30	0.05	10.28	Average
3 *	0.497	43.20	-12.85	56.05	32.90	0.06	10.24	QP
4	0.497	31.60	-14.45	46.05	21.30	0.06	10.24	Average
5	0.611	38.80	-17.20	56.00	28.49	0.07	10.24	QP
6	0.611	26.50	-19.50	46.00	16.19	0.07	10.24	Average
7	1.147	39.82	-16.18	56.00	29.50	0.09	10.23	QP
8	1.147	28.92	-17.08	46.00	18.60	0.09	10.23	Average
9	2.678	38.56	-17.44	56.00	28.20	0.12	10.24	QP
10	2.678	26.66	-19.34	46.00	16.30	0.12	10.24	Average
11	4.384	35.50	-20.50	56.00	25.10	0.14	10.26	QP
12	4.384	24.00	-22.00	46.00	13.60	0.14	10.26	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

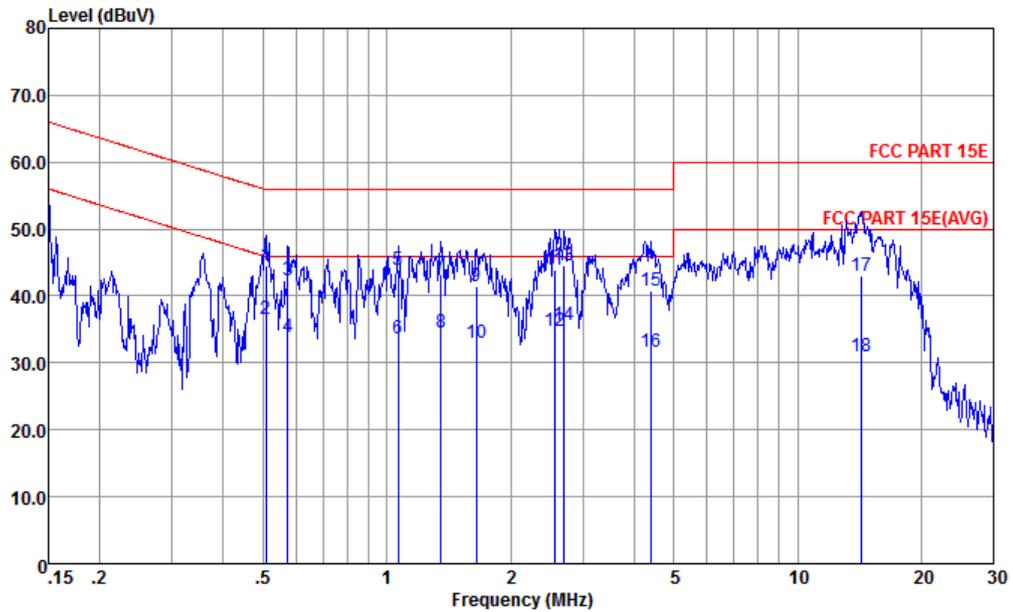

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-191028-060105 NEUTRAL

mode : Mode 1
 : 860949040008119 #6

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.507	44.54	-11.46	56.00	34.20	0.10	10.24	QP
2 *	0.507	36.54	-9.46	46.00	26.20	0.10	10.24	Average
3	0.573	42.24	-13.76	56.00	31.90	0.10	10.24	QP
4	0.573	33.84	-12.16	46.00	23.50	0.10	10.24	Average
5	1.065	43.95	-12.05	56.00	33.61	0.11	10.23	QP
6	1.065	33.65	-12.35	46.00	23.31	0.11	10.23	Average
7	1.352	43.25	-12.75	56.00	32.90	0.12	10.23	QP
8	1.352	34.55	-11.45	46.00	24.20	0.12	10.23	Average
9	1.654	41.55	-14.45	56.00	31.20	0.12	10.23	QP
10	1.654	32.95	-13.05	46.00	22.60	0.12	10.23	Average
11	2.554	43.87	-12.13	56.00	33.49	0.14	10.24	QP
12	2.554	34.67	-11.33	46.00	24.29	0.14	10.24	Average
13	2.707	44.48	-11.52	56.00	34.10	0.14	10.24	QP
14	2.707	35.58	-10.42	46.00	25.20	0.14	10.24	Average
15	4.407	40.72	-15.28	56.00	30.30	0.16	10.26	QP
16	4.407	31.62	-14.38	46.00	21.20	0.16	10.26	Average
17	14.288	42.95	-17.05	60.00	32.20	0.36	10.39	QP
18	14.288	31.05	-18.95	50.00	20.30	0.36	10.39	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5150	63.64	-10.36	74	52.57	34.3	12.79	36.02	103	262	P	H
		5150	47.79	-6.21	54	36.72	34.3	12.79	36.02	103	262	A	H
	*	5182	103.6	-	-	92.37	34.37	12.86	36	103	262	P	H
		5182	97.2	-	-	85.97	34.37	12.86	36	103	262	A	H
		5148.32	59.45	-14.55	74	48.38	34.3	12.79	36.02	305	87	P	V
		5150	45.54	-8.46	54	34.47	34.3	12.79	36.02	305	87	A	V
	*	5182	100.13	-	-	88.9	34.37	12.86	36	305	87	P	V
		5182	93.16	-	-	81.93	34.37	12.86	36	305	87	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10358.36	45.35	-22.95	68.3	52.04	39.59	15.81	62.09	300	0	P	H
		10358.36	45.36	-22.94	68.3	52.05	39.59	15.81	62.09	100	360	P	V
802.11a CH 44 5220MHz		10438.44	46.31	-21.99	68.3	52.84	39.63	15.89	62.05	300	0	P	H
		15660	54.23	-19.77	74	53.14	42.53	21.29	62.73	296	153	P	H
		15660	43.68	-10.32	54	42.59	42.53	21.29	62.73	296	153	A	H
		10438.44	45.41	-22.89	68.3	51.94	39.63	15.89	62.05	100	360	P	V
		15660	54.25	-19.75	74	53.16	42.53	21.29	62.73	100	276	P	V
		15660	45.92	-8.08	54	44.83	42.53	21.29	62.73	100	276	A	V
802.11a CH 48 5240MHz		10478.47	46.21	-22.09	68.3	52.63	39.66	15.94	62.02	300	0	P	H
		15720	53.91	-20.09	74	52.77	42.54	21.37	62.77	275	173	P	H
		15720	43.51	-10.49	54	42.37	42.54	21.37	62.77	275	173	A	H
		10478.47	45.81	-22.49	68.3	52.23	39.66	15.94	62.02	100	360	P	V
		15714	55.36	-18.64	74	54.22	42.54	21.37	62.77	102	276	P	V
		15714	44.42	-9.58	54	43.28	42.54	21.37	62.77	102	276	A	V
Remark	3. No other spurious found.												
	4. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 CH 36 5180MHz and a Remark section.



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10358.36	45.85	-22.45	68.3	52.54	39.59	15.81	62.09	300	0	P	H
		10358.36	45.23	-23.07	68.3	51.92	39.59	15.81	62.09	100	360	P	V
802.11n HT20 CH 44 5220MHz		10438.44	46.2	-22.1	68.3	52.73	39.63	15.89	62.05	300	0	P	H
		10438.44	46.06	-22.24	68.3	52.59	39.63	15.89	62.05	100	360	P	V
		15660	54.92	-19.08	74	53.83	42.53	21.29	62.73	101	227	P	V
		15660	45.22	-8.78	54	44.13	42.53	21.29	62.73	101	277	A	V
802.11n HT20 CH 48 5240MHz		10478.47	45.58	-22.72	68.3	52	39.66	15.94	62.02	300	0	P	H
		10478.47	46.05	-22.25	68.3	52.47	39.66	15.94	62.02	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5149.12	61.63	-12.37	74	50.56	34.3	12.79	36.02	131	273	P	H
	!	5149.92	48.8	-5.2	54	37.73	34.3	12.79	36.02	131	273	A	H
	*	5188	98.38	-	-	87.15	34.37	12.86	36	131	273	P	H
		5188	92.59	-	-	81.36	34.37	12.86	36	131	273	A	H
		5380.56	54.34	-19.66	74	42.41	34.67	13.13	35.87	131	273	P	H
		5397.12	43.6	-10.4	54	31.61	34.7	13.15	35.86	131	273	A	H
		5148.64	60.09	-13.91	74	49.02	34.3	12.79	36.02	303	94	P	V
		5150	47.15	-6.85	54	36.08	34.3	12.79	36.02	303	94	A	V
	*	5188	96.78	-	-	85.55	34.37	12.86	36	131	273	P	V
		5188	89.64	-	-	78.41	34.37	12.86	36	131	273	A	V
		5377.86	53.28	-20.72	74	41.35	34.67	13.13	35.87	303	94	P	V
	5398.02	43.54	-10.46	54	31.55	34.7	13.15	35.86	303	94	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT40 CH 38 5190MHz and CH 46 5230MHz, plus a Remark section.



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5143.52	64.29	-9.71	74	53.22	34.3	12.79	36.02	105	242	P	H
	!	5150	50.99	-3.01	54	39.74	34.3	12.79	36.02	105	242	A	H
	*	5212	94.83	-	-	83.46	34.43	12.92	35.98	105	242	P	H
		5212	87.87	-	-	76.5	34.43	12.92	35.98	105	242	A	H
		5360.58	54.48	-19.52	74	42.62	34.63	13.11	35.88	105	242	P	H
		5351.04	43.45	-10.55	54	31.65	34.6	13.09	35.89	105	242	A	H
		5149.12	60.01	-13.99	74	48.94	34.3	12.79	36.02	301	100	P	V
		5150	47.08	-6.92	54	36.01	34.3	12.79	36.02	301	100	A	V
	*	5212	90.6	-	-	79.23	34.43	12.92	35.98	301	100	P	V
		5212	83.21	-	-	71.84	34.43	12.92	35.98	301	100	A	V
	5396.94	53.3	-20.7	74	41.31	34.7	13.15	35.86	301	100	P	V	
	5395.32	43.28	-10.72	54	31.29	34.7	13.15	35.86	301	100	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		10420	45.76	-22.54	68.3	52.32	39.62	15.88	62.06	300	0	P	H
		10420	45.43	-22.87	68.3	51.99	39.62	15.88	62.06	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 64 5320MHz		5350.7	58.54	-15.46	74	46.74	34.6	13.09	35.89	111	254	P	H
		5350.1	46.15	-7.85	54	34.35	34.6	13.09	35.89	111	254	A	H
	*	5320	101.46	-	-	89.73	34.6	13.05	35.92	111	254	P	H
		5320	94.4	-	-	82.67	34.6	13.05	35.92	111	254	A	H
		5357.5	54.96	-19.04	74	43.16	34.6	13.09	35.89	310	82	P	V
		5350	44.31	-9.69	54	32.51	34.6	13.09	35.89	310	82	A	V
	*	5320	98.94	-	-	87.21	34.6	13.05	35.92	310	82	P	V
		5320	92.2	-	-	80.47	34.6	13.05	35.92	310	82	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10518.52	45.43	-22.87	68.3	51.78	39.68	15.98	62.01	300	0	P	H
		15780	54.43	-19.57	74	53.22	42.56	21.44	62.79	308	156	P	H
		15780	43.76	-10.24	54	42.55	42.56	21.44	62.79	308	156	A	H
		10518.52	46.47	-21.83	68.3	52.82	39.68	15.98	62.01	100	360	P	V
		15786	55.11	-18.89	74	53.89	42.56	21.46	62.8	100	276	P	V
		15786	46.23	-7.77	54	45.01	42.56	21.46	62.8	100	276	A	V
802.11a CH 60 5300MHz		10600	45.49	-28.51	74	51.68	39.72	16.06	61.97	300	0	P	H
		15894	54.95	-19.05	74	53.63	42.58	21.59	62.85	263	171	P	H
		15894	44.56	-9.44	54	43.24	42.58	21.59	62.85	263	171	A	H
		10600	45.99	-28.01	74	52.18	39.72	16.06	61.97	100	360	P	V
		15900	56.93	-17.07	74	55.61	42.58	21.59	62.85	101	277	P	V
		15900	47.31	-6.69	54	45.99	42.58	21.59	62.85	101	277	A	V
802.11a CH 64 5320MHz		10638.63	45.39	-28.61	74	51.51	39.74	16.09	61.95	300	0	P	H
		15966	55.04	-18.96	74	53.66	42.59	21.67	62.88	303	164	P	H
		15966	46.45	-7.55	54	45.07	42.59	21.67	62.88	303	164	A	H
		10638.63	45.58	-28.42	74	51.7	39.74	16.09	61.95	100	360	P	V
		15960	56.76	-17.24	74	55.38	42.59	21.67	62.88	100	277	P	V
		15960	46.82	-7.18	54	45.44	42.59	21.67	62.88	100	277	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5119.2	54.7	-19.3	74	43.78	34.23	12.73	36.04	101	259	P	H
		5149.92	44.28	-9.72	54	33.21	34.3	12.79	36.02	101	259	A	H
	*	5308	100.85	-	-	89.15	34.6	13.03	35.93	101	259	P	H
		5308	94.37	-	-	82.67	34.6	13.03	35.93	101	259	A	H
		5351.5	63.41	-10.59	74	51.61	34.6	13.09	35.89	101	259	P	H
	!	5350	50.72	-3.28	54	38.92	34.6	13.09	35.89	101	259	A	H
		5124.48	54.22	-19.78	74	43.22	34.27	12.76	36.03	306	89	P	V
		5149.28	43.98	-10.02	54	32.91	34.3	12.79	36.02	306	89	A	V
	*	5308	93.9	-	-	82.2	34.6	13.03	35.93	306	89	P	V
		5308	88.03	-	-	76.33	34.6	13.03	35.93	306	89	A	V
		5351.1	59.61	-14.39	74	47.81	34.6	13.09	35.89	306	89	P	V
	5350	45.15	-8.85	54	33.35	34.6	13.09	35.89	306	89	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10538.54	44.77	-23.53	68.3	51.09	39.69	15.99	62	300	0	P	H
		10538.54	44.89	-23.41	68.3	51.21	39.69	15.99	62	100	360	P	V
802.11n HT40 CH 62 5310MHz		10618.62	45.63	-28.37	74	51.78	39.73	16.08	61.96	300	0	P	H
		10618.62	44.98	-29.02	74	51.13	39.73	16.08	61.96	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 64 5320MHz		5352.2	56.23	-17.77	74	44.43	34.6	13.09	35.89	116	243	P	H
		5350	45.31	-8.69	54	33.51	34.6	13.09	35.89	116	243	A	H
	*	5320	101.59	-	-	89.86	34.6	13.05	35.92	116	243	P	H
		5320	94.68	-	-	82.95	34.6	13.05	35.92	116	243	A	H
		5374.7	54.44	-19.56	74	42.58	34.63	13.11	35.88	305	88	P	V
		5350	44.63	-9.37	54	32.83	34.6	13.09	35.89	305	88	A	V
	*	5320	98.23	-	-	86.5	34.6	13.05	35.92	305	88	P	V
		5320	98.23	-	-	86.5	34.6	13.05	35.92	305	88	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20		10518.52	45.43	-22.87	68.3	51.78	39.68	15.98	62.01	300	0	P	H
CH 52 5260MHz		10518.52	45.43	-22.87	68.3	51.78	39.68	15.98	62.01	100	360	P	V
802.11ac VHT20		10600	46.49	-27.51	74	52.68	39.72	16.06	61.97	300	0	P	H
CH 60 5300MHz		15900	55.94	-18.06	74	54.62	42.58	21.59	62.85	302	163	P	H
		15900	45.59	-8.41	54	44.27	42.58	21.59	62.85	302	163	A	H
		10600	46.39	-27.61	74	52.58	39.72	16.06	61.97	100	360	P	V
802.11ac VHT20 CH 64 5320MHz		10638.63	45.13	-28.87	74	51.25	39.74	16.09	61.95	300	0	P	H
		15960	53.05	-20.95	74	51.67	42.59	21.67	62.88	100	280	P	H
		15960	44.03	-9.97	54	42.65	42.59	21.67	62.88	100	280	A	H
		10638.63	45.72	-28.28	74	51.84	39.74	16.09	61.95	100	360	P	V
		15960	54.06	-19.94	74	52.68	42.59	21.67	62.88	100	232	P	V
		15960	45.42	-8.58	54	44.04	42.59	21.67	62.88	100	232	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5136.64	54.76	-19.24	74	43.76	34.27	12.76	36.03	105	244	P	H
		5149.44	44.32	-9.68	54	33.25	34.3	12.79	36.02	105	244	A	H
	*	5290	93.56	-	-	81.93	34.57	13	35.94	105	244	P	H
		5290	86.45	-	-	74.82	34.57	13	35.94	105	244	A	H
		5350	66.84	-7.16	74	55.04	34.6	13.09	35.89	105	244	P	H
	!	5350.2	50.98	-3.02	54	39.18	34.6	13.09	35.89	105	244	A	H
		5105.12	54.37	-19.63	74	43.53	34.2	12.69	36.05	314	94	P	V
		5146.72	44.05	-9.95	54	32.98	34.3	12.79	36.02	314	94	A	V
	*	5296	89.68	-	-	77.98	34.6	13.03	35.93	314	94	P	V
		5296	82.94	-	-	71.24	34.6	13.03	35.93	314	94	A	V
		5350.3	64.23	-9.77	74	52.43	34.6	13.09	35.89	314	94	P	V
	5350.1	47.23	-6.77	54	35.43	34.6	13.09	35.89	314	94	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		10580	45.33	-22.97	68.3	51.56	39.71	16.04	61.98	300	0	P	H
		10580	44.47	-23.83	68.3	50.7	39.71	16.04	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5450.64	54.59	-19.41	74	42.61	34.6	13.21	35.83	111	108	P	H
		5468.56	54.52	-13.78	68.3	42.51	34.6	13.23	35.82	111	108	P	H
		5460	44.28	-9.72	54	32.3	34.6	13.21	35.83	111	108	A	H
	*	5500	99.1	-	-	87.03	34.6	13.27	35.8	111	108	P	H
		5500	92.73	-	-	80.66	34.6	13.27	35.8	111	108	A	H
		5444.08	55.21	-18.79	74	43.23	34.63	13.19	35.84	304	98	P	V
		5464.88	59.02	-9.28	68.3	47.01	34.6	13.23	35.82	304	98	P	V
		5459.76	44.57	-9.43	54	32.59	34.6	13.21	35.83	304	98	A	V
	*	5500	101.42	-	-	89.35	34.6	13.27	35.8	304	98	P	V
		5500	94.71	-	-	82.64	34.6	13.27	35.8	304	98	A	V
802.11a CH 140 5700MHz		5728.12	62.29	-6.01	68.3	49.79	34.67	13.6	35.77	107	118	P	H
	*	5698	102.56	-	-	90.07	34.6	13.64	35.75	107	118	P	H
		5698	95.77	-	-	83.28	34.6	13.64	35.75	107	118	A	H
	!	5725.08	63.53	-4.77	68.3	51.03	34.67	13.6	35.77	320	85	P	V
	*	5698	104.18	-	-	91.69	34.6	13.64	35.75	320	85	P	V
	5698	97.16	-	-	84.67	34.6	13.64	35.75	320	85	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 100 (5500MHz), CH 116 (5580MHz), and CH 140 (5700MHz). A Remark section at the bottom states: '1. No other spurious found. 2. All results are PASS against Peak and Average limit line.'



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5457.52	55.89	-18.11	74	43.91	34.6	13.21	35.83	138	274	P	H
		5468.88	59.15	-9.15	68.3	47.14	34.6	13.23	35.82	138	274	P	H
		5460	45.14	-8.86	54	33.16	34.6	13.21	35.83	138	274	A	H
	*	5500	102.29	-	-	90.22	34.6	13.27	35.8	138	274	P	H
		5500	95.41	-	-	83.34	34.6	13.27	35.8	138	274	A	H
		5422.96	54.6	-19.4	74	42.61	34.67	13.17	35.85	309	91	P	V
		5468.88	56.8	-11.5	68.3	44.79	34.6	13.23	35.82	309	91	P	V
		5460	44.31	-9.69	54	32.33	34.6	13.21	35.83	309	91	A	V
	*	5500	99.97	-	-	87.9	34.6	13.27	35.8	309	91	P	V
	5500	92.71	-	-	80.64	34.6	13.27	35.8	309	91	A	V	
802.11n HT20 CH 140 5700MHz	!	5730.04	65.06	-3.24	68.3	52.56	34.67	13.6	35.77	110	264	P	H
	*	5704	103.43	-	-	90.94	34.63	13.62	35.76	110	264	P	H
		5704	96.67	-	-	84.18	34.63	13.62	35.76	110	264	A	H
	!	5725.16	65.01	-3.29	68.3	52.51	34.67	13.6	35.77	285	85	P	V
	*	5698	105.3	-	-	92.81	34.6	13.64	35.75	285	85	P	V
		5698	98.26	-	-	85.77	34.6	13.64	35.75	285	85	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		10999	46.07	-27.93	74	51.48	39.93	16.45	61.79	300	0	P	H
		16500	60.31	-7.99	68.3	57.86	43.11	21.85	62.51	100	281	P	H
		10999	46.11	-27.89	74	51.52	39.93	16.45	61.79	100	360	P	V
		16494	58.19	-10.11	68.3	55.78	43.09	21.84	62.52	312	78	P	V
802.11n HT20 CH 116 5580MHz		11159.16	45.34	-28.66	74	50.44	40.02	16.72	61.84	100	360	P	H
		16740	60.11	-8.19	68.3	57.18	43.35	21.91	62.33	100	280	P	H
		11159.16	45.28	-28.72	74	50.38	40.02	16.72	61.84	100	360	P	V
		16740	57.19	-11.11	68.3	54.26	43.35	21.91	62.33	275	154	P	V
802.11n HT20 CH 140 5700MHz		11399.39	45.81	-28.19	74	50.47	40.15	17.1	61.91	300	0	P	H
		11399.39	45.19	-28.81	74	49.85	40.15	17.1	61.91	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5459.92	56.63	-17.37	74	44.65	34.6	13.21	35.83	100	255	P	H
	!	5469.68	62.46	-5.84	68.3	50.45	34.6	13.23	35.82	100	255	P	H
		5459.92	45.94	-8.06	54	33.96	34.6	13.21	35.83	100	255	A	H
	*	5506	99.72	-	-	87.65	34.6	13.27	35.8	100	255	P	H
		5506	92.65	-	-	80.58	34.6	13.27	35.8	100	255	A	H
		5742.76	53.98	-14.32	68.3	41.49	34.7	13.57	35.78	100	255	P	H
		5454.64	54.78	-19.22	74	42.8	34.6	13.21	35.83	307	87	P	V
		5468.08	57.79	-10.51	68.3	45.78	34.6	13.23	35.82	307	87	P	V
		5460	44.29	-9.71	54	32.31	34.6	13.21	35.83	307	87	A	V
	*	5506	96.25	-	-	84.18	34.6	13.27	35.8	307	87	P	V
		5506	89.75	-	-	77.68	34.6	13.27	35.8	307	87	A	V
		5728.36	54.53	-13.77	68.3	42.03	34.67	13.6	35.77	307	87	P	V
802.11n HT40 CH 134 5670MHz		5361.52	55.05	-18.95	74	41.23	35.54	11.6	33.32	113	255	P	H
	!	5464.4	53.51	-14.79	68.3	39.57	35.64	11.61	33.31	113	255	P	H
		5458.96	45.86	-8.14	54	31.95	35.62	11.6	33.31	113	255	A	H
	*	5674	105.48	-	-	91.09	35.82	11.94	33.37	113	255	P	H
		5674	98.59	-	-	84.2	35.82	11.94	33.37	113	255	A	H
		5726.28	64.39	-3.91	68.3	49.98	35.84	11.95	33.38	113	255	P	H
		5436.24	54.36	-19.64	74	40.46	35.61	11.6	33.31	269	88	P	V
		5466.32	53.44	-14.86	68.3	39.5	35.64	11.61	33.31	269	88	P	V
		5454.48	45.78	-8.22	54	31.87	35.62	11.6	33.31	269	88	A	V
	*	5674	103.52	-	-	89.13	35.82	11.94	33.37	269	88	P	V
	5674	96.54	-	-	82.15	35.82	11.94	33.37	269	88	A	V	
	5725.56	64.19	-4.11	68.3	49.78	35.84	11.95	33.38	269	88	P	V	



Band 3 - 5470~5725MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for channels 102, 110, and 134, and a Remark section.



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5460.08	61.81	-6.49	68.3	49.83	34.6	13.21	35.83	100	264	P	H
	!	5466.48	64.75	-3.55	68.3	52.74	34.6	13.23	35.82	100	264	P	H
		5458.8	47.14	-6.86	54	35.16	34.6	13.21	35.83	100	264	A	H
	*	5524	94.65	-	-	82.57	34.57	13.3	35.79	100	264	P	H
		5524	88.23	-	-	75.94	34.57	13.3	35.79	100	264	A	H
		5762.68	54.6	-13.7	68.3	42.12	34.73	13.55	35.8	100	264	P	H
		5457.04	55.96	-18.04	74	43.98	34.6	13.21	35.83	321	94	P	V
	!	5468.56	63.12	-5.18	68.3	51.11	34.6	13.23	35.82	321	94	P	V
		5458.64	45.07	-8.93	54	33.09	34.6	13.21	35.83	321	94	A	V
	*	5530	92.61	-	-	80.53	34.57	13.3	35.79	321	94	P	V
		5530	85.73	-	-	73.65	34.57	13.3	35.79	321	94	A	V
	5756.28	54.43	-13.87	68.3	41.95	34.73	13.55	35.8	321	94	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		11060	46.3	-27.7	74	51.58	39.97	16.56	61.81	300	0	P	H
		11060	46.4	-27.6	74	51.68	39.97	16.56	61.81	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		113.42	14.88	-28.62	43.5	33.99	17.94	1.72	38.77	-	-	P	H
		236.61	21.46	-24.54	46	38.96	18.57	2.42	38.49	-	-	P	H
		425.76	19.59	-26.41	46	30.08	23.17	3.21	36.87	-	-	P	H
		592.6	22.15	-23.85	46	28.7	25.56	3.66	35.77	-	-	P	H
		759.44	25.35	-20.65	46	28.45	26.58	4.23	33.91	-	-	P	H
		880.69	27.06	-18.94	46	28.25	27.32	4.44	32.95	100	0	P	H
		30	22.37	-17.63	40	34.76	25.5	1.11	39	-	-	P	V
		46.49	24.37	-15.63	40	45.38	16.53	1.19	38.73	100	0	P	V
		114.39	18.66	-24.84	43.5	37.77	17.93	1.73	38.77	-	-	P	V
		215.27	25.33	-18.17	43.5	44.09	17.25	2.31	38.32	-	-	P	V
		652.74	24.85	-21.15	46	29.9	25.89	3.95	34.89	-	-	P	V
		963.14	29.05	-24.95	54	28.14	28.03	4.73	31.85	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location mode: WLAN 5G11AC80 CH42 + BT5.0 CH39

WIFI 802.11ac VHT80 / BLE (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.6	57.4	-16.6	74	46.15	34.3	12.97	36.02	362	257	P	H
	!	5149.76	47.24	-6.76	54	35.99	34.3	12.97	36.02	362	257	A	H
	*	5206	94.92	-	-	83.47	34.4	13.04	35.99	362	257	P	H
		5206	87.24	-	-	75.79	34.4	13.04	35.99	362	257	A	H
		5399.28	54.5	-19.5	74	42.35	34.7	13.31	35.86	362	257	P	H
		5352.84	43.27	-10.73	54	31.32	34.6	13.24	35.89	362	257	A	H
		5146.88	55.2	-18.8	74	43.95	34.3	12.97	36.02	324	96	P	V
		5150	45.21	-8.79	54	33.96	34.3	12.97	36.02	324	96	A	V
	*	5200	90.62	-	-	79.17	34.4	13.04	35.99	324	96	P	V
		5200	82.36	-	-	70.91	34.4	13.04	35.99	324	96	A	V
		5377.14	53.15	-20.85	74	41.13	34.63	13.27	35.88	324	96	P	V
		5398.56	43	-11	54	30.85	34.7	13.31	35.86	324	96	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI 802.11ac VHT80 / BLE (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		2483.86	55.38	-18.62	74	50.59	32.37	8.96	36.54	100	140	P	H
		2483.5	45.34	-8.66	54	40.55	32.37	8.96	36.54	100	140	A	H
		2480	95.77	-	-	90.98	32.37	8.96	36.54	100	140	P	H
		2480	93.21	-	-	88.42	32.37	8.96	36.54	100	140	A	H
		2484.58	55.55	-18.45	74	50.76	32.37	8.96	36.54	391	44	P	V
		2483.5	45.39	-8.61	54	40.6	32.37	8.96	36.54	391	44	A	V
		2480	95.58	-	-	90.79	32.37	8.96	36.54	391	44	P	V
		2480	93	-	-	88.21	32.37	8.96	36.54	391	44	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI 802.11ac VHT80 / BLE (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		4960	41.15	-32.85	74	57.76	34	12.8	63.41	300	0	P	H
		7440	43.09	-30.91	74	55.45	35.8	15.71	63.87	300	0	P	H
		10419.5	44.43	-23.87	68.3	52.11	37.7	18.64	64.02	100	0	P	H
		4960	41.5	-32.5	74	58.11	34	12.8	63.41	100	360	P	V
		7440	43.85	-30.15	74	56.21	35.8	15.71	63.87	100	360	P	V
		10420	44.09	-24.21	68.3	51.77	37.7	18.64	64.02	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:


- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz
802.11ac VHT20	100	-	-	10Hz
802.11ac VHT80	100	-	-	10Hz

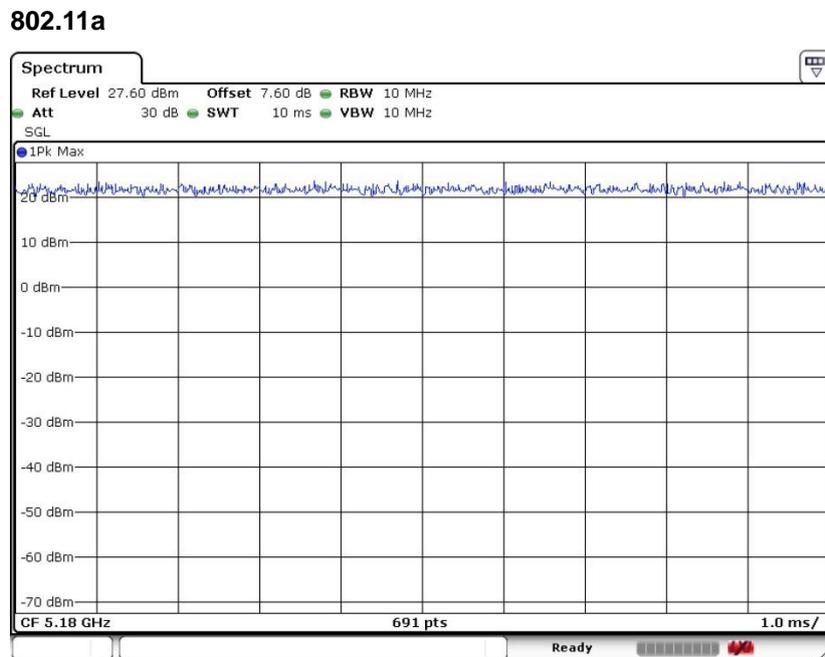




802.11n HT20

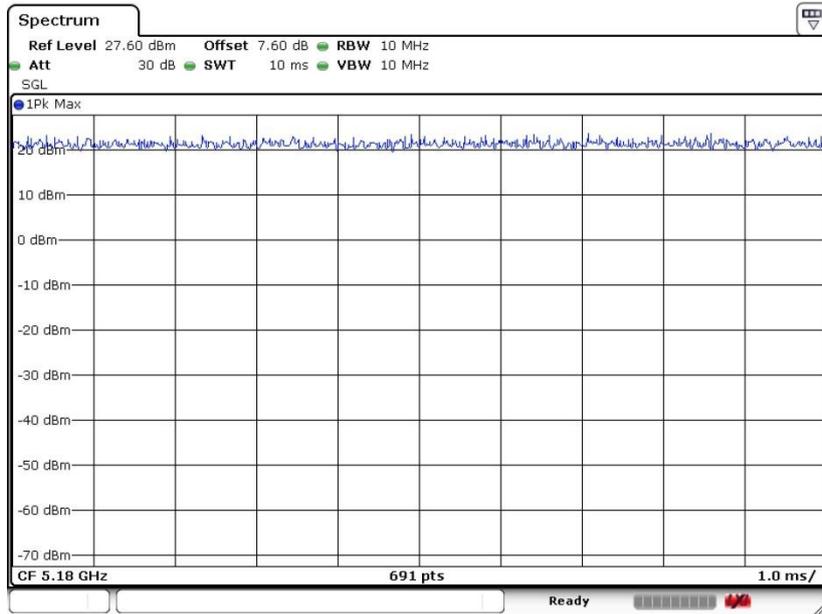


802.11n HT40

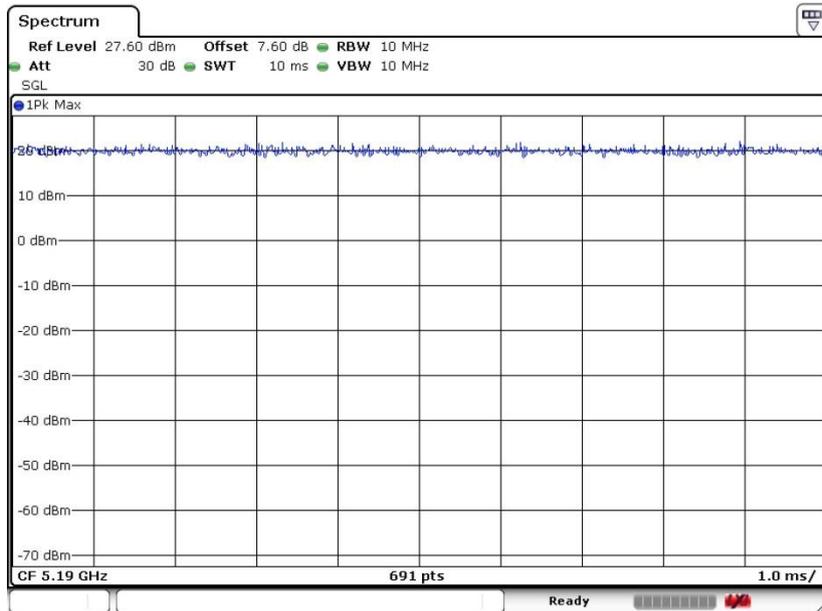



802.11ac VHT20

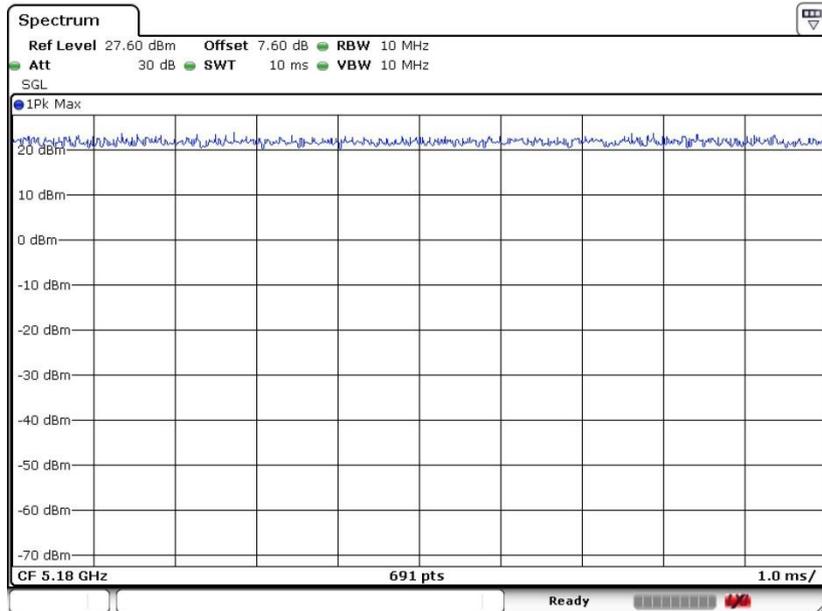

802.11ac VHT80

