



# FCC PART 15C TEST REPORT No.I21Z62289-IOT06

for

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

**Portable Tablet Computer**

**Lenovo TB-J606L**

**With**

**FCC ID: O57TBJ606L**

**Hardware Version: Lenovo TB-J606L**

**Software Version: TB-J606L\_RF01\_210805**

**Issued Date: 2021-12-09**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z62289-IOT06	Rev.0	1st edition	2021-12-09

## **CONTENTS**

<b>CONTENTS .....</b>	<b>3</b>
<b>1. TEST LATORATORY.....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT .....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT(AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	7
3.4. GENERAL DESCRIPTION.....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
6.1. SUMMARY OF TEST RESULTS.....	9
6.2. STATEMENTS.....	9
6.3. TEST CONDITIONS .....	9
<b>7. TEST EQUIPMENTS UTILIZED .....</b>	<b>10</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
8.1. TRANSMITTER OUTPUT POWER .....	11
8.2. PEAK POWER SPECTRAL DENSITY.....	11
8.3. OCCUPIED 6DB BANDWIDTH.....	11
8.4. BAND EDGES COMPLIANCE .....	11
8.5. SPURIOUS EMISSIONS .....	11
8.6. AC POWER-LINE CONDUCTED EMISSION .....	11
<b>ANNEX A: EUT PARAMETERS.....</b>	<b>11</b>
<b>ANNEX B: MEASUREMENT RESULTS.....</b>	<b>12</b>
B.1. MEASUREMENT METHOD .....	12
B.2. MAXIMUM PEAK OUTPUT POWER .....	13



B.2.1 ANTENNA GAIN..... 13

8.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED ..... 13

A.3. PEAK POWER SPECTRAL DENSITY ..... 14

B.4. OCCUPIED 6DB BANDWIDTH ..... 15

B.5. TRANSMITTER SPURIOUS EMISSION..... 23

B.5.1 TRANSMITTER SPURIOUS EMISSION - RADIATED ..... 23

B.6. BAND EDGES COMPLIANCE ..... 38

B.6.1 BAND EDGES - RADIATED ..... 38

B.7. AC POWERLINE CONDUCTED EMISSION ..... 48

**ANNEX C: EUT PARAMETERS ..... 53**

**ANNEX D: ACCREDITATION CERTIFICATE ..... 53**

## 1. TEST LABORATORY

### 1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### 1.3. Testing Environment

Normal Temperature: 15-25°C  
Relative Humidity: 20-75%

### 1.4. Project date


Testing Start Date: 2020-09-28  
Testing End Date: 2021-12-09

### 1.5. Signature



---

Xie Xiuzhen  
( Prepared this test report )



---

Zheng Wei  
(Reviewed this test report)



---

Hu Xiaoyu  
(Approved this test report)



## **2. CLIENT INFORMATION**

### **2.1. Applicant Information**

Company Name: Lenovo (Shanghai) Electronics Technology Co., Ltd.  
Address: Section 304-305, Building No. 4, # 222, Meiyue Road, China  
(Shanghai) Pilot Free Trade Zone  
City: Shanghai  
Postal Code: /  
Country: China  
Telephone: +86 18116118237  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Lenovo PC HK Limited  
Address: 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay,  
Hong Kong, P.R.China  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86 18116118237  
Fax: /

### **3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY**

#### **EQUIPMENT(AE)**

##### **3.1. About EUT**

Description	Portable Tablet Computer
Model name	Lenovo TB-J606L
FCC ID	O57TBJ606L
WLAN Frequency Band	ISM Band: 5725MHz~5850MHz
Type of modulation	OFDM
Voltage	3.8V

##### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
EUT1	/	Lenovo TB-J606L	TB-J606L_RF01_200908
EUT2	/	Lenovo TB-J606L	TB-J606L_RF01_200908
EUT3	/	Lenovo TB-J606L	TB-J606L_RF01_200908
EUT3	863025056877957	Lenovo TB-J606L	TB-J606L_RF01_210805
EUT5	863025056877916	Lenovo TB-J606L	TB-J606L_RF01_210805

\*EUT ID: is used to identify the test sample in the lab internally.

##### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1-1	Charger
AE1-2	Charger
AE8	USB Cable
AE15	USB Cable
AE9	Battery

###### **AE1-1**

Model	MC-201
Manufacturer	Acbel
Length of cable	/

###### **AE1-2**

Model	MC-201
Manufacturer	Chenyang
Length of cable	/

###### **AE8**

Model	S50B-05200100
Manufacturer	Saibao
Length of cable	/

AE15

Model	L50B-05200100
Manufacturer	Liqi
Length of cable	/

AE9

Model	L20D2P32
Manufacturer	SCUD
Capacitance	7500mAh
Nominal voltage	3.86V

\*AE ID: is used to identify the test sample in the lab internally.

**3.4. General Description**

Equipment Under Test (EUT) is a model of Portable Tablet Computer with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

**4. REFERENCE DOCUMENTS**

**4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

**4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C and E:	
FCC Part15	15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.407 General technical requirements	2018
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12
KDB 558074 D01	Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.407 (a)	/	P
Peak Power Spectral Density	15.407 (a)	/	P
Occupied 6dB Bandwidth	15.407 (e)	/	P
Band Edges Compliance - Conducted& Radiated	15.407 (b)	/	P
Transmitter Spurious Emission - Conducted	15.407	/	P
Transmitter Spurious Emission - Radiated	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

All the test results are derived from test report No.I20Z61670-IOT12, except the result of output power,transmitter spurious emission-radiated,ac power-line conducted emission.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

## 7. TEST EQUIPMENTS UTILIZED

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-24
2	LISN	ENV216	101200	R&S	1 year	2022-05-30
3	Test Receiver	ESCI	100344	R&S	1 year	2022-02-23
4	Shielding Room	S81	/	ETS-Lindgren	/	/
5	Attenuator	10dB/2W	/	Rosenberger	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	FSW67	103290	Rohde & Schwarz	1 year	2022-01-20
2	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	1 year	2022-03-22
3	Dual-Ridge Waveguide Horn Antenna	3115	00167250	ETS-Lindgren	1 year	2022-07-01

## 8. Measurement Uncertainty

### 8.1. Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. Occupied 6dB Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Spurious Emissions

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.86
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.26
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.28

### 8.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.10dB,k=2

## ANNEX A: EUT parameters


Disclaimer: the antenna gain and the worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX B: MEASUREMENT RESULTS

### B.1. Measurement Method

#### B.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

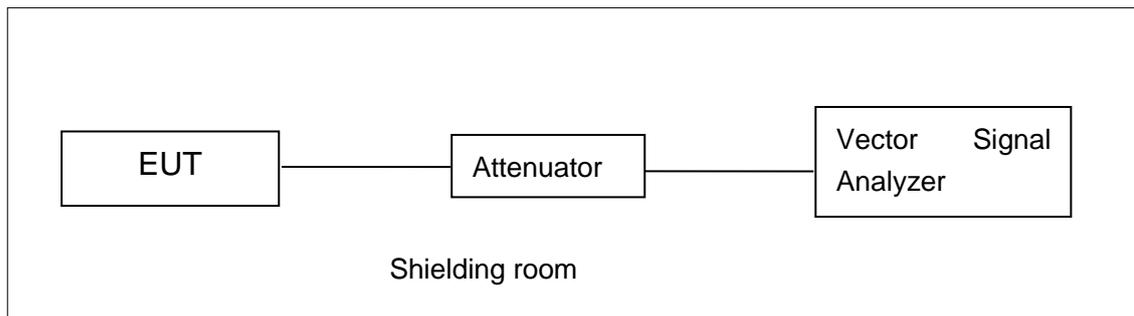


#### B.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

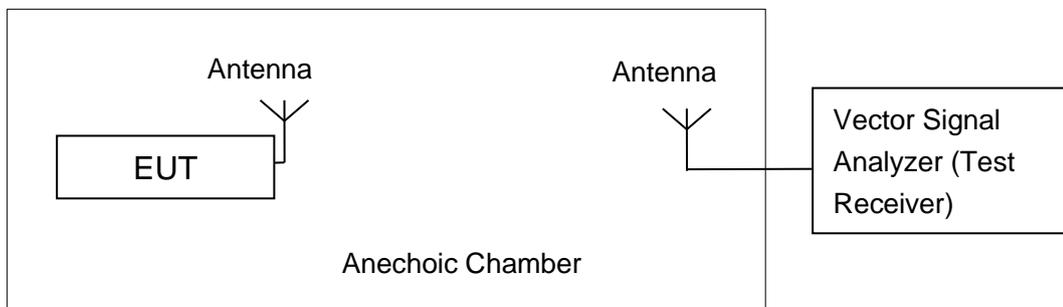

The measurement is made according to ANSI C63.10.

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

## B.2. Maximum Peak Output Power

### Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30

### B.2.1 Antenna Gain

Antenna gain is -3.6dBi and the value is supplied by the applicant or manufacturer.

### 8.2.2. Maximum Average Output Power-Conducted

Method of Measurement: See ANSI C63.10-clause 12.3.2.2 Method SA-1

#### 802.11a mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz (Ch165)
802.11a	14.02	14.40	14.63

#### 802.11n-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11n(20MHz)	14.32	14.45	14.44

#### 802.11ac-HT20 mode

Mode	Test Result (dBm)		
	5745MHz (Ch149)	5785MHz (Ch157)	5825MHz(Ch165)
802.11ac(20MHz)	14.35	14.06	14.65

#### 802.11n-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11n(40MHz)	14.25	13.86

#### 802.11ac-HT40 mode

Mode	Test Result (dBm)	
	5755MHz (Ch151)	5795MHz(Ch159)
802.11ac(40MHz)	13.84	14.23

#### 802.11ac-HT80 mode

Mode	Test Result (dBm)
	5775MHz (Ch155)
802.11ac(80MHz)	14.07

**Conclusion: PASS**

### B.3. Peak Power Spectral Density

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz

The measurement is made according to ANSI C63.10 and KDB789033 D02

#### Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### Measurement Results:

Mode	Channel	Power Spectral Density ( dBm/500kHz )	Conclusion
802.11a	149	2.42	P
	157	2.35	P
	165	2.25	P
802.11n HT20	149	0.83	P
	157	0.90	P
	165	0.82	P
802.11ac HT20	149	1.90	P
	157	2.29	P
	165	1.79	P
802.11n HT40	151	-1.05	P
	159	-0.95	P
802.11ac HT40	151	-1.67	P
	159	-1.54	P
802.11ac HT80	155	-4.48	P

**Conclusion: PASS**

#### B.4. Occupied 6dB Bandwidth

##### Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.407 (e)	≥ 500

The measurement is made according to KDB789033 D02 .

##### Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------

##### Measurement Result:


Mode	Channel	Occupied 6dB Bandwidth ( KHz)		conclusion
		Fig.	Value	
802.11a	149	Fig.1	15.20	P
	157	Fig.2	16.25	P
	165	Fig.3	15.50	P
802.11n HT20	149	Fig.4	16.85	P
	157	Fig.5	17.60	P
	165	Fig.6	17.60	P
802.11ac HT20	149	Fig.7	17.50	P
	157	Fig.8	16.80	P
	165	Fig.9	17.25	P
802.11n HT40	151	Fig.10	36.32	P
	159	Fig.11	36.32	P
802.11ac HT40	151	Fig.12	36.32	P
	159	Fig.13	36.32	P
802.11ac HT80	155	Fig.14	75.68	P

**Conclusion: PASS**

Test graphs as below:

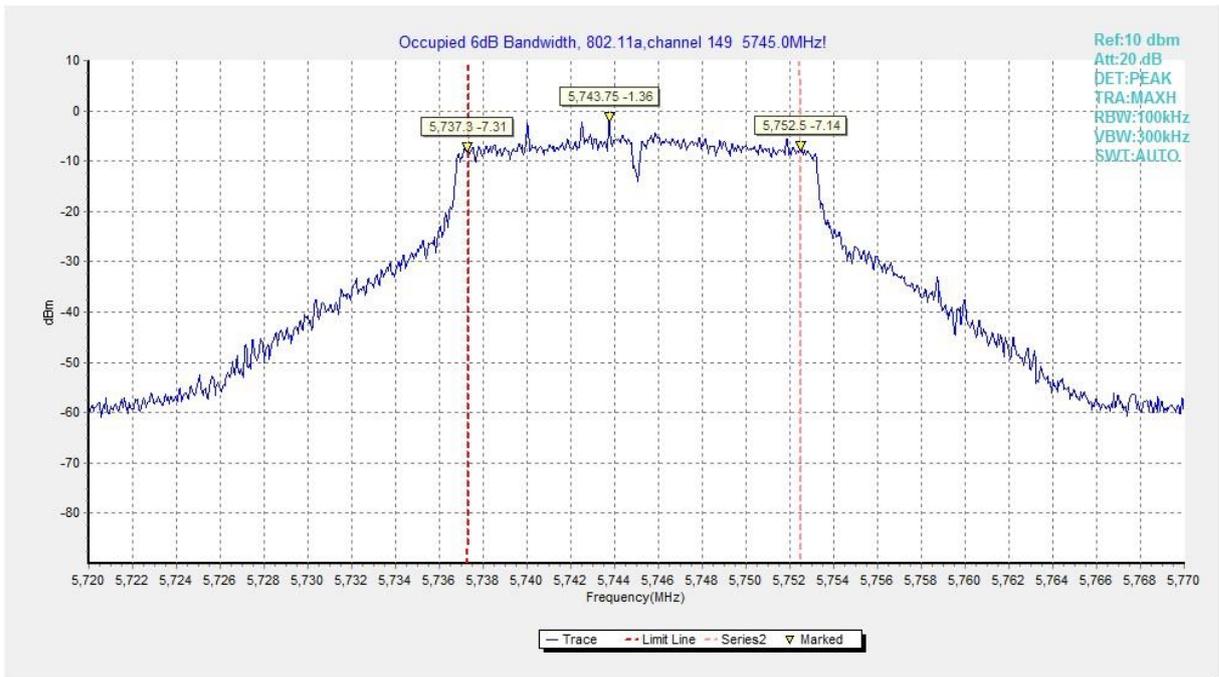

**Fig. 1 Occupied 6dB Bandwidth (802.11a, Ch 149)**

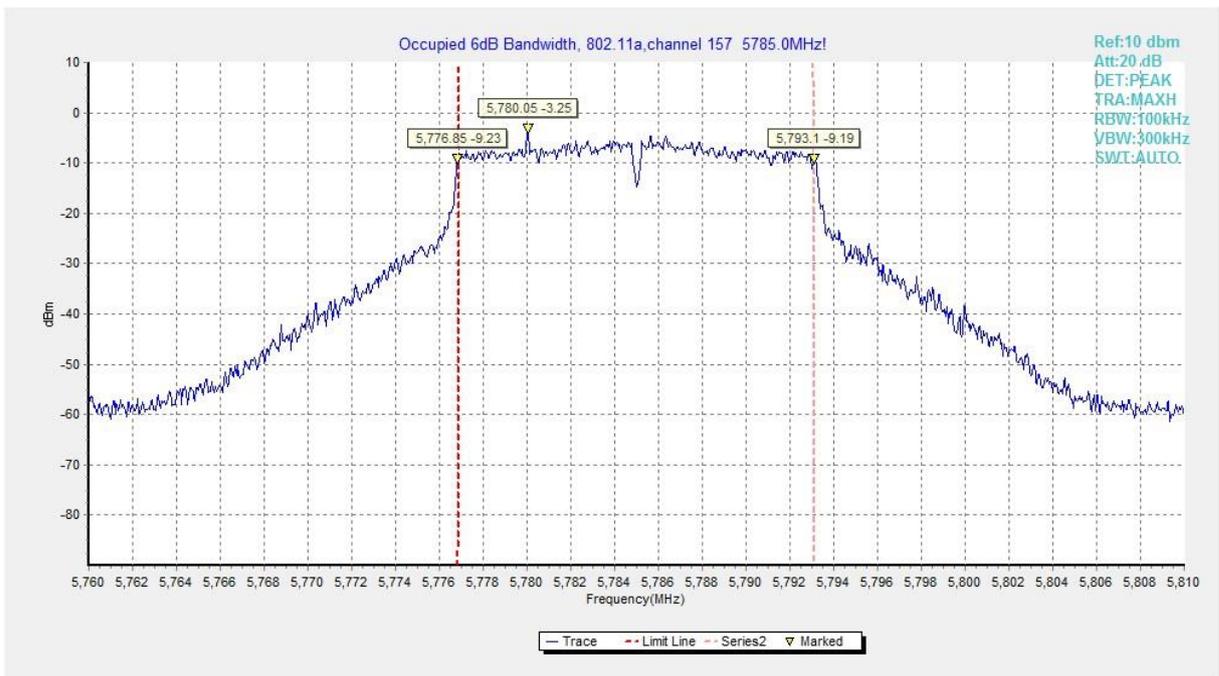

**Fig. 2 Occupied 6dB Bandwidth (802.11a, Ch 157)**

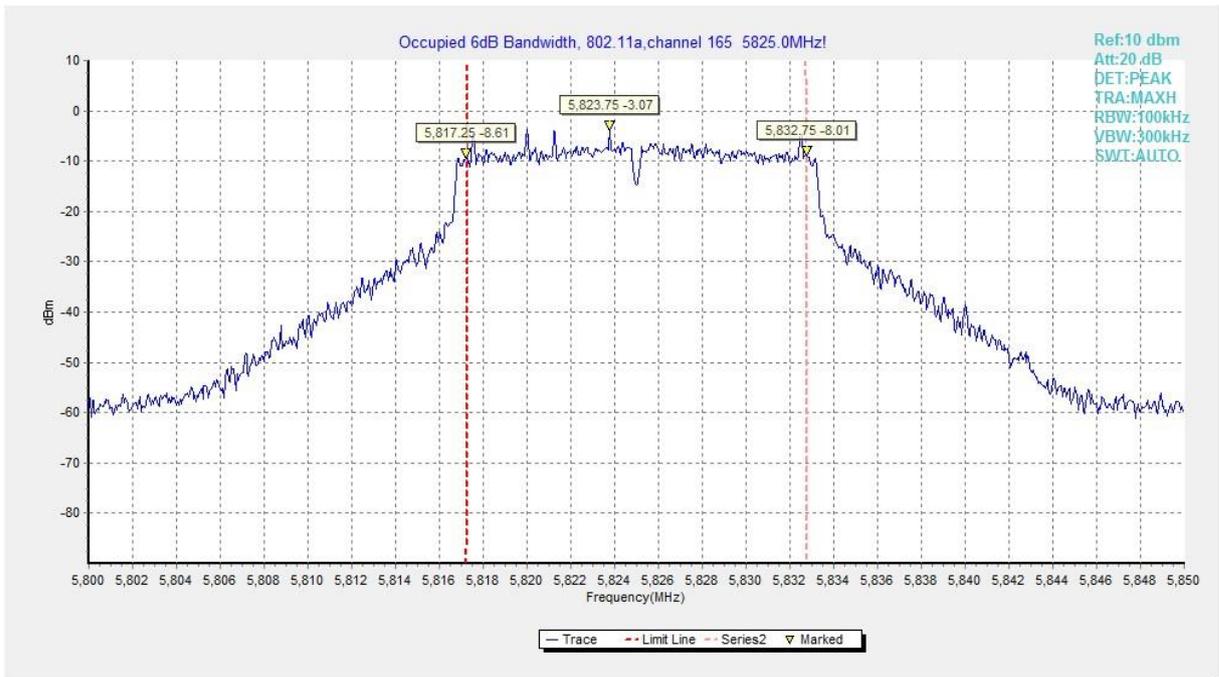


Fig. 3 Occupied 6dB Bandwidth (802.11a, Ch 165)



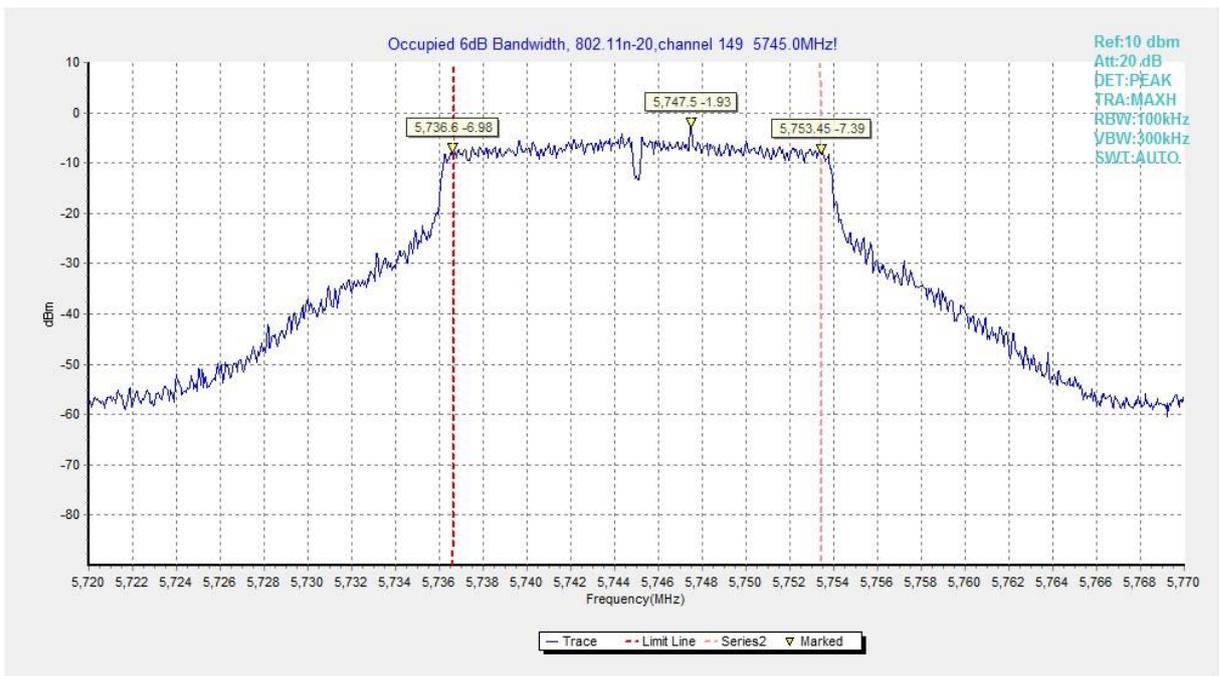



Fig. 4 Occupied 6dB Bandwidth (802.11n-HT20, Ch 149)

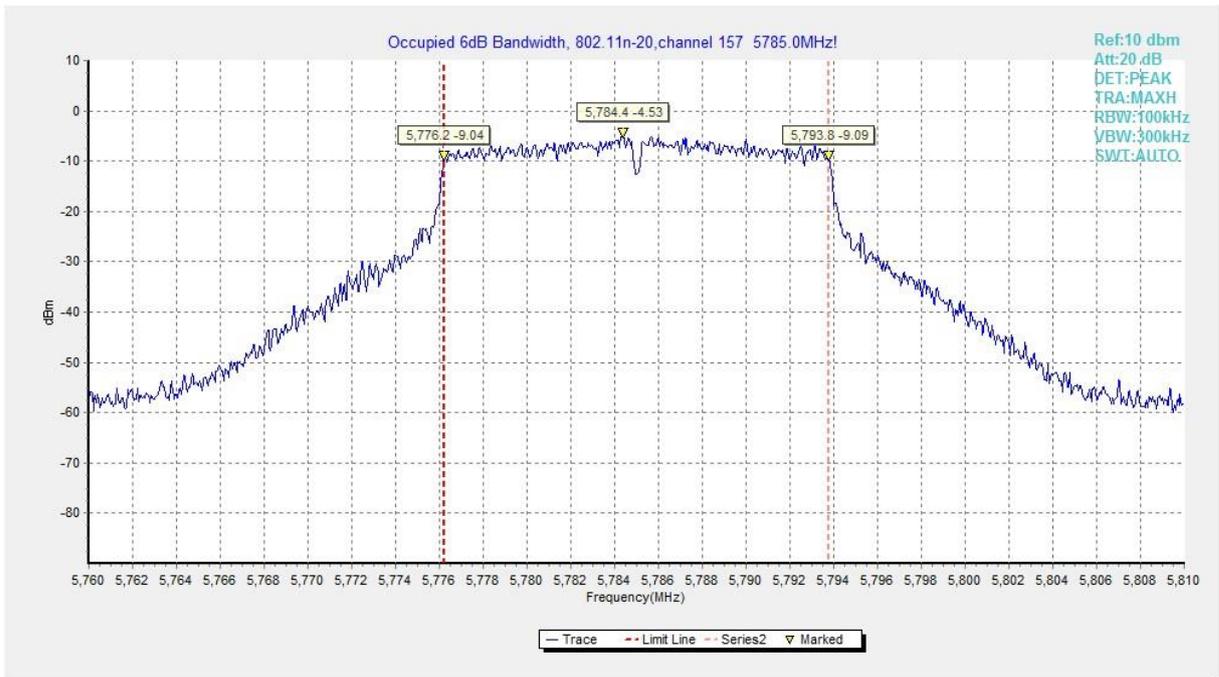


**Fig. 5 Occupied 6dB Bandwidth (802.11n-HT20, Ch 157)**

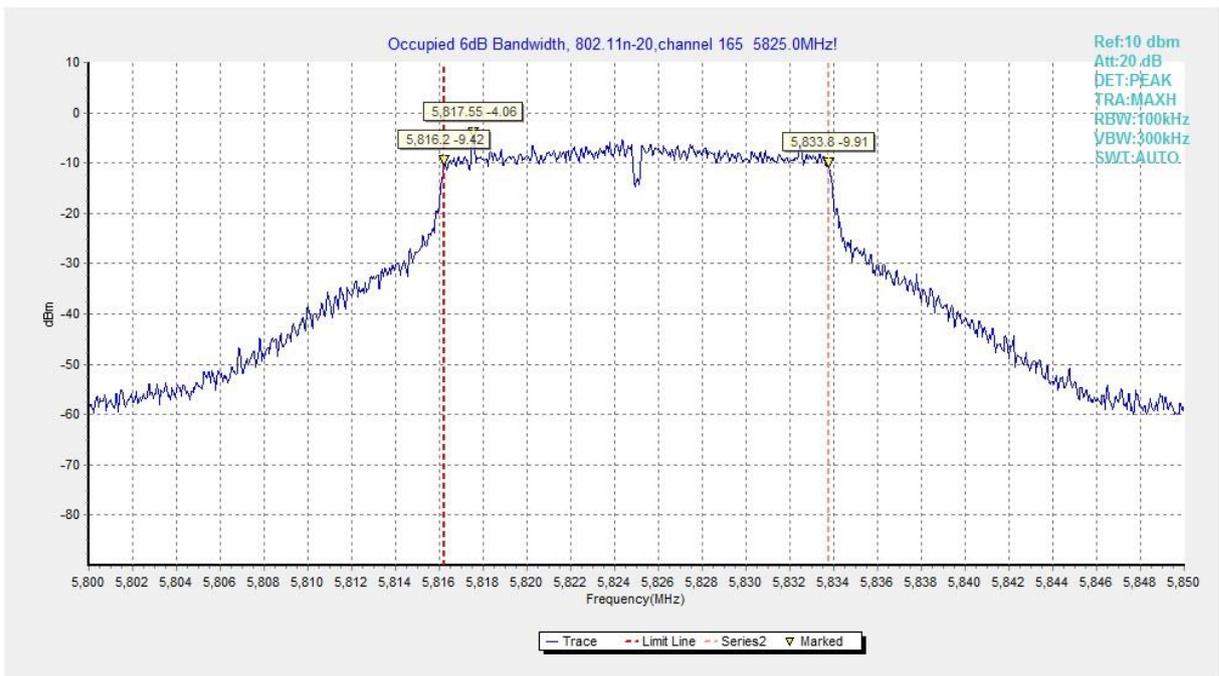


**Fig. 6 Occupied 6dB Bandwidth (802.11n-HT20, Ch 165)**

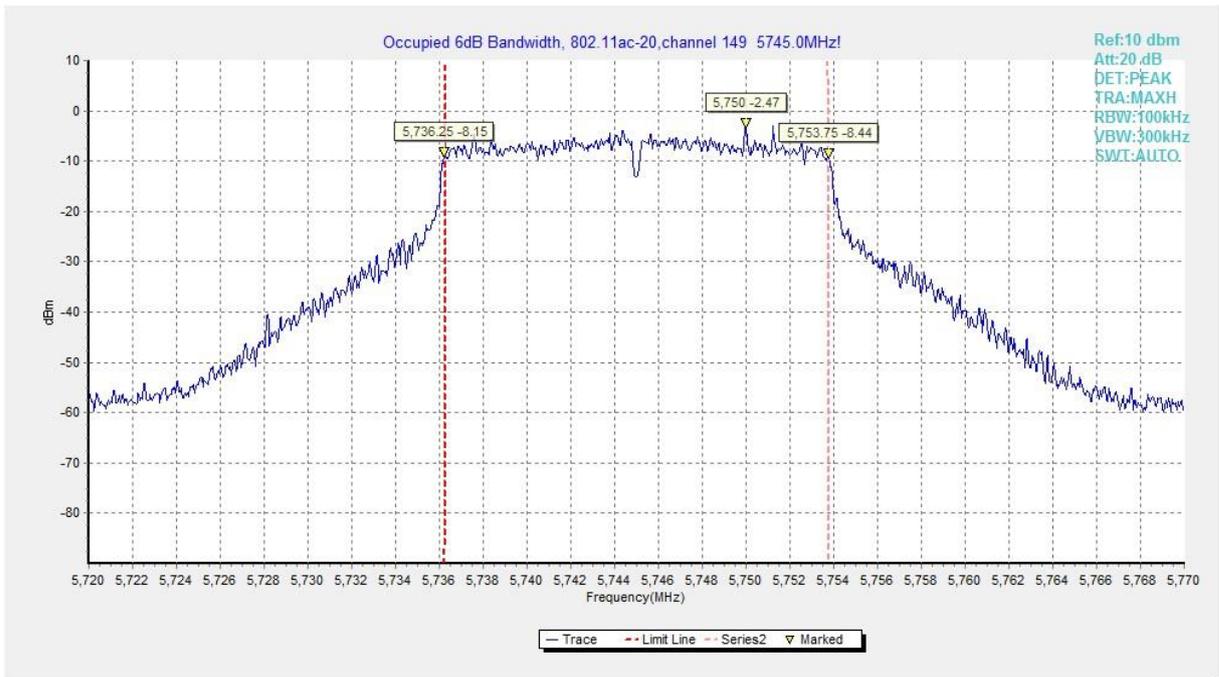


**Fig. 7 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 149)**

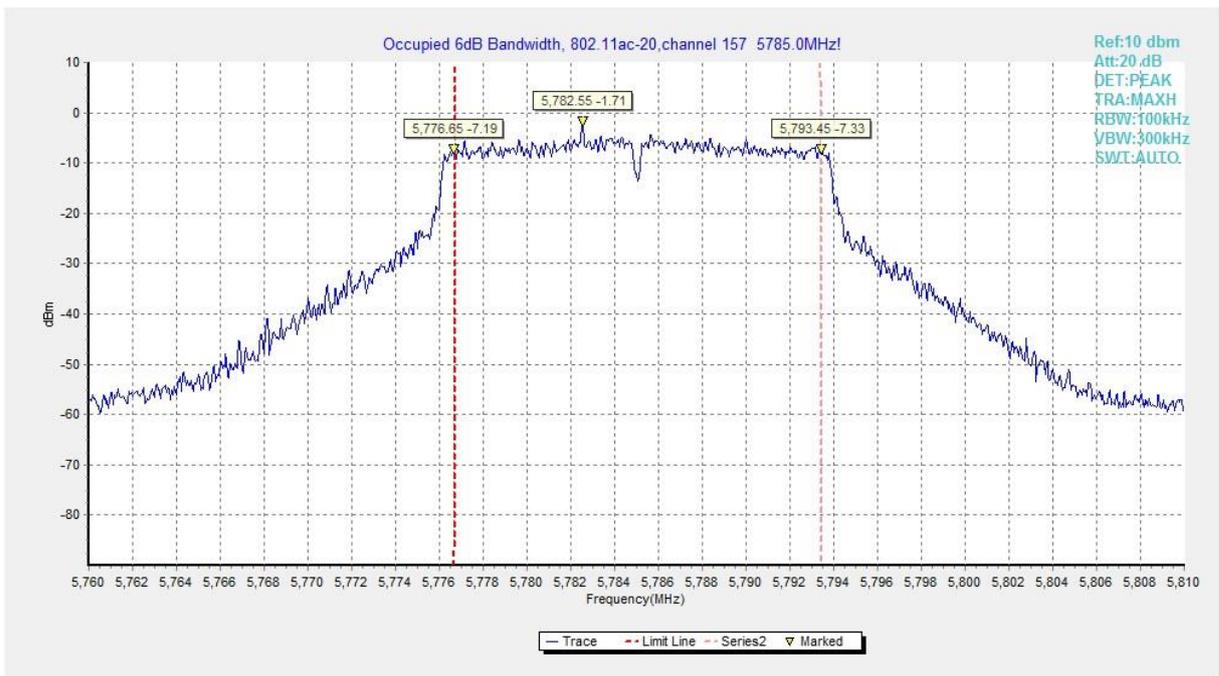


**Fig. 8 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 157)**

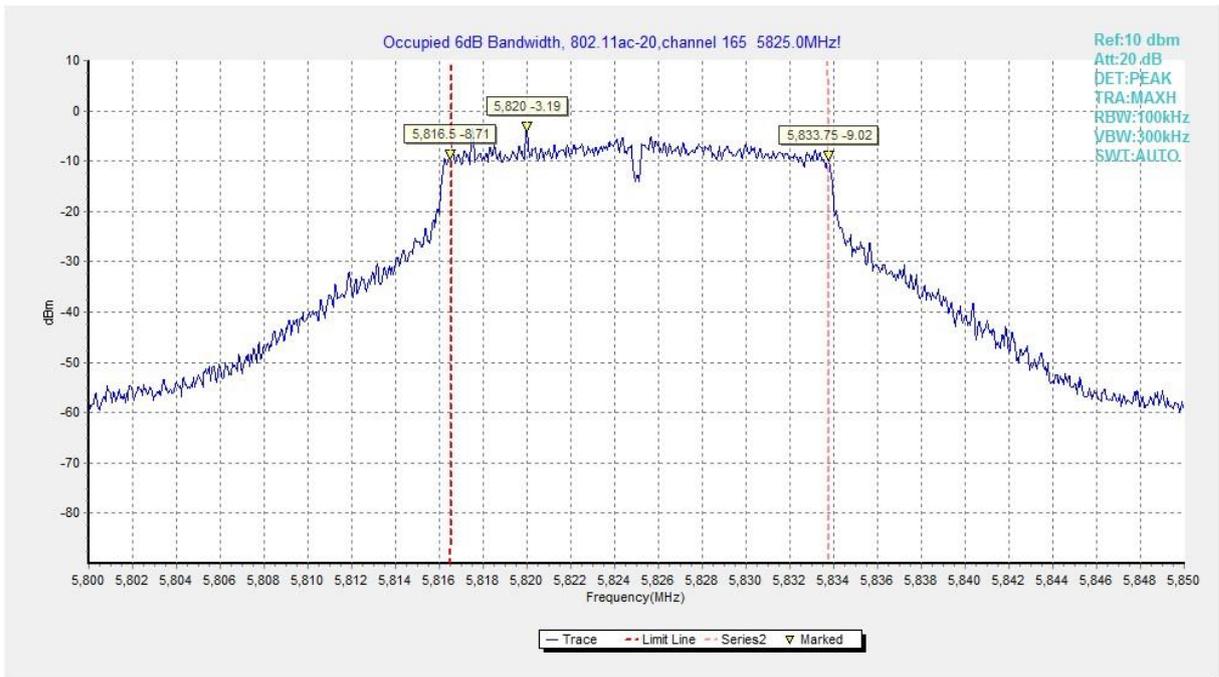


**Fig. 9 Occupied 6dB Bandwidth (802.11ac-HT20, Ch 165)**

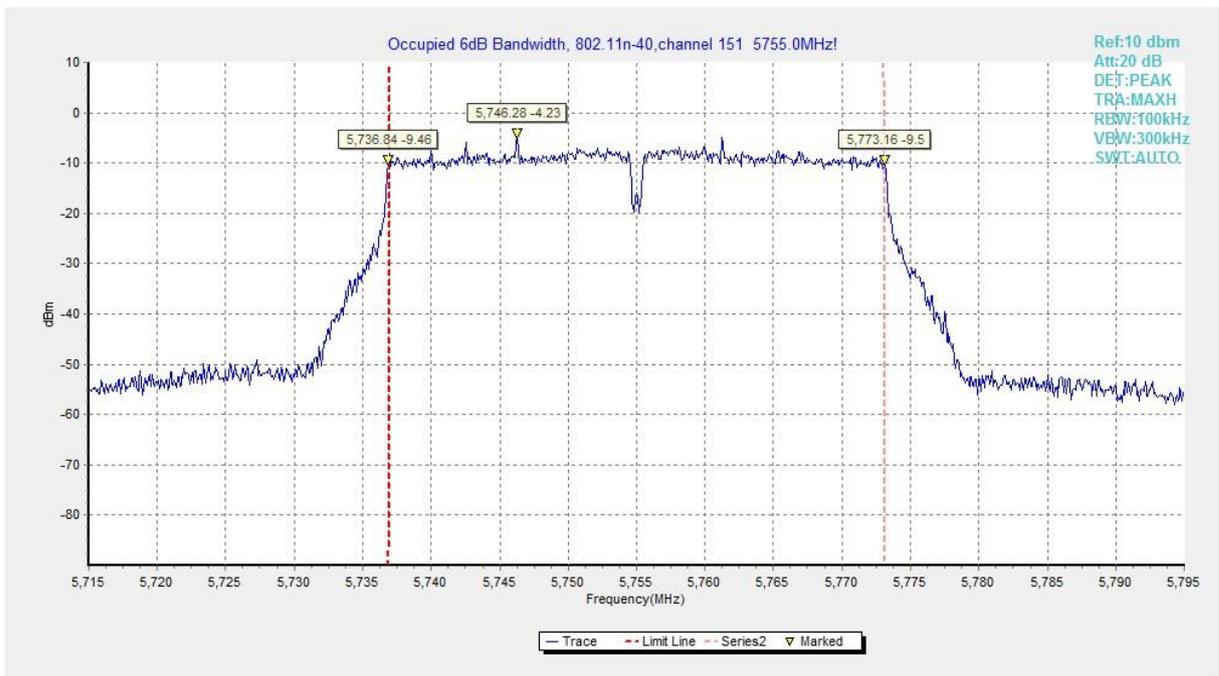


**Fig. 10 Occupied 6dB Bandwidth (802.11n-HT40, Ch 151)**

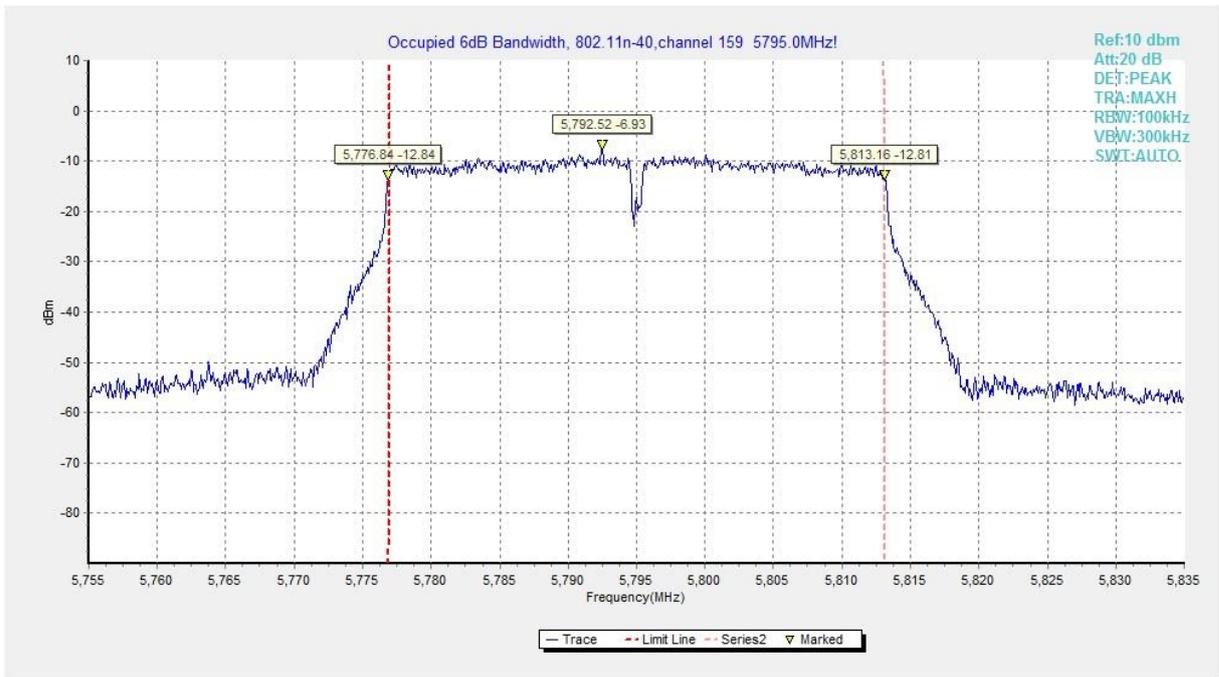


**Fig. 11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 159)**

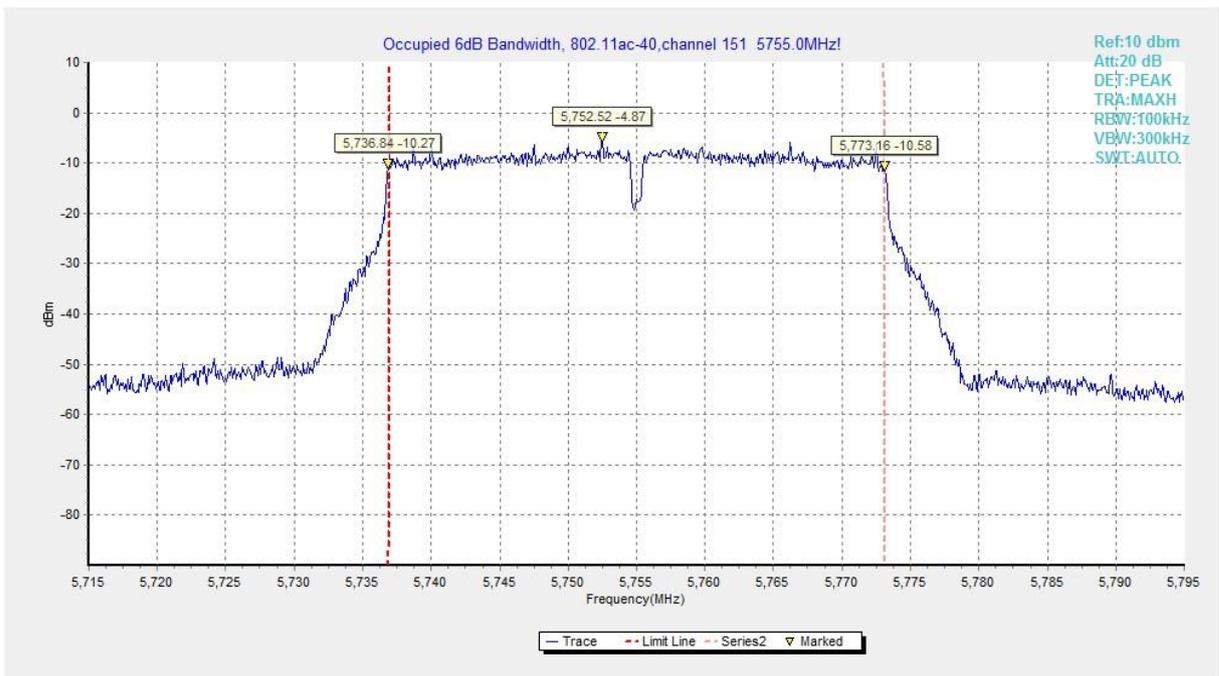

**Fig. 12 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 151)**

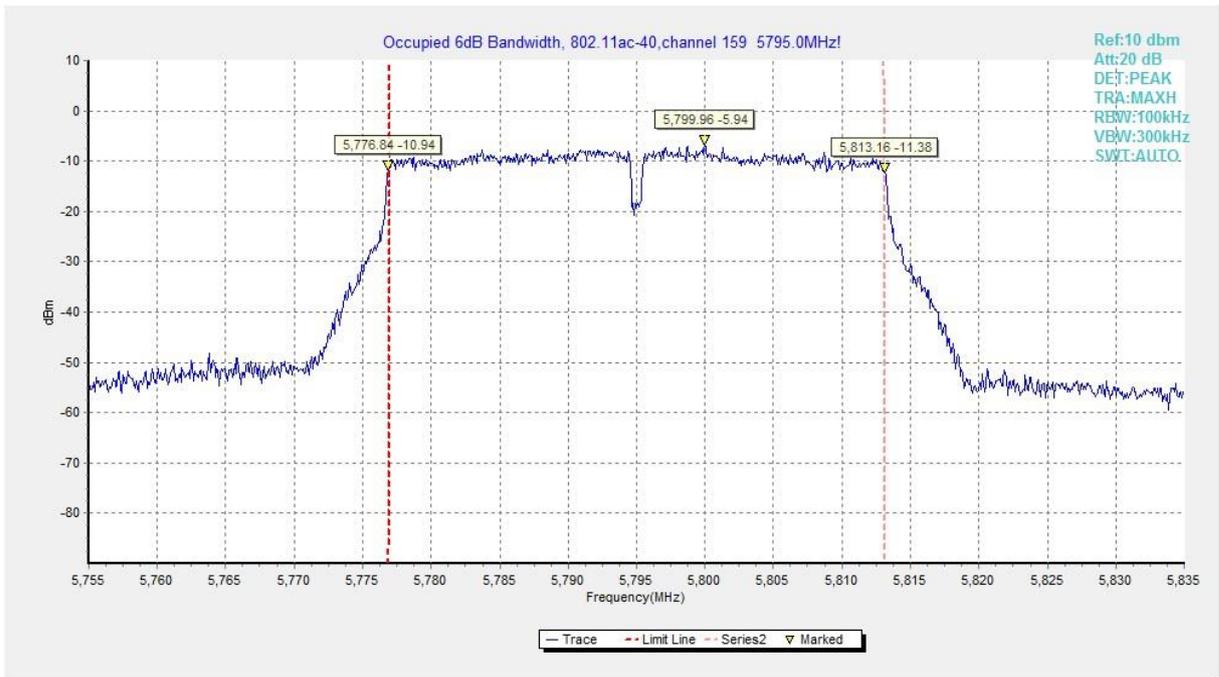

**Fig. 13 Occupied 6dB Bandwidth (802.11ac-HT40, Ch 159)**

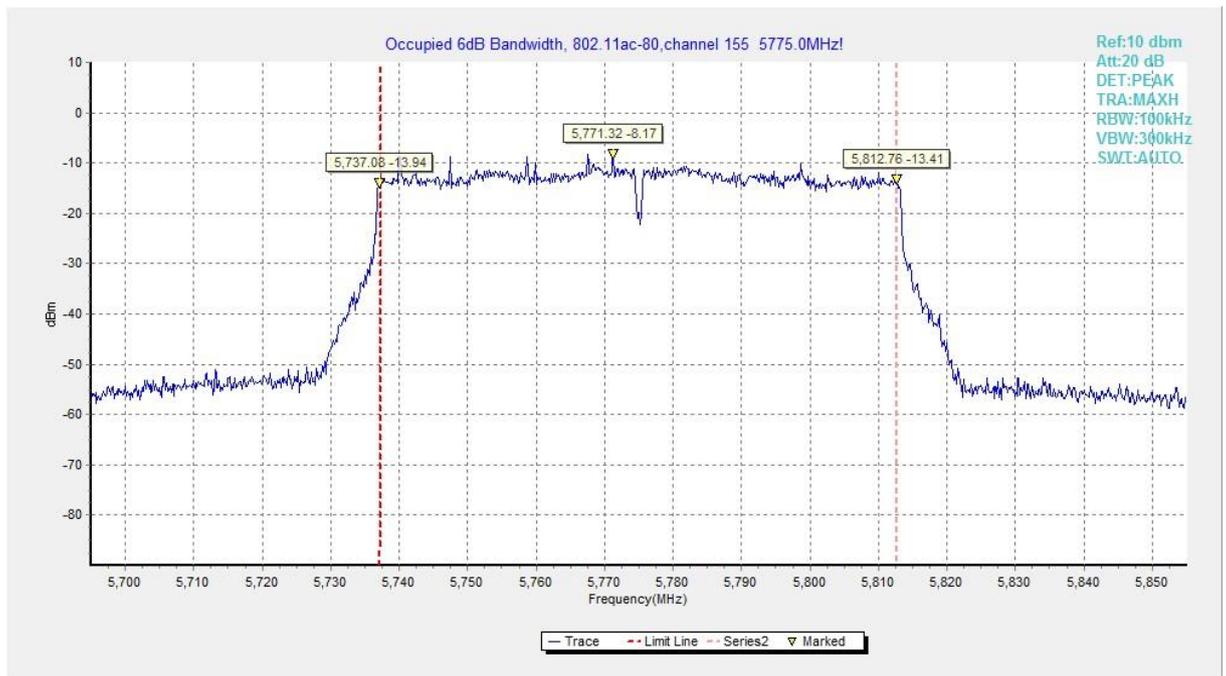

**Fig. 14 Occupied 6dB Bandwidth (802.11ac-HT80, Ch 155)**

## B.5. Transmitter Spurious Emission

### Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10 .

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Measurement Uncertainty:

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	0.63
2GHz ≤ f ≤ 3.6GHz	0.82
3.6GHz ≤ f ≤ 8GHz	1.55
8GHz ≤ f ≤ 20GHz	1.86
20GHz ≤ f ≤ 22GHz	1.90
22GHz ≤ f ≤ 26GHz	2.20

### B.5.1 Transmitter Spurious Emission - Radiated

#### Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC 47 CFR Part 15.407	5725MHz~5850MHz	< -27

The measurement is made according to ANSI C63.10.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Limit in restricted band:

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBμV/m)	Measurement distance(m)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

#### Measurement Results:

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

**Average Results:**

**802.11a**

Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	$P_{Mea}$ (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
17985.2	47.2	-25.5	43.4	29.3	H	54.0	6.8
17986.8	47.1	-25.5	43.4	29.2	H	54.0	6.9
17993.4	47.0	-25.5	43.4	29.1	V	54.0	7.0
17976.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17986.3	46.9	-25.5	43.4	29.0	H	54.0	7.1
17976.4	46.9	-25.5	43.4	29.0	H	54.0	7.1

Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	$P_{Mea}$ (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
17987.9	47.1	-25.5	43.4	29.2	H	54.0	6.9
17996.2	47.1	-25.5	43.4	29.2	H	54.0	6.9
17976.9	47.0	-25.5	43.4	29.1	V	54.0	7.0
17985.7	46.9	-25.5	43.4	29.0	H	54.0	7.1
17969.8	46.9	-25.5	43.4	29.0	H	54.0	7.1
17997.8	46.9	-25.5	43.4	29.0	H	54.0	7.1

Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	$P_{Mea}$ (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
17956.6	47.3	-25.5	43.4	29.4	H	54.0	6.7
17998.9	47.2	-25.5	43.4	29.3	H	54.0	6.8
17974.7	47.1	-25.5	43.4	29.2	V	54.0	6.9
17996.2	47.1	-25.5	43.4	29.2	H	54.0	6.9
17992.3	47.1	-25.5	43.4	29.2	H	54.0	6.9
17987.4	47.1	-25.5	43.4	29.2	H	54.0	6.9

**802.11n-HT20**

## Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17959.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17983.0	47.0	-25.5	43.4	29.1	H	54.0	7.0
17977.5	46.9	-25.5	43.4	29.0	V	54.0	7.1
17997.3	46.9	-25.5	43.4	29.0	H	54.0	7.1
17980.2	46.9	-25.5	43.4	29.0	H	54.0	7.1
17984.1	46.9	-25.5	43.4	29.0	H	54.0	7.1

## Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17993.4	47.1	-25.5	43.4	29.2	H	54.0	6.9
17966.5	47.0	-25.5	43.4	29.1	H	54.0	7.0
17963.7	47.0	-25.5	43.4	29.1	V	54.0	7.0
17970.3	46.9	-25.5	43.4	29.0	H	54.0	7.1
17957.7	46.9	-25.5	43.4	29.0	H	54.0	7.1
17992.3	46.9	-25.5	43.4	29.0	H	54.0	7.1

## Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17972.5	47.1	-25.5	43.4	29.2	H	54.0	6.9
17984.6	47.0	-25.5	43.4	29.1	H	54.0	7.0
17986.3	47.0	-25.5	43.4	29.1	V	54.0	7.0
17971.4	47.0	-25.5	43.4	29.1	H	54.0	7.0
17995.6	47.0	-25.5	43.4	29.1	H	54.0	7.0
17980.2	46.9	-25.5	43.4	29.0	H	54.0	7.1

**802.11n-HT40**

## Ch151

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17947.2	47.1	-25.5	43.4	29.2	H	54.0	6.9
17985.2	47.0	-25.5	43.4	29.1	H	54.0	7.0
17967.0	47.0	-25.5	43.4	29.1	V	54.0	7.0
17965.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17984.6	47.0	-25.5	43.4	29.1	H	54.0	7.0
17990.1	46.9	-25.5	43.4	29.0	H	54.0	7.1

## Ch159

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17983.0	47.3	-25.5	43.4	29.4	H	54.0	6.7
17989.0	47.1	-25.5	43.4	29.2	H	54.0	6.9
17959.9	47.1	-25.5	43.4	29.2	V	54.0	6.9
17980.8	47.0	-25.5	43.4	29.1	H	54.0	7.0
17976.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17978.0	46.9	-25.5	43.4	29.0	H	54.0	7.1

**802.11ac-HT20**

## Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17992.3	47.1	-25.5	43.4	29.2	H	54.0	6.9
17979.1	47.1	-25.5	43.4	29.2	H	54.0	6.9
17990.1	47.1	-25.5	43.4	29.2	V	54.0	6.9
17989.6	47.1	-25.5	43.4	29.2	H	54.0	6.9
17984.1	47.0	-25.5	43.4	29.1	H	54.0	7.0
17994.0	47.0	-25.5	43.4	29.1	H	54.0	7.0

## Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17991.2	47.0	-25.5	43.4	29.1	H	54.0	7.0
17988.5	47.0	-25.5	43.4	29.1	H	54.0	7.0
17981.9	46.9	-25.5	43.4	29.0	V	54.0	7.1
17995.6	46.9	-25.5	43.4	29.0	H	54.0	7.1
17979.1	46.9	-25.5	43.4	29.0	H	54.0	7.1
17991.8	46.9	-25.5	43.4	29.0	H	54.0	7.1

## Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17986.3	47.2	-25.5	43.4	29.3	H	54.0	6.8
17978.0	47.1	-25.5	43.4	29.2	H	54.0	6.9
17994.0	47.1	-25.5	43.4	29.2	V	54.0	6.9
17983.5	47.1	-25.5	43.4	29.2	H	54.0	6.9
17976.9	47.1	-25.5	43.4	29.2	H	54.0	6.9
17956.6	47.1	-25.5	43.4	29.2	H	54.0	6.9

**802.11ac-HT40**

## Ch151

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17947.2	47.1	-25.5	43.4	29.2	H	54.0	6.9
17985.2	47.0	-25.5	43.4	29.1	H	54.0	7.0
17967.0	47.0	-25.5	43.4	29.1	V	54.0	7.0
17965.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17984.6	47.0	-25.5	43.4	29.1	H	54.0	7.0
17990.1	46.9	-25.5	43.4	29.0	H	54.0	7.1

## Ch159

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
17983.0	47.3	-25.5	43.4	29.4	H	54.0	6.7
17989.0	47.1	-25.5	43.4	29.2	H	54.0	6.9
17959.9	47.1	-25.5	43.4	29.2	V	54.0	6.9
17980.8	47.0	-25.5	43.4	29.1	H	54.0	7.0
17976.9	47.0	-25.5	43.4	29.1	H	54.0	7.0
17978.0	46.9	-25.5	43.4	29.0	H	54.0	7.1

**802.11ac-HT80**

## Ch155

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
17950.0	47.3	-25.5	43.4	29.4	H	54.0	6.7
17989.6	47.2	-25.5	43.4	29.3	H	54.0	6.8
17961.5	47.1	-25.5	43.4	29.2	V	54.0	6.9
17975.8	47.1	-25.5	43.4	29.2	H	54.0	6.9
17990.1	47.1	-25.5	43.4	29.2	H	54.0	6.9
17980.2	47.0	-25.5	43.4	29.1	H	54.0	7.0

**Peak Results:**
**802.11a**

## Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
5724.9	58.0	-36.5	34.2	60.3	H	74.0	16.0
17964.8	59.0	-25.5	43.4	41.1	H	74.0	15.0
17977.5	58.8	-25.5	43.4	40.9	V	74.0	15.2
17954.9	58.5	-25.5	43.4	40.6	H	74.0	15.5
17987.4	58.2	-25.5	43.4	40.3	H	74.0	15.8
17965.4	58.2	-25.5	43.4	40.3	H	74.0	15.8

## Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17998.4	58.4	-25.5	43.4	40.5	H	74.0	15.6
17950.0	58.3	-25.5	43.4	40.4	H	74.0	15.7
17989.0	58.2	-25.5	43.4	40.3	V	74.0	15.8
17921.9	58.2	-25.5	43.4	40.3	H	74.0	15.8
17983.5	58.0	-25.5	43.4	40.1	H	74.0	16.0
17971.4	58.0	-25.5	43.4	40.1	H	74.0	16.0

## Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5850.4	53.9	-36.5	34.2	56.2	H	74.0	20.1
17980.8	59.4	-25.5	43.4	41.5	H	74.0	14.6
17989.6	58.7	-25.5	43.4	40.8	V	74.0	15.3
17907.1	58.5	-25.7	43.4	40.8	H	74.0	15.5
17975.8	58.5	-25.5	43.4	40.6	H	74.0	15.5
17999.5	58.3	-25.5	43.4	40.4	H	74.0	15.7

**802.11n-HT20**

## Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5723.3	55.8	-36.5	34.2	58.1	H	74.0	18.2
17973.1	59.5	-25.5	43.4	41.6	H	74.0	14.5
17936.2	58.4	-25.5	43.4	40.5	V	74.0	15.6
17963.2	58.3	-25.5	43.4	40.4	H	74.0	15.7
17860.3	58.3	-25.7	43.4	40.6	H	74.0	15.7
17869.1	58.1	-25.7	43.4	40.4	H	74.0	15.9

## Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17993.4	58.7	-25.5	43.4	40.8	H	74.0	15.3
17966.5	58.6	-25.5	43.4	40.7	H	74.0	15.4
17963.7	58.5	-25.5	43.4	40.6	V	74.0	15.5
17970.3	58.4	-25.5	43.4	40.5	H	74.0	15.6
17957.7	58.3	-25.5	43.4	40.4	H	74.0	15.7
17992.3	58.2	-25.5	43.4	40.3	H	74.0	15.8

## Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5851.4	53.4	-36.5	34.2	55.7	H	74.0	20.6
17975.8	58.8	-25.5	43.4	40.9	H	74.0	15.2
17993.4	58.3	-25.5	43.4	40.4	V	74.0	15.7
17961.0	58.3	-25.5	43.4	40.4	H	74.0	15.7
17986.8	58.1	-25.5	43.4	40.2	H	74.0	15.9
17983.0	58.1	-25.5	43.4	40.2	H	74.0	15.9

**802.11n-HT40**

## Ch151

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5723.2	57.8	-36.5	34.2	60.1	H	74.0	16.2
17957.1	58.8	-25.5	43.4	40.9	H	74.0	15.2
17945.0	58.7	-25.5	43.4	40.8	V	74.0	15.3
17935.7	58.6	-25.5	43.4	40.7	H	74.0	15.4
17979.7	58.3	-25.5	43.4	40.4	H	74.0	15.7
17963.7	58.3	-25.5	43.4	40.4	H	74.0	15.7

## Ch159

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5851.1	54.3	-36.5	34.2	56.6	H	74.0	19.7
17968.7	58.6	-25.5	43.4	40.7	H	74.0	15.4
17935.1	58.6	-25.5	43.4	40.7	V	74.0	15.4
17953.3	58.6	-25.5	43.4	40.7	H	74.0	15.4
17997.8	58.5	-25.5	43.4	40.6	H	74.0	15.5
17973.6	58.2	-25.5	43.4	40.3	H	74.0	15.8

**802.11ac-HT20**

## Ch149

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5721.5	60.9	-36.5	34.2	63.2	H	74.0	13.1
17976.4	58.7	-25.5	43.4	40.8	H	74.0	15.3
17855.4	58.5	-25.7	43.4	40.8	V	74.0	15.5
17982.4	58.4	-25.5	43.4	40.5	H	74.0	15.6
17886.7	58.3	-25.7	43.4	40.6	H	74.0	15.7
17981.9	58.3	-25.5	43.4	40.4	H	74.0	15.7

## Ch157

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
17950.0	59.0	-25.5	43.4	41.1	H	74.0	15.0
17956.6	58.3	-25.5	43.4	40.4	H	74.0	15.7
17928.0	58.3	-25.5	43.4	40.4	V	74.0	15.7
17779.5	58.1	-25.7	43.4	40.4	H	74.0	15.9
17964.3	58.1	-25.5	43.4	40.2	H	74.0	15.9
17973.6	58.0	-25.5	43.4	40.1	H	74.0	16.0

## Ch165

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5851.0	55.8	-36.5	34.2	58.1	H	74.0	18.2
17965.9	58.8	-25.5	43.4	40.9	H	74.0	15.2
17982.4	58.6	-25.5	43.4	40.7	V	74.0	15.4
17975.3	58.5	-25.5	43.4	40.6	H	74.0	15.5
17956.6	58.5	-25.5	43.4	40.6	H	74.0	15.5
17973.1	58.3	-25.5	43.4	40.4	H	74.0	15.7

**802.11ac-HT40**

## Ch151

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5720.8	58.4	-36.5	34.2	60.7	H	74.0	15.6
17968.1	58.7	-25.5	43.4	40.8	H	74.0	15.3
17964.8	58.6	-25.5	43.4	40.7	V	74.0	15.4
17975.3	58.5	-25.5	43.4	40.6	H	74.0	15.5
17983.0	58.2	-25.5	43.4	40.3	H	74.0	15.8
17933.5	58.2	-25.5	43.4	40.3	H	74.0	15.8

## Ch159

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Magin (dBuV/m)
5852.0	55.0	-36.5	34.2	57.3	H	74.0	19.0
18000.0	58.6	-26.5	46.4	38.7	H	74.0	15.4
17957.7	58.6	-25.5	43.4	40.7	V	74.0	15.4
17928.5	58.5	-25.5	43.4	40.6	H	74.0	15.5
17962.6	58.3	-25.5	43.4	40.4	H	74.0	15.7
17995.1	58.2	-25.5	43.4	40.3	H	74.0	15.8

**802.11ac-HT80**

Ch155

Frequency (MHz)	Result (dBuV/m)	Cable Loss (dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization	Limit (dBuV/m)	Margin (dBuV/m)
5720.4	59.3	-36.5	34.2	61.6	H	74.0	14.7
17979.7	58.6	-25.5	43.4	40.7	H	74.0	15.4
17967.6	58.4	-25.5	43.4	40.5	V	74.0	15.6
17983.0	58.4	-25.5	43.4	40.5	H	74.0	15.6
17942.8	58.3	-25.5	43.4	40.4	H	74.0	15.7
17978.6	58.2	-25.5	43.4	40.3	H	74.0	15.8

**Conclusion: PASS**

**Measurement Results BY EUT5:**
**Average Results:**
**802.11a**
**Ch149**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17981.8	42.5	-25.5	46.66	21.34	54	11.5	V
17985.2	42.45	-25.5	46.66	21.29	54	11.55	H
13279.9	37.89	-29.67	39.55	28.01	54	16.11	H
13250.2	37.86	-29.67	39.55	27.98	54	16.14	H
11814.7	36.47	-31.85	39.05	29.27	54	17.53	H
11826.3	36.42	-31.85	39.05	29.22	54	17.58	H

**Ch157**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17971.4	42.46	-25.5	46.66	21.3	54	11.54	H
17984	42.39	-25.5	46.66	21.23	54	11.61	V
13251.3	37.94	-29.67	39.55	28.06	54	16.06	V
13265.6	37.94	-29.67	39.55	28.06	54	16.06	V
11868.1	36.42	-31.85	39.05	29.22	54	17.58	V
11825.7	36.4	-31.85	39.05	29.2	54	17.6	V

**Ch165**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17989.5	42.54	-25.5	46.66	21.38	54	11.46	V
17962.6	42.51	-25.5	46.66	21.35	54	11.49	V
15658.1	37.79	-27.23	38.61	26.41	54	16.21	V
13377.2	37.74	-29.49	39.71	27.52	54	16.26	V
11794.4	36.55	-31.99	38.98	29.56	54	17.45	H
11909.3	36.39	-31.85	39.05	29.19	54	17.61	V

**802.11n-HT40**

Ch151

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17989.5	42.58	-25.5	46.66	21.42	54	11.42	V
17997.8	42.54	-25.5	46.66	21.38	54	11.46	H
13254	38.08	-29.67	39.55	28.2	54	15.92	V
13293.1	38.03	-29.49	39.71	27.81	54	15.97	H
11838.9	36.7	-31.85	39.05	29.5	54	17.3	H
11842.2	36.61	-31.85	39.05	29.41	54	17.39	V

Ch159

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17992.3	42.37	-25.5	46.66	21.21	54	11.63	V
17995	42.32	-25.5	46.66	21.16	54	11.68	H
13315.1	37.95	-29.49	39.71	27.73	54	16.05	H
13284.9	37.88	-29.67	39.55	28	54	16.12	V
11825.2	36.67	-31.85	39.05	29.47	54	17.33	V
11823.5	36.51	-31.85	39.05	29.31	54	17.49	H

**802.11ac-HT80**

Ch155

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17989	42.73	-25.5	46.66	21.57	54	11.27	V
17915.3	42.69	-25.5	46.66	21.53	54	11.31	V
16139.4	38.24	-26.77	38.93	26.08	54	15.76	V
16134.4	38.11	-26.77	38.93	25.95	54	15.89	V
11826.8	36.57	-31.85	39.05	29.37	54	17.43	V
11837.8	36.49	-31.85	39.05	29.29	54	17.51	H

**Peak Results:**
**802.11a**
**Ch149**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17917	54.03	-25.5	46.66	32.87	74	19.97	V
17866.3	53.77	-25.5	46.66	32.61	74	20.23	V
16823.5	51.55	-26.62	41.49	36.68	68.3	16.75	H
16853.8	51.38	-26.62	41.49	36.51	68.3	16.92	V
10925.9	48.68	-32.82	38.7	42.8	74	25.32	H
10963.3	48.25	-32.82	38.7	42.37	74	25.75	V

**Ch157**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17826.8	54.11	-25.5	46.66	32.95	74	19.89	H
17731.6	53.88	-25.74	45.95	33.67	74	20.12	H
16527.7	51.9	-26.96	39.82	39.04	68.3	16.4	V
16460	51.59	-26.96	39.82	38.73	68.3	16.71	H
11666.8	48.63	-32.31	38.91	42.04	74	25.37	H
11994	48.28	-31.48	39.09	40.67	74	25.72	V

**Ch165**

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17912	53.89	-25.5	46.66	32.73	74	20.11	H
17962.6	53.83	-25.5	46.66	32.67	74	20.17	V
16665.7	51.56	-26.87	40.65	37.78	68.3	16.74	V
16599.7	51.19	-26.87	40.65	37.41	68.3	17.11	V
11779	48.19	-31.99	38.98	41.2	74	25.81	V
11803.2	48	-31.85	39.05	40.8	74	26	V

**802.11n-HT40**

Ch151

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17924.1	53.66	-25.5	46.66	32.5	74	20.34	V
17885.6	53.46	-25.5	46.66	32.3	74	20.54	H
16754.2	52.1	-26.62	41.49	37.23	68.3	16.2	V
16915.4	51.82	-26.32	42.36	35.77	68.3	16.48	H
11838.4	48.36	-31.85	39.05	41.16	74	25.64	H
11865.3	48.34	-31.85	39.05	41.14	74	25.66	H

Ch159

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17836.7	53.78	-25.5	46.66	32.62	74	20.22	V
17357.6	53.66	-25.95	44.35	35.25	68.3	14.64	V
16723.5	52.56	-26.62	41.49	37.69	68.3	15.74	V
16490.2	51.91	-26.96	39.82	39.05	68.3	16.39	V
11995.7	48.5	-31.48	39.09	40.89	74	25.5	H
11851	48.08	-31.85	39.05	40.88	74	25.92	H

**802.11ac-HT80**

Ch155

Frequency (MHz)	Result (dB $\mu$ V/m)	Cable Loss (dB)	Antenna Factor (dB/m)	P <sub>Mea</sub> (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17947.8	54.05	-25.5	46.66	32.89	74	19.95	V
17989	53.91	-25.5	46.66	32.75	74	20.09	V
16777.3	52.16	-26.62	41.49	37.29	68.3	16.14	H
16809.8	51.83	-26.62	41.49	36.96	68.3	16.47	V
11890.6	48.29	-31.85	39.05	41.09	74	25.71	V
11915.9	48.24	-31.48	39.09	40.63	74	25.76	V

## B.6. Band Edges Compliance

### B.6.1 Band Edges - Radiated

#### Measurement Limit:

Standard	Limit (dBm/MHz)	
FCC 47 CFR Part 15.407	at the band edge	27
	at 5 MHz above or below the band edge	15.6
	at 25 MHz above or below the band edge	10
	at 75 MHz or more above or below the band edge	-27
	Note: increasing linearly from point to point.	

The measurement is made according to KDB 789033 D02

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.15	P
	5825 MHz	Fig.16	P
802.11n HT20	5745 MHz	Fig.17	P
	5825 MHz	Fig.18	P
802.11ac HT20	5745 MHz	Fig.19	P
	5825 MHz	Fig.20	P
802.11n HT40	5755 MHz	Fig.21	P
	5795 MHz	Fig.22	P
802.11ac HT40	5755 MHz	Fig.23	P
	5795 MHz	Fig.24	P
802.11ac HT80	5775 MHz	Fig.25	P
	5775 MHz	Fig.26	P


**Conclusion: PASS**

#### Measurement Result BY EUT5:


Mode	Channel	Test Results	Conclusion
802.11a	5745 MHz	Fig.27	P
	5825 MHz	Fig.28	P
802.11n HT40	5755 MHz	Fig.29	P
	5795 MHz	Fig.30	P
802.11ac HT80	5775 MHz	Fig.31	P
	5775 MHz	Fig.32	P

**Conclusion: PASS**


Test graphs as below:

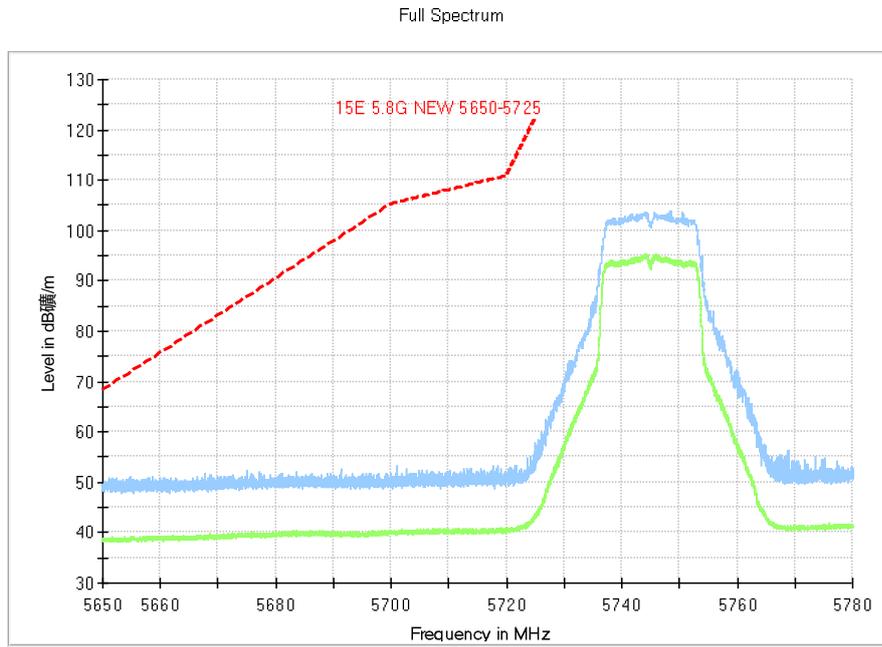


**Fig. 15 Band Edges (802.11a, 5745MHz)**

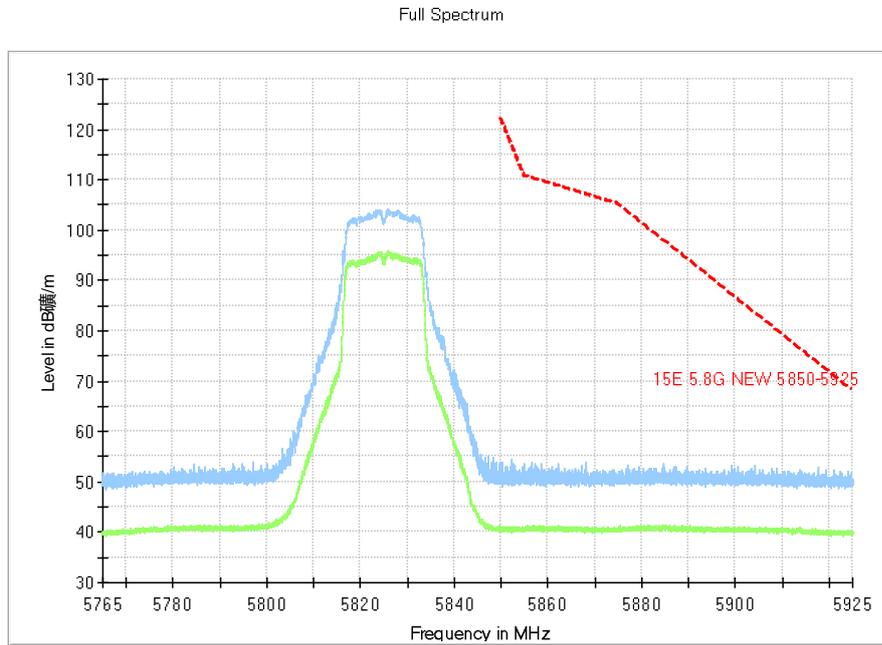


**Fig. 16 Band Edges (802.11a, 5825MHz)**

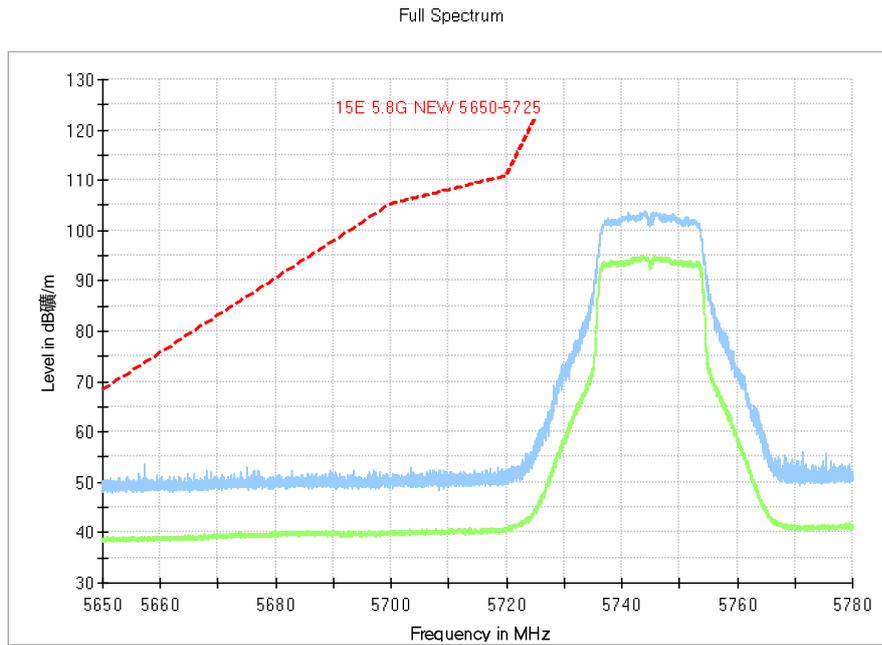


**Fig. 17 Band Edges (802.11n-HT20, 5745MHz)**

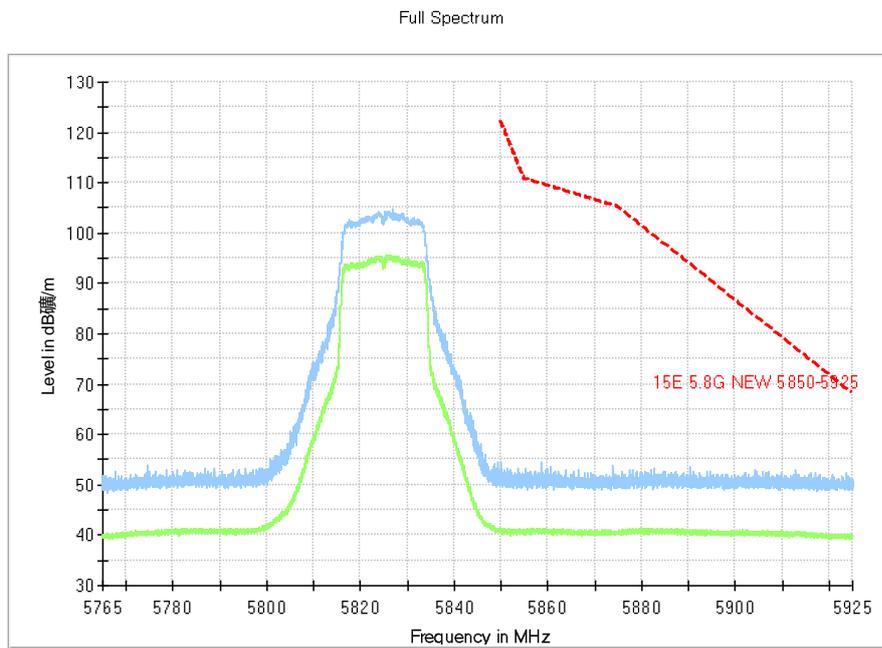


**Fig. 18 Band Edges (802.11n-HT20, 5825MHz)**

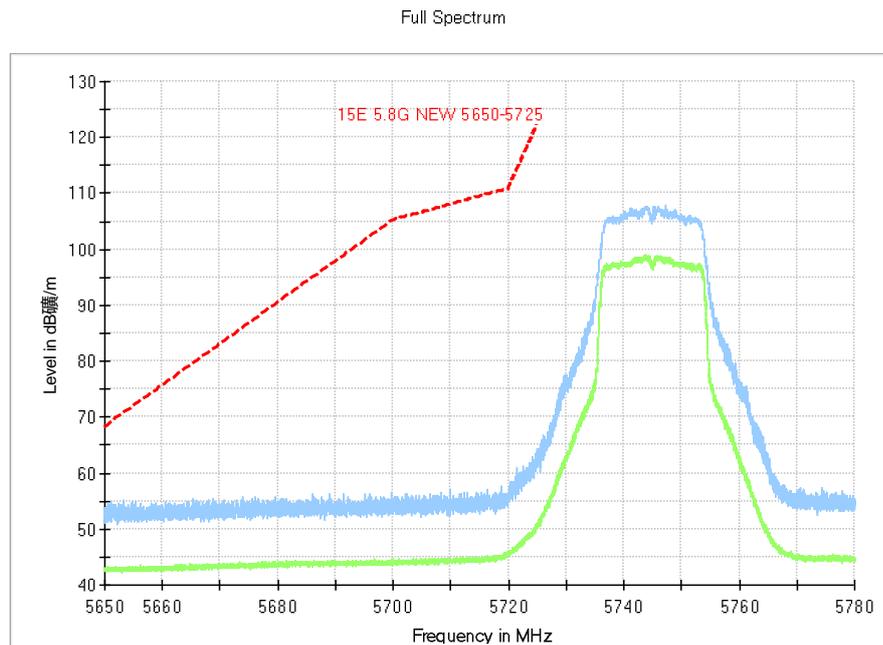


**Fig. 19 Band Edges (802.11ac-HT20, 5745MHz)**

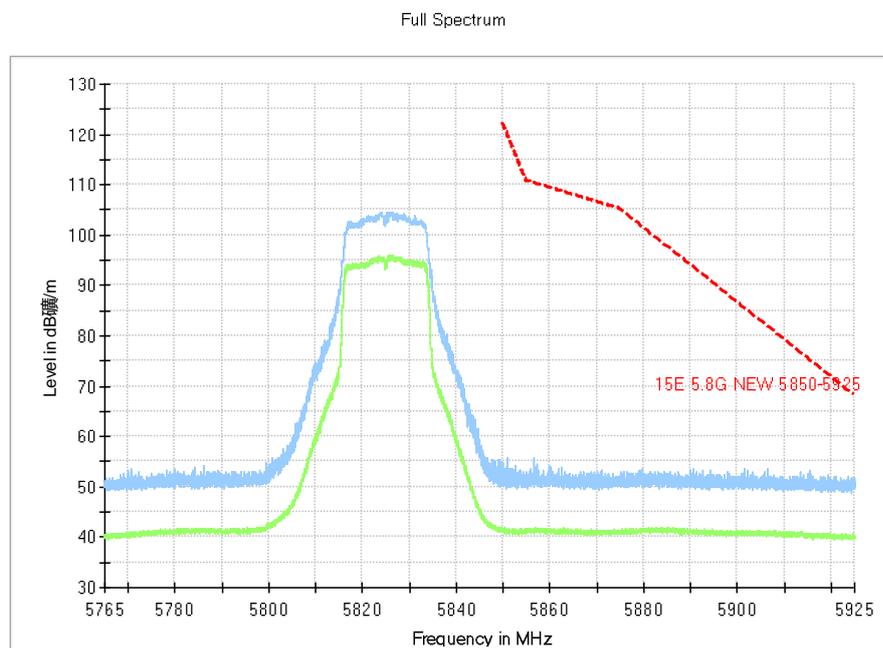


**Fig. 20 Band Edges (802.11ac-HT20, 5825MHz)**

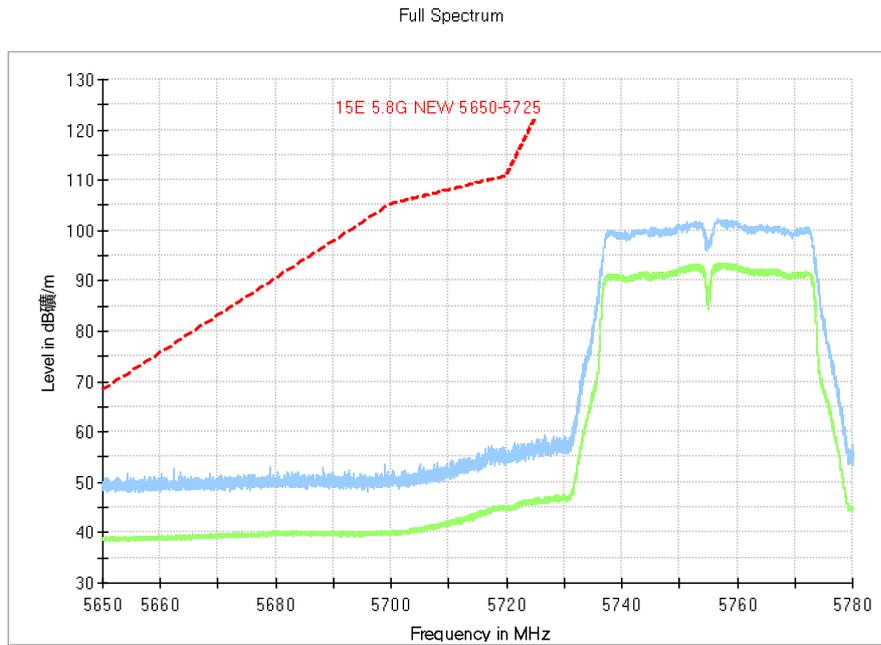


**Fig. 21 Band Edges (802.11n-HT40, 5755MHz)**

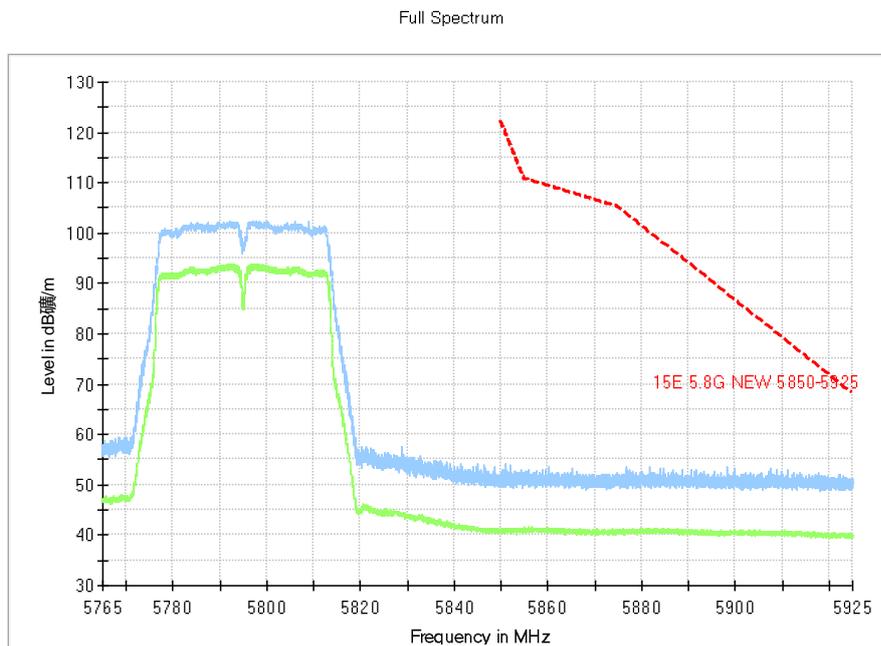


**Fig. 22 Band Edges (802.11n-HT40, 5795MHz)**

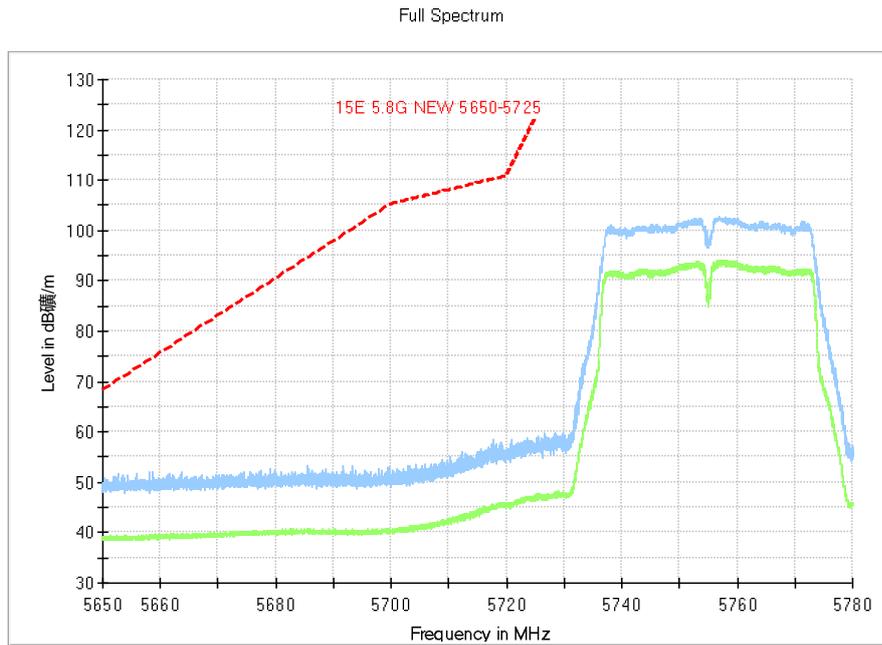


**Fig. 23 Band Edges (802.11ac-HT40, 5755MHz)**

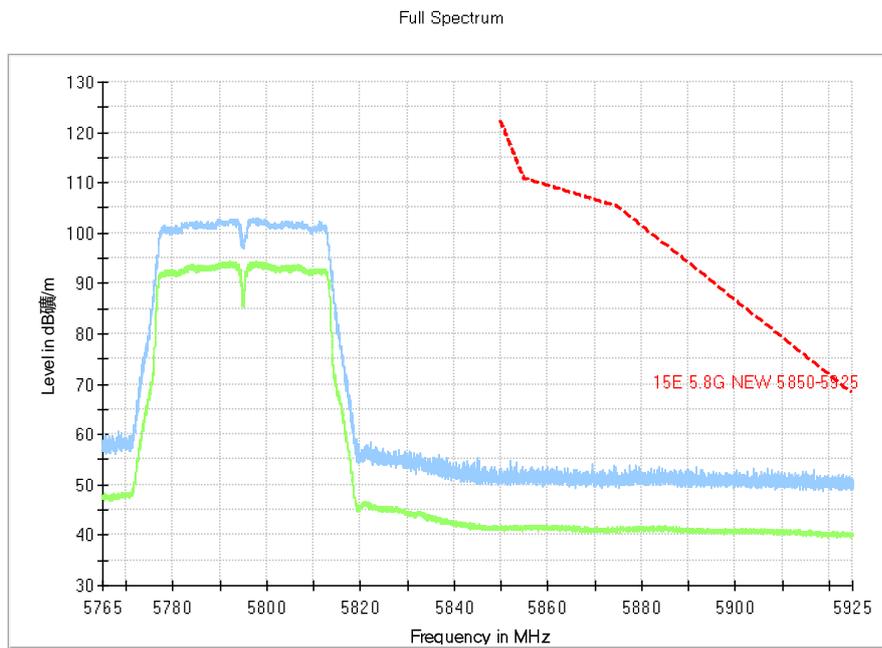


**Fig. 24 Band Edges (802.11ac-HT40, 5795MHz)**

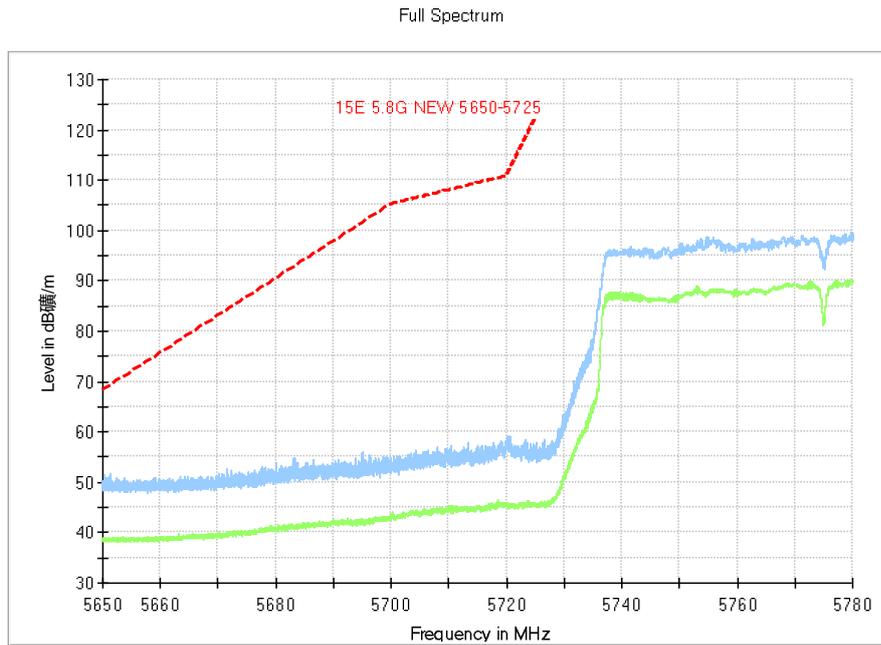


**Fig. 25 Band Edges (802.11ac-HT80, 5775MHz)**

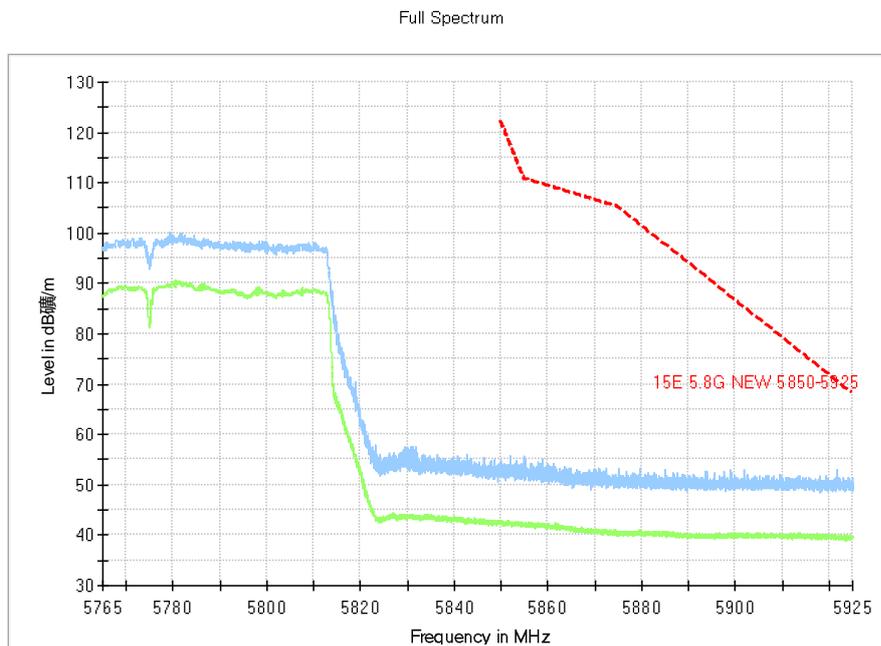


**Fig. 26 Band Edges (802.11ac-HT80, 5775MHz)**

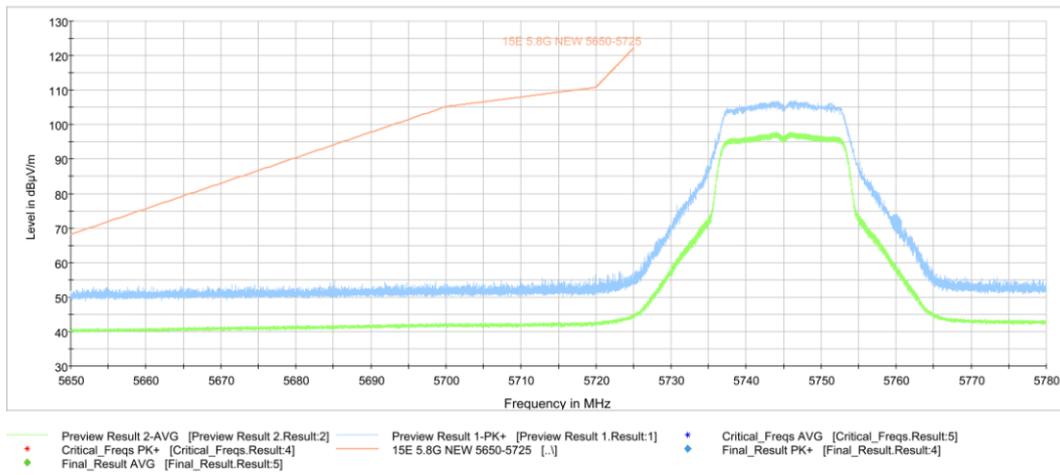


**Fig. 27 Band Edges (802.11a, 5745MHz) BY EUT5**

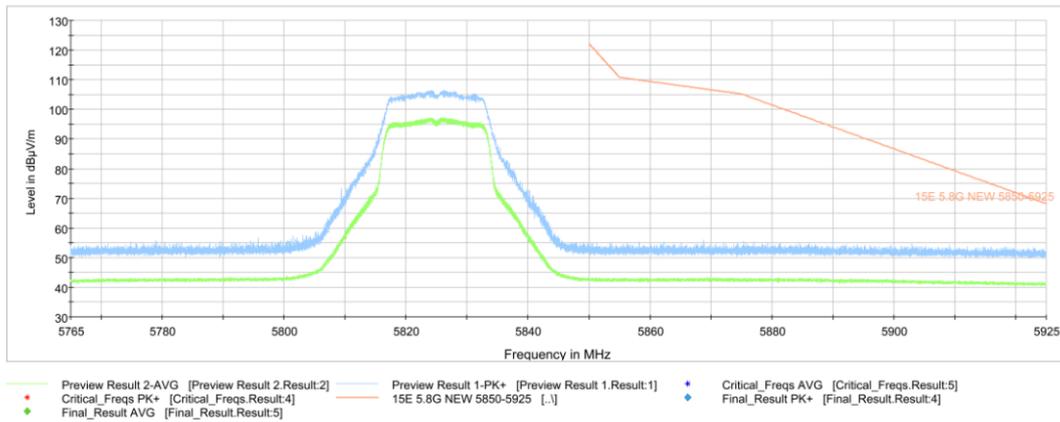


**Fig. 28 Band Edges (802.11a, 5825MHz) BY EUT5**

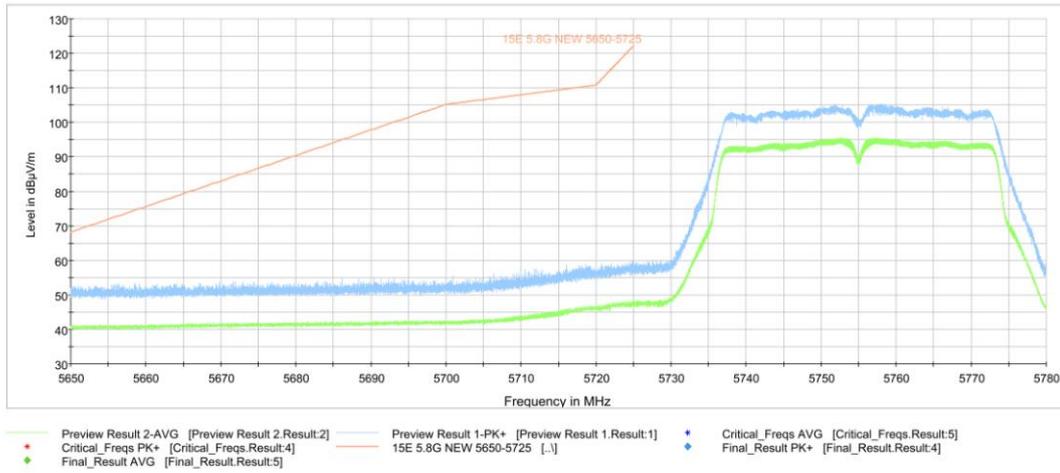


**Fig. 29 Band Edges (802.11n-HT40, 5755MHz) BY EUT5**

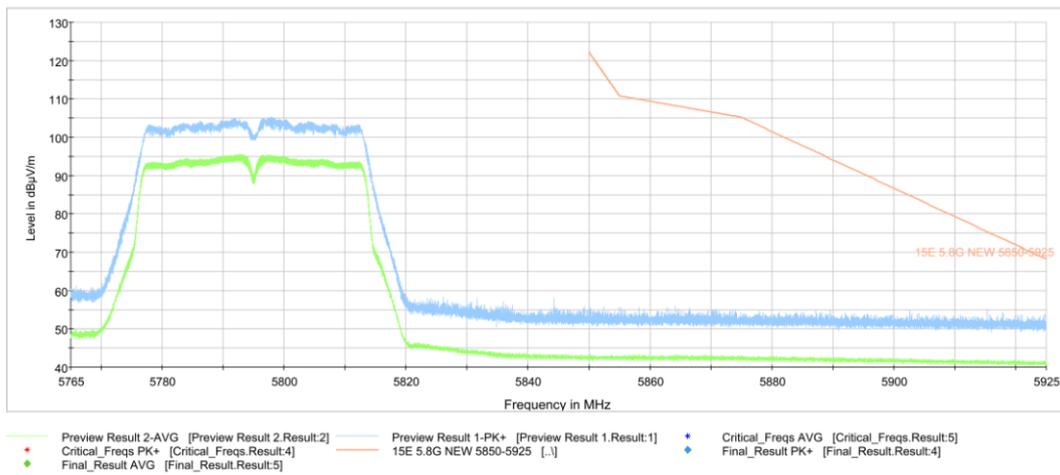

**Fig. 30 Band Edges (802.11n-HT40, 5795MHz) BY EUT5**

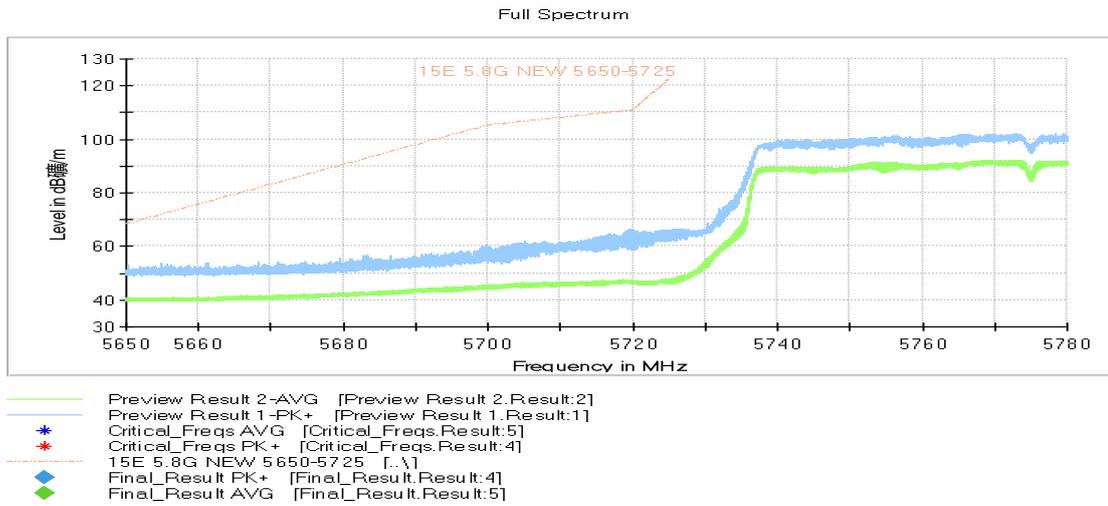

**Fig. 31 Band Edges (802.11ac-HT80, 5775MHz) BY EUT5**

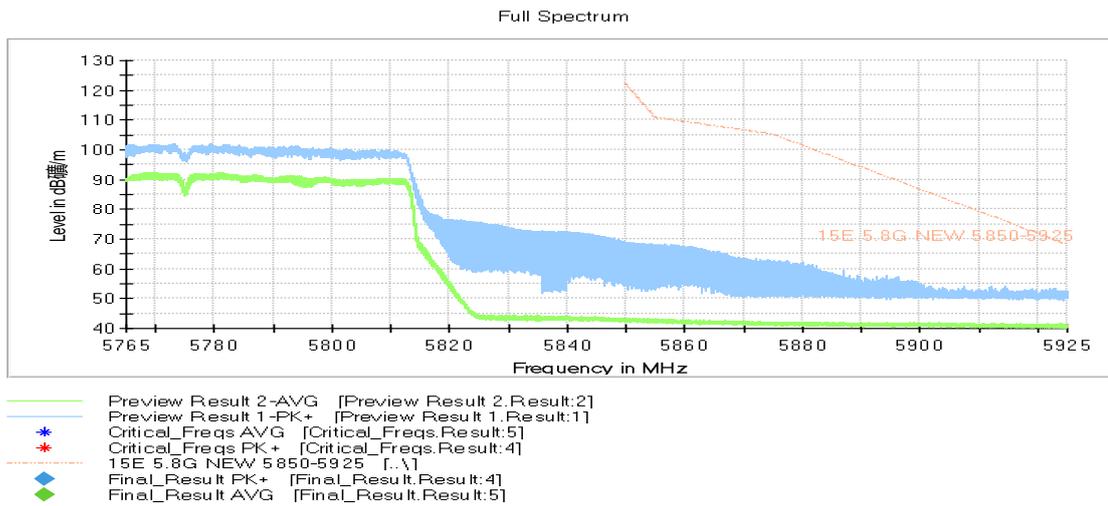

**Fig. 32 Band Edges (802.11ac-HT80, 5775MHz) BY EUT5**

## B.7. AC Powerline Conducted Emission

### Test Condition:

Voltage (V)	Frequency (Hz)
110	60

### Measurement Result and limit:

#### WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	66 to 56	Fig.33	Fig.34	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

#### WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11a	Idle	
0.15 to 0.5	56 to 46	Fig.33	Fig.34	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results showed here are worst cases of the combinations of different chargers and cables.

**Conclusion: PASS**

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
		With charger	
		802.11a	
0.15 to 0.5	67 to 56	Fig.35	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
		With charger	
		802.11a	
0.15 to 0.5	56 to 46	Fig.35	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Note: The measurement results showed here are worst cases of the combinations of different chargers and cables.

**Conclusion: PASS**
**Test graphs as below:**

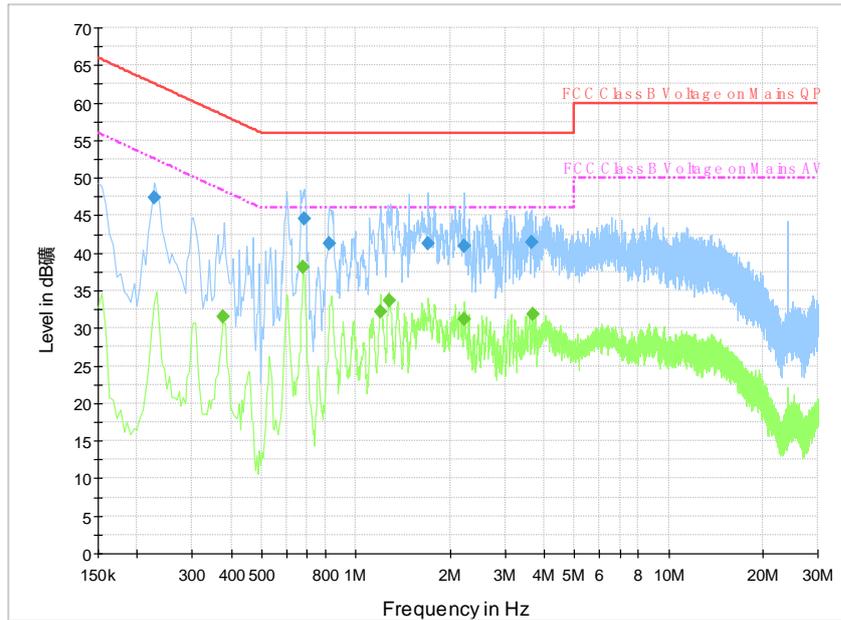

**Fig. 33 AC Powerline Conducted Emission-802.11a**

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Line	Margin (dB)	Limit (dBμV)
0.226500	47.4	N	15.2	62.6
0.685500	44.6	L1	11.4	56.0
0.820500	41.2	L1	14.8	56.0
1.698000	41.3	L1	14.7	56.0
2.215500	40.9	L1	15.1	56.0
3.655500	41.5	L1	14.5	56.0

### Final Result 2

Frequency (MHz)	Average (dBμV)	Line	Margin (dB)	Limit (dBμV)
0.375000	31.6	L1	16.8	48.4
0.681000	38.2	L1	7.8	46.0
1.194000	32.3	L1	13.7	46.0
1.279500	33.7	L1	12.3	46.0
2.215500	31.2	L1	14.8	46.0
3.673500	31.9	L1	14.1	46.0

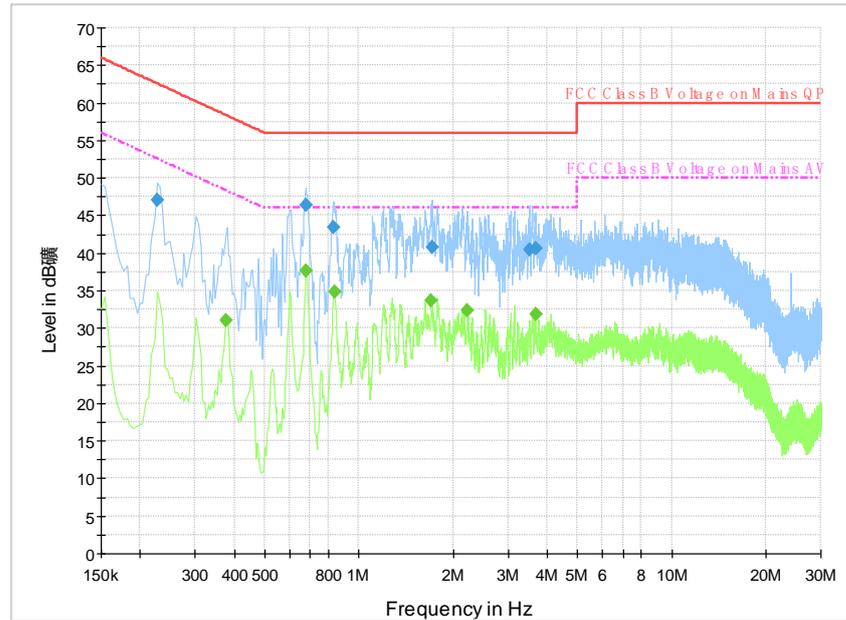


Fig. 34 AC Powerline Conducted Emission-Idle

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Margin (dB)	Limit (dBµV)
0.226500	47.0	N	15.6	62.6
0.676500	46.4	L1	9.6	56.0
0.829500	43.4	L1	12.6	56.0
1.716000	40.8	L1	15.2	56.0
3.502500	40.4	L1	15.6	56.0
3.669000	40.6	L1	15.4	56.0

### Final Result 2

Frequency (MHz)	Average (dBµV)	Line	Margin (dB)	Limit (dBµV)
0.375000	31.0	L1	17.4	48.4
0.676500	37.6	L1	8.4	46.0
0.834000	34.8	L1	11.2	46.0
1.707000	33.6	L1	12.4	46.0
2.224500	32.4	L1	13.6	46.0
3.669000	31.8	L1	14.2	46.0

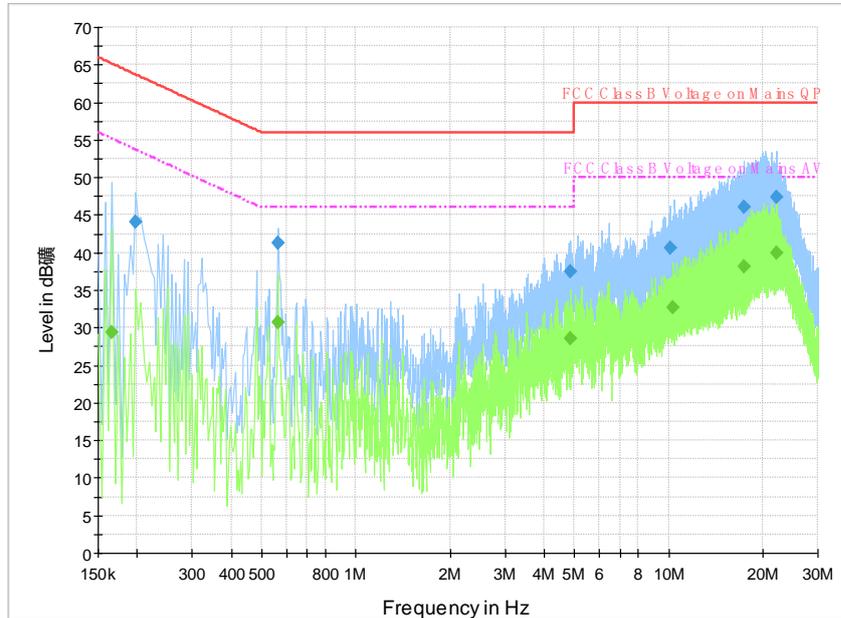


Fig. 35 AC Powerline Conducted Emission-802.11a

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	44.0	2000.0	9.000	On	L1	20.0	19.7	63.7
0.566000	41.3	2000.0	9.000	On	L1	19.8	14.7	56.0
4.850000	37.5	2000.0	9.000	On	L1	19.6	18.5	56.0
10.138000	40.6	2000.0	9.000	On	L1	19.7	19.4	60.0
17.442000	46.1	2000.0	9.000	On	L1	19.9	13.9	60.0
22.074000	47.4	2000.0	9.000	On	L1	19.9	12.6	60.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	29.4	2000.0	9.000	On	L1	20.0	25.8	55.2
0.562000	30.8	2000.0	9.000	On	L1	19.9	15.2	46.0
4.850000	28.6	2000.0	9.000	On	L1	19.6	17.4	46.0
10.366000	32.6	2000.0	9.000	On	L1	19.7	17.4	50.0
17.442000	38.1	2000.0	9.000	On	L1	19.9	11.9	50.0
22.074000	39.9	2000.0	9.000	On	L1	19.9	10.1	50.0

## ANNEX C: EUT parameters

Disclaimer: The worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX D: Accreditation Certificate



\*\*\* END OF REPORT BODY \*\*\*