


FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo TB-Q706F
FCC ID : O57TBQ706F
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jul. 13, 2021 ~ Aug. 03, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Reviewed by: Jason Jia / Supervisor



Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	41
3.6 AC Conducted Emission Measurement.....	45
3.7 Antenna Requirements.....	47
4 LIST OF MEASURING EQUIPMENT	48
5 UNCERTAINTY OF EVALUATION	49
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR161617C	Rev. 01	Initial issue of report	Aug. 16, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	N/A	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 30\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.05 dB at 2483.5 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.31 dB at 0.538 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	N/A	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo TB-Q706F
FCC ID	O57TBQ706F
HW Version	Lenovo TB-Q706F
SW Version	TB-Q706F_RF01_210811
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum Output Power to antenna	<MIMO Ant.1+2> 802.11b : 22.12 dBm (0.1629 W) 802.11g : 22.01 dBm (0.1589 W) 802.11n HT20 : 20.91 dBm (0.1233 W) 802.11n HT40 : 20.77 dBm (0.1194 W) 802.11ax HE20 : 21.01 dBm (0.1262 W) 802.11ax HE40 : 20.87 dBm (0.1222 W)
99% Occupied Bandwidth	802.11b : 13.34MHz 802.11g : 17.08MHz 802.11ax HE20 : 19.28MHz 802.11ax HE40 : 37.86MHz
Antenna Type / Gain	<Ant. 1> :Metal Antenna type with gain -1.80 dBi <Ant. 2> : Metal Antenna type with gain 0.80 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM/ 256QAM / 1024QAM)

Note:

1. For SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
2. For 802.11n HT20 / n HT40 and 802.11ax VHT20 / ax VHT40 mode, the whole testing have assessed only 802.11ax VHT20 / ax VHT40 by referring to their maximum conducted power.
3. For 802.11ax supports Partial RU combinations mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter 2) for Sample 1
Remark: - For Radiated Test Cases, the tests were performed with Sample 1 and Adapter 1. - For Conducted Emission, the tests were performed with the worst accessories in part 15B report.	

2.3 Connection Diagram of Test System

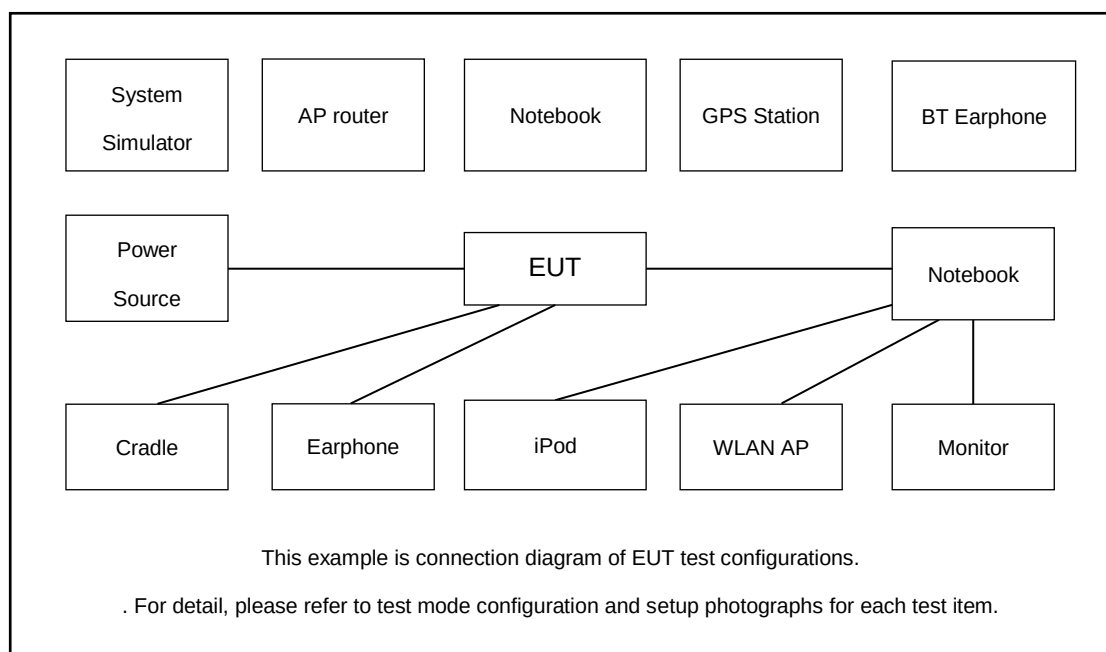

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT4 mode) was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.2 + 10 = 11.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

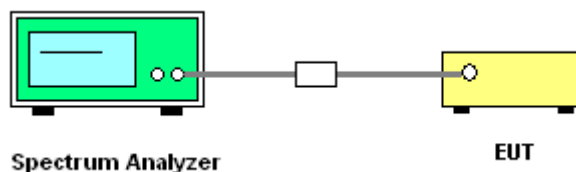



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

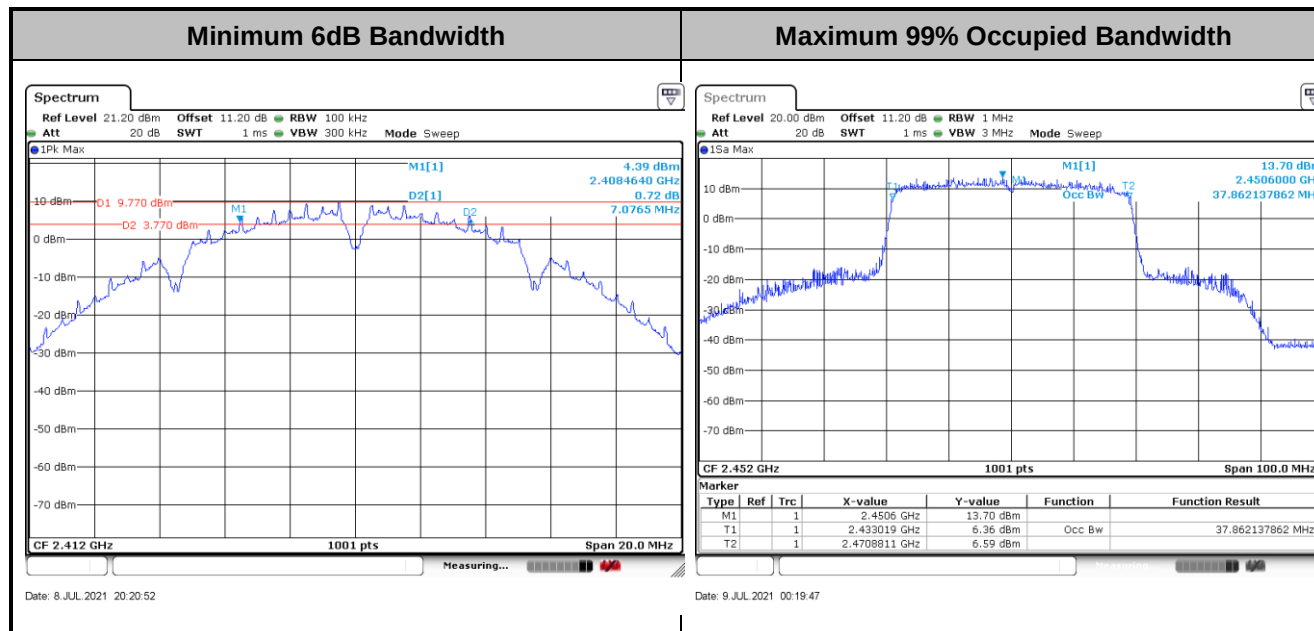

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

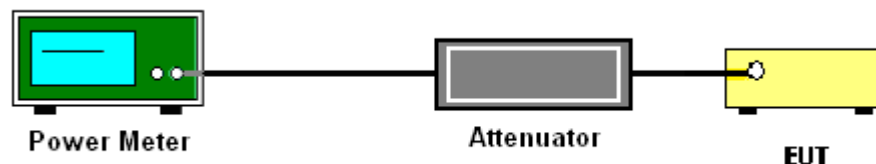

3.2.5 Test Result of Average output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

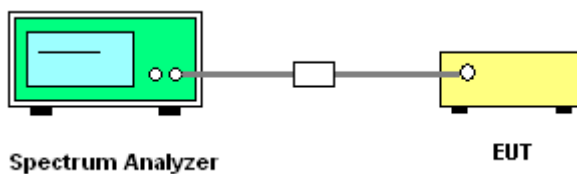

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

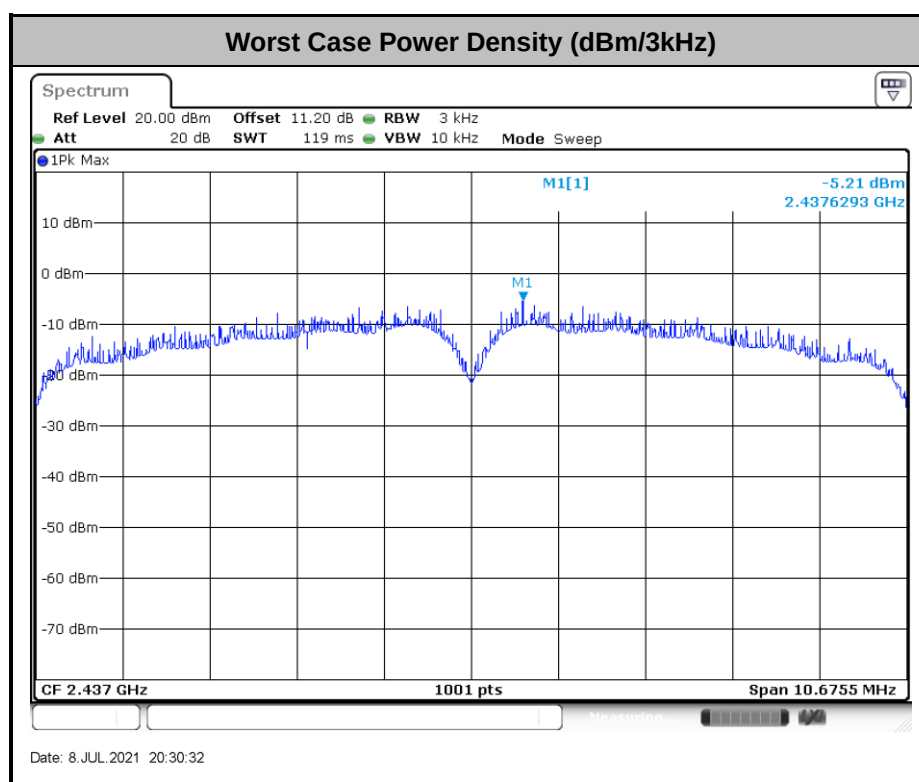

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

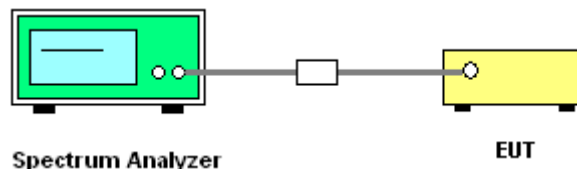




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Chen Hong	Temperature :	21~25°C
		Relative Humidity :	51~54%

<Ant 1>


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

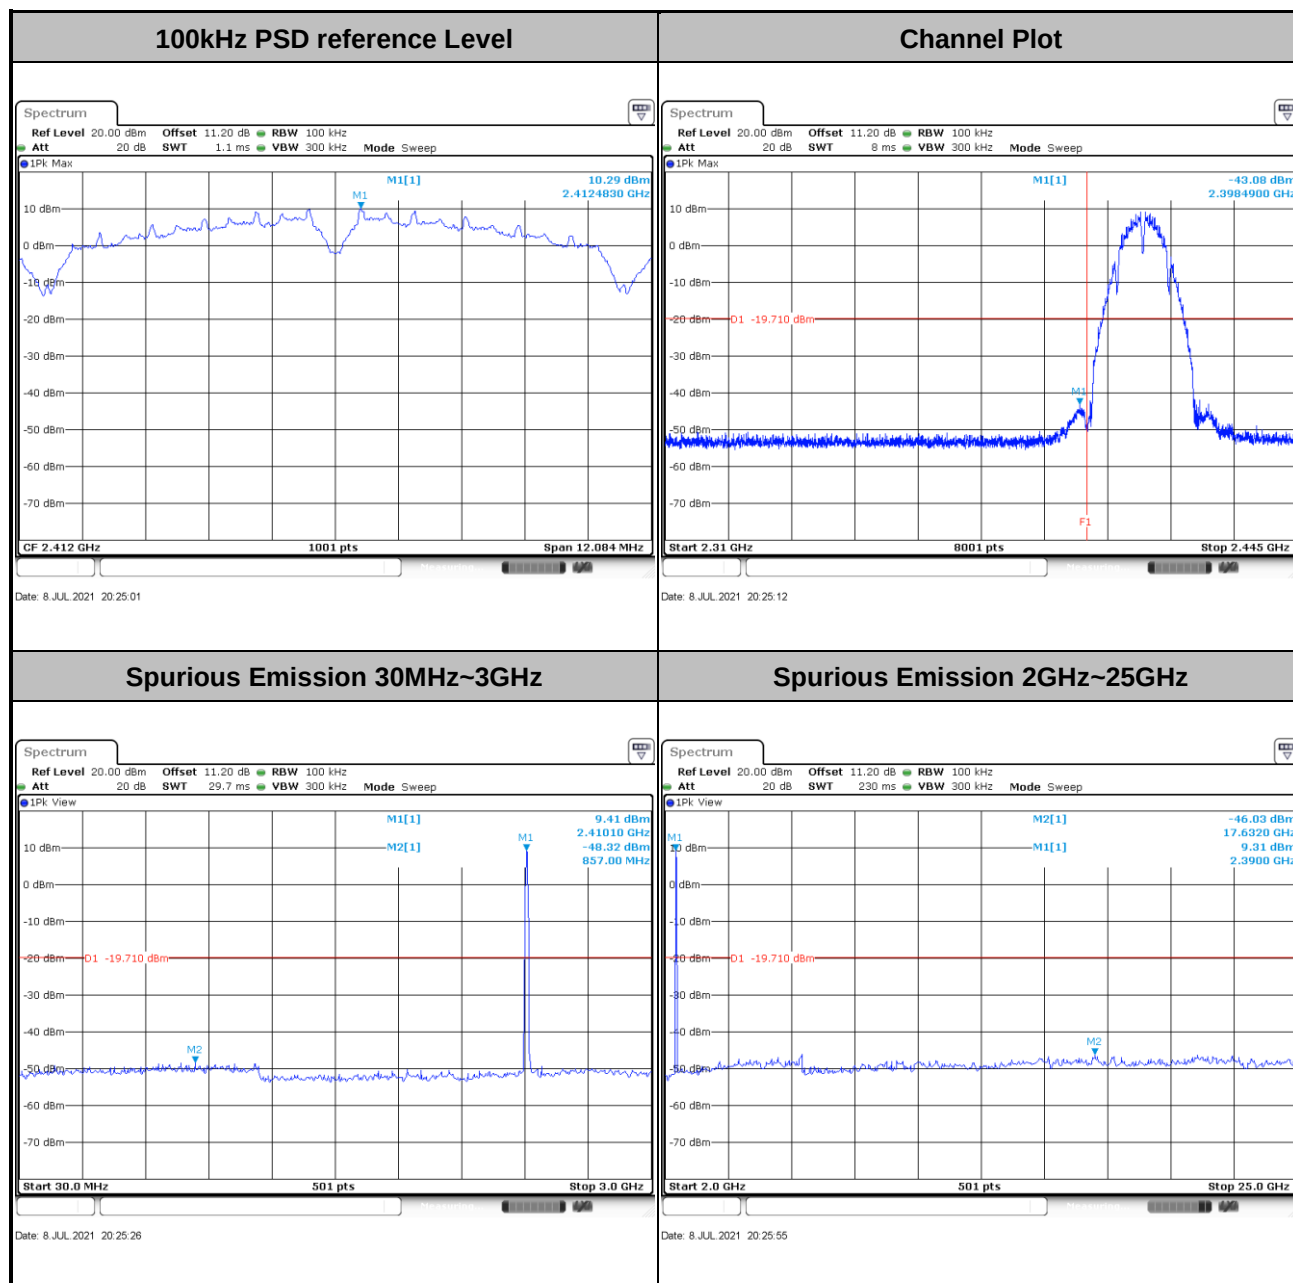



<Ant 2>


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

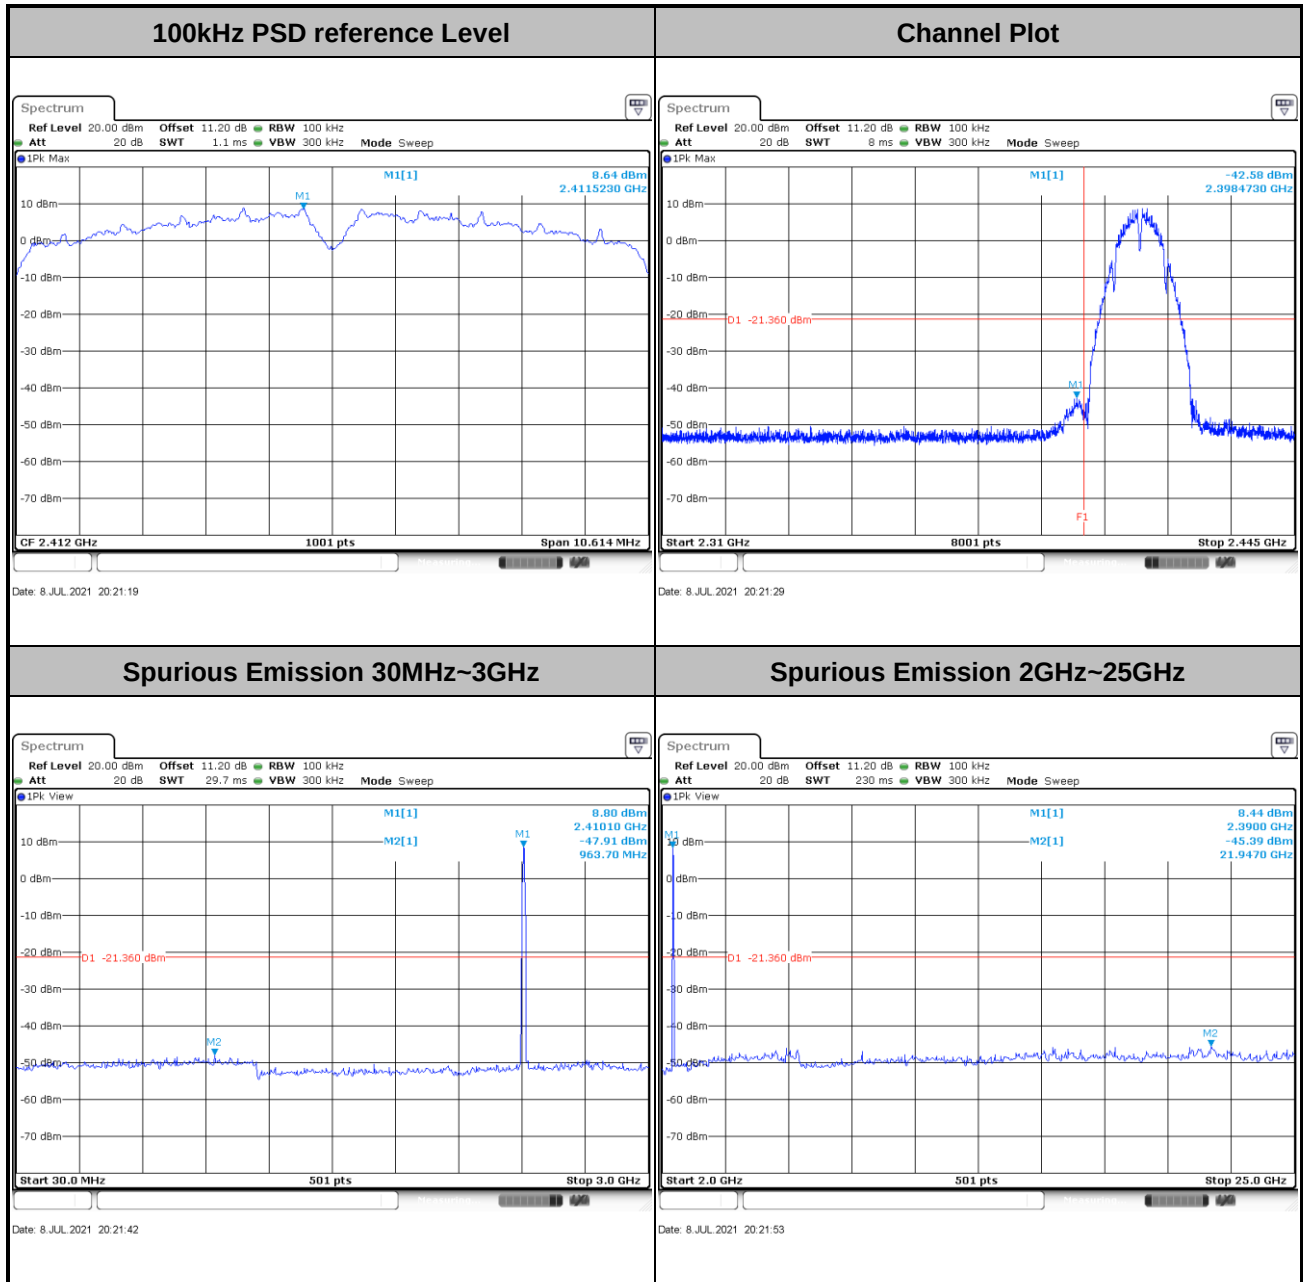



<Ant 1>


Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

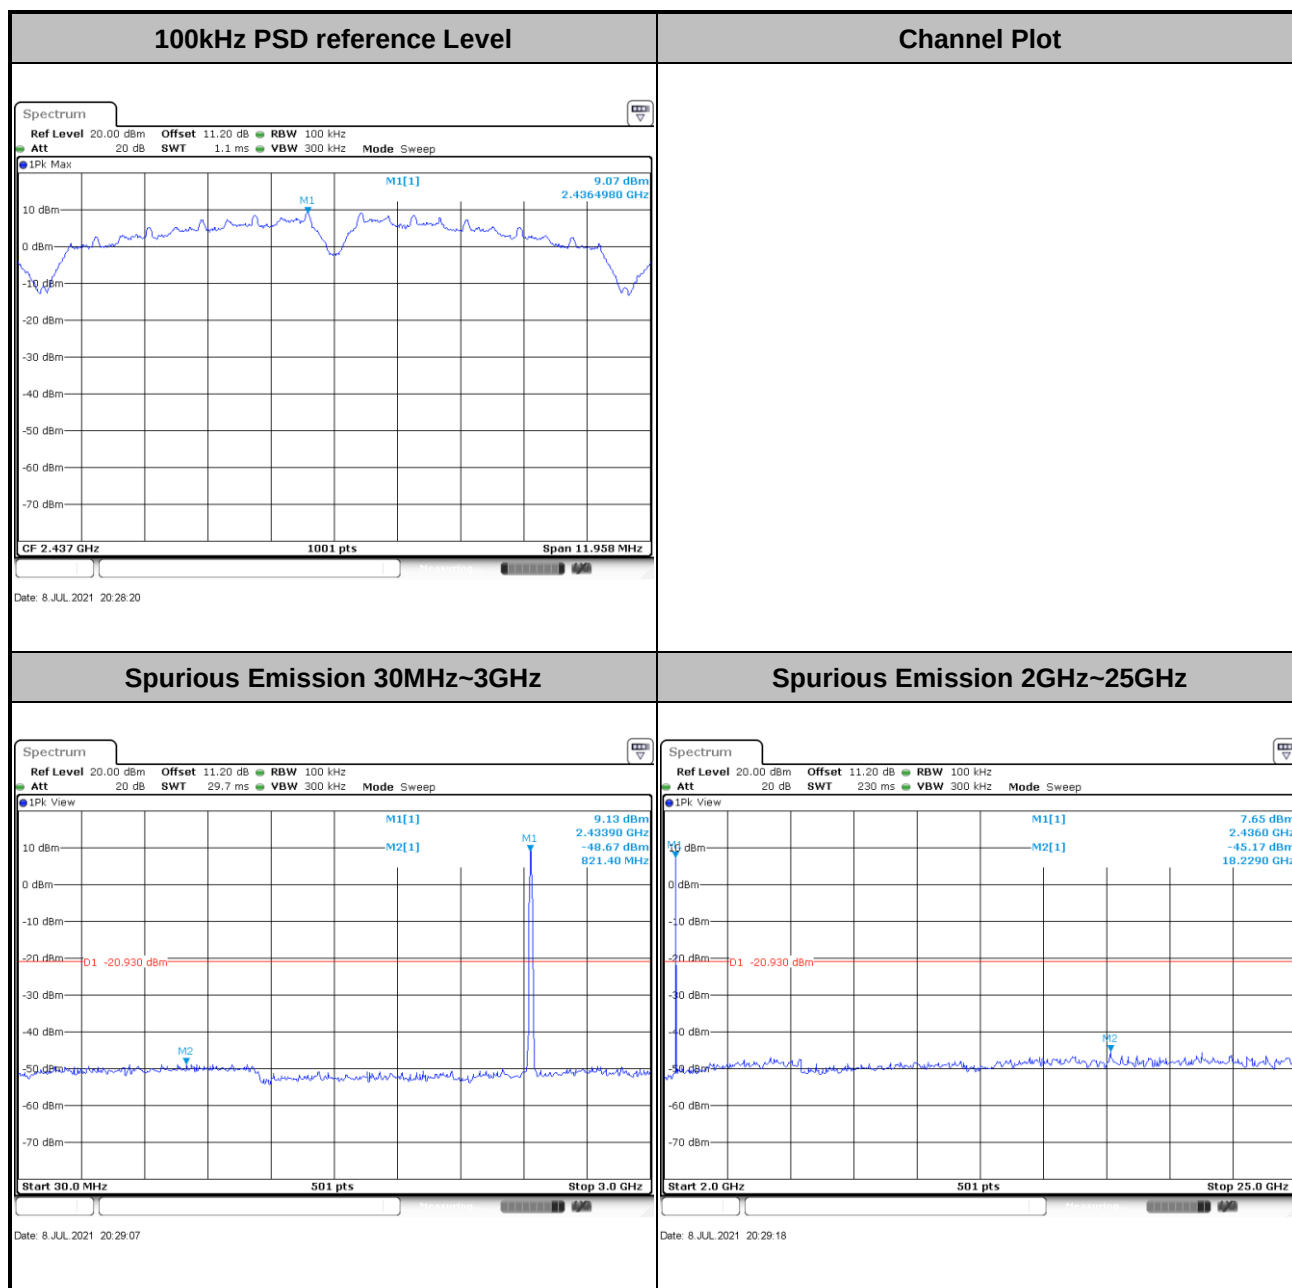



<Ant 2>


Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

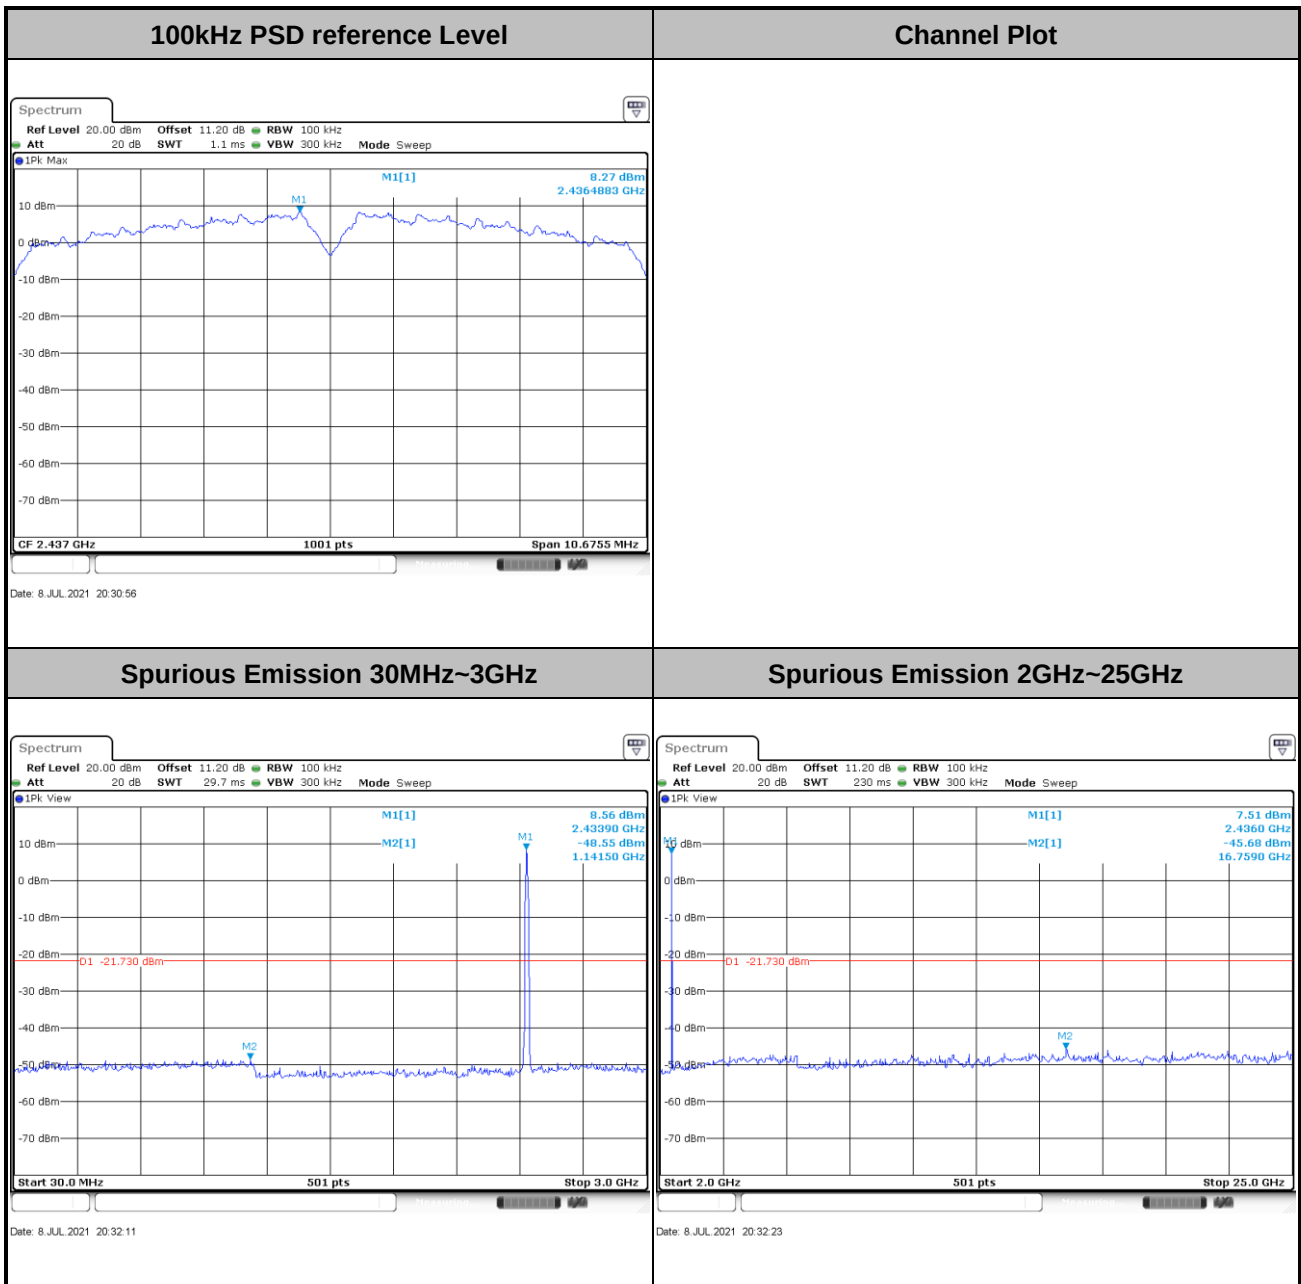



<Ant 1>


Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

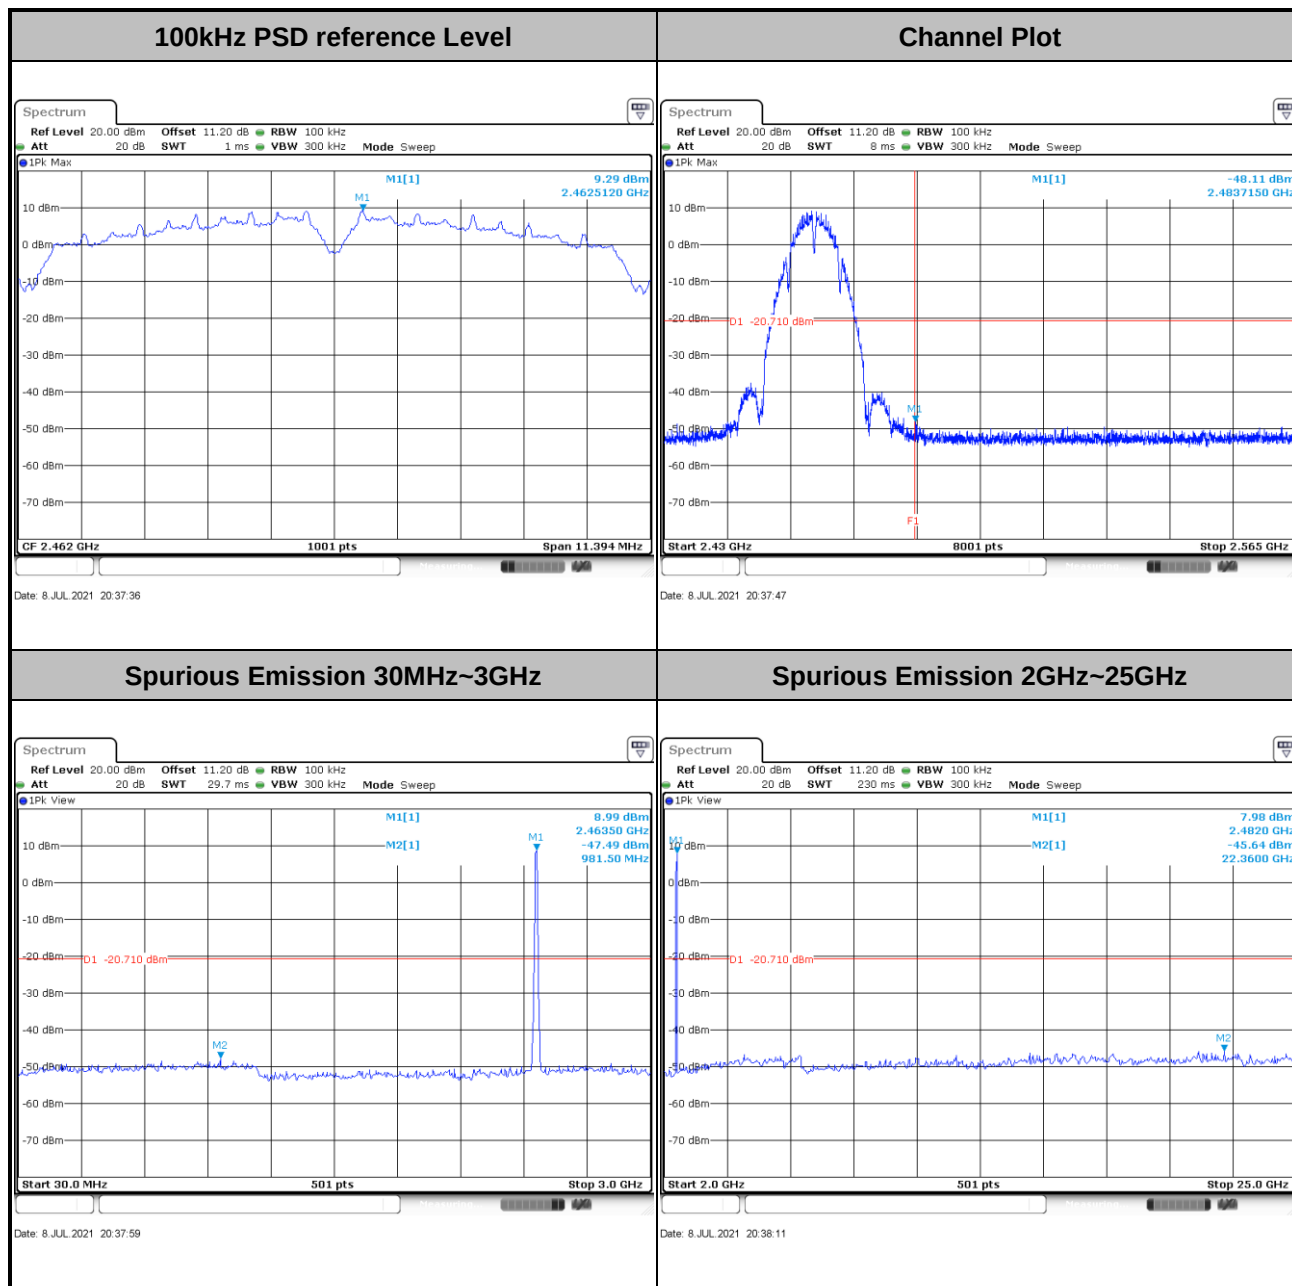



<Ant 2>


Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

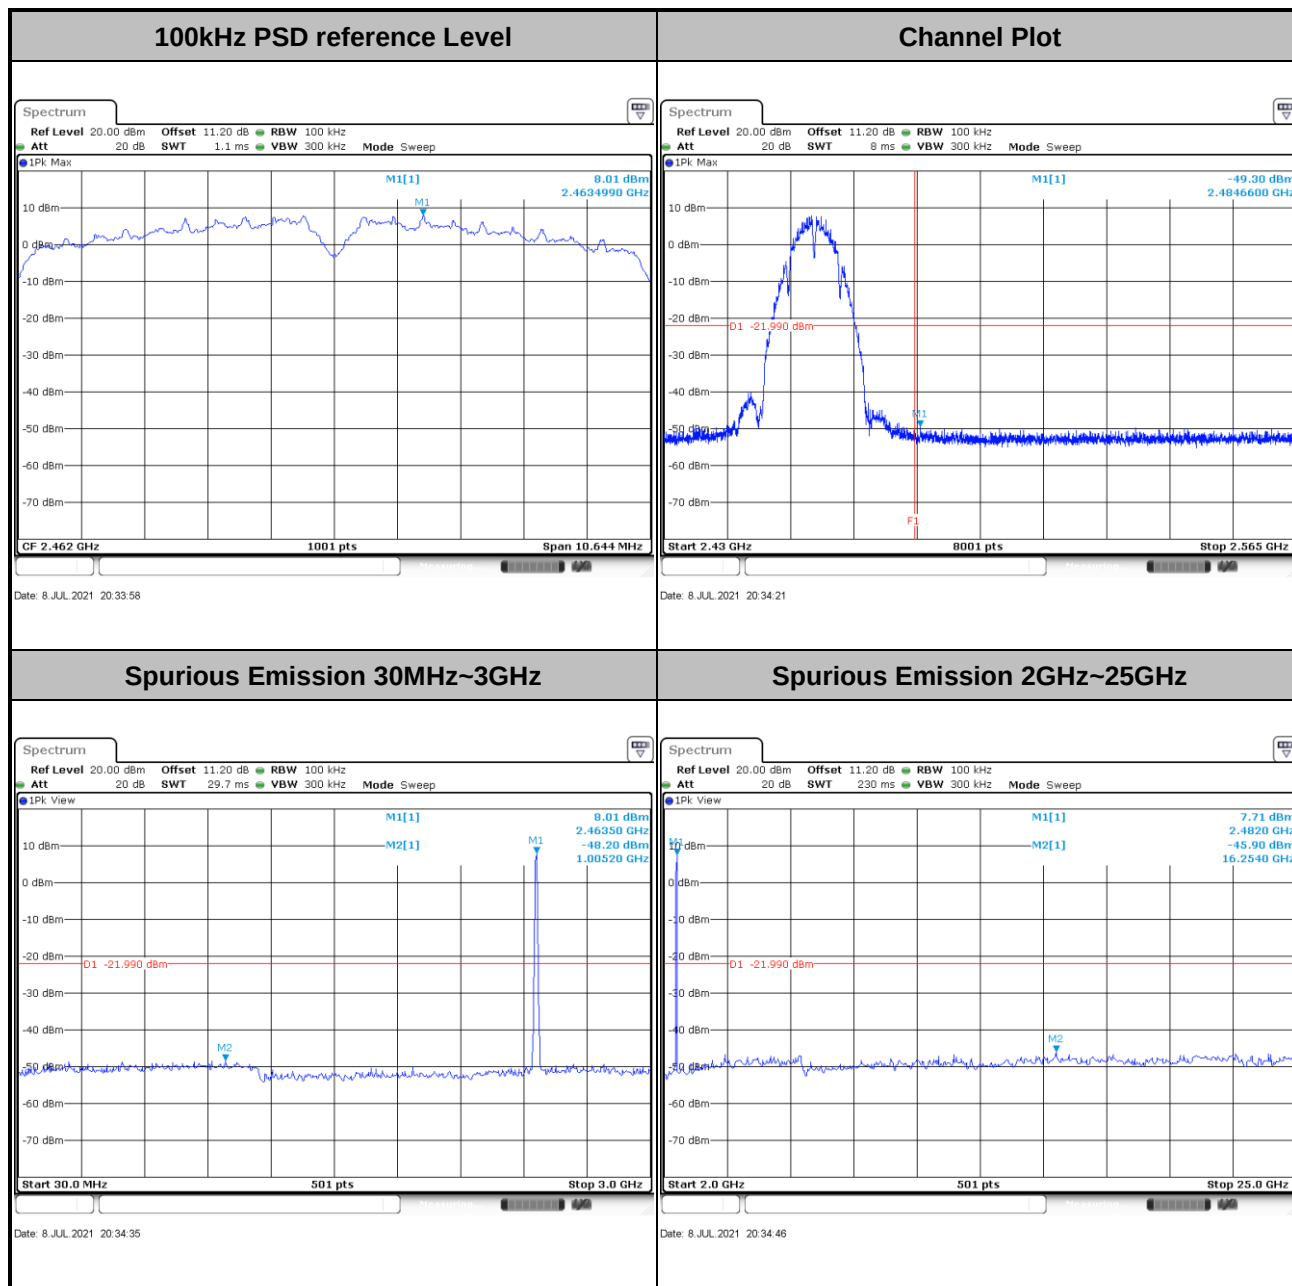




<Ant 1>

Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

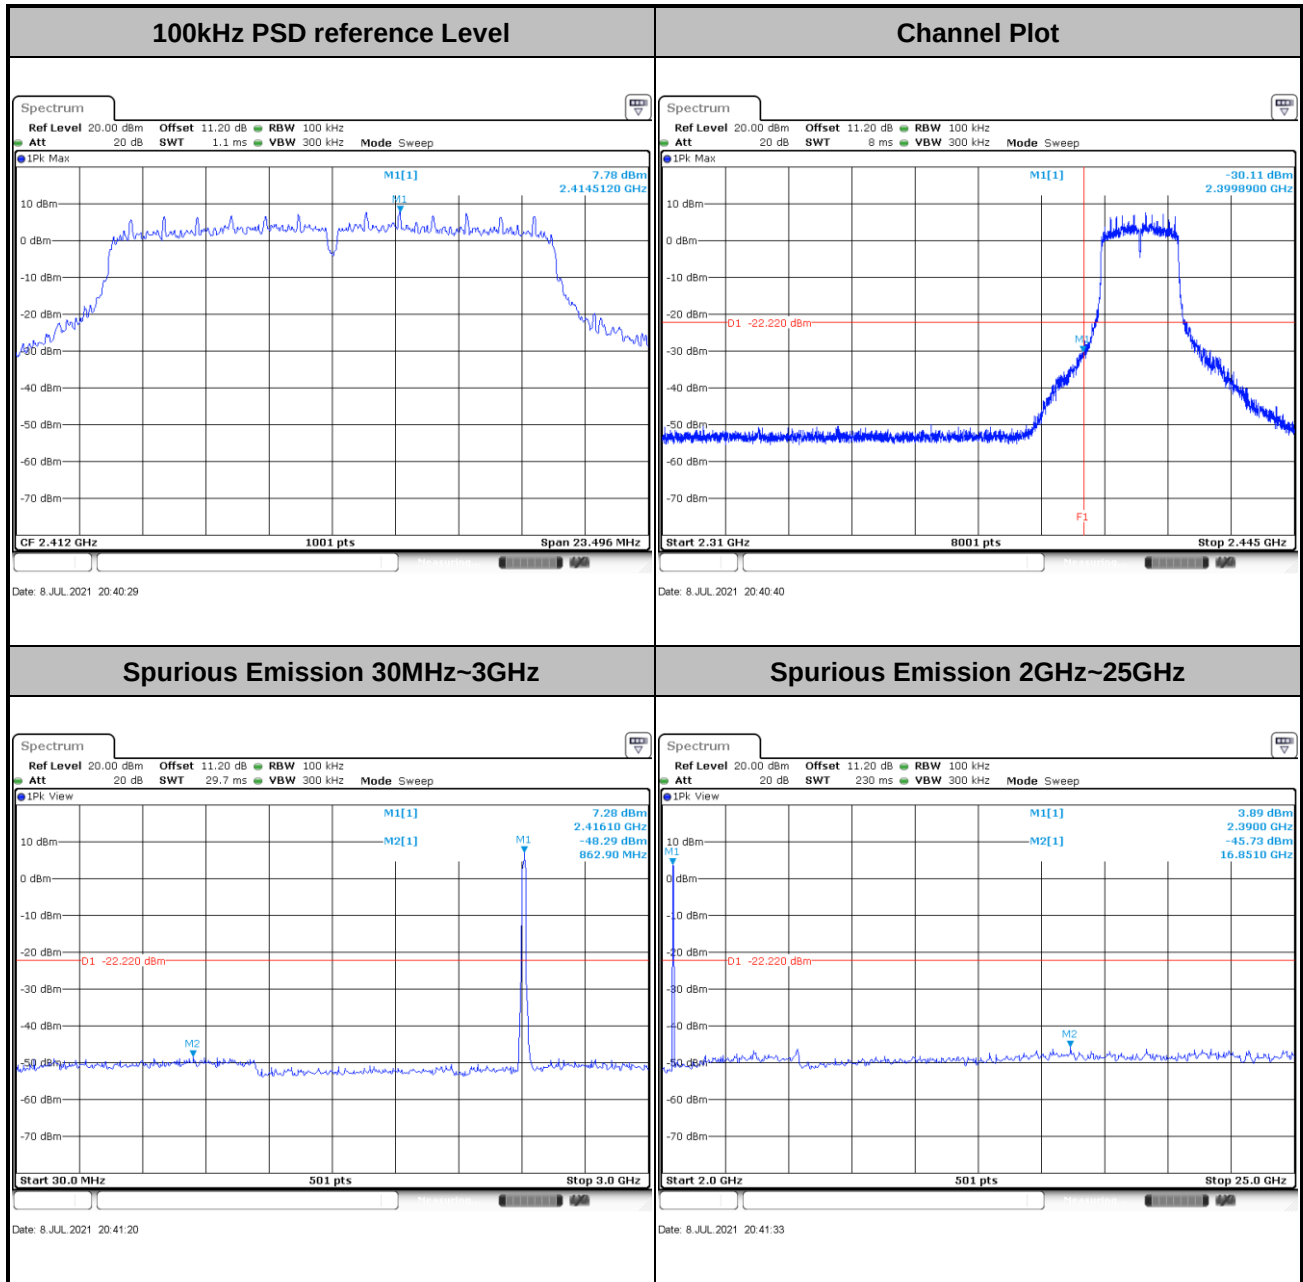




<Ant 2>

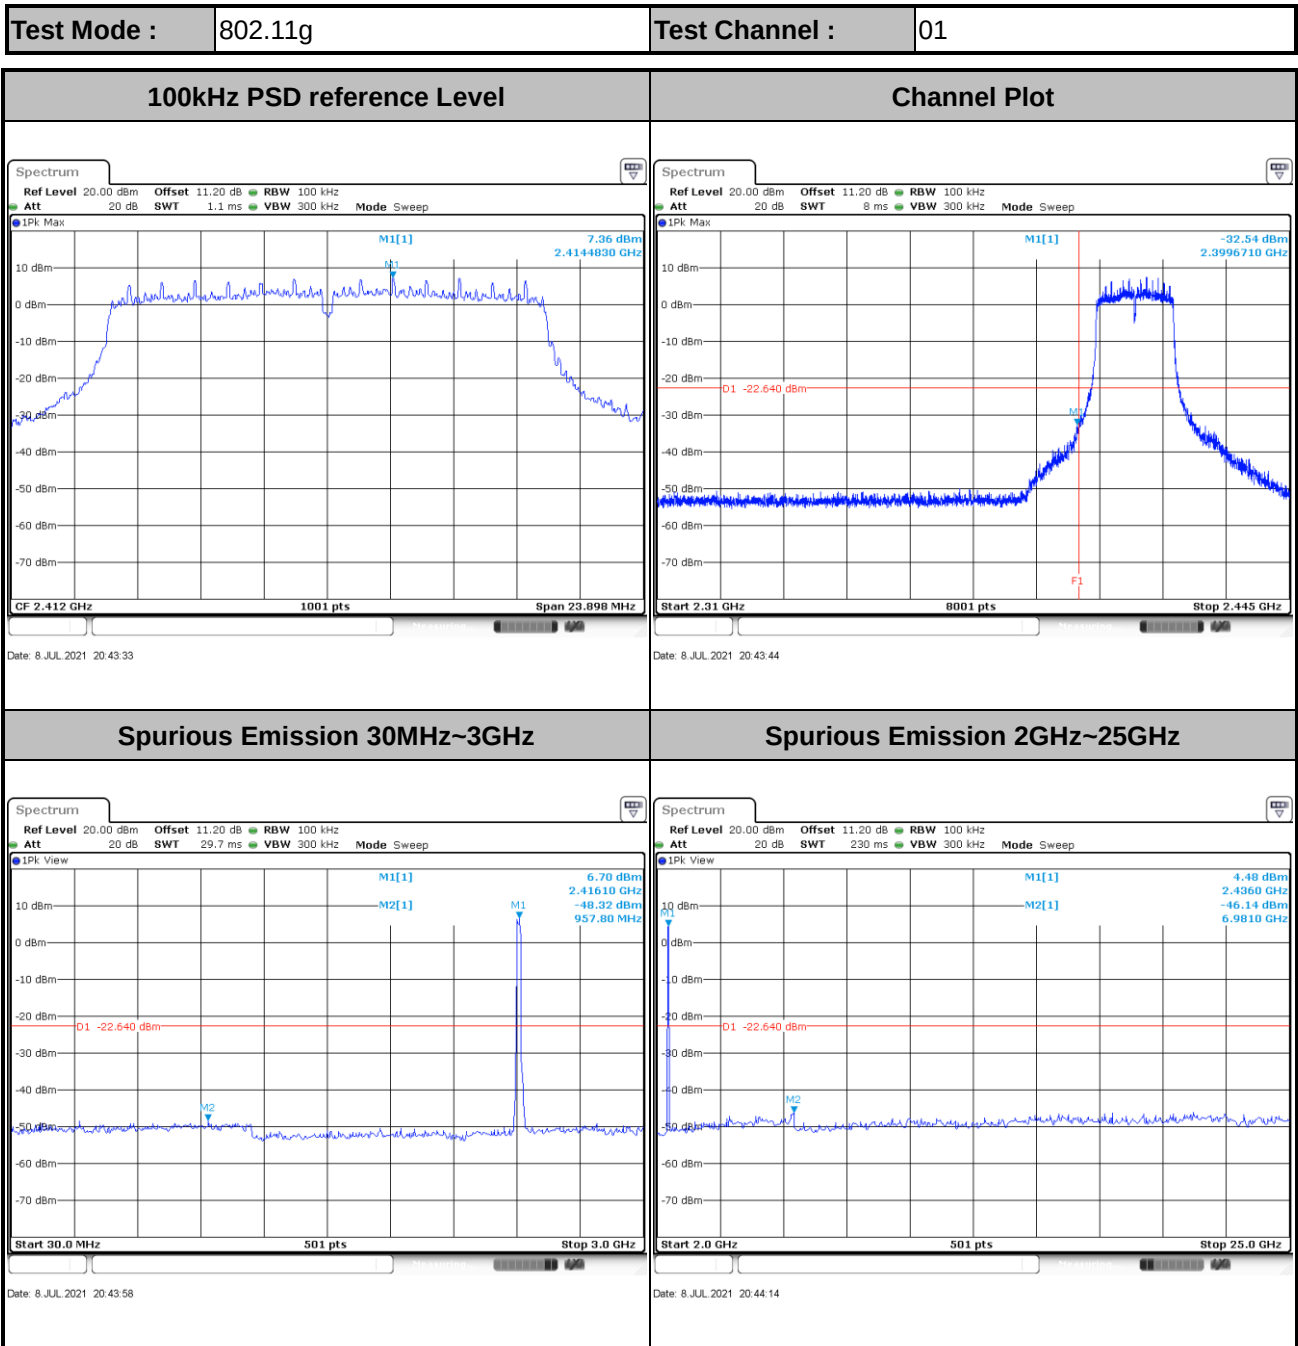



<Ant 1>


Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

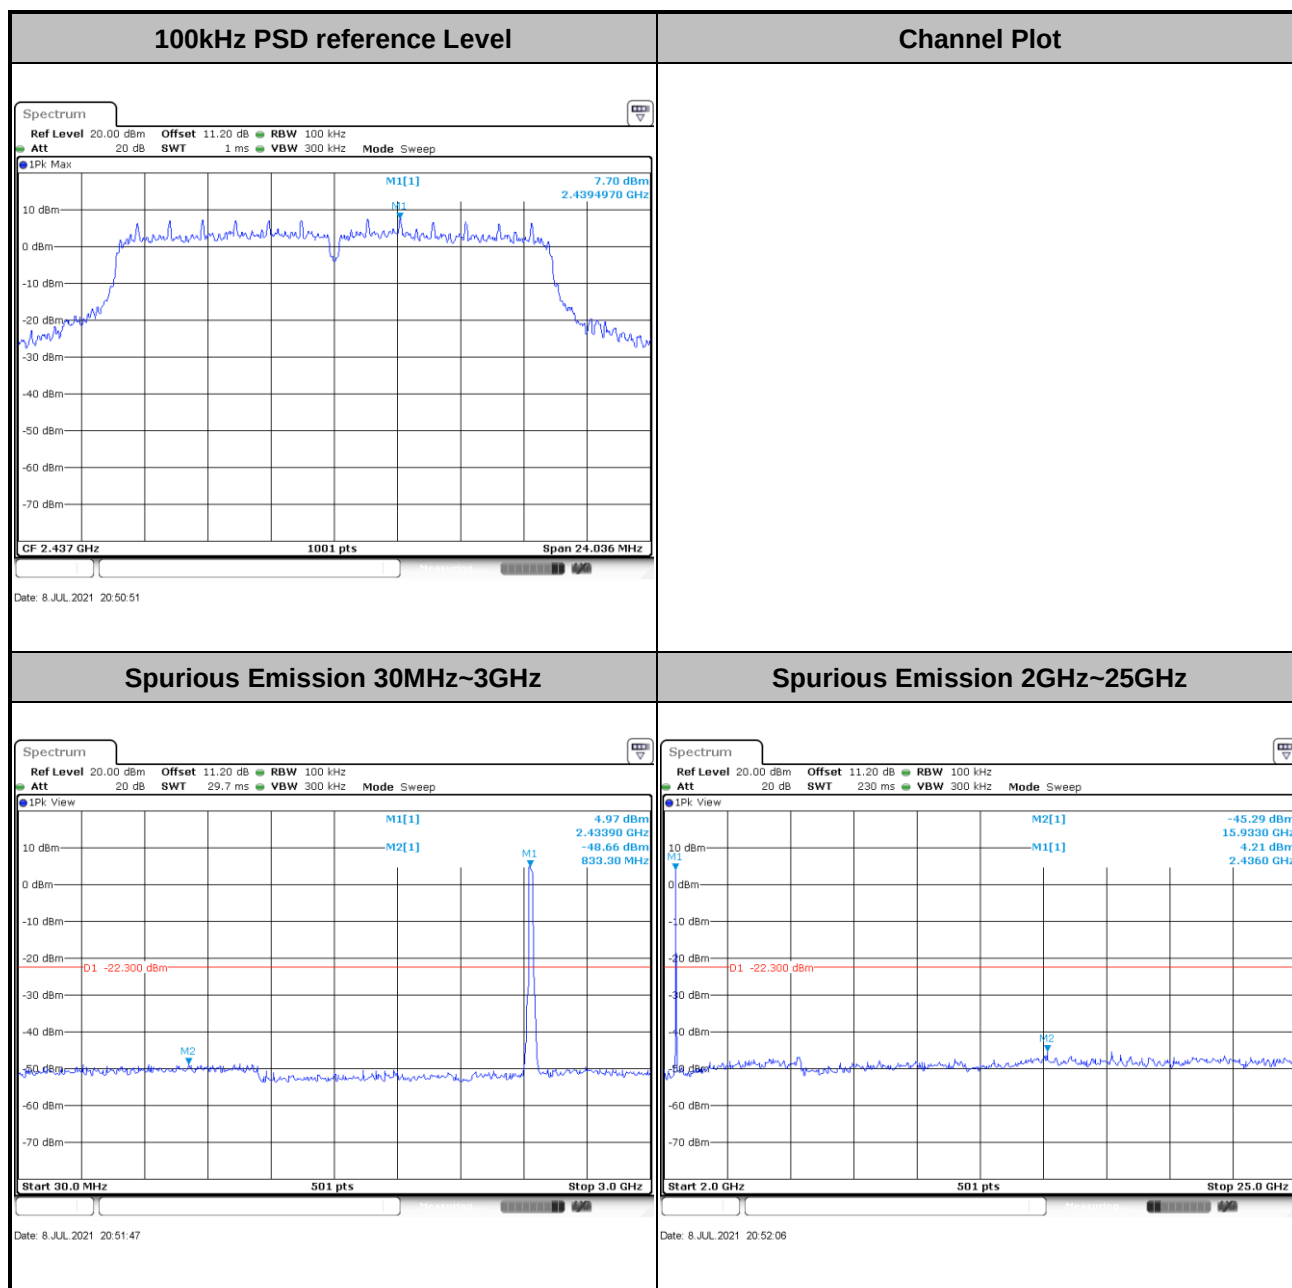



<Ant 2>


Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

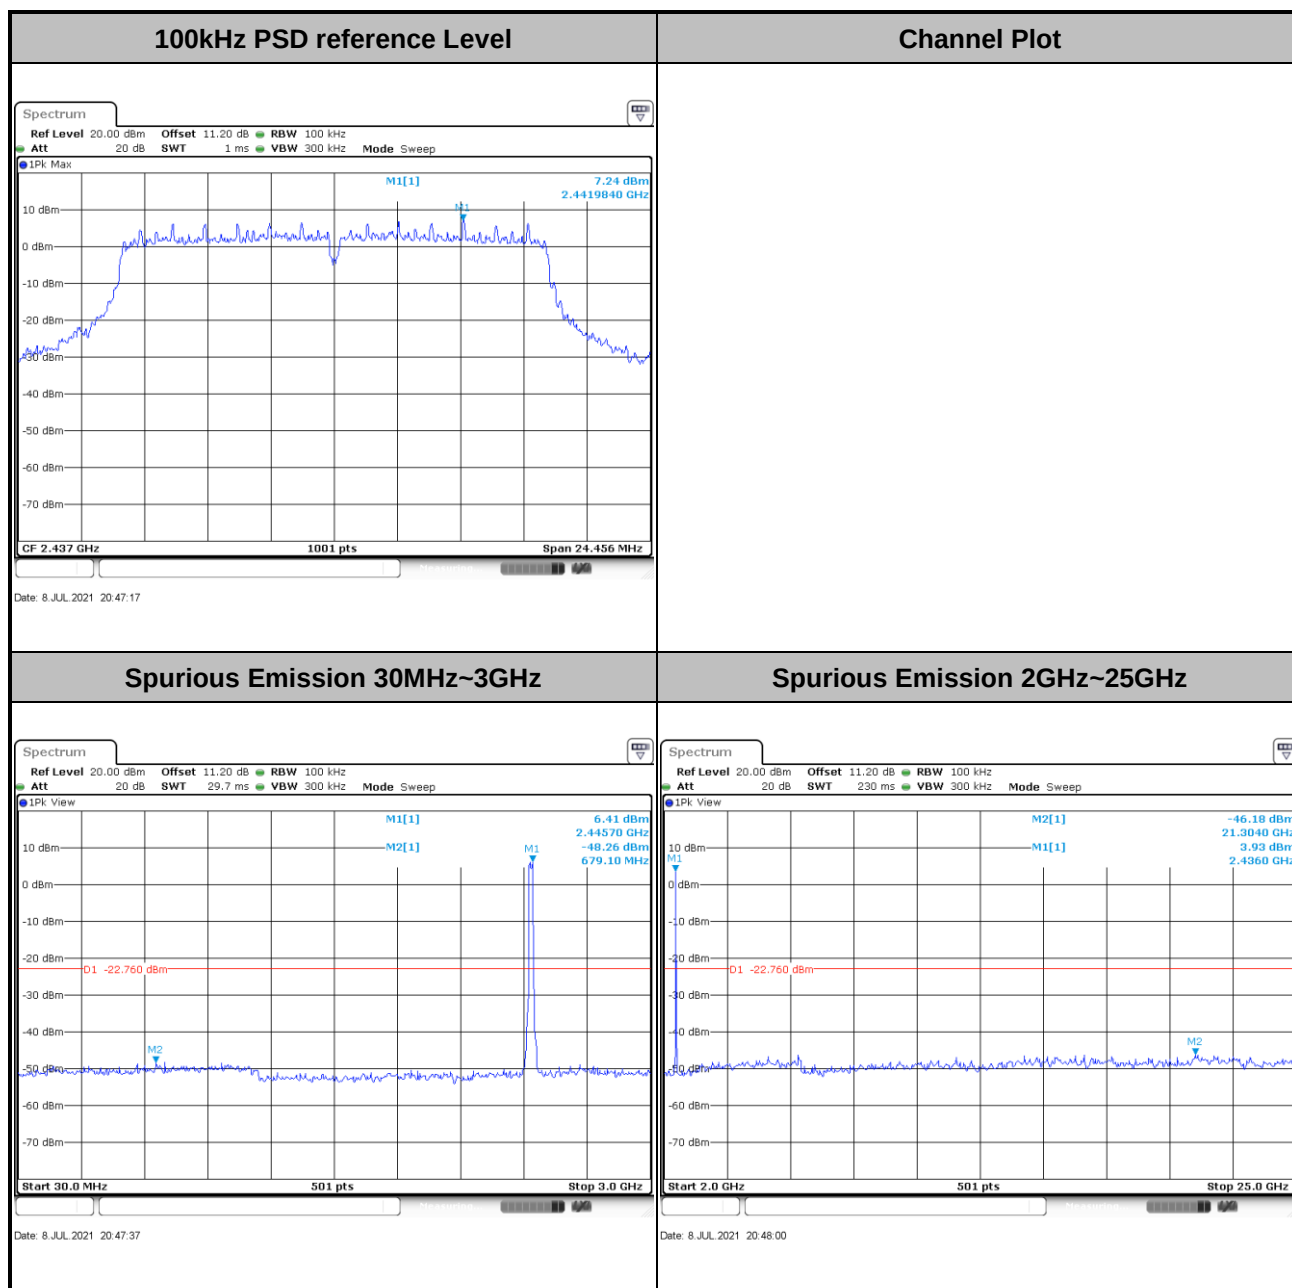



<Ant 1>


Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

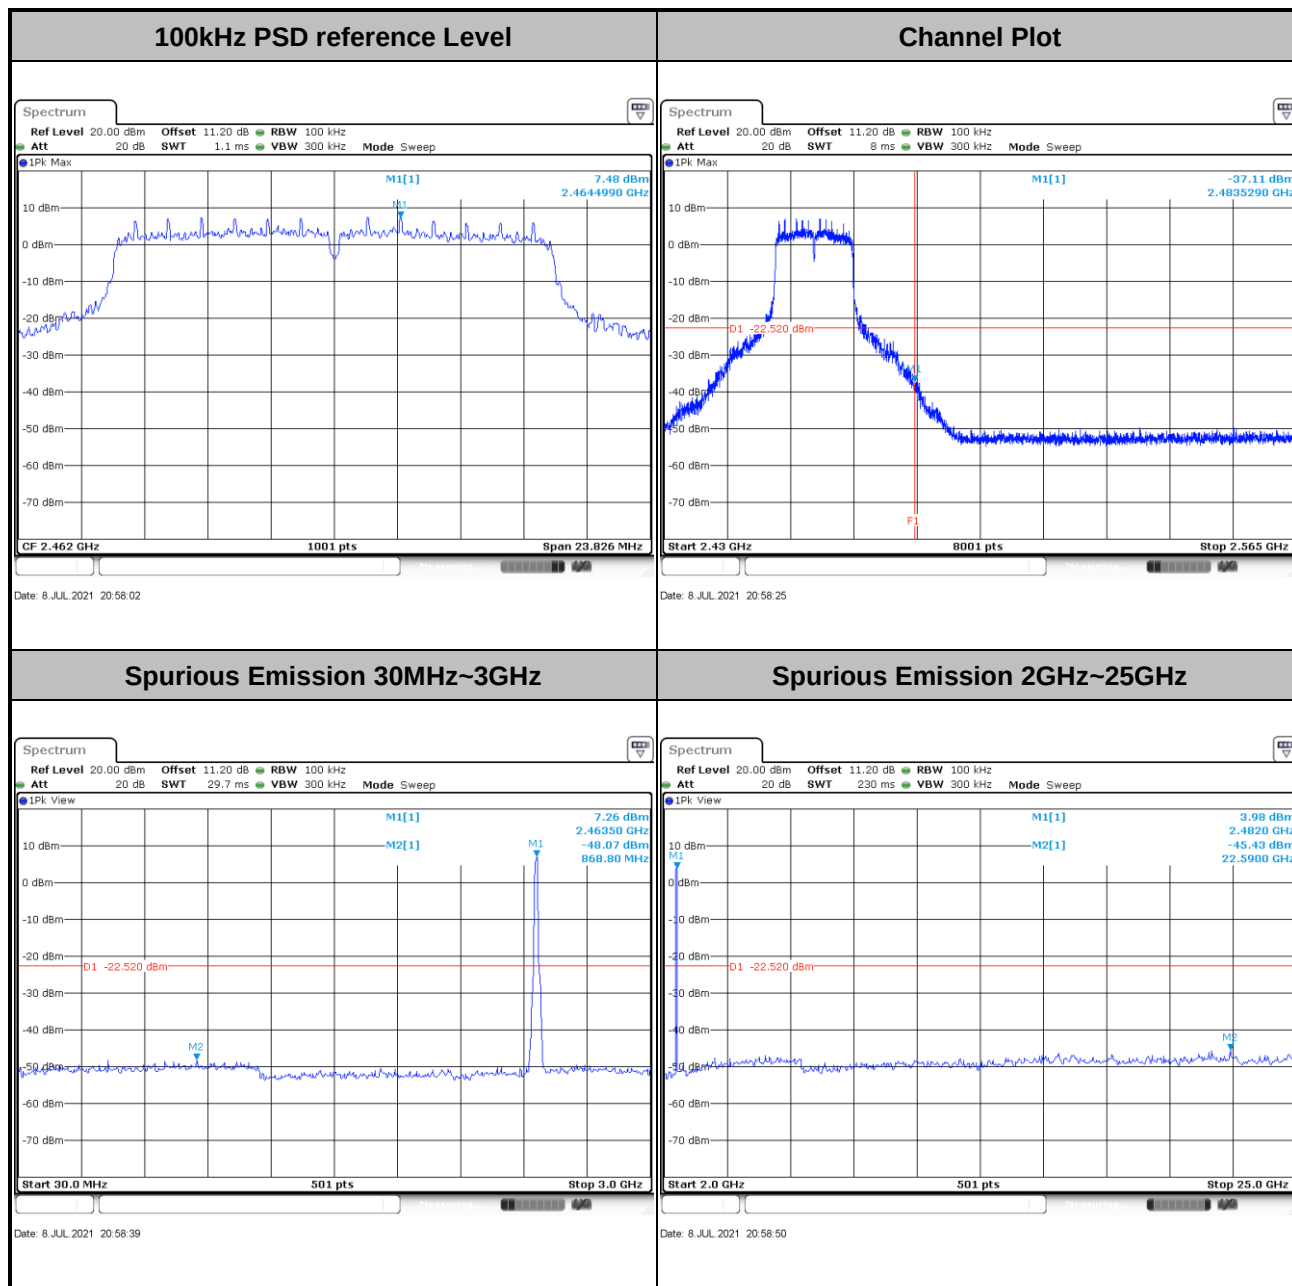



<Ant 2>


Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

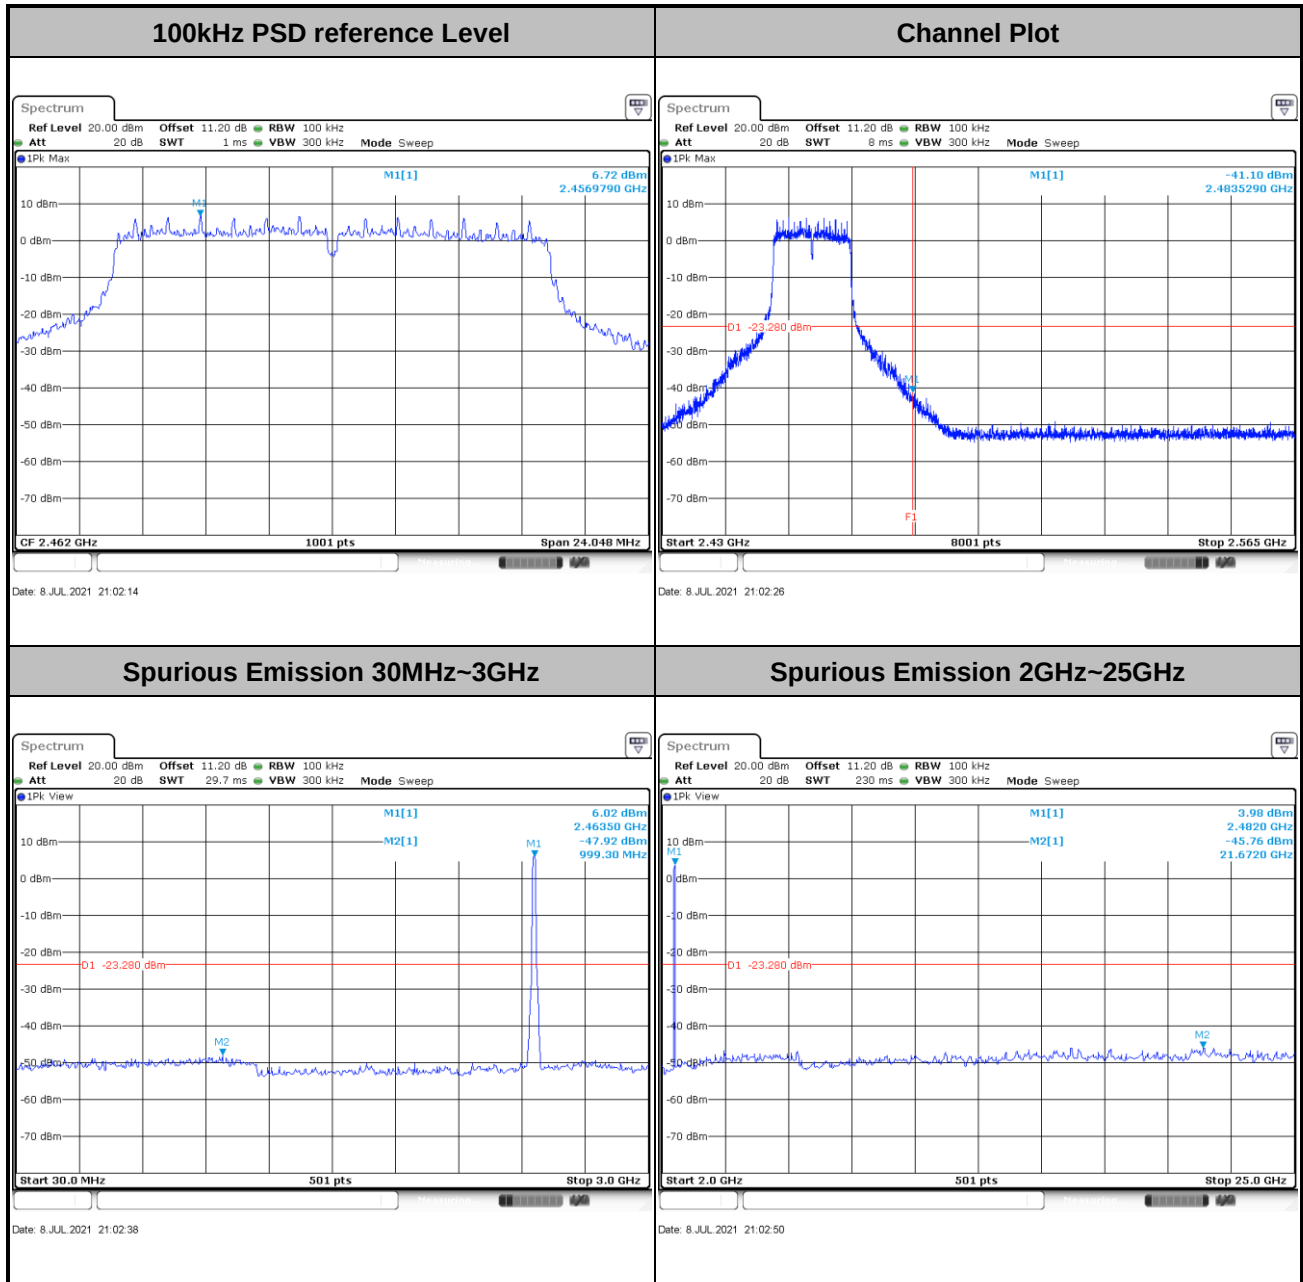



<Ant 1>


Test Mode :	802.11ax HE20	Test Channel :	01
-------------	---------------	----------------	----

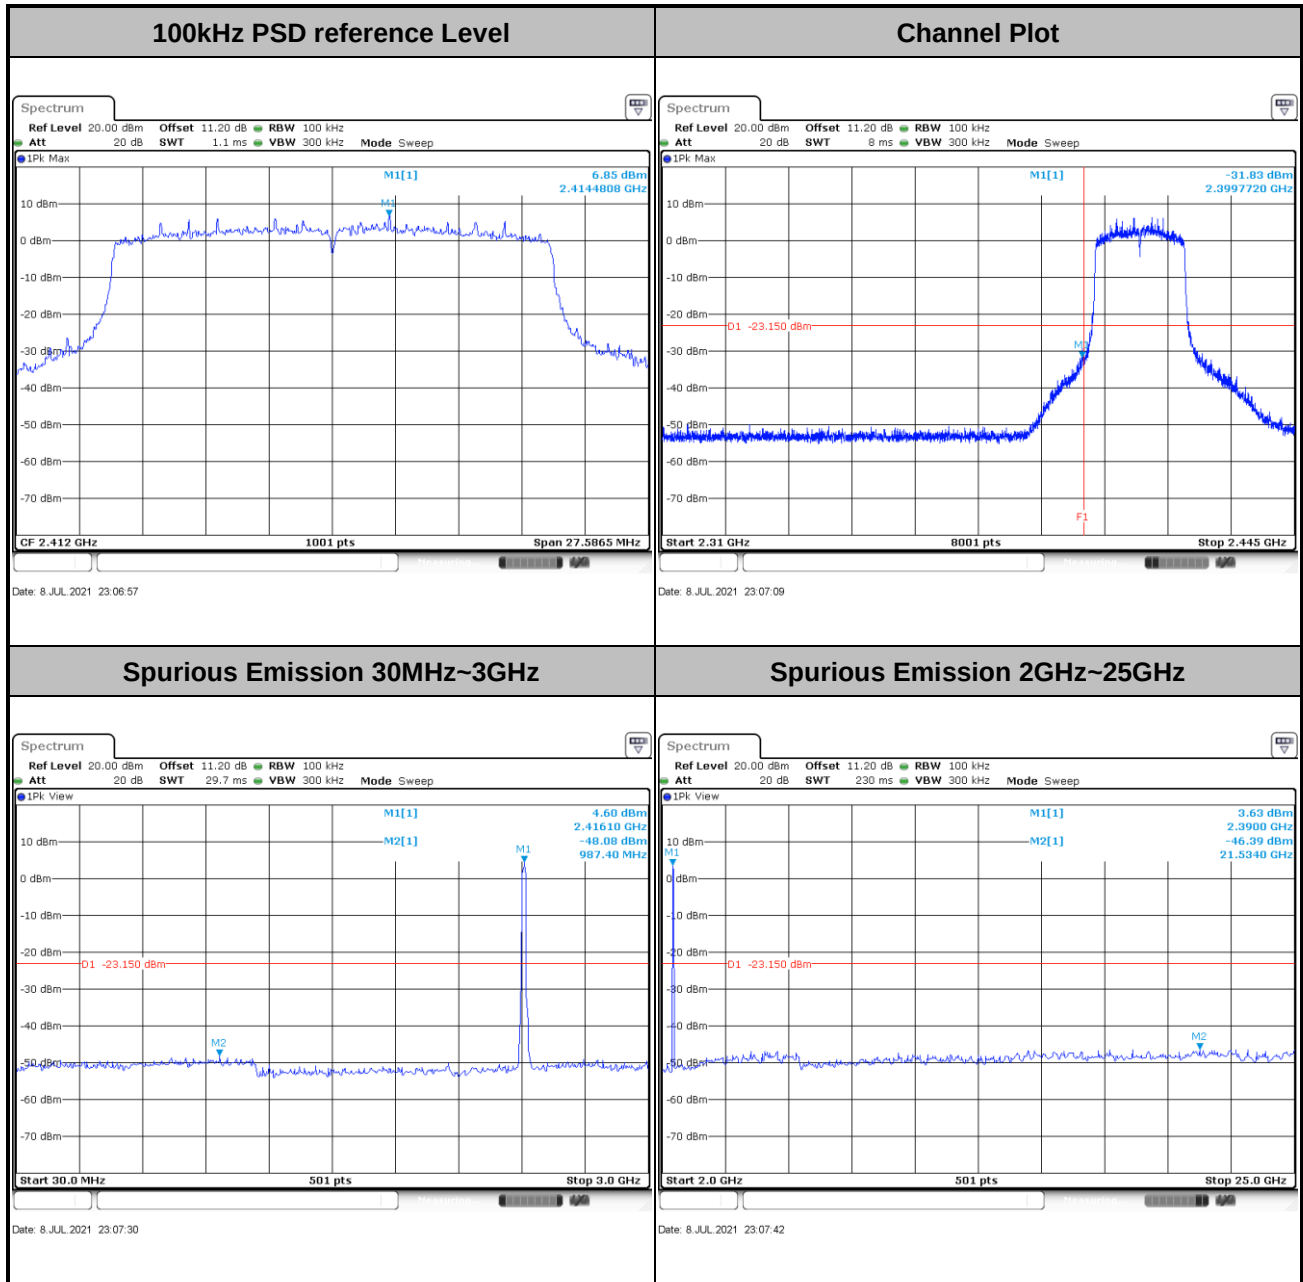



<Ant 2>


Test Mode :	802.11ax HE20	Test Channel :	01
-------------	---------------	----------------	----

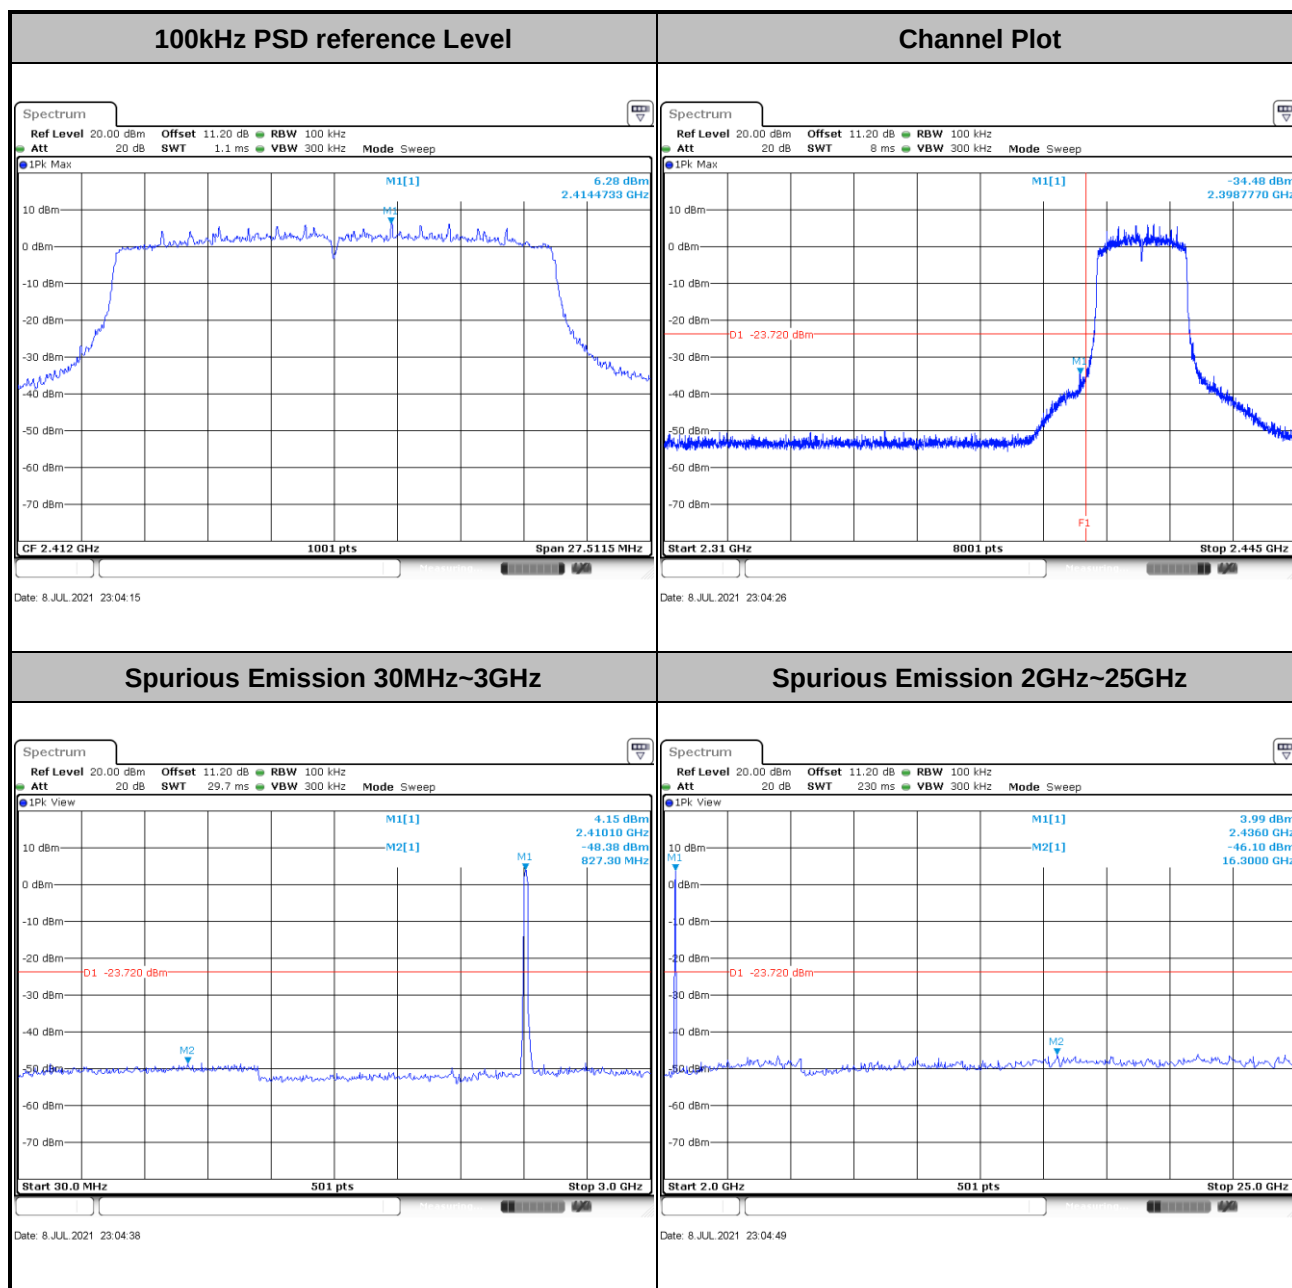



<Ant 1>


Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

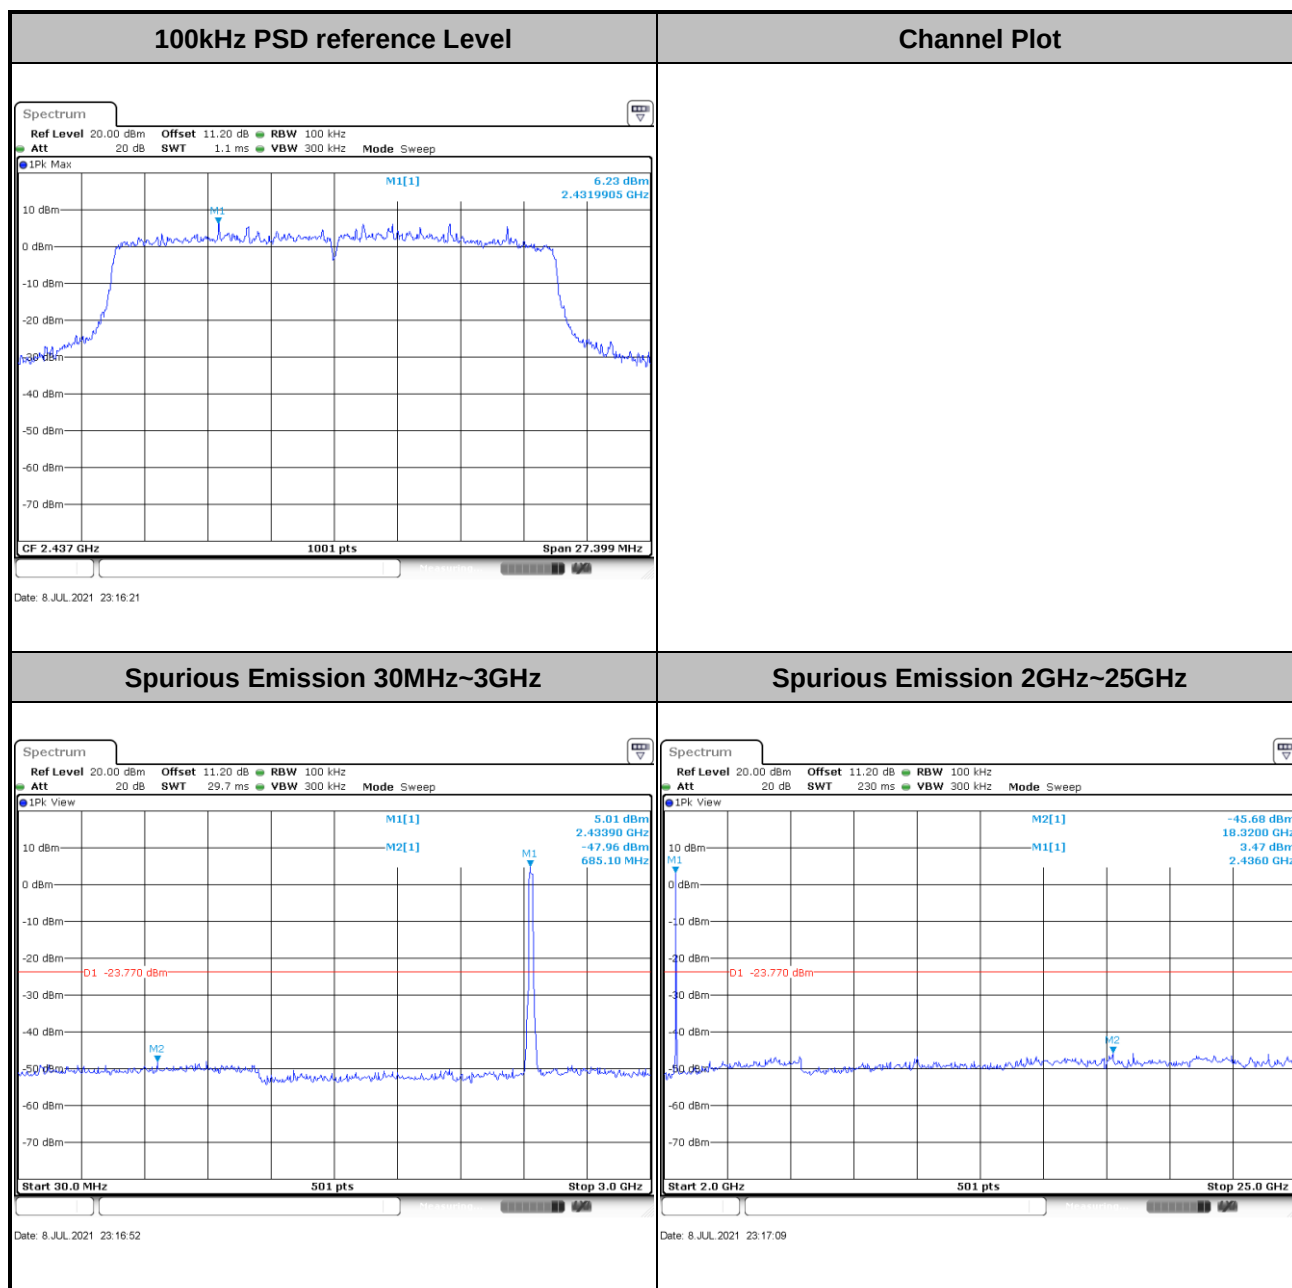



<Ant 2>


Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

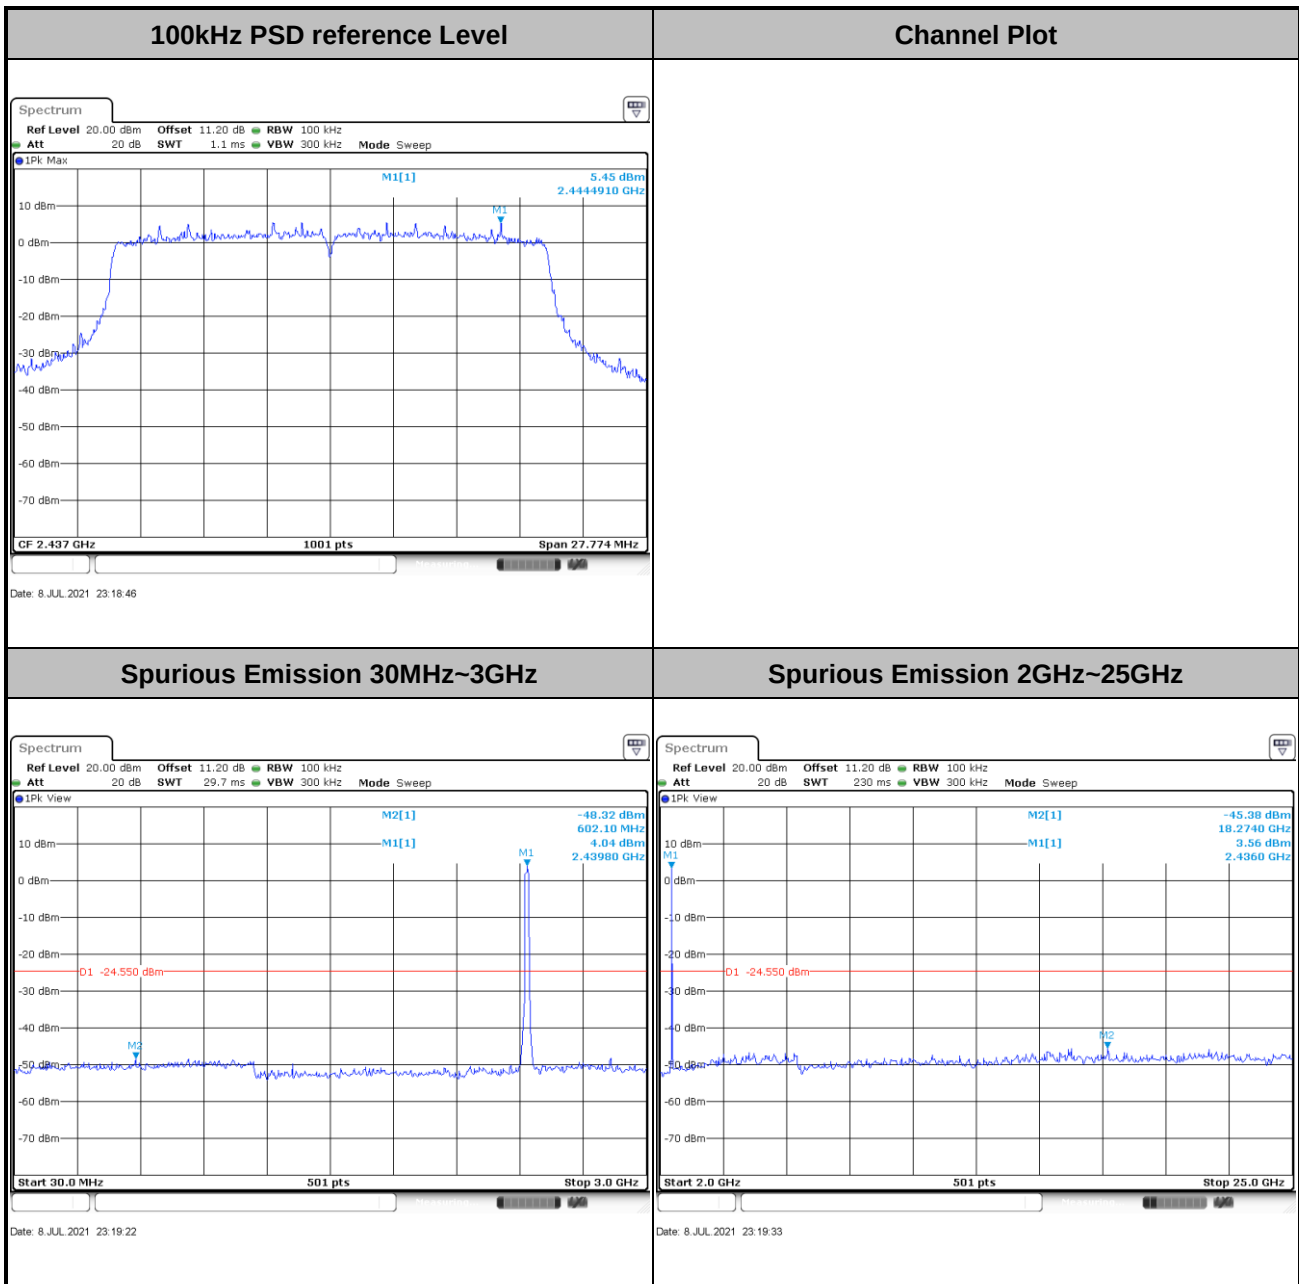



<Ant 1>


Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

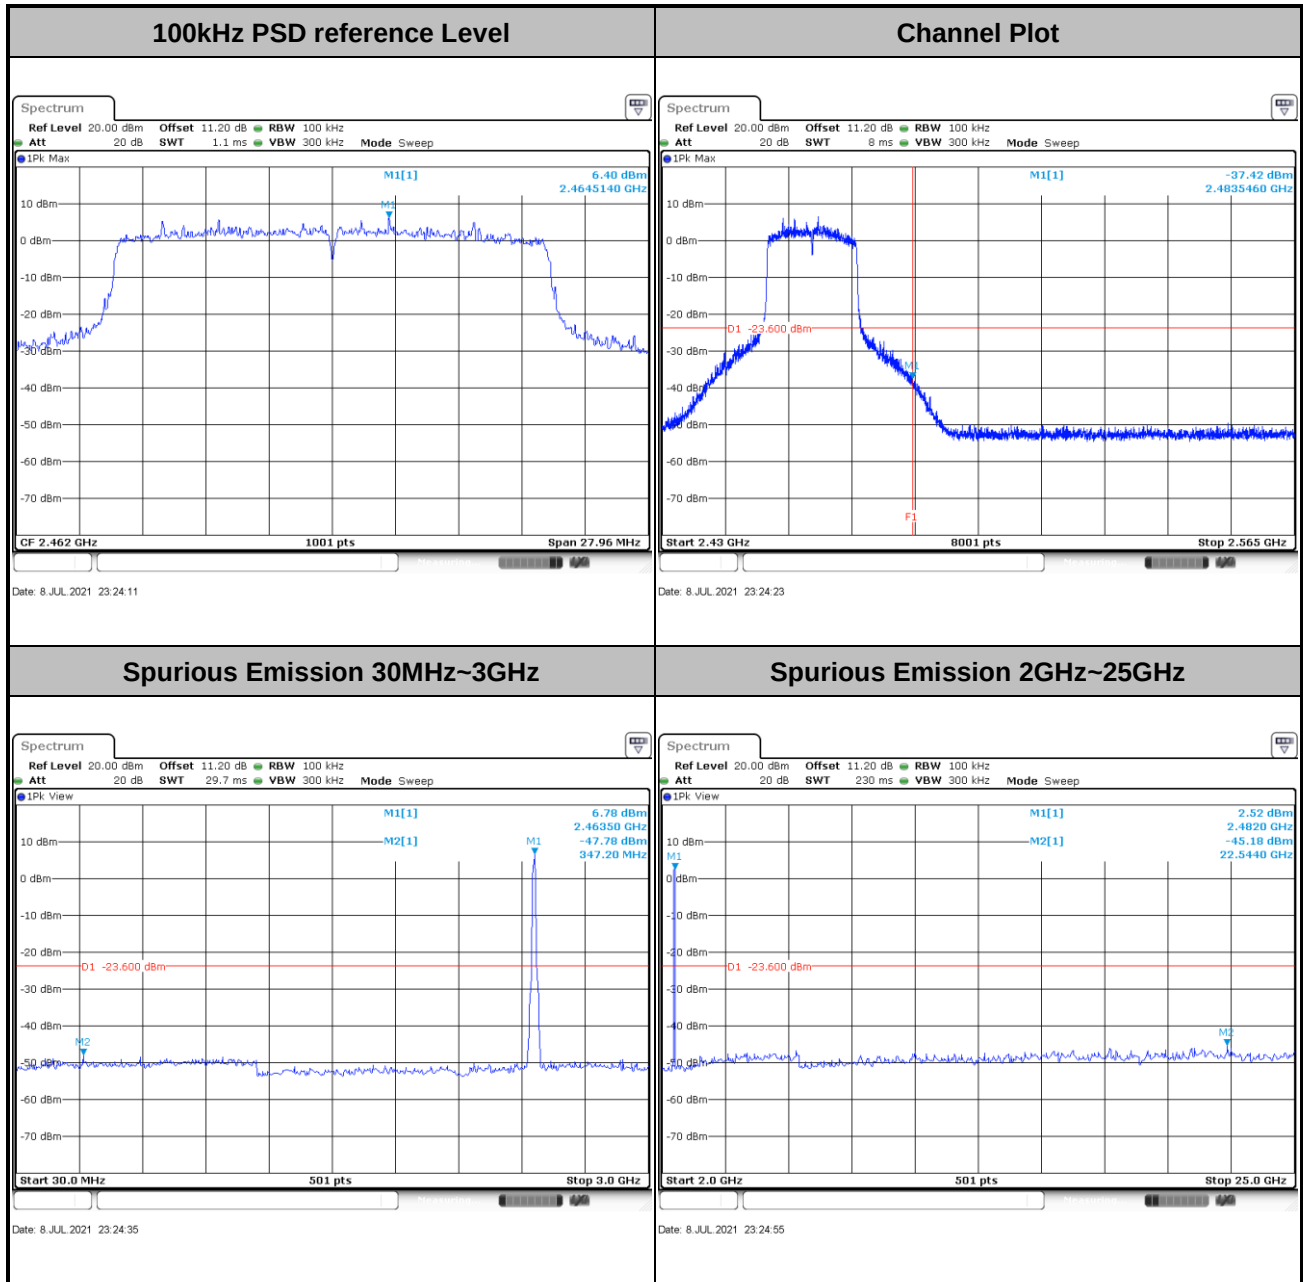



<Ant 2>


Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

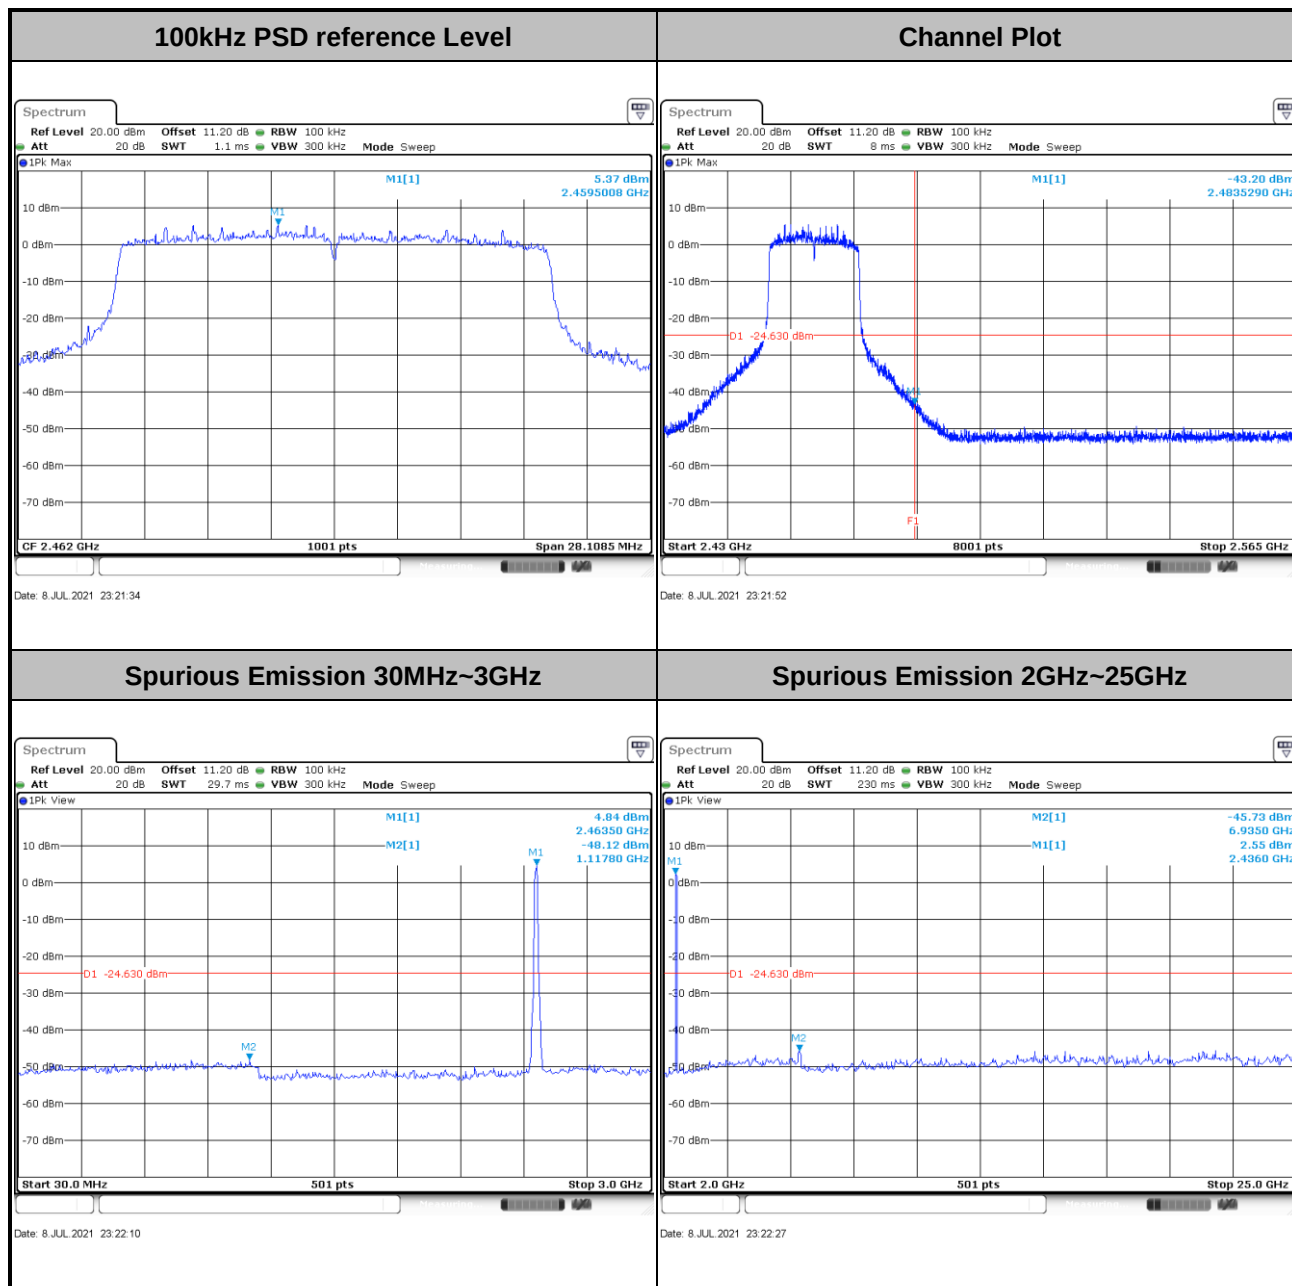



<Ant 1>


Test Mode :	802.11ax HE40	Test Channel :	03
-------------	---------------	----------------	----

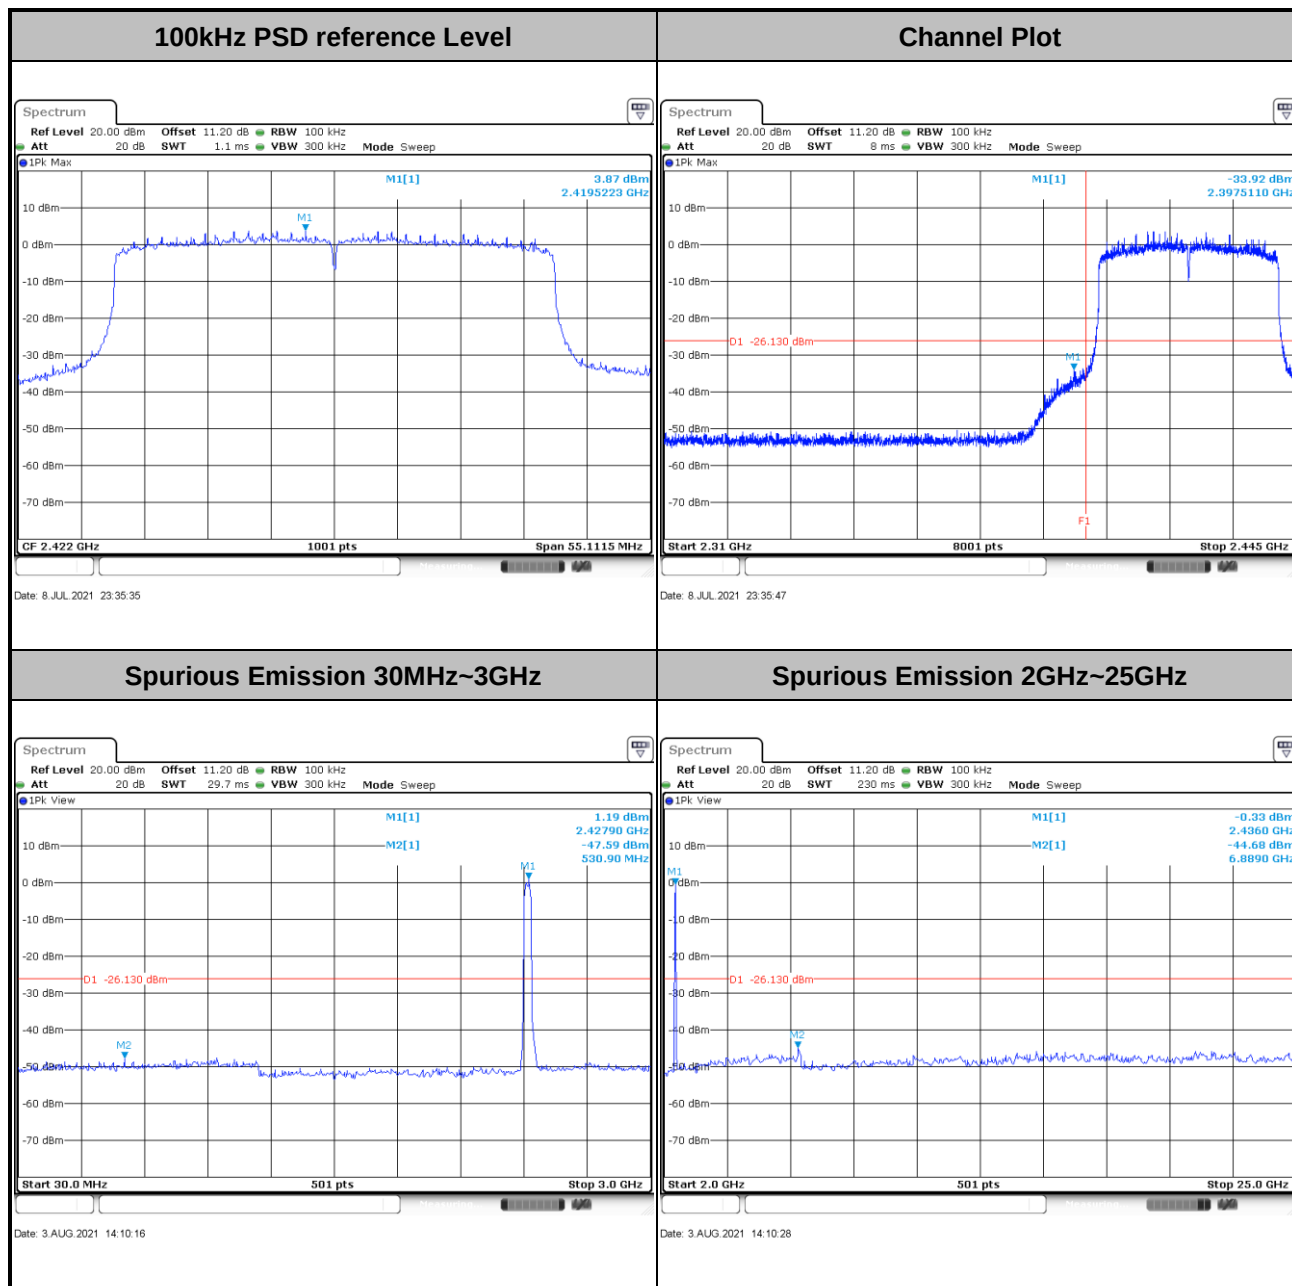



<Ant 2>


Test Mode :	802.11ax HE40	Test Channel :	03
-------------	---------------	----------------	----

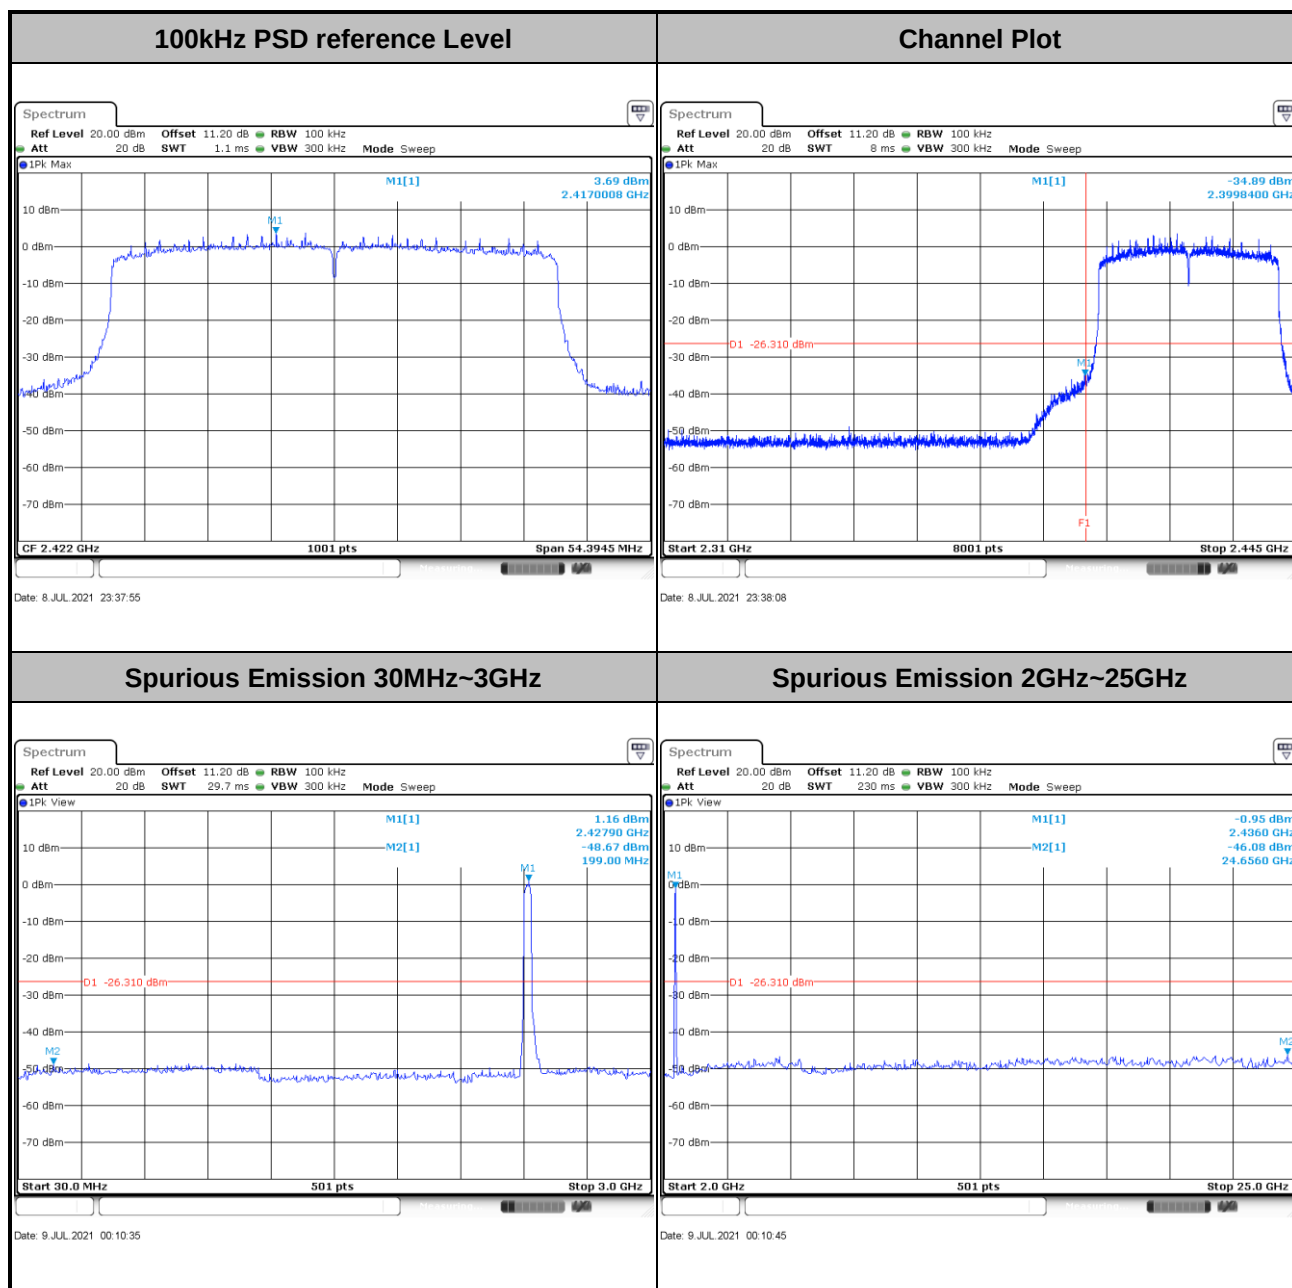



<Ant 1>


Test Mode :	802.11ax HE40	Test Channel :	06
-------------	---------------	----------------	----

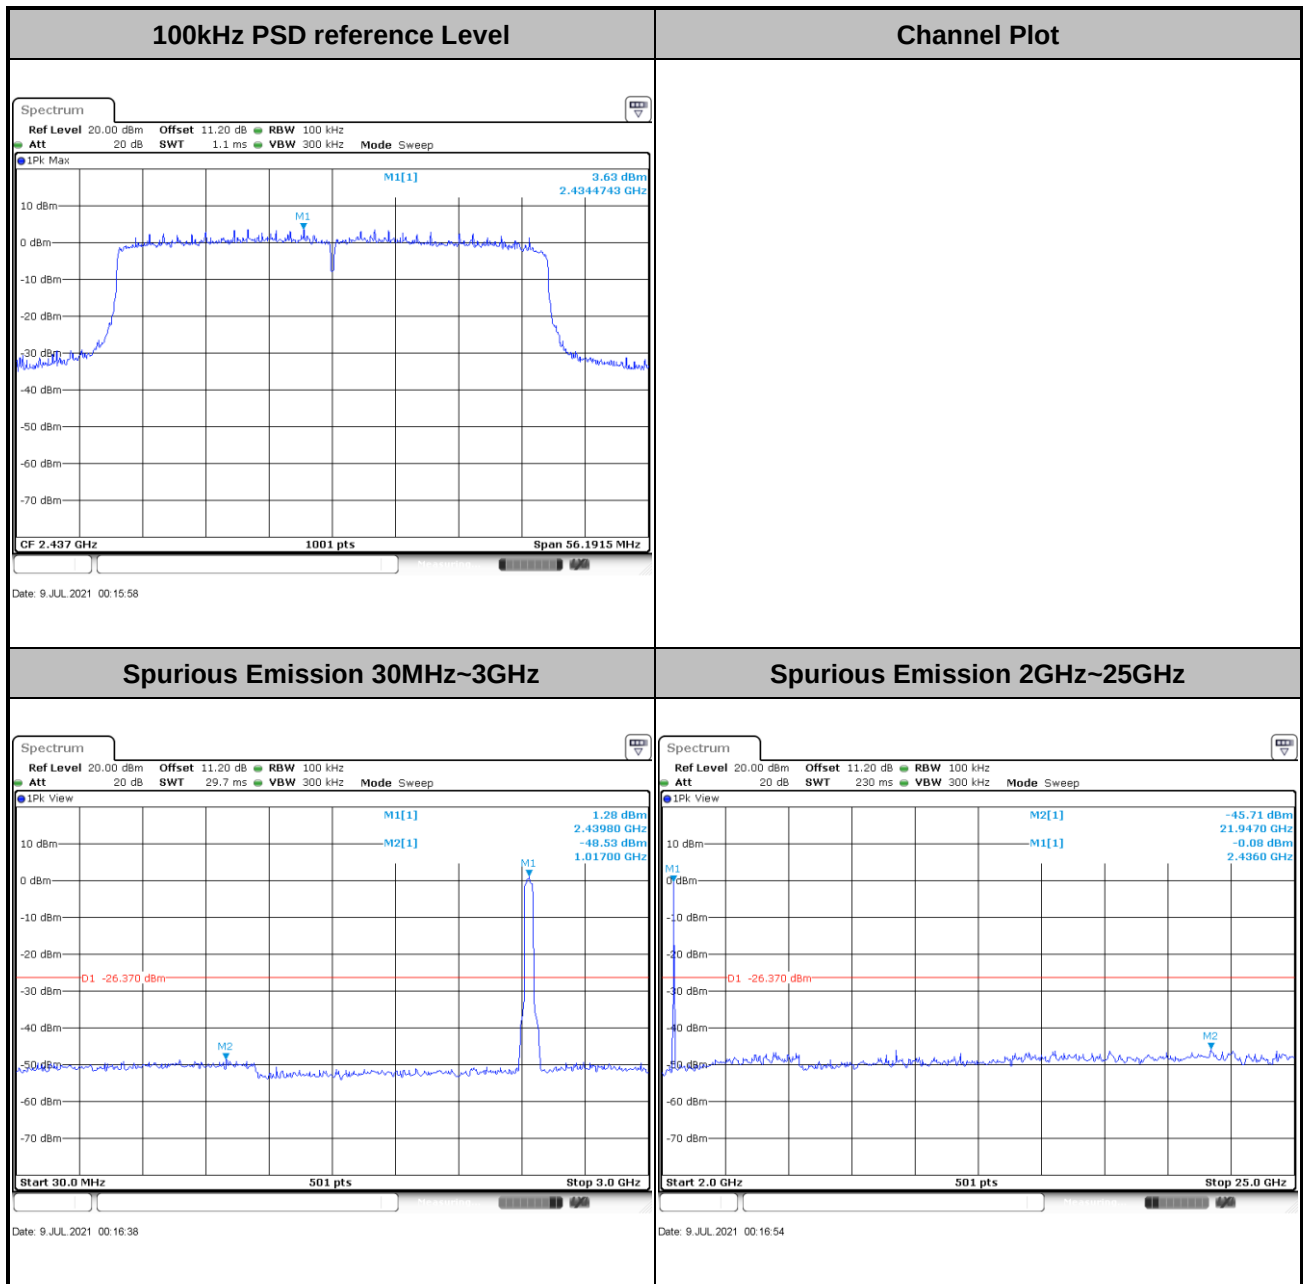



<Ant 2>


Test Mode :	802.11ax HE40	Test Channel :	06
-------------	---------------	----------------	----

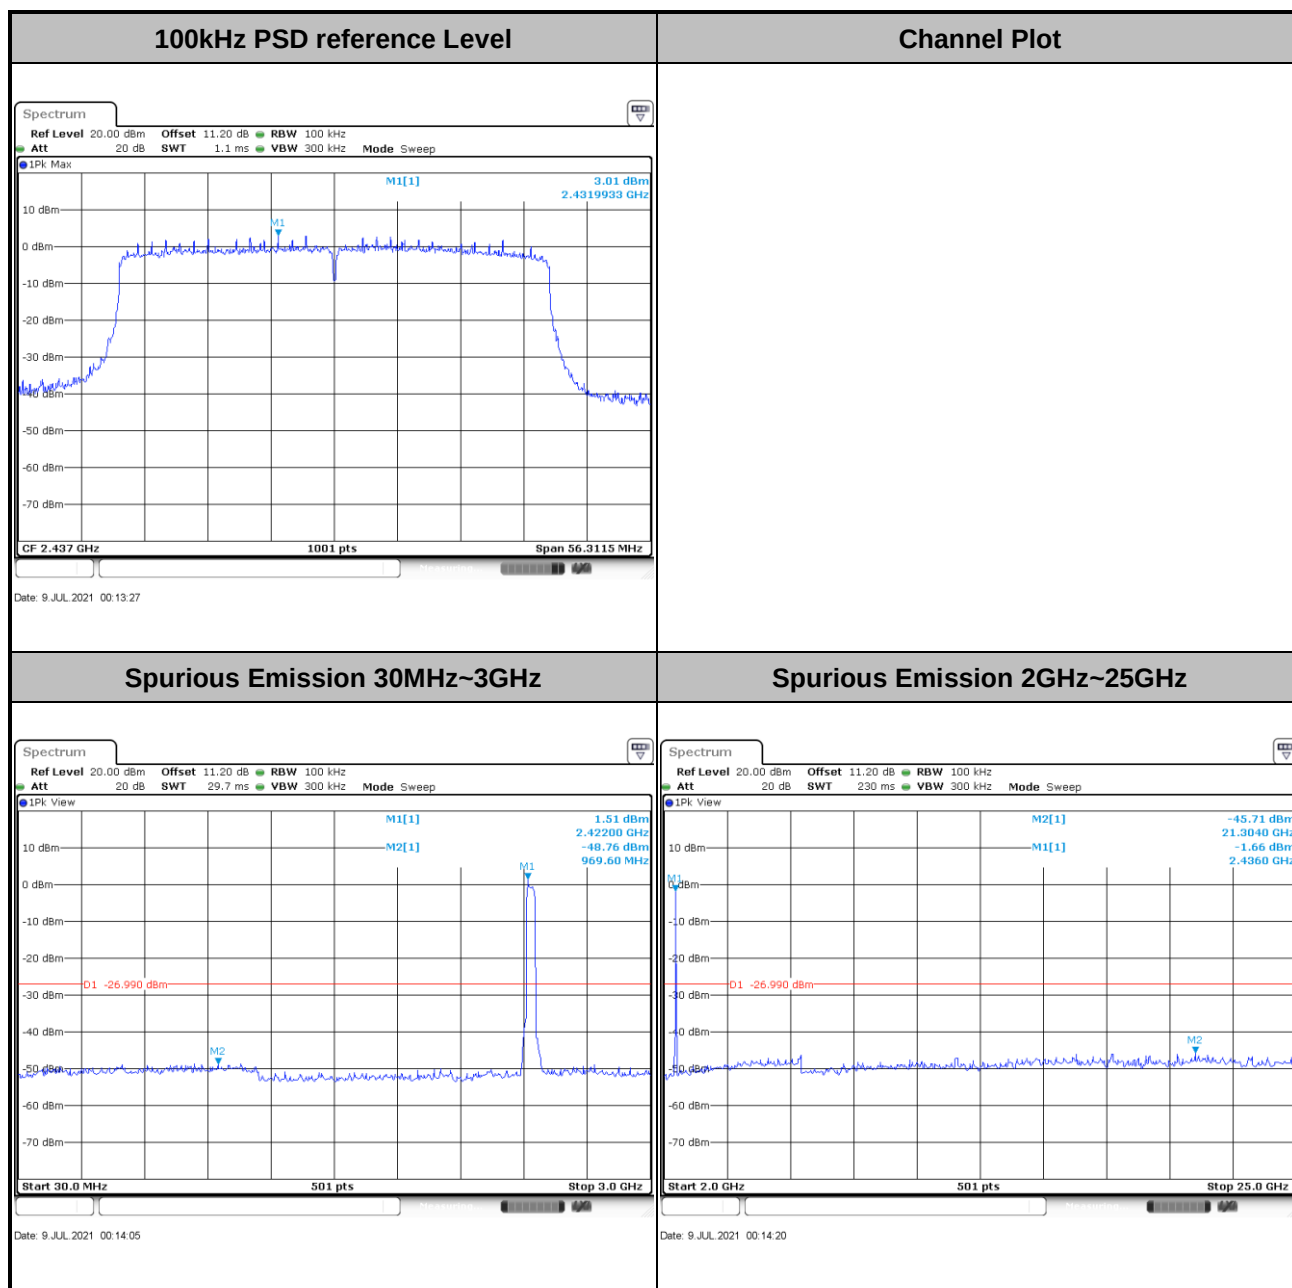



<Ant 1>


Test Mode :	802.11ax HE40	Test Channel :	09
-------------	---------------	----------------	----

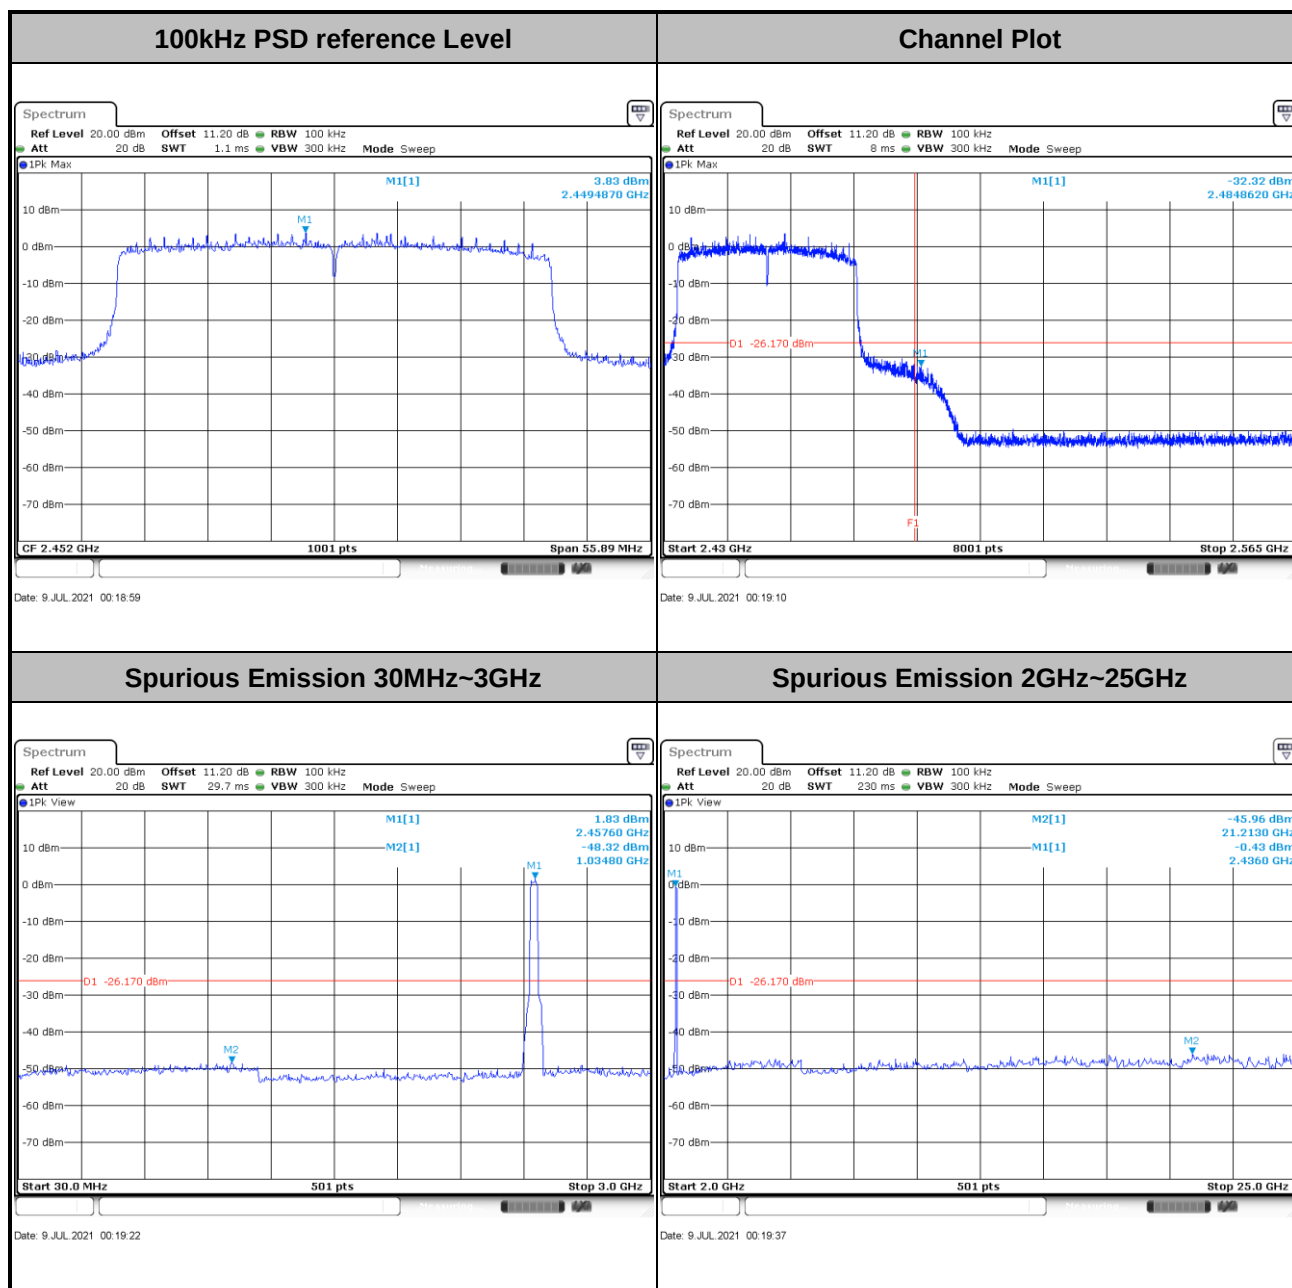



<Ant 2>

Test Mode :	802.11ax HE40	Test Channel :	09
-------------	---------------	----------------	----

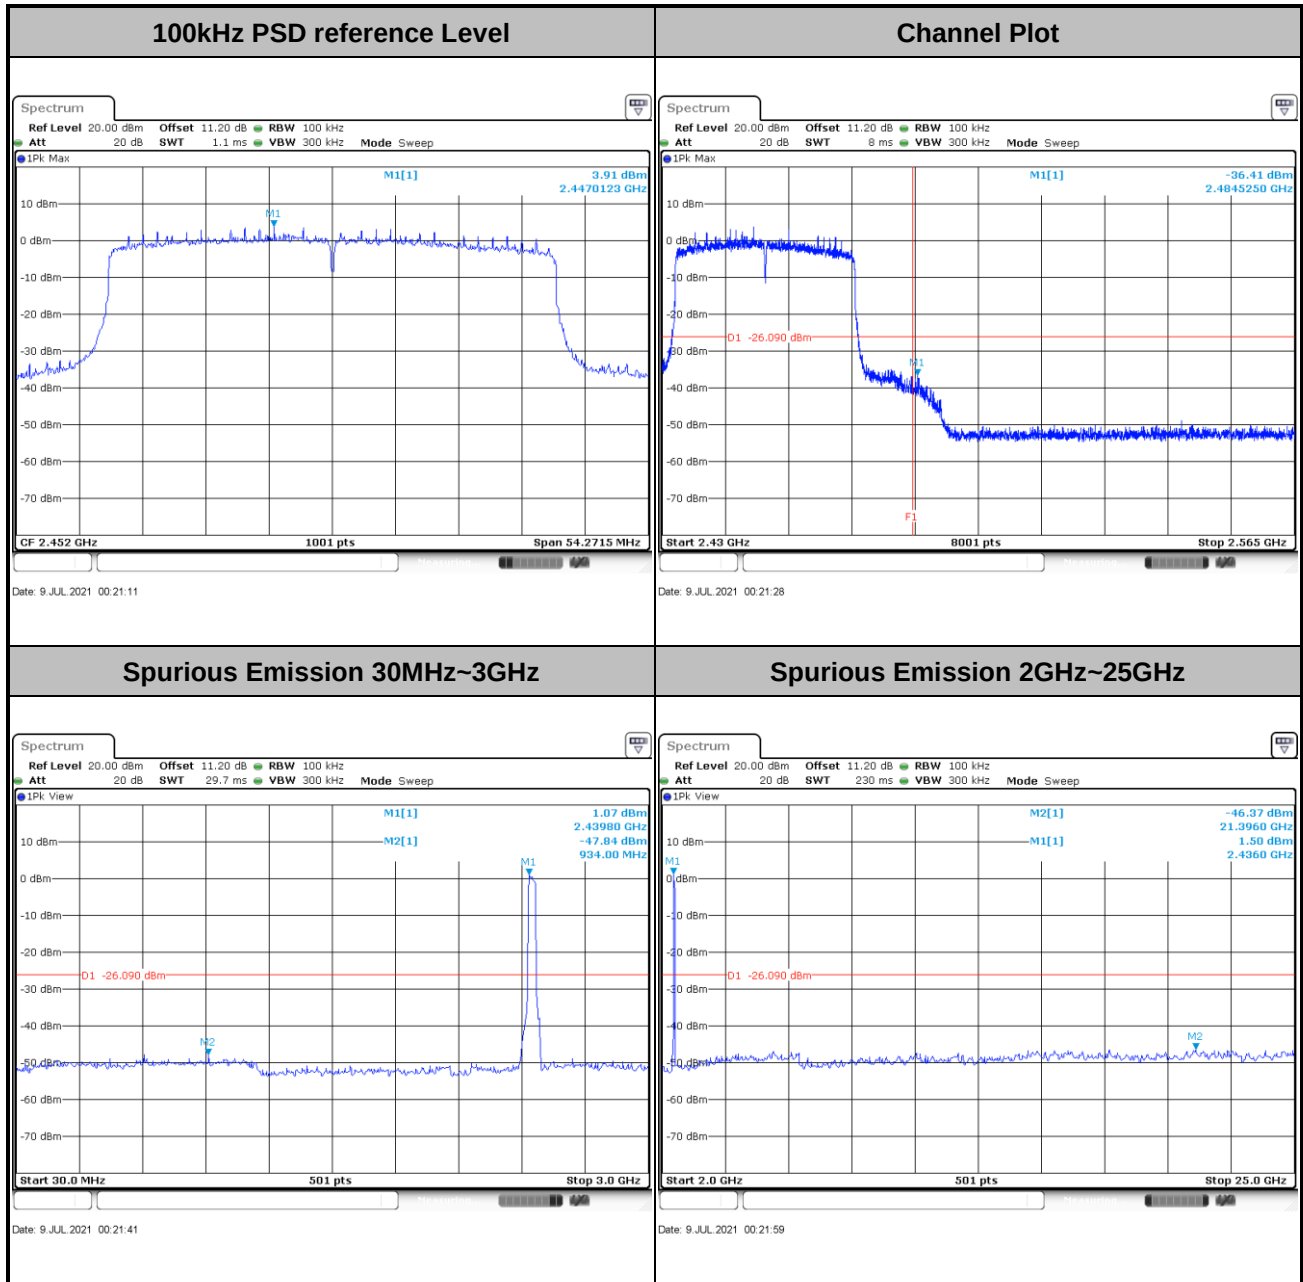

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

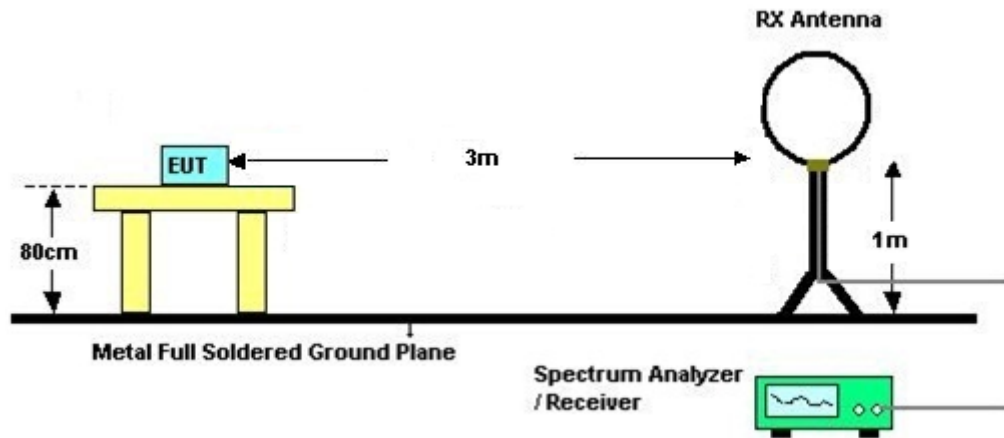

For radiated emissions from 30MHz to 1GHz

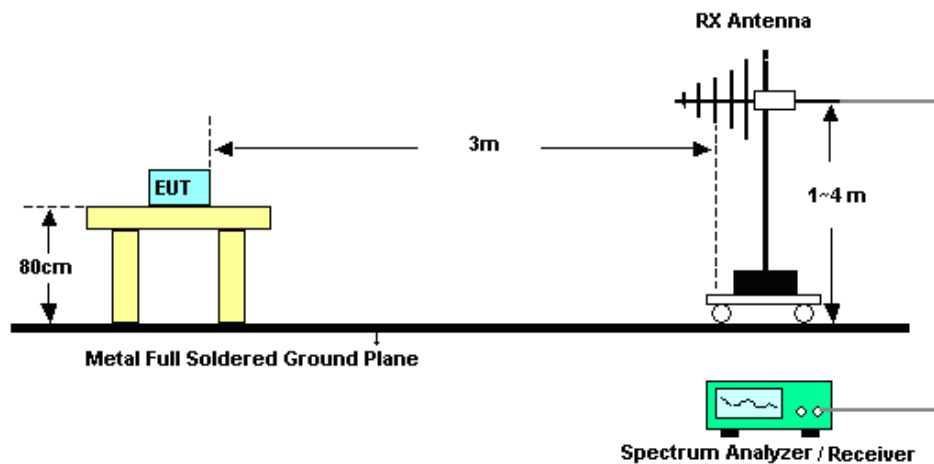

For radiated emissions above 1GHz

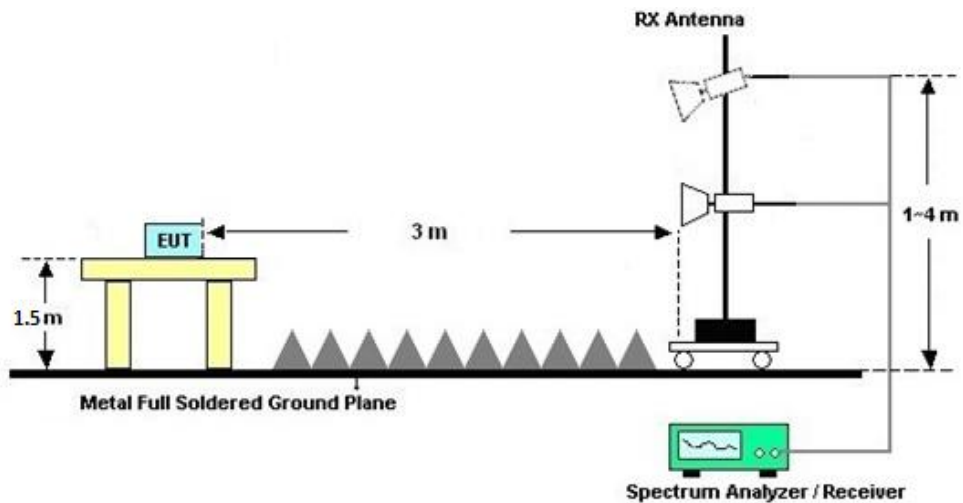



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

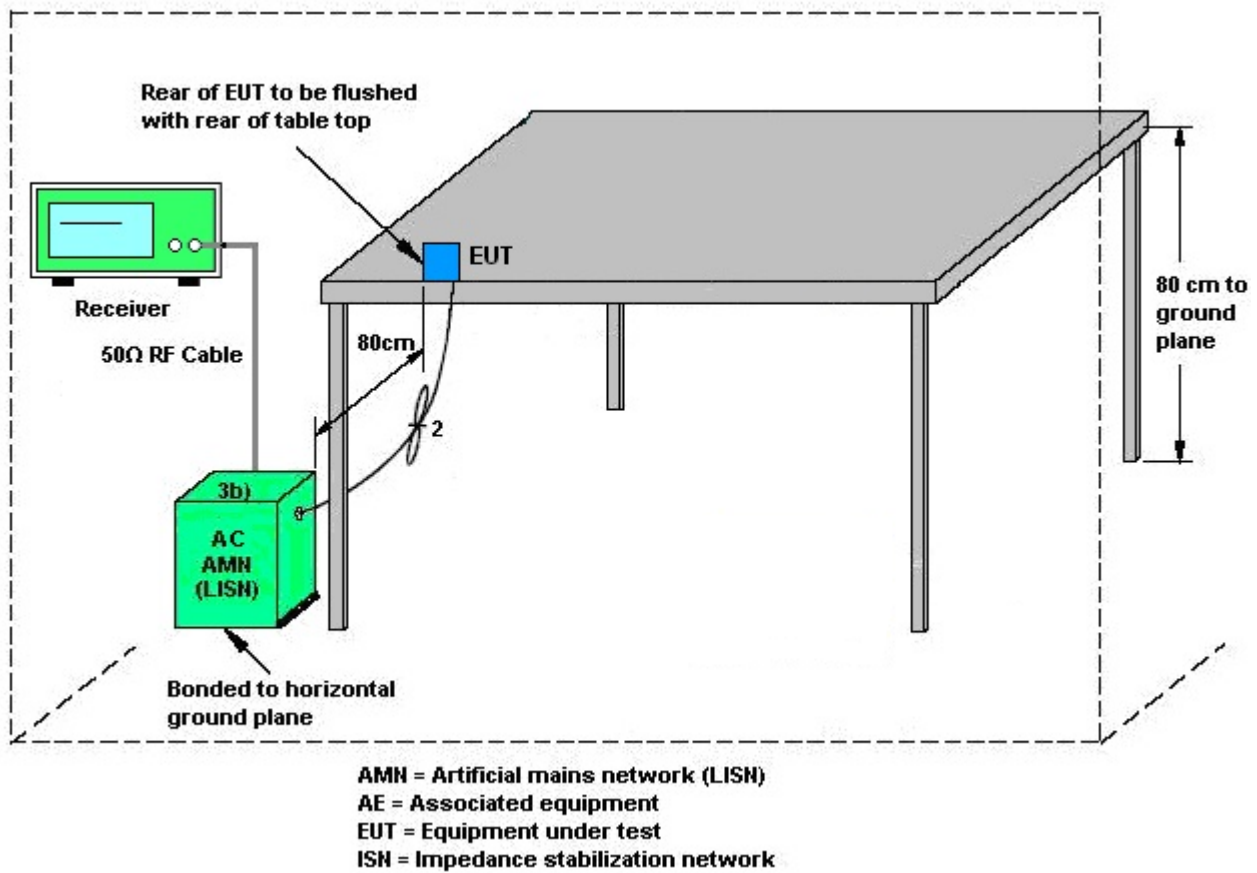

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-1.80	0.80	0.80	2.61	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Jul. 06, 2021~ Aug. 03, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Jul. 06, 2021~ Aug. 03, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Jul. 06, 2021~ Aug. 03, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Jul. 13, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr. 13, 2021	Jul. 13, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Jul. 13, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 04, 2021	Jul. 13, 2021	Jun. 03, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Jul. 13, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	Jul. 13, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 13, 2021	Jul. 13, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Jul. 13, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz~18Ghz	Oct. 17, 2020	Jul. 13, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Jul. 13, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 13, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 13, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 13, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Jul. 27, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Jul. 27, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	Jul. 27, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Jul. 27, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR161617C

Test Engineer:	Chen Hong	Temperature:	21~25	°C
Test Date:	2021/7/6~2021/8/3	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	2	1	2412	13.09	12.89	8.06	7.08	0.50	Pass
11b	1Mbps	2	6	2437	13.34	13.19	7.97	7.12	0.50	Pass
11b	1Mbps	2	11	2462	13.34	13.34	7.60	7.10	0.50	Pass
11g	6Mbps	2	1	2412	16.83	16.88	15.66	15.93	0.50	Pass
11g	6Mbps	2	6	2437	16.98	16.98	16.02	16.30	0.50	Pass
11g	6Mbps	2	11	2462	16.98	17.08	15.88	16.03	0.50	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20		1	1	2412	Full	19.13	19.13	18.39	18.34	0.50	Pass
HE20		1	6	2437	Full	19.23	19.23	18.27	18.52	0.50	Pass
HE20		1	11	2462	Full	19.28	19.28	18.64	18.74	0.50	Pass
HE40		1	3	2422	Full	37.76	37.76	36.74	36.26	0.50	Pass
HE40		1	6	2437	Full	37.76	37.76	37.46	37.54	0.50	Pass
HE40		1	9	2452	Full	37.86	37.86	37.26	36.18	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					0	0	SUM	0	0	0	0	0	0	0	0	
11b	1Mbps	2	1	2412	19.40	18.80	22.12	30.00		0.80		22.92		36.00		Pass
11b	1Mbps	2	6	2437	19.30	18.60	21.97	30.00		0.80		22.77		36.00		Pass
11b	1Mbps	2	11	2462	19.20	18.10	21.70	30.00		0.80		22.50		36.00		Pass
11g	6Mbps	2	1	2412	17.70	17.60	20.66	30.00		0.80		21.46		36.00		Pass
11g	6Mbps	2	6	2437	19.20	18.80	22.01	30.00		0.80		22.81		36.00		Pass
11g	6Mbps	2	11	2462	19.20	18.40	21.83	30.00		0.80		22.63		36.00		Pass
HT20	MCS0	2	1	2412	17.20	16.70	19.97	30.00		0.80		20.77		36.00		Pass
HT20	MCS0	2	6	2437	18.10	17.70	20.91	30.00		0.80		21.71		36.00		Pass
HT20	MCS0	2	11	2462	17.60	16.90	20.27	30.00		0.80		21.07		36.00		Pass
HT40	MCS0	2	3	2422	16.90	16.70	19.81	30.00		0.80		20.61		36.00		Pass
HT40	MCS0	2	6	2437	18.10	17.40	20.77	30.00		0.80		21.57		36.00		Pass
HT40	MCS0	2	9	2452	16.00	15.70	18.86	30.00		0.80		19.66		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	17.40	16.80	20.12	30.00		0.80		20.92		36.00		Pass
HE20	MCS0	2	1	2412	26/0	9.30	9.00	12.16	30.00		0.80		12.96		36.00		Pass
HE20	MCS0	2	1	2412	52/37	11.40	10.90	14.17	30.00		0.80		14.97		36.00		Pass
HE20	MCS0	2	1	2412	106/53	14.00	13.60	16.81	30.00		0.80		17.61		36.00		Pass
HE20	MCS0	2	6	2437	Full	18.20	17.80	21.01	30.00		0.80		21.81		36.00		Pass
HE20	MCS0	2	11	2462	Full	17.70	17.00	20.37	30.00		0.80		21.17		36.00		Pass
HE20	MCS0	2	11	2462	26/8	8.50	7.70	11.13	30.00		0.80		11.93		36.00		Pass
HE20	MCS0	2	11	2462	52/40	9.20	8.40	11.83	30.00		0.80		12.63		36.00		Pass
HE20	MCS0	2	11	2462	106/54	13.50	12.90	16.22	30.00		0.80		17.02		36.00		Pass
HE40	MCS0	2	3	2422	Full	17.00	16.80	19.91	30.00		0.80		20.71		36.00		Pass
HE40	MCS0	2	3	2422	242/61	15.30	15.10	18.21	30.00		0.80		19.01		36.00		Pass
HE40	MCS0	2	6	2437	Full	18.20	17.50	20.87	30.00		0.80		21.67		36.00		Pass
HE40	MCS0	2	9	2452	Full	16.10	15.90	19.01	30.00		0.80		19.81		36.00		Pass
HE40	MCS0	2	9	2452	242/62	15.40	14.90	18.17	30.00		0.80		18.97		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	-6.41	-6.13	-3.12	2.61		8.00		Pass
11b	1Mbps	2	6	2437	-6.15	-5.21	-2.20	2.61		8.00		Pass
11b	1Mbps	2	11	2462	-5.39	-7.00	-2.38	2.61		8.00		Pass
11g	6Mbps	2	1	2412	-7.82	-8.22	-4.81	2.61		8.00		Pass
11g	6Mbps	2	6	2437	-7.81	-8.43	-4.80	2.61		8.00		Pass
11g	6Mbps	2	11	2462	-7.35	-9.76	-4.34	2.61		8.00		Pass

Measured power density (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	-8.97	-9.20	-5.96	2.61		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-9.36	-9.78	-6.35	2.61		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-9.62	-9.73	-6.61	2.61		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-9.77	-10.14	-6.76	2.61		8.00		Pass
HE20	MCS0	2	6	2437	Full	-8.67	-9.55	-5.66	2.61		8.00		Pass
HE20	MCS0	2	11	2462	Full	-9.16	-9.00	-5.99	2.61		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-9.13	-9.54	-6.12	2.61		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-9.64	-10.59	-6.63	2.61		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-9.94	-9.50	-6.49	2.61		8.00		Pass
HE40	MCS0	2	3	2422	Full	-10.94	-12.50	-7.93	2.61		8.00		Pass
HE40	MCS0	2	3	2422	242/61	-11.53	-12.19	-8.52	2.61		8.00		Pass
HE40	MCS0	2	6	2437	Full	-11.78	-12.23	-8.77	2.61		8.00		Pass
HE40	MCS0	2	9	2452	Full	-11.55	-11.65	-8.54	2.61		8.00		Pass
HE40	MCS0	2	9	2452	242/62	-12.39	-12.62	-9.38	2.61		8.00		Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

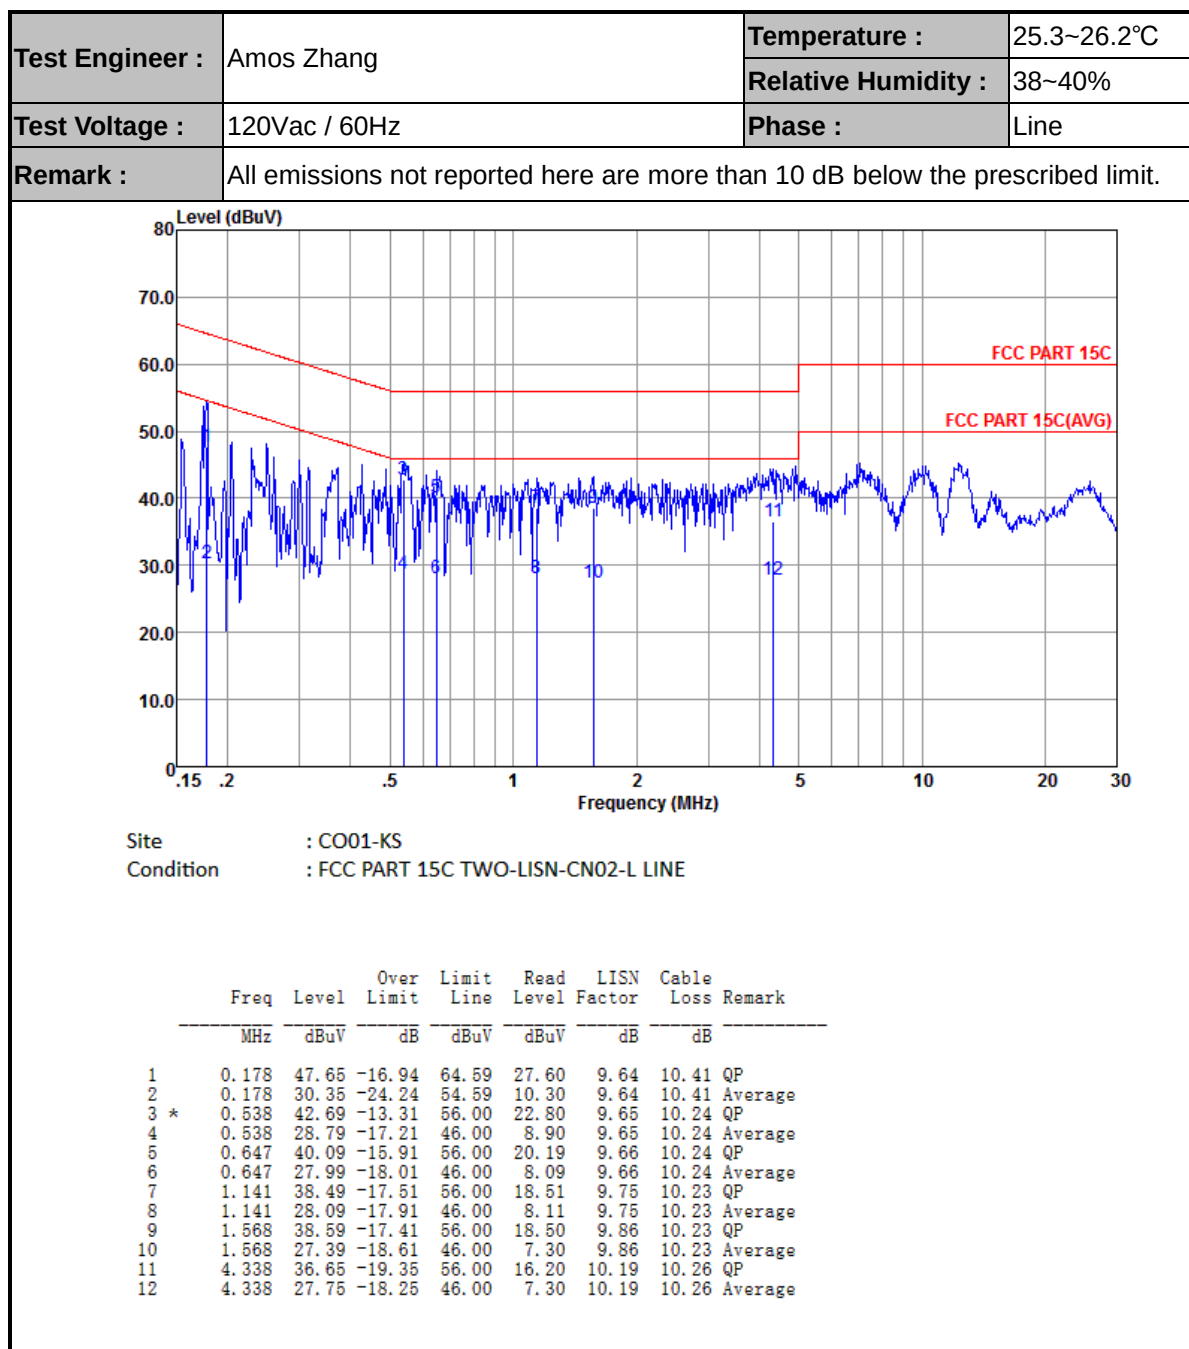



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

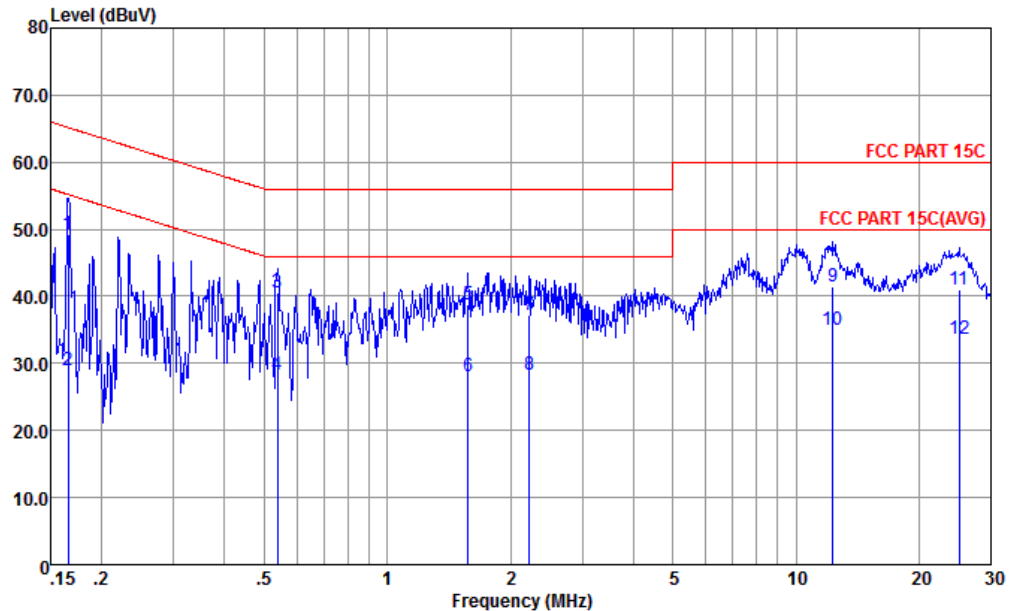

Site : CO01-KS
Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1	0.166	49.17	-15.99	65.16	28.90	9.83	10.44	QP
2	0.166	29.07	-26.09	55.16	8.80	9.83	10.44	Average
3	0.538	40.86	-15.44	56.00	20.59	9.73	10.24	QP
4	0.538	28.26	-17.74	46.00	8.29	9.73	10.24	Average
5	1.577	38.88	-17.12	56.00	18.80	9.85	10.23	QP
6	1.577	28.18	-17.82	46.00	8.10	9.85	10.23	Average
7	2.225	37.29	-18.71	56.00	17.10	9.96	10.23	QP
8	2.225	28.29	-17.71	46.00	8.10	9.96	10.23	Average
9	12.318	41.37	-18.63	60.00	20.20	10.80	10.37	QP
10 *	12.318	35.07	-14.93	50.00	13.90	10.80	10.37	Average
11	25.055	41.00	-19.00	60.00	18.60	11.83	10.57	QP
12	25.055	33.60	-16.40	50.00	11.20	11.83	10.57	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		2388.39	56.51	-17.49	74	48.24	32.2	7.72	31.65	102	67	P	H
		2389.82	45.99	-8.01	54	37.72	32.2	7.72	31.65	102	67	A	H
	*	2412	114.47	-	-	106.19	32.18	7.75	31.65	102	67	P	H
	*	2412	111.35	-	-	103.07	32.18	7.75	31.65	102	67	A	H
		2375.78	55.86	-18.14	74	47.68	32.15	7.69	31.66	400	244	P	V
		2389.95	45.54	-8.46	54	37.27	32.2	7.72	31.65	400	244	A	V
	*	2412	113.49	-	-	105.21	32.18	7.75	31.65	400	244	P	V
	*	2412	110.31	-	-	102.03	32.18	7.75	31.65	400	244	A	V
802.11b CH 11 2462MHz		2484.82	56.65	-17.35	74	48.25	32.12	7.86	31.58	151	72	P	H
		2483.5	45.71	-8.29	54	37.31	32.12	7.86	31.58	151	72	A	H
	*	2462	114.37	-	-	106.01	32.13	7.83	31.6	151	72	P	H
	*	2462	111.21	-	-	102.85	32.13	7.83	31.6	151	72	A	H
		2498.5	56.74	-17.26	74	48.31	32.1	7.89	31.56	387	234	P	V
		2483.5	45.84	-8.16	54	37.44	32.12	7.86	31.58	387	234	A	V
	*	2462	113.5	-	-	105.14	32.13	7.83	31.6	387	234	P	V
	*	2462	110.34	-	-	101.98	32.13	7.83	31.6	387	234	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	42	-32	74	56.52	34.31	11.21	60.04	300	0	P	H
		4824	42.94	-31.06	74	57.46	34.31	11.21	60.04	300	360	P	V
802.11b CH 06 2437MHz		4872	41.73	-32.27	74	56.14	34.34	11.28	60.03	300	0	P	H
		7308	43.36	-30.64	74	54.21	35.94	13.72	60.51	300	0	P	H
		4872	42.82	-31.18	74	57.23	34.34	11.28	60.03	300	360	P	V
		7308	43.5	-30.5	74	54.35	35.94	13.72	60.51	300	360	P	V
802.11b CH 11 2462MHz		4926	42.57	-31.43	74	56.88	34.36	11.35	60.02	100	360	P	H
		7386	43.37	-30.63	74	54.18	35.92	13.8	60.53	100	360	P	H
		4926	44.31	-29.69	74	58.62	34.36	11.35	60.02	100	360	P	V
		7386	43.76	-30.24	74	54.57	35.92	13.8	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.82	63.63	-10.37	74	55.36	32.2	7.72	31.65	129	115	P	H
		2389.95	50.51	-3.49	54	42.24	32.2	7.72	31.65	129	115	A	H
	*	2416	114.71	-	-	106.41	32.18	7.75	31.63	129	115	P	H
	*	2416	106.89	-	-	98.59	32.18	7.75	31.63	129	115	A	H
		2389.69	59.69	-14.31	74	51.42	32.2	7.72	31.65	340	90	P	V
		2389.95	47.89	-6.11	54	39.62	32.2	7.72	31.65	340	90	A	V
	*	2410	110.89	-	-	102.61	32.18	7.75	31.65	340	90	P	V
	*	2416	102.86	-	-	94.56	32.18	7.75	31.63	340	90	A	V
802.11g CH 11 2462MHz		2486.44	61.72	-12.28	74	53.32	32.12	7.86	31.58	102	308	P	H
		2485.18	48.58	-5.42	54	40.18	32.12	7.86	31.58	102	308	A	H
	*	2462	115.07	-	-	106.71	32.13	7.83	31.6	102	308	P	H
	*	2460	106.87	-	-	98.51	32.13	7.83	31.6	102	308	A	H
		2486.56	59.79	-14.21	74	51.39	32.12	7.86	31.58	381	119	P	V
		2485.06	47.73	-6.27	54	39.33	32.12	7.86	31.58	381	119	A	V
	*	2460	115.27	-	-	106.91	32.13	7.83	31.6	381	119	P	V
	*	2460	107.11	-	-	98.75	32.13	7.83	31.6	381	119	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	41.47	-32.53	74	55.99	34.31	11.21	60.04	300	0	P	H
		4824	42.2	-31.8	74	56.72	34.31	11.21	60.04	300	360	P	V
802.11g CH 06 2437MHz		4872	41.23	-32.77	74	55.64	34.34	11.28	60.03	300	0	P	H
		7308	42.81	-31.19	74	53.66	35.94	13.72	60.51	300	0	P	H
		4872	42.08	-31.92	74	56.49	34.34	11.28	60.03	300	360	P	V
		7308	43.47	-30.53	74	54.32	35.94	13.72	60.51	300	360	P	V
802.11g CH 11 2462MHz		4926	41.82	-32.18	74	56.13	34.36	11.35	60.02	100	360	P	H
		7386	43.05	-30.95	74	53.86	35.92	13.8	60.53	100	360	P	H
		4926	42.42	-31.58	74	56.73	34.36	11.35	60.02	100	360	P	V
		7386	43.68	-30.32	74	54.49	35.92	13.8	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 01 2412MHz		2389.69	62.99	-11.01	74	54.72	32.2	7.72	31.65	123	116	P	H
		2389.95	50.28	-3.72	54	42.01	32.2	7.72	31.65	123	116	A	H
	*	2410	117.31	-	-	109.03	32.18	7.75	31.65	123	116	P	H
	*	2408	106.54	-	-	98.26	32.18	7.75	31.65	123	116	A	H
		2389.56	60.81	-13.19	74	52.54	32.2	7.72	31.65	400	297	P	V
		2389.95	48.93	-5.07	54	40.66	32.2	7.72	31.65	400	297	A	V
	*	2410	114.92	-	-	106.64	32.18	7.75	31.65	400	297	P	V
	*	2410	104.3	-	-	96.02	32.18	7.75	31.65	400	297	A	V
8802.11a x HE20 Full CH 11 2462MHz		2484.46	62.17	-11.83	74	53.77	32.12	7.86	31.58	152	63	P	H
		2483.5	49.88	-4.12	54	41.48	32.12	7.86	31.58	152	63	A	H
	*	2464	116.05	-	-	107.69	32.13	7.83	31.6	152	63	P	H
	*	2464	106.08	-	-	97.72	32.13	7.83	31.6	152	63	A	H
		2483.62	64.4	-9.6	74	56	32.12	7.86	31.58	386	234	P	V
		2483.5	50.88	-3.12	54	42.48	32.12	7.86	31.58	386	234	A	V
	*	2464	115.63	-	-	107.27	32.13	7.83	31.6	386	234	P	V
	*	2464	104.35	-	-	95.99	32.13	7.83	31.6	386	234	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 01 2412MHz		4824	41.34	-32.66	74	55.86	34.31	11.21	60.04	100	360	P	H
		4824	41.46	-32.54	74	55.98	34.31	11.21	60.04	100	360	P	V
802.11ax HE20 Full CH 06 2437MHz		4872	40.84	-33.16	74	55.25	34.34	11.28	60.03	300	0	P	H
		7308	42.83	-31.17	74	53.68	35.94	13.72	60.51	300	0	P	H
		4872	42.06	-31.94	74	56.47	34.34	11.28	60.03	300	360	P	V
		7308	43.59	-30.41	74	54.44	35.94	13.72	60.51	300	360	P	V
802.11ax HE20 Full CH 11 2462MHz		4926	41.37	-32.63	74	55.68	34.36	11.35	60.02	100	360	P	H
		7386	42.65	-31.35	74	53.46	35.92	13.8	60.53	100	360	P	H
		4926	41.39	-32.61	74	55.7	34.36	11.35	60.02	100	360	P	V
		7386	43.16	-30.84	74	53.97	35.92	13.8	60.53	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/0 CH 01 2412MHz		2389.95	69.96	-4.04	74	61.69	32.2	7.72	31.65	156	66	P	H
		2389.95	46.29	-7.71	54	38.02	32.2	7.72	31.65	156	66	A	H
		2404	124.28	-	-	116	32.18	7.75	31.65	156	66	P	H
		2404	114.96	-	-	106.68	32.18	7.75	31.65	156	66	A	H
		2389.56	67.79	-6.21	74	59.52	32.2	7.72	31.65	400	242	P	V
		2389.95	46.03	-7.97	54	37.76	32.2	7.72	31.65	400	242	A	V
		2404	123.86	-	-	115.58	32.18	7.75	31.65	400	242	P	V
		2404	114.4	-	-	106.12	32.18	7.75	31.65	400	242	A	V
802.11ax HE20 Partial 26/8 CH 11 2462MHz		2483.62	66.31	-7.69	74	57.91	32.12	7.86	31.58	142	228	P	H
		2483.5	46.64	-7.36	54	38.24	32.12	7.86	31.58	142	228	A	H
		2470	123.88	-	-	115.52	32.13	7.83	31.6	142	228	P	H
		2470	112.89	-	-	104.53	32.13	7.83	31.6	142	228	A	H
		2483.62	69.93	-4.07	74	61.53	32.12	7.86	31.58	373	67	P	V
		2483.5	46.95	-7.05	54	38.55	32.12	7.86	31.58	373	67	A	V
		2470	121.55	-	-	113.19	32.13	7.83	31.6	373	67	P	V
		2470	111.94	-	-	103.58	32.13	7.83	31.6	373	67	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 52/37 CH 01 2412MHz		2389.95	68.05	-5.95	74	59.78	32.2	7.72	31.65	176	148	P	H
		2389.95	45.91	-8.09	54	37.64	32.2	7.72	31.65	176	148	A	H
		2406	120.12	-	-	111.84	32.18	7.75	31.65	176	148	P	H
		2406	110.74	-	-	102.46	32.18	7.75	31.65	176	148	A	H
		2389.95	68.06	-5.94	74	59.79	32.2	7.72	31.65	341	270	P	V
		2389.95	45.81	-8.19	54	37.54	32.2	7.72	31.65	341	270	A	V
		2406	118.03	-	-	109.75	32.18	7.75	31.65	341	270	P	V
		2406	109.47	-	-	101.19	32.18	7.75	31.65	341	270	A	V
802.11ax HE20 Partial 52/40 CH 11 2462MHz		2483.56	66.72	-7.28	74	58.32	32.12	7.86	31.58	143	229	P	H
		2483.5	46.65	-7.35	54	38.25	32.12	7.86	31.58	143	229	A	H
		2470	119.61	-	-	111.25	32.13	7.83	31.6	143	229	P	H
		2468	110.37	-	-	102.01	32.13	7.83	31.6	143	229	A	H
		2483.5	69.22	-4.78	74	60.82	32.12	7.86	31.58	373	66	P	V
		2483.5	46.99	-7.01	54	38.59	32.12	7.86	31.58	373	66	A	V
		2470	118.99	-	-	110.63	32.13	7.83	31.6	373	66	P	V
		2468	109.76	-	-	101.4	32.13	7.83	31.6	373	66	A	V



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/53 CH 01 2412MHz		2389.95	64.1	-9.9	74	55.83	32.2	7.72	31.65	107	250	P	H
		2389.95	46.22	-7.78	54	37.95	32.2	7.72	31.65	107	250	A	H
		2404	117.94	-	-	109.66	32.18	7.75	31.65	107	250	P	H
		2408	108.12	-	-	99.84	32.18	7.75	31.65	107	250	A	H
		2389.82	63.14	-10.86	74	54.87	32.2	7.72	31.65	342	275	P	V
		2389.95	46.09	-7.91	54	37.82	32.2	7.72	31.65	342	275	A	V
		2410	116.14	-	-	107.86	32.18	7.75	31.65	342	275	P	V
		2408	106.37	-	-	98.09	32.18	7.75	31.65	342	275	A	V
802.11ax HE20 Partial 106/54 CH 11 2462MHz		2483.5	70.95	-3.05	74	62.55	32.12	7.86	31.58	142	228	P	H
		2483.5	46.83	-7.17	54	38.43	32.12	7.86	31.58	142	228	A	H
		2466	119.05	-	-	110.69	32.13	7.83	31.6	142	228	P	H
		2466	108.85	-	-	100.49	32.13	7.83	31.6	142	228	A	H
		2483.62	68.05	-5.95	74	59.65	32.12	7.86	31.58	377	299	P	V
		2483.5	46.24	-7.76	54	37.84	32.12	7.86	31.58	377	299	A	V
		2466	115.62	-	-	107.26	32.13	7.83	31.6	377	299	P	V
		2464	105.86	-	-	97.5	32.13	7.83	31.6	377	299	A	V



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 03 2422MHz		2389.56	61.12	-12.88	74	52.85	32.2	7.72	31.65	129	115	P	H
		2389.95	49.99	-4.01	54	41.72	32.2	7.72	31.65	129	115	A	H
		2493.58	56.41	-17.59	74	47.98	32.1	7.89	31.56	129	115	P	H
		2483.5	45.58	-8.42	54	37.18	32.12	7.86	31.58	129	115	A	H
	*	2418	113.5	-	-	105.2	32.18	7.75	31.63	129	115	P	H
	*	2418	103.78	-	-	95.48	32.18	7.75	31.63	129	115	A	H
		2389.43	61.29	-12.71	74	53.02	32.2	7.72	31.65	395	63	P	V
		2389.95	50.14	-3.86	54	41.87	32.2	7.72	31.65	395	63	A	V
		2496.58	56.31	-17.69	74	47.88	32.1	7.89	31.56	395	63	P	V
		2487.82	45.37	-8.63	54	36.96	32.1	7.89	31.58	395	63	A	V
	*	2420	111.77	-	-	103.45	32.17	7.78	31.63	395	63	P	V
	*	2420	101.51	-	-	93.19	32.17	7.78	31.63	395	63	A	V
802.11ax HE40 Full CH 09 2452MHz		2329.5	57.3	-16.7	74	49.35	32.02	7.6	31.67	100	109	P	H
		2389.69	45.38	-8.62	54	37.11	32.2	7.72	31.65	100	109	A	H
		2485.84	65.53	-8.47	74	57.13	32.12	7.86	31.58	100	109	P	H
		2483.5	50.06	-3.94	54	41.66	32.12	7.86	31.58	100	109	A	H
	*	2460	112.8	-	-	104.44	32.13	7.83	31.6	100	109	P	H
	*	2458	102.54	-	-	94.18	32.13	7.83	31.6	100	109	A	H
		2387.74	56.95	-17.05	74	48.68	32.2	7.72	31.65	382	303	P	V
		2389.04	45.19	-8.81	54	36.92	32.2	7.72	31.65	382	303	A	V
		2486.08	61.56	-12.44	74	53.16	32.12	7.86	31.58	382	303	P	V
		2483.5	47.96	-6.04	54	39.56	32.12	7.86	31.58	382	303	A	V
	*	2460	109.57	-	-	101.21	32.13	7.83	31.6	382	303	P	V
	*	2460	99.95	-	-	91.59	32.13	7.83	31.6	382	303	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/ m)	Over Limit (dB)	Limit Line (dBμV/ m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 03 2422MHz		4842	41.62	-32.38	74	56.1	34.32	11.23	60.03	100	360	P	H
		7266	43.54	-30.46	74	54.43	35.94	13.68	60.51	100	360	P	H
		4842	41.06	-32.94	74	55.54	34.32	11.23	60.03	100	360	P	V
		7266	43.3	-30.7	74	54.19	35.94	13.68	60.51	100	360	P	V
802.11ax HE40 Full CH 06 2437MHz		4872	41.51	-32.49	74	55.92	34.34	11.28	60.03	300	0	P	H
		7308	42.81	-31.19	74	53.66	35.94	13.72	60.51	300	0	P	H
		4872	41.97	-32.03	74	56.38	34.34	11.28	60.03	300	360	P	V
		7308	43.21	-30.79	74	54.06	35.94	13.72	60.51	300	360	P	V
802.11ax HE40 Full CH 09 2452MHz		4902	41.31	-32.69	74	55.66	34.35	11.32	60.02	300	0	P	H
		7356	42.68	-31.32	74	53.5	35.93	13.77	60.52	300	0	P	H
		4902	41.95	-32.05	74	56.3	34.35	11.32	60.02	300	360	P	V
		7356	44.25	-29.75	74	55.07	35.93	13.77	60.52	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenn a Factor (dB/m)	Path Loss (dB)	Pream p Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Pea k Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 03 2422MHz		2389.56	68.55	-5.45	74	60.28	32.2	7.72	31.65	174	237	P	H
		2389.95	50.53	-3.47	54	42.26	32.2	7.72	31.65	174	237	A	H
		2483.92	63.95	-10.05	74	55.55	32.12	7.86	31.58	174	237	P	H
		2483.5	45.57	-8.43	54	37.17	32.12	7.86	31.58	174	237	A	H
		2420	115.44	-	-	107.12	32.17	7.78	31.63	174	237	P	H
		2420	105.91	-	-	97.59	32.17	7.78	31.63	174	237	A	H
		2389.95	64.88	-9.12	74	56.61	32.2	7.72	31.65	336	281	P	V
		2389.95	48.42	-5.58	54	40.15	32.2	7.72	31.65	336	281	A	V
		2484.34	59.88	-14.12	74	51.48	32.12	7.86	31.58	336	281	P	V
		2483.62	45.32	-8.68	54	36.92	32.12	7.86	31.58	336	281	A	V
		2418	114.18	-	-	105.88	32.18	7.75	31.63	336	281	P	V
		2420	103.89	-	-	95.57	32.17	7.78	31.63	336	281	A	V
802.11ax HE40 Partial 242/62 CH 09 2452MHz		2389.69	57.04	-16.96	74	48.77	32.2	7.72	31.65	118	230	P	H
		2389.95	45.15	-8.85	54	36.88	32.2	7.72	31.65	118	230	A	H
		2486.98	69.29	-4.71	74	60.89	32.12	7.86	31.58	118	230	P	H
		2483.5	50.26	-3.74	54	41.86	32.12	7.86	31.58	118	230	A	H
		2460	115.14	-	-	106.78	32.13	7.83	31.6	118	230	P	H
		2460	105.27	-	-	96.91	32.13	7.83	31.6	118	230	A	H
		2387.22	56.91	-17.09	74	48.64	32.2	7.72	31.65	376	297	P	V
		2389.82	45.13	-8.87	54	36.86	32.2	7.72	31.65	376	297	A	V
		2487.04	69.14	-4.86	74	60.74	32.12	7.86	31.58	376	297	P	V
		2483.5	49.62	-4.38	54	41.22	32.12	7.86	31.58	376	297	A	V
		2458	113.96	-	-	105.6	32.13	7.83	31.6	376	297	P	V
		2460	102.93	-	-	94.57	32.13	7.83	31.6	376	297	A	V



Emission below 1GHz

2.4GHz WIFI 802.11ax HE20 Partial 106 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE20 Partial 106/54 LF		30	22.99	-17.01	40	29.48	25.5	0.71	32.7	100	0	P	H
		112.45	24.56	-18.94	43.5	37.89	17.95	1.6	32.88	-	-	P	H
		173.56	25.22	-18.28	43.5	39.22	16.94	2	32.94	-	-	P	H
		220.12	22.93	-23.07	46	36.22	17.55	2.26	33.1	-	-	P	H
		284.14	23.59	-22.41	46	34.03	19.95	2.57	32.96	-	-	P	H
		537.31	24.8	-21.2	46	28.37	25.54	3.54	32.65	-	-	P	H
		30	34.15	-5.85	40	40.64	25.5	0.71	32.7	200	360	P	V
		56.19	29.14	-10.86	40	47.16	14.04	1.12	33.18	-	-	P	V
		124.09	23.46	-20.04	43.5	36.81	17.81	1.69	32.85	-	-	P	V
		161.92	21.2	-22.3	43.5	34.91	17.22	1.94	32.87	-	-	P	V
		318.09	21.65	-24.35	46	31.19	20.64	2.72	32.9	-	-	P	V
		435.46	25	-21	46	31.2	23.34	3.19	32.73	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.29	-	-	10Hz
802.11g	99.05	-	-	10Hz
802.11ax HE20	100	-	-	10Hz
802.11ax HE40	100	-	-	10Hz


802.11b

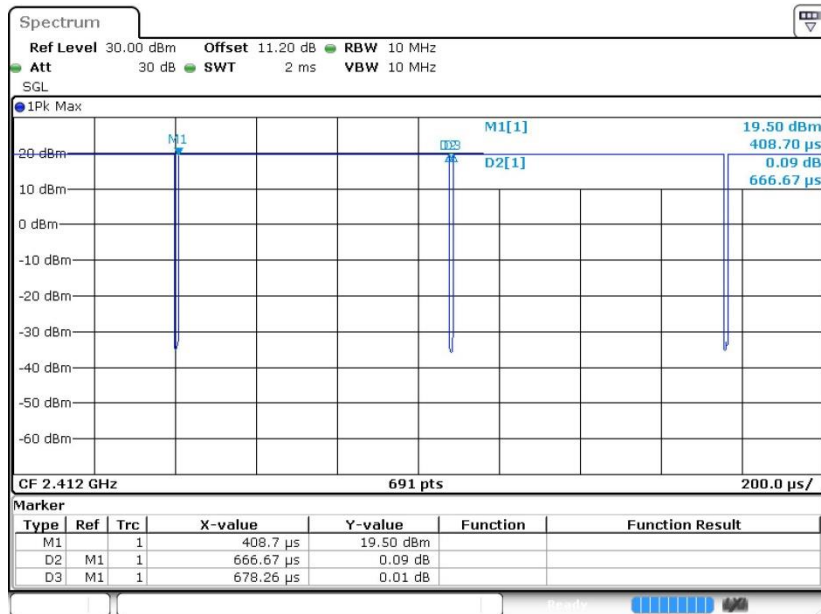

802.11g

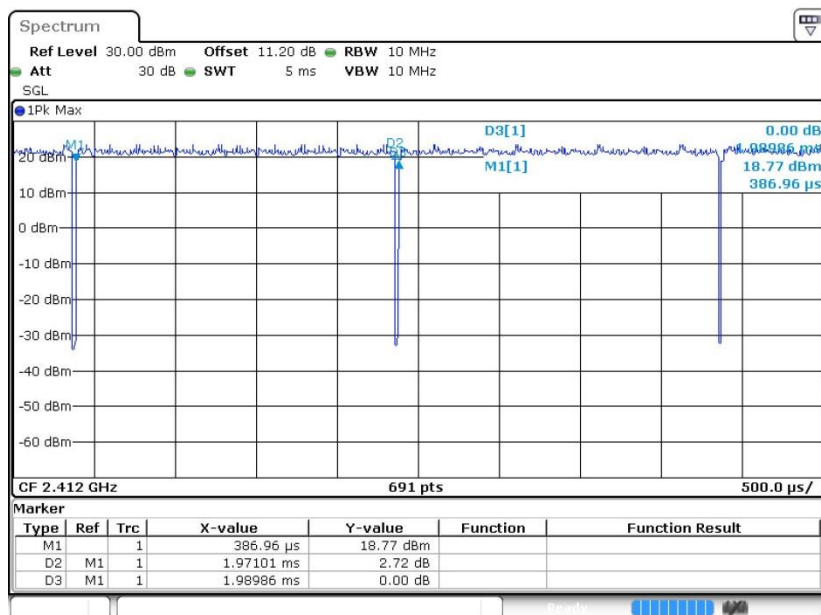

802.11ax HE20

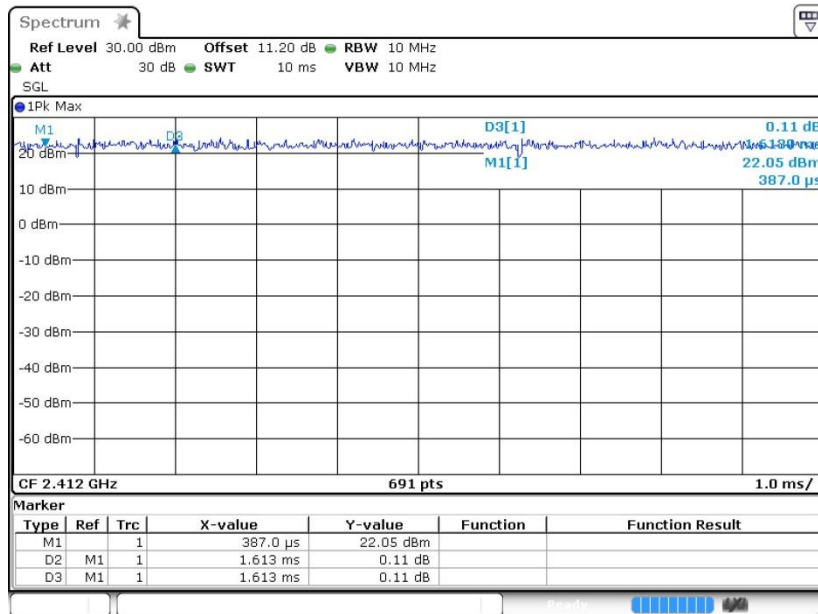

802.11ax HE40

