

FCC TEST REPORT

(PART 24)

Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

Manufacturer or Supplier:	Lenovo PC HK Limited
Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China
Product:	Portable Tablet Computer
Brand Name:	Lenovo
Model Name:	Lenovo TB-X6C6L
FCC ID:	O57TBX6C6L
Date of tests:	Mar. 05, 2021 ~ Apr. 13, 2021

The tests have been carried out according to the requirements of the following standard:

☒ **FCC PART 24, Subpart E** ☒ **FCC PART 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI/TIA/EIA-603-E** ☒ **ANSI C63.26-2015**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
Date: Apr. 19, 2021	Date: Apr. 19, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	11
2.3 DESCRIPTION OF SUPPORT UNITS	12
2.4 TEST ITEM AND TEST CONFIGURATION.....	12
2.5 EUT OPERATING CONDITIONS	17
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3 TEST TYPES AND RESULTS	18
3.1 OUTPUT POWER MEASUREMENT	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	18
3.1.2 TEST PROCEDURES	18
3.1.3 TEST SETUP	19
3.1.4 TEST RESULTS	19
3.2 FREQUENCY STABILITY MEASUREMENT	33
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	33
3.2.2 TEST PROCEDURE	33
3.2.3 TEST SETUP	33
3.2.4 TEST RESULTS	34
3.3 OCCUPIED BANDWIDTH MEASUREMENT	49
3.3.1 TEST PROCEDURES	49
3.3.2 TEST SETUP	49
3.3.3 TEST RESULTS	50
3.4 BAND EDGE MEASUREMENTC	64
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	64
3.4.2 TEST SETUP	64
3.4.3 TEST PROCEDURES	65
3.4.4. TEST RESULTS	66
3.5 CONDUCTED SPURIOUS EMISSIONS	91
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	91
3.5.2 TEST PROCEDURE	91
3.5.3 TEST SETUP	91
3.5.4 TEST RESULTS	92
3.6 RADIATED EMISSION MEASUREMENT	107
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	107
3.6.2 TEST PROCEDURES	107
3.6.3 DEVIATION FROM TEST STANDARD	107



Test Report No.: RFA210222W001-2

3.6.4 TEST SETUP	108
3.6.5 TEST RESULTS	109
3.7 PEAK TO AVERAGE RATIO	161
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	161
3.7.2 TEST SETUP	161
3.7.3 TEST PROCEDURES	161
3.7.4 TEST RESULTS	162
4 INFORMATION ON THE TESTING LABORATORIES	183
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	183



Test Report No.: RFA210222W001-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RFA210222W001-2	Original release	Apr. 19, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 24 & Part 2		
STANDARD SECTION	1.1.1.1.1 TEST TYPE	RESULT
2.1046 24.232	Equivalent Isotropic Radiated Power	Compliance
2.1055 24.235	Frequency Stability	Compliance
2.1049 24.238(b)	Occupied Bandwidth	Compliance
24.232(d)	Peak to average ratio	Compliance
24.238(b)	Band Edge Measurements	Compliance
2.1051 24.238	Conducted Spurious Emissions	Compliance
2.1053 24.238	Radiated Spurious Emissions	Compliance

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$
Peak to average ratio	$\pm 0.76\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

**1.2 TEST SITE AND INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 27,20	Apr. 26,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 25,21	Feb. 24,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 26,21	Mar. 25,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 27,20	Mar. 26,21
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 26,21	Mar. 25,22
Horn Antenna (1GHz-18GHz)	ETS-LINDGREN	3117	00168692	Mar. 27,20	Mar. 26,21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40 -K-SG/QMS-00 361	15433	Nov. 24, 20	Nov. 23, 21
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 26,21	Feb. 25,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 02,20	Jun. 01,21
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 30,20	Apr. 29,21
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn- CT0001143-1216	May. 19,20	May. 19,21
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jun. 03,20	Jun. 02,21
Power Meter	Anritsu	ML2495A	1506002	Feb. 25,21	Feb. 24,22
Power Sensor	Anritsu	MA2411B	1339352	Feb. 25,21	Feb. 24,22
Humid & Temp Programmable Tester	Juyi	ITH-120-45-CP -AR	IAA1504-001	Jun. 02,20	Jun. 01,21
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 10,21	Mar. 09,22
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 11,20	Mar. 10,21
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:** 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Portable Tablet Computer	
BRAND NAME	Lenovo	
MODEL NAME	Lenovo TB-X6C6L	
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.86Vdc (Li-ion, battery)	
MODULATION TYPE	GPRS: GMSK EDGE: 8PSK WCDMA: BPSK,QPSK LTE Band 2: QPSK, 16QAM	
FREQUENCY RANGE	GPRS, EDGE	1850.2MHz ~ 1909.8MHz
	WCDMA	1852.4MHz ~ 1907.6MHz
	LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1909.3MHz
	LTE Band 2 Channel Bandwidth: 3MHz	1851.5MHz ~ 1908.5MHz
	LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~ 1907.5MHz
	LTE Band 2 Channel Bandwidth: 10MHz	1855.0MHz ~ 1905.0MHz
	LTE Band 2 Channel Bandwidth: 15MHz	1857.5MHz ~ 1902.5MHz
	LTE Band 2 Channel Bandwidth: 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 25 Channel Bandwidth: 1.4MHz	1850.7MHz ~ 1914.3MHz
	LTE Band 25 Channel Bandwidth: 3MHz	1851.5MHz ~ 1913.5MHz
	LTE Band 25 Channel Bandwidth: 5MHz	1852.5MHz ~ 1912.5MHz
	LTE Band 25 Channel Bandwidth: 10MHz	1855.0MHz ~ 1910.0MHz
	LTE Band 25 Channel Bandwidth: 15MHz	1857.5MHz ~ 1907.5MHz
	LTE Band 25 Channel Bandwidth: 20MHz	1860.0MHz ~ 1905.0MHz

MAX. EIRP POWER	GPRS	1413mW
	EDGE	480mW
	WCDMA	293mW
	LTE Band 2 Channel Bandwidth: 1.4MHz	268mW
	LTE Band 2 Channel Bandwidth: 3MHz	262mW
	LTE Band 2 Channel Bandwidth: 5MHz	265mW
	LTE Band 2 Channel Bandwidth: 10MHz	258mW
	LTE Band 2 Channel Bandwidth: 15MHz	264mW
	LTE Band 2 Channel Bandwidth: 20MHz	266mW
	LTE Band 25 Channel Bandwidth: 1.4MHz	258mW
	LTE Band 25 Channel Bandwidth: 3MHz	254mW
	LTE Band 25 Channel Bandwidth: 5MHz	254mW
	LTE Band 25 Channel Bandwidth: 10MHz	254mW
	LTE Band 25 Channel Bandwidth: 15MHz	255mW
	LTE Band 25 Channel Bandwidth: 20MHz	256mW

EMISSION DESIGNATOR	GPRS	250KGXW
	EDGE	250KG7W
	WCDMA	4M18F9W
	LTE Band 2	QPSK: 1M08G7D
	Channel Bandwidth: 1.4MHz	16QAM: 1M08W7D
	LTE Band 2	QPSK: 2M68G7D
	Channel Bandwidth: 3MHz	16QAM: 2M68W7D
	LTE Band 2	QPSK: 4M48G7D
	Channel Bandwidth: 5MHz	16QAM: 4M47W7D
	LTE Band 2	QPSK: 8M95G7D
	Channel Bandwidth: 10MHz	16QAM: 8M95W7D
	LTE Band 2	QPSK: 13M4G7D
	Channel Bandwidth: 15MHz	16QAM: 13M4W7D
	LTE Band 2	QPSK: 17M9G7D
	Channel Bandwidth: 20MHz	16QAM: 17M9W7D
	LTE Band 25	QPSK: 1M08G7D
	Channel Bandwidth: 1.4MHz	16QAM: 1M08W7D
	LTE Band 25	QPSK: 2M67G7D
	Channel Bandwidth: 3MHz	16QAM: 2M67W7D
	LTE Band 25	QPSK: 4M67G7D
	Channel Bandwidth: 5MHz	16QAM: 4M66W7D
	LTE Band 25	QPSK: 8M93G7D
	Channel Bandwidth: 10MHz	16QAM: 8M91W7D
	LTE Band 25	QPSK: 13M4G7D
	Channel Bandwidth: 15MHz	16QAM: 13M4W7D
	LTE Band 25	QPSK: 17M8G7D
	Channel Bandwidth: 20MHz	16QAM: 17M8W7D
ANTENNA TYPE	PIFA Antenna with 1.64dBi gain	
HW VERSION	Lenovo TB-X6C6L	
SW VERSION	TB-X6C6L_RF01_210528	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	USB cable: shielded, detachable, 1meter	
EXTREME TEMPERATURE	-10-55 °C	
EXTREME VOLTAGE	3.6V- 4.4V	



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
GSM/GPRS/EDGE	1TX/1RX
WCDMA	1TX/1RX
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.


List of Accessory:

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery 1	Sunwoda	L20D1P32	Capacity : 3.86vdc 7500mAh
Battery 2	SCUD	L20D1P32	Capacity : 3.86vdc 7500mAh
AC Adapter 1	Salom	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
AC Adapter 2	AcBel	SC-41	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB Cable 1	BRL	GSZ-209H-A3120	Shielded, 1.0meter
USB Cable 2	Leagtech	CDG-203T-A05WF	Shielded, 1.0meter



2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

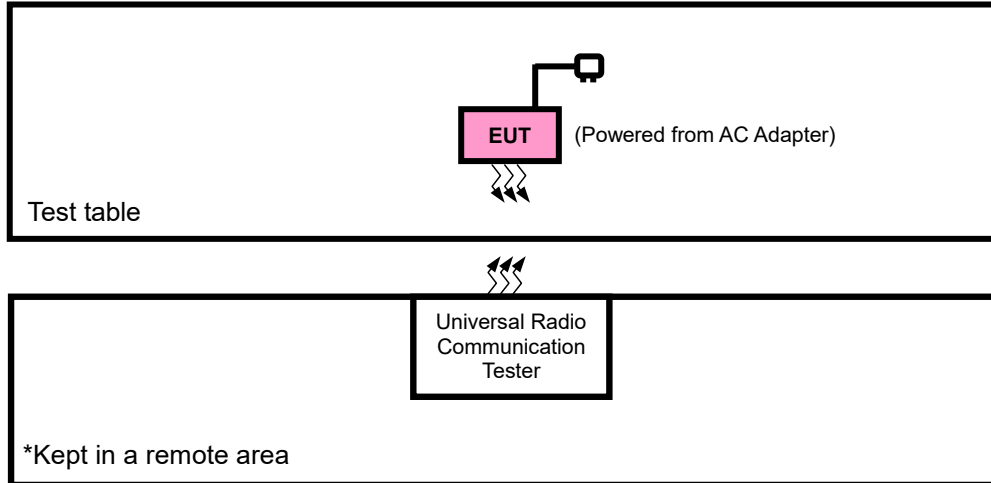



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in EIRP and radiated emission was found when positioned on X-plane for GSM/EDGE/ LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	1.1.1.1.2DESCRIPTION
A	EUT + Adapter + USB Cable with GSM or WCDMA or LTE link
B	EUT + Battery with GSM or WCDMA or LTE link

GSM MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	512 to 810	512, 661, 810	GPRS, EDGE
B	FREQUENCY STABILITY	512 to 810	512, 810	GPRS, EDGE
B	OCCUPIED BANDWIDTH	512 to 810	512, 661, 810	GPRS, EDGE
B	PEAK TO AVERAGE RATIO	512 to 810	512, 661, 810	GPRS, EDGE
B	BAND EDGE	512 to 810	512, 810	GPRS, EDGE
B	CONDUCTED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE
A	RADIATED EMISSION	512 to 810	512, 661, 810	GPRS, EDGE

WCDMA

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
B	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
B	FREQUENCY STABILITY	9262 to 9538	9262, 9538	WCDMA
B	OCCUPIED BANDWIDTH	9262 to 9538	9262, 9400, 9538	WCDMA
B	PEAK TO AVERAGE RATIO	9262 to 9538	9262, 9400, 9538	WCDMA
B	BAND EDGE	9262 to 9538	9262, 9538	WCDMA
B	CONDCUDED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA
A	RADIATED EMISSION	9262 to 9538	9262, 9400, 9538	WCDMA

LTE BAND 2

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	18607 to 19193	18607, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK,16QAM	1 RB / 0 RB Offset

B	BAND EDGE	18607 to 19193	18607	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19193	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615	3MHz	QPSK,16QAM	1 RB / 5 RB Offset
			19185	3MHz	QPSK,16QAM	6 RB / 0 RB Offset
		18625 to 19175	18625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19175	5MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18650 to 19150	18650	10MHz	QPSK,16QAM	1 RB / 14 RB Offset
			19150	10MHz	QPSK,16QAM	15 RB / 0 RB Offset
		18675 to 19125	18675	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
			19125	15MHz	QPSK,16QAM	25 RB / 0 RB Offset
		18700 to 19100	18700	20MHz	QPSK,16QAM	1 RB / 24 RB Offset
			19100	20MHz	QPSK,16QAM	25 RB / 0 RB Offset
B	CONDCUDED EMISSION	18607 to 19193	18607, 18900, 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	18607 to 19193	18900	1.4MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18900	3MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18900	5MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18607, 18900, 19193	10MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18900	15MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18900	20MHz	QPSK	1 RB / 0 RB Offset



**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

LTE BAND 25

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	EIRP	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	26047 to 26683	26047, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26055, 26675	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26665	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26640	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26115, 26615	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26590	20MHz	QPSK	1 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	15 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	50 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	75 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	100 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365 26640	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK,16QAM	1 RB / 0 RB Offset

B	BAND EDGE	26047 to 26683	26047	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
			26683	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset
		26055 to 26675	26055	3MHz	QPSK,16QAM	1 RB / 5 RB Offset
			26675	3MHz	QPSK,16QAM	6 RB / 0 RB Offset
		26065 to 26665	26065	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
			26665	5MHz	QPSK,16QAM	15 RB / 0 RB Offset
		26090 to 26640	26090	10MHz	QPSK,16QAM	1 RB / 14 RB Offset
			26640	10MHz	QPSK,16QAM	15 RB / 0 RB Offset
		26115 to 26615	26065	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
			26665	5MHz	QPSK,16QAM	25 RB / 0 RB Offset
		26140 to 26590	26090	10MHz	QPSK,16QAM	1 RB / 24 RB Offset
			26640	10MHz	QPSK,16QAM	25 RB / 0 RB Offset
		26115 to 26615	26090	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
			26615	15MHz	QPSK,16QAM	50 RB / 0 RB Offset
		26140 to 26590	26115	15MHz	QPSK,16QAM	1 RB / 49 RB Offset
			26590	20MHz	QPSK,16QAM	50 RB / 0 RB Offset
B	CONDCUETED EMISSION	26047 to 26683	26047, 26365, 26683	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	26047 to 26683	26365	1.4MHz	QPSK	1 RB / 0 RB Offset
		26055 to 26675	26365	3MHz	QPSK	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5MHz	QPSK	1 RB / 0 RB Offset
		26090 to 26640	26365	10MHz	QPSK	1 RB / 0 RB Offset
		26115 to 26615	26365	15MHz	QPSK	1 RB / 0 RB Offset
		26140 to 26590	26365	20MHz	QPSK	1 RB / 0 RB Offset

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP	25deg. C, 57%RH	DC 3.86V By Battery	Jace Hu
FREQUENCY STABILITY	23deg. C, 61%RH	DC 3.6V/3.8V/4.4V	Chase Zhou
OCCUPIED BANDWIDTH	23deg. C, 61%RH	DC 3.86V By Battery	Chase Zhou
PEAK TO AVERAGE RATIO	23deg. C, 61%RH	DC 3.86V By Battery	Chase Zhou
BAND EDGE	23deg. C, 61%RH	DC 3.86V By Battery	Chase Zhou
CONDCUETED EMISSION	23deg. C, 61%RH	DC 3.86V By Battery	Chase Zhou
RADIATED EMISSION	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	GSM1900			Max. Tune-up Power
Channel	512	661	810	
Frequency	1850.2	1880	1909.8	
GPRS (GMSK, 1Tx-slot)	29.82	29.86	29.67	30.5
GPRS (GMSK, 2Tx-slot)	29.21	29.29	29.17	29.5
GPRS (GMSK, 3Tx-slot)	27.69	27.82	27.78	27.5
GPRS (GMSK, 4Tx-slot)	26.72	26.86	26.85	26.5
EDGE (8PSK, 1Tx-slot)	24.73	25.05	25.17	26.5
EDGE (8PSK, 2Tx-slot)	23.61	23.91	24.12	25.0
EDGE (8PSK, 3Tx-slot)	21.43	21.81	21.85	22.5
EDGE (8PSK, 4Tx-slot)	20.33	20.65	20.67	21.5

Band	WCDMA II			Max. Tune-up Power
Channel	9262	9400	9538	
Frequency	1852.4	1880	1907.6	
RMC 12.2K	23.03	22.99	22.96	23.03
HSDPA Subtest-1	22.22	22.33	22.34	22.22
HSDPA Subtest-2	22.20	22.32	22.33	22.20
HSDPA Subtest-3	21.74	21.81	21.80	21.74
HSDPA Subtest-4	21.69	21.82	21.83	21.69
DC-HSDPA Subtest-1	22.68	22.45	22.40	22.68
DC-HSDPA Subtest-2	22.26	22.39	22.38	22.26
DC-HSDPA Subtest-3	21.85	21.84	21.91	21.85
DC-HSDPA Subtest-4	21.81	21.93	21.77	21.81
HSUPA Subtest-1	21.34	21.39	21.37	21.34
HSUPA Subtest-2	21.35	21.38	21.35	21.35
HSUPA Subtest-3	20.31	20.26	20.36	20.31
HSUPA Subtest-4	20.31	20.14	20.16	20.31
HSUPA Subtest-5	19.32	19.38	19.19	19.32
HSPA+ Subtest-1	21.69	21.70	21.73	21.69



LTE BAND 2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18607	Mid CH 18900	High CH 19193	MPR
				Frequency 1850.7 MHz	Frequency 1880 MHz	Frequency 1909.3 MHz	
2/ 1.4	QPSK	1	0	22.31	22.29	22.21	0
		1	2	22.58	22.49	22.46	0
		1	5	22.21	22.10	22.05	0
		3	0	22.64	22.56	22.55	0
		3	1	22.62	22.55	22.42	0
		3	3	22.64	22.55	22.50	0
		6	0	21.69	21.58	21.55	1
	16QAM	1	0	21.56	21.48	21.43	1
		1	2	21.83	21.71	21.70	1
		1	5	21.41	21.32	21.32	1
		3	0	21.66	21.59	21.52	1
		3	1	21.53	21.54	21.43	1
		3	3	21.67	21.60	21.57	1
		6	0	20.63	20.61	20.51	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18615	Mid CH 18900	High CH 19185	MPR
				Frequency 1851.5 MHz	Frequency 1880 MHz	Frequency 1908.5 MHz	
2/ 3	QPSK	1	0	22.33	22.31	22.20	0
		1	7	22.54	22.50	22.46	0
		1	14	22.17	22.10	22.05	0
		8	0	21.63	21.59	21.55	1
		8	3	21.55	21.55	21.44	1
		8	7	21.61	21.62	21.54	1
		15	0	21.66	21.59	21.49	1
	16QAM	1	0	21.53	21.54	21.46	1
		1	7	21.80	21.74	21.68	1
		1	14	21.44	21.32	21.32	1
		8	0	20.62	20.60	20.52	2
		8	3	20.58	20.49	20.46	2
		8	7	20.69	20.58	20.53	2
		15	0	20.63	20.55	20.54	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18625	Mid CH 18900	High CH 19175	MPR
				Frequency 1852.5 MHz	Frequency 1880 MHz	Frequency 1907.5 MHz	
2/ 5	QPSK	1	0	22.34	22.26	22.21	0
		1	12	22.59	22.47	22.46	0
		1	24	22.18	22.09	22.09	0
		12	0	21.66	21.59	21.52	1
		12	6	21.55	21.56	21.45	1
		12	13	21.65	21.58	21.55	1
		25	0	21.64	21.62	21.52	1
	16QAM	1	0	21.54	21.50	21.46	1
		1	12	21.77	21.77	21.67	1
		1	24	21.44	21.32	21.31	1
		12	0	20.62	20.58	20.49	2
		12	6	20.55	20.53	20.42	2
		12	13	20.64	20.60	20.56	2
		25	0	20.63	20.56	20.51	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18650	Mid CH 18900	High CH 19150	MPR
				Frequency 1855 MHz	Frequency 1880 MHz	Frequency 1905 MHz	
2/ 10	QPSK	1	0	22.31	22.29	22.21	0
		1	24	22.59	22.47	22.47	0
		1	49	22.15	22.13	22.05	0
		25	0	21.67	21.58	21.55	1
		25	12	21.61	21.50	21.45	1
		25	25	21.63	21.55	21.54	1
		50	0	21.69	21.62	21.49	1
	16QAM	1	0	21.54	21.47	21.42	1
		1	24	21.82	21.73	21.70	1
		1	49	21.44	21.33	21.28	1
		25	0	20.64	20.56	20.55	2
		25	12	20.59	20.47	20.47	2
		25	25	20.63	20.61	20.53	2
		50	0	20.67	20.55	20.55	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18675	Mid CH 18900	High CH 19125	MPR
				Frequency 1857.5 MHz	Frequency 1880 MHz	Frequency 1902.5 MHz	
2/ 15	QPSK	1	0	22.38	22.29	22.18	0
		1	37	22.57	22.52	22.42	0
		1	74	22.21	22.16	22.06	0
		36	0	21.64	21.59	21.56	1
		36	19	21.62	21.55	21.45	1
		36	39	21.61	21.56	21.54	1
		75	0	21.69	21.60	21.54	1
	16QAM	1	0	21.58	21.54	21.42	1
		1	37	21.81	21.74	21.70	1
		1	74	21.40	21.38	21.30	1
		36	0	20.68	20.56	20.56	2
		36	19	20.53	20.51	20.43	2
		36	39	20.68	20.59	20.56	2
		75	0	20.68	20.58	20.48	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 18700	Mid CH 18900	High CH 19100	MPR
				Frequency 1860 MHz	Frequency 1880 MHz	Frequency 1900 MHz	
2/ 20	QPSK	1	0	22.39	22.33	22.26	0
		1	50	22.61	22.55	22.48	0
		1	99	22.23	22.17	22.10	0
		50	0	21.70	21.64	21.57	1
		50	25	21.63	21.57	21.50	1
		50	50	21.69	21.63	21.56	1
		100	0	21.70	21.64	21.57	1
	16QAM	1	0	21.61	21.55	21.48	1
		1	50	21.85	21.79	21.72	1
		1	99	21.46	21.40	21.33	1
		50	0	20.70	20.64	20.57	2
		50	25	20.61	20.55	20.48	2
		50	50	20.71	20.65	20.58	2
		100	0	20.69	20.63	20.56	2



LTE BAND 25

Band/BW	Modulation	RB Size	RB Offset	Low CH 26047	Mid CH 26365	High CH 26683	MPR
				Frequency 1850.7 MHz	Frequency 1882.5 MHz	Frequency 1914.3 MHz	
25/ 1.4	QPSK	1	0	22.12	22.19	22.04	0
		1	2	22.39	22.39	22.29	0
		1	5	21.98	21.96	21.84	0
		3	0	22.46	22.47	22.39	0
		3	1	22.41	22.43	22.23	0
		3	3	22.45	22.45	22.33	0
		6	0	21.49	21.47	21.37	1
	16QAM	1	0	21.35	21.36	21.24	1
		1	2	21.64	21.61	21.53	1
		1	5	21.25	21.25	21.18	1
		3	0	21.48	21.50	21.36	1
		3	1	21.33	21.43	21.25	1
		3	3	21.45	21.47	21.37	1
		6	0	20.43	20.50	20.33	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26055	Mid CH 26365	High CH 26675	MPR
				Frequency 1851.5 MHz	Frequency 1882.5 MHz	Frequency 1913.5 MHz	
25/ 3	QPSK	1	0	22.14	22.21	22.03	0
		1	7	22.35	22.40	22.29	0
		1	14	21.94	21.96	21.84	0
		8	0	21.45	21.50	21.39	1
		8	3	21.34	21.43	21.25	1
		8	7	21.42	21.52	21.37	1
		15	0	21.46	21.48	21.31	1
	16QAM	1	0	21.32	21.42	21.27	1
		1	7	21.61	21.64	21.51	1
		1	14	21.28	21.25	21.18	1
		8	0	20.44	20.51	20.36	2
		8	3	20.38	20.38	20.28	2
		8	7	20.47	20.45	20.33	2
		15	0	20.43	20.44	20.36	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26065	Mid CH 26365	High CH 26665	MPR
				Frequency 1852.5 MHz	Frequency 1882.5 MHz	Frequency 1912.5 MHz	
25/ 5	QPSK	1	0	22.15	22.16	22.04	0
		1	12	22.40	22.37	22.29	0
		1	24	21.95	21.95	21.88	0
		12	0	21.48	21.50	21.36	1
		12	6	21.34	21.44	21.26	1
		12	13	21.46	21.48	21.38	1
		25	0	21.44	21.51	21.34	1
	16QAM	1	0	21.33	21.38	21.27	1
		1	12	21.58	21.67	21.50	1
		1	24	21.28	21.25	21.17	1
		12	0	20.44	20.49	20.33	2
		12	6	20.35	20.42	20.24	2
		12	13	20.42	20.47	20.36	2
		25	0	20.43	20.45	20.33	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26090	Mid CH 26365	High CH 26640	MPR
				Frequency 1855 MHz	Frequency 1882.5 MHz	Frequency 1910 MHz	
25/ 10	QPSK	1	0	22.12	22.19	22.04	0
		1	24	22.40	22.37	22.30	0
		1	49	21.92	21.99	21.84	0
		25	0	21.49	21.49	21.39	1
		25	12	21.40	21.38	21.26	1
		25	25	21.44	21.45	21.37	1
		50	0	21.49	21.51	21.31	1
	16QAM	1	0	21.33	21.35	21.23	1
		1	24	21.63	21.63	21.53	1
		1	49	21.28	21.26	21.14	1
		25	0	20.46	20.47	20.39	2
		25	12	20.39	20.36	20.29	2
		25	25	20.41	20.48	20.33	2
		50	0	20.47	20.44	20.37	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26115	Mid CH 26365	High CH 26615	MPR
				Frequency 1857.5 MHz	Frequency 1882.5 MHz	Frequency 1907.5 MHz	
25/ 15	QPSK	1	0	22.19	22.19	22.01	0
		1	37	22.38	22.42	22.25	0
		1	74	21.98	22.02	21.85	0
		36	0	21.46	21.50	21.40	1
		36	19	21.41	21.43	21.26	1
		36	39	21.42	21.46	21.37	1
		75	0	21.49	21.49	21.36	1
	16QAM	1	0	21.37	21.42	21.23	1
		1	37	21.62	21.64	21.53	1
		1	74	21.24	21.31	21.16	1
		36	0	20.50	20.47	20.40	2
		36	19	20.33	20.40	20.25	2
		36	39	20.46	20.46	20.36	2
		75	0	20.48	20.47	20.30	2

Band/BW	Modulation	RB Size	RB Offset	Low CH 26140	Mid CH 26365	High CH 26590	MPR
				Frequency 1860 MHz	Frequency 1882.5 MHz	Frequency 1905 MHz	
25/ 20	QPSK	1	0	22.20	22.23	22.09	0
		1	50	22.42	22.45	22.31	0
		1	99	22.00	22.03	21.89	0
		50	0	21.52	21.55	21.41	1
		50	25	21.42	21.45	21.31	1
		50	50	21.50	21.53	21.39	1
		100	0	21.50	21.53	21.39	1
	16QAM	1	0	21.40	21.43	21.29	1
		1	50	21.66	21.69	21.55	1
		1	99	21.30	21.33	21.19	1
		50	0	20.52	20.55	20.41	2
		50	25	20.41	20.44	20.30	2
		50	50	20.49	20.52	20.38	2
		100	0	20.49	20.52	20.38	2



EIRP POWER (dBm)

GPRS

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	29.82	1.64	31.46	1399.59	2
661	1880.0	29.86	1.64	31.5	1412.54	2
810	1909.8	29.67	1.64	31.31	1352.07	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

EDGE

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
512	1850.2	24.73	1.64	26.37	433.51	2
661	1880.0	25.05	1.64	26.69	466.66	2
810	1909.8	25.17	1.64	26.81	479.73	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

WCDMA

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
9662	1852.4	23.03	1.64	24.67	293.09	2
9800	1880	22.99	1.64	24.63	290.4	2
9938	1907.6	22.96	1.64	24.6	288.4	2



LTE BAND 2

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	22.64	1.64	24.28	267.92	2
18900	1880.0	22.56	1.64	24.2	263.03	2
19193	1908.3	22.55	1.64	24.19	262.42	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18607	1850.7	21.83	1.64	23.47	222.33	2
18900	1880.0	21.71	1.64	23.35	216.27	2
19193	1908.3	21.7	1.64	23.34	215.77	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	22.54	1.64	24.18	261.82	2
18900	1880.0	22.5	1.64	24.14	259.42	2
19185	1908.5	22.46	1.64	24.1	257.04	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18615	1851.5	21.8	1.64	23.44	220.8	2
18900	1880.0	21.74	1.64	23.38	217.77	2
19185	1908.5	21.68	1.64	23.32	214.78	2



BUREAU
VERITAS

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	22.59	1.64	24.23	264.85	2
18900	1880.0	22.47	1.64	24.11	257.63	2
19175	1907.5	22.46	1.64	24.1	257.04	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18625	1852.5	21.77	1.64	23.41	219.28	2
18900	1880.0	21.77	1.64	23.41	219.28	2
19175	1907.5	21.67	1.64	23.31	214.29	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	22.59	1.64	24.23	264.85	2
18900	1880.0	22.47	1.64	24.11	257.63	2
19150	1905.0	22.47	1.64	24.11	257.63	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18650	1855.0	21.82	1.64	23.46	221.82	2
18900	1880.0	21.73	1.64	23.37	217.27	2
19150	1905.0	21.7	1.64	23.34	215.77	2



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	22.57	1.64	24.21	263.63	2
18900	1880.0	22.52	1.64	24.16	260.62	2
19125	1902.5	22.42	1.64	24.06	254.68	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18675	1857.5	21.81	1.64	23.45	221.31	2
18900	1880.0	21.74	1.64	23.38	217.77	2
19125	1902.5	21.7	1.64	23.34	215.77	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	22.61	1.64	24.25	266.07	2
18900	1880	22.55	1.64	24.19	262.42	2
19100	1900	22.48	1.64	24.12	258.23	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
18700	1860	21.85	1.64	23.49	223.36	2
18900	1880	21.79	1.64	23.43	220.29	2
19100	1900	21.72	1.64	23.36	216.77	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE BAND 25

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	22.46	1.64	24.1	257.04	2
26365	1882.5	22.47	1.64	24.11	257.63	2
26683	1914.3	22.39	1.64	24.03	252.93	2

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26047	1850.7	21.64	1.64	23.28	212.81	2
26365	1882.5	21.61	1.64	23.25	211.35	2
26683	1914.3	21.53	1.64	23.17	207.49	2

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	22.35	1.64	23.99	250.61	2
26365	1882.5	22.4	1.64	24.04	253.51	2
26675	1913.5	22.29	1.64	23.93	247.17	2

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26055	1851.5	21.61	1.64	23.25	211.35	2
26365	1882.5	21.64	1.64	23.28	212.81	2
26675	1913.5	21.51	1.64	23.15	206.54	2



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	22.4	1.64	24.04	253.51	2
26365	1882.5	22.37	1.64	24.01	251.77	2
26665	1912.5	22.29	1.64	23.93	247.17	2

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26065	1852.5	21.58	1.64	23.22	209.89	2
26365	1882.5	21.67	1.64	23.31	214.29	2
26665	1912.5	21.5	1.64	23.14	206.06	2

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	22.4	1.64	24.04	253.51	2
26365	1882.5	22.37	1.64	24.01	251.77	2
26640	1910	22.3	1.64	23.94	247.74	2

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26090	1855	21.63	1.64	23.27	212.32	2
26365	1882.5	21.63	1.64	23.27	212.32	2
26640	1910	21.53	1.64	23.17	207.49	2

**CHANNEL BANDWIDTH: 15MHz QPSK**

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	22.38	1.64	24.02	252.35	2
26365	1882.5	22.42	1.64	24.06	254.68	2
26615	1907.5	22.25	1.64	23.89	244.91	2

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26115	1857.5	21.62	1.64	23.26	211.84	2
26365	1882.5	21.64	1.64	23.28	212.81	2
26615	1907.5	21.53	1.64	23.17	207.49	2

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	22.42	1.64	24.06	254.68	2
26365	1882.5	22.45	1.64	24.09	256.45	2
26590	1905	22.31	1.64	23.95	248.31	2

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
26140	1860	21.66	1.64	23.3	213.8	2
26365	1882.5	21.69	1.64	23.33	215.28	2
26590	1905	21.55	1.64	23.19	208.45	2

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

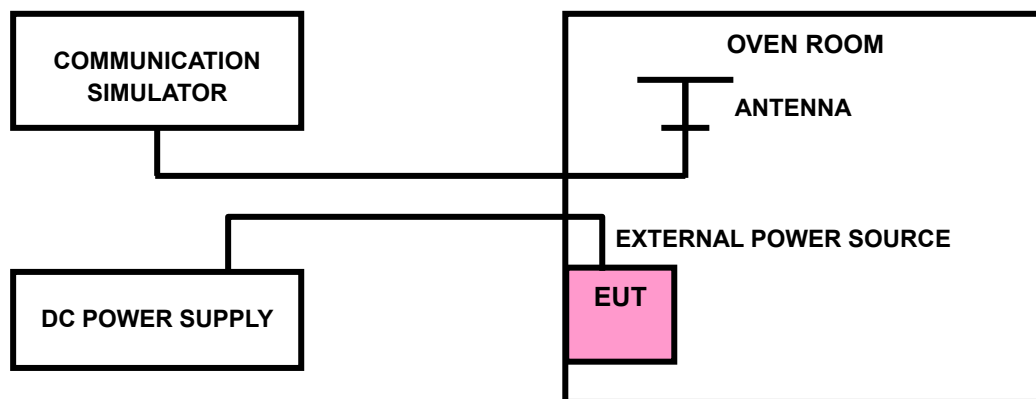

**3.2.4 TEST RESULTS****GPRS1900****FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V_{nor}	0.0002	0.0013	2.5
V_{min}	-0.0015	-0.0016	2.5
V_{max}	0.0010	0.0007	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0033	-0.0042	2.5
-20	-0.0021	-0.0046	2.5
-10	-0.0034	-0.0037	2.5
0	-0.0012	-0.0039	2.5
10	-0.0021	-0.0026	2.5
20	-0.0015	-0.0024	2.5
30	-0.0019	-0.0016	2.5
40	-0.0014	-0.0010	2.5
50	-0.0023	-0.0003	2.5

**EDGE 1900****FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V_{nor}	0.0008	0.0011	2.5
V_{min}	-0.0014	-0.0013	2.5
V_{max}	0.0009	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0052	-0.0049	2.5
-20	-0.0047	-0.0044	2.5
-10	-0.0038	-0.0035	2.5
0	-0.0035	-0.0032	2.5
10	-0.0021	-0.0019	2.5
20	-0.0018	-0.0017	2.5
30	-0.0013	-0.0012	2.5
40	-0.0009	-0.0009	2.5
50	-0.0001	-0.0001	2.5

**WCDMA BAND II****FREQUENCY ERROR VS. VOLTAGE**

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
V_{nor}	0.0014	0.0011	2.5
V_{min}	0.0007	0.0009	2.5
V_{max}	0.0028	0.0015	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	FREQUENCY ERROR (ppm)		LIMIT (ppm)
	Low Channel	High Channel	
-30	-0.0042	-0.0035	2.5
-20	-0.0014	-0.0017	2.5
-10	-0.0035	-0.0032	2.5
0	-0.0016	-0.0019	2.5
10	0.0004	0.0005	2.5
20	0.0012	0.0013	2.5
30	0.0027	0.0026	2.5
40	0.0018	0.0042	2.5
50	0.0022	0.0026	2.5



LTE BAND 2

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.002	0.0024	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0022	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0116	-0.0113	2.5
-20	-0.0102	-0.0109	2.5
-10	-0.0084	-0.0081	2.5
0	-0.0074	-0.0076	2.5
10	-0.0046	-0.0053	2.5
20	-0.004	-0.0039	2.5
30	-0.0032	-0.0032	2.5
40	-0.0016	-0.0019	2.5
50	-0.0002	-0.0002	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0022	0.0021	2.5
V _{min}	-0.0021	-0.0025	2.5
V _{max}	0.0018	0.0018	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0116	2.5
-20	-0.0107	-0.0102	2.5
-10	-0.0082	-0.0084	2.5
0	-0.0078	-0.0073	2.5
10	-0.0054	-0.0045	2.5
20	-0.0044	-0.0043	2.5
30	-0.0033	-0.0041	2.5
40	-0.0022	-0.0018	2.5
50	-0.0002	-0.0005	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0022	0.0026	2.5
V _{min}	-0.0024	-0.003	2.5
V _{max}	0.0021	0.0021	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0111	2.5
-20	-0.0107	-0.0097	2.5
-10	-0.0085	-0.0081	2.5
0	-0.0075	-0.0076	2.5
10	-0.0045	-0.0051	2.5
20	-0.0044	-0.0038	2.5
30	-0.004	-0.0038	2.5
40	-0.0018	-0.0015	2.5
50	-0.0004	-0.0005	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0024	0.0025	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0025	0.0025	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0117	-0.0121	2.5
-20	-0.0106	-0.0102	2.5
-10	-0.0085	-0.0082	2.5
0	-0.0074	-0.0074	2.5
10	-0.0045	-0.0047	2.5
20	-0.0044	-0.0037	2.5
30	-0.0026	-0.0037	2.5
40	-0.0019	-0.0014	2.5
50	-0.0002	-0.0005	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0026	0.0025	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0026	0.0025	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0116	2.5
-20	-0.0105	-0.0103	2.5
-10	-0.0084	-0.008	2.5
0	-0.0074	-0.0073	2.5
10	-0.0049	-0.0045	2.5
20	-0.0043	-0.0043	2.5
30	-0.0029	-0.0032	2.5
40	-0.0018	-0.0019	2.5
50	-0.0005	-0.0005	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0026	0.0026	2.5
V _{min}	-0.0031	-0.003	2.5
V _{max}	0.0024	0.0026	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0121	-0.0112	2.5
-20	-0.0102	-0.0105	2.5
-10	-0.0085	-0.0083	2.5
0	-0.0074	-0.0075	2.5
10	-0.0051	-0.0055	2.5
20	-0.0039	-0.004	2.5
30	-0.0031	-0.0032	2.5
40	-0.0018	-0.0022	2.5
50	-0.0003	-0.0005	2.5



LTE BAND 25

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0009	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.001	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	1.4MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0053	-0.005	2.5
-20	-0.0046	-0.0048	2.5
-10	-0.0038	-0.0037	2.5
0	-0.0035	-0.0034	2.5
10	-0.0021	-0.0022	2.5
20	-0.0018	-0.0019	2.5
30	-0.0014	-0.0019	2.5
40	-0.0007	-0.0009	2.5
50	-0.0001	-0.0001	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.001	0.0009	2.5
V _{min}	-0.0009	-0.0011	2.5
V _{max}	0.0008	0.0008	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	3MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0054	-0.0051	2.5
-20	-0.0045	-0.0046	2.5
-10	-0.0037	-0.0036	2.5
0	-0.0035	-0.0033	2.5
10	-0.0021	-0.0023	2.5
20	-0.0019	-0.0019	2.5
30	-0.0015	-0.0011	2.5
40	-0.0008	-0.001	2.5
50	-0.0002	-0.0001	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.001	0.0011	2.5
V _{min}	-0.001	-0.0013	2.5
V _{max}	0.0009	0.0009	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	5MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0052	-0.0053	2.5
-20	-0.0044	-0.0045	2.5
-10	-0.0038	-0.0035	2.5
0	-0.0033	-0.0032	2.5
10	-0.0024	-0.0024	2.5
20	-0.002	-0.0017	2.5
30	-0.0017	-0.0012	2.5
40	-0.001	-0.001	2.5
50	-0.0002	-0.0002	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.001	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0011	0.001	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	10MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.005	2.5
-20	-0.0044	-0.0047	2.5
-10	-0.0038	-0.0036	2.5
0	-0.0034	-0.0033	2.5
10	-0.0025	-0.0024	2.5
20	-0.0018	-0.0018	2.5
30	-0.0017	-0.0015	2.5
40	-0.0008	-0.0009	2.5
50	-0.0001	-0.0002	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0012	0.001	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	15MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0055	-0.0051	2.5
-20	-0.0044	-0.0045	2.5
-10	-0.0038	-0.0037	2.5
0	-0.0034	-0.0033	2.5
10	-0.0024	-0.002	2.5
20	-0.0018	-0.0017	2.5
30	-0.0012	-0.0017	2.5
40	-0.0009	-0.0007	2.5
50	-0.0001	-0.0001	2.5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
V _{nor}	0.0011	0.0011	2.5
V _{min}	-0.0014	-0.0013	2.5
V _{max}	0.0012	0.0011	2.5

NOTE: The applicant defined the normal working voltage of the battery is from V_{min} to V_{max} .

FREQUENCY ERROR vs. TEMPERATURE.

TEMP. (°C)	20MHz		LIMIT (ppm)
	FREQUENCY ERROR (ppm)		
	Low Channel	High Channel	
-30	-0.0051	-0.0051	2.5
-20	-0.0048	-0.0045	2.5
-10	-0.0038	-0.0036	2.5
0	-0.0034	-0.0032	2.5
10	-0.0022	-0.0024	2.5
20	-0.0017	-0.0017	2.5
30	-0.0016	-0.0013	2.5
40	-0.001	-0.001	2.5
50	-0.0001	-0.0001	2.5




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

3.3.2 TEST SETUP

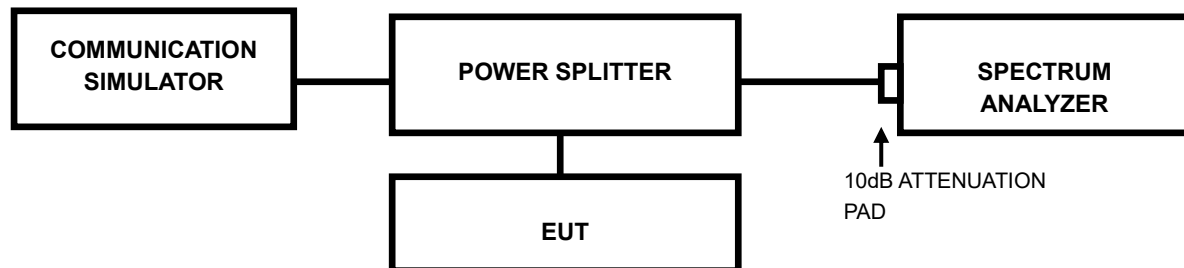




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

3.3.3 TEST RESULTS

Channel	Frequency (MHz)	99% Occupied bandwidth (kHz)		Channel	Frequency (MHz)	99% Occupied bandwidth (kHz)
		GPRS	EDGE			WCAMA
512	1850.2	240.00	240.00	9262	1852.4	4.180
661	1880.0	250.00	250.00	9400	1880.0	4.170
810	1909.8	250.00	240.00	9538	1907.6	4.180

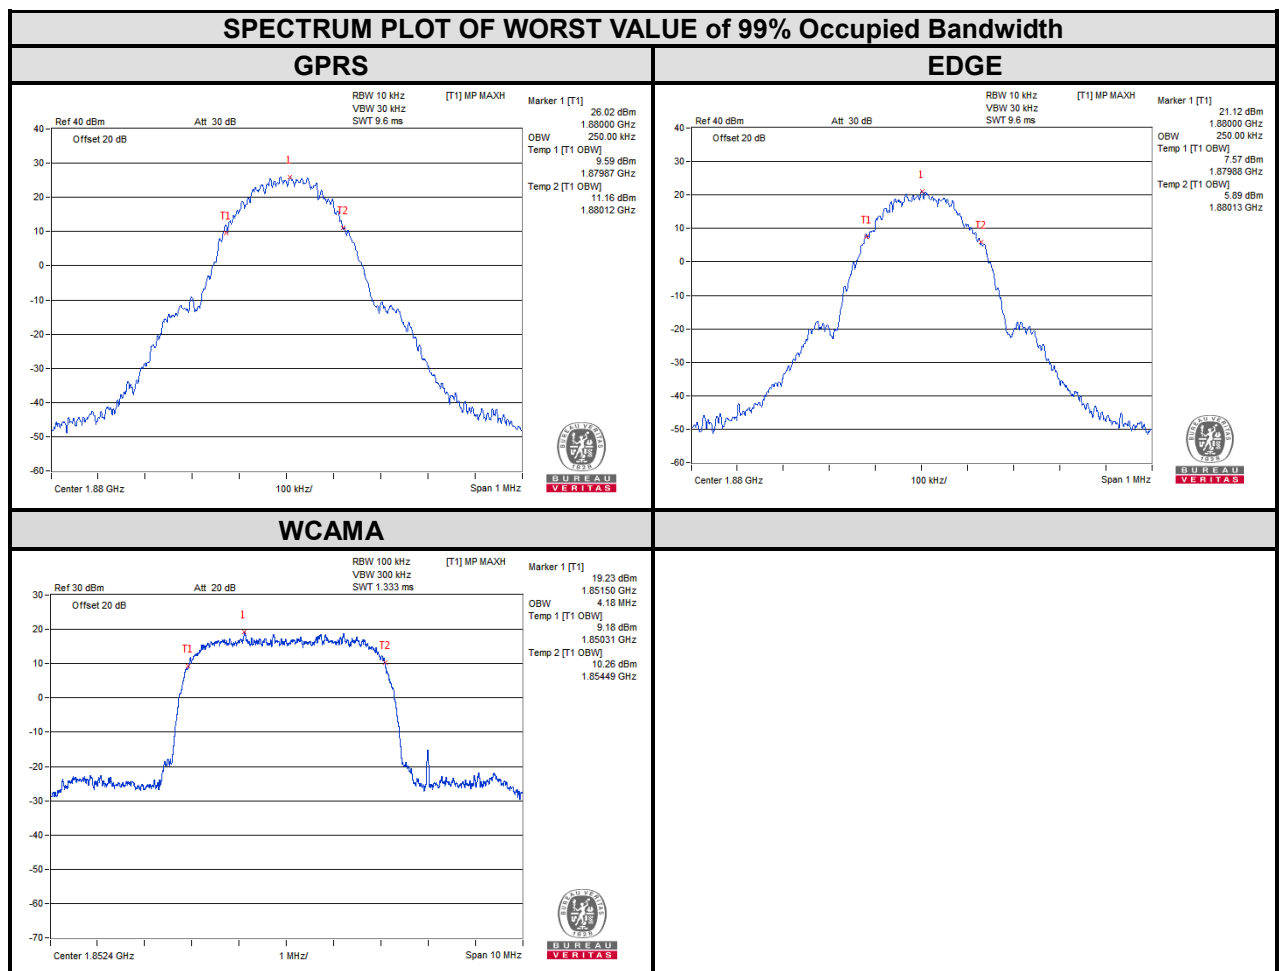




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

Channel	Frequency (MHz)	26dB bandwidth (MHz)		Channel	Frequency (MHz)	26dB bandwidth (MHz)
		GPRS	EDGE			WCAMA
512	1850.2	319.00	311.80	9262	1852.4	4.721
661	1880.0	322.60	308.60	9400	1880.0	4.727
810	1909.8	317.60	314.40	9538	1907.6	4.745

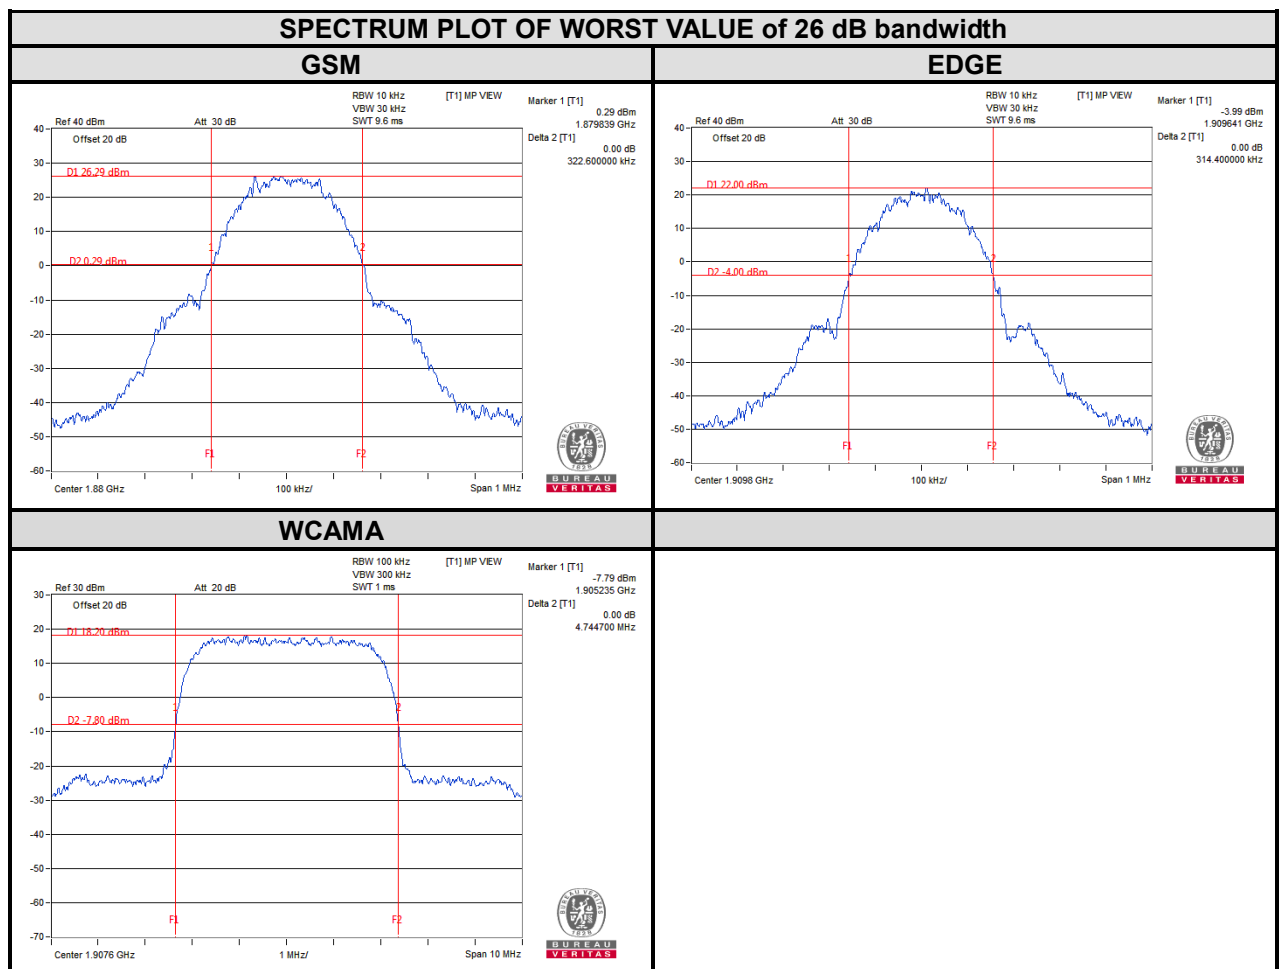


LTE BAND 2

LTE band 2					
CHANNEL BANDWIDTH: 1.4MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18607	1850.7	1.08	1.08	1.24	1.24
18900	1880	1.08	1.08	1.25	1.23
19193	1909.3	1.08	1.08	1.25	1.26

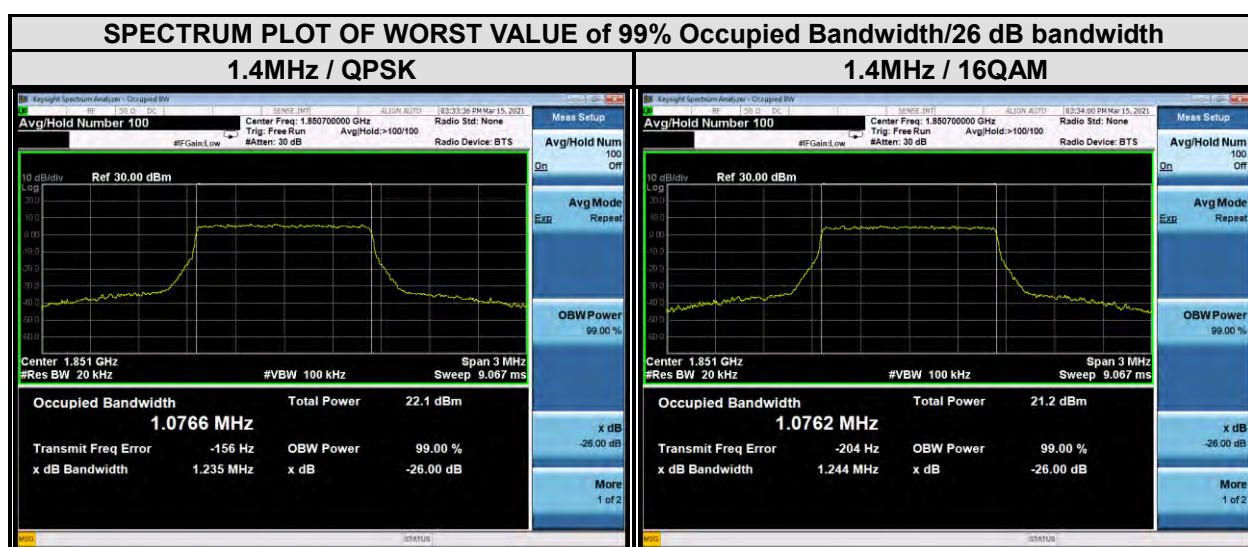


CHANNEL BANDWIDTH: 3MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18615	1851.5	2.68	2.68	2.86	2.86
18900	1880	2.67	2.68	2.85	2.87
19185	1908.5	2.68	2.67	2.86	2.85

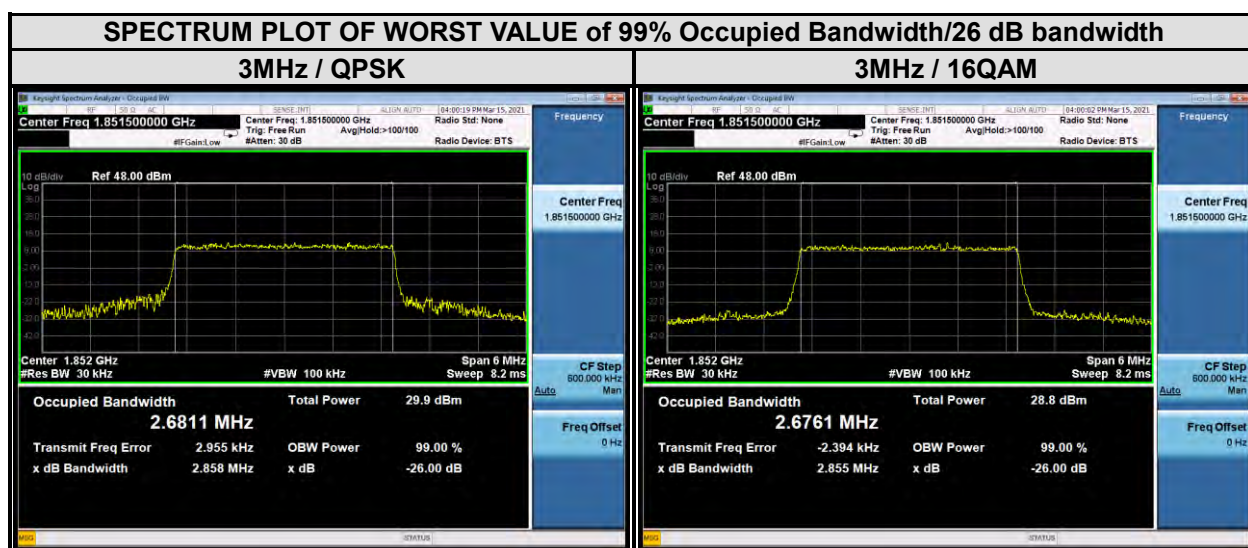



CHANNEL BANDWIDTH: 5MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18625	1852.5	4.48	4.47	4.82	4.80
18900	1880	4.47	4.46	4.80	4.76
19175	1907.5	4.46	4.46	4.80	4.85

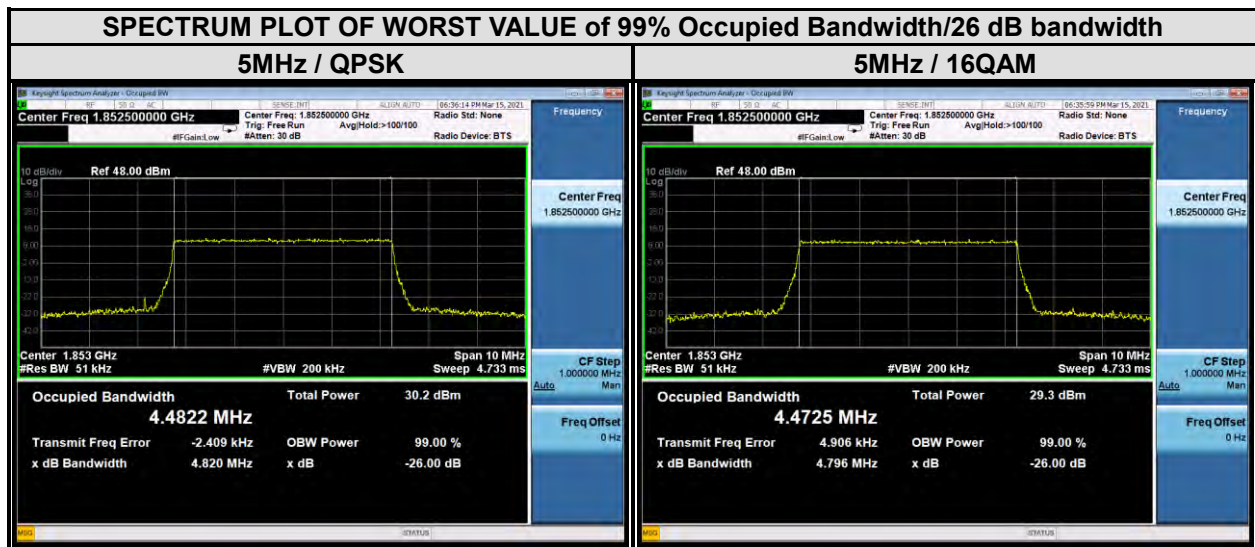





**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2


CHANNEL BANDWIDTH: 10MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18650	1855	8.94	8.95	9.75	10.38
18900	1880	8.95	8.93	9.54	9.51
19150	1905	8.94	8.93	9.52	9.44

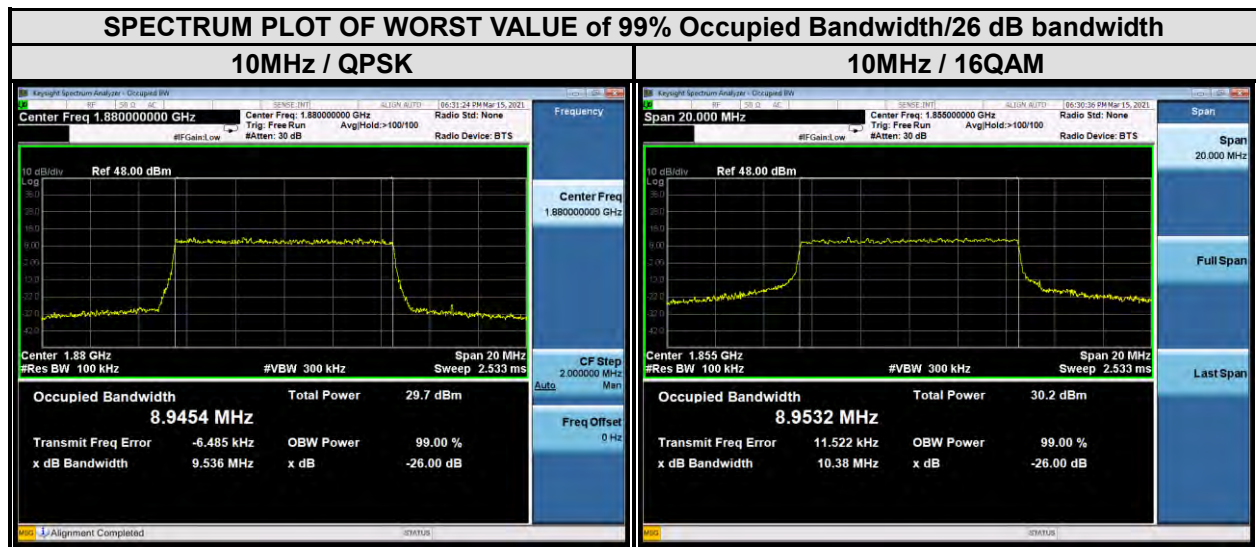

CHANNEL BANDWIDTH: 15MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18675	1857.5	13.41	13.39	14.18	14.30
18900	1880	13.41	13.41	14.32	14.33
19125	1902.5	13.39	13.40	14.35	14.30

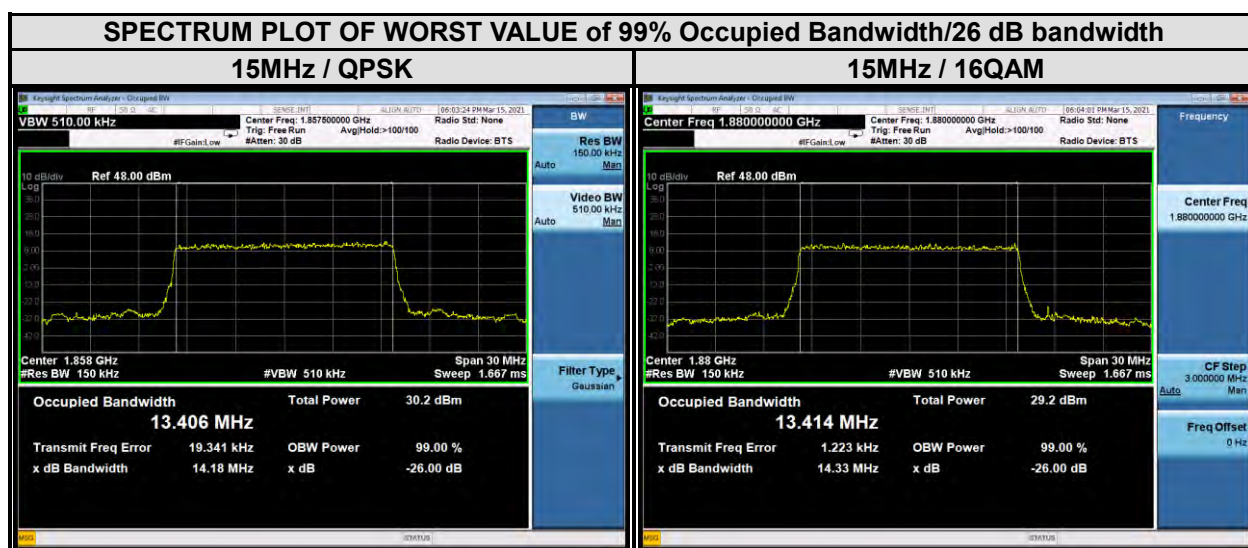

CHANNEL BANDWIDTH: 20MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
18700	1860	17.86	17.84	18.86	19.07
18900	1880	17.88	17.88	19.00	19.55
19100	1900	17.86	17.88	18.93	19.10

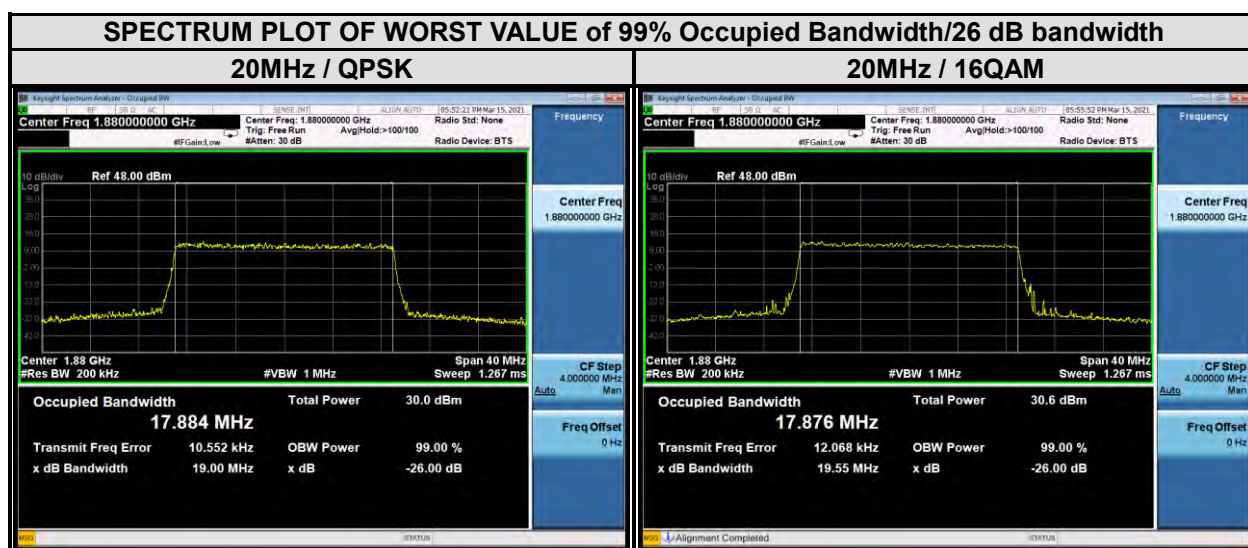




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2


LTE BAND 25

LTE band 25					
CHANNEL BANDWIDTH: 1.4MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26047	1850.7	1.08	1.08	1.23	1.24
26365	1882.5	1.08	1.08	1.23	1.24
26683	1914.3	1.08	1.08	1.24	1.24

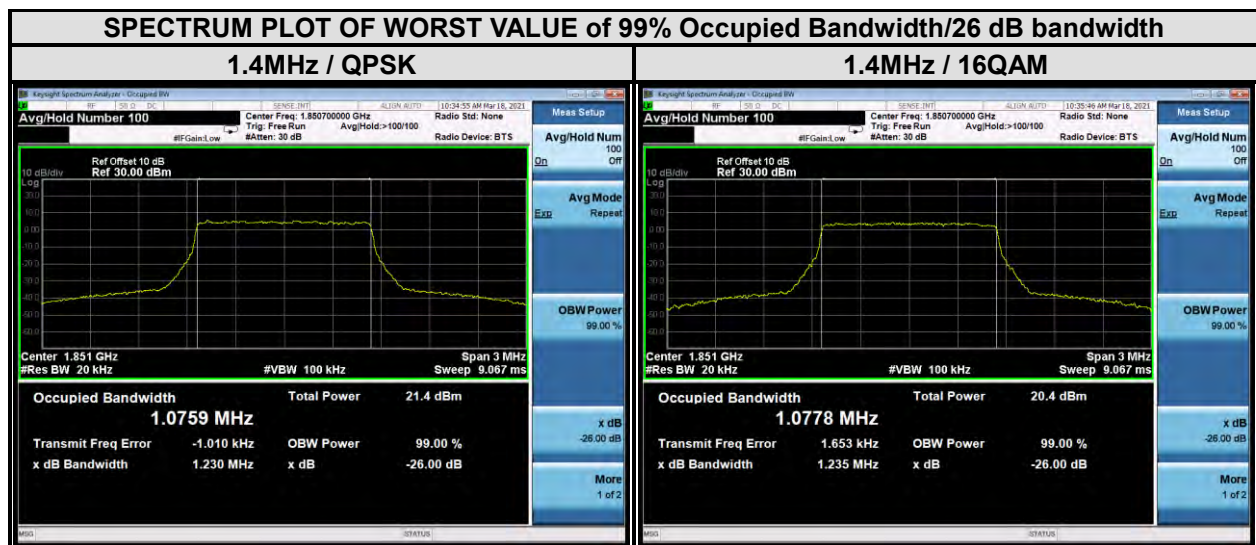



CHANNEL BANDWIDTH: 3MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26055	1851.5	2.67	2.67	2.82	2.82
26365	1882.5	2.67	2.67	2.82	2.82
26675	1913.5	2.67	2.68	2.83	2.82

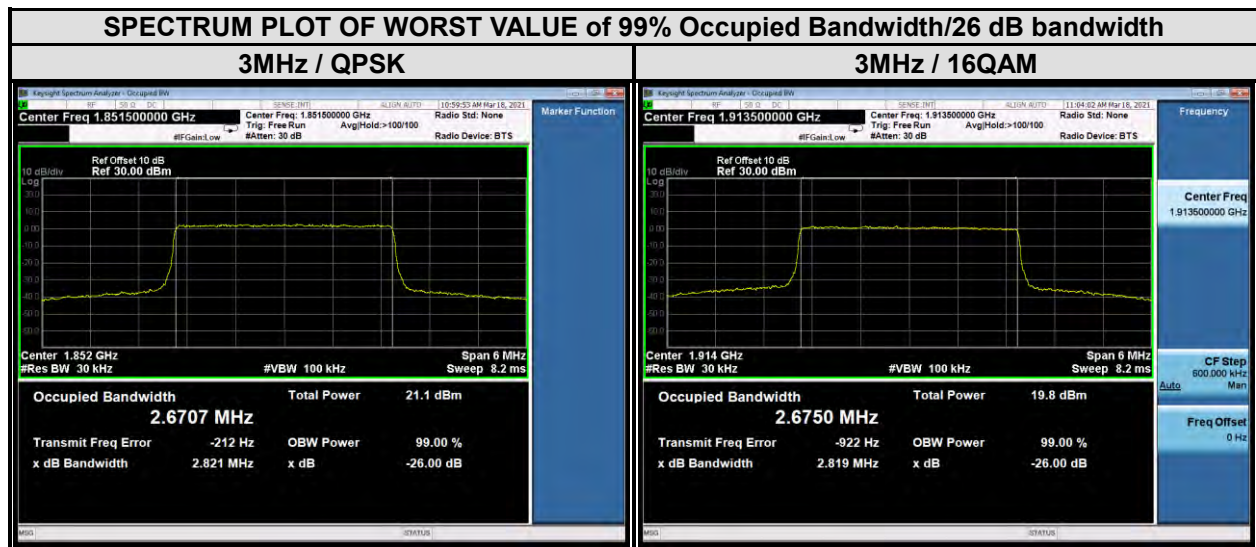





**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 5MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26065	1852.5	4.47	4.46	4.80	4.83
26365	1882.5	4.46	4.46	4.79	4.75
26665	1912.5	4.46	4.46	4.76	4.74

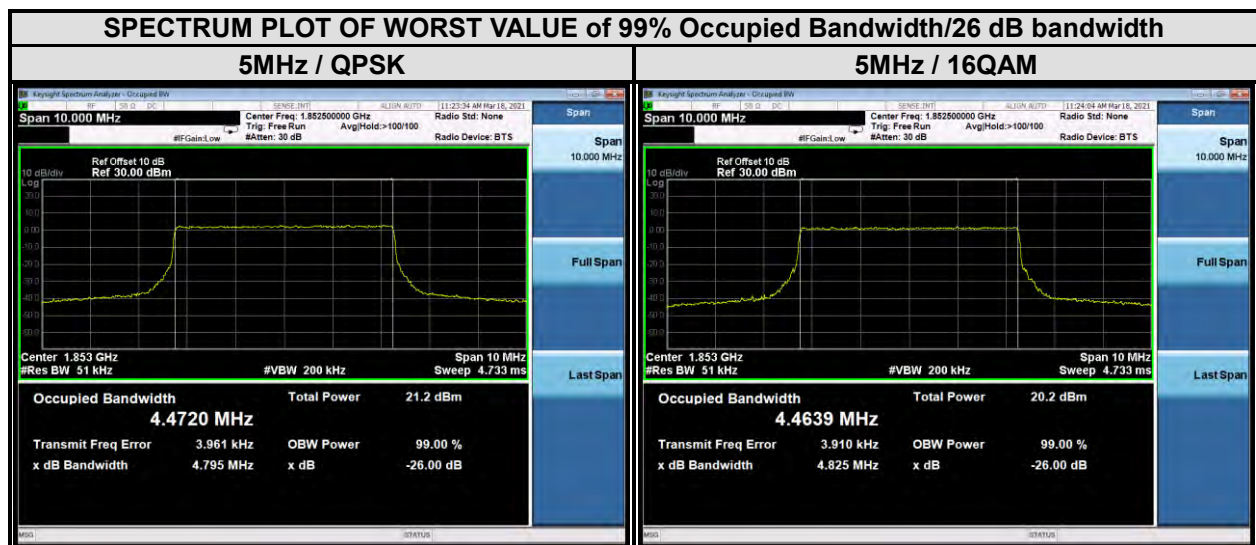

CHANNEL BANDWIDTH: 10MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26090	1855	8.93	8.91	9.32	9.35
26365	1882.5	8.92	8.91	9.39	9.33
26640	1910	8.91	8.90	9.31	9.28

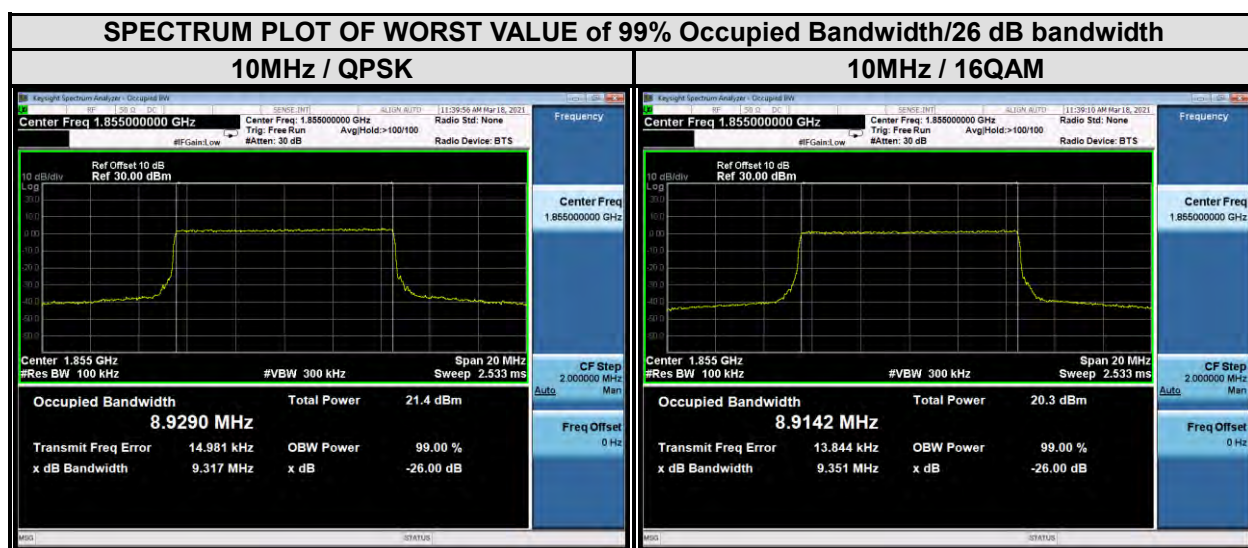





**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 15MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26115	1857.5	13.38	13.38	13.91	13.99
26365	1882.5	13.39	13.39	13.94	13.94
26615	1907.5	13.35	13.35	13.98	13.92

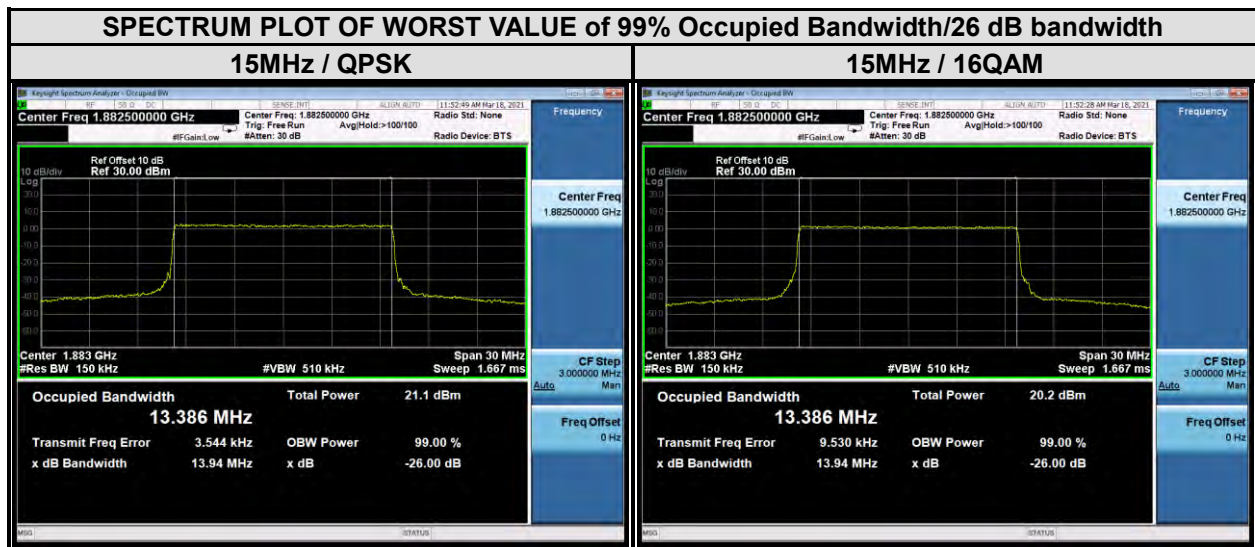

CHANNEL BANDWIDTH: 20MHz					
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		26 dB bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26140	1860	17.84	17.83	18.56	18.54
26365	1882.5	17.85	17.84	18.55	18.56
26590	1905	17.82	17.82	18.55	18.59

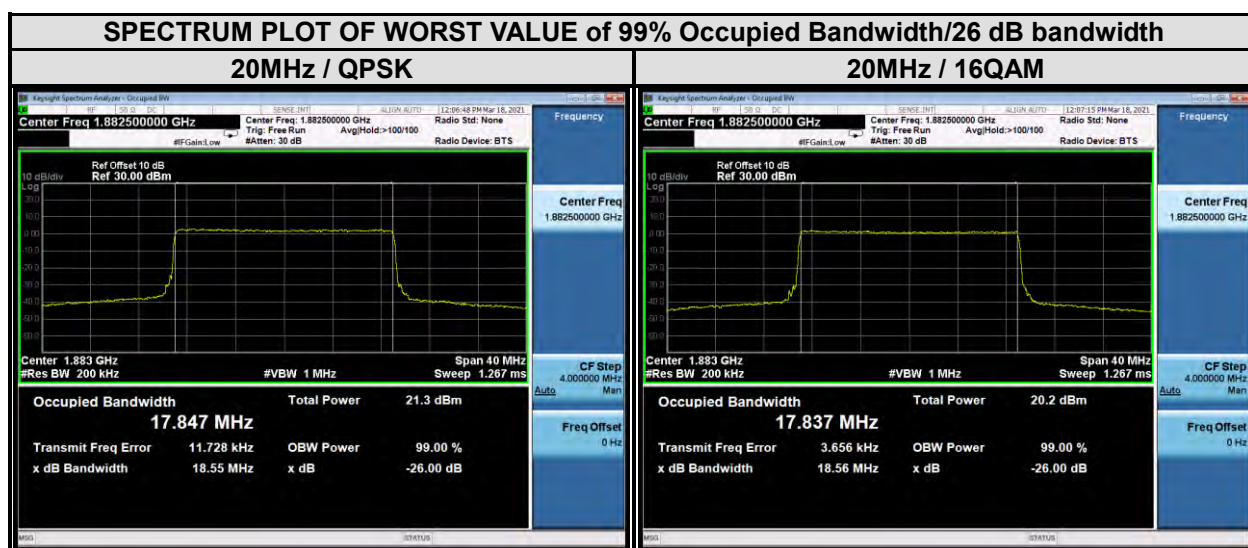




3.4 BAND EDGE MEASUREMENTC

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

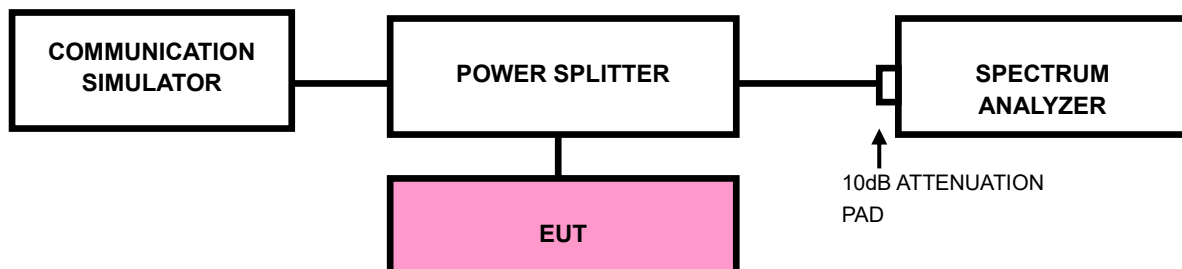

3.4.3 TEST PROCEDURES


- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz (WCDMA).
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 20kHz and VBW of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 30kHz and VBW of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 50kHz and VBW of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 100kHz and VBW of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- i. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RBW of the spectrum is 200kHz and VBW of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- j. Record the max trace plot into the test report.



BUREAU
VERITAS

Test Report No.: RFA210222W001-2

3.4.4. TEST RESULTS

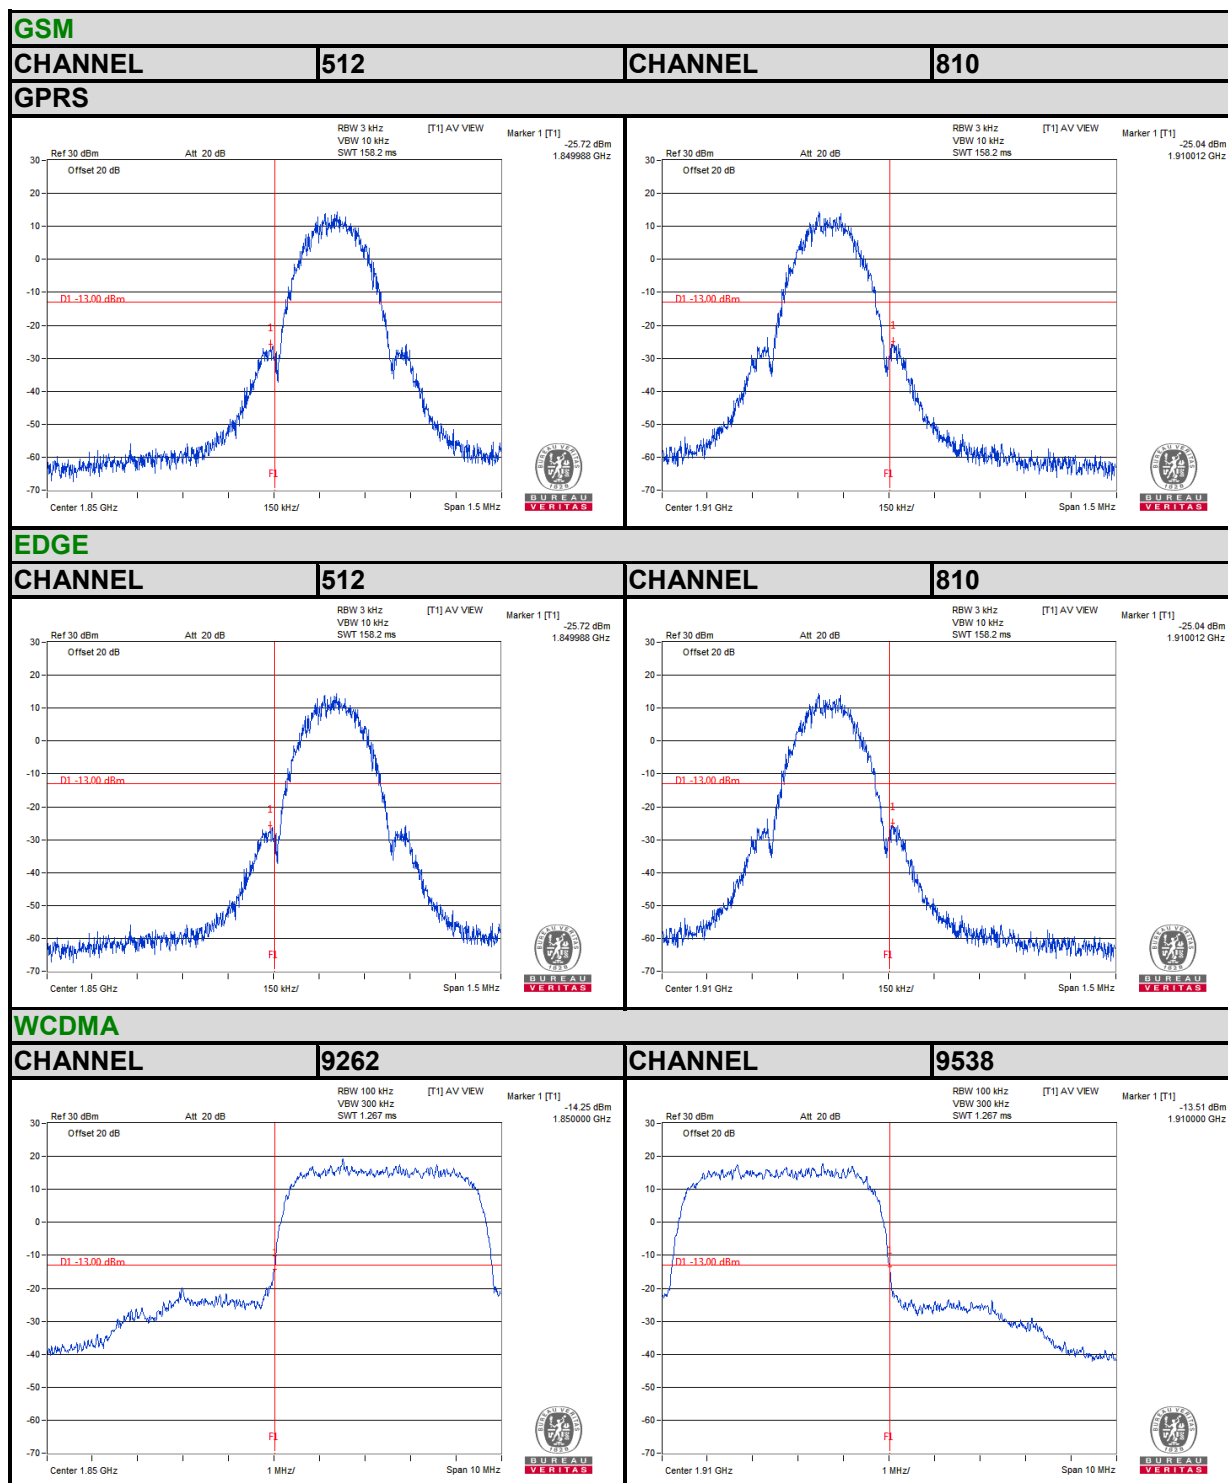



BUREAU
VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2


Channel Bandwidth: 1.4MHz QPSK





BUREAU
VERITAS

Test Report No.: RFA210222W001-2

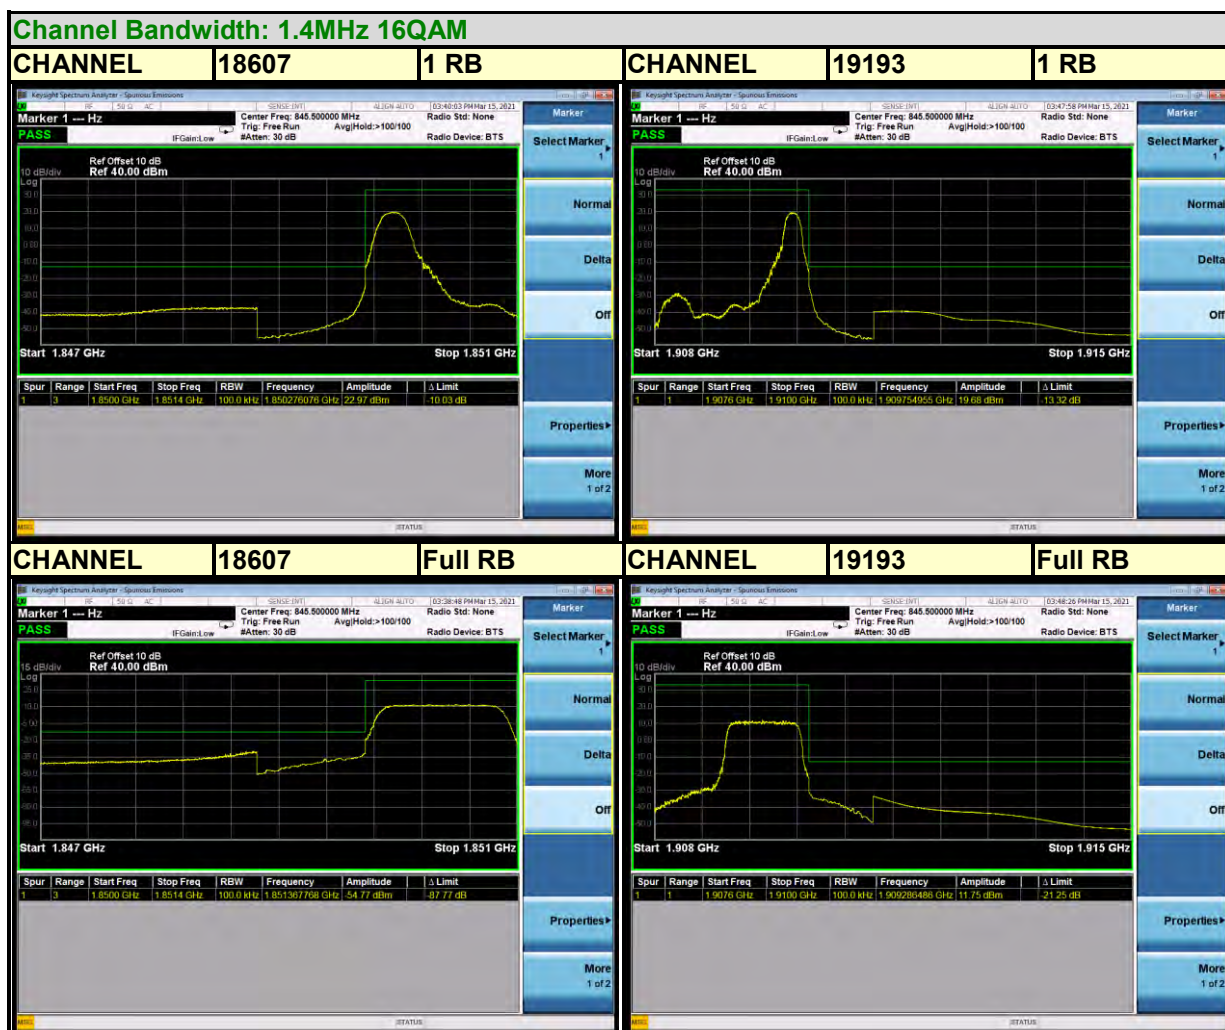



BUREAU
VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2

Channel Bandwidth: 3MHz QPSK





BUREAU
VERITAS

Test Report No.: RFA210222W001-2





BUREAU
VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2

Channel Bandwidth: 5MHz QPSK





BUREAU
VERITAS

Test Report No.: RFA210222W001-2





BUREAU
VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2


Channel Bandwidth: 10MHz QPSK





BUREAU
VERITAS

Test Report No.: RFA210222W001-2

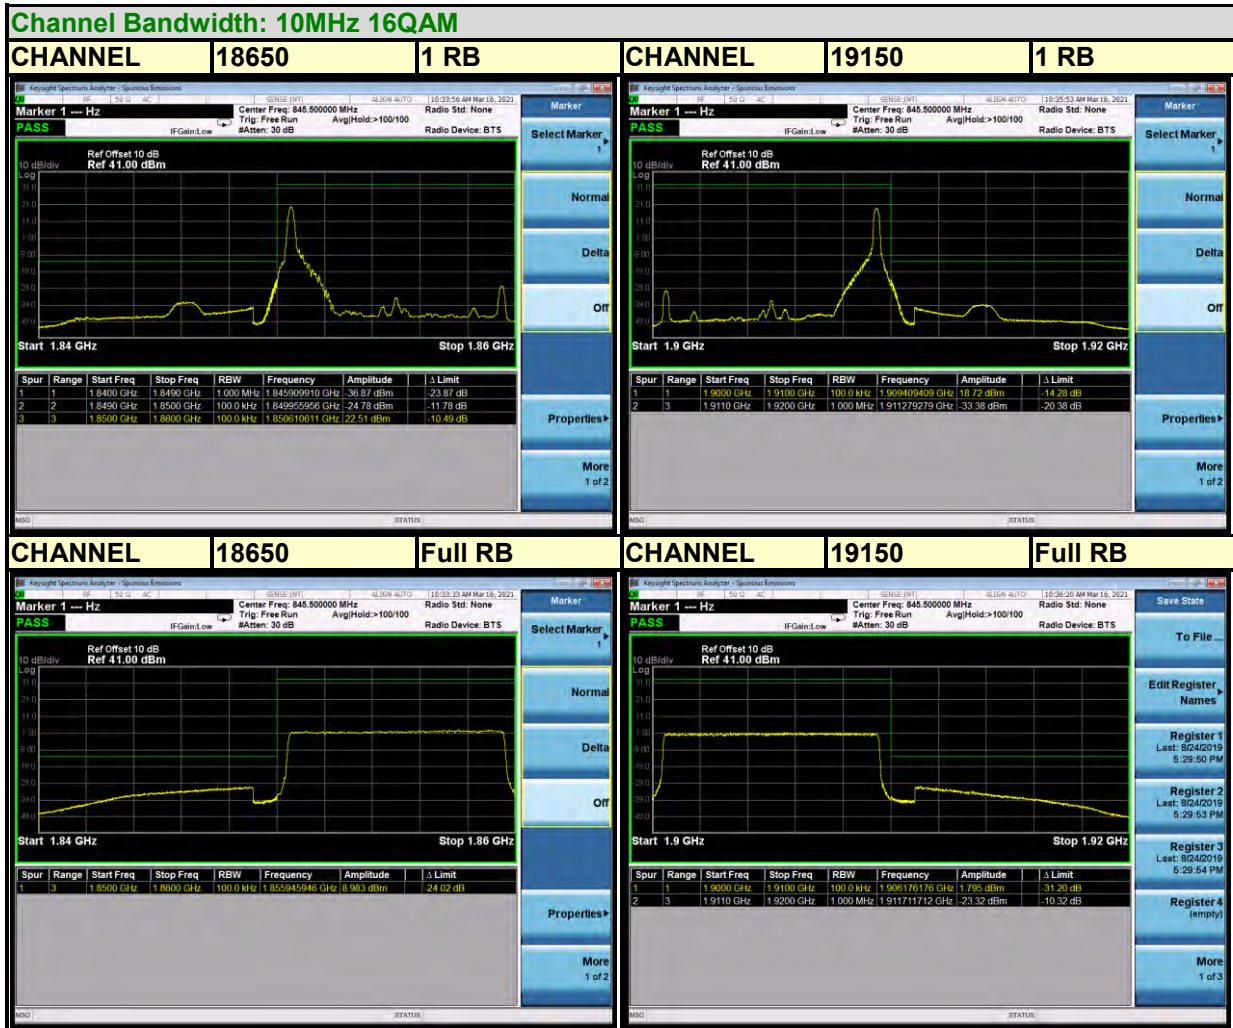



BUREAU
VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2

