



**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2





**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

LTE BAND 2





BUREAU VERITAS

Test Report No.: RFA210222W001-2






BUREAU VERITAS

Test Report No.: RFA210222W001-2


LTE BAND 25

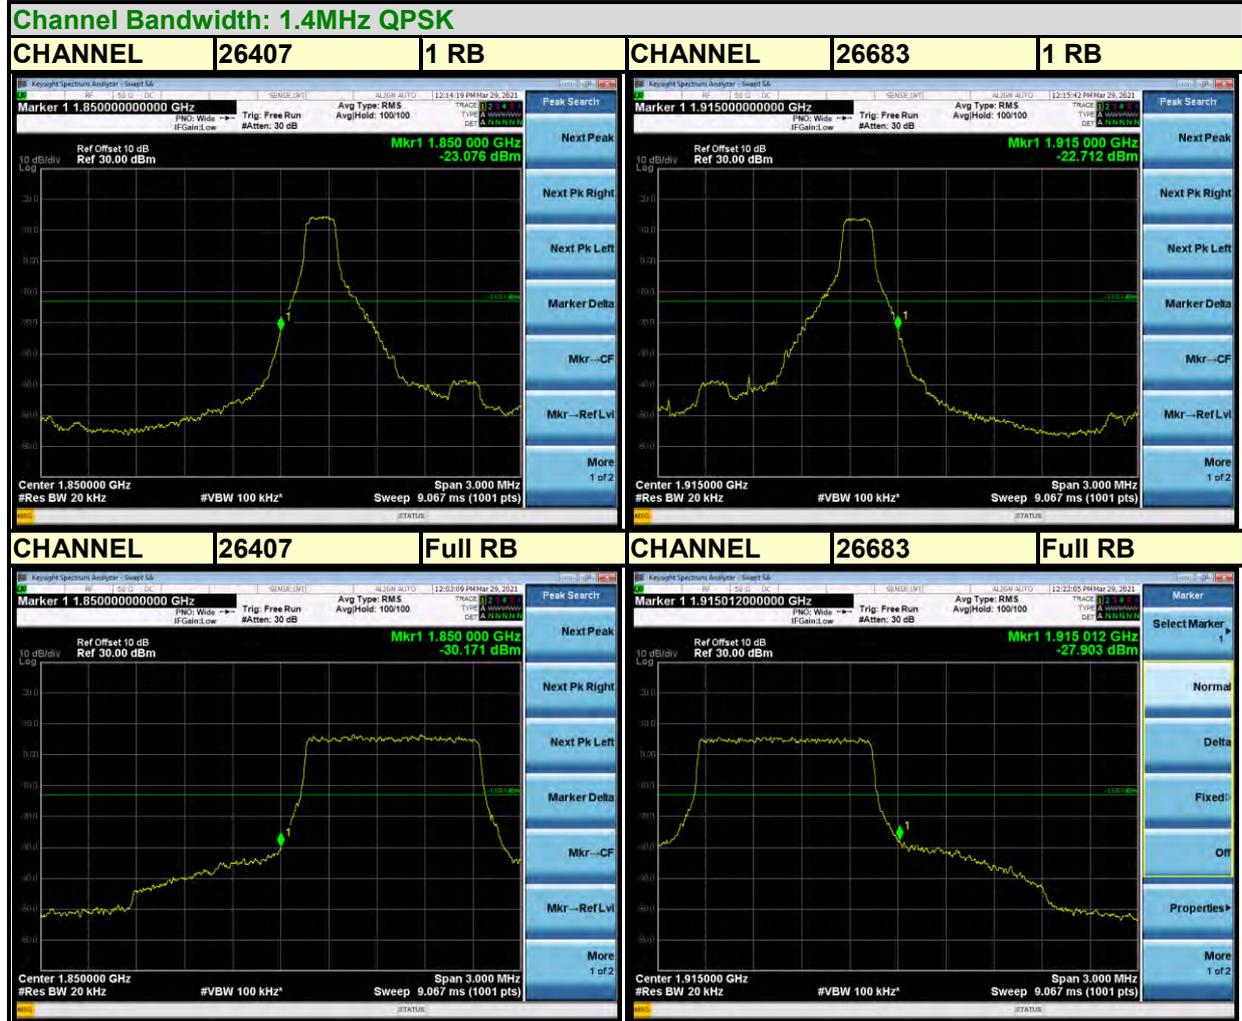



BUREAU VERITAS

Test Report No.: RFA210222W001-2

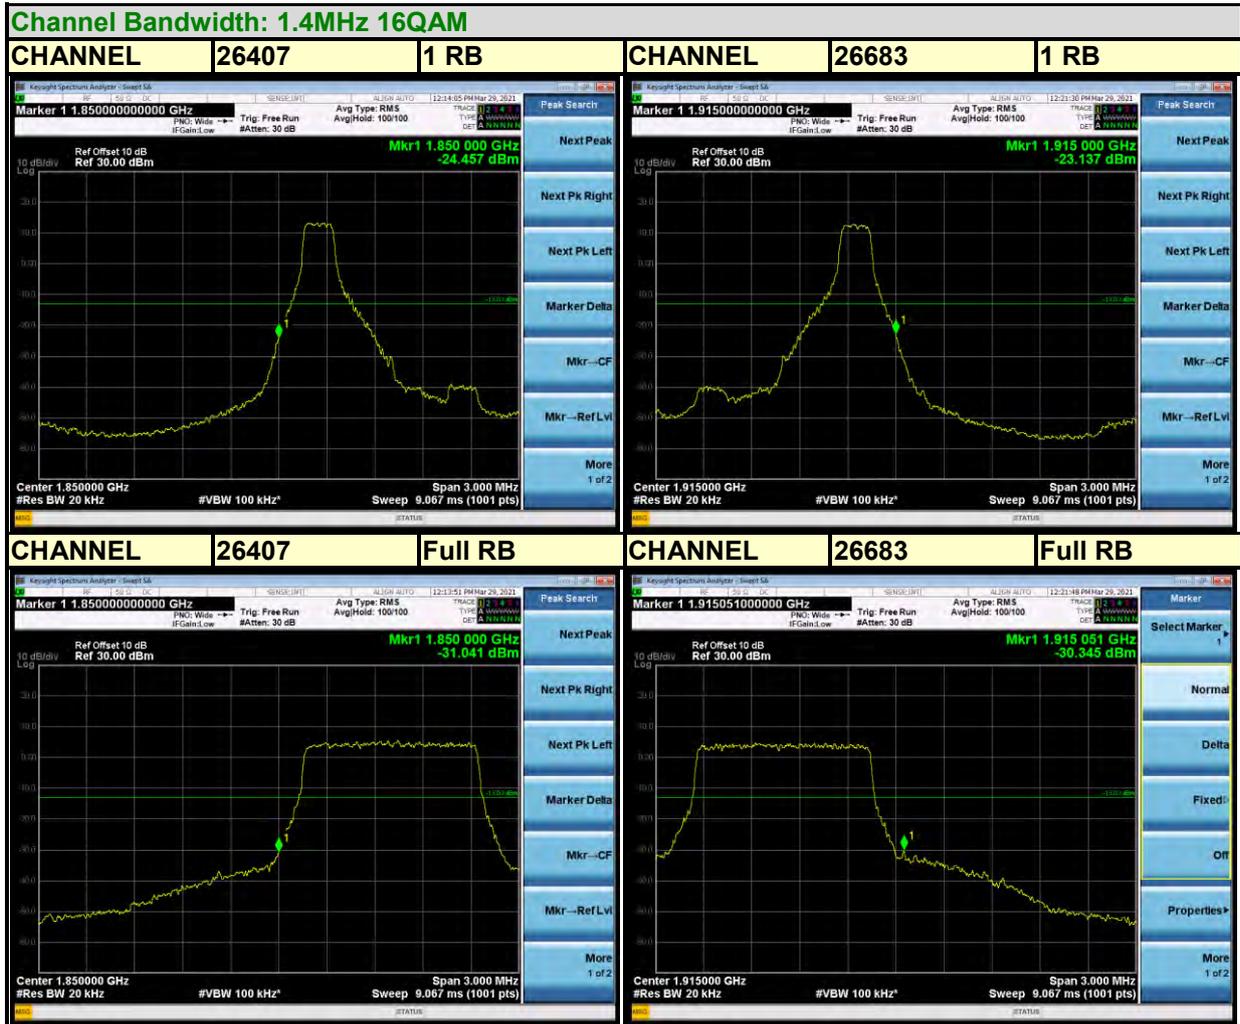



BUREAU VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 25



BV 7Layers Communications Technology (Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China


Tel: +86 755 8869 6566 Fax: +86 755 8869 6577

Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: RFA210222W001-2

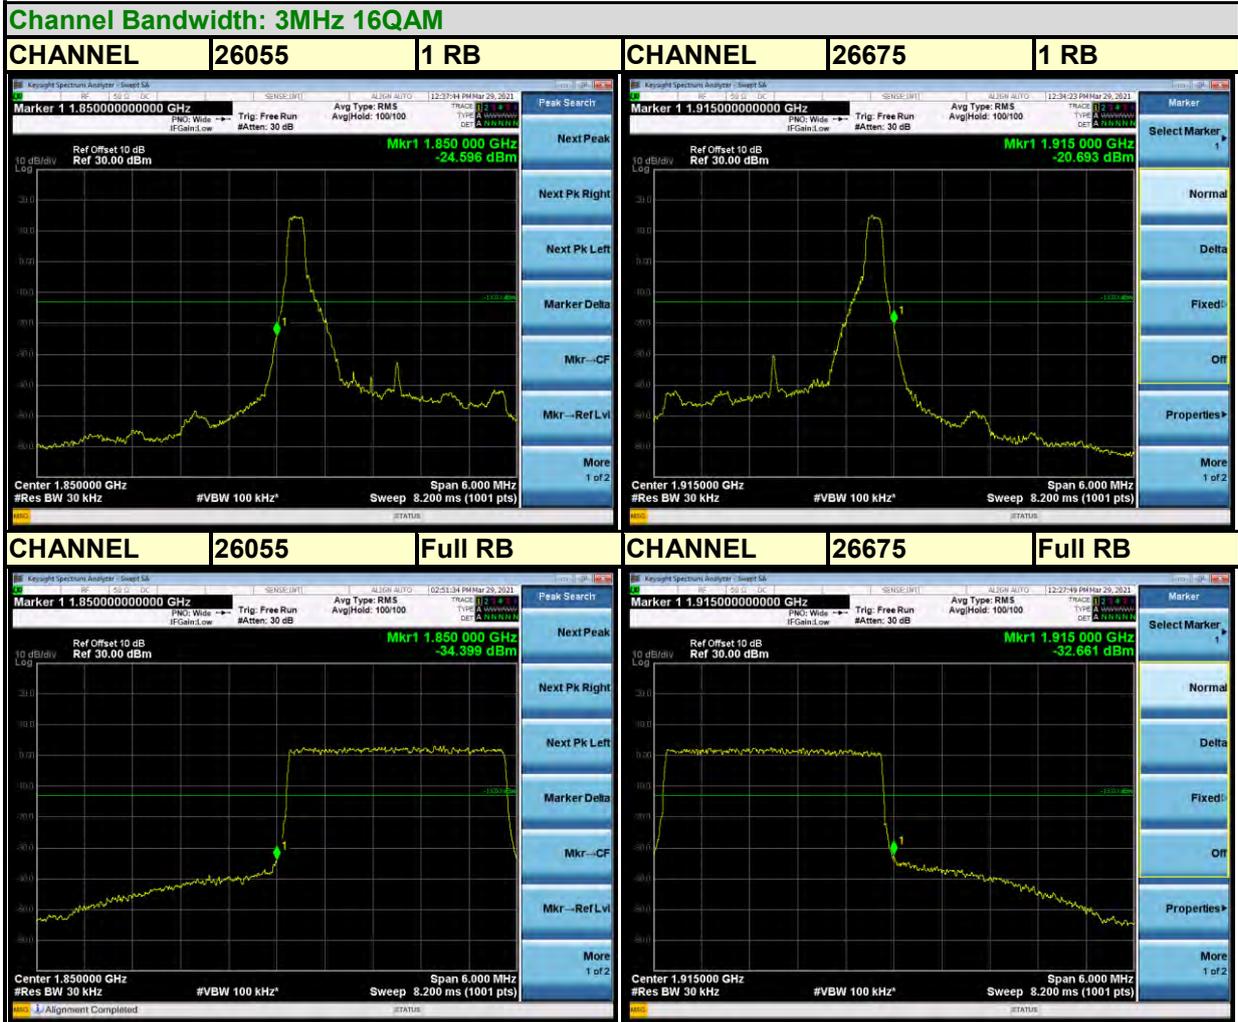




BUREAU VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 25

Channel Bandwidth: 5MHz QPSK

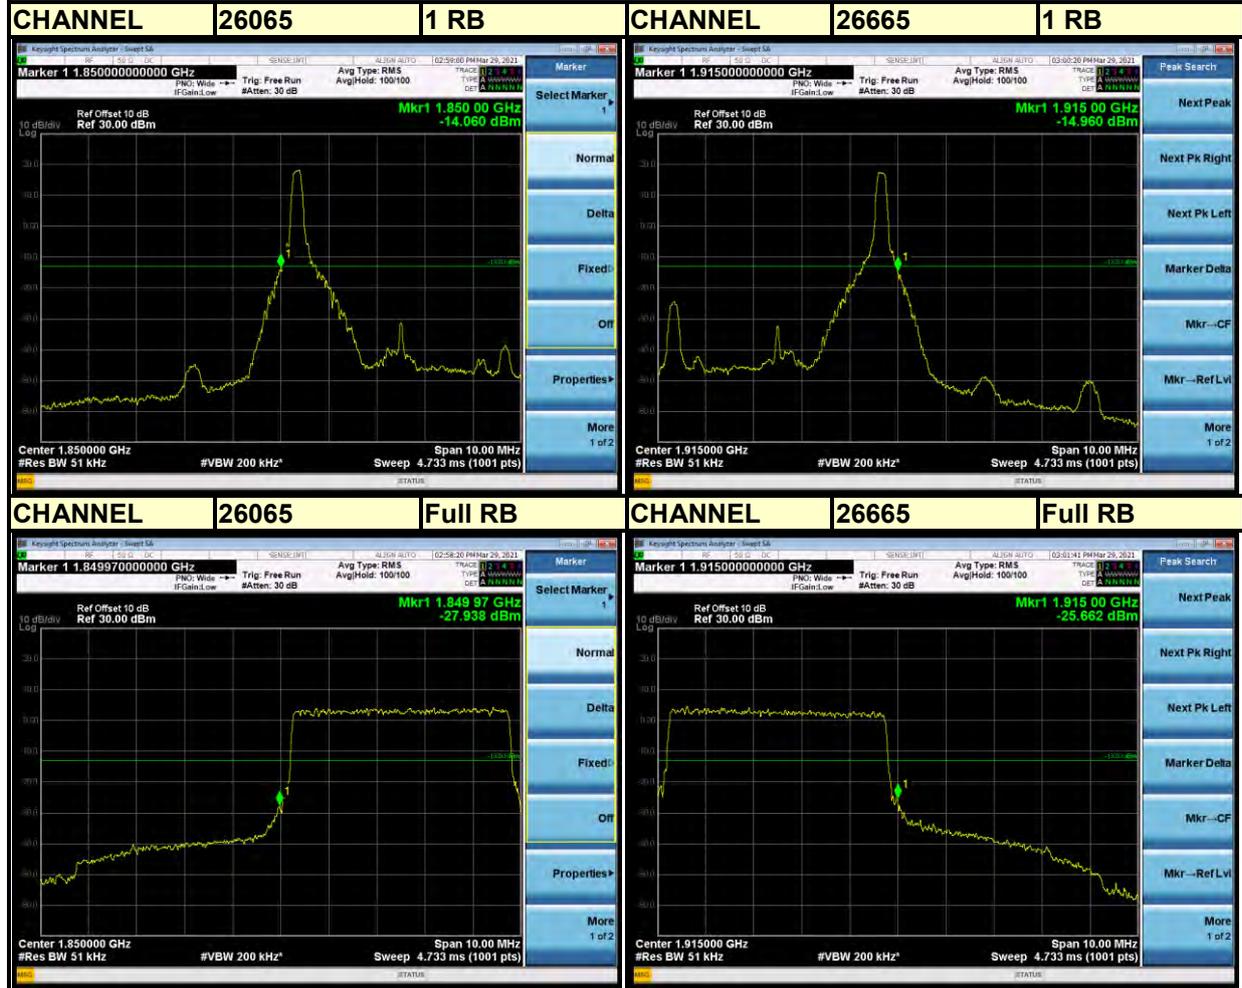



BUREAU VERITAS

Test Report No.: RFA210222W001-2






BUREAU VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 25

Channel Bandwidth: 10MHz QPSK

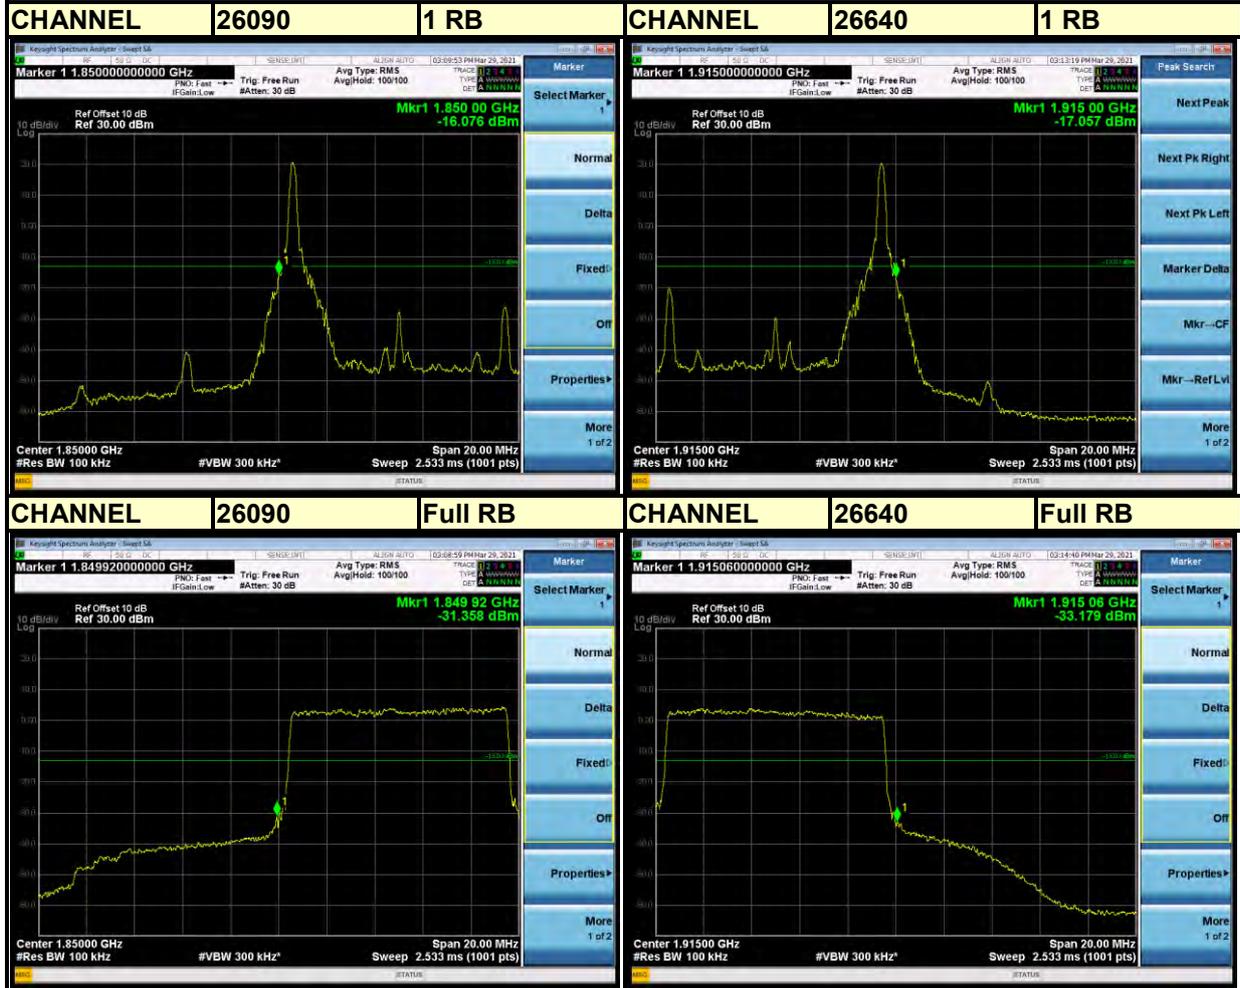



BUREAU VERITAS

Test Report No.: RFA210222W001-2






**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

LTE BAND 25

Channel Bandwidth: 15MHz QPSK

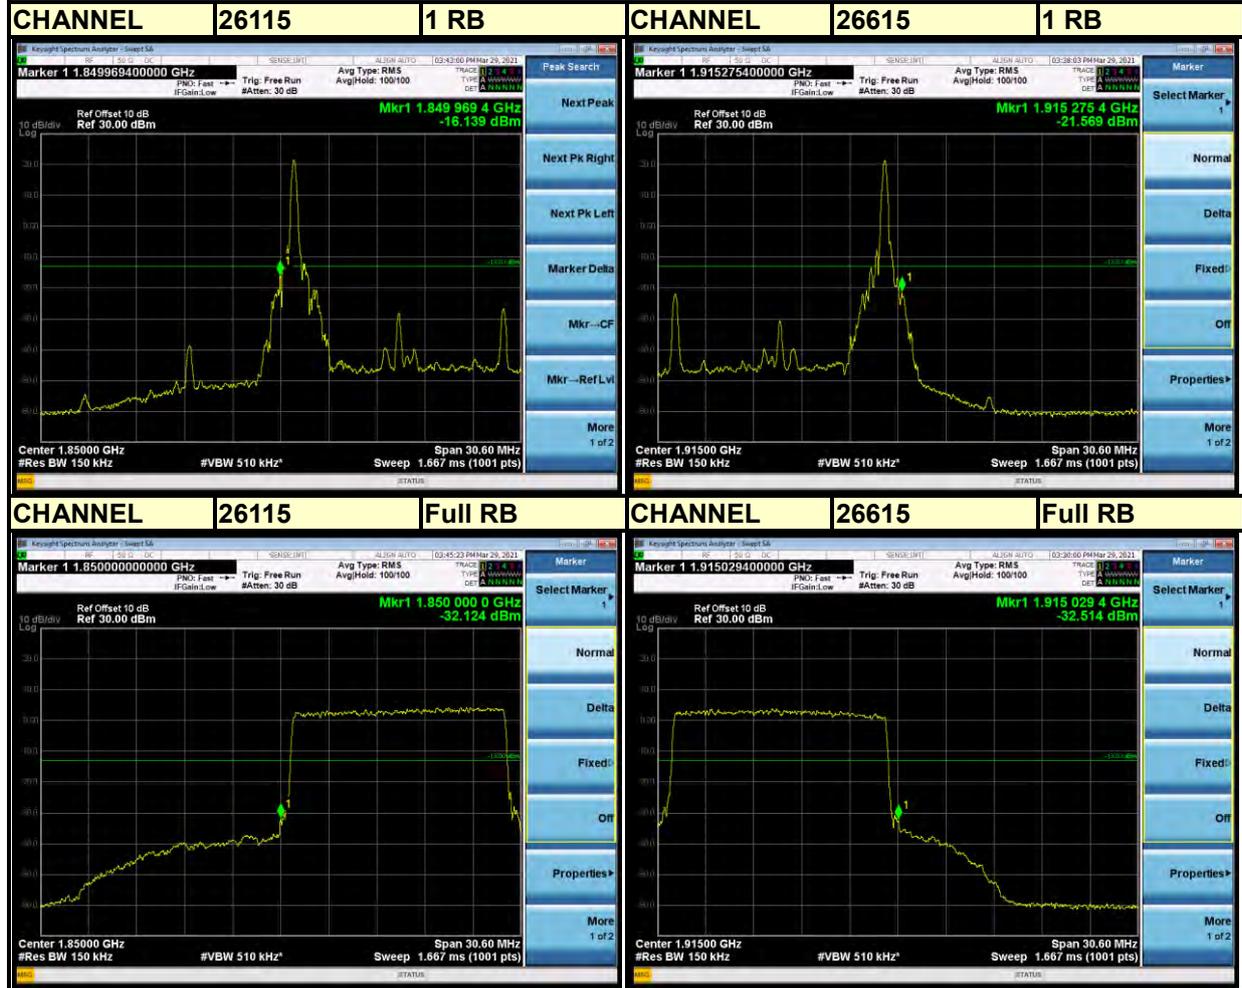



BUREAU VERITAS

Test Report No.: RFA210222W001-2






BUREAU VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 25

Channel Bandwidth: 20MHz QPSK

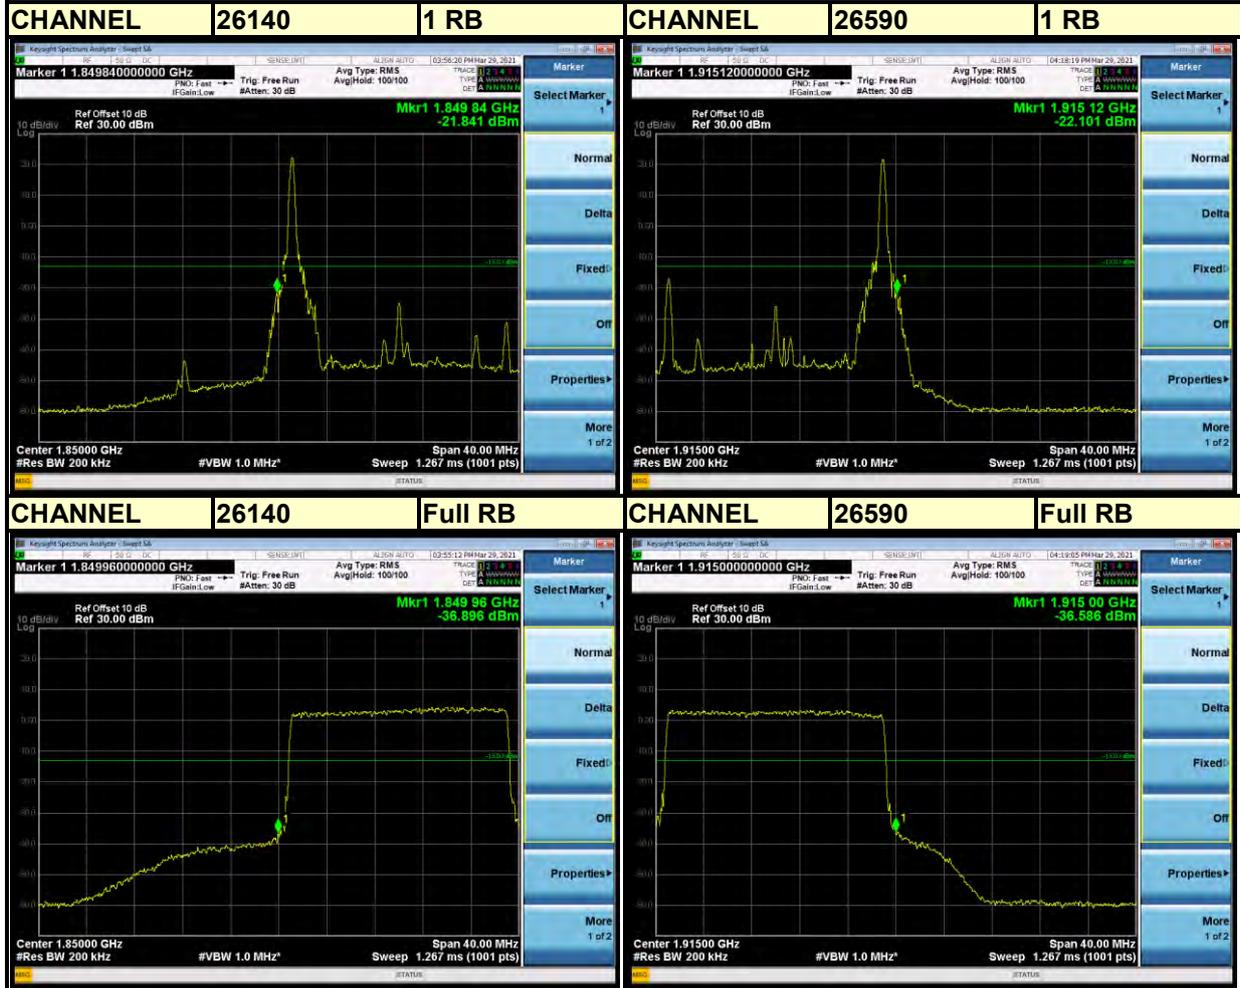



BUREAU VERITAS

Test Report No.: RFA210222W001-2





3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

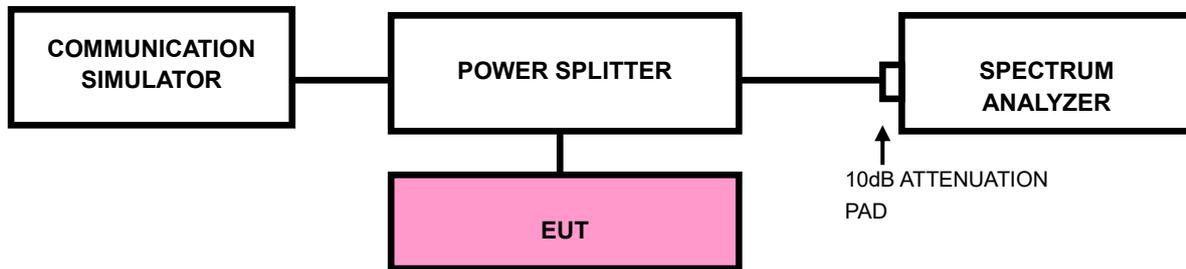




BUREAU VERITAS

Test Report No.: RFA210222W001-2


3.5.4 TEST RESULTS

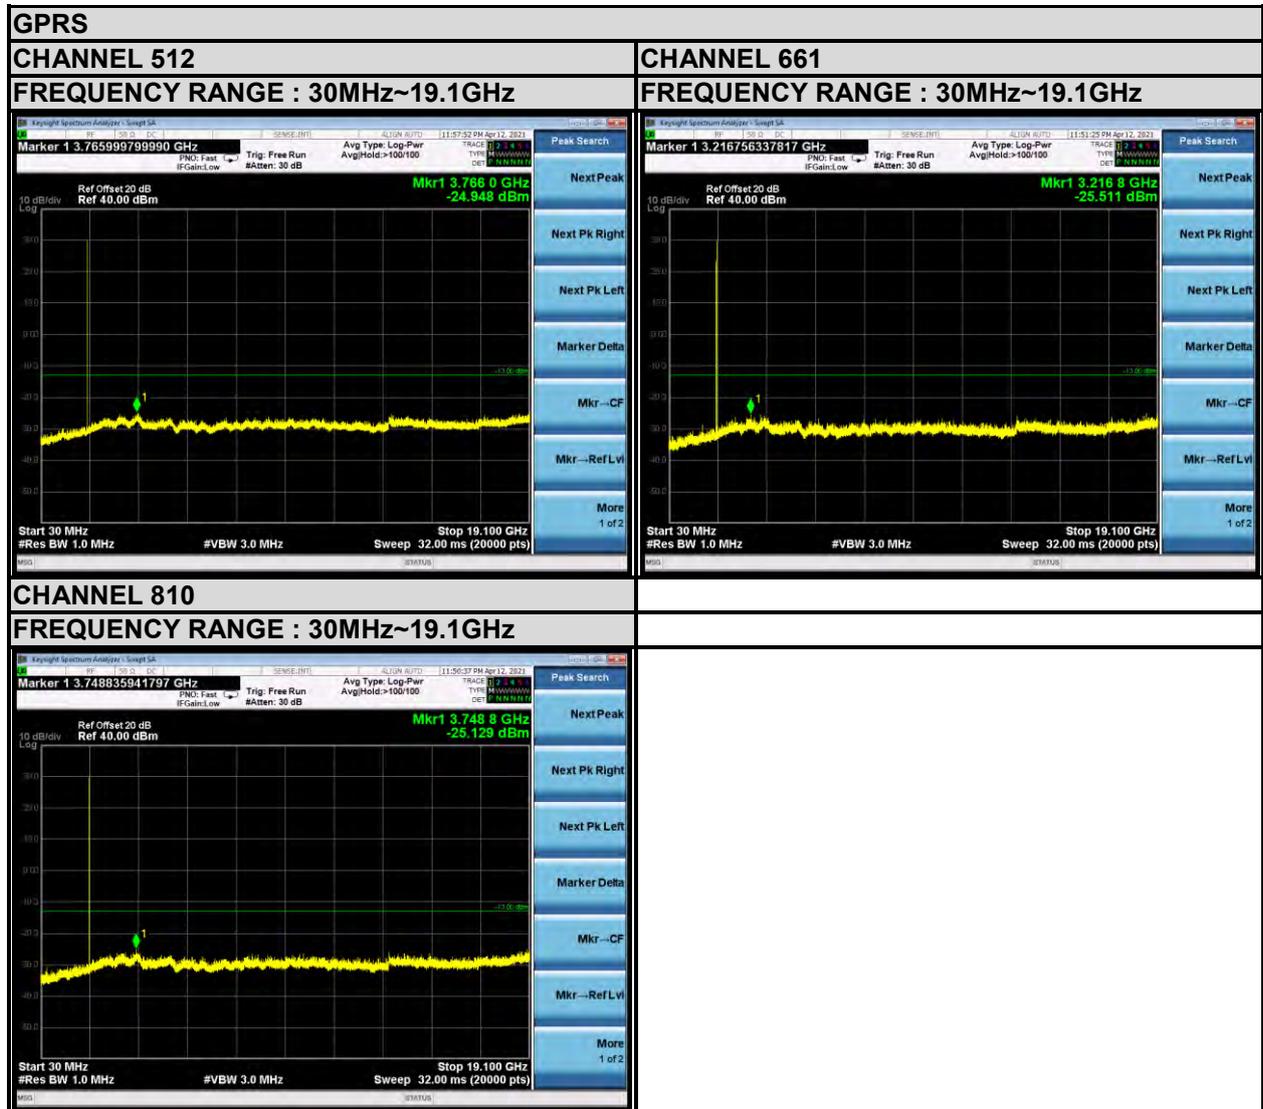



BUREAU VERITAS

Test Report No.: RFA210222W001-2

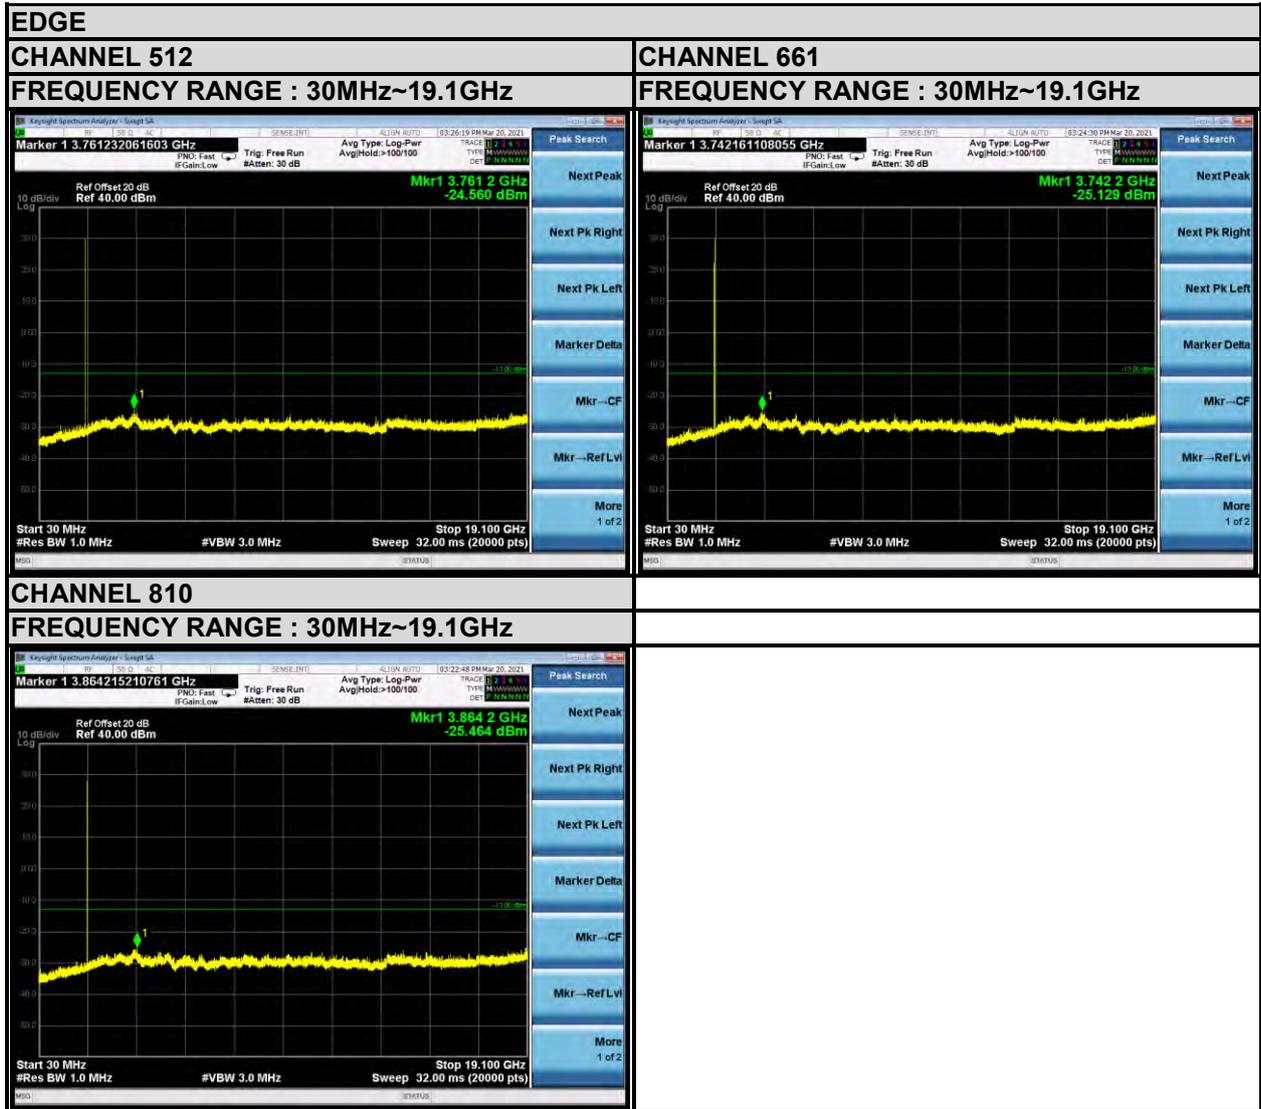



BUREAU VERITAS

Test Report No.: RFA210222W001-2





BUREAU VERITAS

Test Report No.: RFA210222W001-2

LTE BAND 2

1.4MHz / QPSK

CHANNEL 18607

FREQUENCY RANGE : 30MHz~44.5GHz




CHANNEL 18900

FREQUENCY RANGE : 30MHz~44.5GHz



CHANNEL 19193

FREQUENCY RANGE : 30MHz~44.5GHz

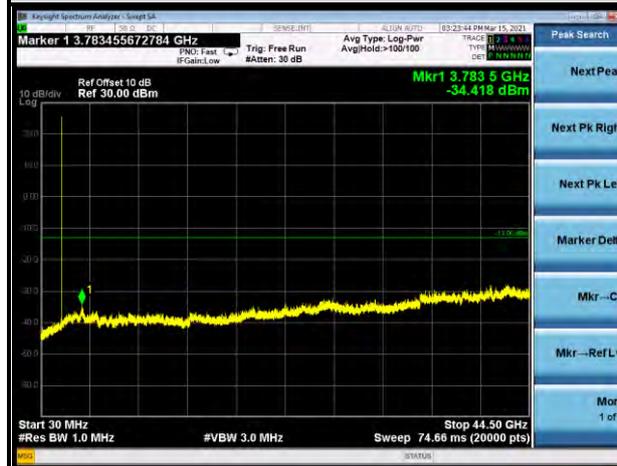



BUREAU VERITAS

Test Report No.: RFA210222W001-2

3MHz / QPSK

CHANNEL 18615

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 19185


FREQUENCY RANGE : 30MHz~19.1GHz





BUREAU VERITAS

Test Report No.: RFA210222W001-2

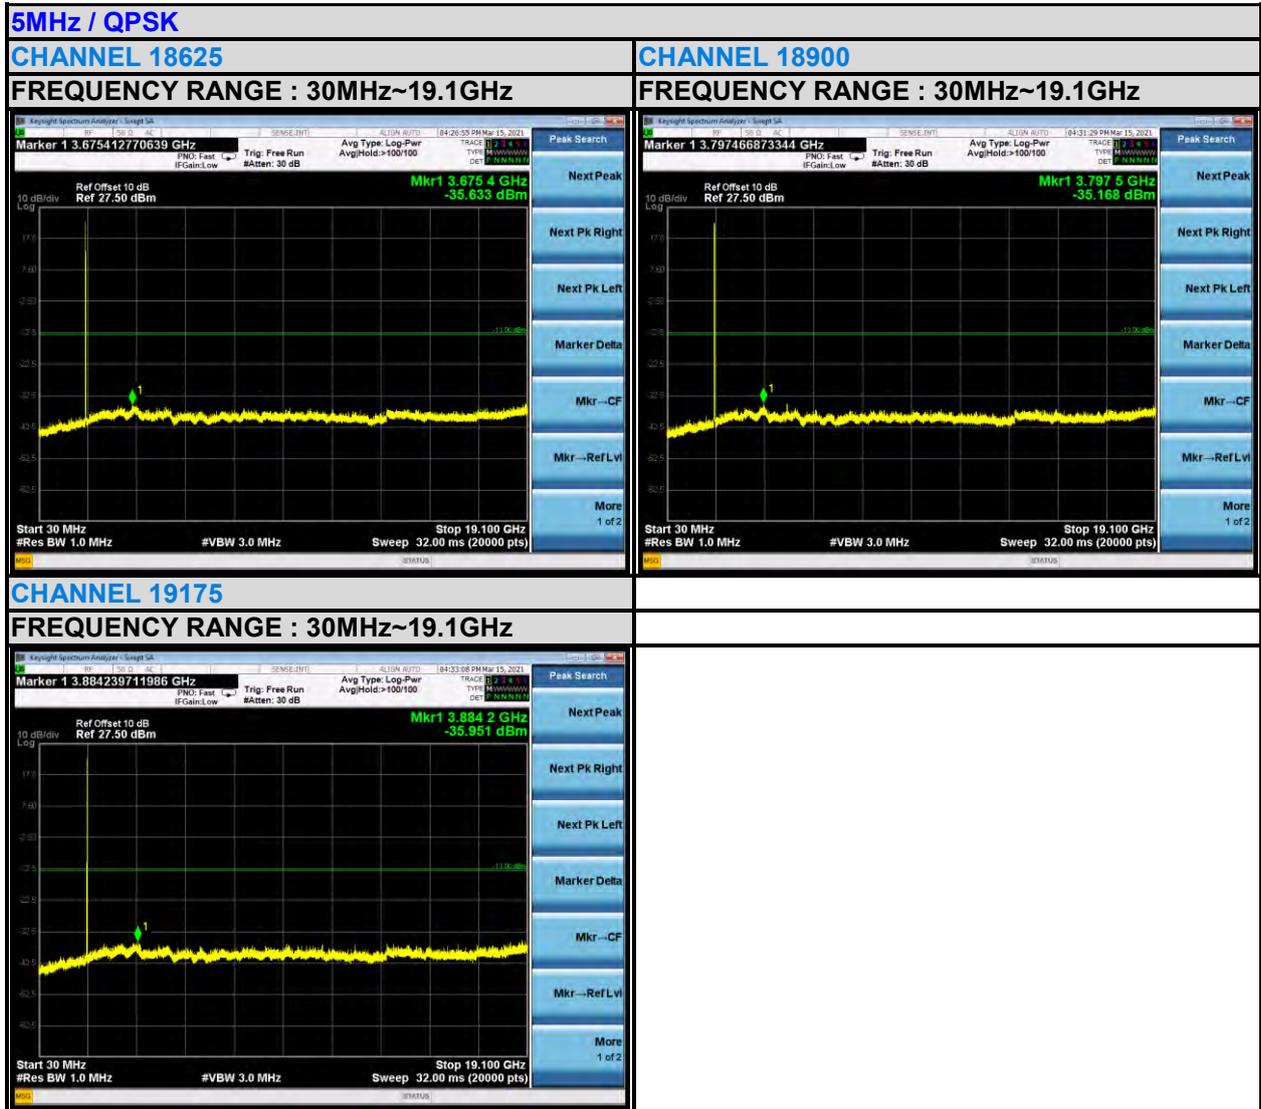




BUREAU VERITAS

Test Report No.: RFA210222W001-2

10MHz / QPSK

CHANNEL 18650

FREQUENCY RANGE : 30MHz~19.1GHz

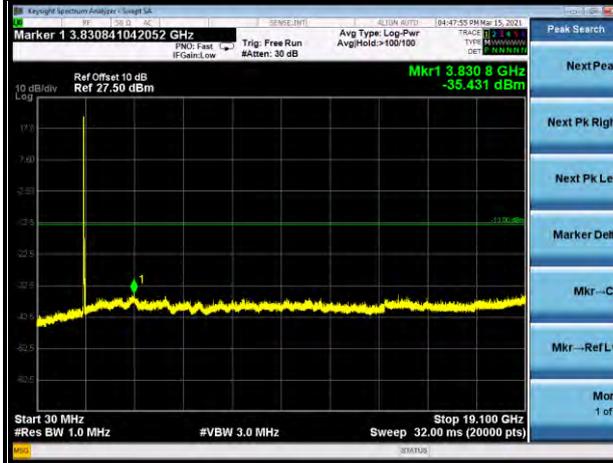


CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 19150

FREQUENCY RANGE : 30MHz~19.1GHz

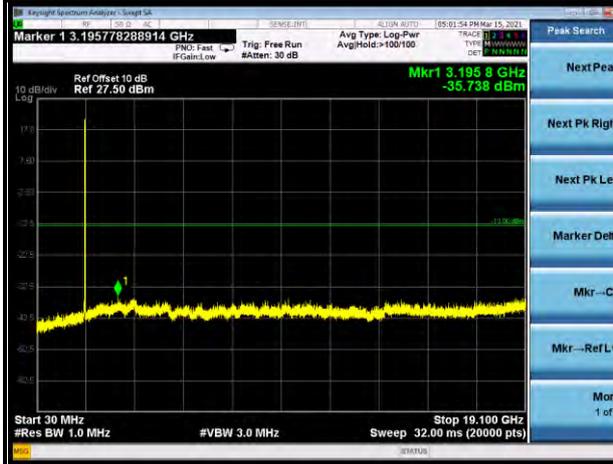



BUREAU VERITAS

Test Report No.: RFA210222W001-2

15MHz / QPSK

CHANNEL 18675

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 18900

FREQUENCY RANGE : 30MHz~19.1GHz



CHANNEL 19125


FREQUENCY RANGE : 30MHz~19.1GHz





BUREAU VERITAS

Test Report No.: RFA210222W001-2

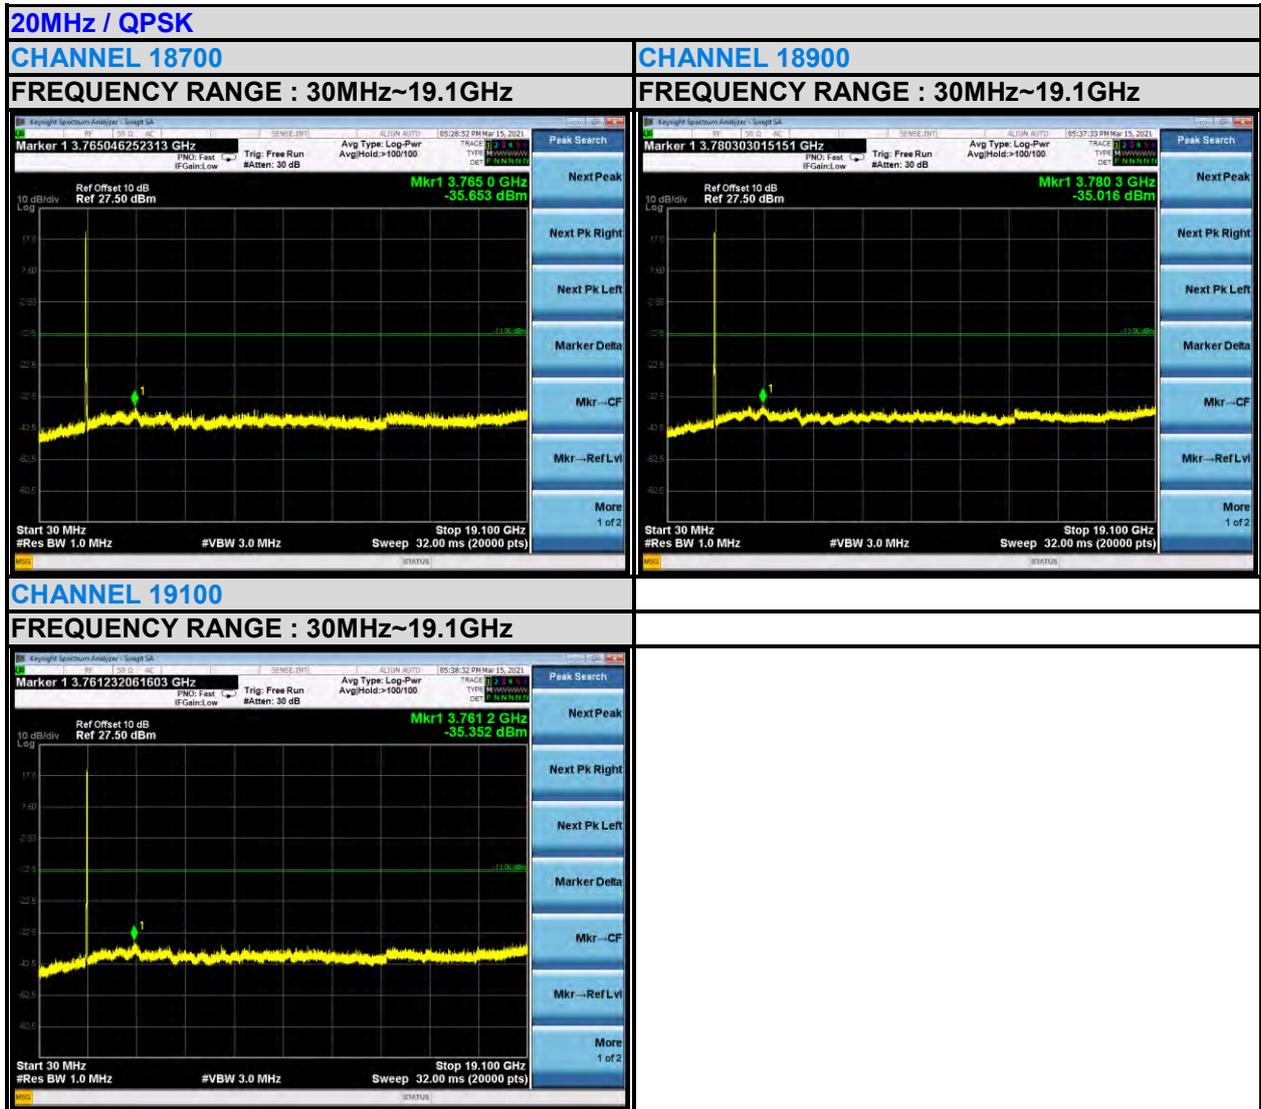



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

LTE BAND 25

1.4MHz / QPSK

CHANNEL 26047

FREQUENCY RANGE : 30MHz~19.15GHz

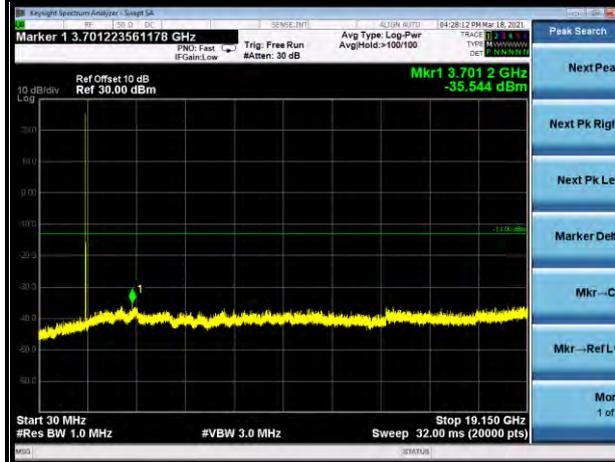


CHANNEL 26365

FREQUENCY RANGE : 30MHz~19.15GHz



CHANNEL 26683


FREQUENCY RANGE : 30MHz~19.15GHz

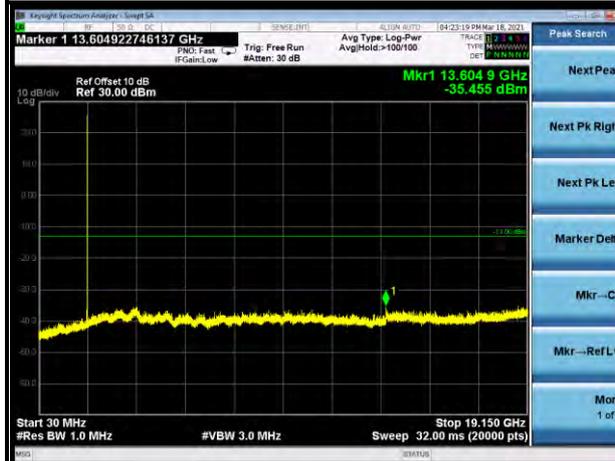



BUREAU VERITAS


Test Report No.: RFA210222W001-2

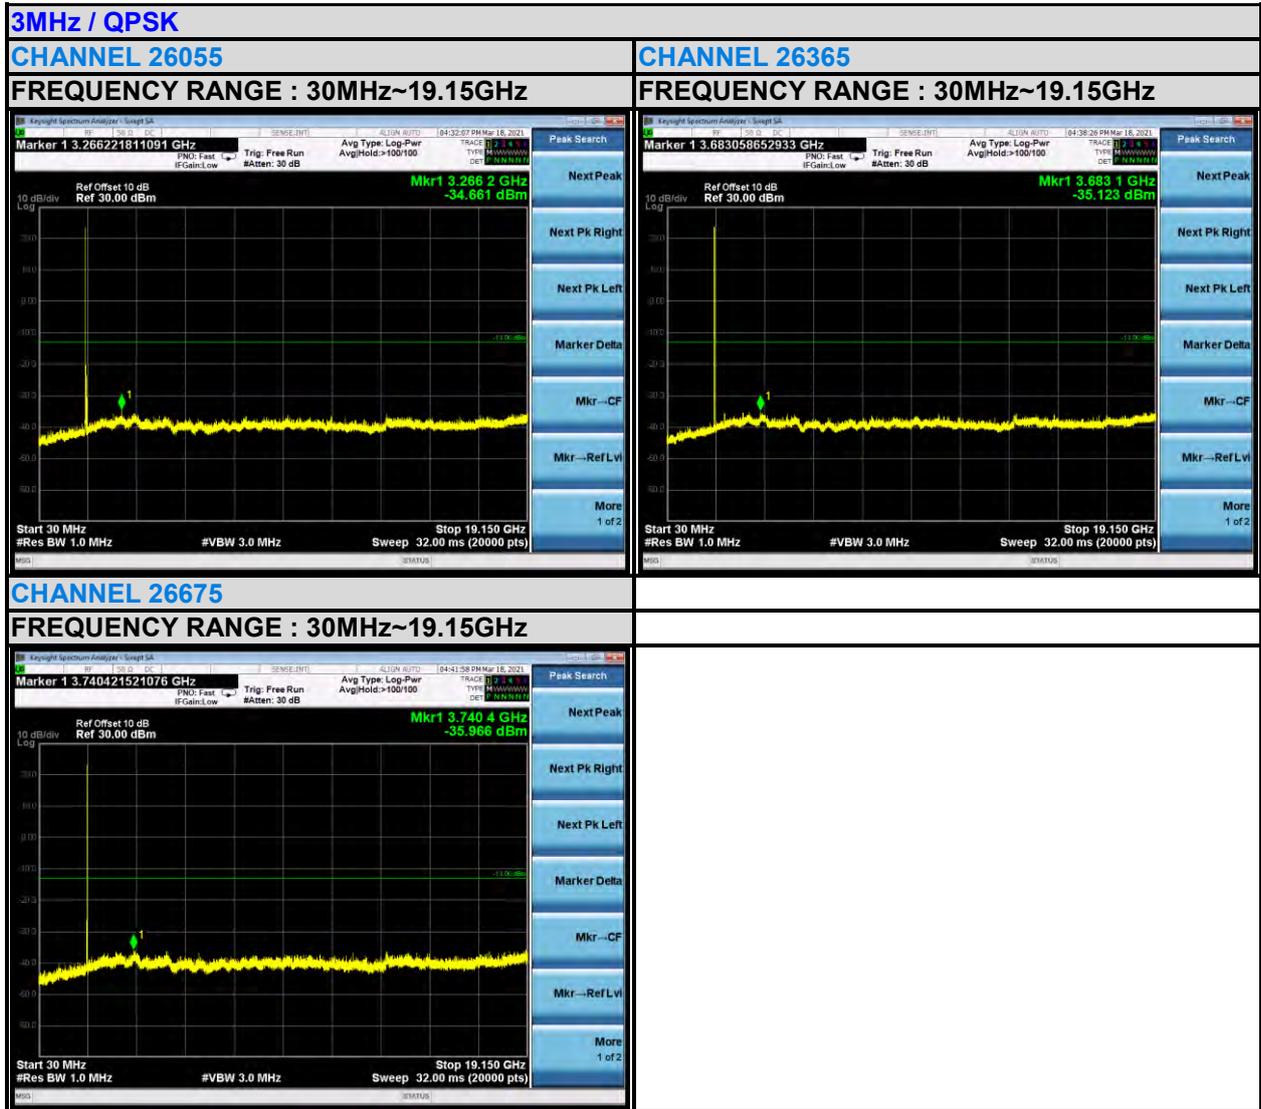



BUREAU VERITAS

Test Report No.: RFA210222W001-2

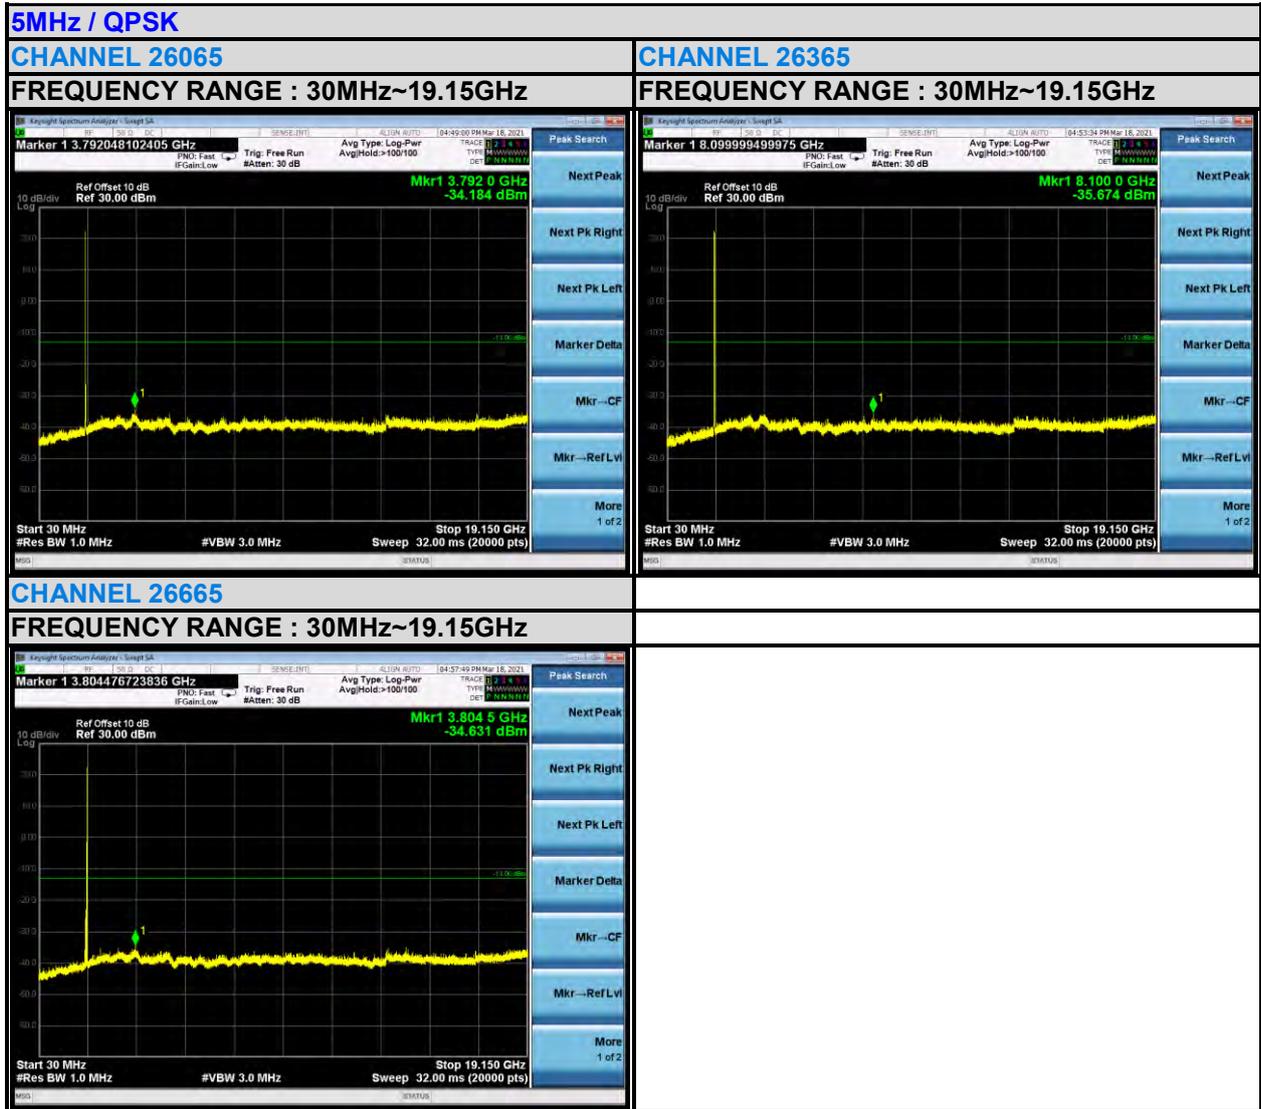



BUREAU VERITAS

Test Report No.: RFA210222W001-2

10MHz / QPSK

CHANNEL 26090

FREQUENCY RANGE : 30MHz~19.15GHz



CHANNEL 26365

FREQUENCY RANGE : 30MHz~19.15GHz



CHANNEL 26640

FREQUENCY RANGE : 30MHz~19.15GHz






BUREAU VERITAS

Test Report No.: RFA210222W001-2

15MHz / QPSK

CHANNEL 26115

FREQUENCY RANGE : 30MHz~19.15GHz

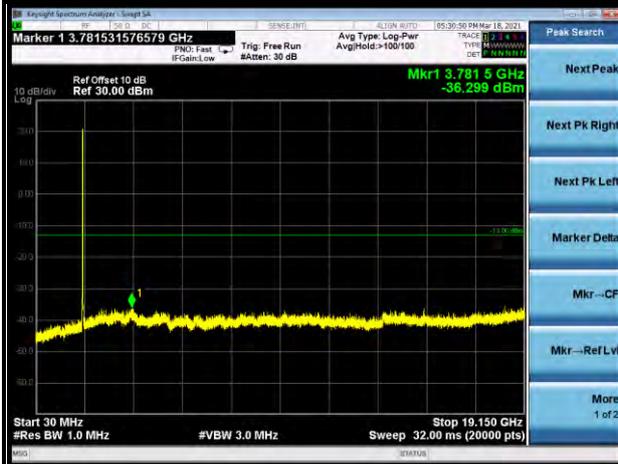

CHANNEL 26365

FREQUENCY RANGE : 30MHz~19.15GHz



CHANNEL 26615


FREQUENCY RANGE : 30MHz~19.15GHz





BUREAU VERITAS

Test Report No.: RFA210222W001-2

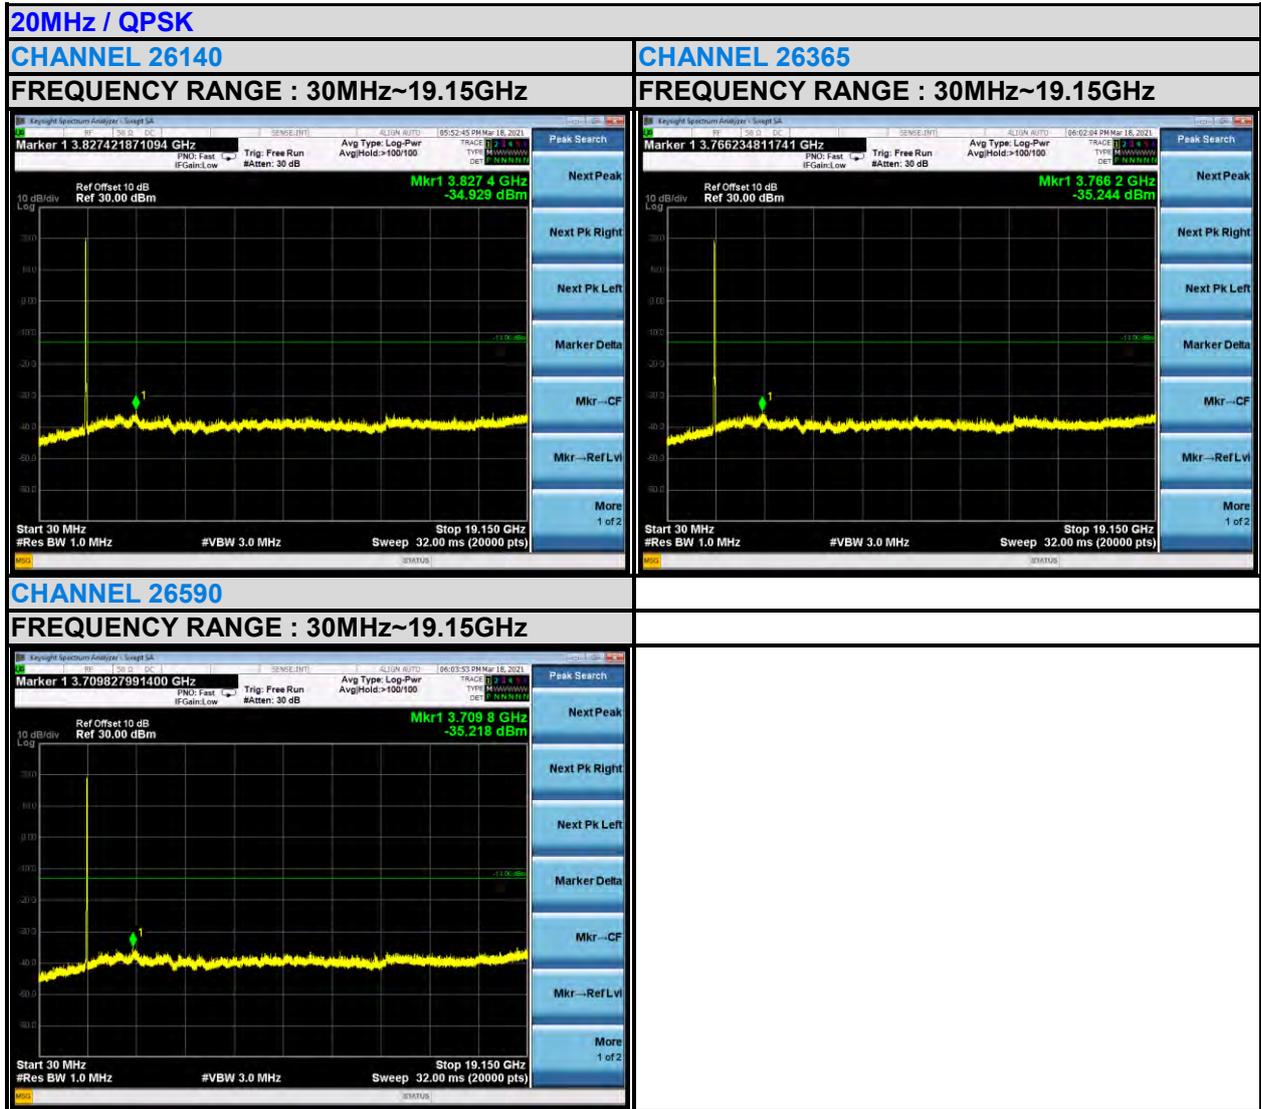



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP

< Frequency Range 30MHz~1GHz >

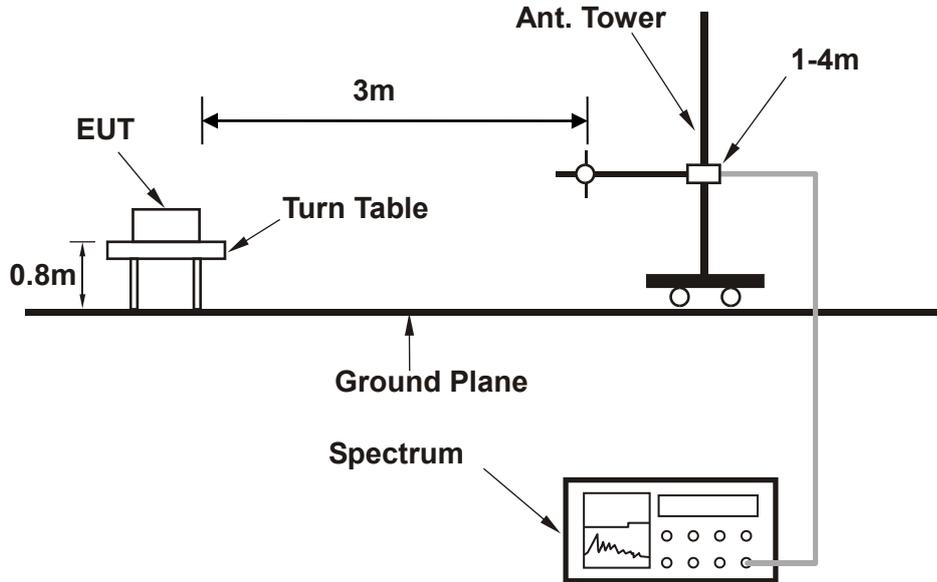

<Frequency Range above 1GHz>

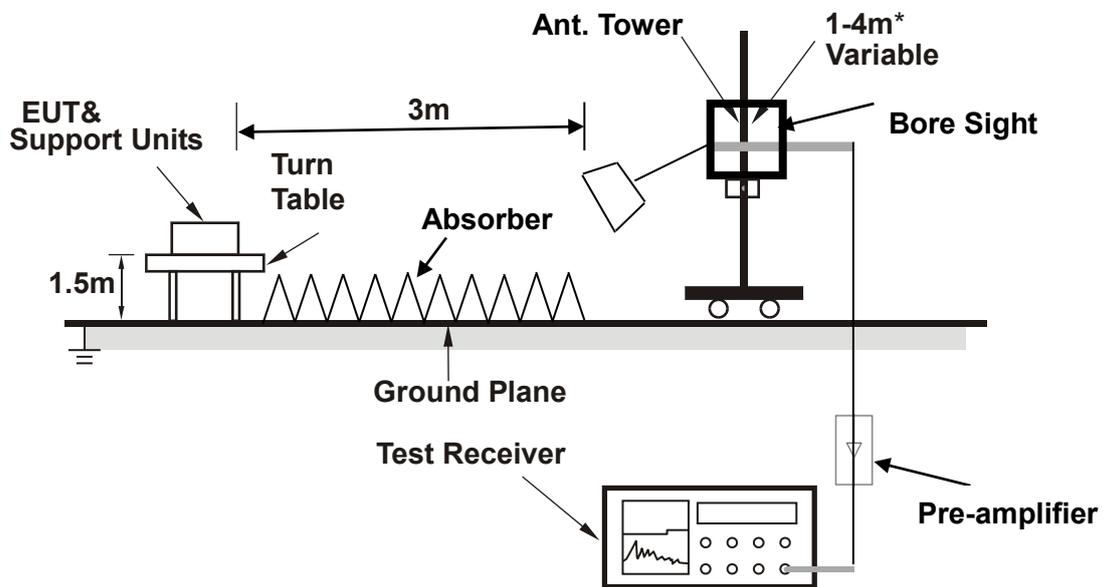

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

3.6.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-42.94	-63.36	-13.00	-29.94	20.42	Peak	Horizontal
2	186.170	-41.33	-51.26	-13.00	-28.33	9.93	Peak	Horizontal
3 PP	274.440	-37.62	-51.17	-13.00	-24.62	13.55	Peak	Horizontal
4	390.840	-43.74	-60.25	-13.00	-30.74	16.51	Peak	Horizontal
5	676.990	-40.64	-62.77	-13.00	-27.64	22.13	Peak	Horizontal
6	828.310	-41.57	-65.15	-13.00	-28.57	23.58	Peak	Horizontal

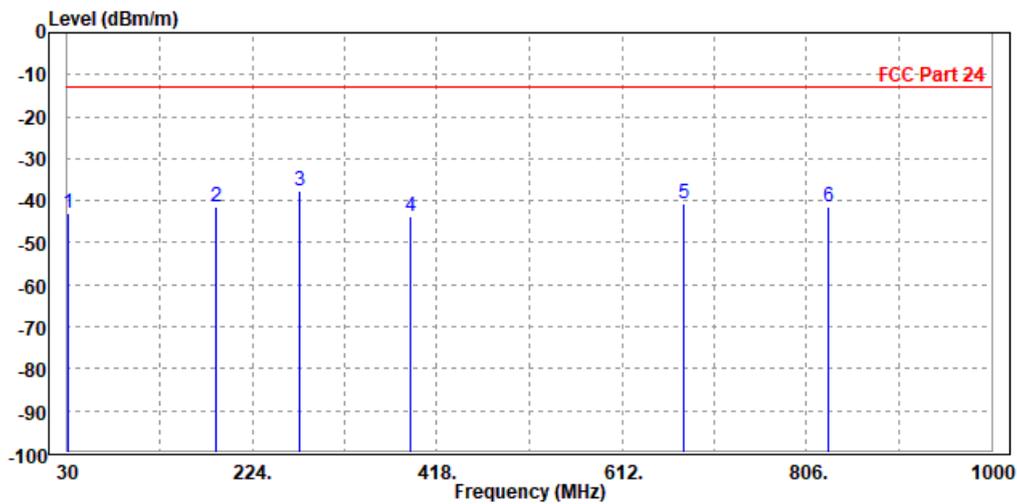




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.970	-40.14	-60.56	-13.00	-27.14	20.42	Peak	Vertical
2	56.190	-41.67	-49.37	-13.00	-28.67	7.70	Peak	Vertical
3	185.200	-37.07	-47.00	-13.00	-24.07	9.93	Peak	Vertical
4 PP	282.200	-31.91	-45.47	-13.00	-18.91	13.56	Peak	Vertical
5	452.920	-38.09	-56.16	-13.00	-25.09	18.07	Peak	Vertical
6	665.350	-38.27	-60.07	-13.00	-25.27	21.80	Peak	Vertical

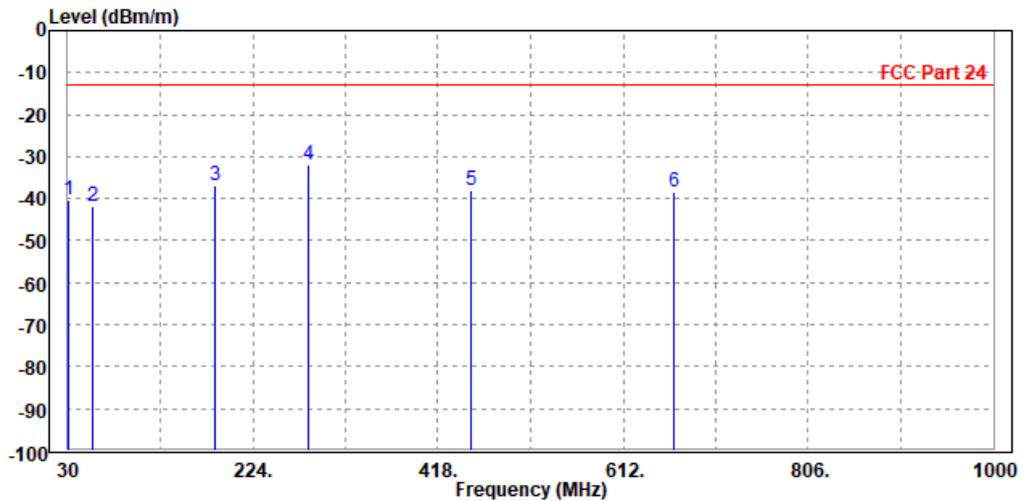



**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

GPRS 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-48.82	-57.61	-13.00	-35.82	8.79	Peak	Horizontal
2	5550.000	-49.11	-59.30	-13.00	-36.11	10.19	Peak	Horizontal

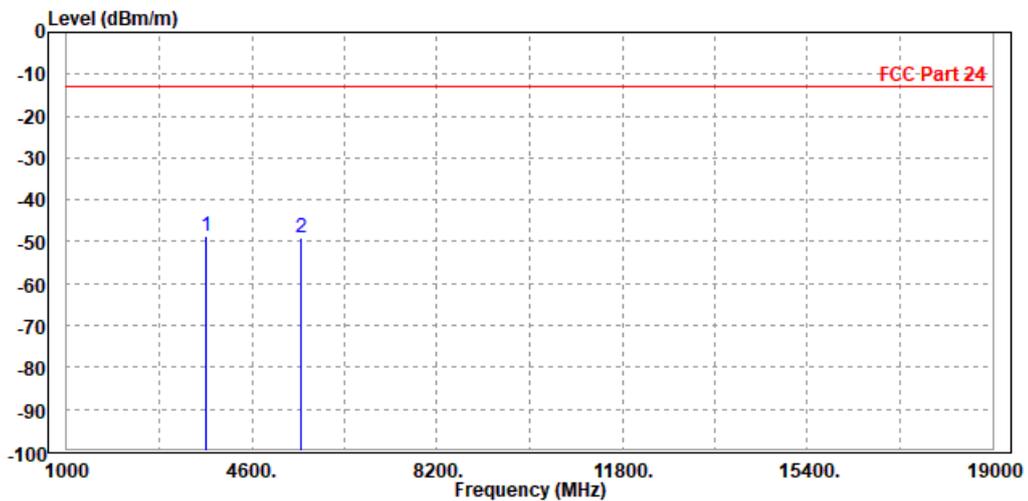




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-50.60	-59.85	-13.00	-37.60	9.25	Peak	Vertical
2	5550.000	-50.61	-60.51	-13.00	-37.61	9.90	Peak	Vertical

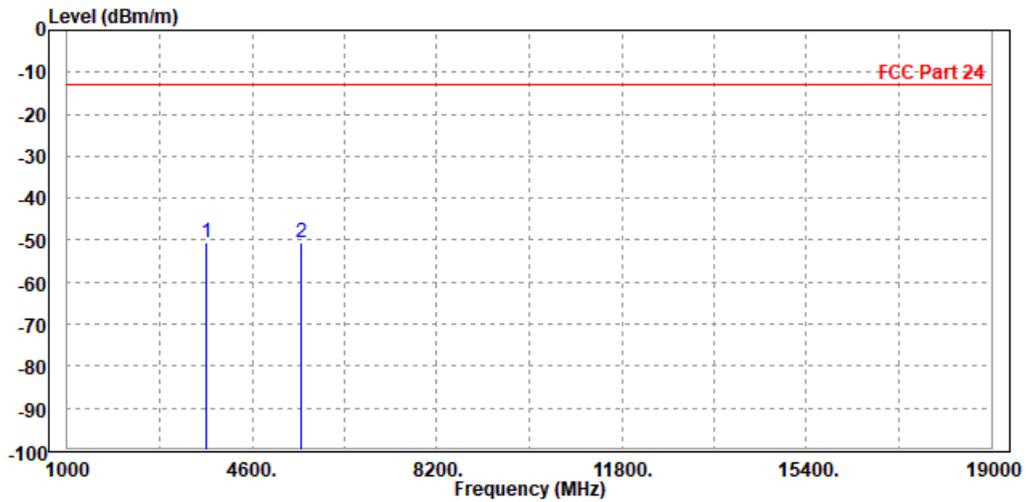




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-49.47	-58.32	-13.00	-36.47	8.85	Peak	Horizontal
2 PP	5640.000	-48.99	-59.47	-13.00	-35.99	10.48	Peak	Horizontal

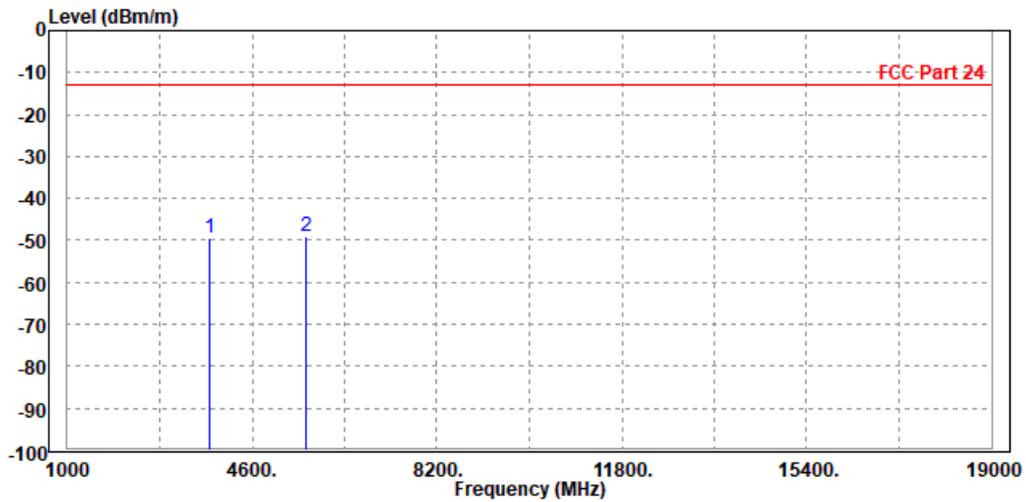




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3754.000	-47.05	-56.32	-13.00	-34.05	9.27	Peak	Vertical
2	5640.000	-47.81	-58.06	-13.00	-34.81	10.25	Peak	Vertical

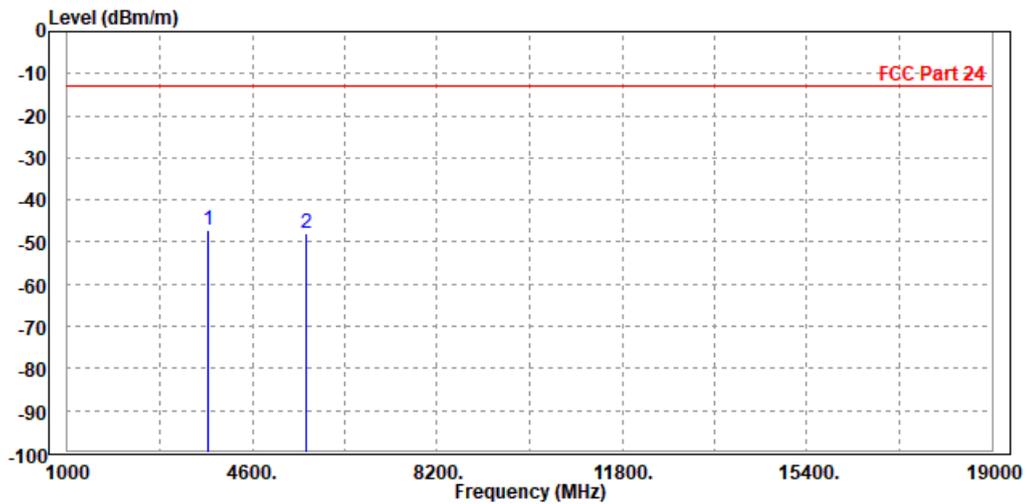




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3826.000	-48.23	-57.15	-13.00	-35.23	8.92	Peak	Horizontal
2	PP 5730.000	-46.82	-57.60	-13.00	-33.82	10.78	Peak	Horizontal

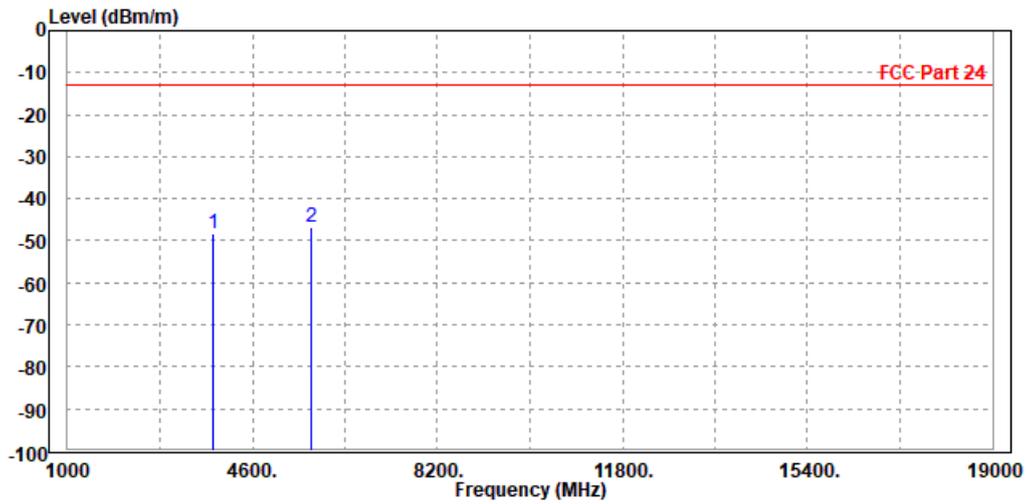




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3820.000	-48.76	-58.05	-13.00	-35.76	9.29	Peak	Vertical
2 PP	5734.000	-47.46	-58.07	-13.00	-34.46	10.61	Peak	Vertical

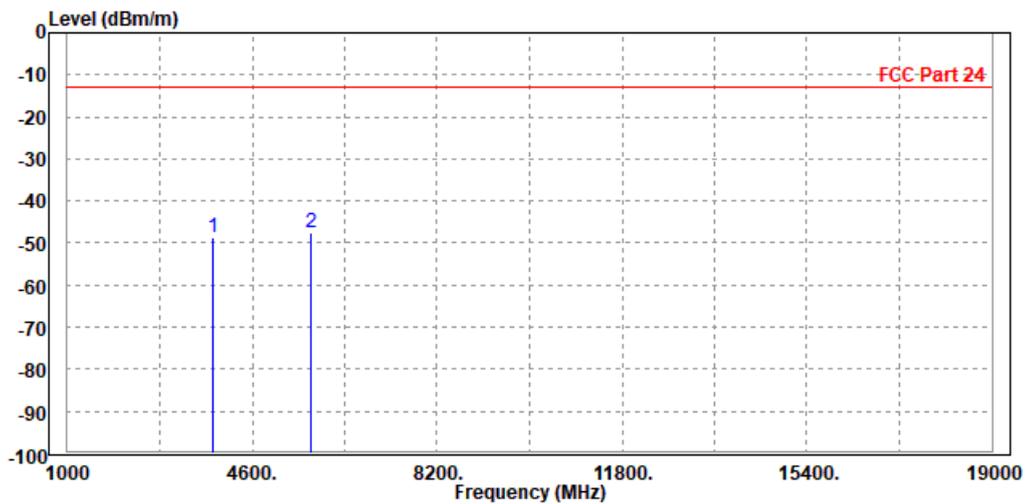



BUREAU VERITAS


Test Report No.: RFA210222W001-2

EDGE 1900:

CH 512

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-49.65	-58.44	-13.00	-36.65	8.79	Peak	Horizontal
2	5554.000	-49.66	-59.86	-13.00	-36.66	10.20	Peak	Horizontal

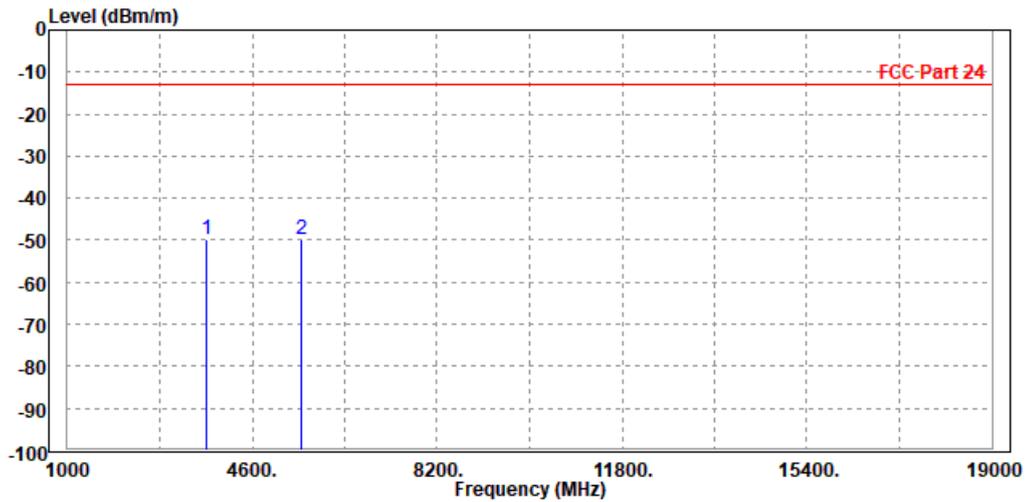




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 512	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-50.91	-60.16	-13.00	-37.91	9.25	Peak	Vertical
2	5550.000	-52.93	-62.83	-13.00	-39.93	9.90	Peak	Vertical

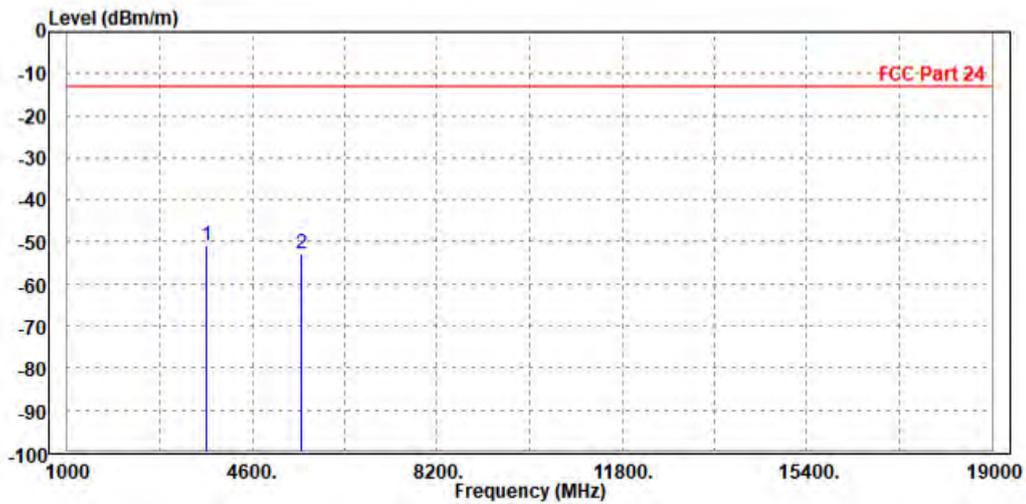




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CH 661

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-49.67	-58.51	-13.00	-36.67	8.84	Peak	Horizontal
2	PP 5640.000	-48.43	-58.91	-13.00	-35.43	10.48	Peak	Horizontal

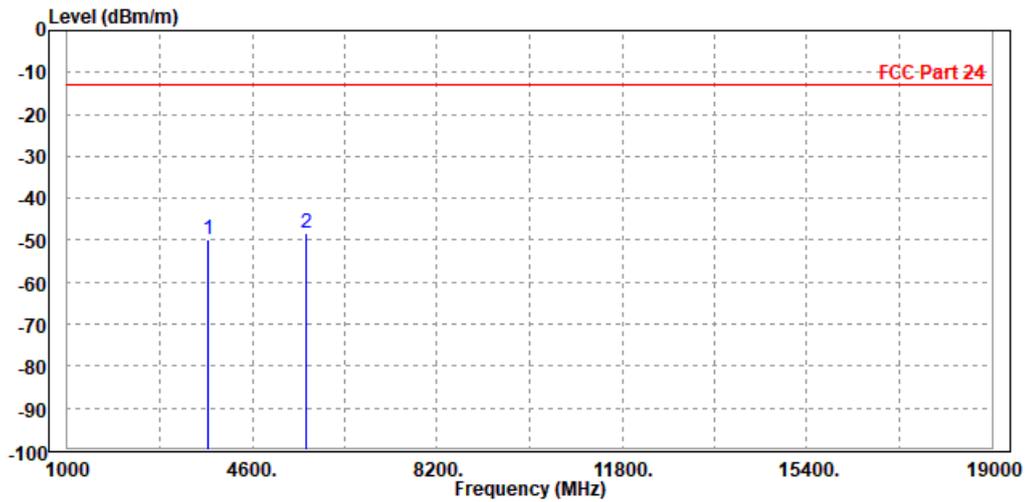




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 661	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3755.000	-49.48	-58.75	-13.00	-36.48	9.27	Peak	Vertical
2 PP	5640.000	-49.08	-59.33	-13.00	-36.08	10.25	Peak	Vertical

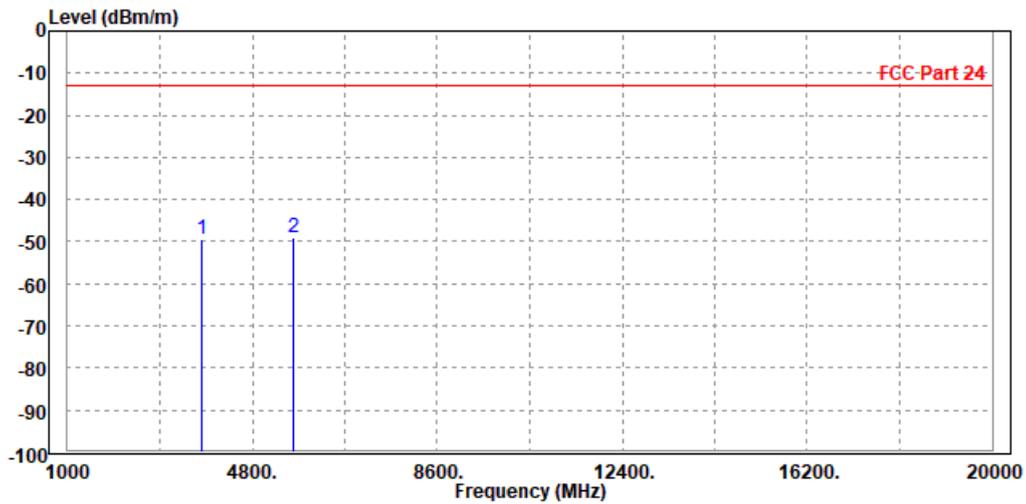




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CH 810

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3826.000	-48.62	-57.54	-13.00	-35.62	8.92	Peak	Horizontal
2 PP	5730.000	-47.91	-58.69	-13.00	-34.91	10.78	Peak	Horizontal

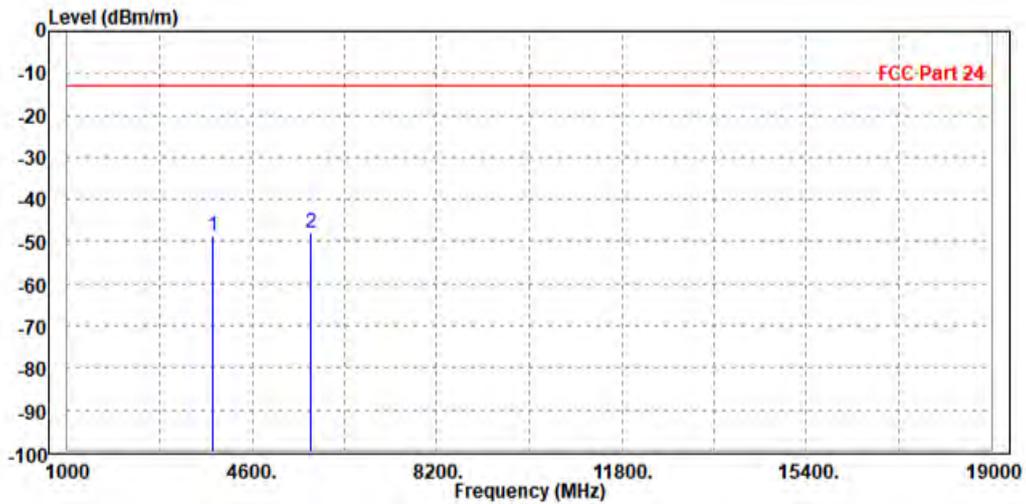




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 810	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3820.000	-48.10	-57.39	-13.00	-35.10	9.29	Peak	Vertical
2 PP	5734.000	-47.24	-57.85	-13.00	-34.24	10.61	Peak	Vertical

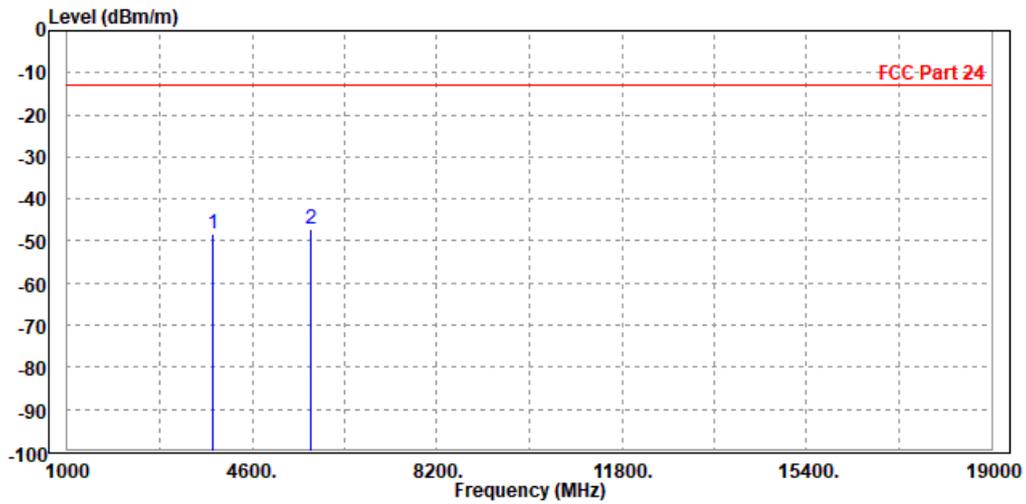



BUREAU VERITAS


Test Report No.: RFA210222W001-2

WCDMA Band II

CH 9262

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3704.000	-49.35	-58.14	-13.00	-36.35	8.79	Peak	Horizontal
2	5555.000	-50.10	-60.30	-13.00	-37.10	10.20	Peak	Horizontal

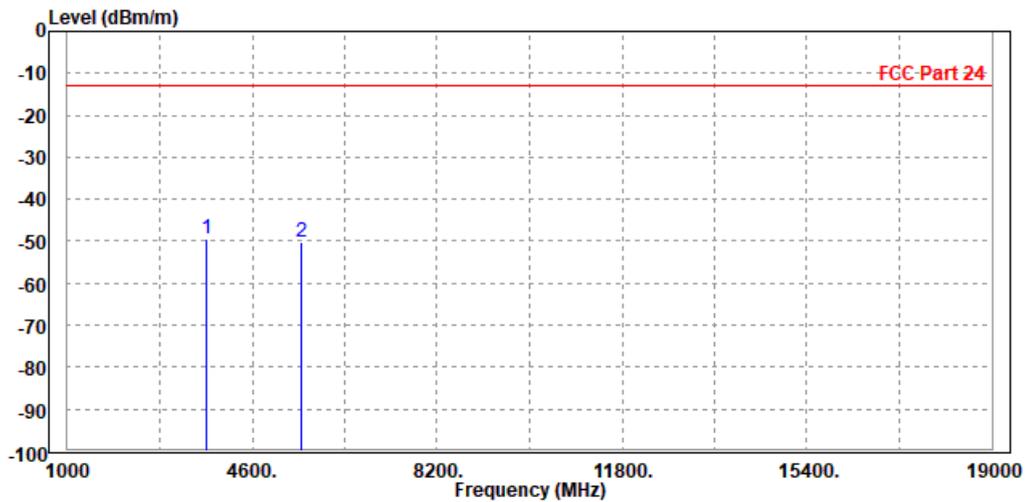




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 9262	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3698.000	-39.21	-48.46	-13.00	-26.21	9.25	Peak	Vertical
2	5557.200	-46.56	-56.49	-13.00	-33.56	9.93	Peak	Vertical

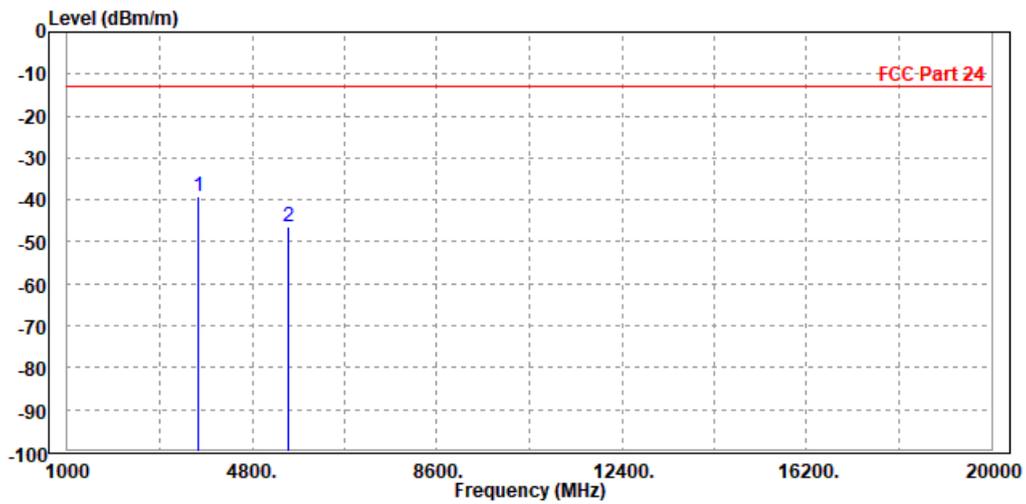




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CH 9400

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-51.76	-60.61	-13.00	-38.76	8.85	Peak	Horizontal
2 PP	5644.000	-50.82	-61.32	-13.00	-37.82	10.50	Peak	Horizontal

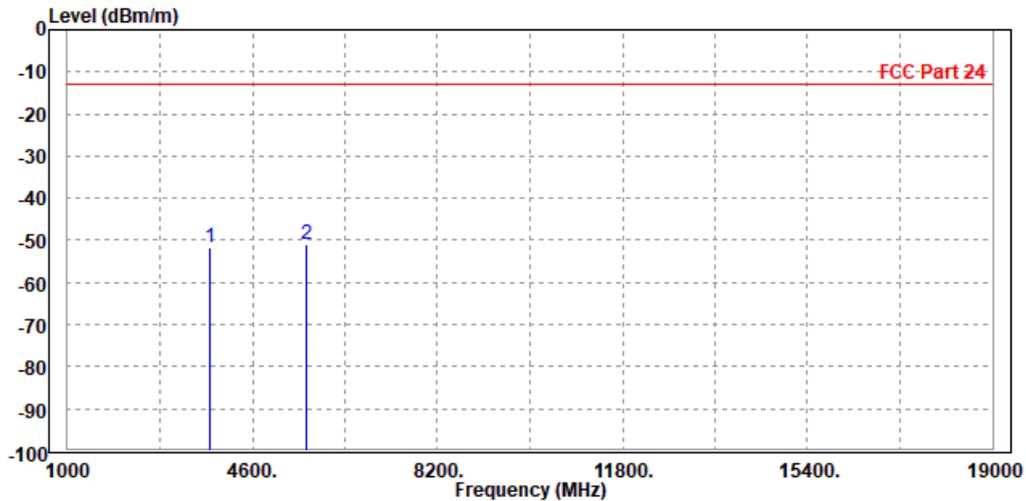




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 9400	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-50.23	-59.50	-13.00	-37.23	9.27	Peak	Vertical
2	PP 5644.000	-50.06	-60.32	-13.00	-37.06	10.26	Peak	Vertical

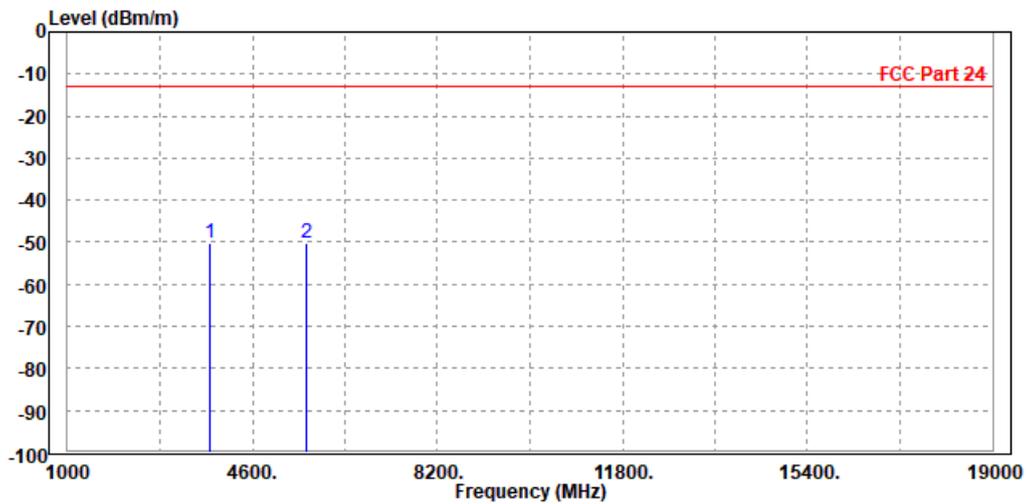




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CH 9538

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3814.000	-51.02	-59.93	-13.00	-38.02	8.91	Peak	Horizontal
2	PP 5716.000	-48.28	-59.01	-13.00	-35.28	10.73	Peak	Horizontal

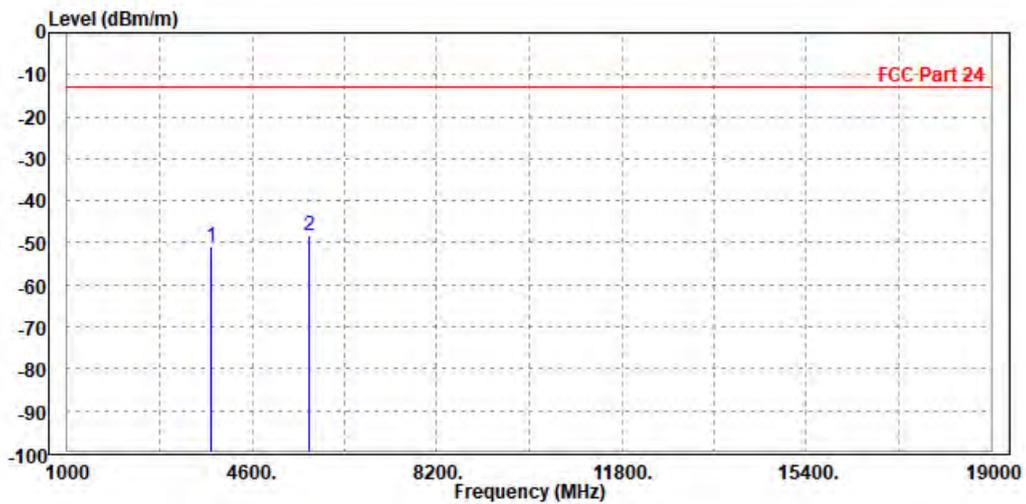




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 9538	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3808.000	-49.73	-59.01	-13.00	-36.73	9.28	Peak	Vertical
2 PP	5721.000	-49.16	-59.72	-13.00	-36.16	10.56	Peak	Vertical

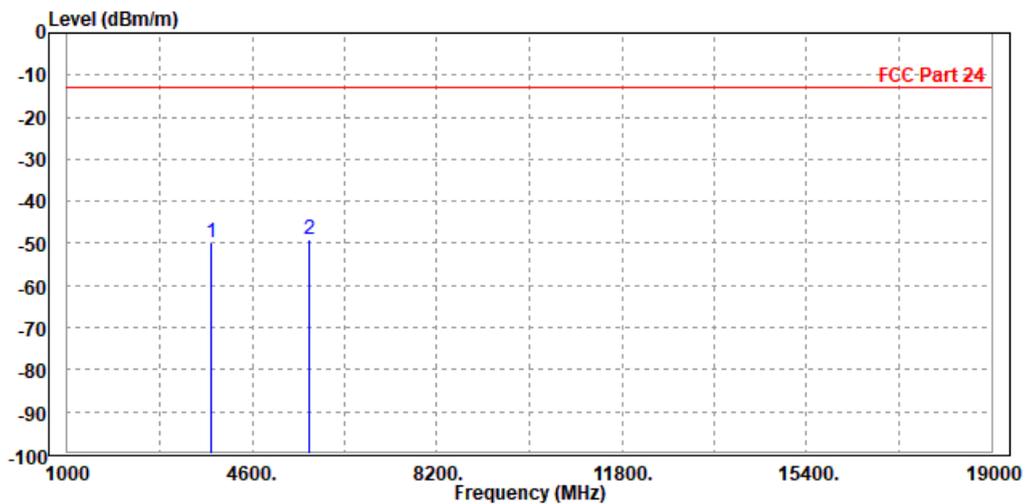



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

LTE Band 2

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-51.16	-60.00	-13.00	-38.16	8.84	Peak	Horizontal
2 PP	5640.000	-45.03	-55.51	-13.00	-32.03	10.48	Peak	Horizontal

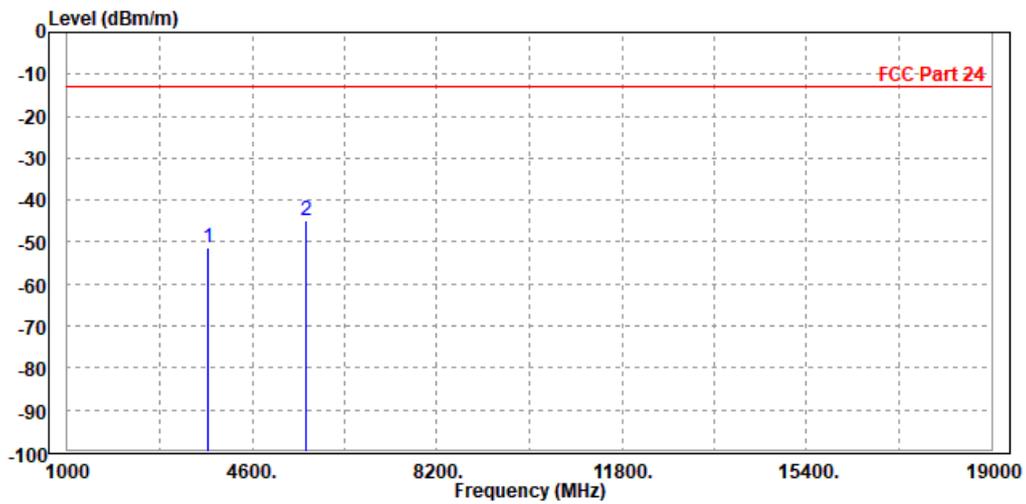




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-50.45	-59.72	-13.00	-37.45	9.27	Peak	Vertical
2 PP	5644.000	-46.26	-56.52	-13.00	-33.26	10.26	Peak	Vertical

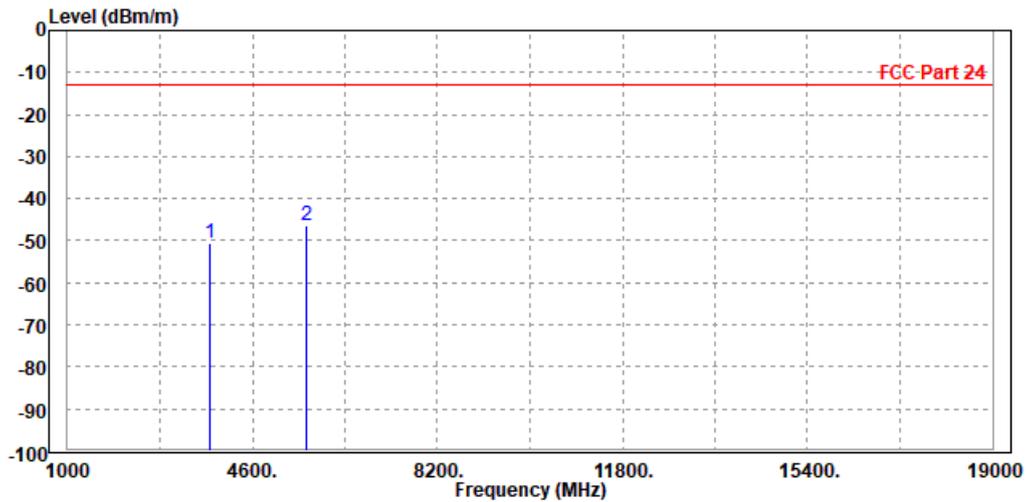




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-50.70	-59.55	-13.00	-37.70	8.85	Peak	Horizontal
2 PP	5644.000	-46.37	-56.87	-13.00	-33.37	10.50	Peak	Horizontal

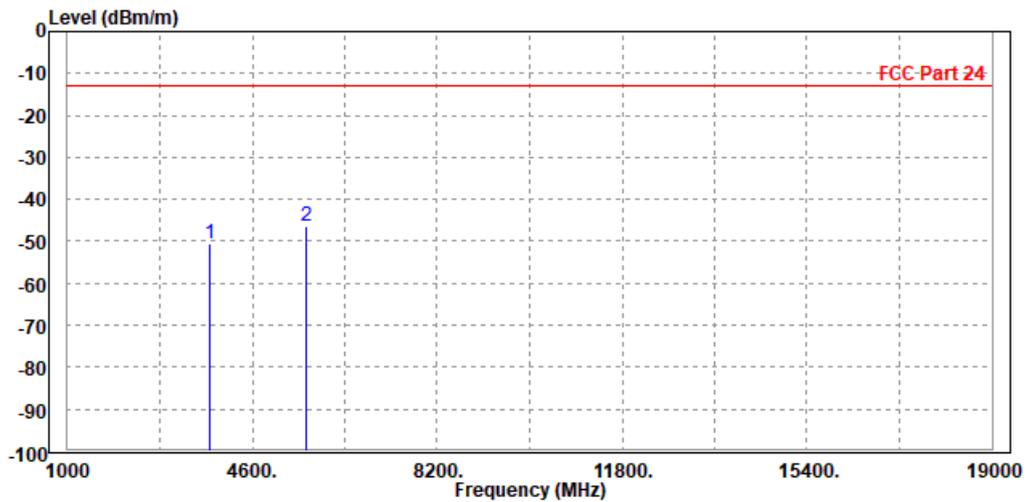




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-50.43	-59.70	-13.00	-37.43	9.27	Peak	Vertical
2 PP	5640.000	-45.85	-56.10	-13.00	-32.85	10.25	Peak	Vertical

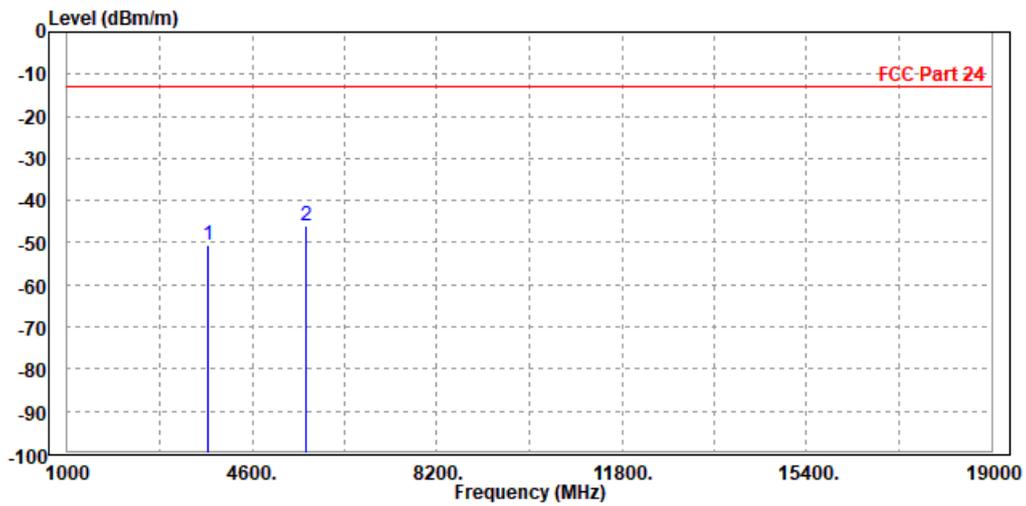




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-51.15	-59.99	-13.00	-38.15	8.84	Peak	Horizontal
2 PP	5640.000	-45.96	-56.44	-13.00	-32.96	10.48	Peak	Horizontal

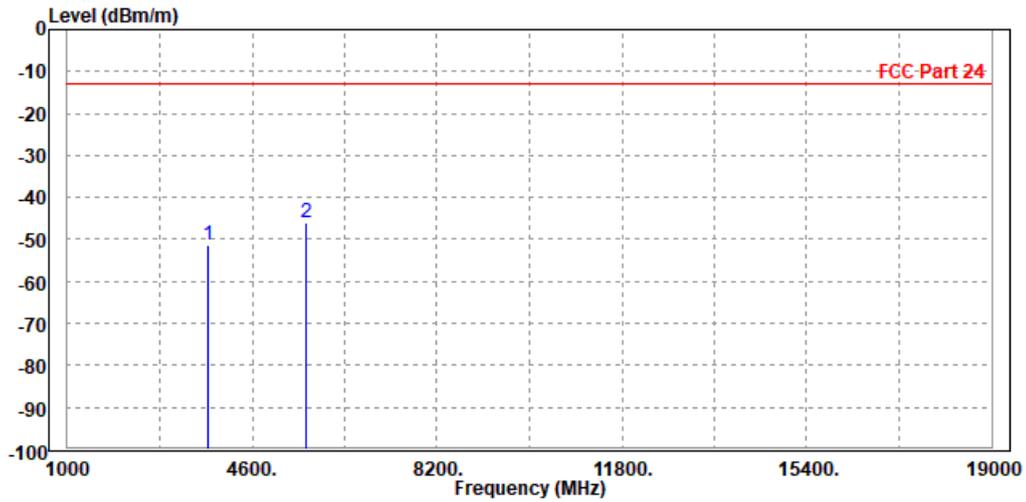




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2


MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-50.44	-59.71	-13.00	-37.44	9.27	Peak	Vertical
2 PP	5644.000	-46.60	-56.86	-13.00	-33.60	10.26	Peak	Vertical

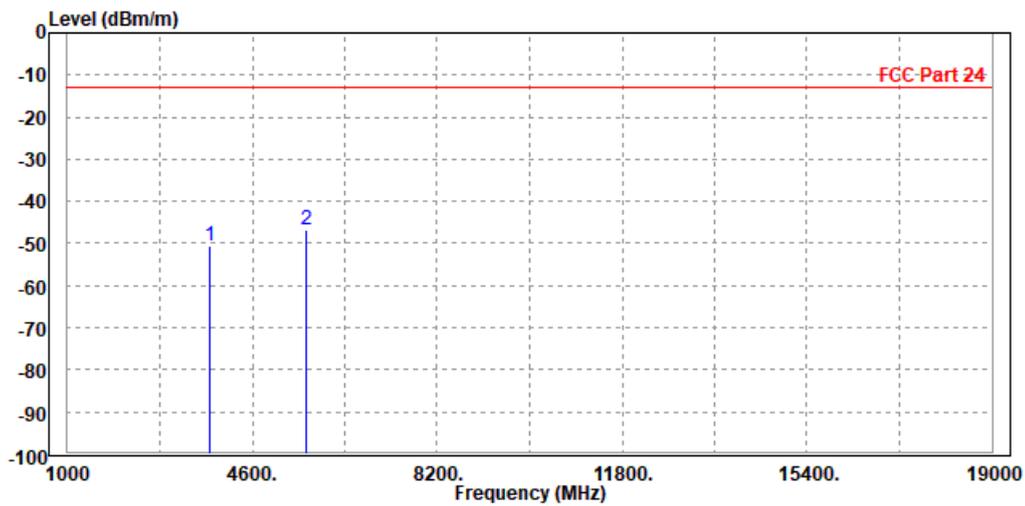

	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	3718.000	-49.50	-58.31	-13.00	-36.50	8.81	Peak	Horizontal
2		5565.000	-50.36	-60.60	-13.00	-37.36	10.24	Peak	Horizontal

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase	
	MHz	dBm/m	dBm	dBm/m	dB	dB/m			
1	PP	3718.000	-49.50	-58.31	-13.00	-36.50	8.81	Peak	Horizontal
2		5565.000	-50.36	-60.60	-13.00	-37.36	10.24	Peak	Horizontal

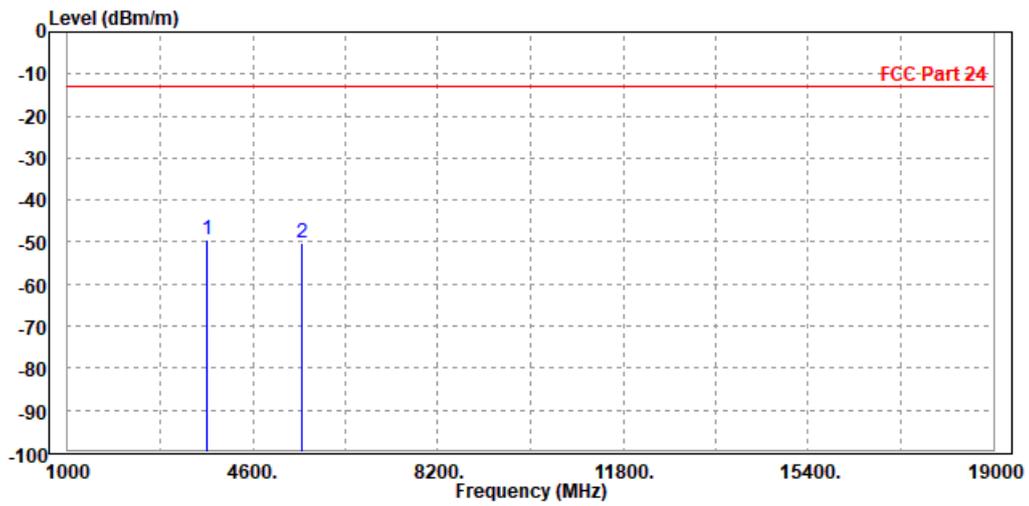




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18650	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3538.000	-49.23	-58.43	-13.00	-36.23	9.20	Peak	Vertical
2	5662.000	-50.18	-60.51	-13.00	-37.18	10.33	Peak	Vertical

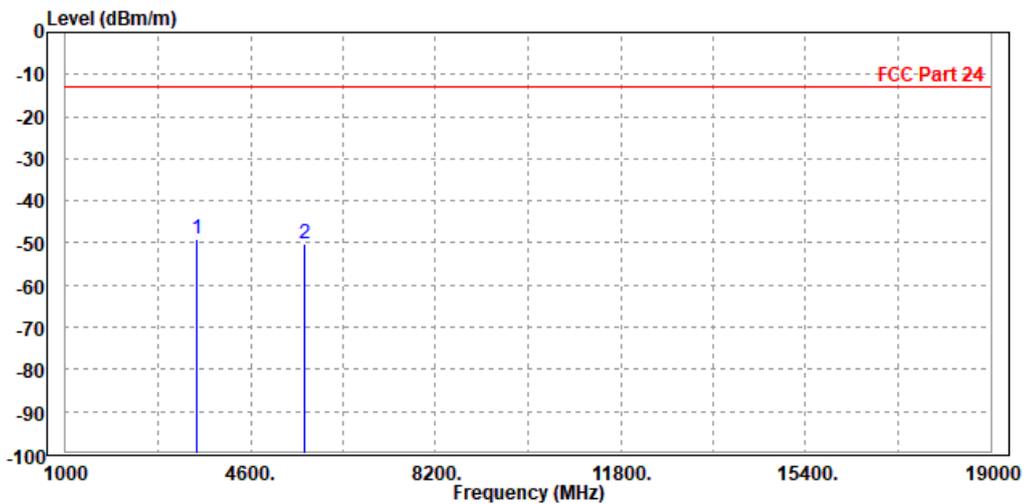




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CH 18900

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3760.000	-38.63	-47.48	-13.00	-25.63	8.85	Peak	Horizontal
2	5640.000	-42.74	-53.22	-13.00	-29.74	10.48	Peak	Horizontal

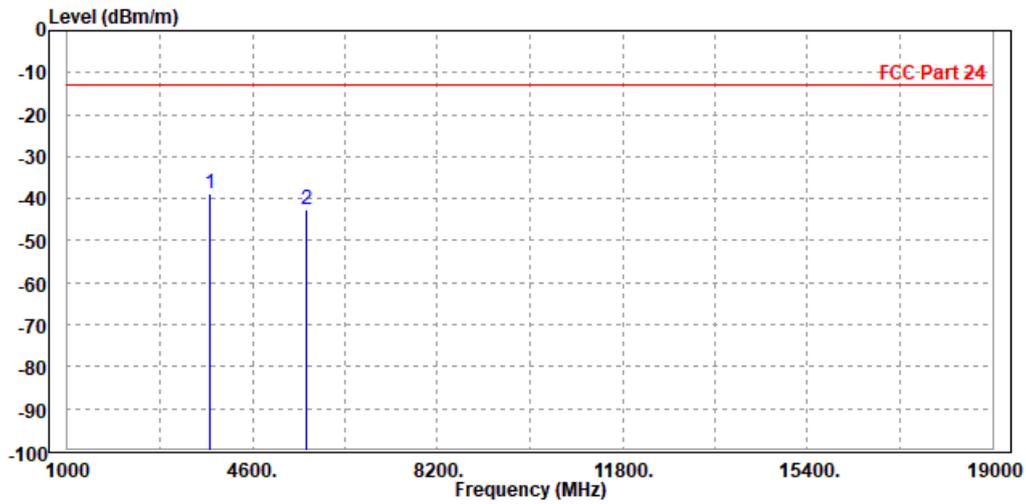




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3760.000	-51.25	-60.52	-13.00	-38.25	9.27	Peak	Vertical
2	5644.000	-53.88	-64.14	-13.00	-40.88	10.26	Peak	Vertical

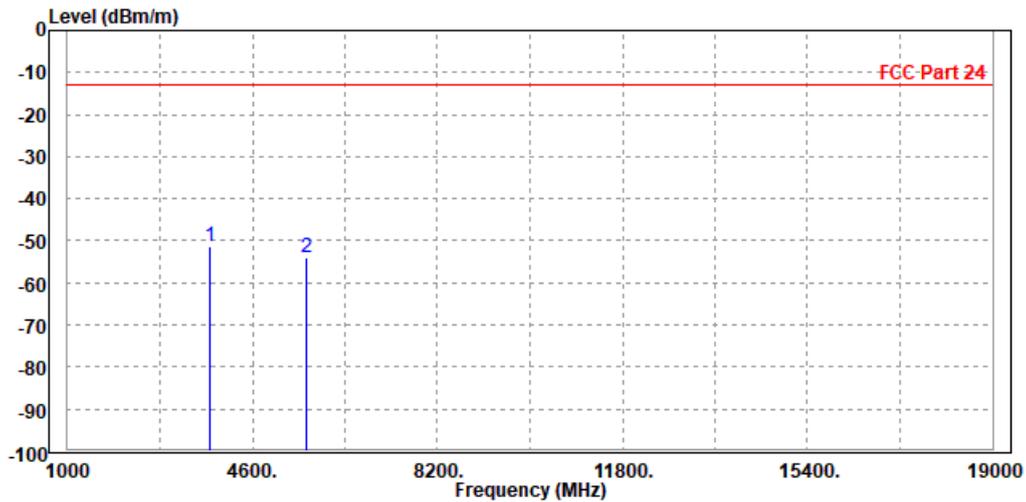




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CH 19150

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3810.000	-50.56	-59.46	-13.00	-37.56	8.90	Peak	Horizontal
2 PP	5716.000	-49.55	-60.28	-13.00	-36.55	10.73	Peak	Horizontal

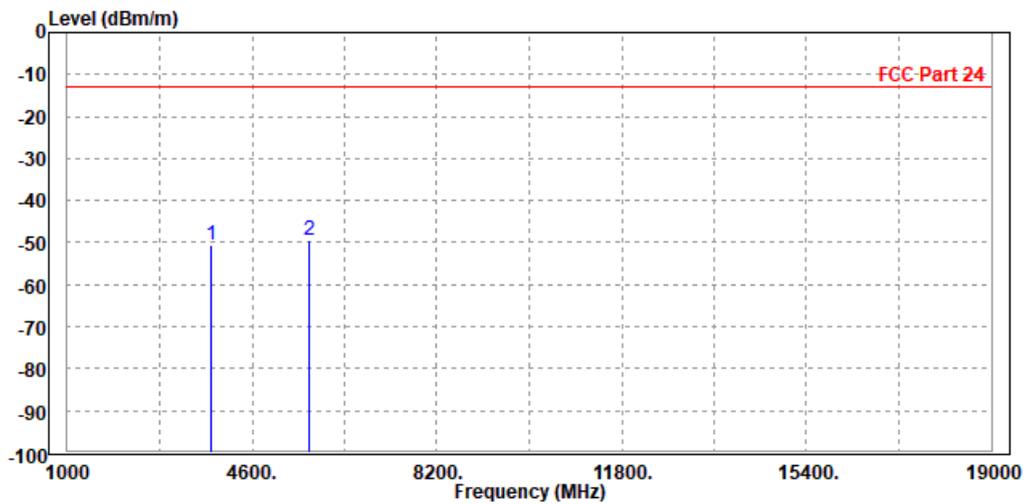




**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

MODE	TX channel 19150	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3808.000	-49.54	-58.82	-13.00	-36.54	9.28	Peak	Vertical
2 PP	5715.000	-49.41	-59.95	-13.00	-36.41	10.54	Peak	Vertical

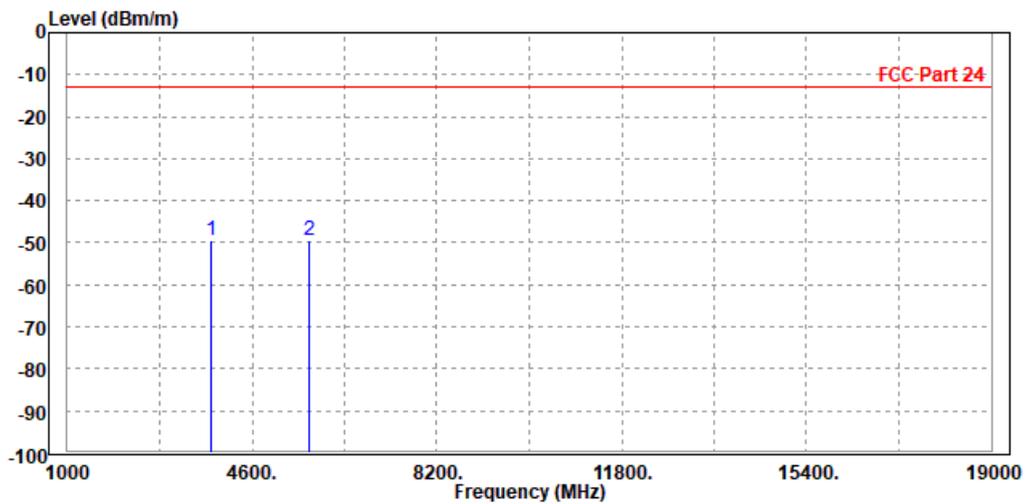

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-50.83	-59.68	-13.00	-37.83	8.85	Peak	Horizontal
2 PP	5644.000	-45.32	-55.82	-13.00	-32.32	10.50	Peak	Horizontal

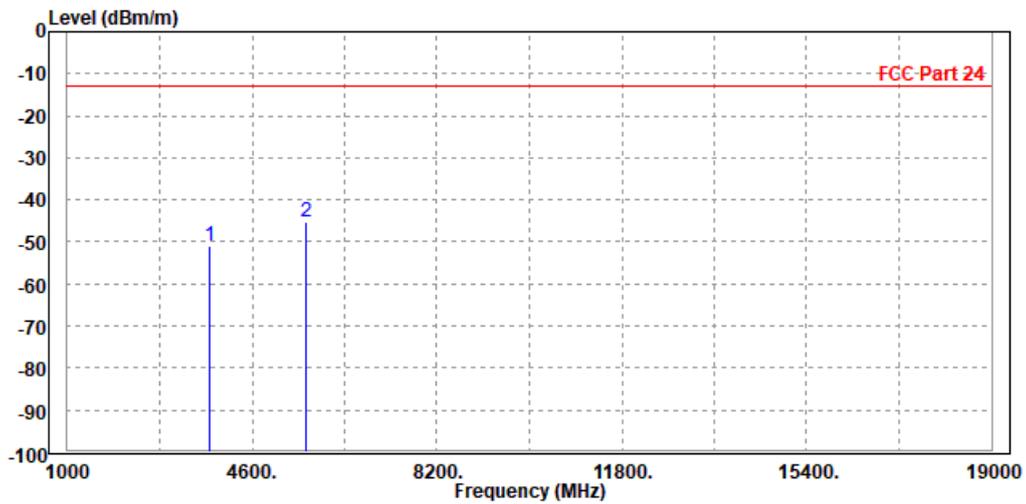




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-50.50	-59.77	-13.00	-37.50	9.27	Peak	Vertical
2 PP	5640.000	-45.57	-55.82	-13.00	-32.57	10.25	Peak	Vertical

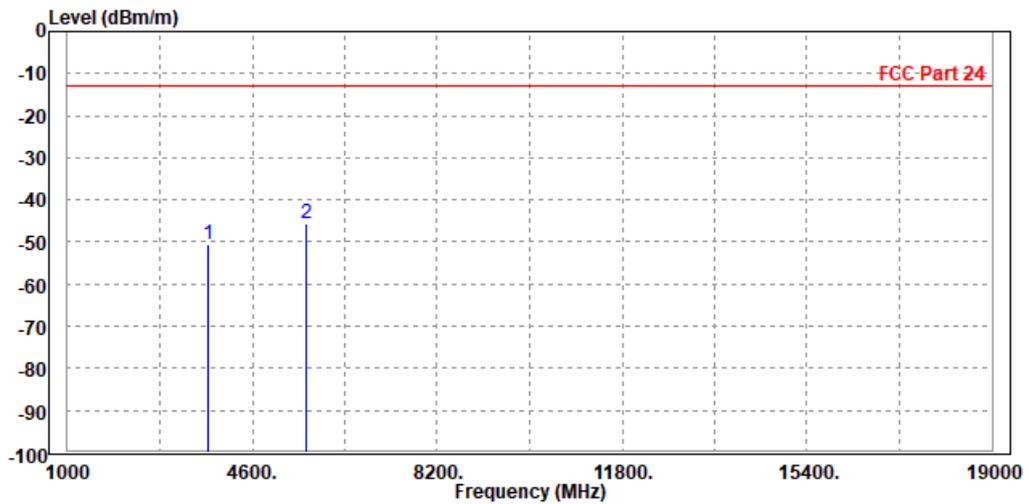




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3754.000	-51.35	-60.19	-13.00	-38.35	8.84	Peak	Horizontal
2	5640.000	-46.81	-57.29	-13.00	-33.81	10.48	Peak	Horizontal

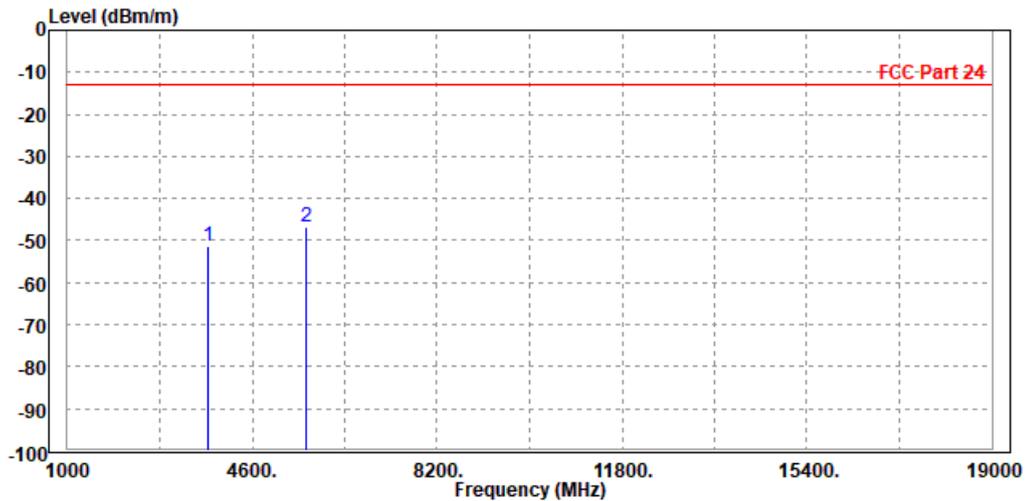




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 18900	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3760.000	-49.20	-58.47	-13.00	-36.20	9.27	Peak	Vertical
2 PP	5644.000	-45.35	-55.61	-13.00	-32.35	10.26	Peak	Vertical

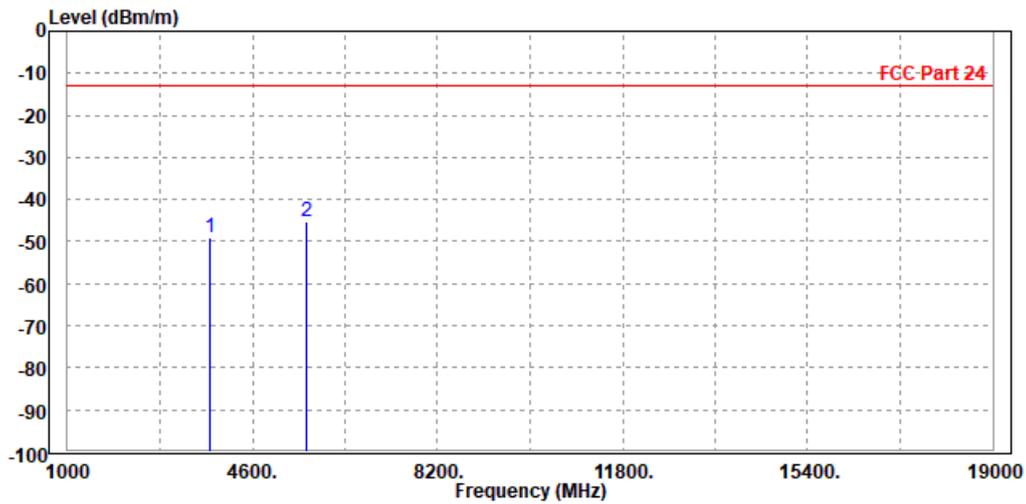



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

LTE Band 25

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-48.82	-57.68	-13.00	-35.82	8.86	Peak	Horizontal
2 PP	5647.500	-47.36	-57.87	-13.00	-34.36	10.51	Peak	Horizontal

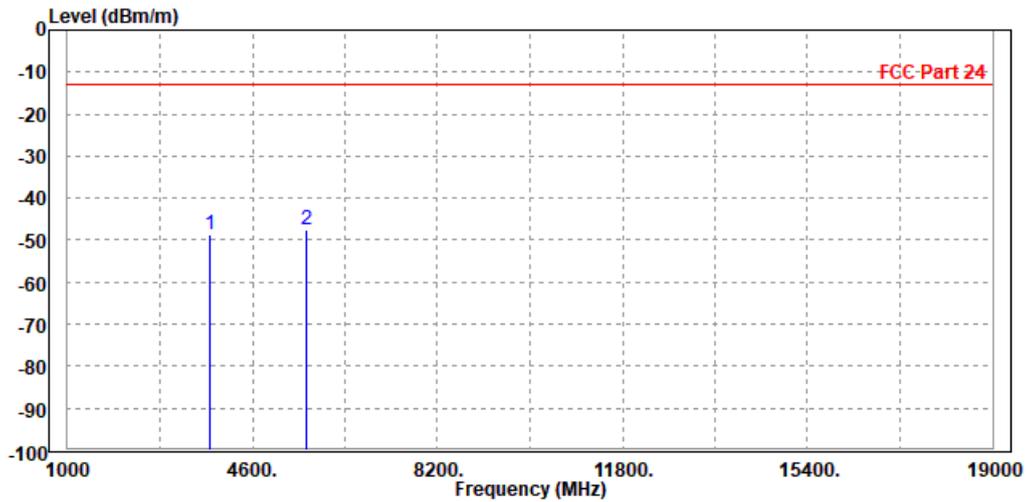




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3772.000	-48.72	-57.99	-13.00	-35.72	9.27	Peak	Vertical
2	5647.500	-49.50	-59.78	-13.00	-36.50	10.28	Peak	Vertical

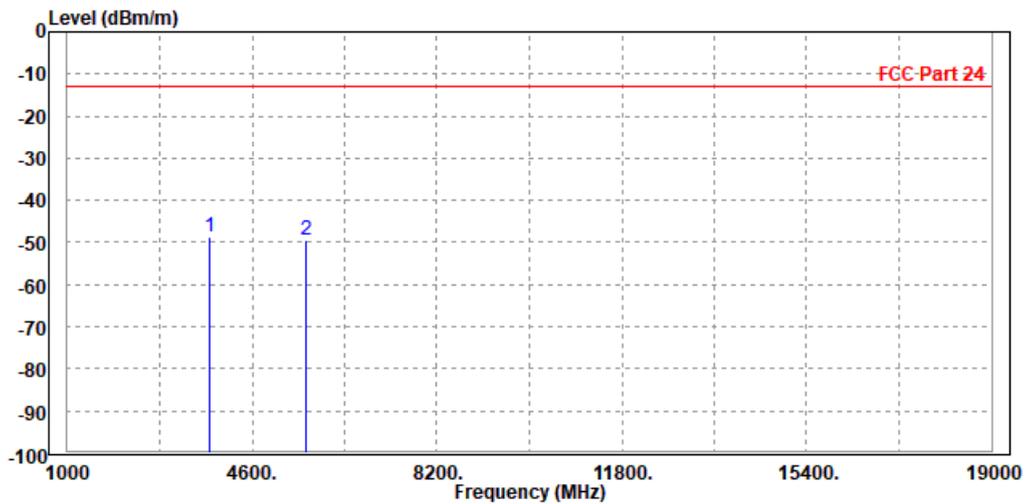




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-48.68	-57.54	-13.00	-35.68	8.86	Peak	Horizontal
2 PP	5647.500	-48.43	-58.94	-13.00	-35.43	10.51	Peak	Horizontal

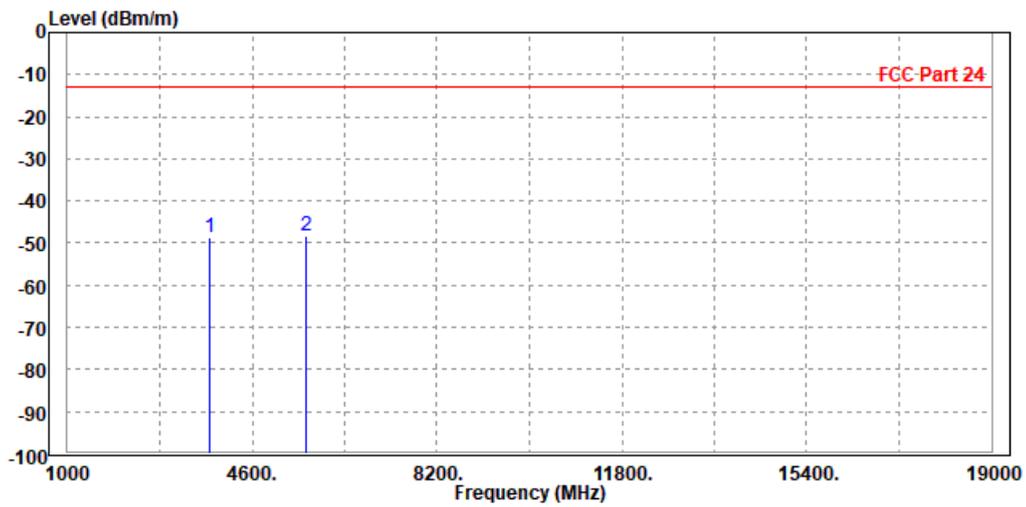




BUREAU VERITAS

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3772.000	-47.77	-57.04	-13.00	-34.77	9.27	Peak	Vertical
2	5647.500	-48.95	-59.23	-13.00	-35.95	10.28	Peak	Vertical

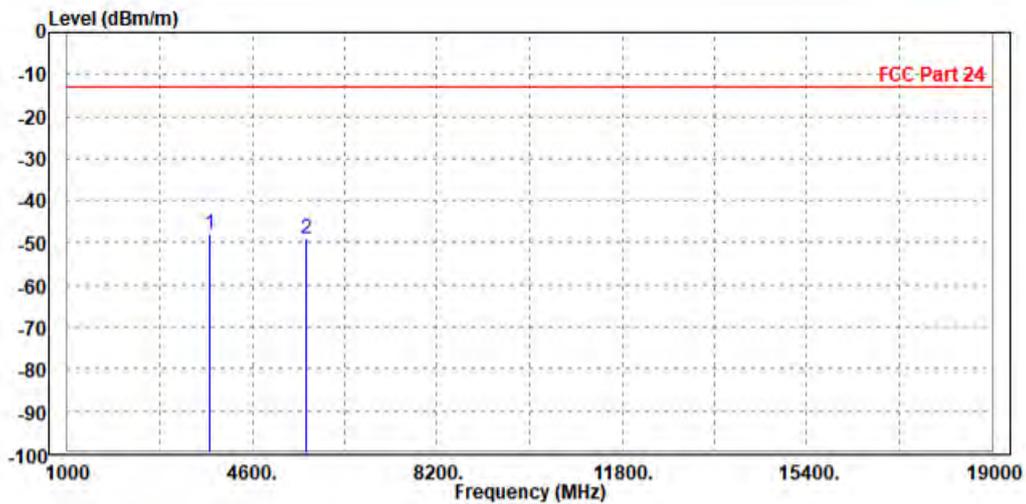




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 26065	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-45.82	-54.61	-13.00	-32.82	8.79	Peak	Horizontal
2	5557.500	-49.66	-59.87	-13.00	-36.66	10.21	Peak	Horizontal

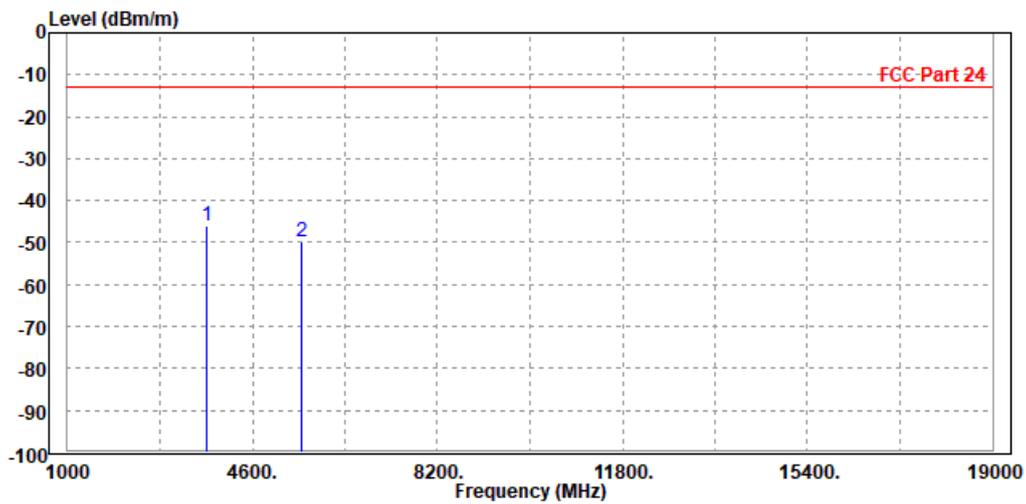




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26065	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3700.000	-48.47	-57.72	-13.00	-35.47	9.25	Peak	Vertical
2	5557.500	-50.23	-60.16	-13.00	-37.23	9.93	Peak	Vertical

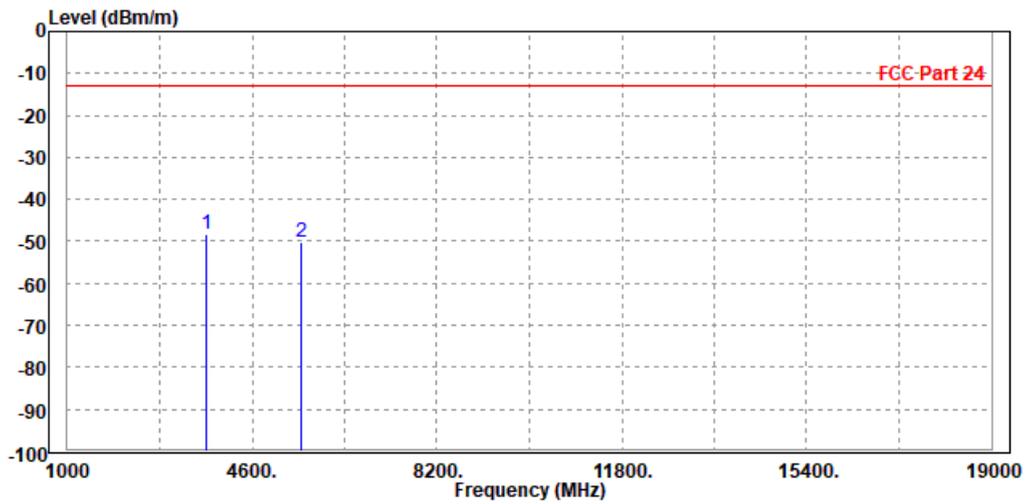




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3772.000	-43.91	-52.77	-13.00	-30.91	8.86	Peak	Horizontal
2	5647.500	-47.45	-57.96	-13.00	-34.45	10.51	Peak	Horizontal

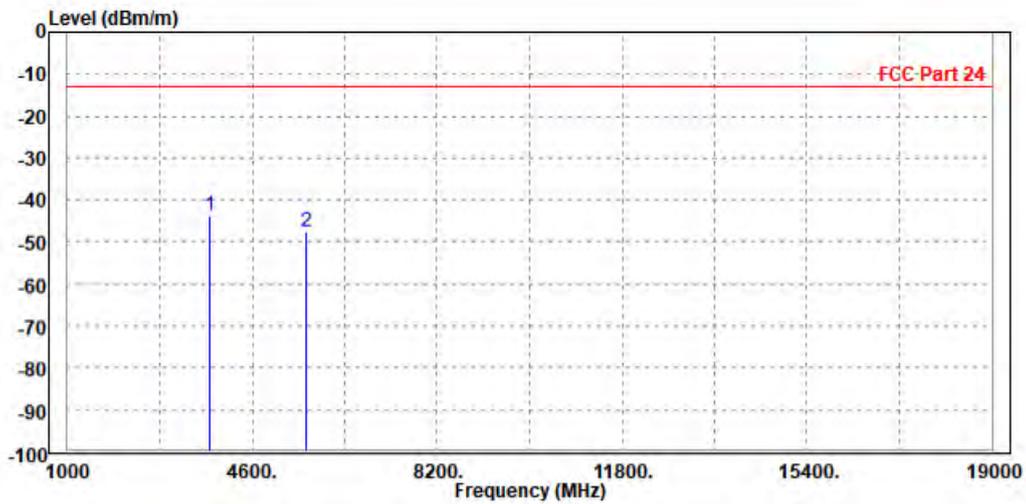




BUREAU VERITAS

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-48.90	-58.17	-13.00	-35.90	9.27	Peak	Vertical
2 PP	5647.500	-48.61	-58.89	-13.00	-35.61	10.28	Peak	Vertical

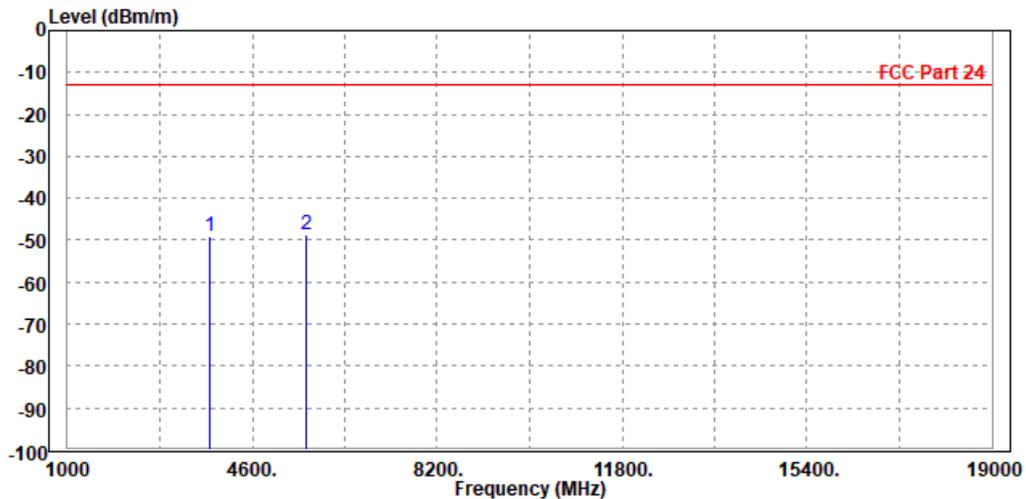




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26665	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3826.000	-43.56	-52.48	-13.00	-30.56	8.92	Peak	Horizontal
2	5737.500	-47.66	-58.46	-13.00	-34.66	10.80	Peak	Horizontal

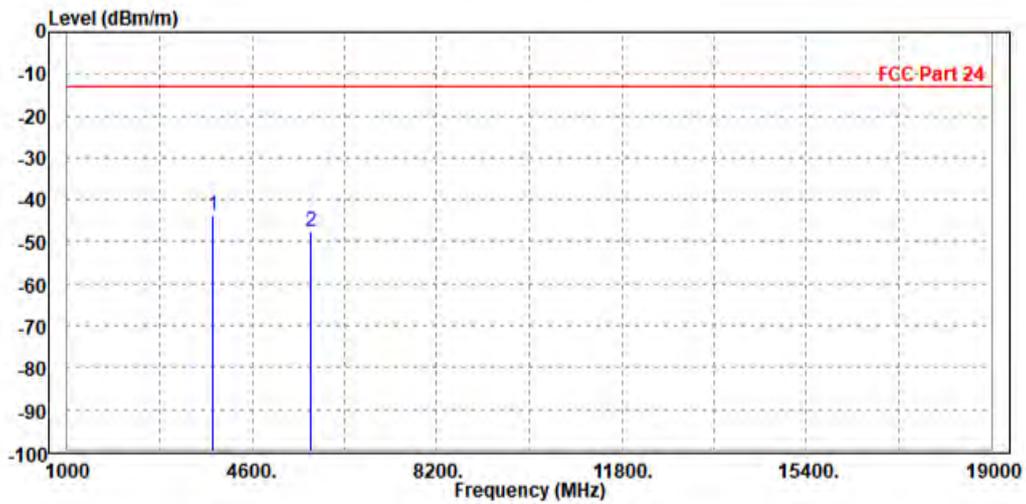




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3826.000	-48.90	-58.19	-13.00	-35.90	9.29	Peak	Vertical
2 PP	5737.500	-46.80	-57.43	-13.00	-33.80	10.63	Peak	Vertical

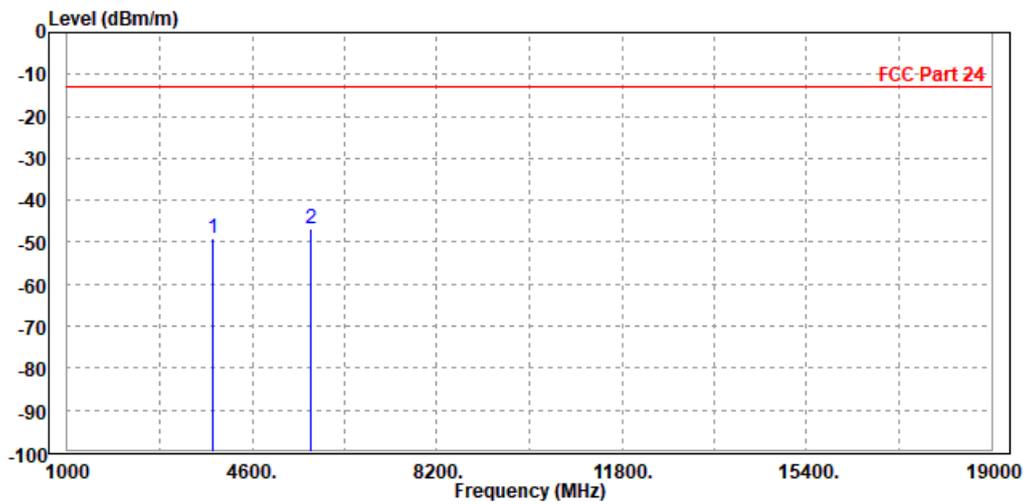



**BUREAU
VERITAS**


Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 10MHz / QPSK

CH 26365

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-48.88	-57.74	-13.00	-35.88	8.86	Peak	Horizontal
2 PP	5647.500	-47.46	-57.97	-13.00	-34.46	10.51	Peak	Horizontal

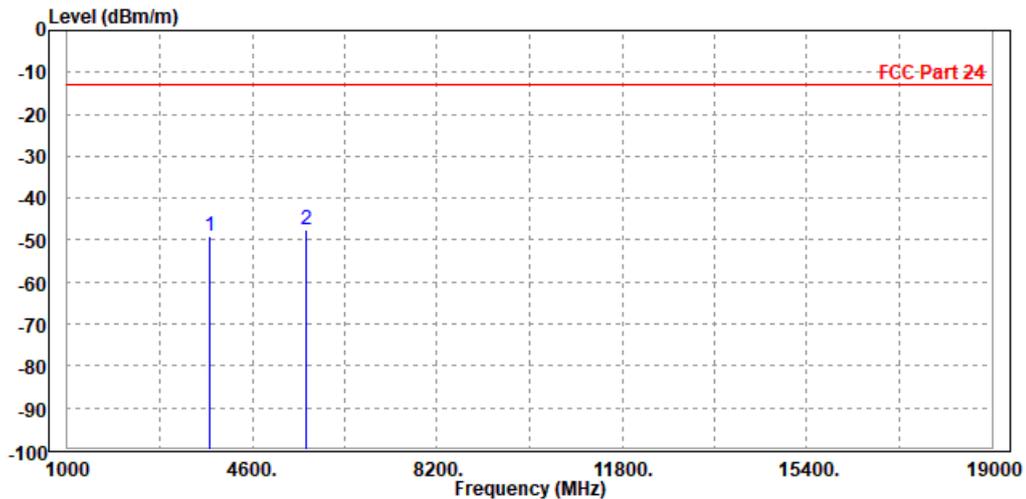




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2


MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Rose Ma		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3772.000	-47.23	-56.50	-13.00	-34.23	9.27	Peak	Vertical
2	5647.500	-48.22	-58.50	-13.00	-35.22	10.28	Peak	Vertical

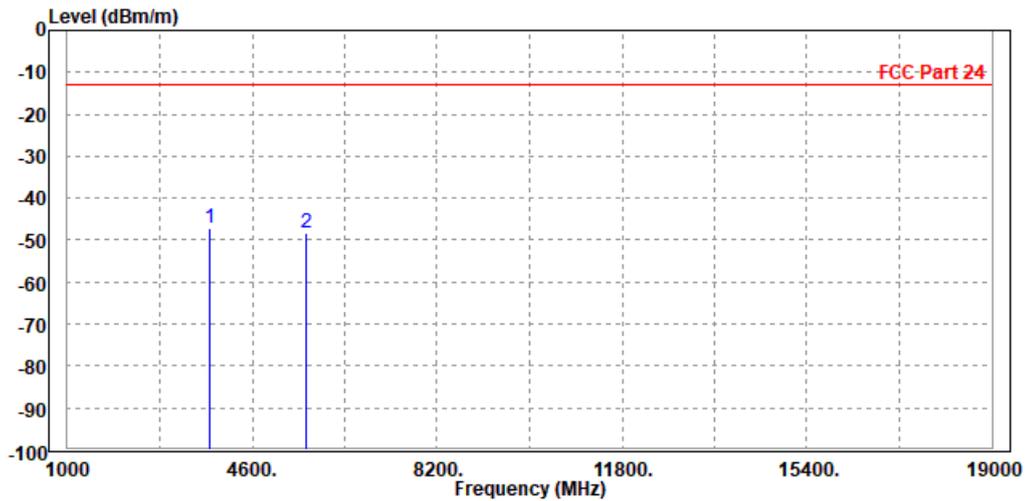

C

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-49.39	-58.25	-13.00	-36.39	8.86	Peak	Horizontal
2 PP	5647.500	-47.45	-57.96	-13.00	-34.45	10.51	Peak	Horizontal

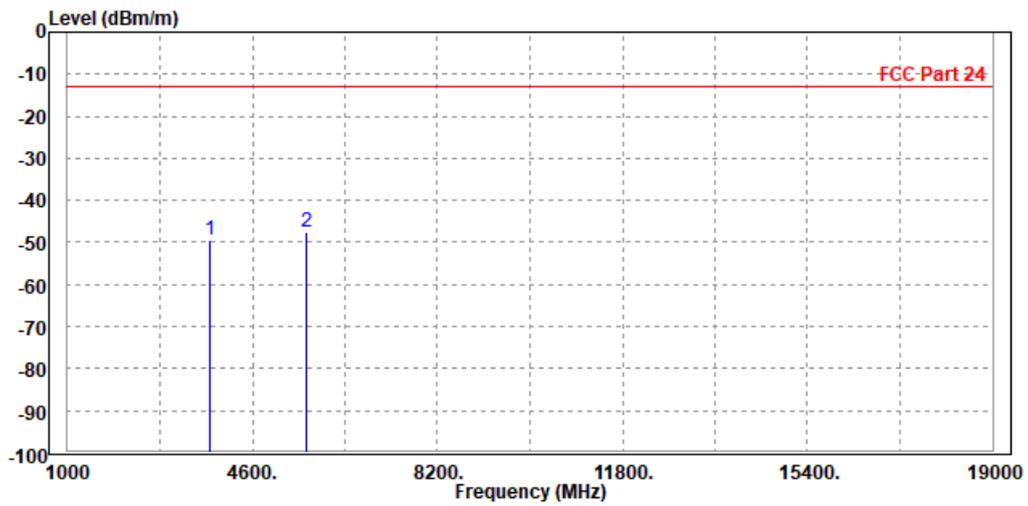




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3772.000	-48.24	-57.51	-13.00	-35.24	9.27	Peak	Vertical
2	5647.500	-49.86	-60.14	-13.00	-36.86	10.28	Peak	Vertical

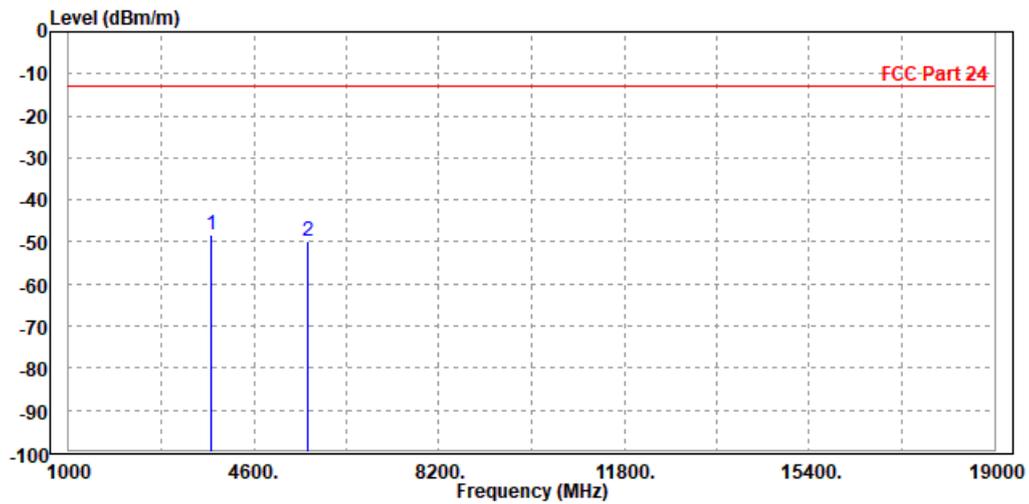




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-49.57	-58.43	-13.00	-36.57	8.86	Peak	Horizontal
2 PP	5647.500	-48.22	-58.73	-13.00	-35.22	10.51	Peak	Horizontal

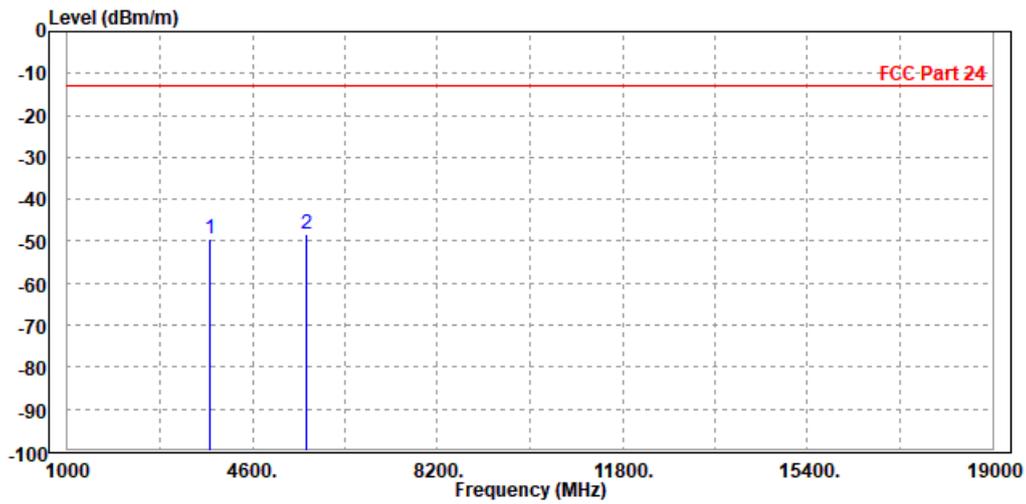




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

MODE	TX channel 26365	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3772.000	-48.95	-58.22	-13.00	-35.95	9.27	Peak	Vertical
2 PP	5647.500	-46.93	-57.21	-13.00	-33.93	10.28	Peak	Vertical

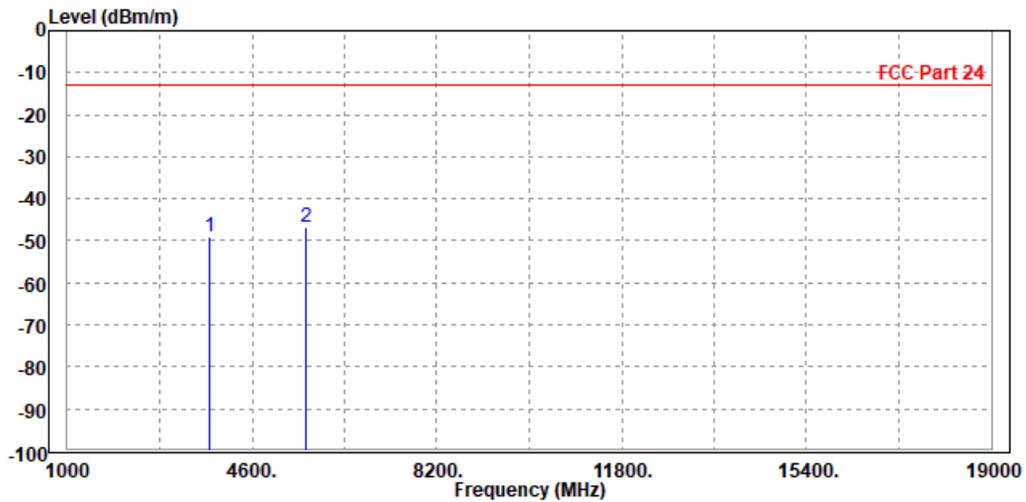




3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

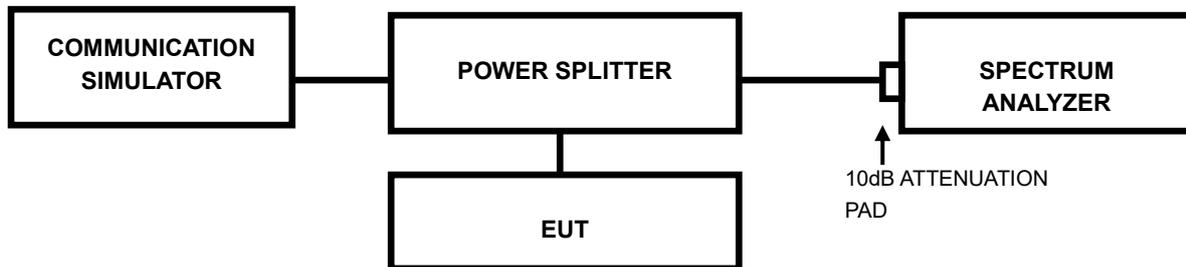

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

3.7.4 TEST RESULTS

GPRS


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
512	1850.2	2.63

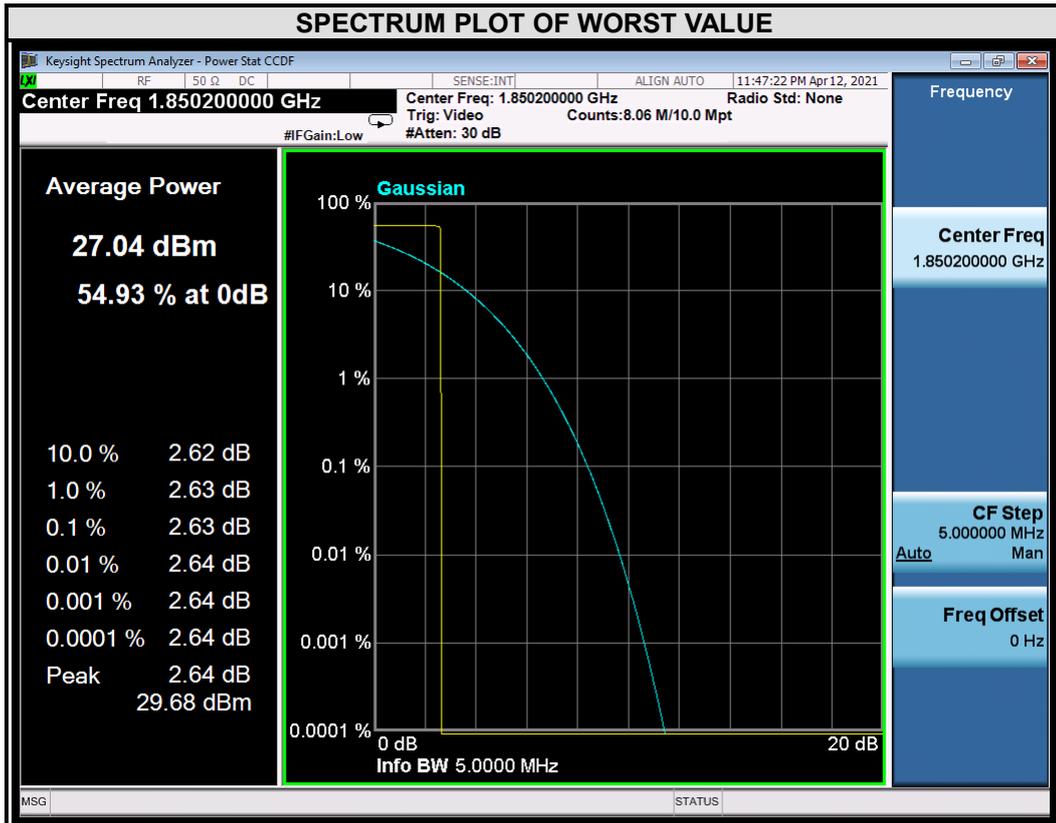



Test Report No.: RFA210222W001-2


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	2.64

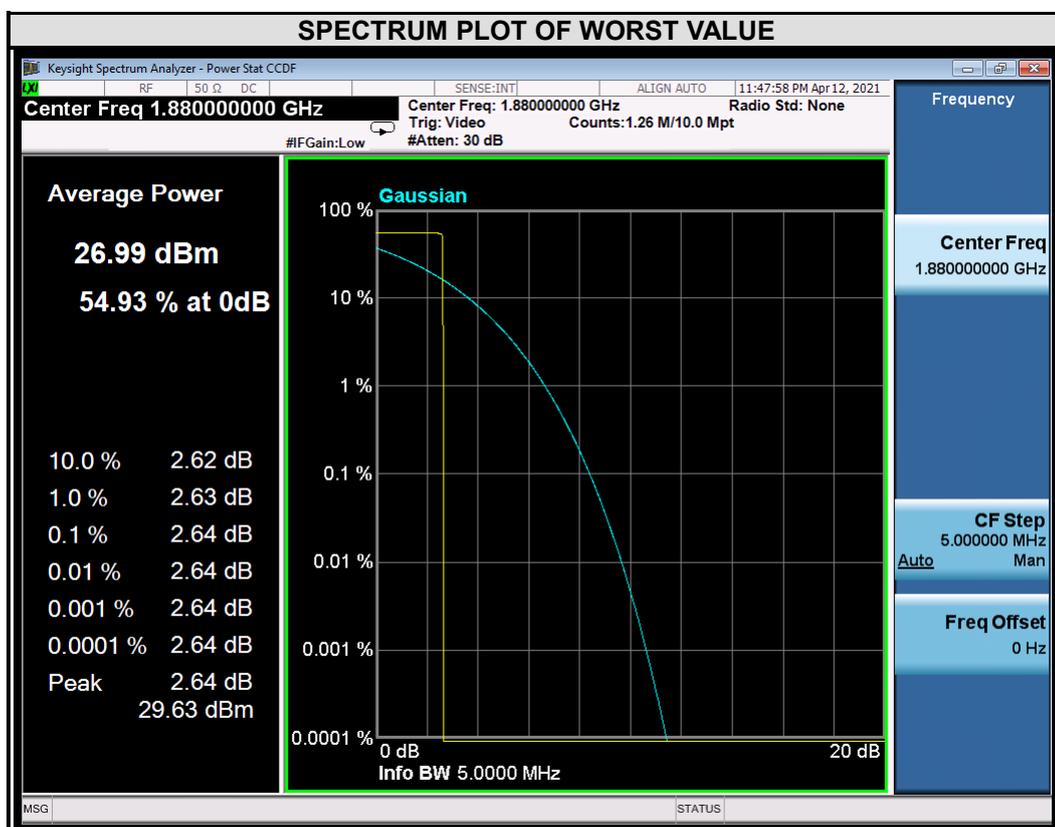



Test Report No.: RFA210222W001-2

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
810	1909.8	2.63

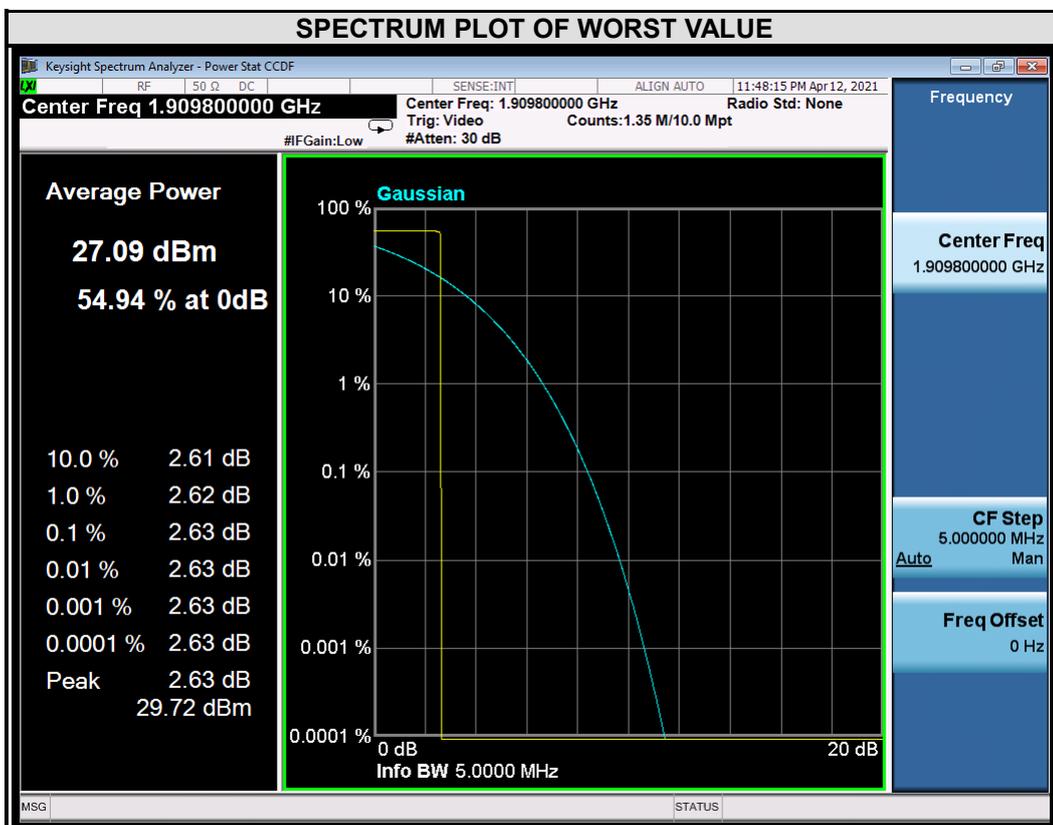




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2

EDGE

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
512	1850.2	5.87

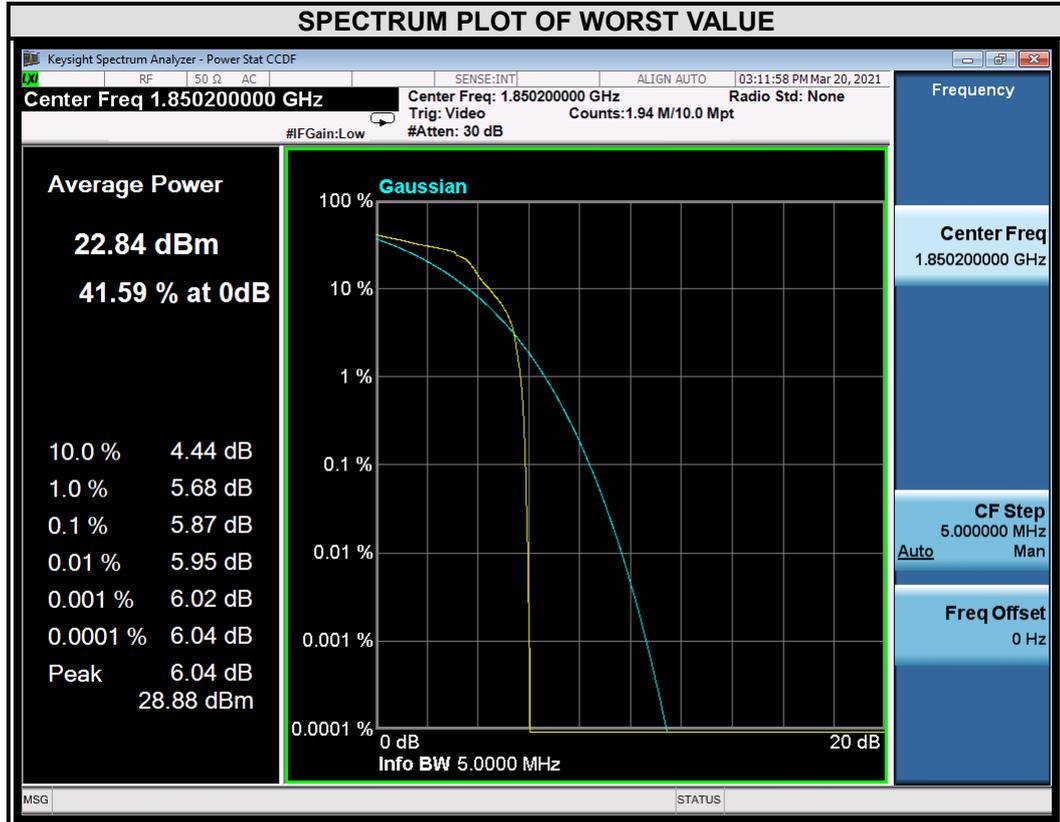




**BUREAU
VERITAS**

Test Report No.: RFA210222W001-2


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
661	1880	6.91

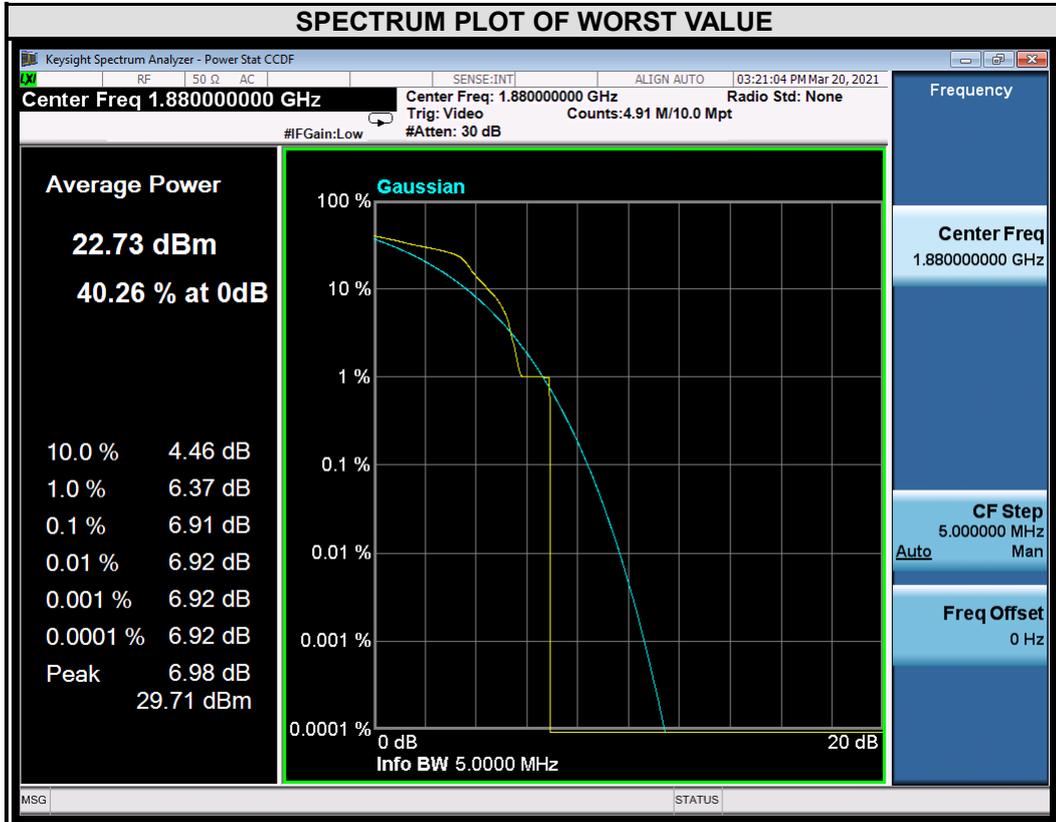



Test Report No.: RFA210222W001-2


CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
810	1909.8	6.91

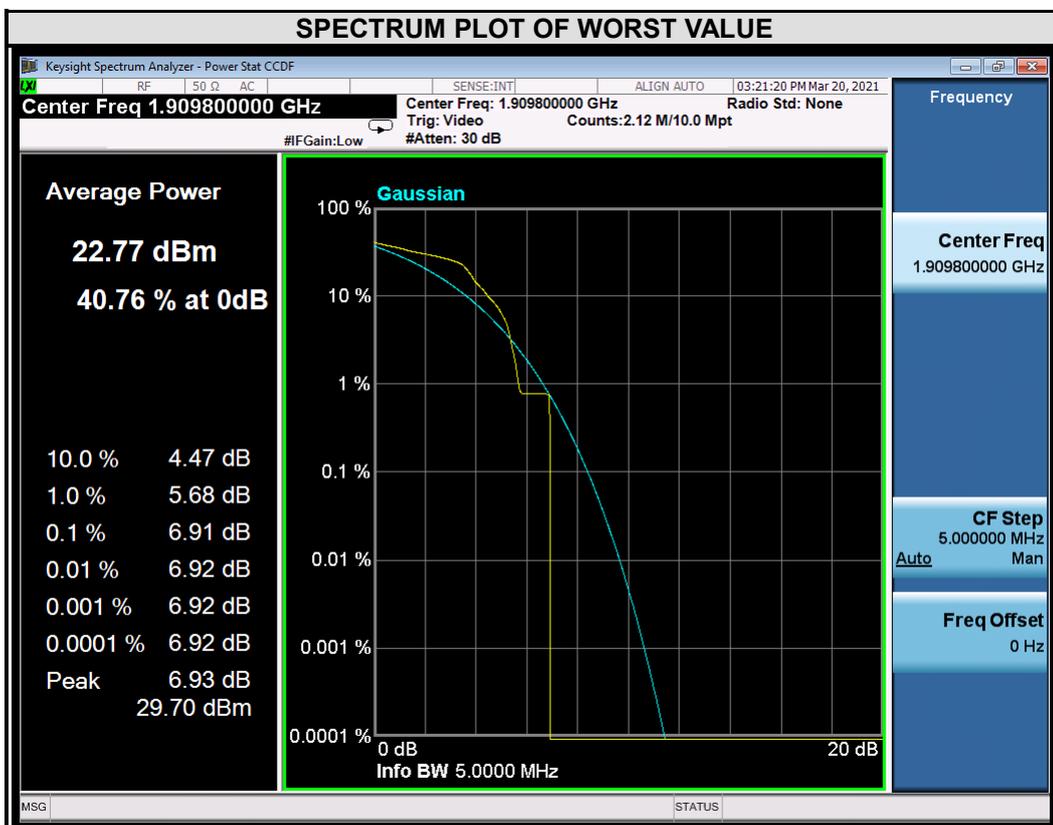



**BUREAU
VERITAS**
WCDNA

Test Report No.: RFA210222W001-2

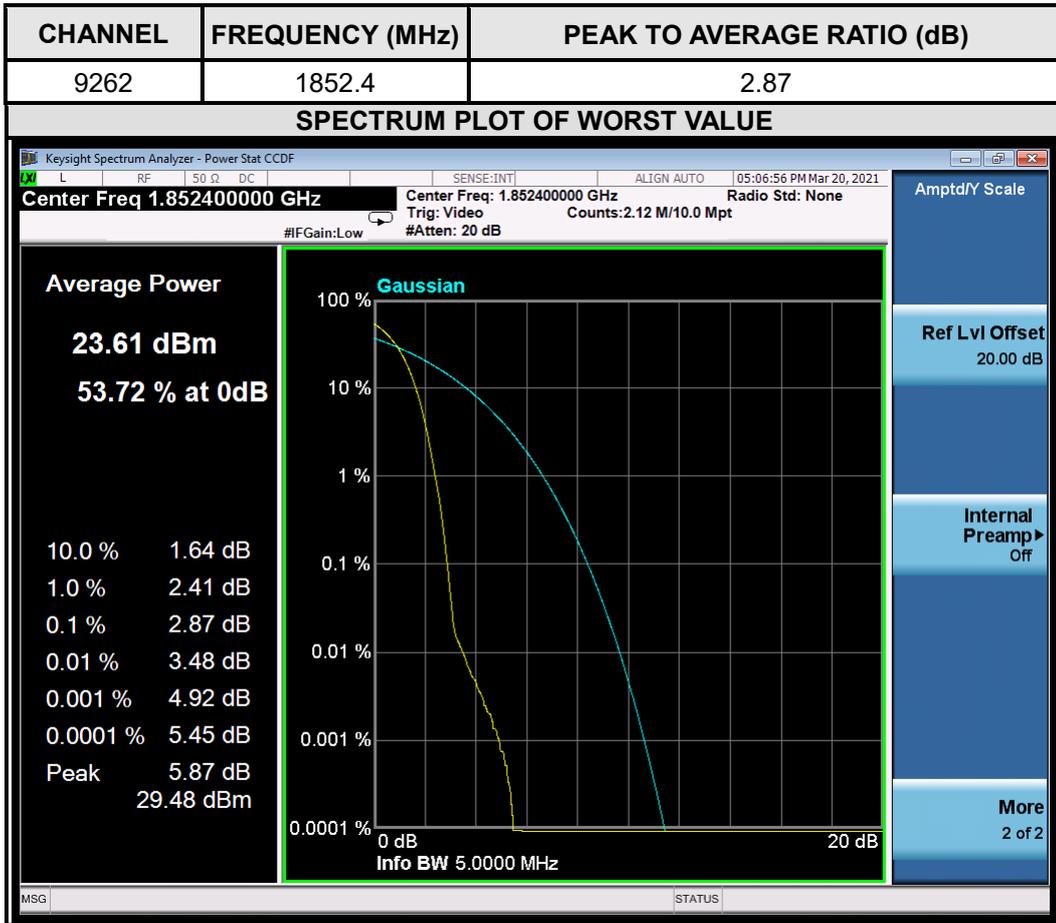




BUREAU VERITAS

Test Report No.: RFA210222W001-2

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9400	1880.0	2.87

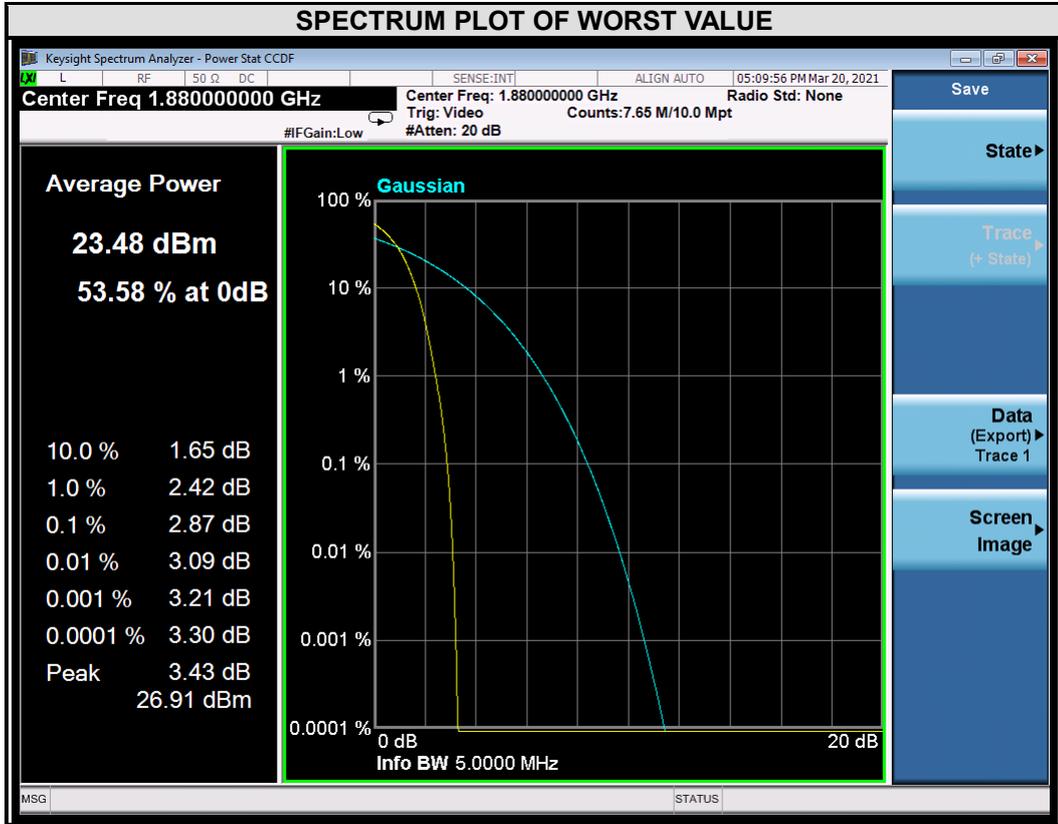



Test Report No.: RFA210222W001-2

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
9538	1907.6	2.77

