



*Full*

# TEST REPORT

**No.I17D00058-WLA**

*For*

**Client : Lenovo (Shanghai) Electronics**

**Technology Co., Ltd**

**Production : Portable Tablet Computer**

**Model Name : TB-X704V**

**FCC ID: O57TBX704V**

**IC ID 10407A-TBX704V**

**Lenovo Lenovo**

**Hardware Version: Lenovo Tablet TB-X704V**

**Software Version: TB-X704V\_RF01\_20170301**

**Issued date: 2017-06-22**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)



# RF Test Report

Report No.: I17D00058-WLA

## Revision Version

Report Number	Revision	Date	Memo
I17D00058-WLA	00	2017-06-06	Initial creation of test report
I17D00058-WLA	01	2017-06-22	Second creation of test report

**CONTENTS**

<b>1.</b>	<b>TEST LABORATORY .....</b>	<b>5</b>
<b>1.1.</b>	<b>TESTING LOCATION .....</b>	<b>5</b>
<b>1.2.</b>	<b>TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.3.</b>	<b>PROJECT DATA .....</b>	<b>5</b>
<b>1.4.</b>	<b>SIGNATURE .....</b>	<b>5</b>
<b>2.</b>	<b>CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.1.</b>	<b>APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2.</b>	<b>MANUFACTURER INFORMATION .....</b>	<b>6</b>
<b>3.</b>	<b>EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1.</b>	<b>ABOUT EUT .....</b>	<b>7</b>
<b>3.2.</b>	<b>INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3.</b>	<b>INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4.</b>	<b>REFERENCE DOCUMENTS .....</b>	<b>8</b>
<b>4.1.</b>	<b>REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>8</b>
<b>5.</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>9</b>
<b>5.1.</b>	<b>NOTES .....</b>	<b>10</b>
<b>5.2.</b>	<b>STATEMENTS .....</b>	<b>10</b>
<b>6.</b>	<b>TEST RESULT .....</b>	<b>11</b>
<b>6.1.</b>	<b>MAXIMUM OUTPUT POWER .....</b>	<b>11</b>
<b>6.2.</b>	<b>PEAK POWER SPECTRAL DENSITY .....</b>	<b>13</b>
<b>6.3.</b>	<b>OCCUPIED 6DB BANDWIDTH .....</b>	<b>21</b>
<b>6.4.</b>	<b>BAND EDGES COMPLIANCE .....</b>	<b>28</b>
<b>6.5.</b>	<b>TRANSMITTER SPURIOUS EMISSION-CONDUCTED .....</b>	<b>33</b>
<b>6.6.</b>	<b>TRANSMITTER SPURIOUS EMISSION-RADIATED .....</b>	<b>47</b>
<b>6.7.</b>	<b>AC POWERLINE CONDUCTED EMISSION .....</b>	<b>69</b>



## ***RF Test Report***

Report No.: I17D00058-WLA

---

<b>7.</b>	<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....</b>	<b>72</b>
<b>8.</b>	<b>TEST ENVIRONMENT .....</b>	<b>73</b>
<b>ANNEX A.</b>	<b>DEVIATIONS FROM PRESCRIBED TEST METHODS .....</b>	<b>74</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301
IC OAT S Test Site Registration Number	10766A-1

### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	0/+45°C
Relative Humidity:	20-75%

### 1.3. Project data

Project Leader:	Chen Minfei
Testing Start Date:	2017-04-02
Testing End Date:	2017-04-29

### 1.4. Signature



Zhang Shiyu

(Prepared this test report)



Ding Li

(Reviewed this test report)



Zheng Zhongbin

Director of the laboratory

(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: Lenovo (Shanghai) Electronics Technology Co., Ltd  
Address: NO.68 BUILDING, 199 FENJU RD, Pilot Free Trade Zone,  
Shanghai, 200131, China  
Contact: Spring Zhou  
Telephone: 13776306969

### 2.2. Manufacturer Information

Company Name: Lenovo PC HK Limited  
Address: 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry  
Bay, Hong Kong  
Contact: Spring Zhou  
Telephone: 13776306969

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	Portable Tablet Computer
Model name	TB-X704V
WLAN Frequency	2412MHz-2462MHz
WLAN Channel	Channel1-Channel11
WLAN type of modulation	802.11b:DSSS 802.11g/n: OFDM
Extreme Temperature	0/+45°C
Nominal Voltage	4.0V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.6V

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N09	863923030004443	Lenovo Tablet TB-X704V	TB-X704V_RF01 _20170301	2017-03-17

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	---	---

\*AE ID: is used to identify the test sample in the lab internally.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15,Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	Jun,2016 Edition
ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz	2013
RSS-247	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2015

## 5. Summary of Test Results

A brief summary of the tests carried out is shown as following.

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(a)	RSS-247 5.4	P
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	P
Occupied 6dB Bandwidth	15.247(d)	RSS-247 5.2	P
Band Edges Compliance	15.247(b)	RSS-247 5.5	P
Transmitter Spurious Emission-Conducted	15.247	RSS-247 5.5	P
Transmitter Spurious Emission-Radiated	15.247,15.209,	RSS-247 5.5	P
AC Powerline Conducted Emission	15.107,15.207	RSS-247 Gen 3.2	P

Please refer to part 5 for detail.

The measurements are according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

**Test Conditions**

Tnom	Normal temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	22°C
Voltage	Vnom	4V
Humidity	Hnom	32%
Air Pressure	Anom	1010hPa

### 5.1. Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with section 3.

The test results of this test report relate exclusively to the item(s) tested as specified in section 5.

The following deviation from, additions to, or exclusions from the test specifications have been made. See section 3.

### 5.2. Statements

The product name TB-X704V, supporting WCDMA/WLAN/BT/BLE, manufactured by Lenovo PC HK Limited, is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 6. Test result

### 6.1. Maximum Output Power

#### 6.1.1 Measurement Limit and method:

Standard	Limit(dBm)
FCC CRF 15.247(b)	< 30

#### 6.1.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW  $\geq$  OBW, VBW  $\geq$  3RBW.
4. Detector : Peak.
5. Trace mode: Max Hold

#### 6.1.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

#### 6.1.4 Maximum Peak Output Power-conducted

##### Measurement Results:

##### 802.11b/g mode

Mode	Data Rate(Mbps)	Teat Result(dBm)		
		2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	1	16.50	/	/
	2	17.03	/	/
	5.5	17.53	/	/
	11	19.54	18.81	17.60
802.11g	6	19.39	/	/
	9	19.49	/	/
	12	19.96	/	/

	18	20.17	/	/
	24	21.34	19.94	19.36
	36	20.83	/	/
	48	20.76	/	/
	54	20.76	/	/

The data 11Mbps rate and 24Mbps are selected as worse condition, and the following cases are performed with this condition.

### 802.11n mode

Mode	Data Rate (Index)	Teat Result(dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11n (20MHz)	MCS0	20.69	/	/
	MCS1	20.78	/	
	MCS2	20.80	/	/
	MCS3	20.94	/	/
	MCS4	20.91	/	/
	MCS5	21.09	/	/
	MCS6	21.16	/	/
	MCS7	21.18	20.05	19.19
Mode	Data Rate (Index)	Teat Result(dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452MHz (Ch9)
802.11n (40MHz)	MCS0	22.81	/	/
	MCS1	22.84	/	/
	MCS2	22.83	/	/
	MCS3	23.39	/	/
	MCS4	23.33	/	/
	MCS5	23.41	/	/

	MCS6	23.31	/	/
	MCS7	23.42	23.18	22.80

The data rate MCS7 for 802.11n(20M)and MCS7 for 802.11n(40M) are selected as worse condition, and the following case are performed with this condition.

### 6.1.5 Maximum Average Output Power-conducted

#### 802.11b/g mode

Mode	Test Result(dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	14.77	14.63	13.47
802.11g	14.51	13.97	13.22

#### 802.11n mode

Mode	Test Result(dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11n( 20MHz)	14.05	13.82	13.41
Mode	Test Result(dBm)		
	2422MHz (Ch3)	2437MHz (Ch6)	2452MHz (Ch9)
802.11n( 40MHz)	14.18	14.03	13.53

**Conclusion: PASS**

## 6.2. Peak Power Spectral Density

### 6.2.1 Measurement Limit:

Standard	Limit
FCC CFR Part 15.247(e)	< 8dBm/3 KHz

### 6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 6.2.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### 6.2.4 Measurement Results:

#### 802.11b/g mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11b	1	Fig 1.	-11.726	P
	6	Fig 2.	-10.739	P
	11	Fig 3.	-12.652	P
802.11g	1	Fig 4.	-13.557	P
	6	Fig 5.	-14.453	P
	11	Fig 6.	-15.769	P


#### 802.11n mode

Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(20MHz)	1	Fig 7.	-13.587	P
	6	Fig 8.	-15.337	P

	11	Fig 9.	-15.990	P
Mode	Channel	Power Spectral Density(dBm/3kHz)		Conclusion
802.11n(40MHz)	3	Fig 10.	-17.587	P
	6	Fig 11.	-19.377	P
	9	Fig 12.	-19.556	P


**Conclusion: PASS**

Test graphs as below:

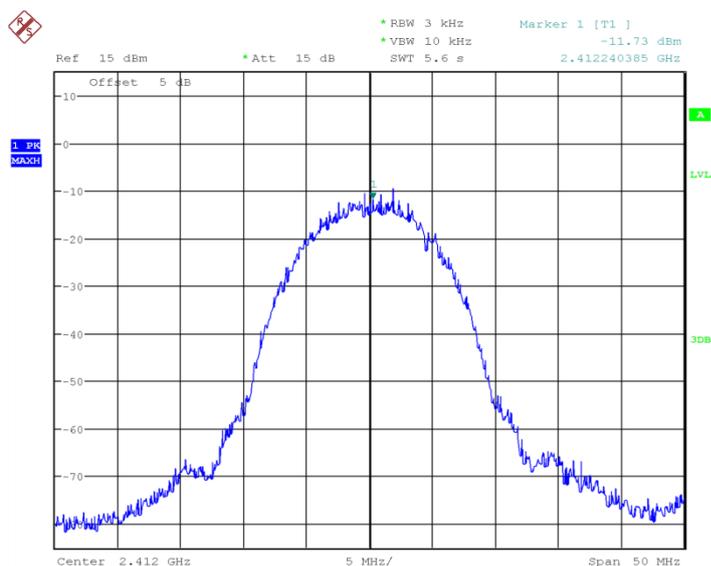


Date: 17.APR.2017 14:38:12

**Fig 1. Power Spectral Density (802.1b,Ch1)**

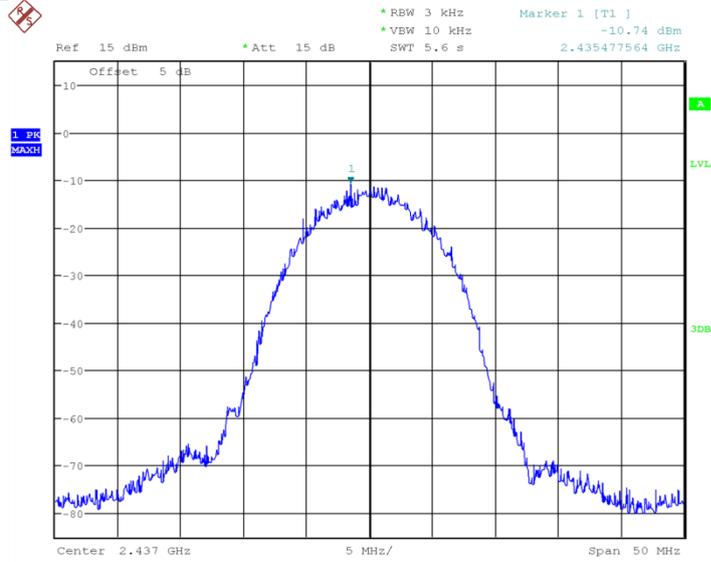


Date: 17.APR.2017 14:38:41

**Fig 2. Power Spectral Density (802.1b,Ch6)**

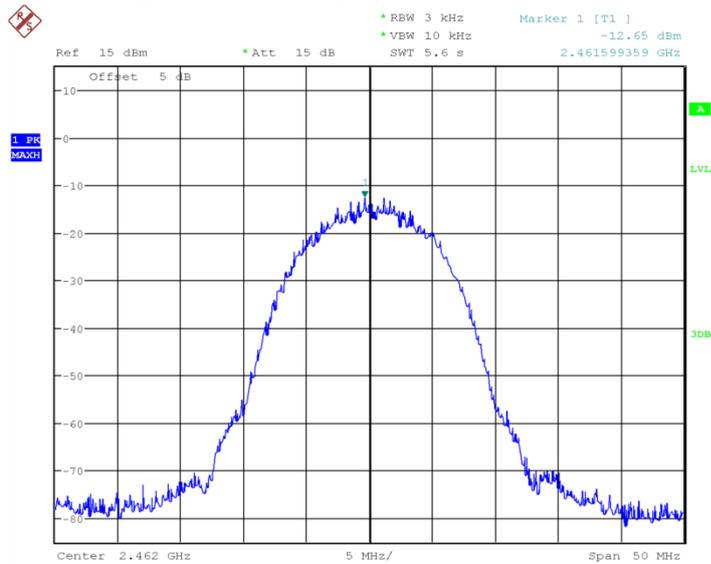


Date: 17.APR.2017 14:39:19

**Fig 3. Power Spectral Density (802.1b,Ch11)**

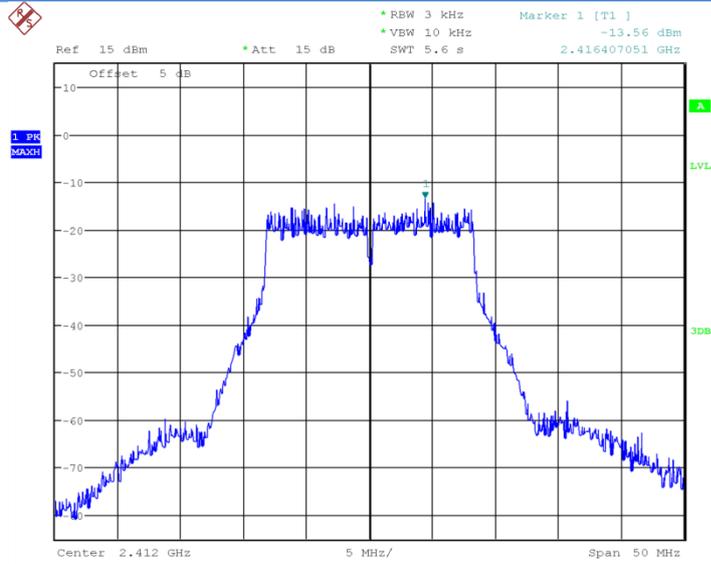


Date: 17.APR.2017 14:40:22

**Fig 4. Power Spectral Density (802.1g,Ch1)**

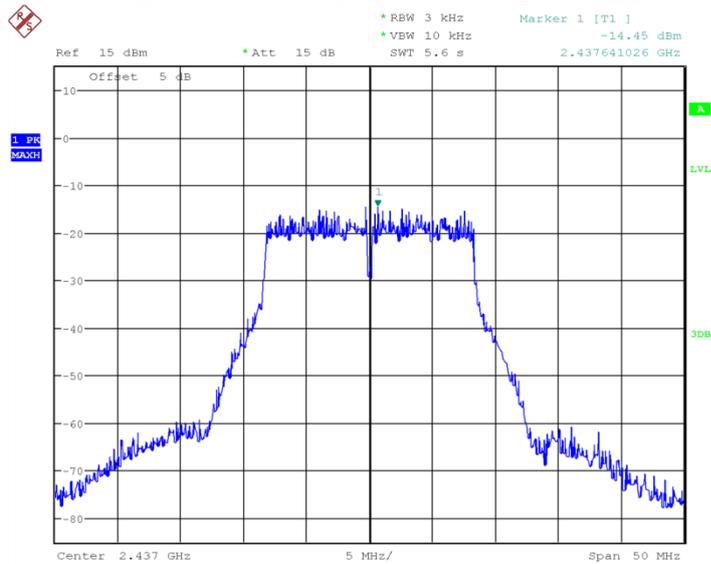


Date: 17.APR.2017 14:42:02

**Fig 5. Power Spectral Density (802.1g,Ch6)**

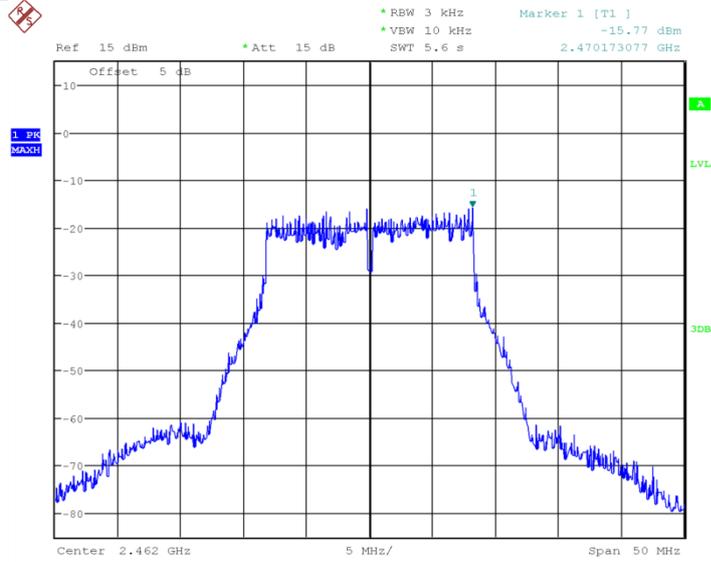

Date: 17.APR.2017 14:42:47

**Fig 6. Power Spectral Density (802.1g,Ch11)**

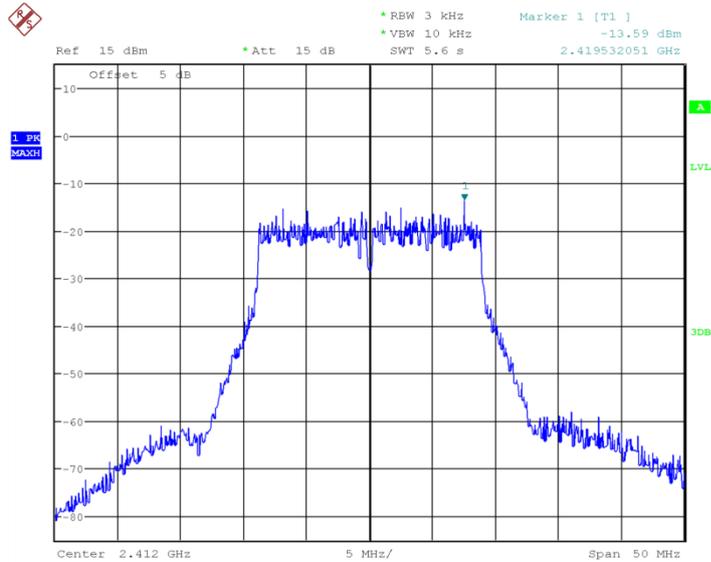


Date: 17.APR.2017 14:43:26

**Fig 7. Power Spectral Density (802.1n-20MHz,Ch1)**





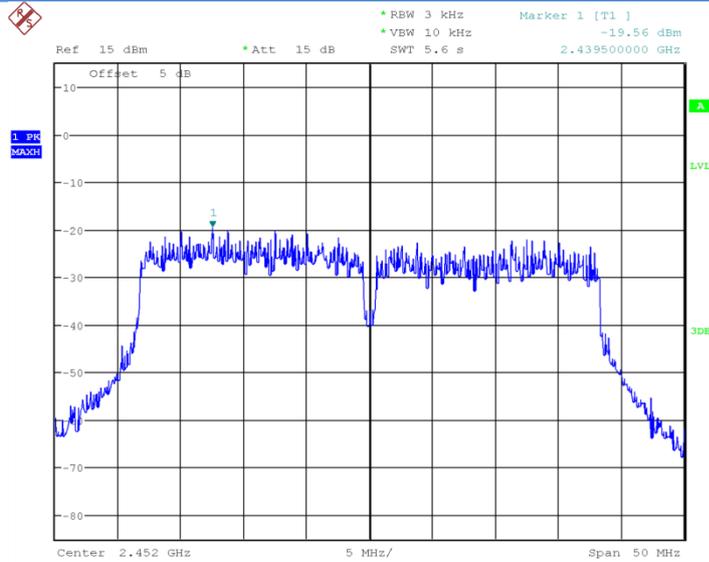

Date: 20.APR.2017 13:48:11

**Fig 12. Power Spectral Density (802.1n-40MHz,Ch9)**

### 6.3. Occupied 6dB Bandwidth

#### 6.3.1 Measurement Limit:

Standard	Limit(KHz)
FCC 47 CFR Part 15.247(a)	≥500

#### 6.3.2 Test procedure

The measurement is according to ANSI C63.10 clause 11.8.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 6.3.4 Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

**6.3.5 Measurement Result:**
**802.11b/g mode**


Mode	Channel	Occupied 6dB Bandwidth(KHz)		Conclusion
802.11b	1	Fig 13.	8.013	P
	6	Fig 14.	7.933	P
	11	Fig 15.	9.135	P
802.11g	1	Fig 16.	16.587	P
	6	Fig 17.	16.506	P
	11	Fig 18.	16.587	P

**802.11n mode**

Mode	Channel	Occupied 6dB Bandwidth(KHz)		Conclusion
802.11n(20MHz)	1	Fig 19.	17.708	P
	6	Fig 20.	17.788	P
	11	Fig 21.	17.708	P
Mode	Channel	Occupied 6dB Bandwidth(KHz)		Conclusion
802.11n(40MHz)	3	Fig 22.	35.817	P
	6	Fig 23.	35.256	P
	9	Fig 24.	35.577	P


**Conclusion: PASS**

**Test graphs as below:**

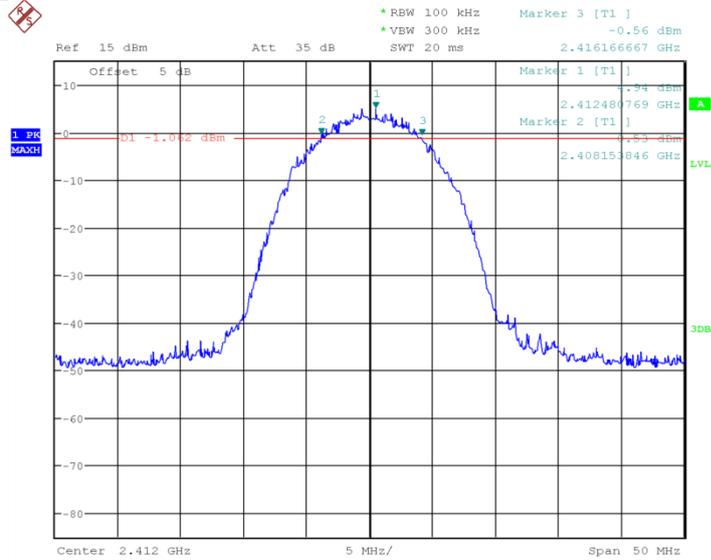

Date: 17.APR.2017 14:46:17


**Fig 13. Occupied 6dB Bandwidth (802.11b, Ch1)**

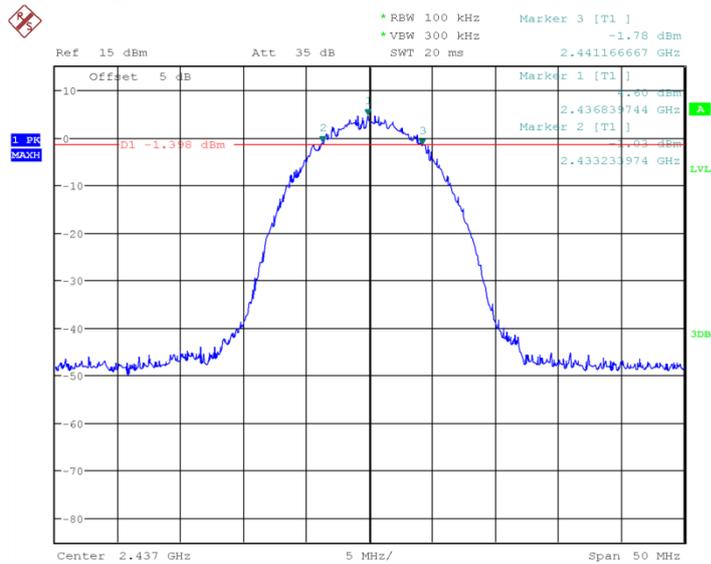

Date: 17.APR.2017 14:46:44


**Fig 14. Occupied 6dB Bandwidth (802.11b, Ch6)**



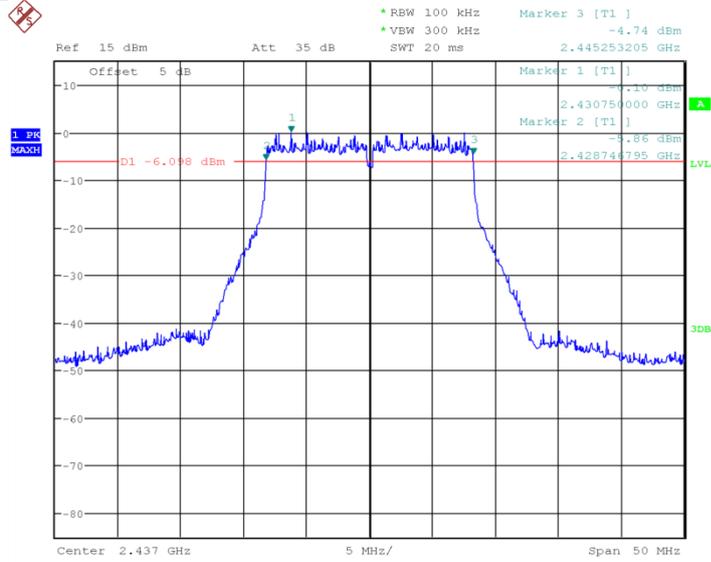


Date: 17.APR.2017 14:48:47

**Fig 17. Occupied 6dB Bandwidth (802.11g, Ch6)**

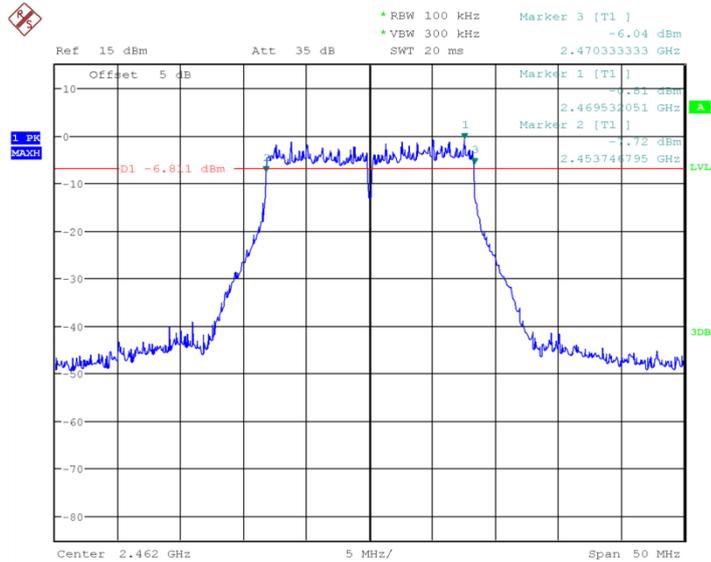


Date: 17.APR.2017 14:49:18

**Fig 18. Occupied 6dB Bandwidth (802.11g, Ch11)**

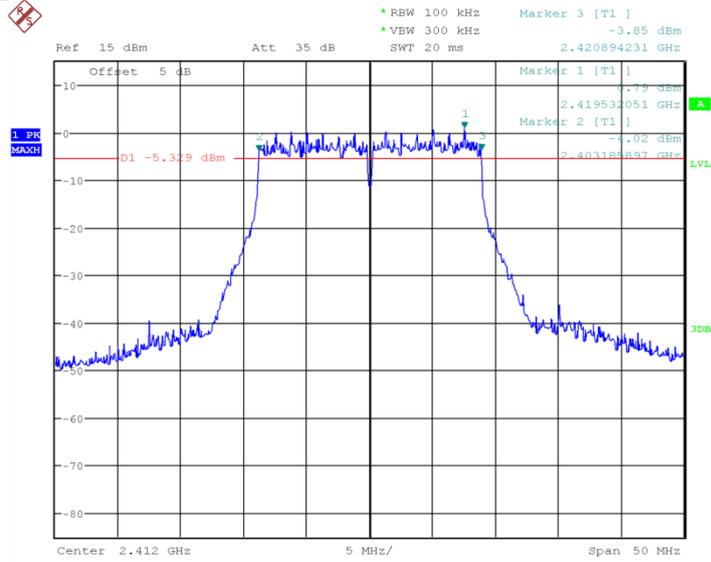


Date: 17.APR.2017 14:49:53

**Fig 19. Occupied 6dB Bandwidth (802.11n-20MHz, Ch1)**

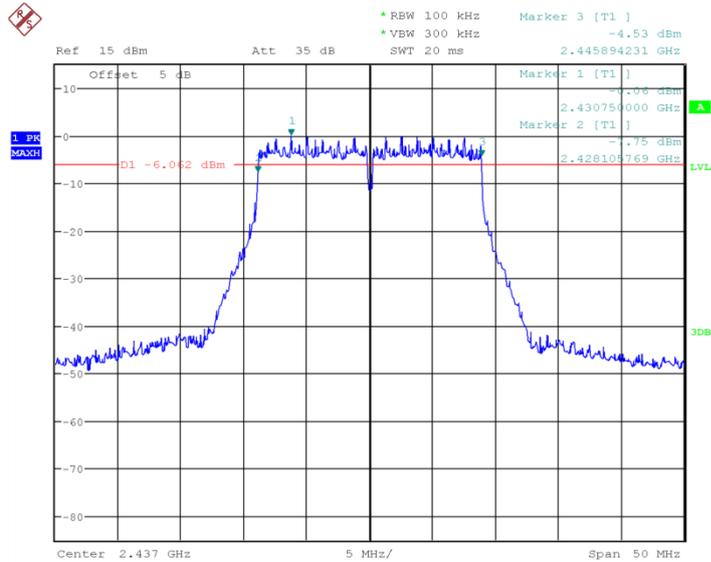


Date: 17.APR.2017 14:50:38

**Fig 20. Occupied 6dB Bandwidth (802.11n-20MHz, Ch6)**

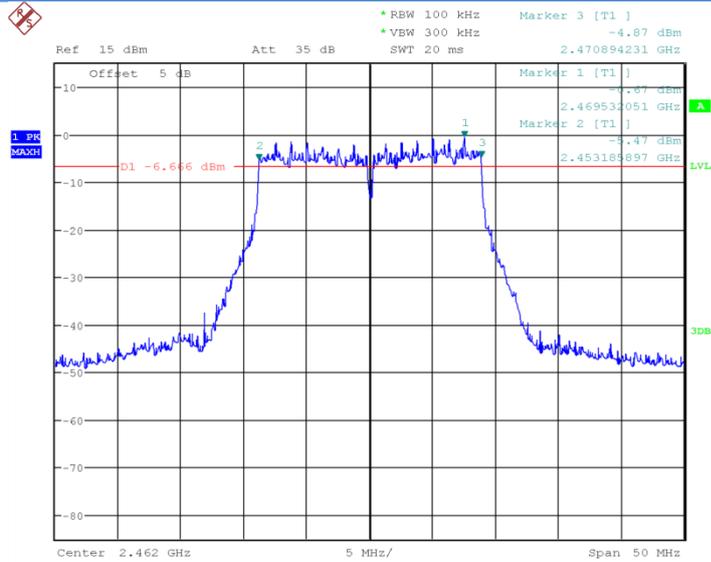


Date: 17.APR.2017 14:51:35

**Fig 21. Occupied 6dB Bandwidth (802.11n-20MHz, Ch11)**

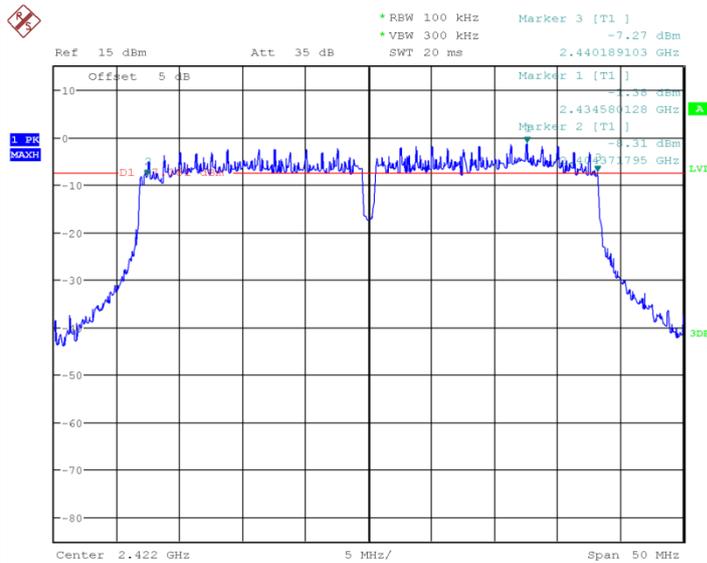


Date: 20.APR.2017 13:48:50

**Fig 22. Occupied 6dB Bandwidth (802.11n-40MHz, Ch3)**

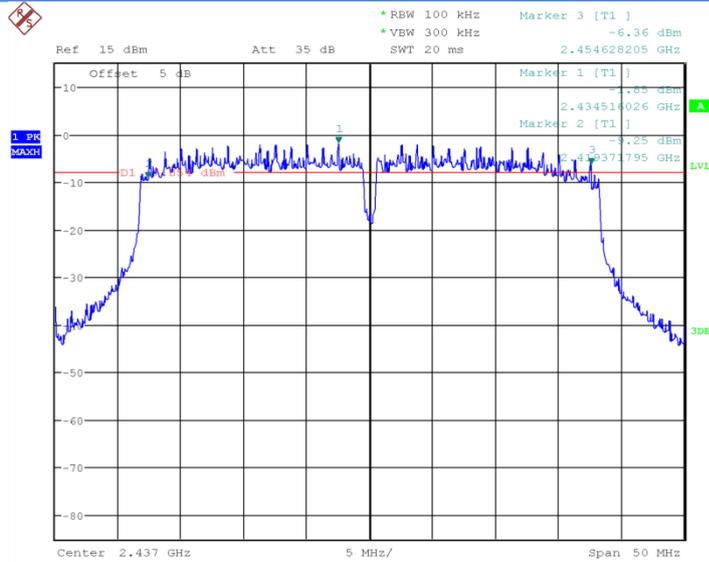

Date: 20.APR.2017 13:49:20

**Fig 23. Occupied 6dB Bandwidth (802.11n-40MHz, Ch6)**

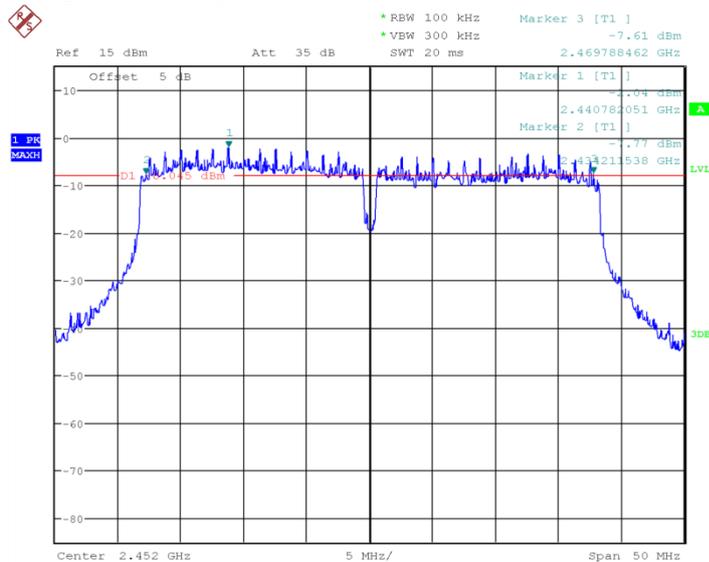

Date: 20.APR.2017 13:49:52

**Fig 24. Occupied 6dB Bandwidth (802.11n-40MHz, Ch9)**

## 6.4. Band Edges Compliance

### 6.4.1 Measurement Limit:

Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

### 6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. VBW  $\geq$  [3  $\times$  RBW].
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

### 6.4.3 Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

### 6.4.4 Measurement results

#### 802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig 25.	P
	11	Fig 26.	P
802.11g	1	Fig 27.	P
	11	Fig 28.	P


#### 802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n(20MHz)	1	Fig 29.	P
	11	Fig 30.	P

Mode	Channel	Test Results	Conclusion
802.11n(40MHz)	3	Fig 31.	P
	9	Fig 32.	P


**Conclusion: PASS**

**Test graphs as blew:**

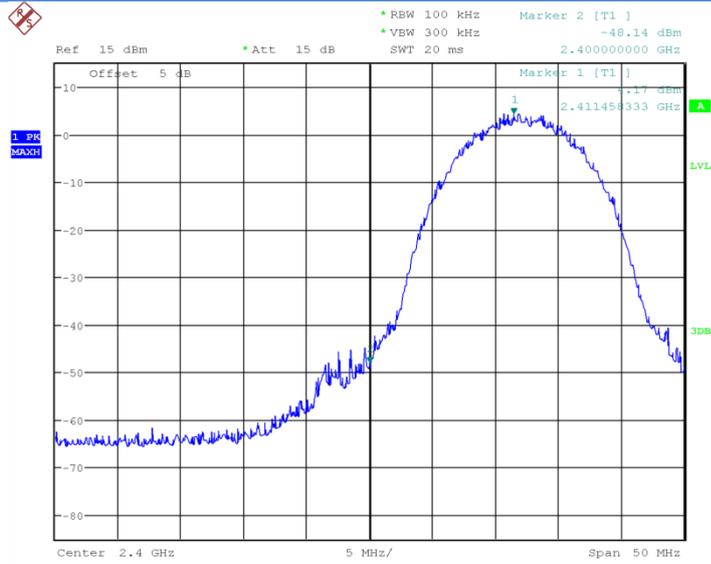


Date: 17.APR.2017 14:54:33

**Fig 25. Band Edges (802.11b, Ch1)**

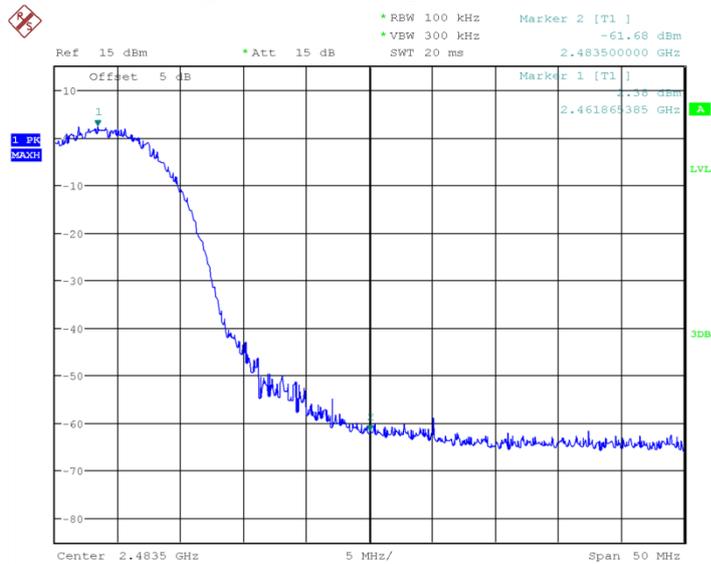


Date: 17.APR.2017 14:55:50

**Fig 26. Band Edges (802.11b, Ch11)**

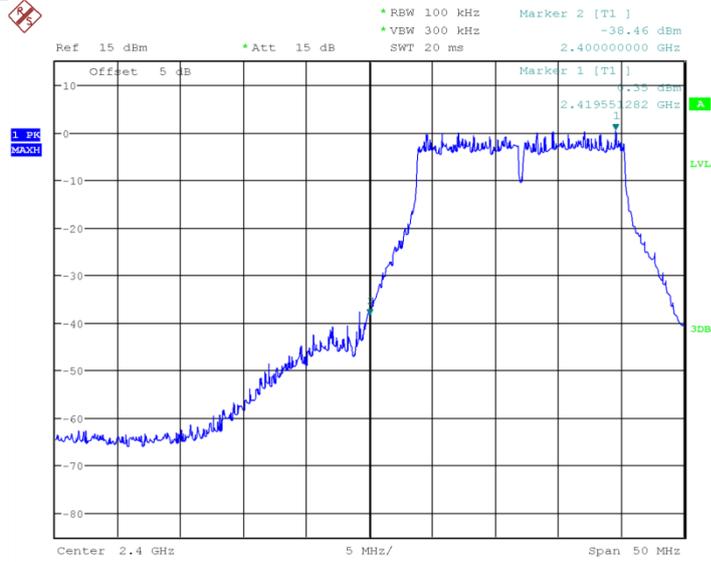


Date: 17.APR.2017 14:56:41

**Fig 27. Band Edges (802.11g, Ch1)**

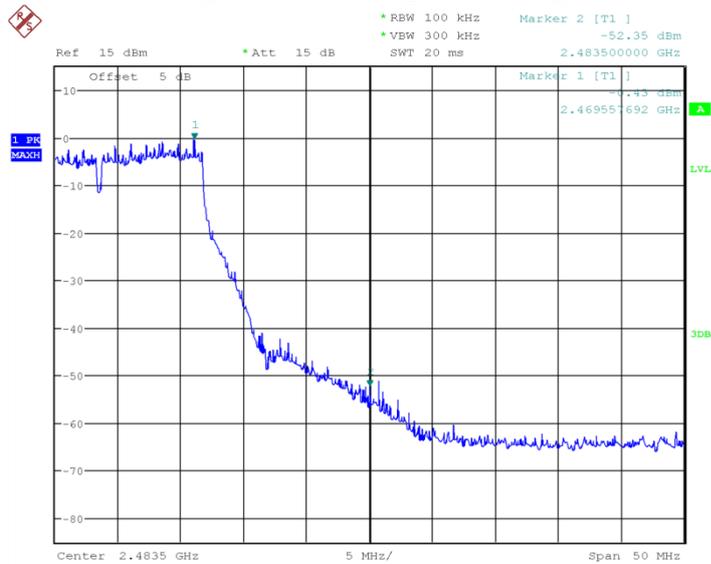


Date: 17.APR.2017 14:57:24

**Fig 28. Band Edges (802.11g, Ch1)**

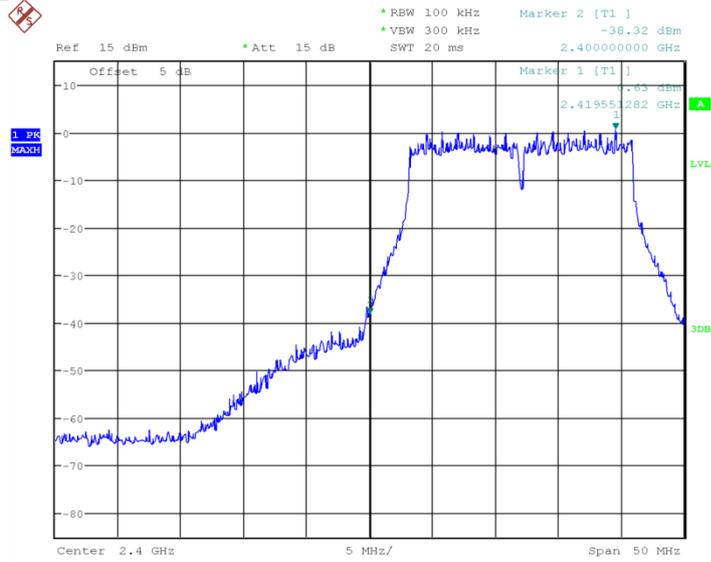


Date: 17.APR.2017 14:57:59

**Fig 29. Band Edges (802.11n-20MHz, Ch1)**

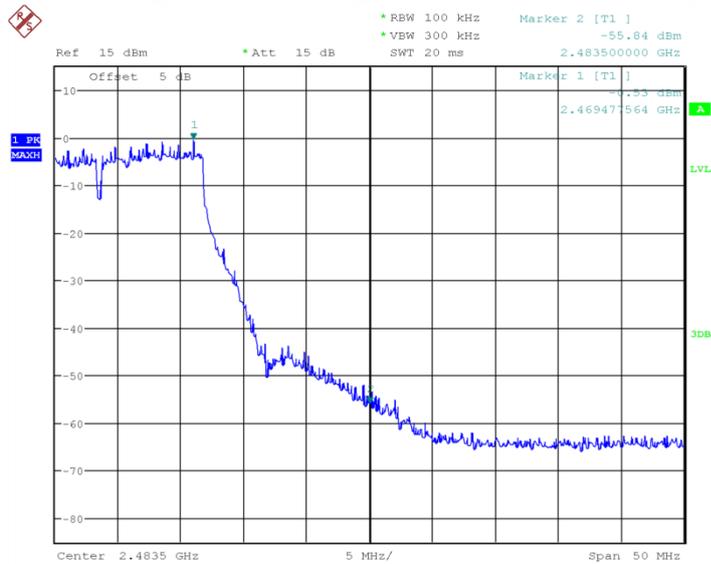


Date: 17.APR.2017 14:58:38

**Fig 30. Band Edges (802.11b-20MHz, Ch11)**

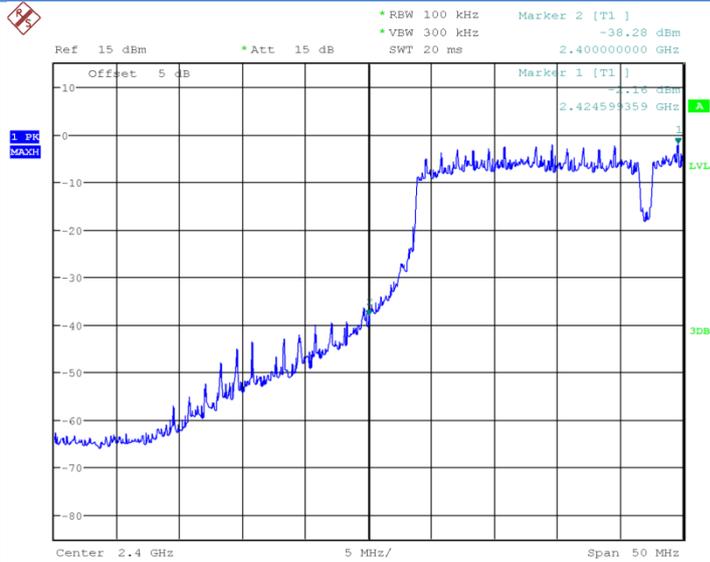

Date: 20.APR.2017 13:50:28

**Fig 31. Band Edges (802.11n-40MHz, Ch3)**

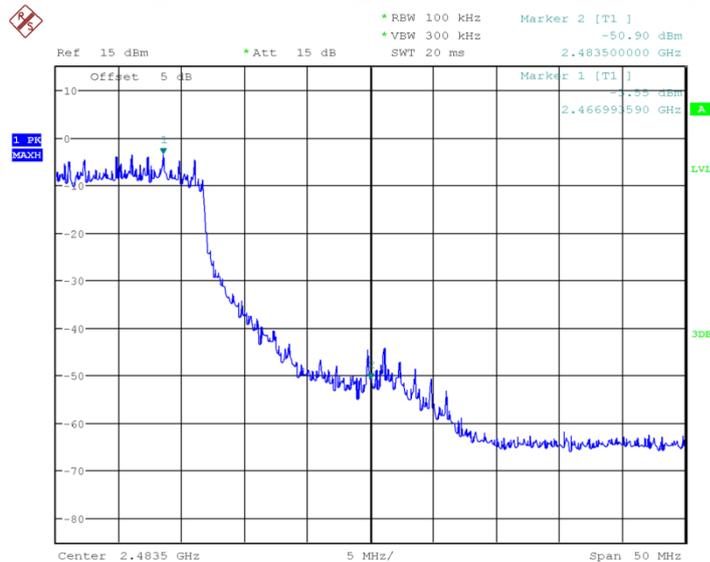

Date: 20.APR.2017 13:51:45

**Fig 32. Band Edges (802.11b-40MHz, Ch9)**

## 6.5. Transmitter Spurious Emission-conducted

### 6.5.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

### 6.5.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to  $\geq 1.5$  times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW  $\geq [3 \times \text{RBW}]$ .
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.

### 6.5.3 Measurement Uncertainty:

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

### 6.5.4 Measurement Result:

#### 802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion

802.11b	1	2.412GHz	Fig 33.	P
		30MHz~26GHz	Fig 34.	P
	6	2.437GHz	Fig 35.	P
		30MHz~26GHz	Fig 36.	P
	11	2.462GHz	Fig 37.	P
		30MHz~26GHz	Fig 38.	P
802.11g	1	2.412GHz	Fig 39.	P
		30MHz~26GHz	Fig 40.	P
	6	2.437GHz	Fig 41.	P
		30MHz~26GHz	Fig 42.	P
	11	2.462GHz	Fig 43.	P
		30MHz~26GHz	Fig 44.	P

**802.11n mode**


Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	1	2.412GHz	Fig 45.	P
		30MHz~26GHz	Fig 46.	P
	6	2.437GHz	Fig 47.	P
		30MHz~26GHz	Fig 48.	P
	11	2.462GHz	Fig 49.	P
		30MHz~26GHz	Fig 50.	P

802.11n(40MHz)	3	2.422GHz	Fig 51.	P
		30MHz~26GHz	Fig 52.	P
	6	2.437GHz	Fig 53.	P
		30MHz~26GHz	Fig 54.	P
	9	2.452GHz	Fig 55.	P

	30MHz~26GHz	Fig 56.	P
--	-------------	---------	---


**Conclusion: PASS**

**Test graphs as below:**

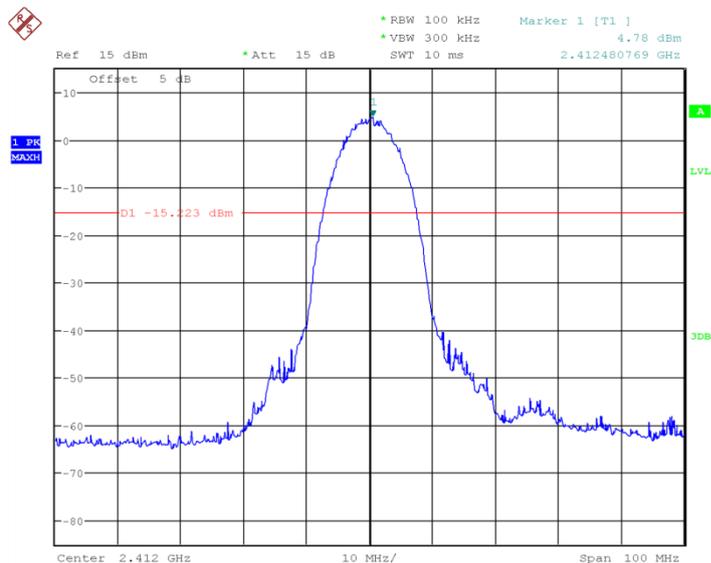


Date: 17.APR.2017 15:00:49

**Fig 33. Conducted Spurious Emission (802.11b, Ch1)**

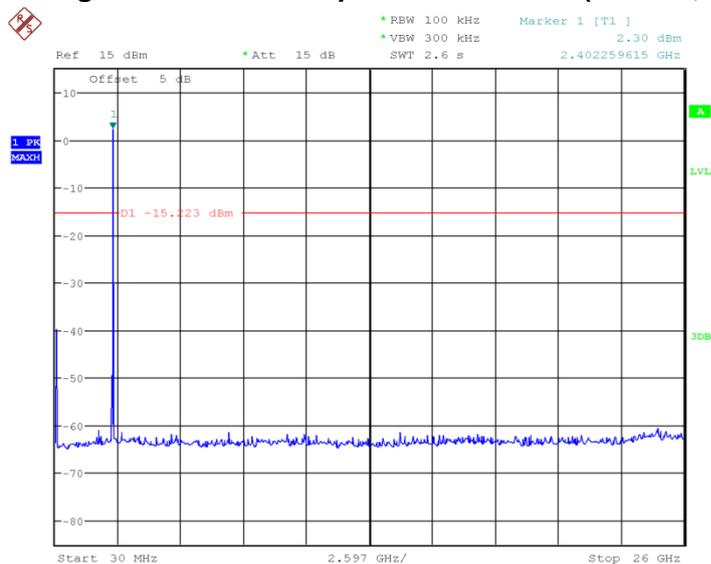


Date: 17.APR.2017 15:01:32

**Fig 34. Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)**

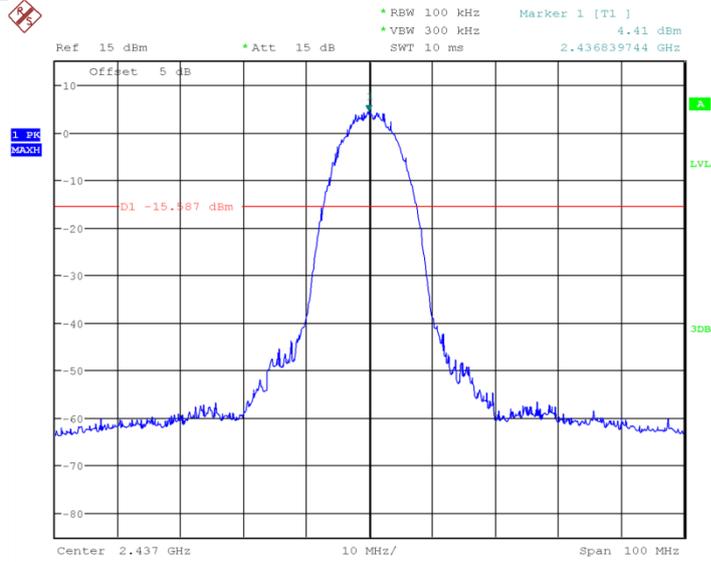


Date: 17.APR.2017 15:02:56

**Fig 35. Conducted Spurious Emission (802.11b, Ch6)**

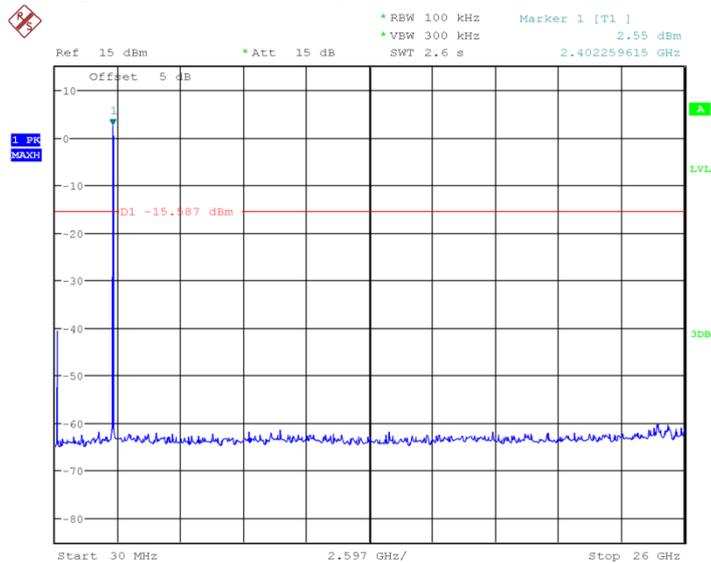


Date: 17.APR.2017 15:03:39

**Fig 36. Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)**

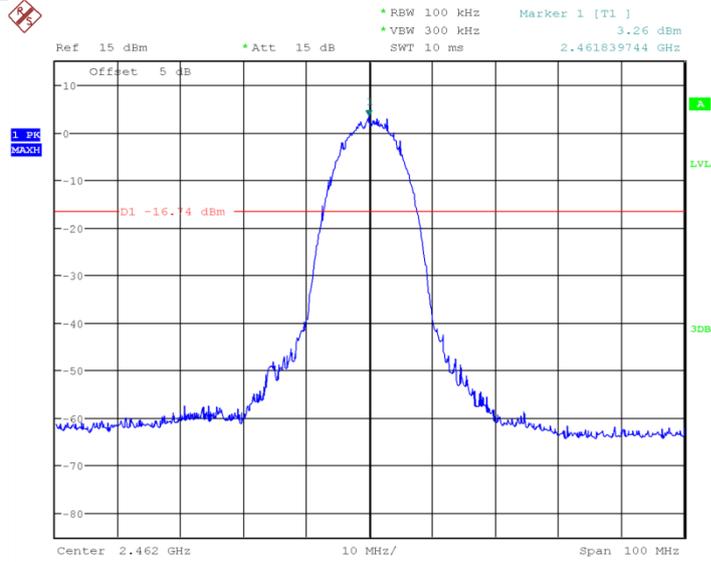


Date: 17.APR.2017 15:04:40

**Fig 37. Conducted Spurious Emission (802.11b, Ch11)**

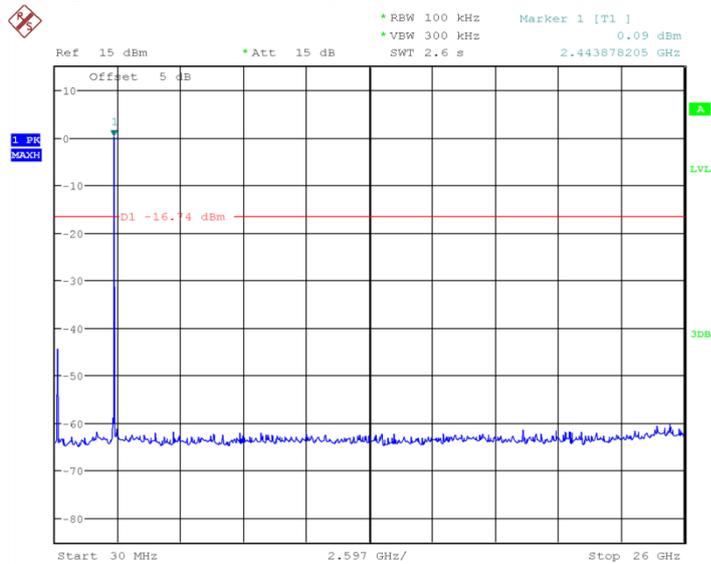


Date: 17.APR.2017 15:05:23

**Fig 38. Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)**

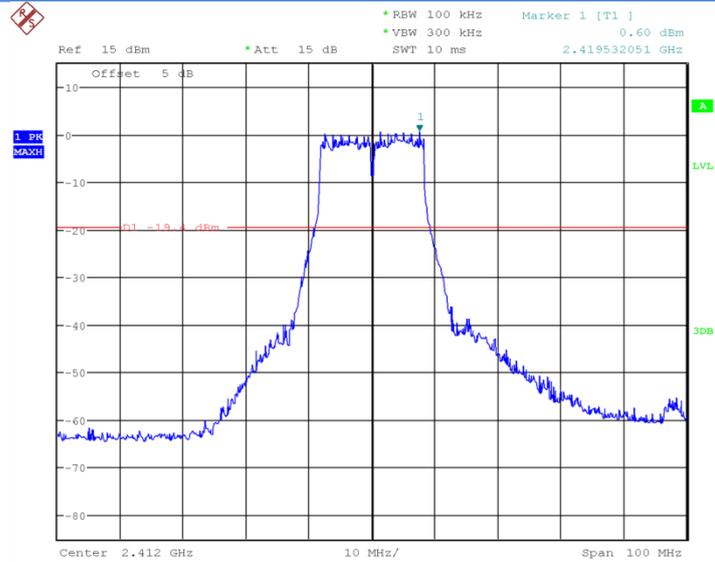


Date: 17.APR.2017 15:06:18

**Fig 39. Conducted Spurious Emission (802.11g, Ch1)**

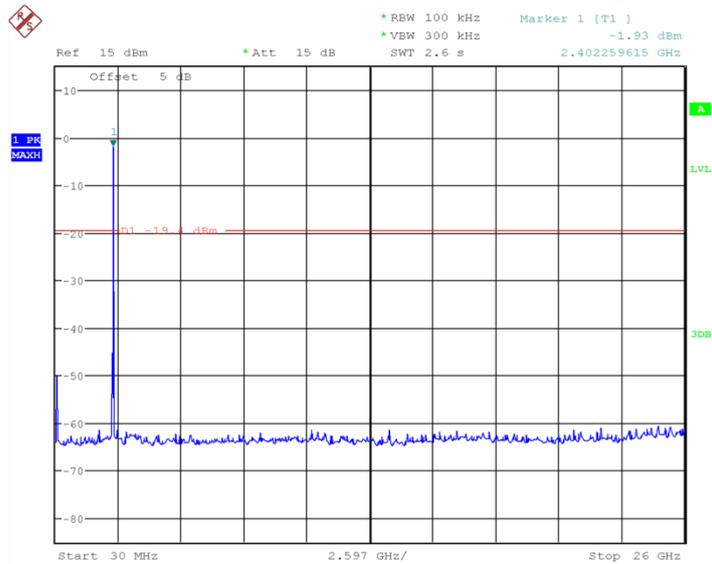


Date: 17.APR.2017 15:07:01

**Fig 40. Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)**

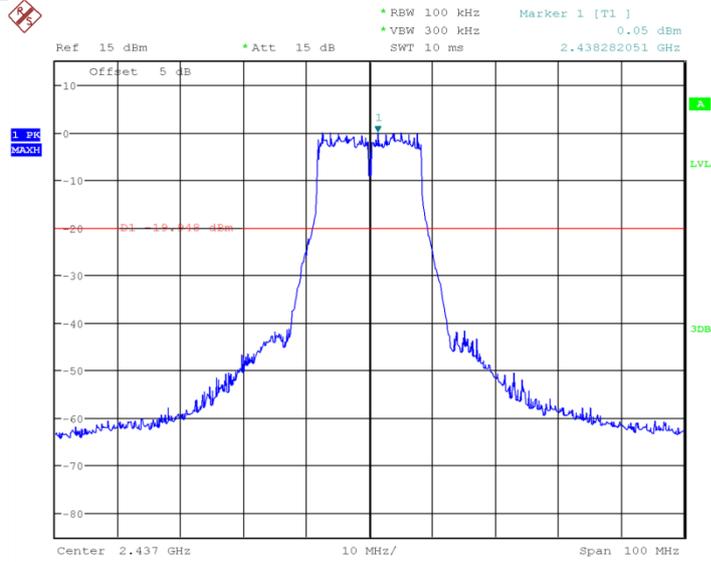


Date: 17.APR.2017 15:29:06

**Fig 41. Conducted Spurious Emission (802.11g, Ch6)**

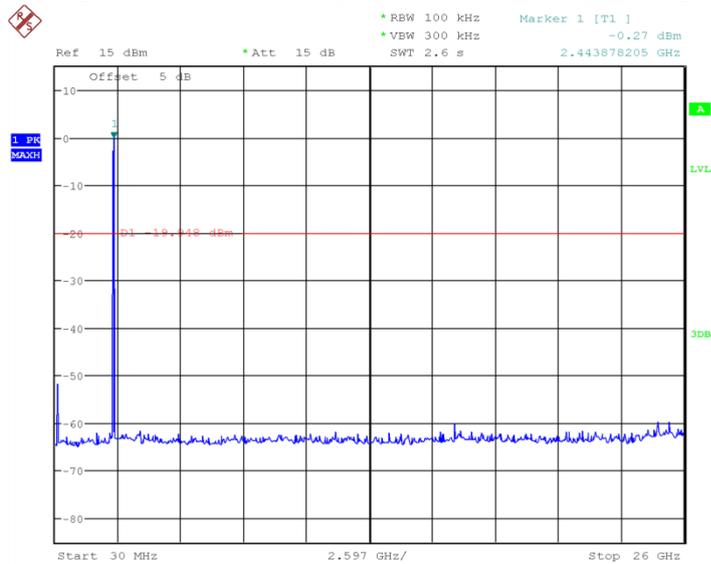


Date: 17.APR.2017 15:29:50

**Fig 42. Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)**

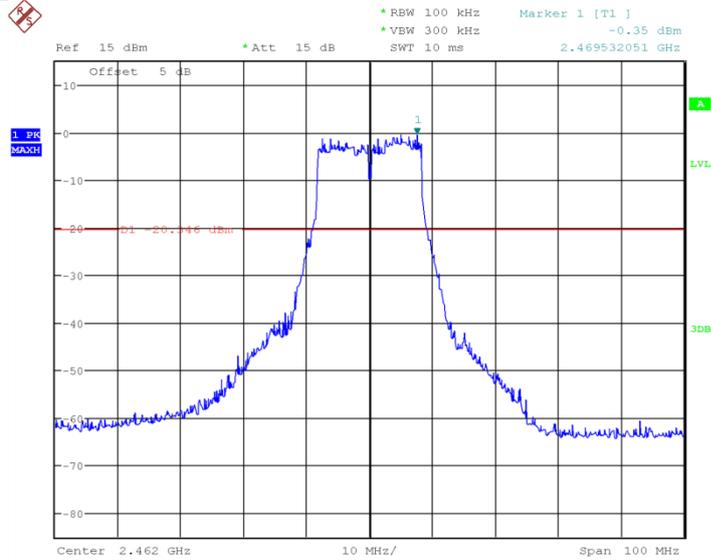


Date: 17.APR.2017 15:31:12

**Fig 43. Conducted Spurious Emission (802.11g, Ch11)**

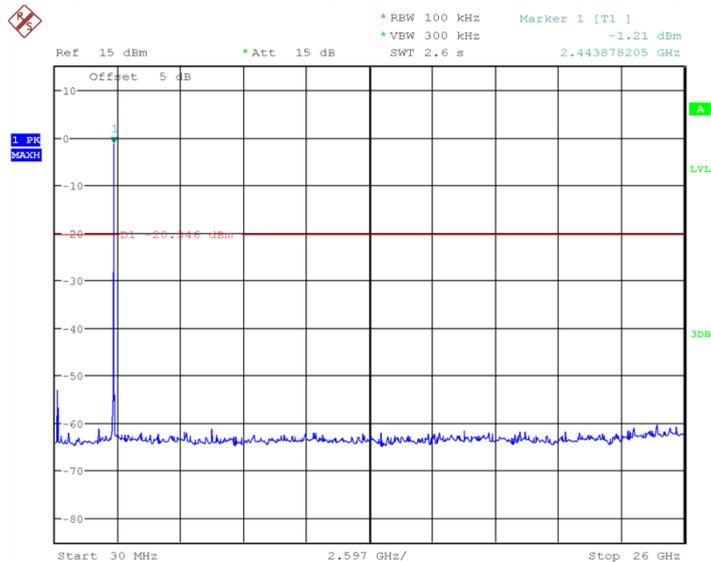


Date: 17.APR.2017 15:31:55

**Fig 44. Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)**

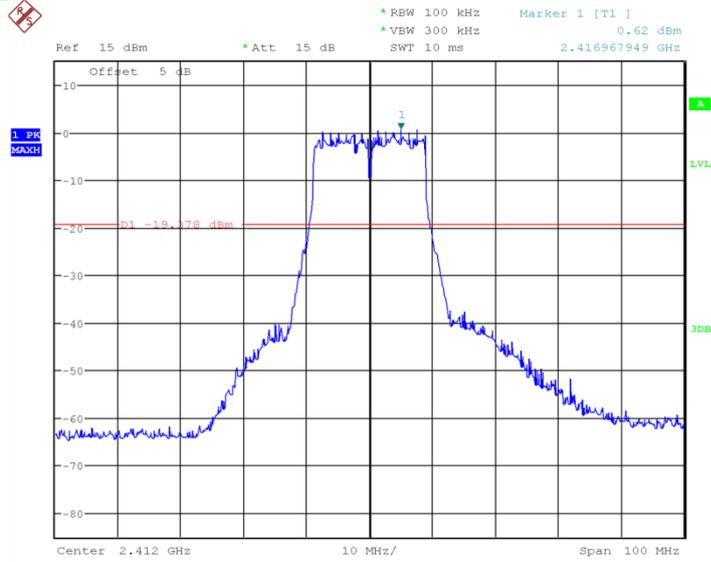


Date: 17.APR.2017 15:33:08

**Fig 45. Conducted Spurious Emission (802.11n-20MHz, Ch1)**

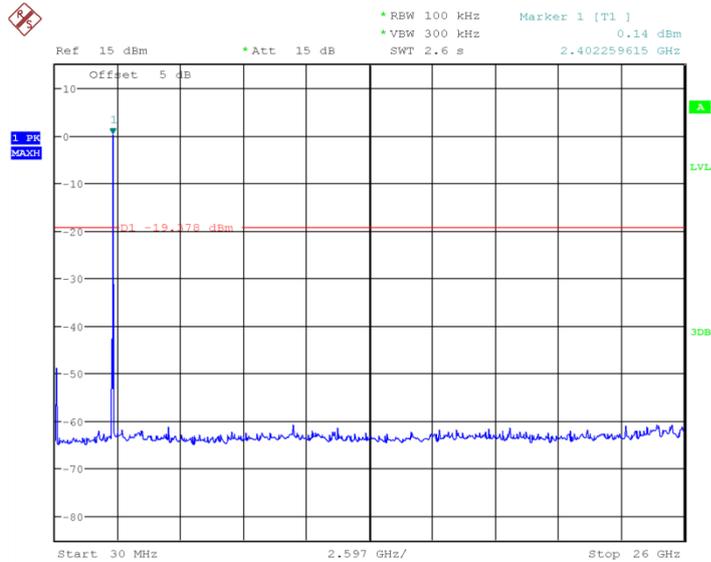


Date: 17.APR.2017 15:33:51

**Fig 46. Conducted Spurious Emission (802.11n-20MHz, Ch1, 30MHz~26GHz)**

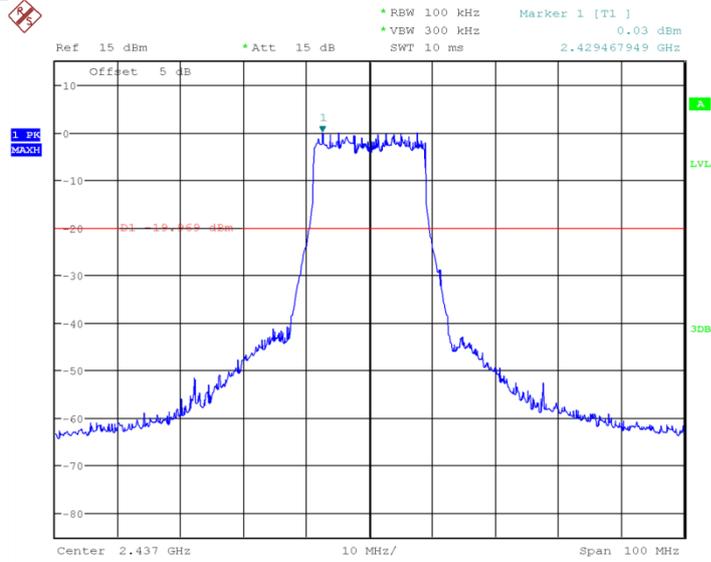


Date: 17.APR.2017 15:35:38

**Fig 47. Conducted Spurious Emission (802.11n-20MHz, Ch6)**

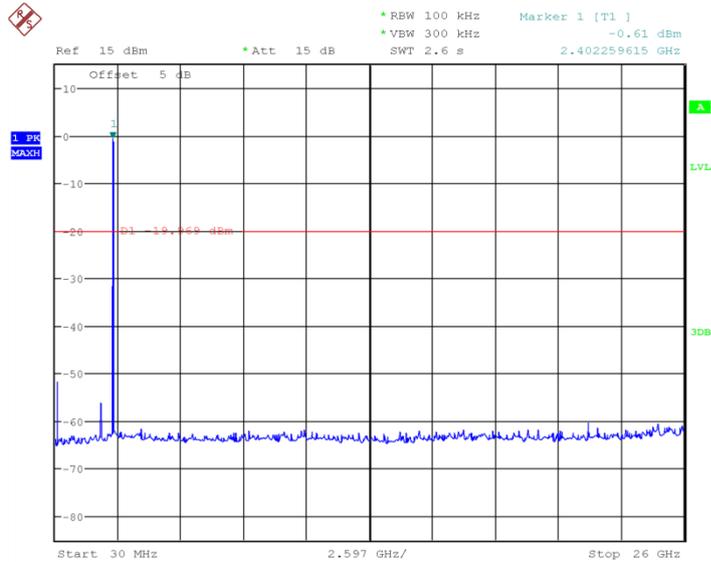


Date: 17.APR.2017 15:36:20

**Fig 48. Conducted Spurious Emission (802.11n-20MHz, Ch6, 30MHz~26GHz)**

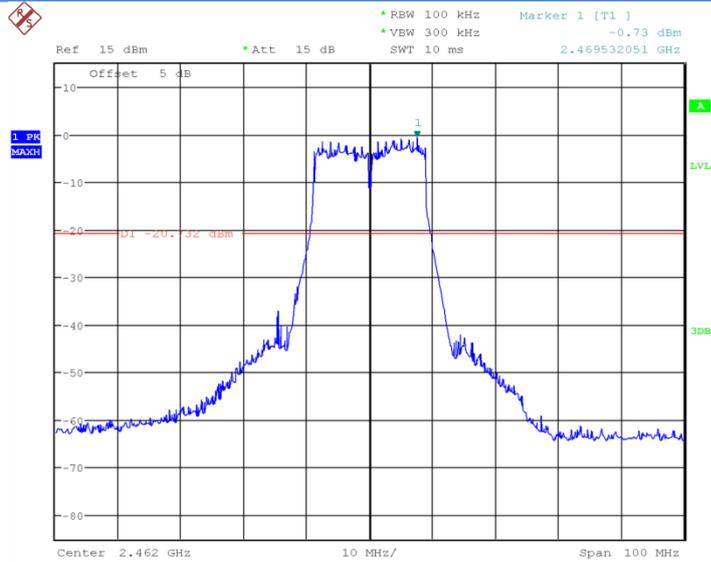


Date: 17.APR.2017 15:37:42

**Fig 49. Conducted Spurious Emission (802.11n-20MHz, Ch11)**

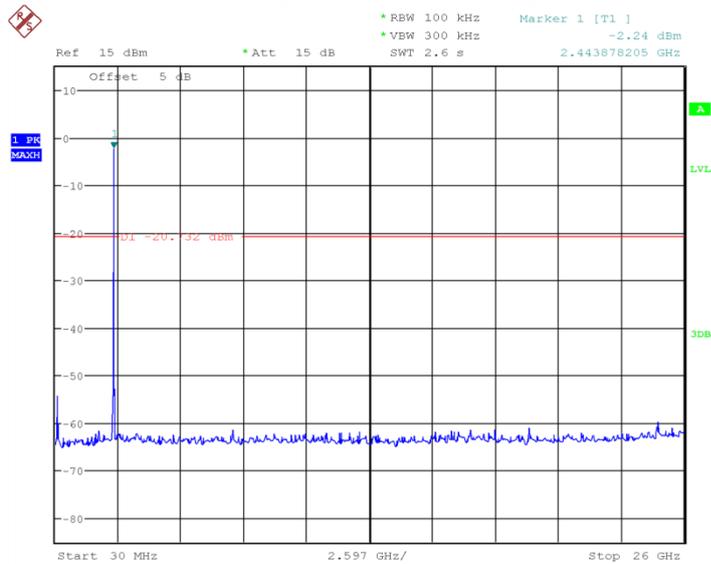


Date: 17.APR.2017 15:38:25

**Fig 50. Conducted Spurious Emission (802.11n-20MHz, Ch11, 30MHz~26GHz)**

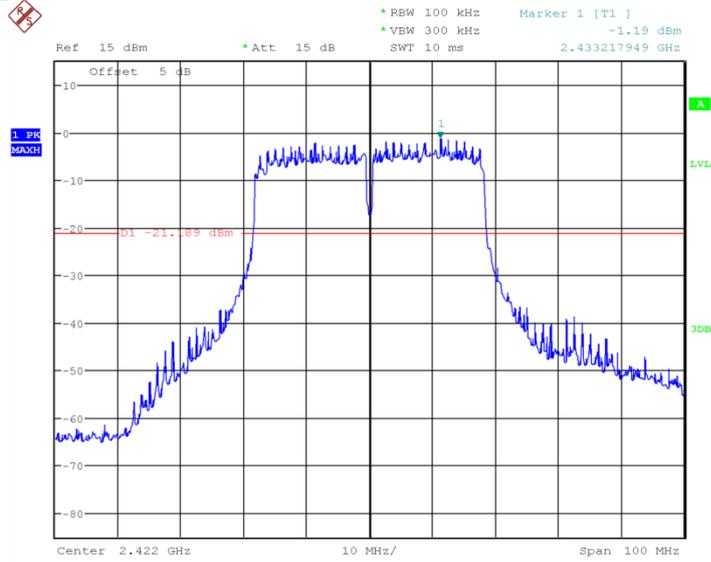


Date: 20.APR.2017 13:52:40

**Fig 51. Conducted Spurious Emission (802.11n-40MHz, Ch3)**

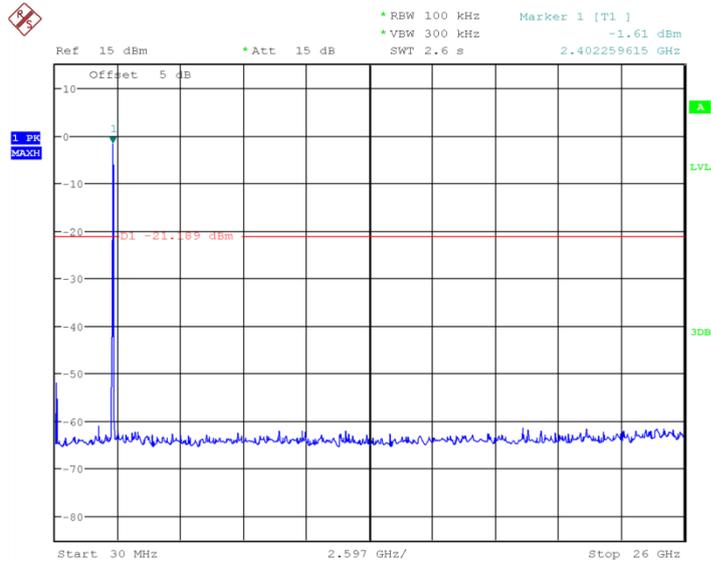


Date: 20.APR.2017 13:53:03

**Fig 52. Conducted Spurious Emission (802.11n-40MHz, Ch3, 30MHz~26GHz)**

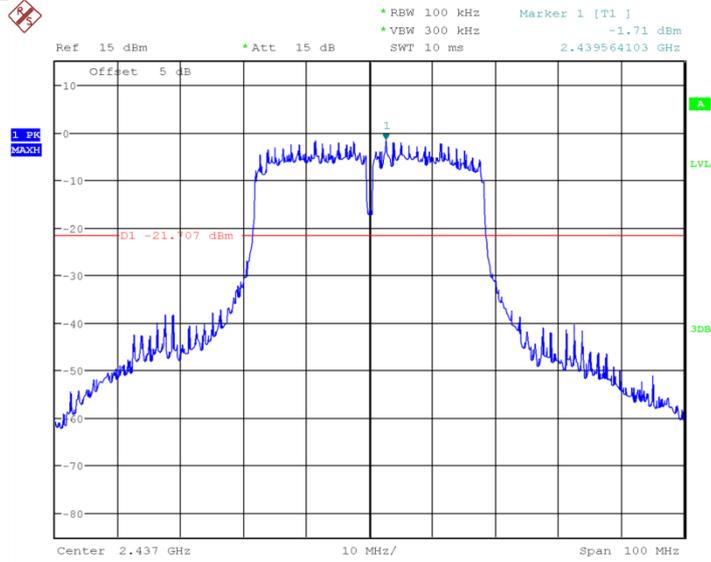


Date: 20.APR.2017 13:53:50

**Fig 53. Conducted Spurious Emission (802.11n-40MHz, Ch6)**

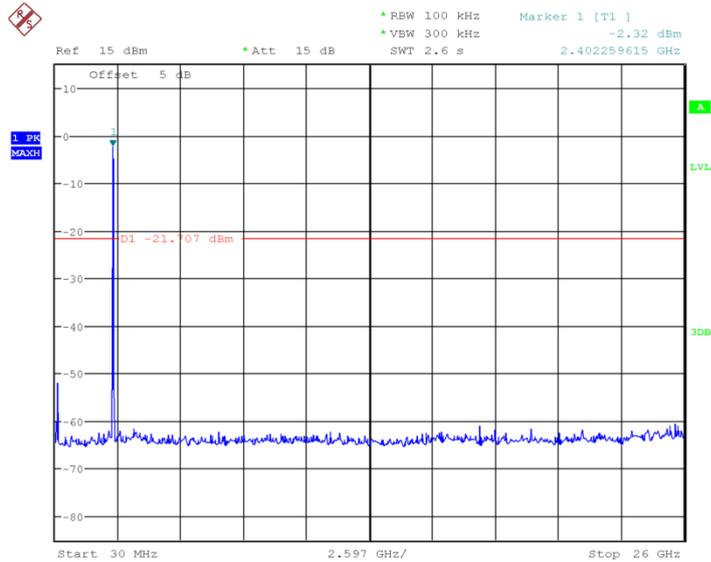


Date: 20.APR.2017 13:54:14

**Fig 54. Conducted Spurious Emission (802.11n-40MHz, Ch6, 30MHz~26GHz)**

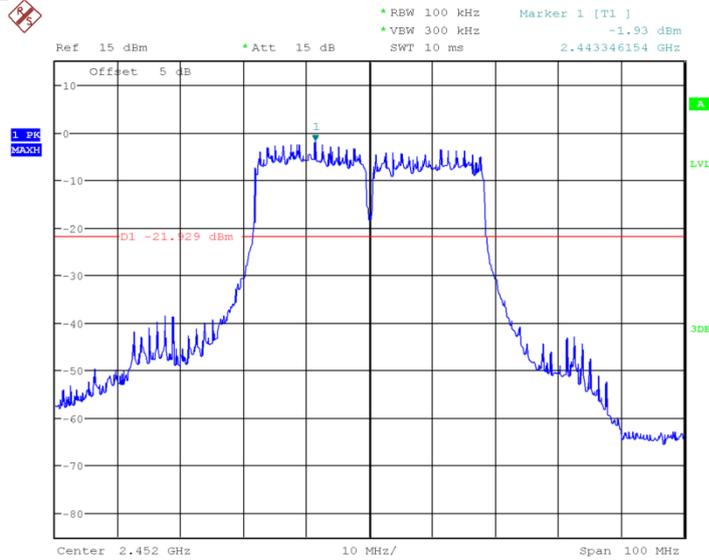

Date: 20.APR.2017 13:56:57

**Fig 55. Conducted Spurious Emission (802.11n-40MHz, Ch9)**

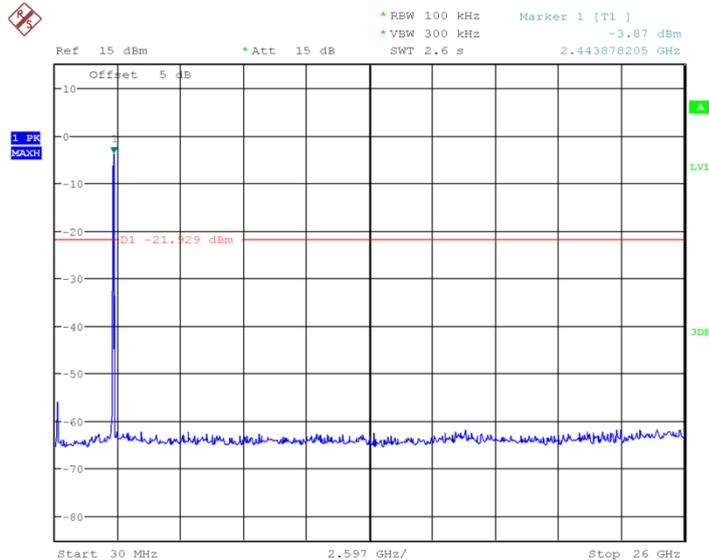

Date: 20.APR.2017 13:57:20

**Fig 56. Conducted Spurious Emission (802.11n-40MHz, Ch9, 30MHz~26GHz)**

## 6.6. Transmitter Spurious Emission-Radiated

### 6.6.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247,15.205,15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a),

must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)). The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

**Measurement Uncertainty:**

Measurement Uncertainty	$\pm 5.82\text{dB}$
-------------------------	---------------------

**6.6.2 Limit in restricted band:**

Frequency of emission(MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Field strength( $\text{dBuV}/\text{m}$ )
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

**6.6.3 Test procedures**

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/1MHz	15
4000~18000	1MHz/1MHz	40
18000~26500	1MHz/1MHz	20

**802.11b/g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz~2.45GHz	Fig 57.	P
	Power	2.45GHz~2.5GHz	Fig 58.	P
	1	30MHz~1GHz	Fig 59.	P
		1GHz~3GHz	Fig 60.	P
		3GHz~18GHz	Fig 61.	P
802.11g	Power	2.38GHz~2.45GHz	Fig 62.	P
	Power	2.45GHz~2.5GHz	Fig 63.	P
	1	30MHz~1GHz	Fig 64.	P
		1GHz~3GHz	Fig 65.	P
		3GHz~18GHz	Fig 66.	P

### 802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(20MHz)	Power	2.38GHz~2.45GHz	Fig 67.	P
	Power	2.45GHz~2.5GHz	Fig 68.	P
	1	30MHz~1GHz	Fig 69.	P
		1GHz~3GHz	Fig 70.	P
		3GHz~18GHz	Fig 71.	P

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n(40MHz)	Power	2.38GHz~2.45GHz	Fig 72.	P
	Power	2.45GHz~2.5GHz	Fig 73.	P
	1	30MHz~1GHz	Fig 74.	P
		1GHz~3GHz	Fig 75.	P
		3GHz~18GHz	Fig 76.	P

**Conclusion: PASS**
**Note:**

A "reference path loss" is established and  $A_{Rpi}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$AR_{pi} = \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain}$

$\text{Result} = P_{Mea} + \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain} = P_{Mea} + AR_{pi}$ .

**NOTE: Only the worst mode wrote in the report**
**802.11b mode**
**Ch1 30MHz~1GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
34.456156	10.84	-26.7	37.54	V
39.202544	15.36	-24.1	39.46	V
44.305056	13.74	-23.5	37.24	V
50.25574	15.21	-23.3	38.51	V
123.434664	3.83	-26.5	30.33	V

**Ch1 1GHz~3GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
2562.705961	53.72	8.5	45.22	V
2668.475769	52.94	9.4	43.54	V
2790.583269	52.82	9.7	43.12	H
2852.145385	53.77	10.8	42.97	H
2907.888077	53.76	10.6	43.16	V
2982.260961	53.94	10.9	43.04	V

**Ch1 3GHz~18GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpi (dB)	PMea(dBuV/m)	Polarity
4984.123867	54.68	1	53.68	V
8992.917133	64.69	8.3	56.39	H
14295.362	55.3	20.7	34.6	H

14904.64233	56.49	22.2	34.29	V
15835.0162	58.28	24.7	33.58	H
16486.28267	59.56	26.8	32.76	V

**Ch1 3GHz~18GHz (Average)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4984.123867	36.16	1	35.16	V
8992.917133	45.29	8.3	36.99	H
14295.362	42.79	20.7	22.09	H
14904.64233	44.13	22.2	21.93	V
15835.0162	45.8	24.7	21.1	H
16486.28267	47.03	26.8	20.23	V

**802.11g**
**Ch1 30MHz~1GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
34.643684	8.65	-26.7	35.35	V
59.857492	23.91	-24.3	48.21	V
210.822768	26.12	-24.2	50.32	H
438.785376	31	-17.1	48.1	H
546.081612	30.16	-14.9	45.06	H
900.044112	34.56	-9.2	43.76	H

**Ch1 1GHz~3GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2523.725	54.34	8.3	46.04	H
2675.488846	52.66	9.4	43.26	H
2815.71	54.36	10.1	44.26	H
2847.5325	54.48	10.7	43.78	H



## RF Test Report

Report No.: I17D00058-WLA

2923.985	53.8	10.6	43.2	H
2996.455192	57.93	11.1	46.83	H

### Ch1 1GHz~3GHz(Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2523.725	41.76	8.3	33.46	H
2815.71	42.05	10.1	31.95	H
2847.5325	42.48	10.7	31.78	H
2996.455192	41.59	11.1	30.49	H

### Ch1 3GHz~18GHz(Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4984.123867	54.68	1	53.68	V
8992.917133	64.69	8.3	56.39	H
14295.362	55.3	20.7	34.6	H
14904.64233	56.49	22.2	34.29	V
15835.0162	58.28	24.7	33.58	H
16486.28267	59.56	26.8	32.76	V

### Ch1 3GHz~18GHz(Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4984.123867	36.16	1	35.16	V
8992.917133	45.29	8.3	36.99	H
14295.362	42.79	20.7	22.09	H
14904.64233	44.13	22.2	21.93	V
15835.0162	45.8	24.7	21.1	H
16486.28267	47.03	26.8	20.23	V

### 802.11n-20MHz

#### Ch1 30MHz~1GHz(Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------



## RF Test Report

Report No.: I17D00058-WLA

32.327272	19.21	-26.3	45.51	V
60.955076	13.82	-24.6	38.42	H
305.064328	27.95	-21	48.95	H
444.116836	29.46	-17	46.46	H
805.457608	32.3	-10.8	43.1	H
928.665272	31.83	-8.6	40.43	H

### Ch1 1GHz~3GHz(Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2597.65	53.51	8.7	44.81	H
2632.224808	53.13	9.1	44.03	V
2748.902884	53.18	9.4	43.78	H
2862.173654	53.13	10.7	42.43	V
2924.098077	53.09	10.6	42.49	H
2990.092693	59.18	11.1	48.08	H

### Ch1 1GHz~3GHz(Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2990.092693	41.88	11.1	30.78	H

### Ch1 3GHz~18GHz(Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4990.6052	51.79	1	50.79	H
9959.452733	57.65	8.7	48.95	V
14327.1392	55.39	20.5	34.89	V
16217.62213	58.83	25.6	33.23	V
16795.61607	59.77	27.3	32.47	H
17619.143	61.95	29.4	32.55	H

### Ch1 3GHz~18GHz(Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
----------------	----------------	-----------	--------------	----------

9959.452733	38.26	8.7	29.56	V
14327.1392	42.97	20.5	22.47	V
16217.62213	46.72	25.6	21.12	V
16795.61607	47.04	27.3	19.74	H
17619.143	50.2	29.4	20.8	H

**802.11n-40MHz**
**Ch1 30MHz~1GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
209.962752	24.16	-24.3	48.46	H
318.258152	27.23	-20.4	47.63	H
441.605296	29.56	-17.1	46.66	H
608.63386	28.55	-13.5	42.05	H
793.79864	31.98	-11.1	43.08	H
903.22832	32.52	-9.2	41.72	H

**Ch1 1GHz~3GHz(Peak)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2643.332115	53.75	9.3	44.45	H
2692.928653	54.05	9.4	44.65	H
2796.968077	53.61	9.7	43.91	H
2922.005384	53.05	10.6	42.45	H
2946.049423	54	10.5	43.5	H
2998.13936	56.31	11.2	45.11	H

**Ch1 1GHz~3GHz(Average)**

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2692.928653	41.22	9.4	31.82	H
2946.049423	41.85	10.5	31.35	H
2998.13936	41.56	11.2	30.36	H


### Ch1 3GHz~18GHz(Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4994.572733	50.72	1	49.72	H
10000.25967	59.25	8.7	50.55	V
15440.20207	57.08	23.3	33.78	H
16207.69033	59.04	25.7	33.34	H
16826.50113	59.36	27.3	32.06	V
17614.46533	61.77	29.4	32.37	V


### Ch1 3GHz~18GHz(Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
10000.25967	38.67	8.7	29.97	V
15440.20207	44.47	23.3	21.17	H
16207.69033	47.17	25.7	21.47	H
16826.50113	47.5	27.3	20.2	V
17614.46533	49.75	29.4	20.35	V

### Test graphs as below:

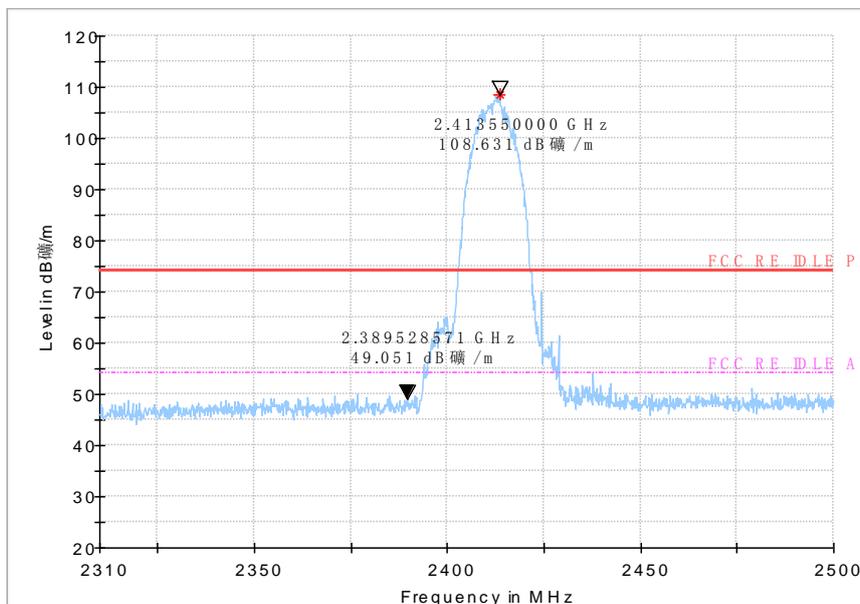


## Peak detector

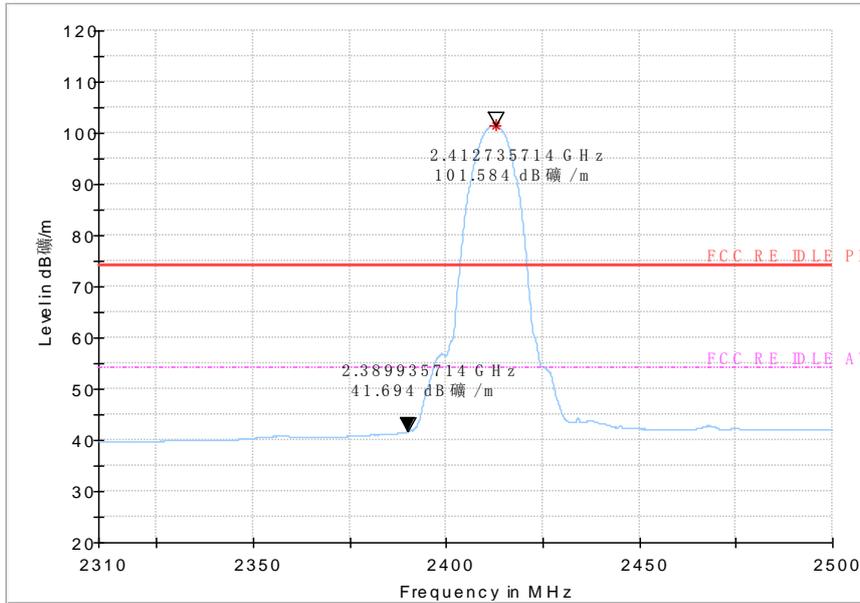


## Average detector

Fig 57. Radiated emission (Power): 802.11b, low channel

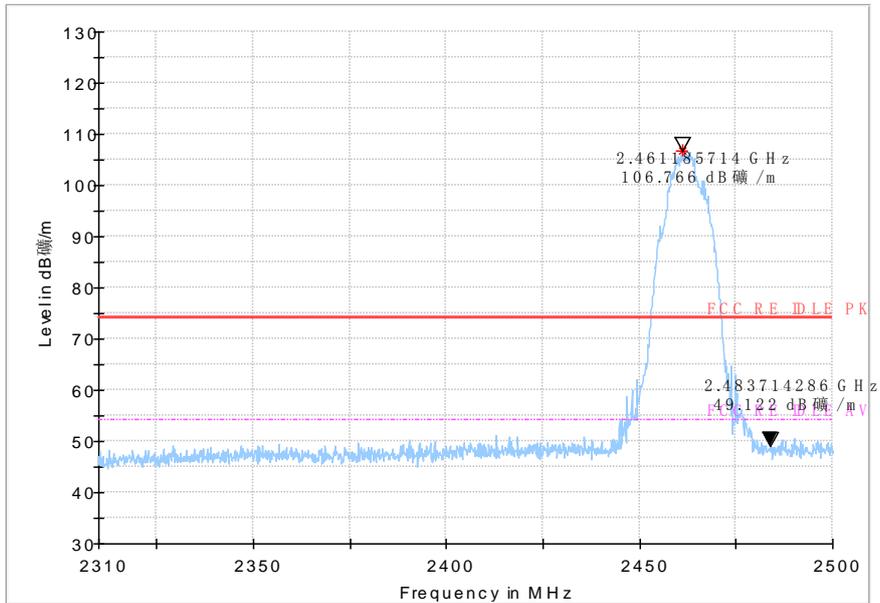


## Peak detector

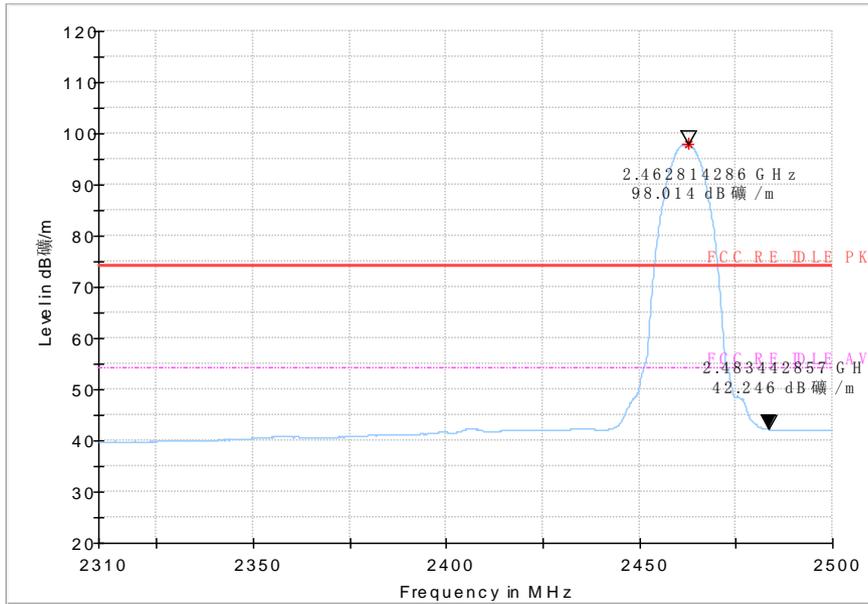


Average detector


**Fig 58. Radiated emission (Power): 802.11b, high channel**

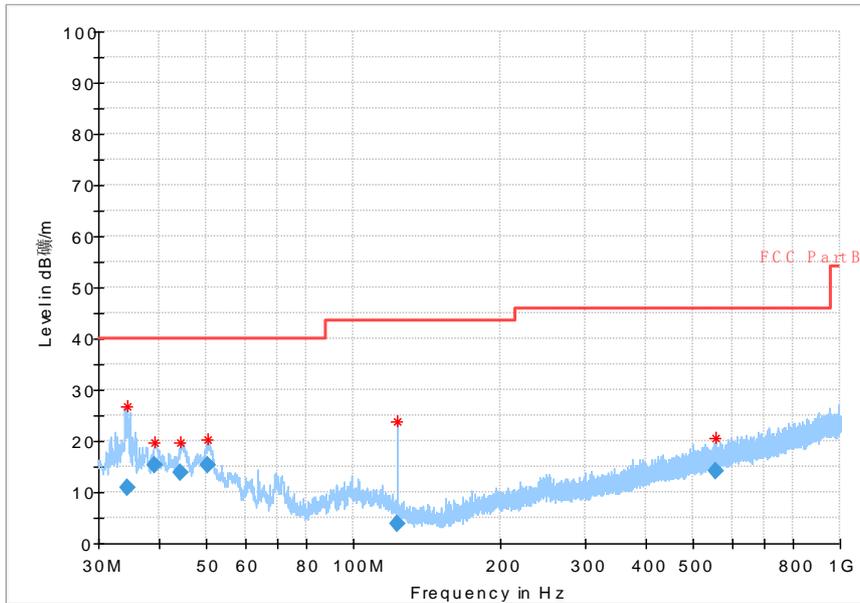


**Fig 59. Radiated Spurious Emission (802.11b,Ch1,30MHz~1GHz)**

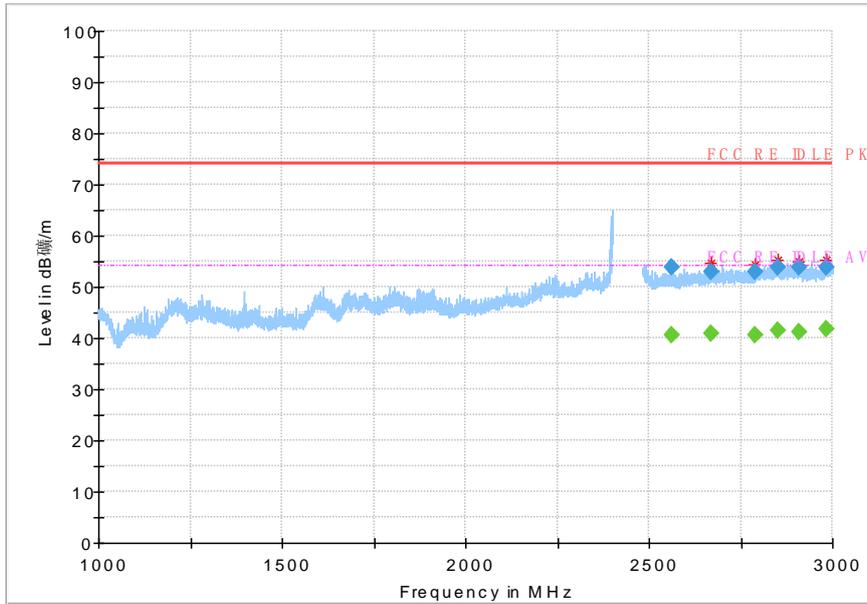


**Fig 60. Radiated Spurious Emission (802.11b,Ch1,1GHz~3GHz)**

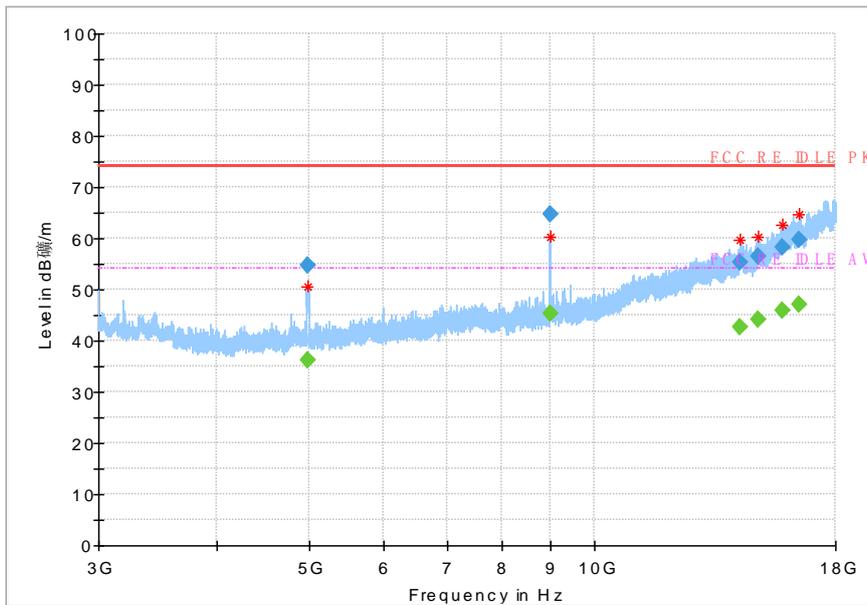

**Fig 61. Radiated Spurious Emission (802.11b,Ch1,3GHz~18GHz)**

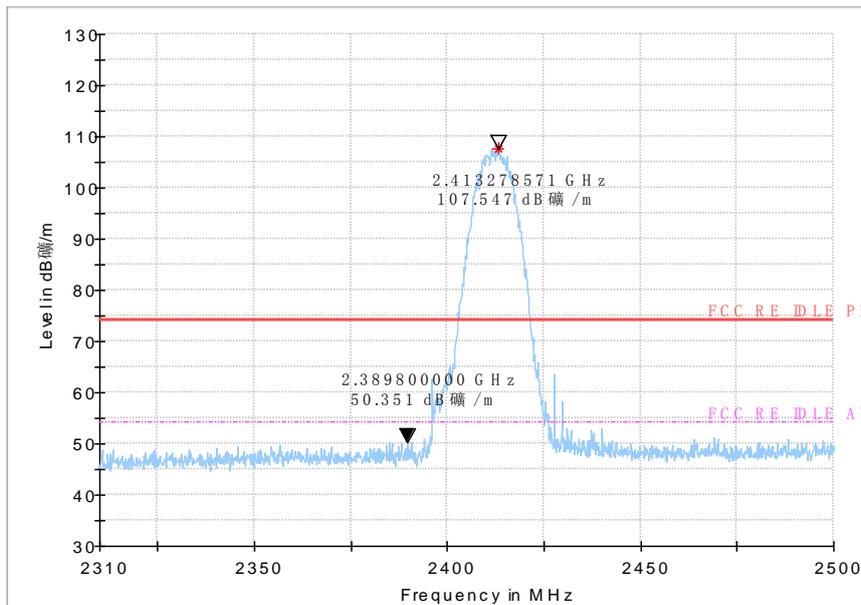


**Peak detector**

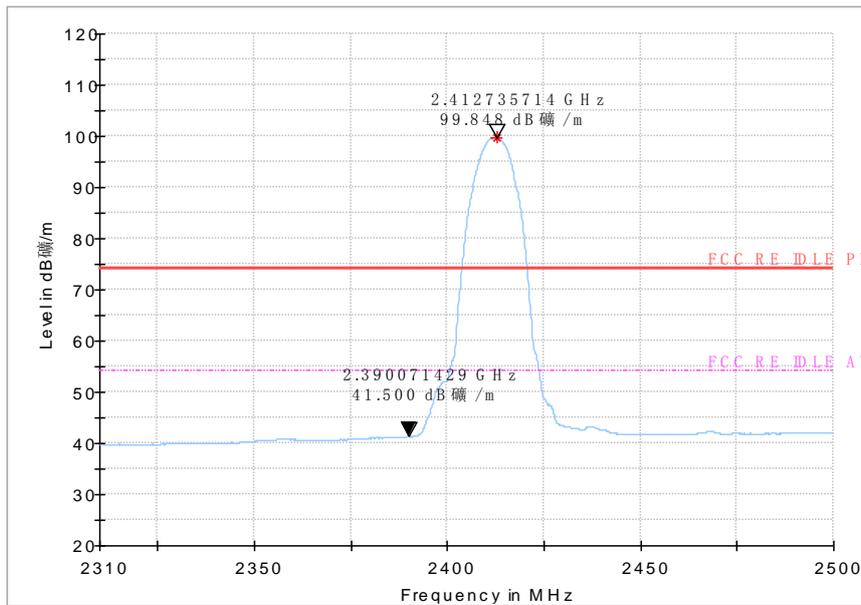


**Average detector**

**Fig 62. Radiated emission (Power): 802.11g, low channel**

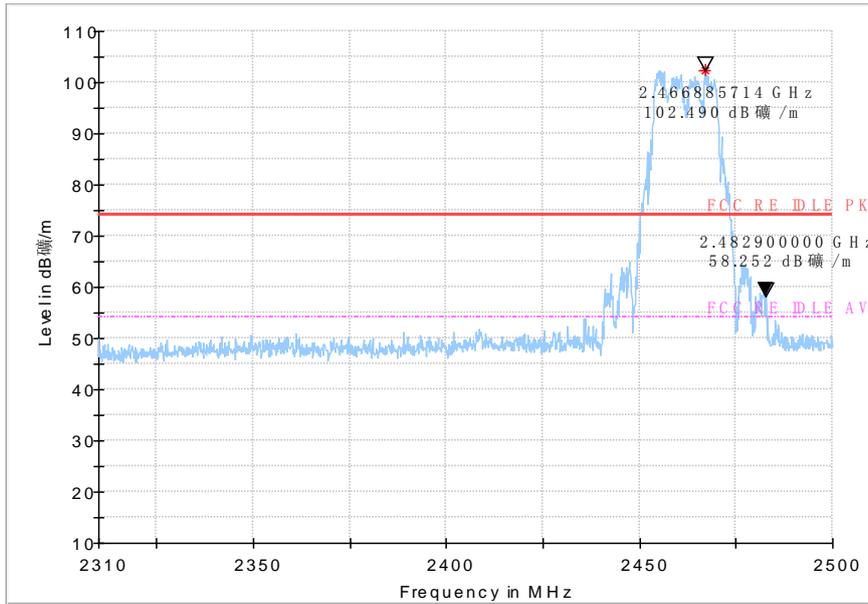


**Peak detector**

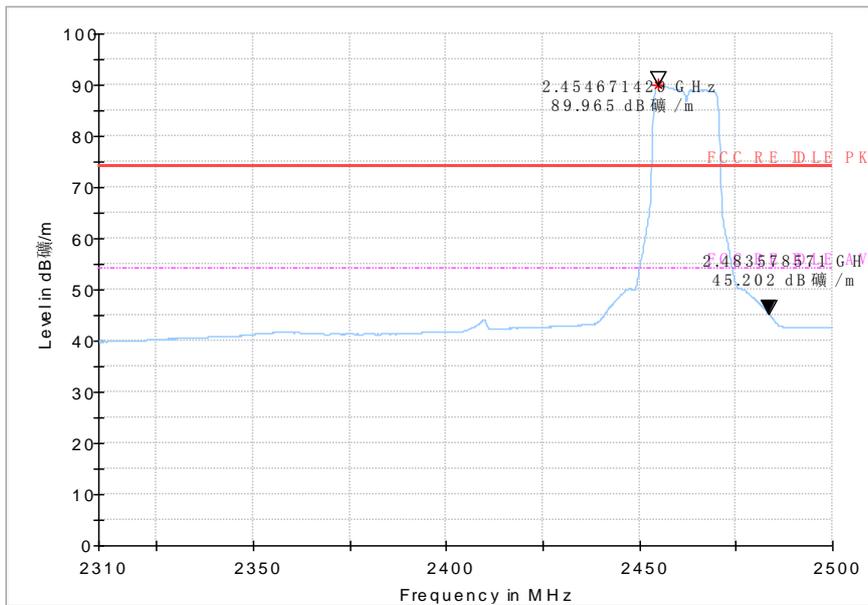


**Average detector**


**Fig 63. Radiated emission (Power): 802.11g, high channel**

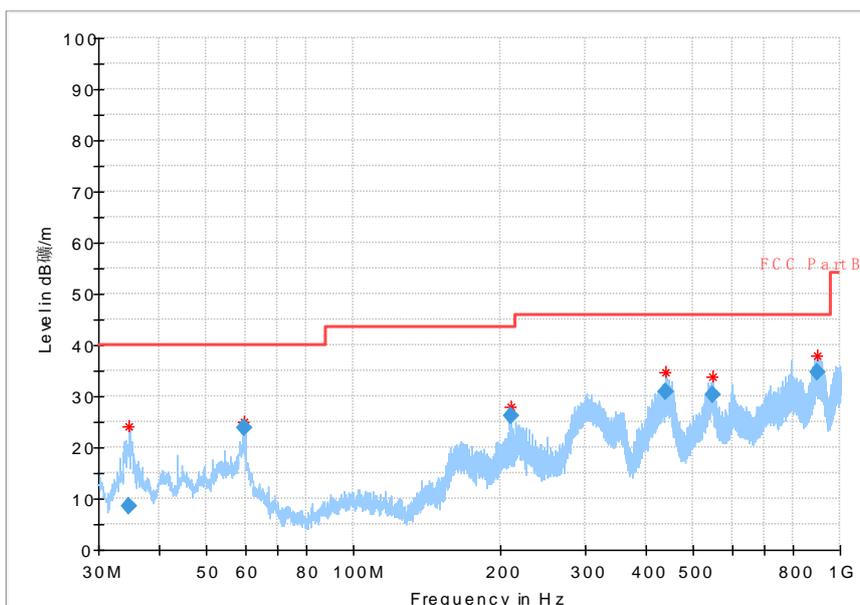


**Fig 64. Radiated Spurious Emission (802.11g,Ch1,30MHz~1GHz)**

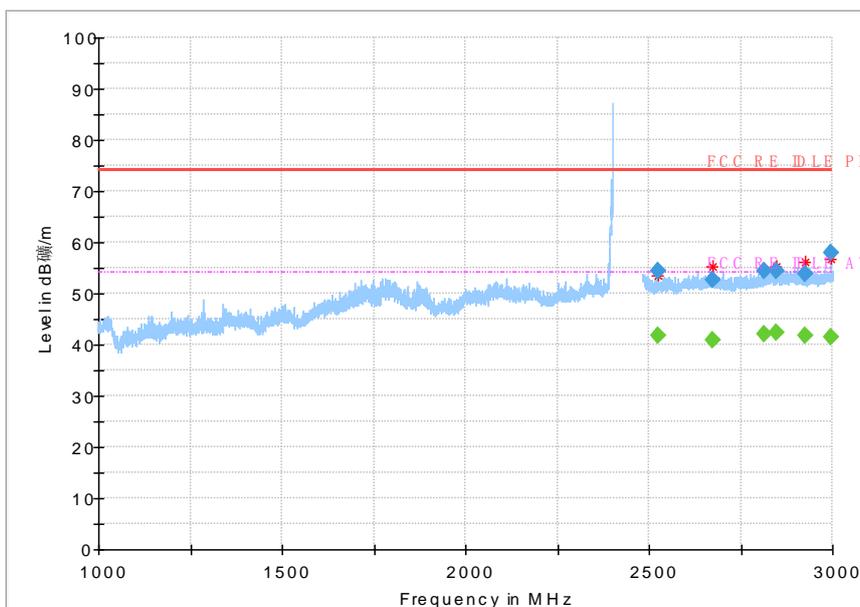


**Fig 65. Radiated Spurious Emission (802.11g,Ch1,1GHz~3GHz)**

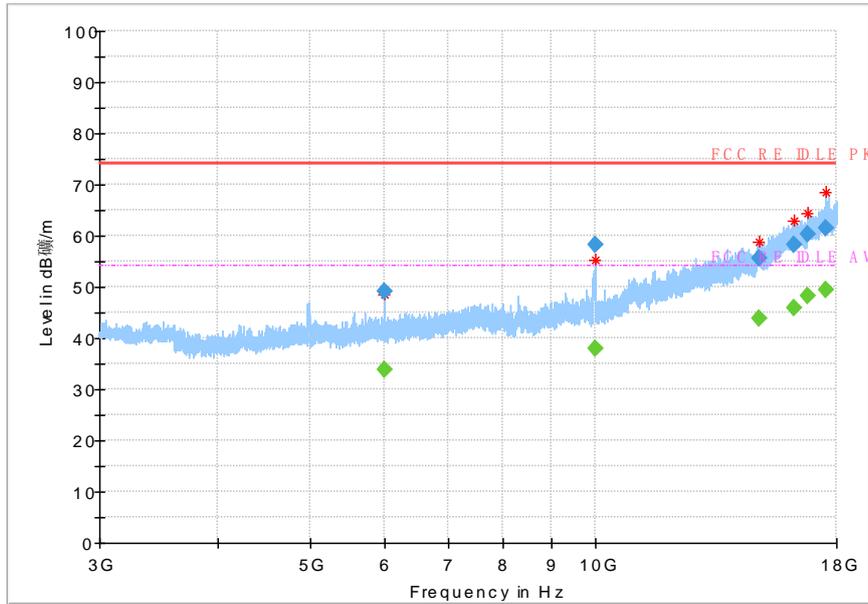

**Fig 66. Radiated Spurious Emission (802.11g,Ch1,3GHz~18GHz)**

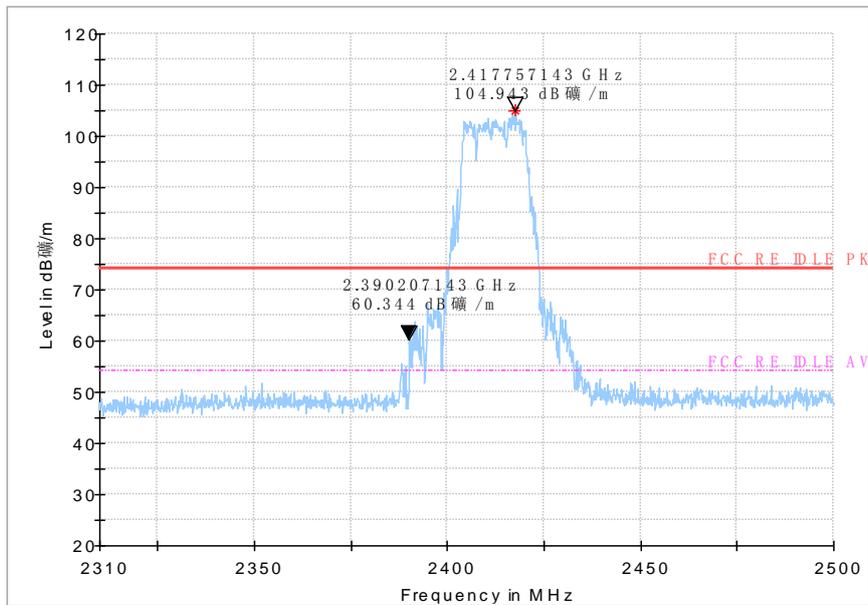


**Peak detector**

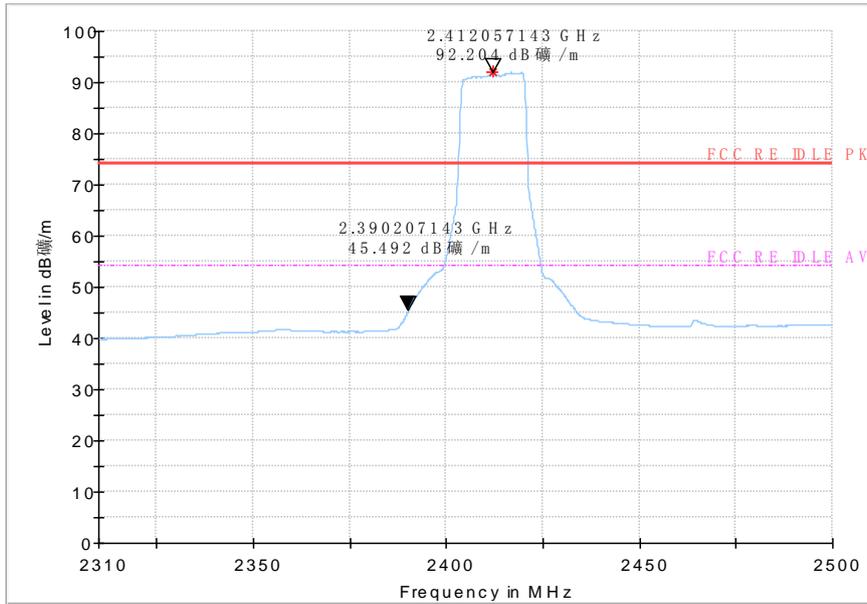


**AV detector**

**Fig 67. Radiated emission (Power): 802.11n (20M) , low channel**

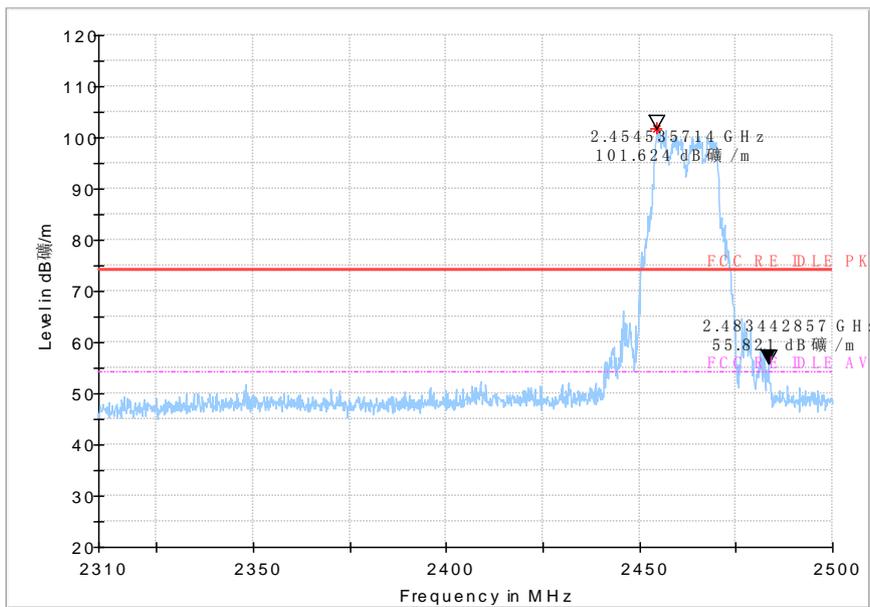


**Peak detector**

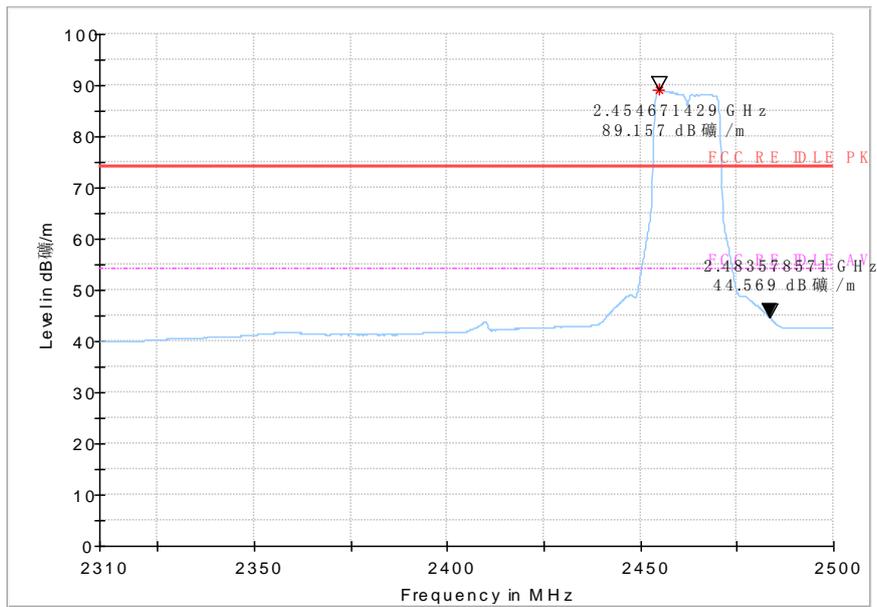


**AV detector**


**Fig 68. Radiated emission (Power): 802.11n (20M) , high channel**

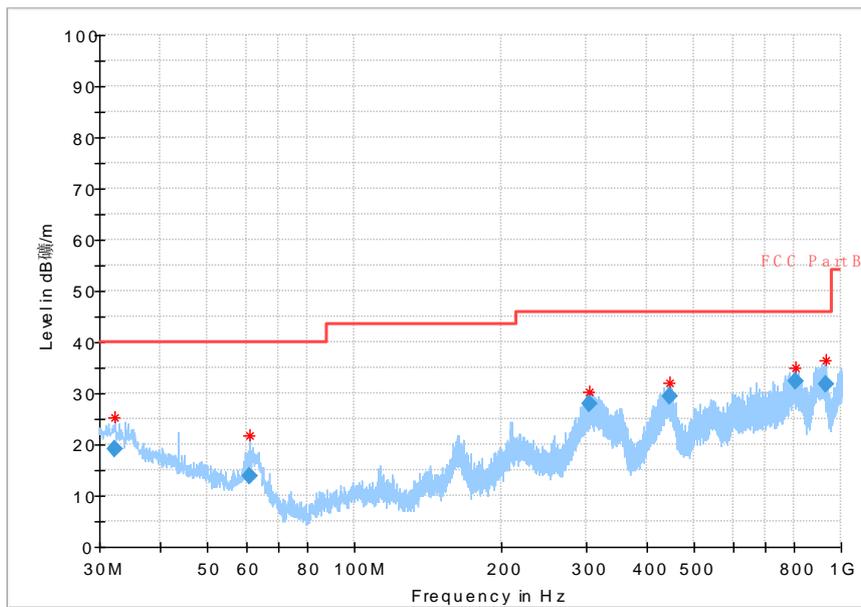


**Fig 69. Radiated Spurious Emission (802.11 n-20MHz,Ch1,30MHz~1GHz)**

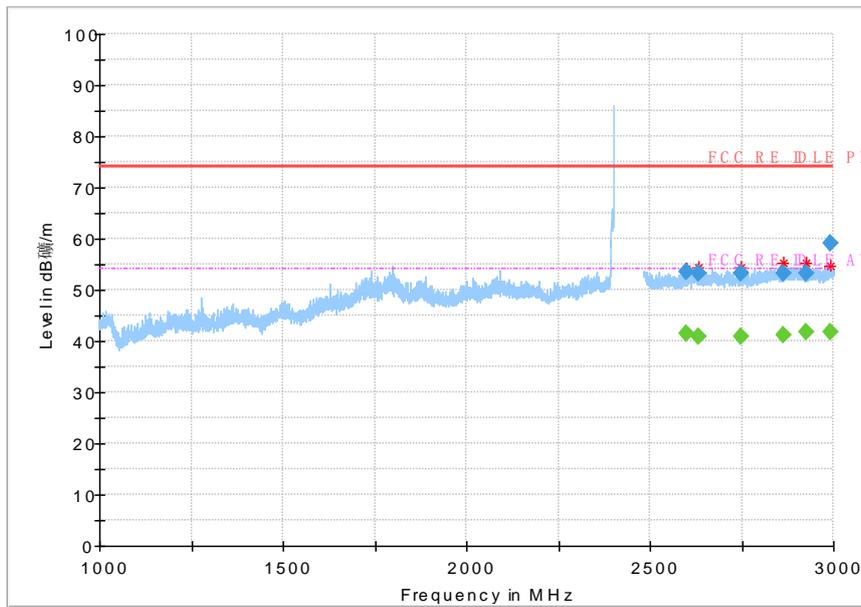


**Fig 70. Radiated Spurious Emission (802.11 n-20MHz,Ch1,1GHz~3GHz)**

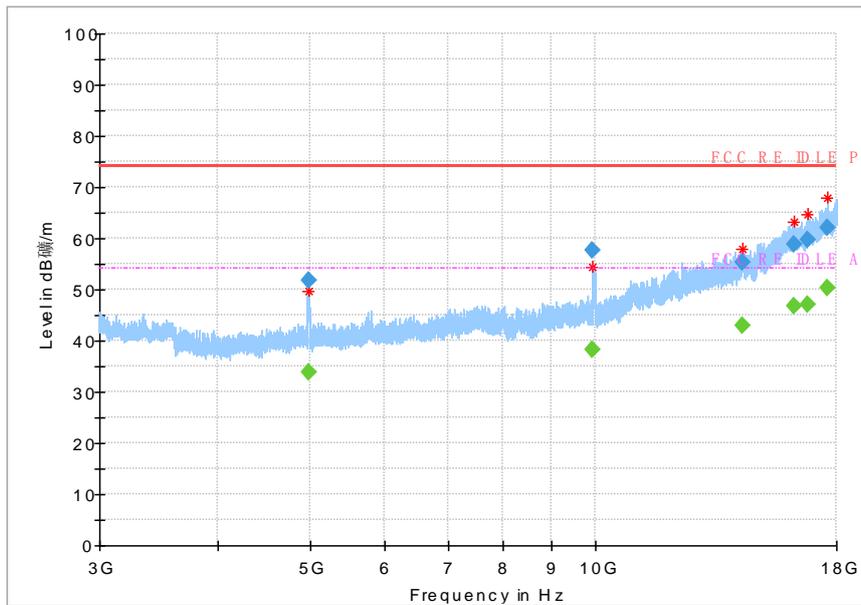

**Fig 71. Radiated Spurious Emission (802.11 n-20MHz,Ch1,3GHz~18GHz)**

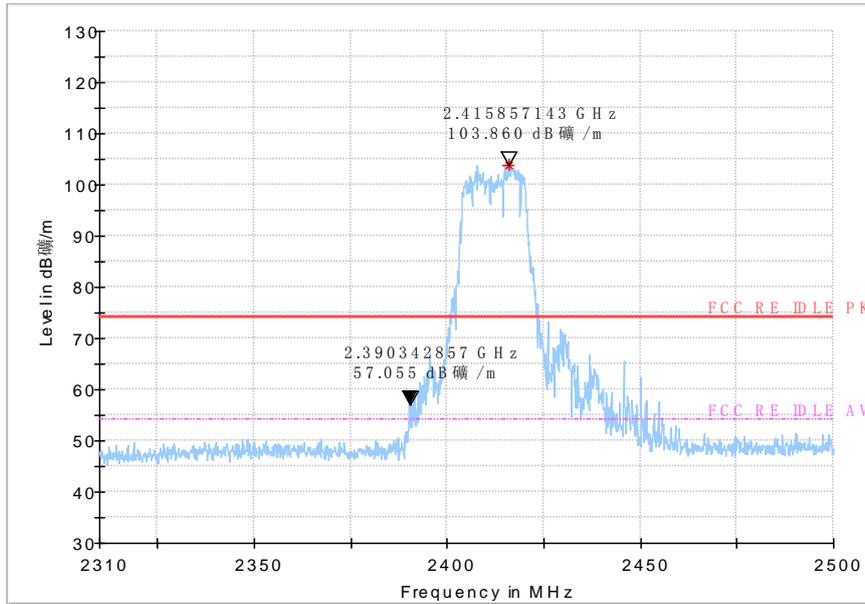


**Peak detector**

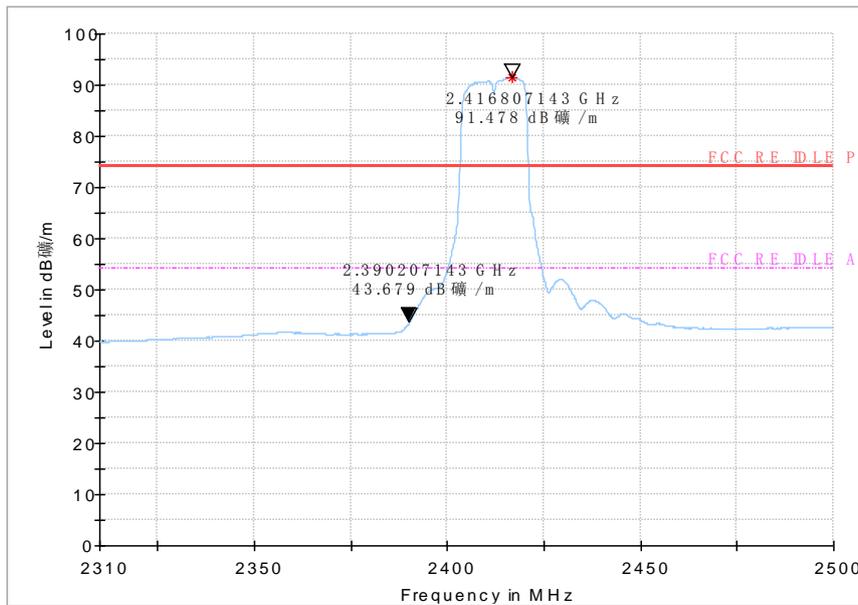


**AV detector**

**Fig 72. Radiated emission (Power): 802.11n (40M) , low channel**

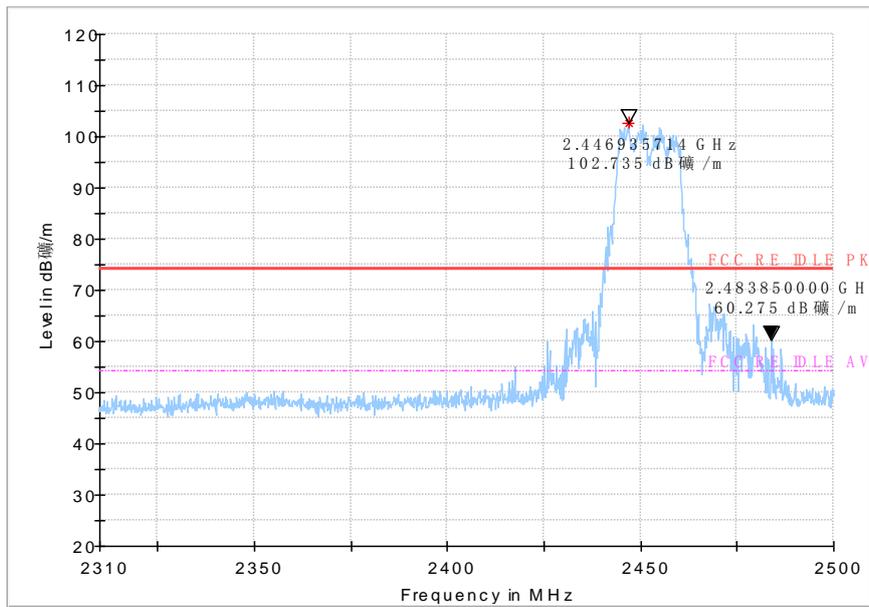


**Peak detector**

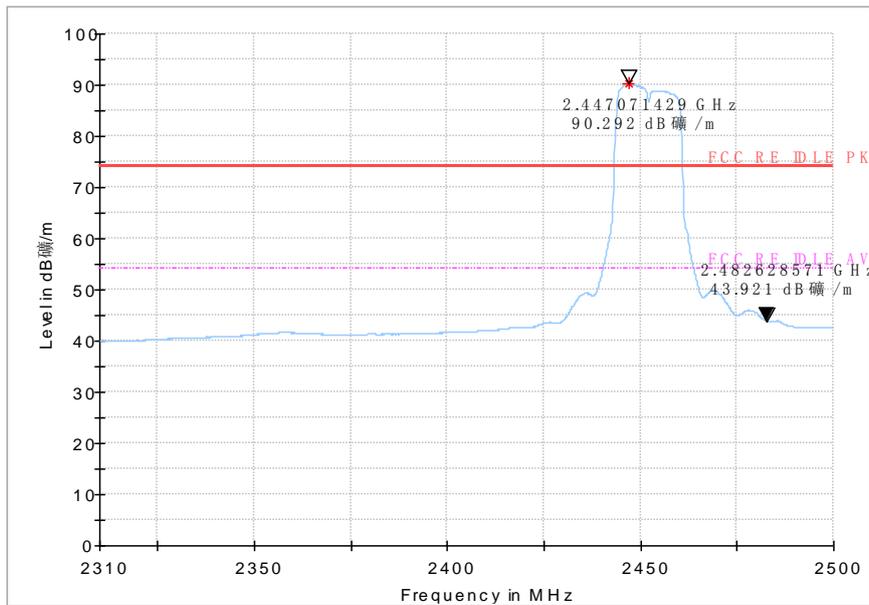


**AV detector**


**Fig 73. Radiated emission (Power): 802.11n (40M) , high channel**

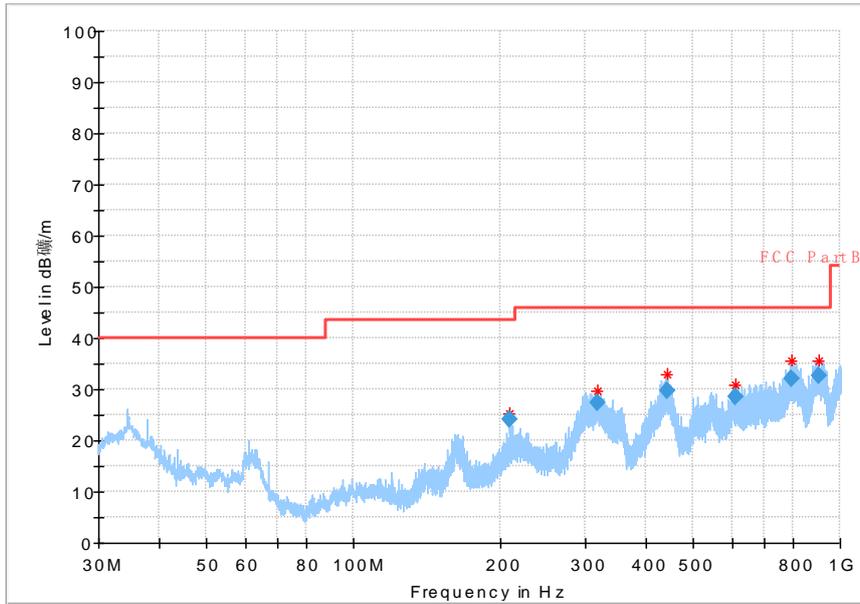


**Fig 74. Radiated Spurious Emission (802.11 n-40MHz,Ch1,30MHz~1GHz)**

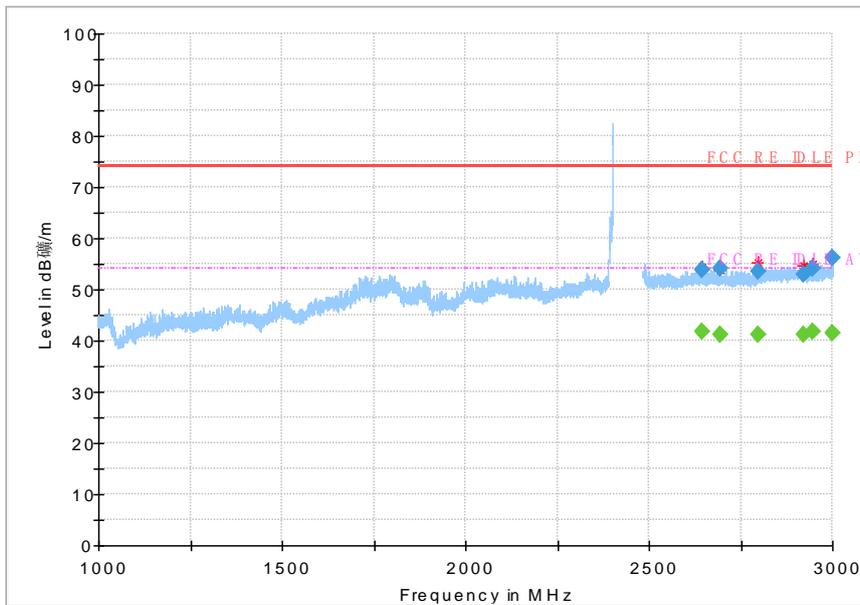

**Fig 75. Radiated Spurious Emission (802.11 n-40MHz,Ch1,1GHz~3GHz)**

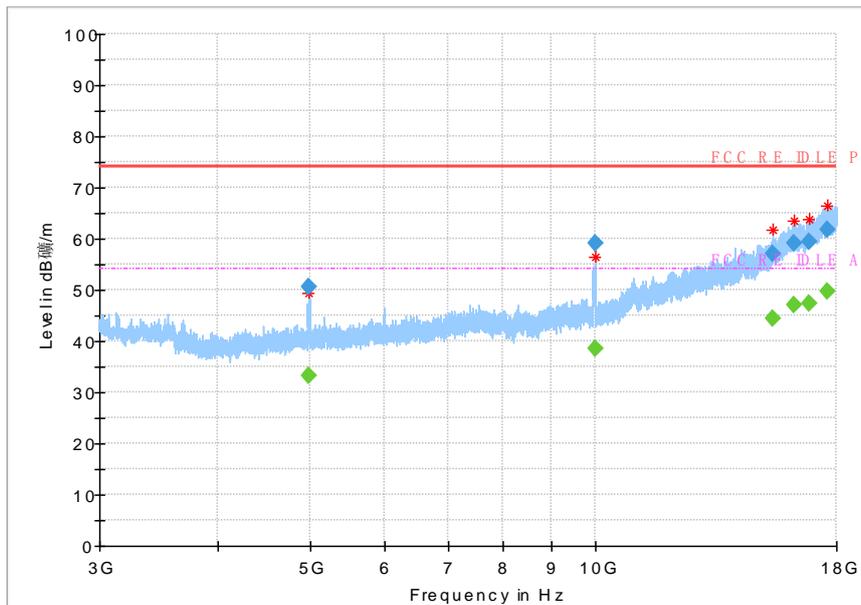

**Fig 76. Radiated Spurious Emission (802.11 n-40MHz,Ch1,3GHz~18GHz)**

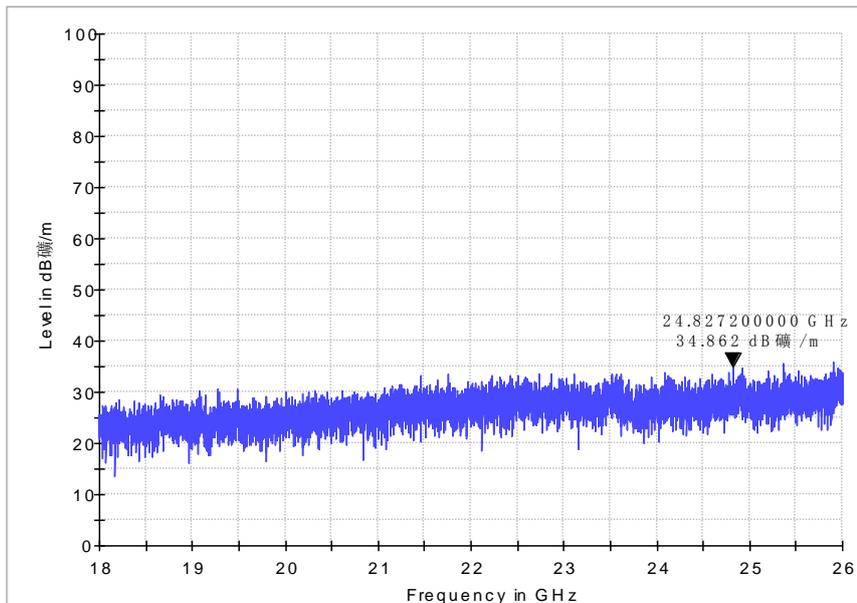

**Fig 77. Radiated Spurious Emission (802.11b,ch1,18GHz~26GHz)**

### 6.7. AC Powerline Conducted Emission

**Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line

conducted emission measurements are performed.

- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

Voltage (V)	Frequency (Hz)
120	60

**Measurement Result and limit:**

(Quasi-peak-average Limit)


**First Supply**

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)	Conclusion
			With charger	
			802.11b	
0.15 to 0.5	66 to 56	56 to 46	Fig 77.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

**First Supply**

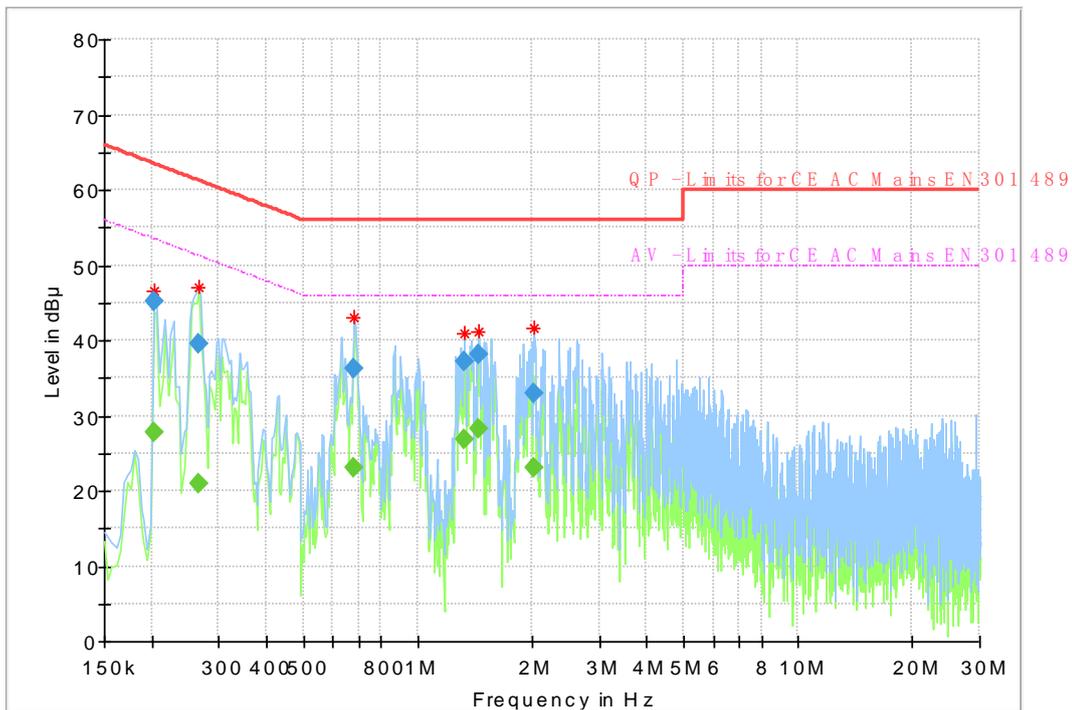

**Fig 78. AC Powerline Conducted Emission**

Frequency (MHz)	QuasiPeak (dB µV)	Average (dB µV)	Limit (dB µ)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.202238	45.18	---	63.52	18.34	1000.0	9.000	N	ON	9.6
0.202238	---	27.75	53.52	25.77	1000.0	9.000	N	ON	9.6
0.265669	39.63	---	61.25	21.62	1000.0	9.000	L1	ON	9.6
0.265669	---	20.85	51.25	30.40	1000.0	9.000	L1	ON	9.6
0.679838	36.20	---	56.00	19.80	1000.0	9.000	L1	ON	9.7
0.679838	---	23.05	46.00	22.95	1000.0	9.000	L1	ON	9.7
1.329075	---	26.85	46.00	19.15	1000.0	9.000	L1	ON	9.7
1.329075	37.24	---	56.00	18.76	1000.0	9.000	L1	ON	9.7
1.452206	38.05	---	56.00	17.95	1000.0	9.000	L1	ON	9.7
1.452206	---	28.24	46.00	17.76	1000.0	9.000	L1	ON	9.7
2.019356	---	23.15	46.00	22.85	1000.0	9.000	N	ON	9.7
2.019356	33.00	---	56.00	23.00	1000.0	9.000	N	ON	9.7

## 7. Test Equipment and Ancillaries Used For Tests

The test equipment and ancillaries used are as follows.

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Vector Signal Analyser	FSQ26	101096	R&S	2017-05-11	1 Year
2	DC Power Supply	ZUP60-14	LOC-22 0Z006	TDL-Lambda	2017-05-11	1 Year

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123101	R&S	2017-05-11	1 Year
3	Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
4	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	2014-11-05	3 Year
5	Double Ridged Guide Antenna	ETS-3117	135890	ETS	2017-01-11	3 Year
8	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year

### Anechoic chamber

Fully anechoic chamber by Frankonia German.

## 8. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. = 75 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## **ANNEX A. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**\*\*\*\*\*End The Report\*\*\*\*\***