



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Standalone VR Headset
BRAND NAME : Lenovo
MODEL NAME : Lenovo VRX 6060
FCC ID : O57VRX6060
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jan. 13, 2023 ~ Feb. 15, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT.....	22
5 UNCERTAINTY OF EVALUATION.....	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR310533B	Rev. 01	Initial issue of report	Mar. 01, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 12.48 dB at 70.74 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 16.30 dB at 0.156 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Standalone VR Headset
Brand Name	Lenovo
Model Name	Lenovo VRX 6060
FCC ID	O57VRX6060
SN	Conducted: 1784874200039 Conduction: 1784874200003 Radiation: 1784874200143
HW Version	SIT
SW Version	Aurora_userdebug_S163001_2212262040_kona
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel (37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps: 8.20 dBm (0.0066 W) Bluetooth LE 2Mbps: 8.34 dBm (0.0068 W) Nordic Bluetooth LE 1Mbps: 4.13 dBm (0.0026 W)
99% Occupied Bandwidth	Qualcomm_Bluetooth LE 1Mbps: 1.019 MHz Qualcomm_Bluetooth LE 2Mbps: 2.006 MHz Nordic_Bluetooth LE 1Mbps: 1.059 MHz
Antenna Type / Gain	Qualcomm BLE: PIFA Antenna with gain 1.84 dBi Nordic BLE: PIFA Antenna with gain 2.90 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: The device has two BLE Chipsets, the Qualcomm BLE supports BLE 1Mbps & 2Mbps, the Nordic BLE only support BLE 1Mbps, the two BLE chipsets can transmit simultaneously.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter) + Earphone + BT Link(Nordic BLE)
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone, and USB Cable.	

2.3 Connection Diagram of Test System

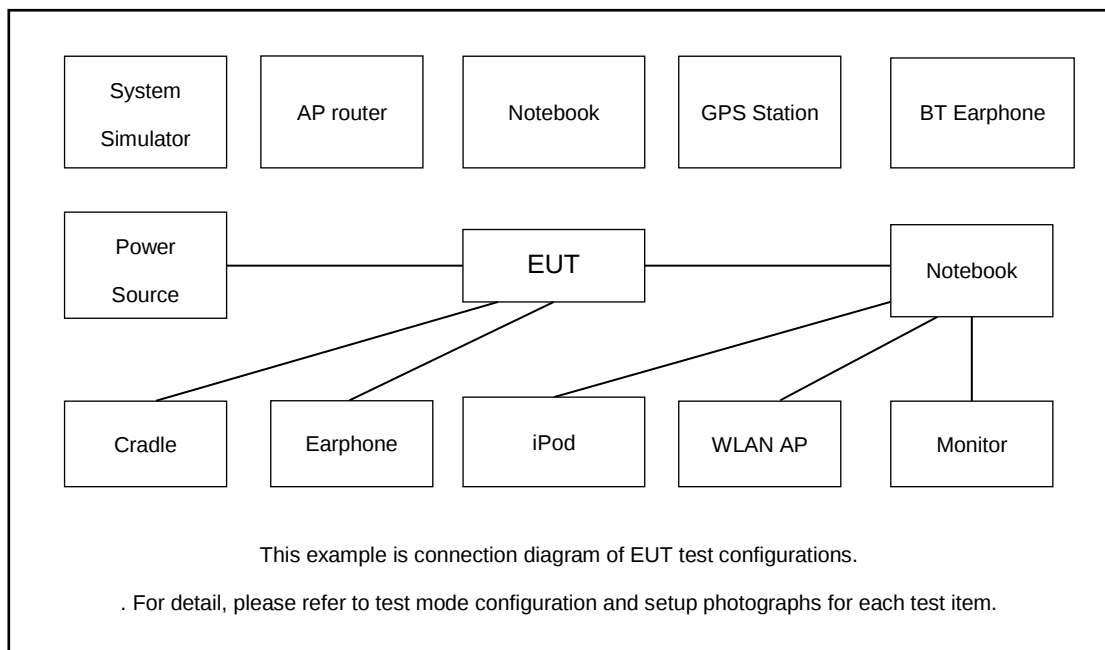

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
5.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the BLE accessory under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.80 dB

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.80 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

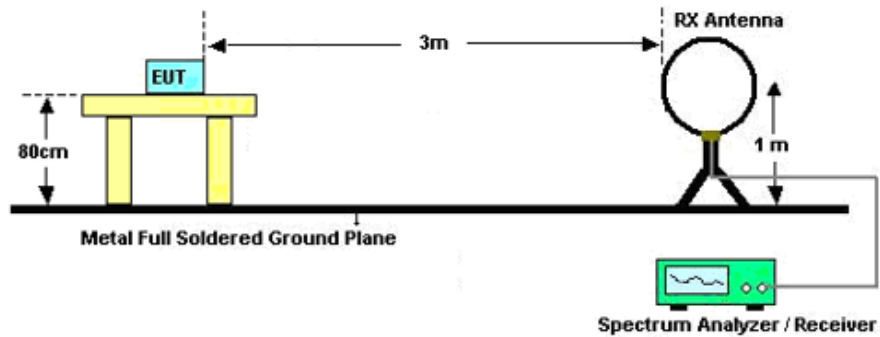

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

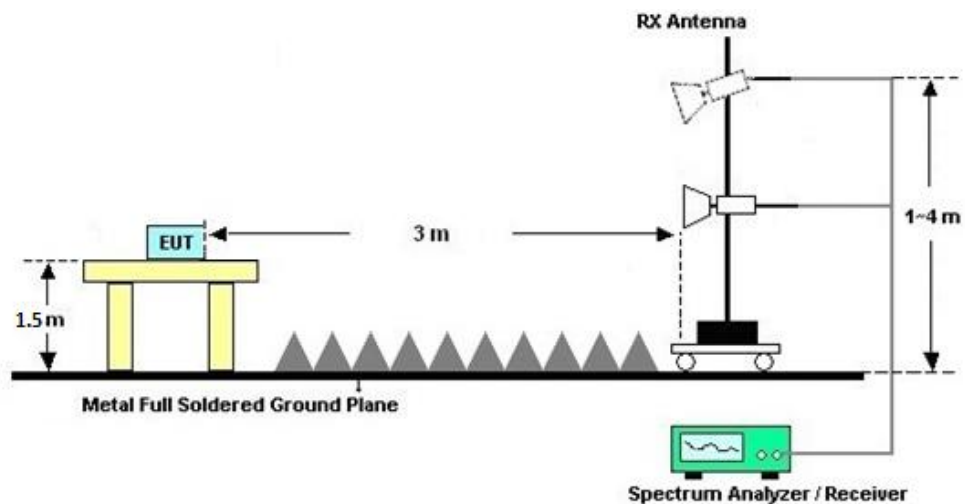

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

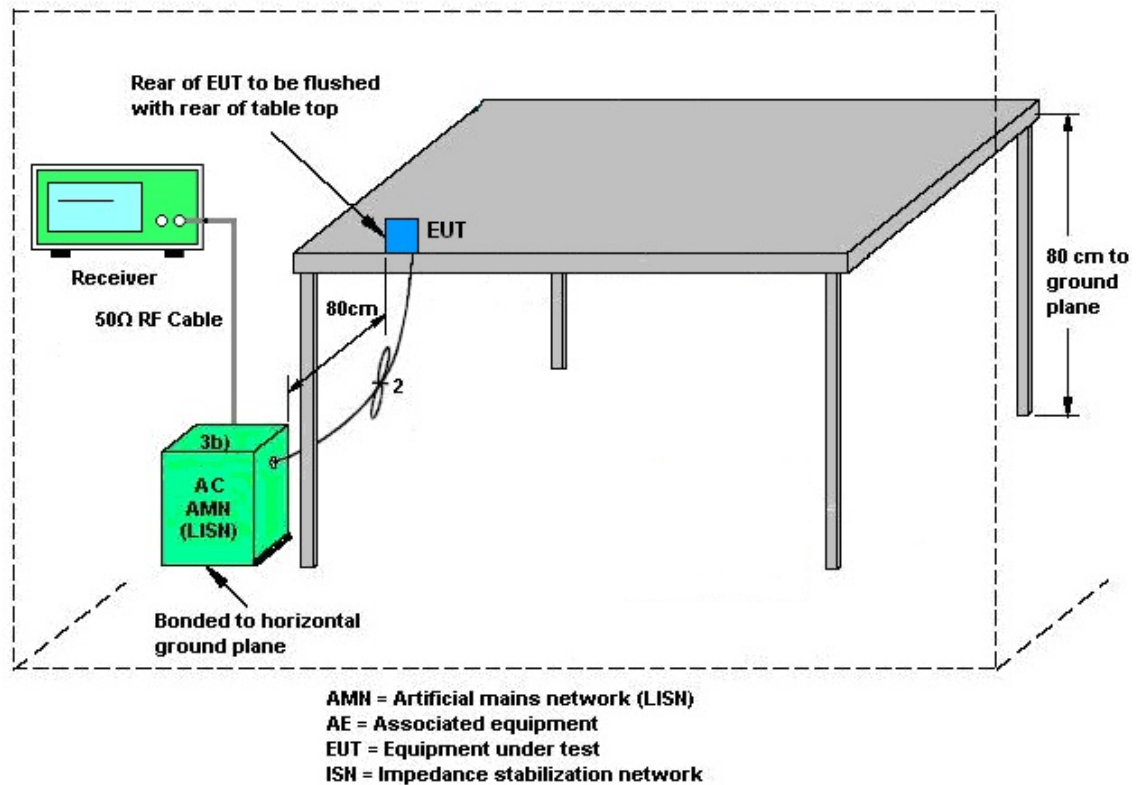

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May. 24, 2022	Jan. 30, 2023	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Jan. 30, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May. 24, 2022	Jan. 30, 2023	May. 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Jan. 30, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 13, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Oct. 12, 2023	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44G,MAX 30dB	Mar. 24, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Oct. 15, 2023	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May. 24, 2022	Jan. 13, 2023 ~Feb. 15, 2023	May. 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Apr. 17, 2023	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Jan. 13, 2023 ~Feb. 15, 2023	Jan. 07, 2024	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 11, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 05, 2023	Jan. 13, 2023 ~Feb. 15, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060839	1Ghz~18Ghz	Oct. 12, 2022	Jan. 13, 2023 ~Feb. 15, 2023	Oct. 11, 2023	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 05, 2023	Jan. 13, 2023 ~Feb. 15, 2023	Jan. 04, 2024	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jan. 13, 2023 ~Feb. 15, 2023	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 13, 2023 ~Feb. 15, 2023	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 13, 2023 ~Feb. 15, 2023	NCR	Radiation (03CH05-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	May. 25, 2022	Feb. 07, 2023 ~Feb. 08, 2023	May. 24, 2023	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 07, 2023 ~Feb. 08, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GH z	Jan. 05, 2023	Feb. 07, 2023 ~Feb. 08, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Feb. 07, 2023 ~Feb. 08, 2023	Jan. 04, 2024	Conducted (TH01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023/2/8	Relative Humidity:	40~51	%

BLE1M (Qualcomm)

TEST RESULTS DATA										
Peak Power Table										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	7.46	30.00	1.84	9.30	36.00	Pass
BLE	1Mbps	1	19	2440	8.20	30.00	1.84	10.04	36.00	Pass
BLE	1Mbps	1	39	2480	6.69	30.00	1.84	8.53	36.00	Pass

TEST RESULTS DATA						
Average Power Table						
(Reporting Only)						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.07	7.33
BLE	1Mbps	1	19	2440	2.07	8.02
BLE	1Mbps	1	39	2480	2.07	6.42

Report Number : FR310533B

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023/2/8	Relative Humidity:	40~51	%

BLE2M (Qualcomm)**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	7.58	30.00	1.84	9.42	36.00	Pass
BLE	2Mbps	1	19	2440	8.34	30.00	1.84	10.18	36.00	Pass
BLE	2Mbps	1	39	2480	6.84	30.00	1.84	8.68	36.00	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	4.89	7.33
BLE	2Mbps	1	19	2440	4.89	8.23
BLE	2Mbps	1	39	2480	4.89	6.56

Bluetooth Low Energy

Test Engineer:	Jiang Jun	Temperature:	20~26	°C
Test Date:	2023/2/8	Relative Humidity:	40~51	%

BLE1M (Nordic)

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	4.04	30.00	2.90	6.94	36.00	Pass
BLE	1Mbps	1	19	2440	4.10	30.00	2.90	7.00	36.00	Pass
BLE	1Mbps	1	39	2480	4.13	30.00	2.90	7.03	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.04	3.95
BLE	1Mbps	1	19	2440	2.04	4.03
BLE	1Mbps	1	39	2480	2.04	4.08



Ambient Condition: 25 °C, 45 %RH

Test Date: 2023.2.7

Test Engineer: Jiang Jun

<BLE test results for Qualcomm chipset>


DTS Bandwidth


Test Result


TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.68	2401.68	2402.35	0.5	PASS
	2440	0.68	2439.68	2440.35	0.5	PASS
	2480	0.68	2479.67	2480.35	0.5	PASS
BLE_2M	2402	1.16	2401.44	2402.60	0.5	PASS
	2440	1.16	2439.44	2440.60	0.5	PASS
	2480	1.16	2479.44	2480.60	0.5	PASS



Test Graphs

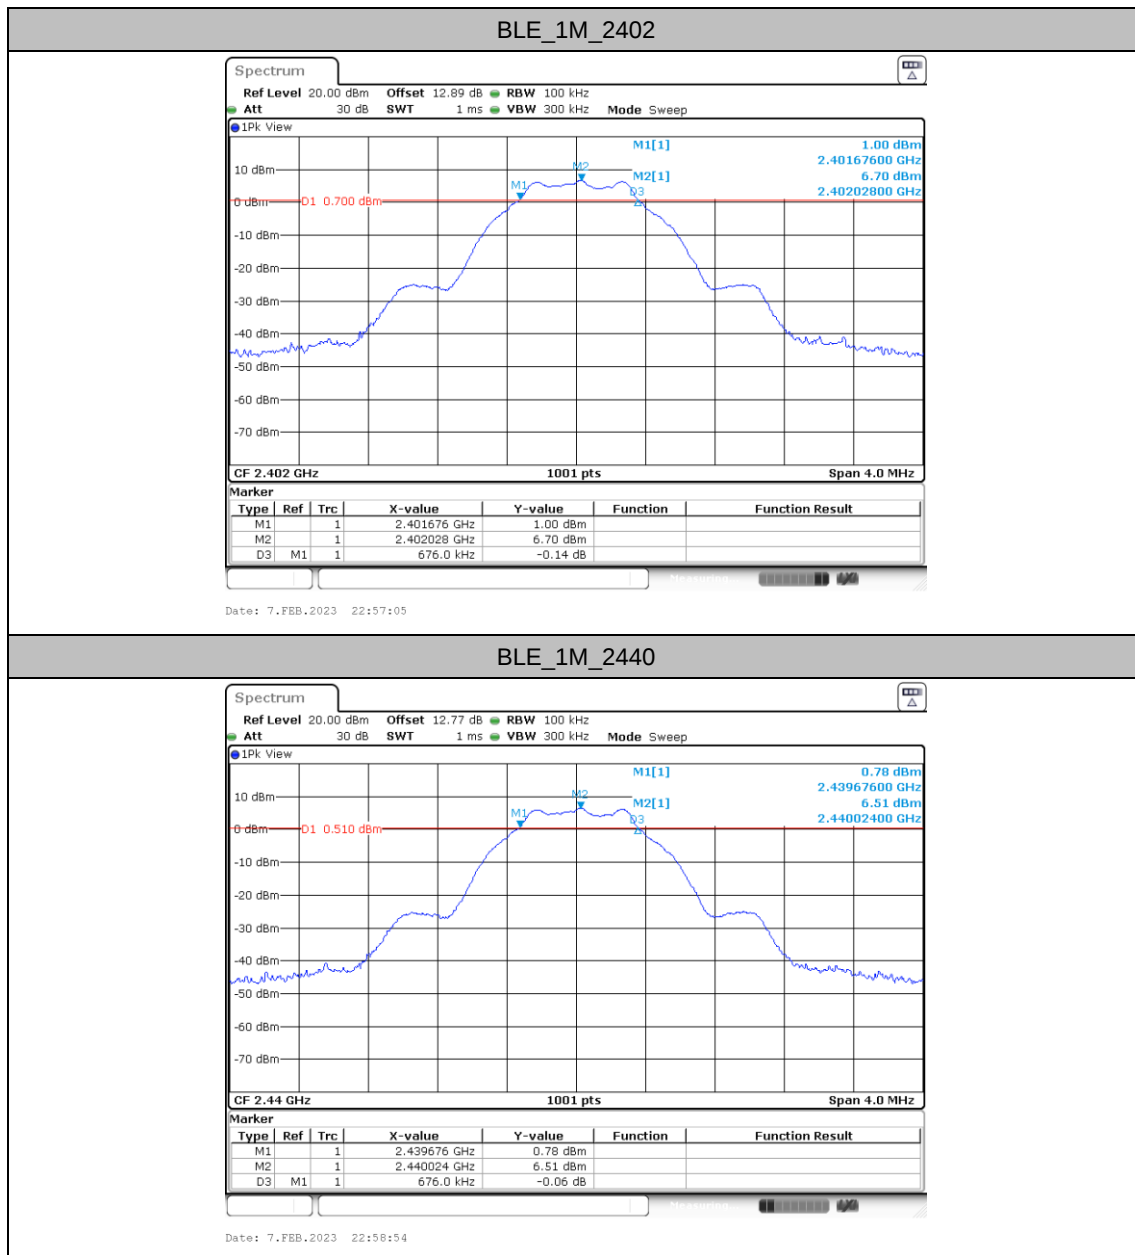

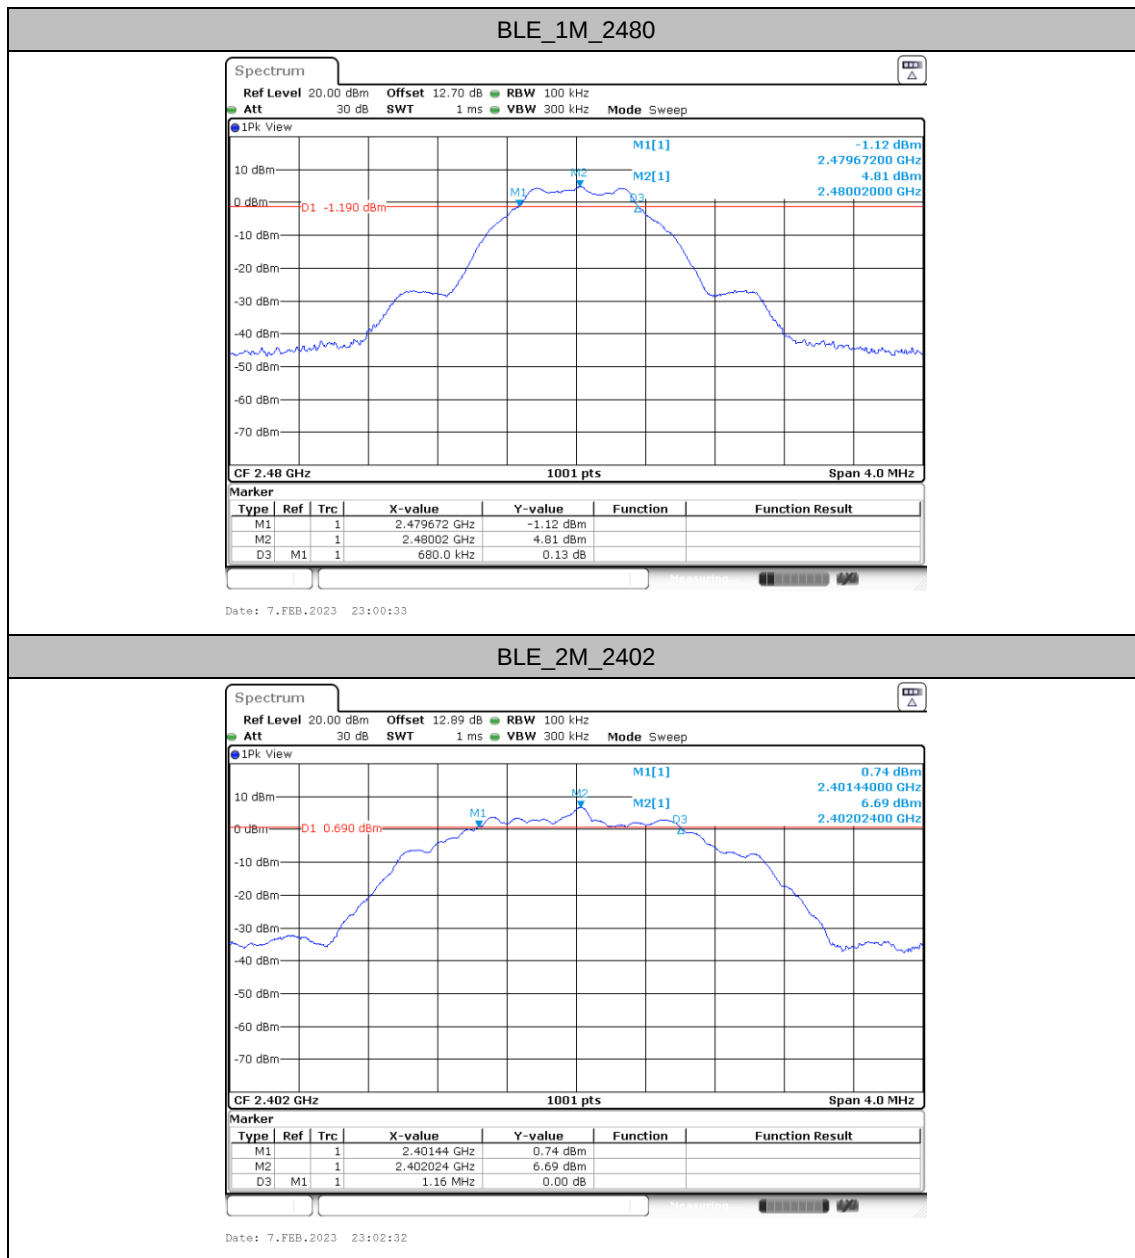

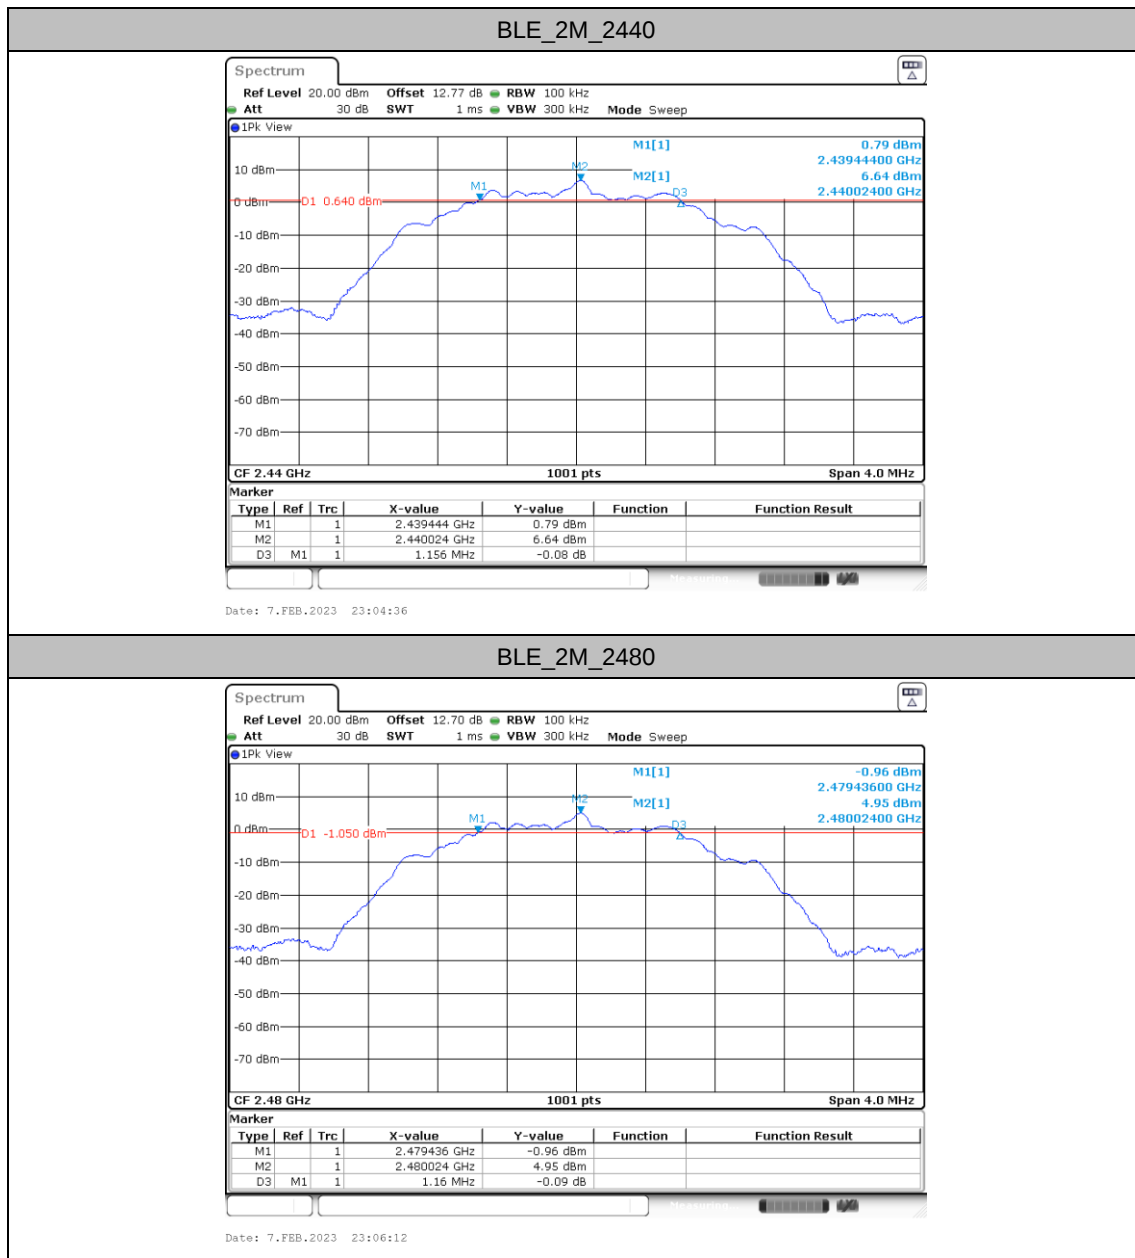




Occupied Channel Bandwidth


Test Result


TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.019	2401.5125	2402.5315	---	---
	2440	1.019	2439.5125	2440.5315	---	---
	2480	1.015	2479.5125	2480.5275	---	---
BLE_2M	2402	2.006	2401.0290	2403.0350	---	---
	2440	2.006	2439.0290	2441.0350	---	---
	2480	2.002	2479.0250	2481.0270	---	---



Test Graphs

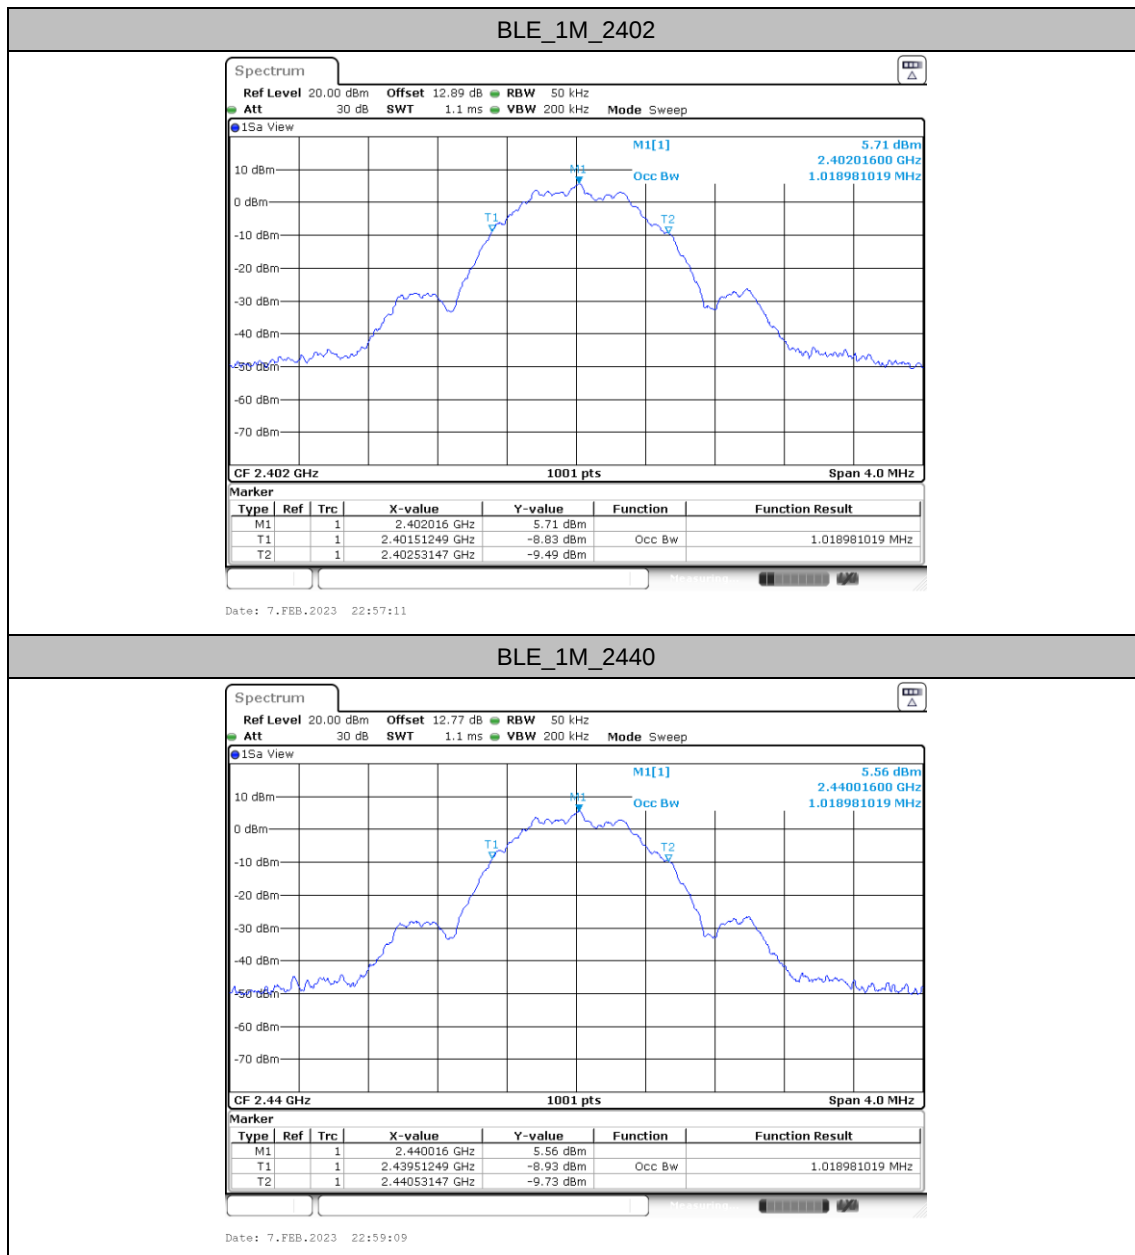

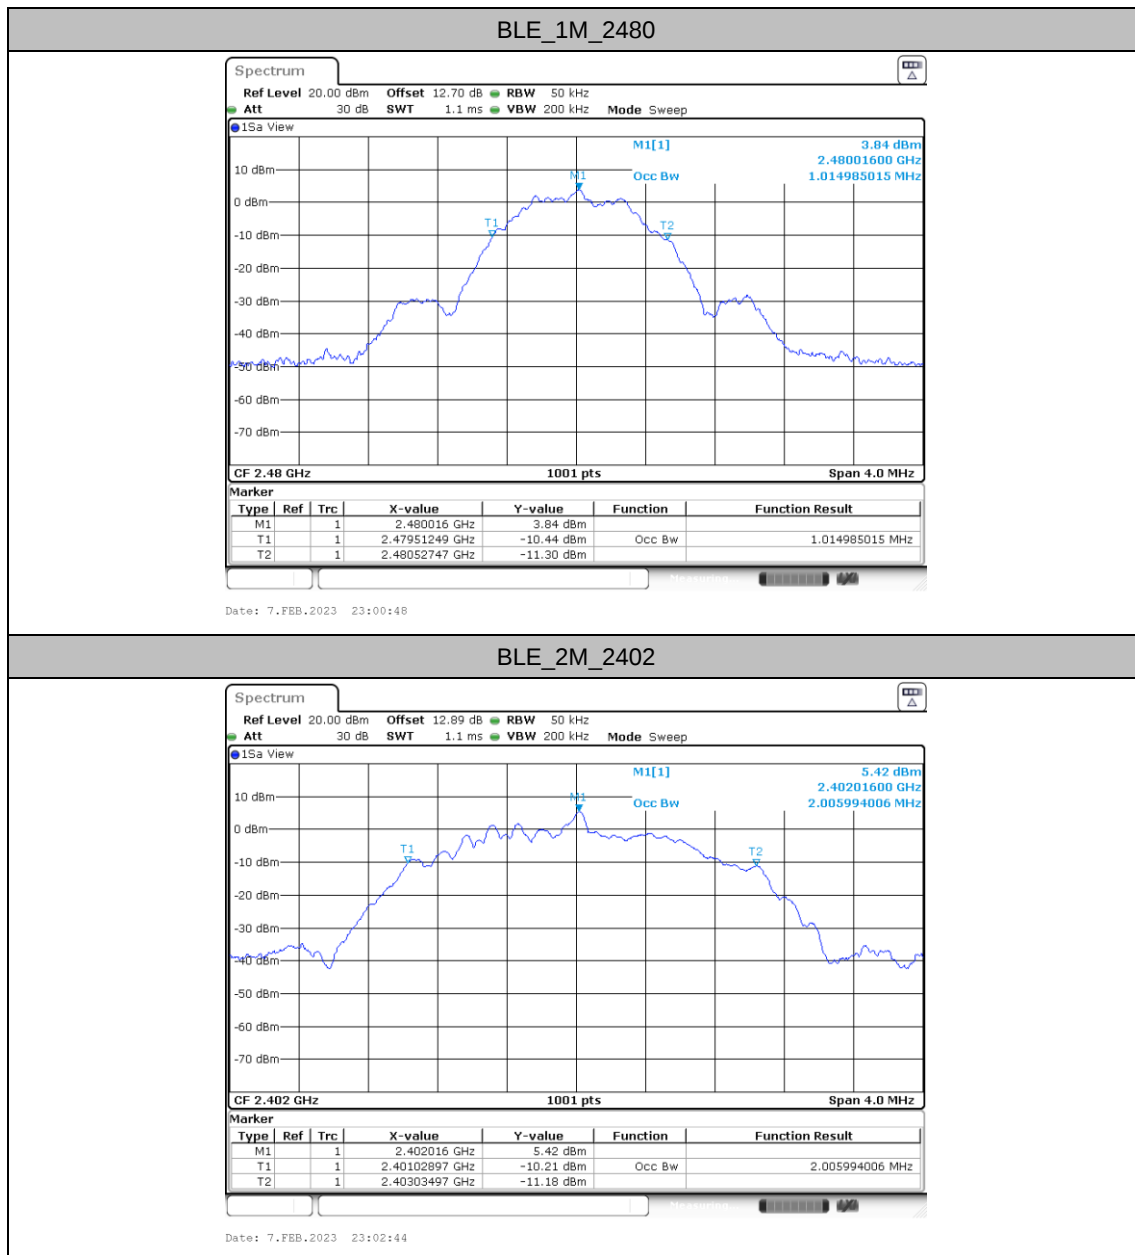

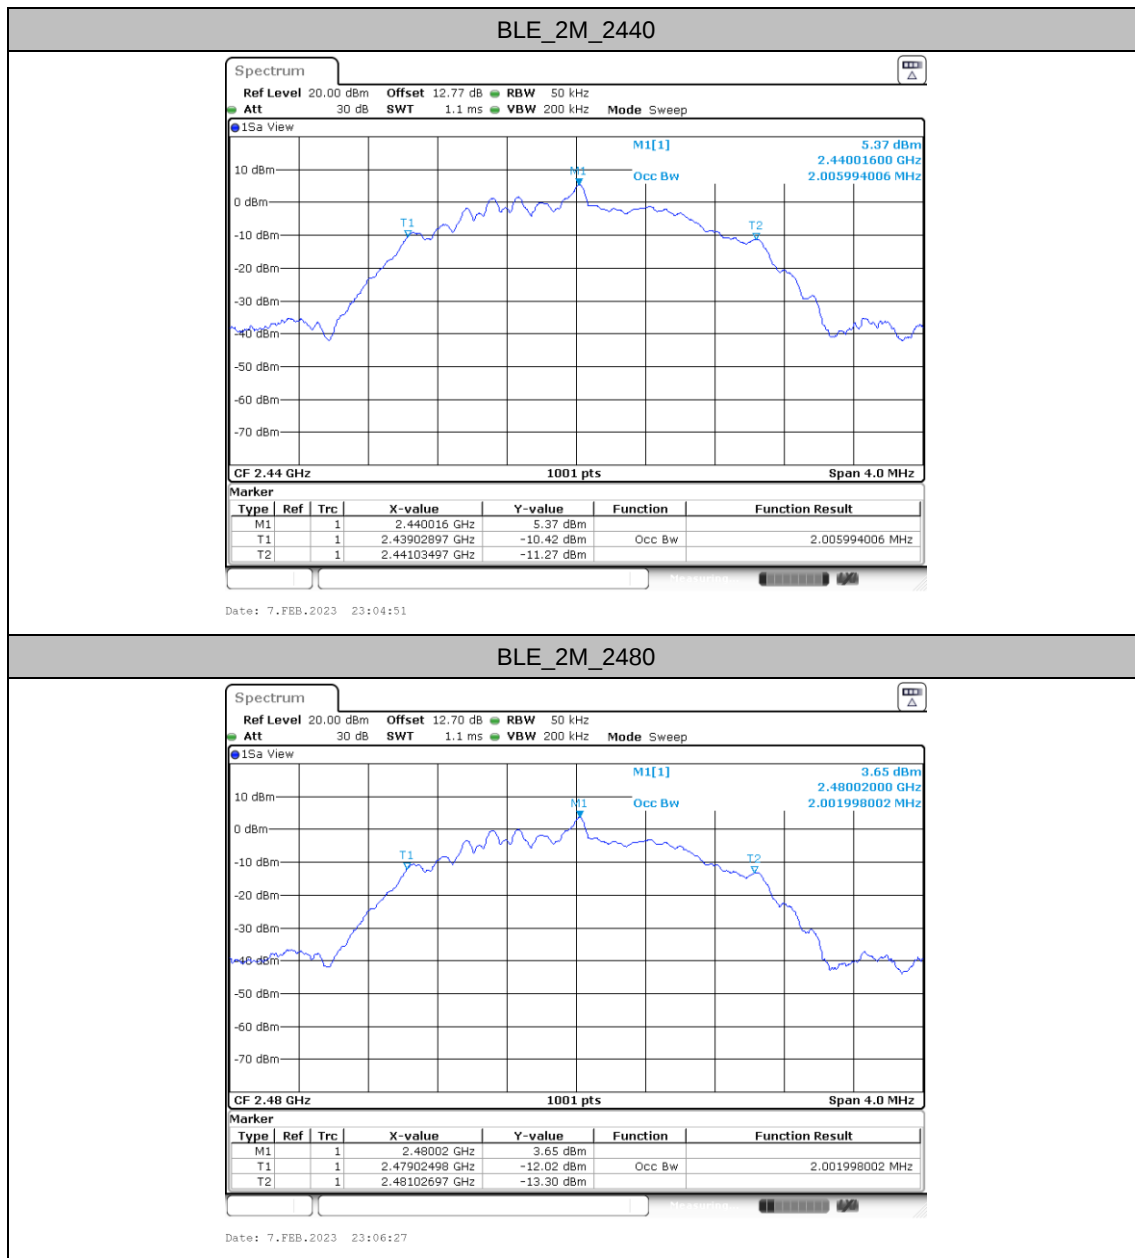




Maximum power spectral density


Test Result


TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-7.71	≤8.00	PASS
	2440	-7.85	≤8.00	PASS
	2480	-9.53	≤8.00	PASS
BLE_2M	2402	-10.6	≤8.00	PASS
	2440	-10.63	≤8.00	PASS
	2480	-12.31	≤8.00	PASS



Test Graphs

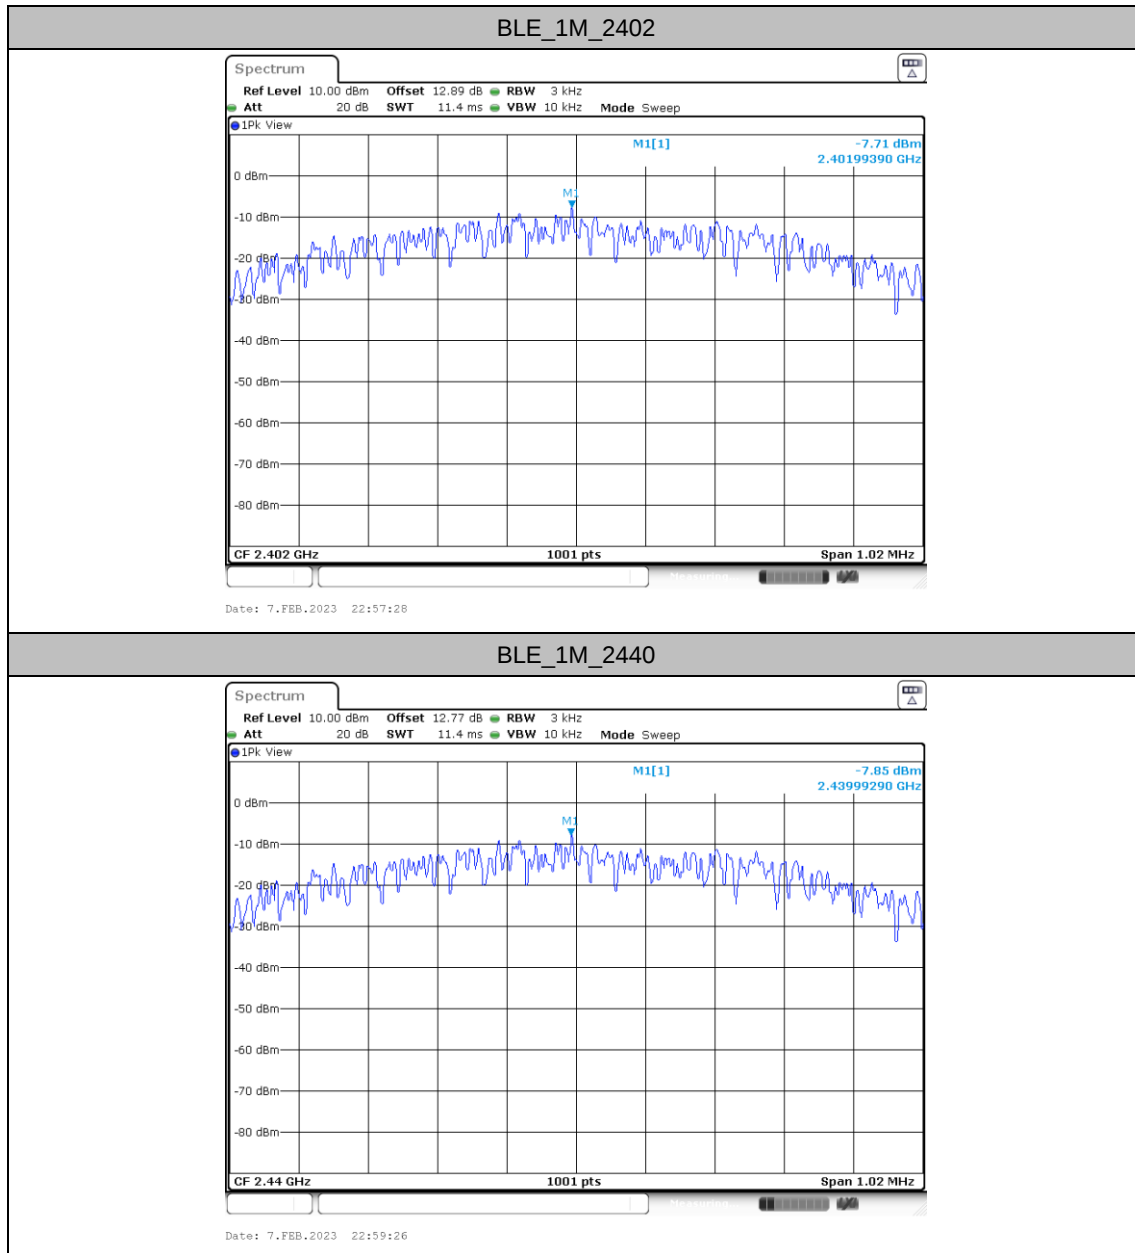

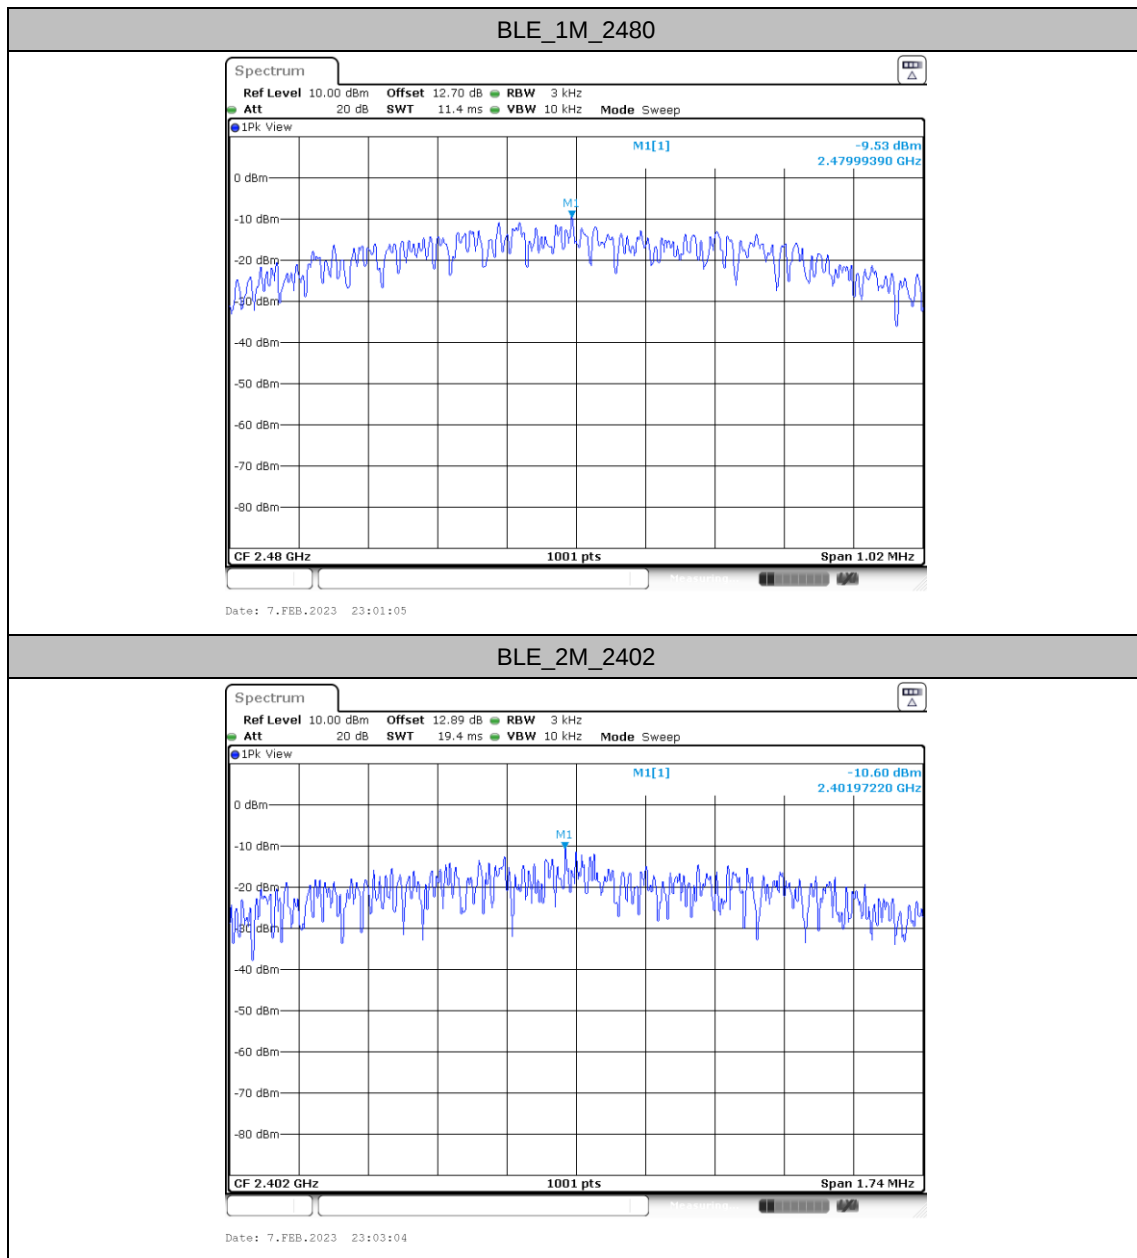

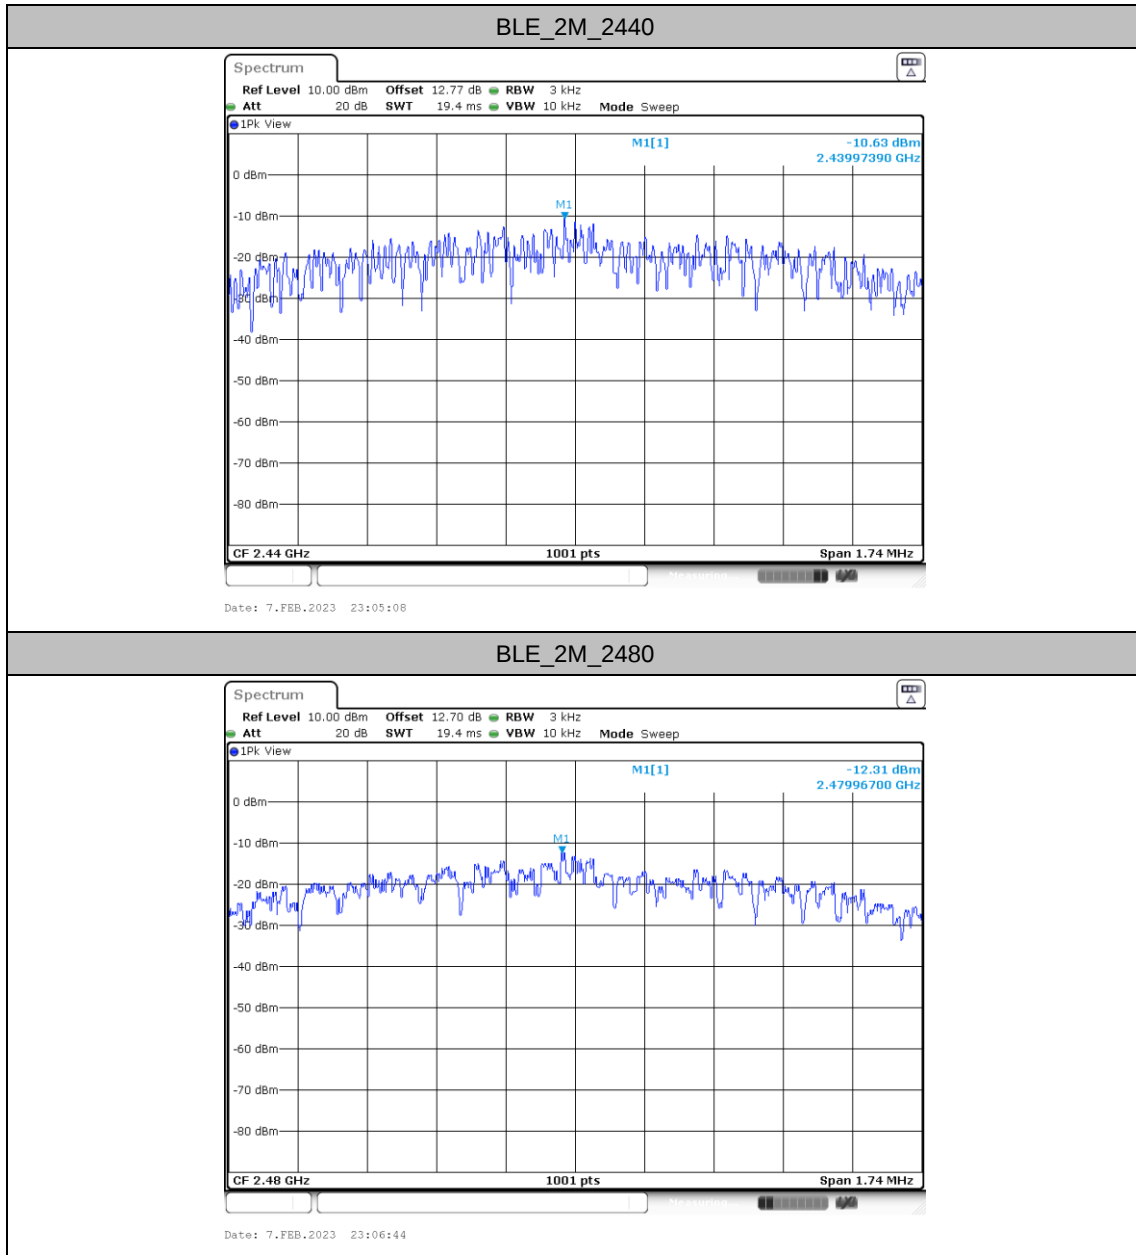



Reference level measurement

Test Result

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	2402	2402.03	6.65
	2440	2440.02	6.51
	2480	2480.02	4.87
BLE_2M	2402	2402.02	6.68
	2440	2440.02	6.61
	2480	2480.02	4.92



Test Graphs










Band edge measurements


Test Result

TestMode	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Low	2402	6.65	-43.63	≤-13.35	PASS
	High	2480	4.87	-42.37	≤-15.13	PASS
BLE_2M	Low	2402	6.68	-34.5	≤-13.32	PASS
	High	2480	4.92	-42.03	≤-15.08	PASS



Test Graphs

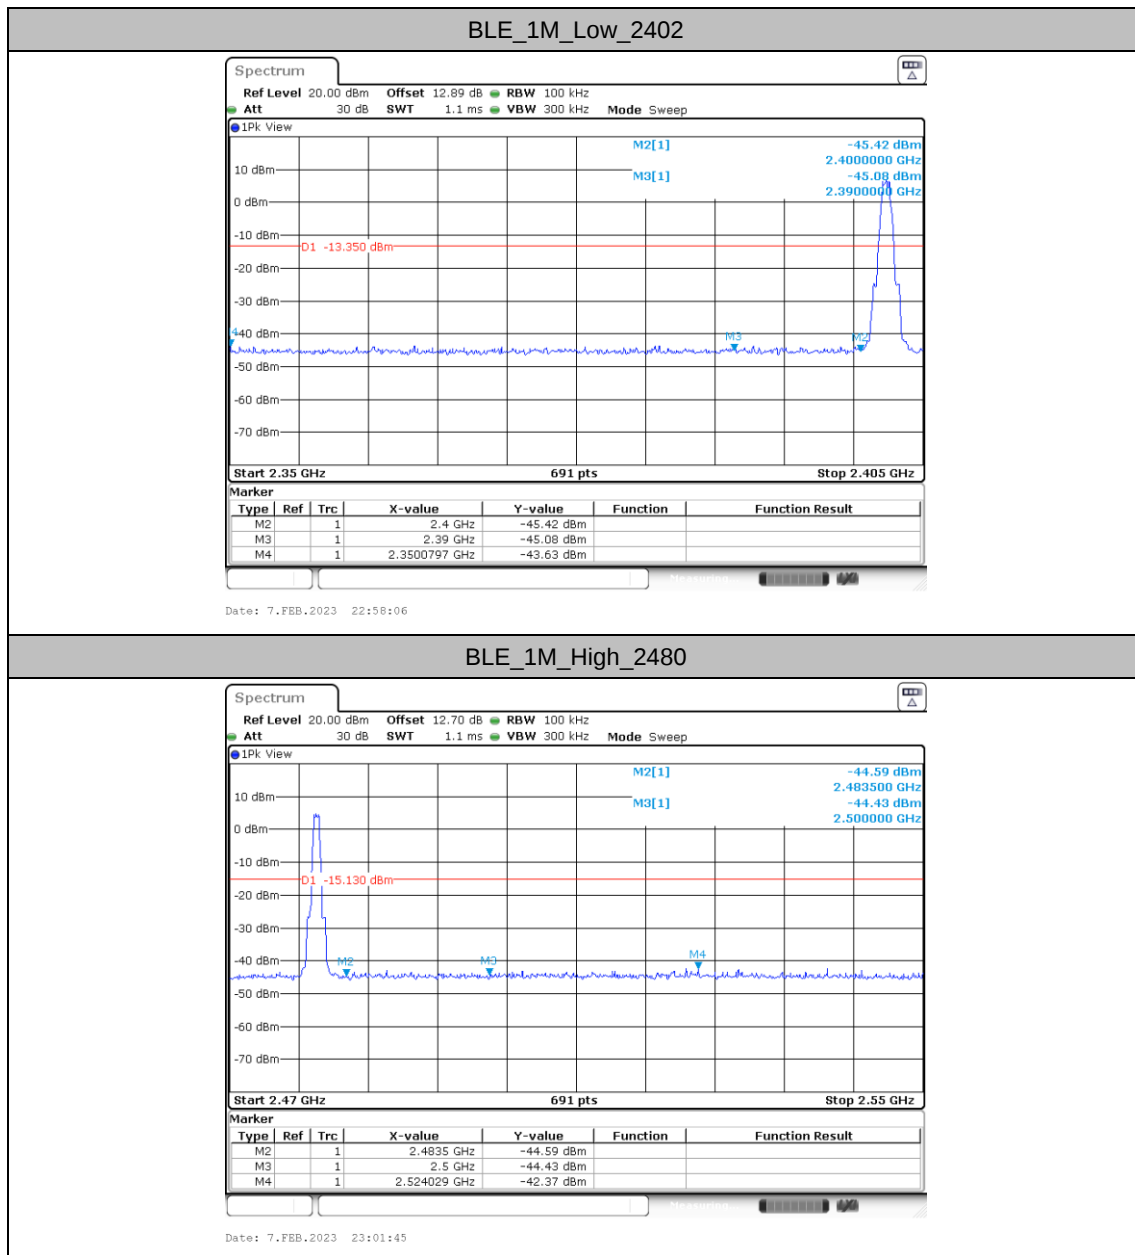

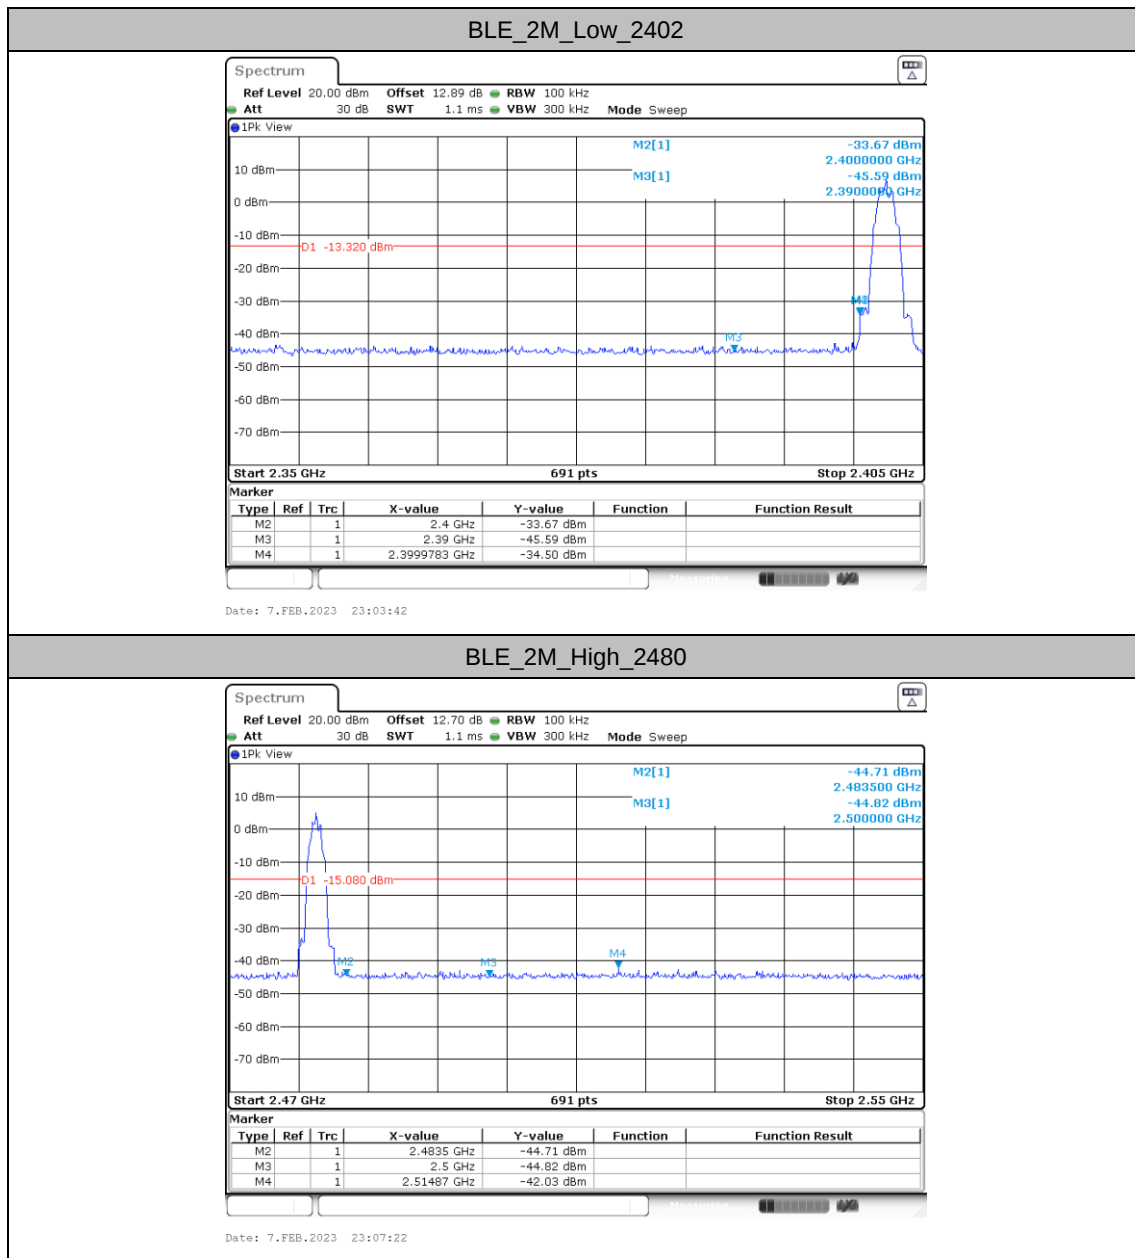


Conducted Spurious Emission


Test Result


TestMode	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	2402	30~1000	6.65	-51.26	≤-13.35	PASS
		1000~26500	6.65	-45.79	≤-13.35	PASS
	2440	30~1000	6.51	-49.91	≤-13.49	PASS
		1000~26500	6.51	-45.82	≤-13.49	PASS
	2480	30~1000	4.87	-55.02	≤-15.13	PASS
		1000~26500	4.87	-46.32	≤-15.13	PASS
BLE_2M	2402	30~1000	6.68	-45.15	≤-13.32	PASS
		1000~26500	6.68	-45.77	≤-13.32	PASS
	2440	30~1000	6.61	-50.08	≤-13.39	PASS
		1000~26500	6.61	-45.84	≤-13.39	PASS
	2480	30~1000	4.92	-54.66	≤-15.08	PASS
		1000~26500	4.92	-46.63	≤-15.08	PASS





Test Graphs

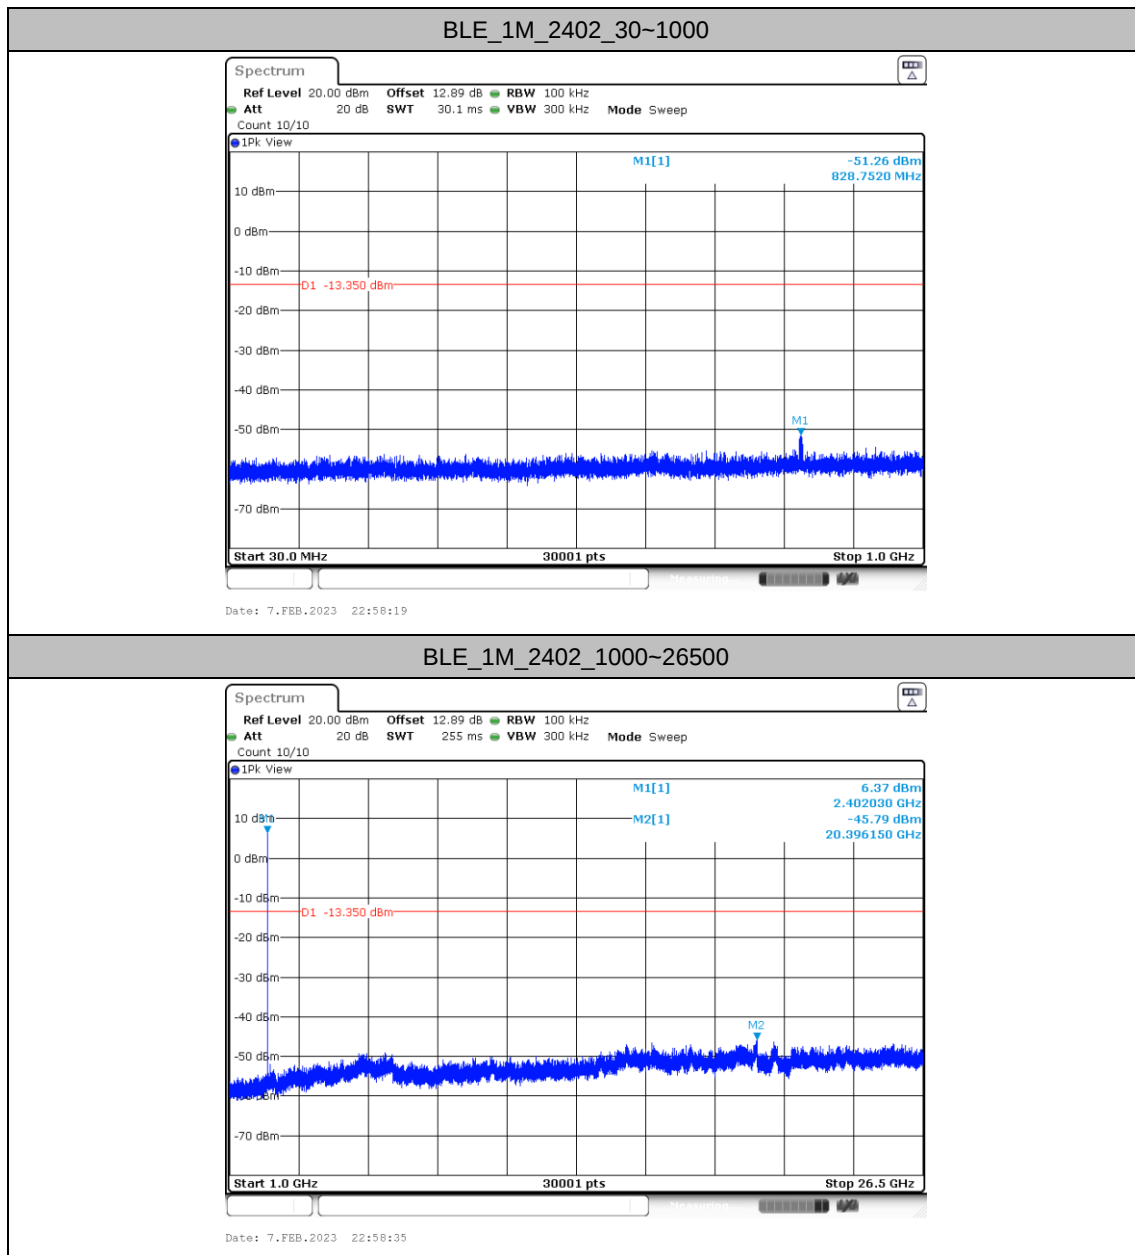


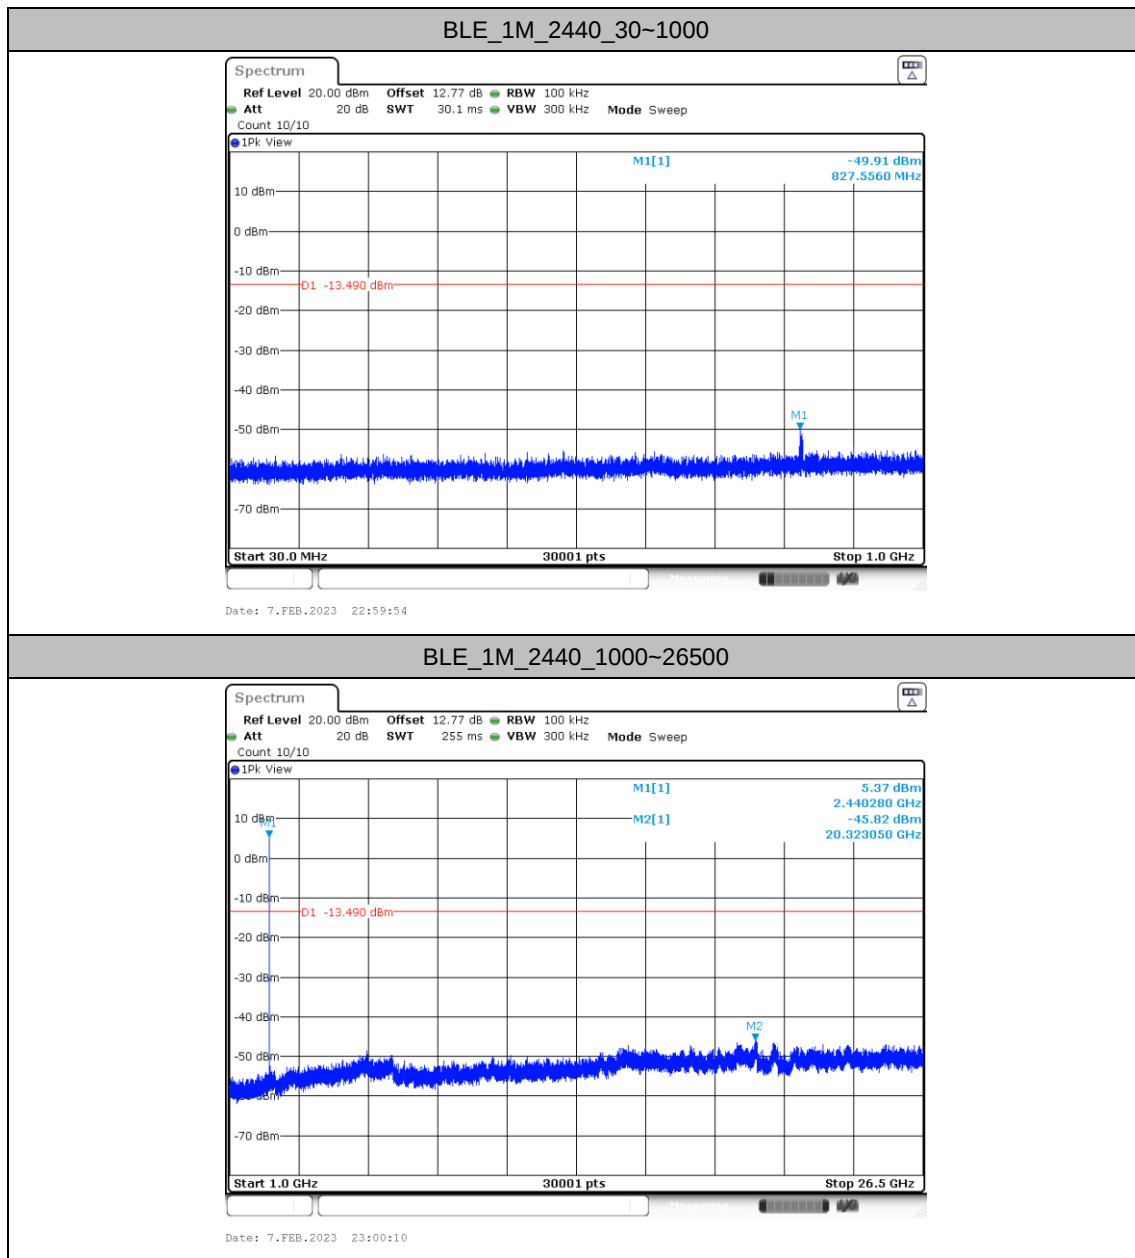

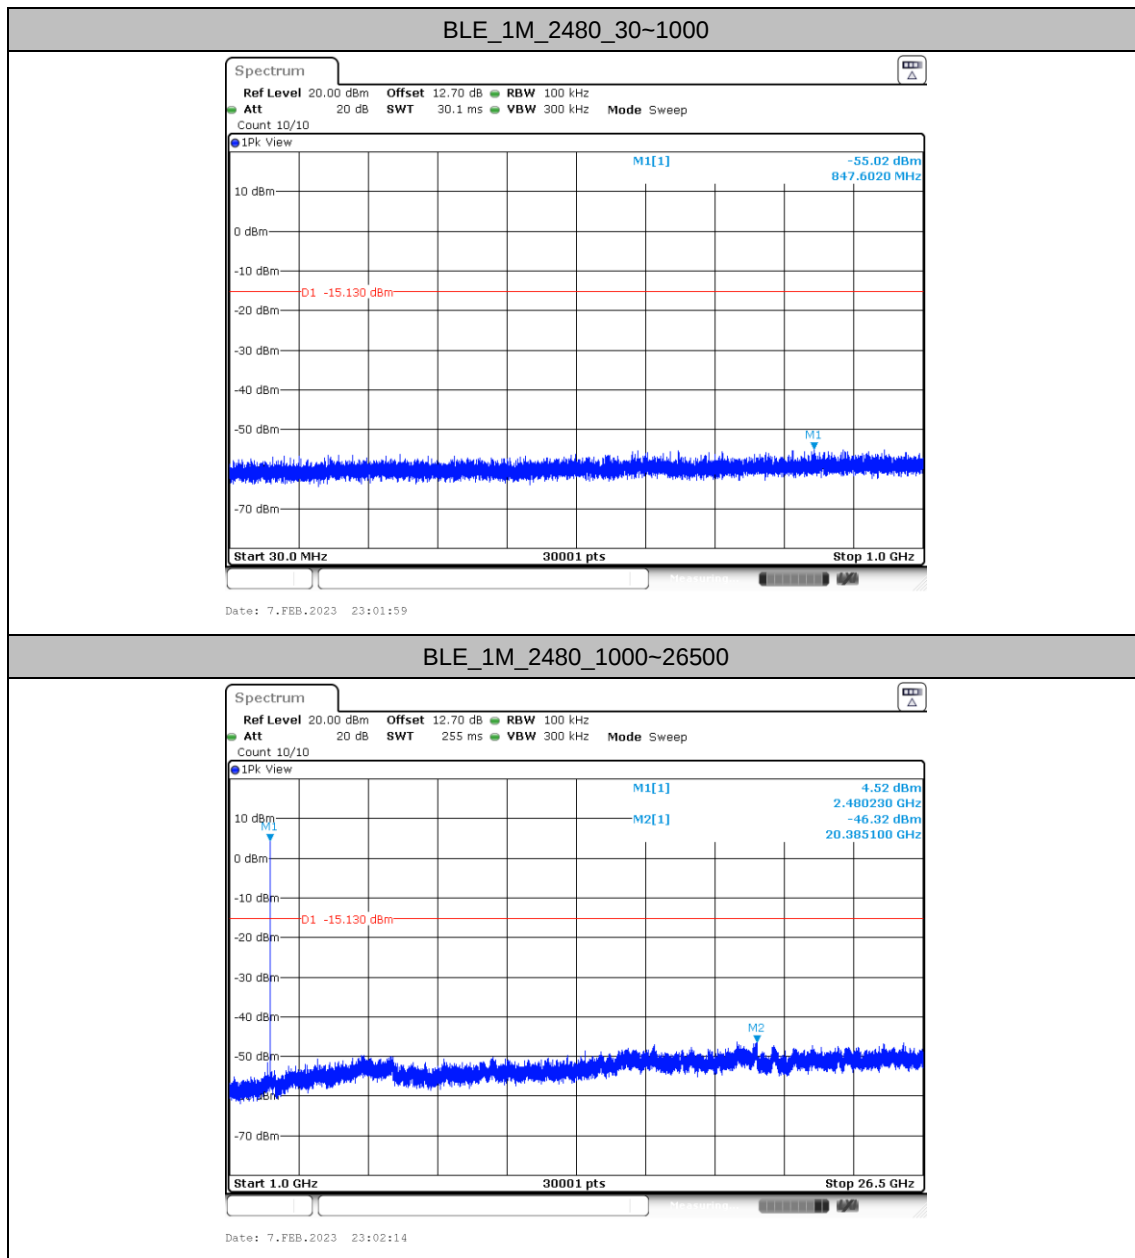

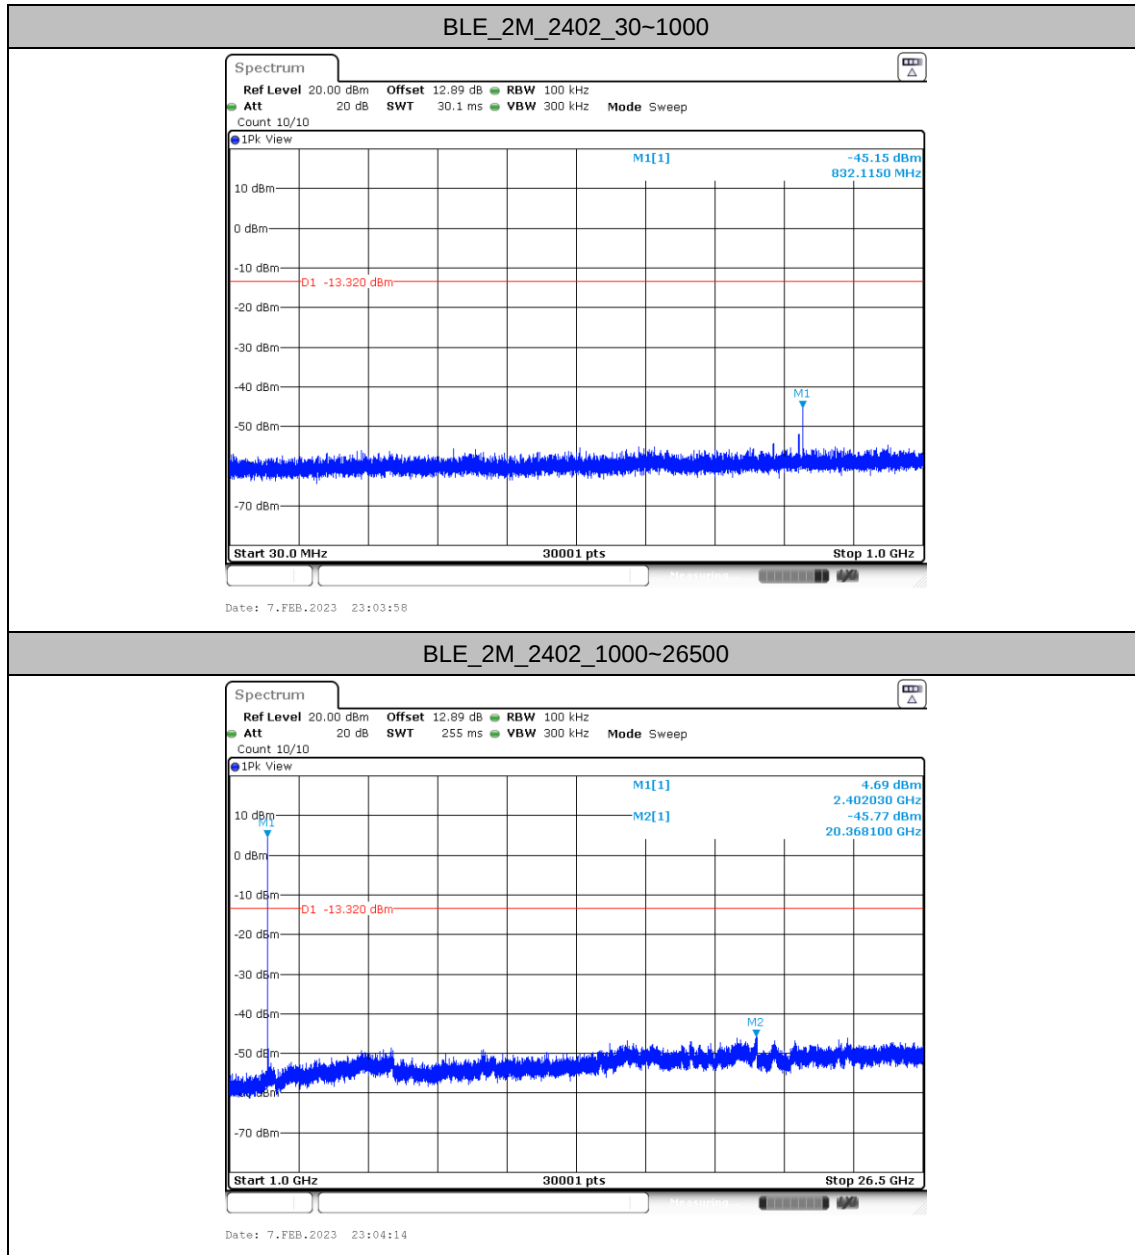

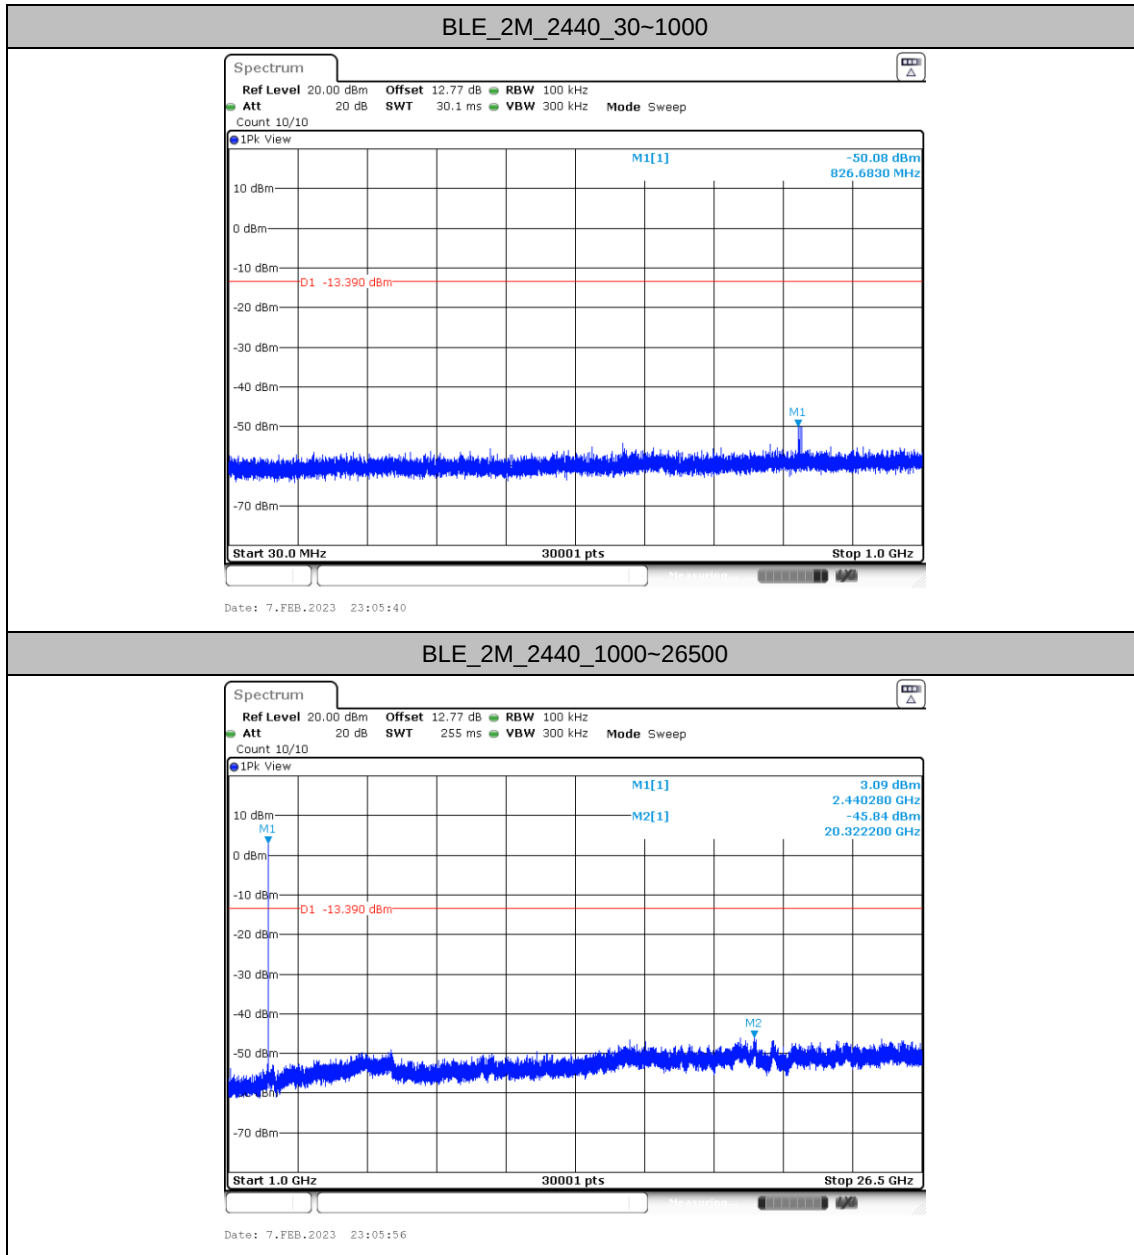

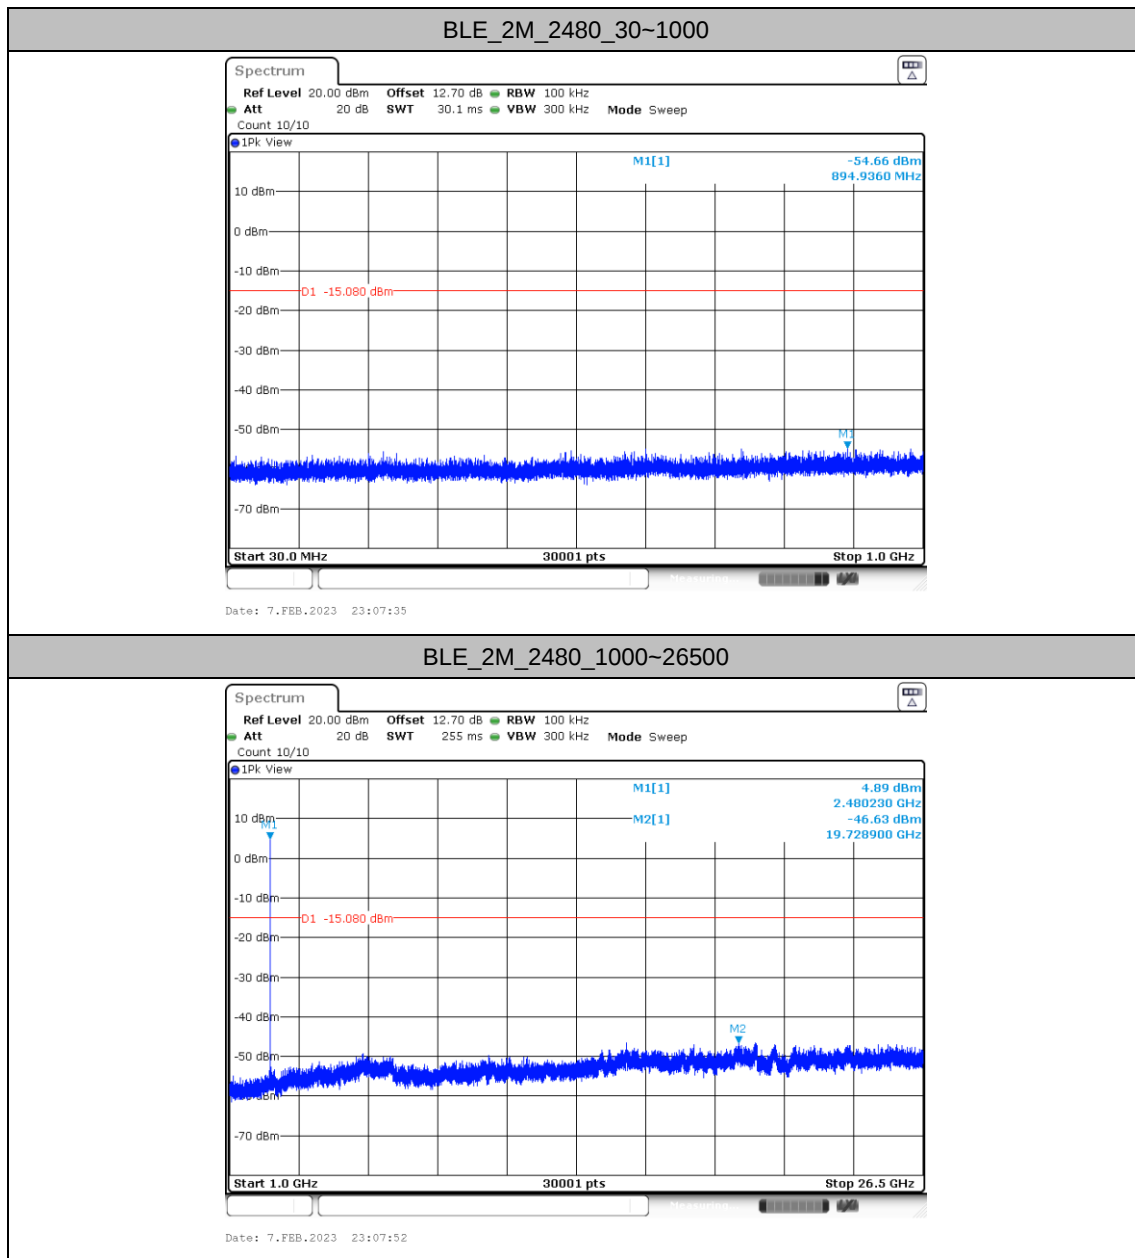


<BLE test results for Nordic chipset>



DTS Bandwidth

Test Result

TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.64	2401.64	2402.28	0.5	PASS
	2440	0.64	2439.64	2440.28	0.5	PASS
	2480	0.64	2479.64	2480.29	0.5	PASS

Test Graphs

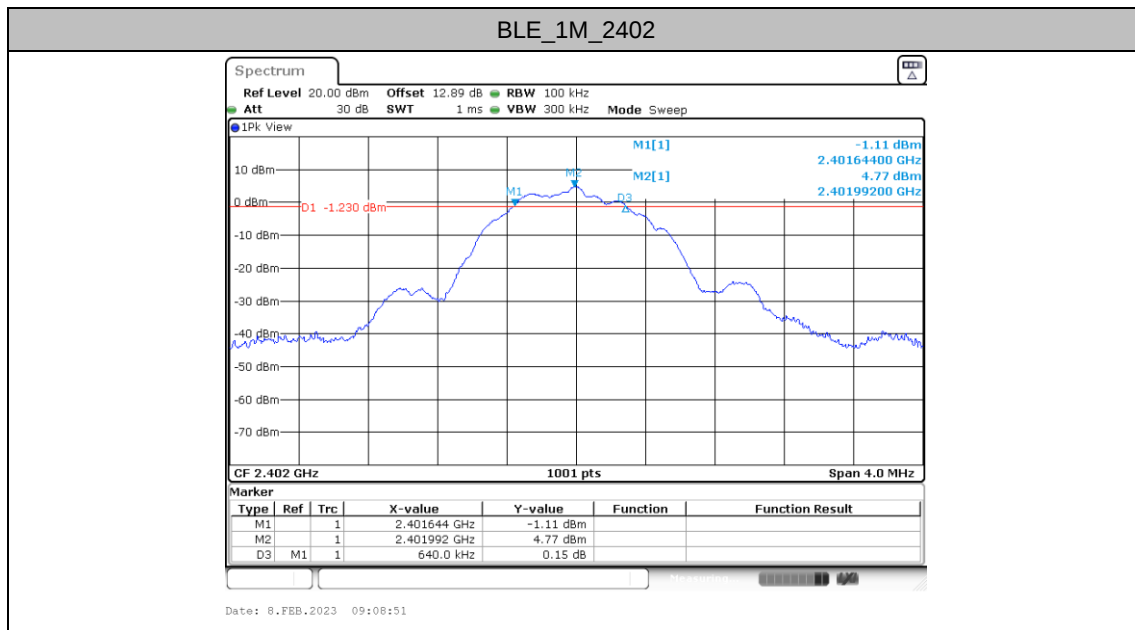

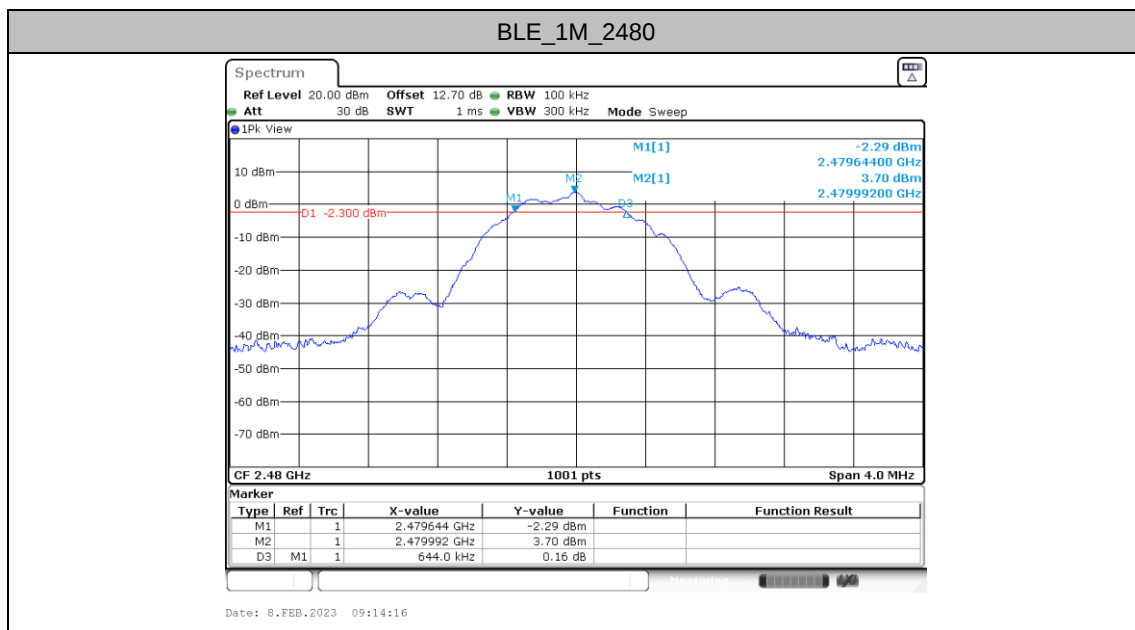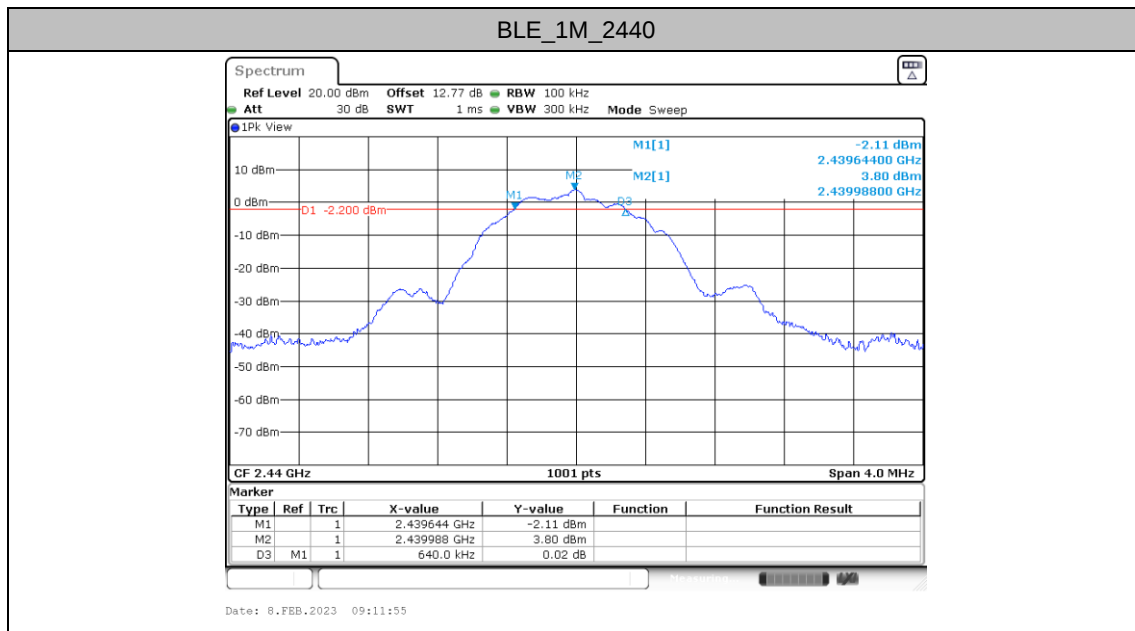




Occupied Channel Bandwidth

Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.051	2401.4765	2402.5275	---	---
	2440	1.059	2439.4725	2440.5315	---	---
	2480	1.055	2479.4725	2480.5275	---	---

Test Graphs

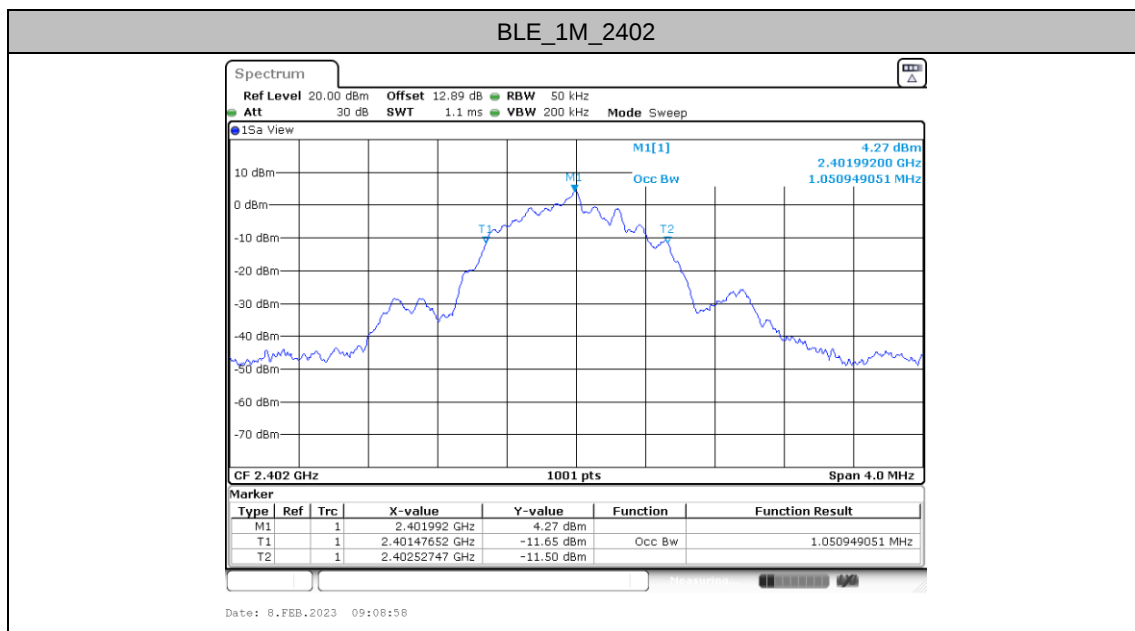

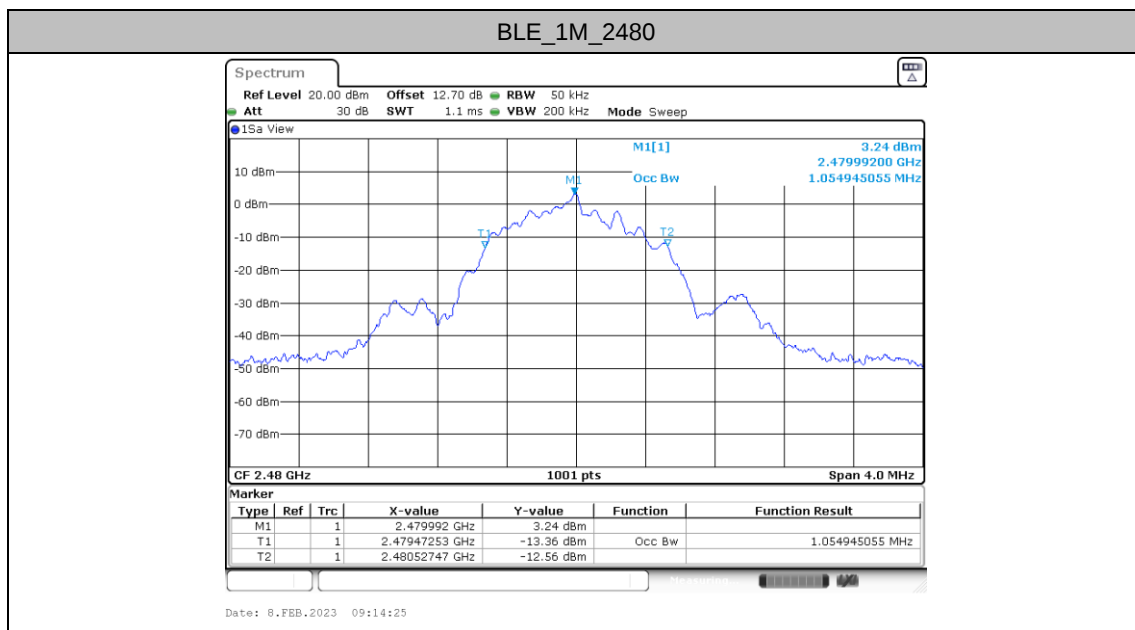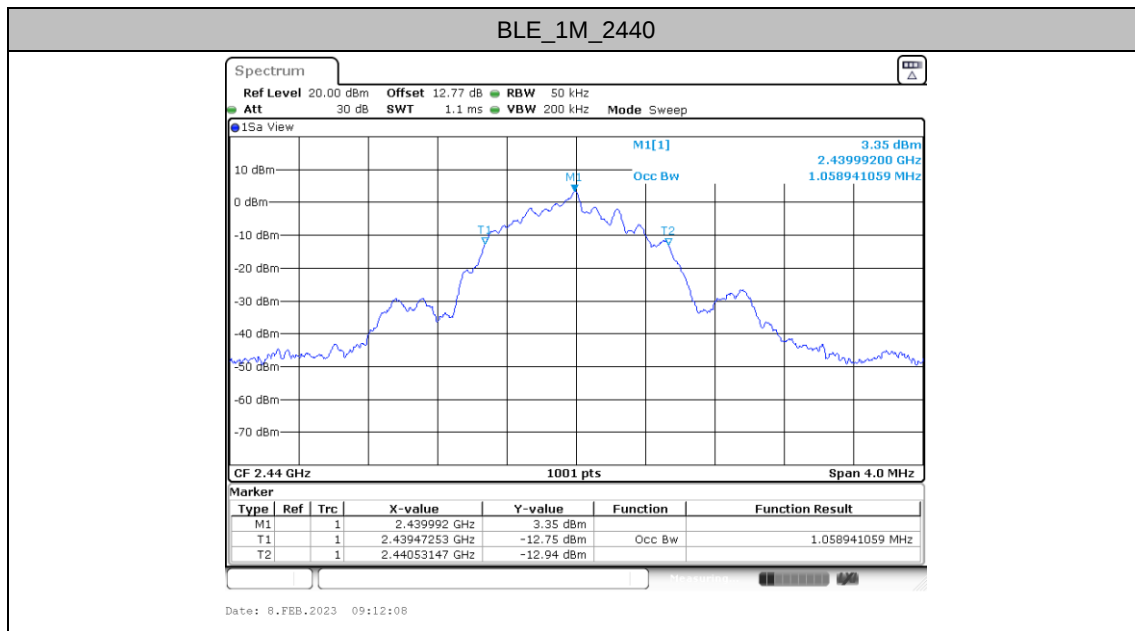




Maximum power spectral density

Test Result

TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-1.96	≤8.00	PASS
	2440	-2.9	≤8.00	PASS
	2480	-3.04	≤8.00	PASS

Test Graphs

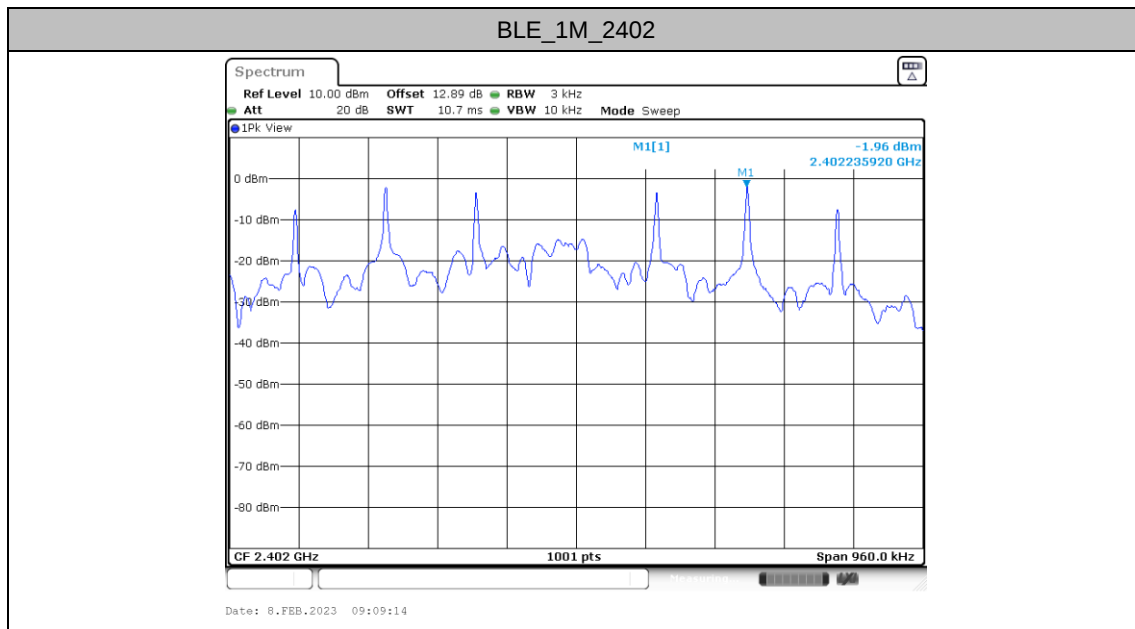

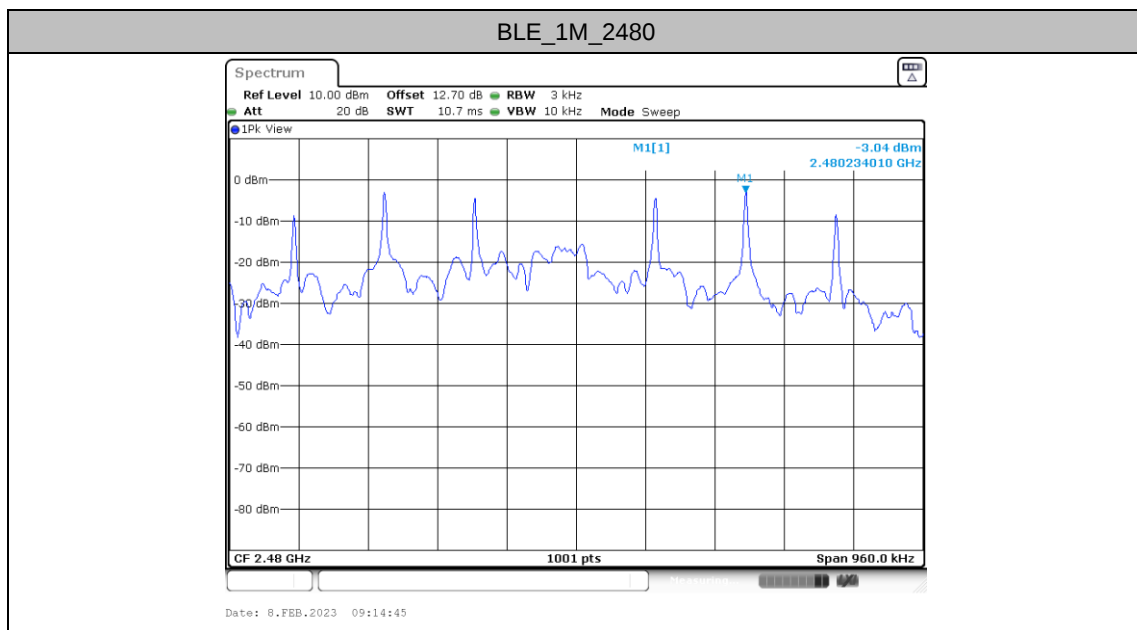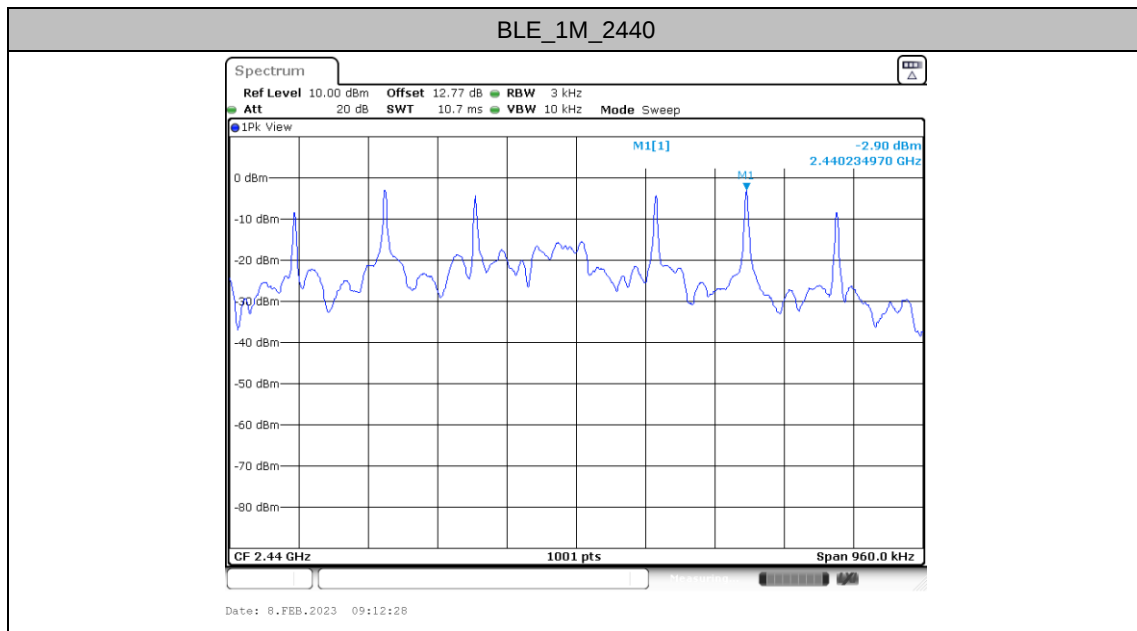




Reference level measurement

Test Result

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	2402	2401.99	4.75
	2440	2439.99	3.78
	2480	2479.99	3.68

Test Graphs

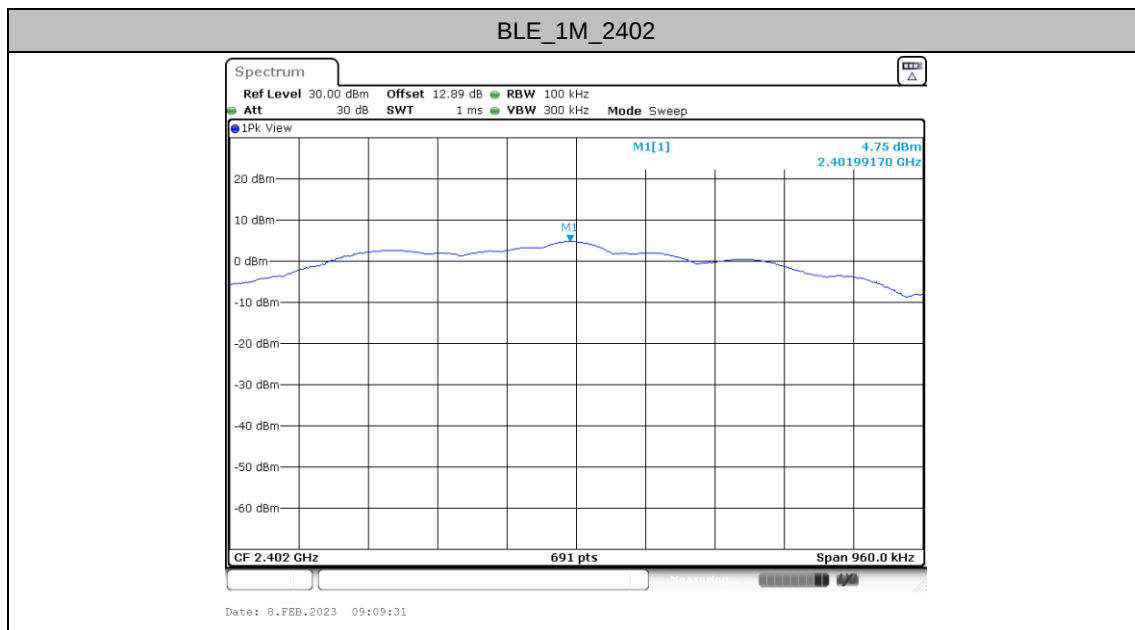

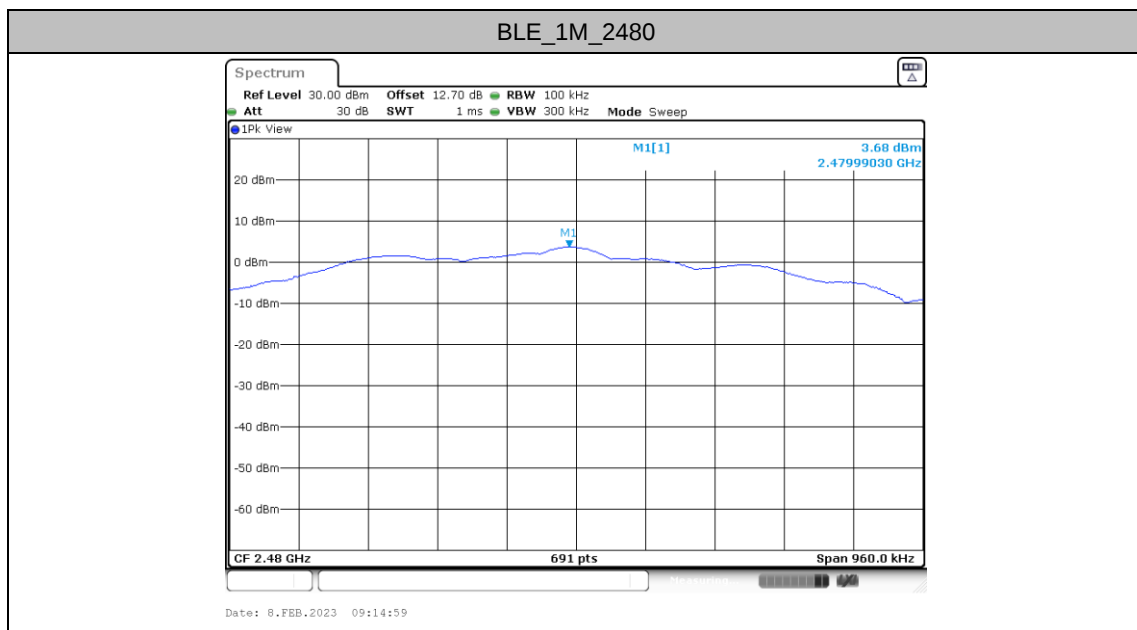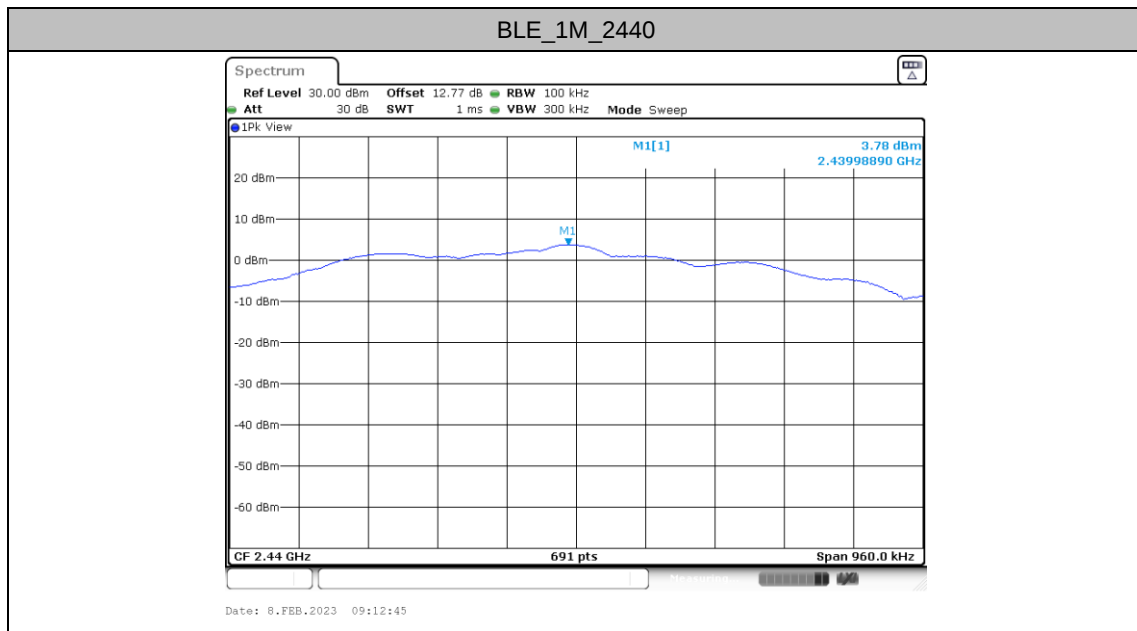




Band edge measurements

Test Result

TestMode	ChName	Freq (MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Low	2402	4.75	-42.07	≤-15.25	PASS
	High	2480	3.68	-41.98	≤-16.32	PASS



Test Graphs

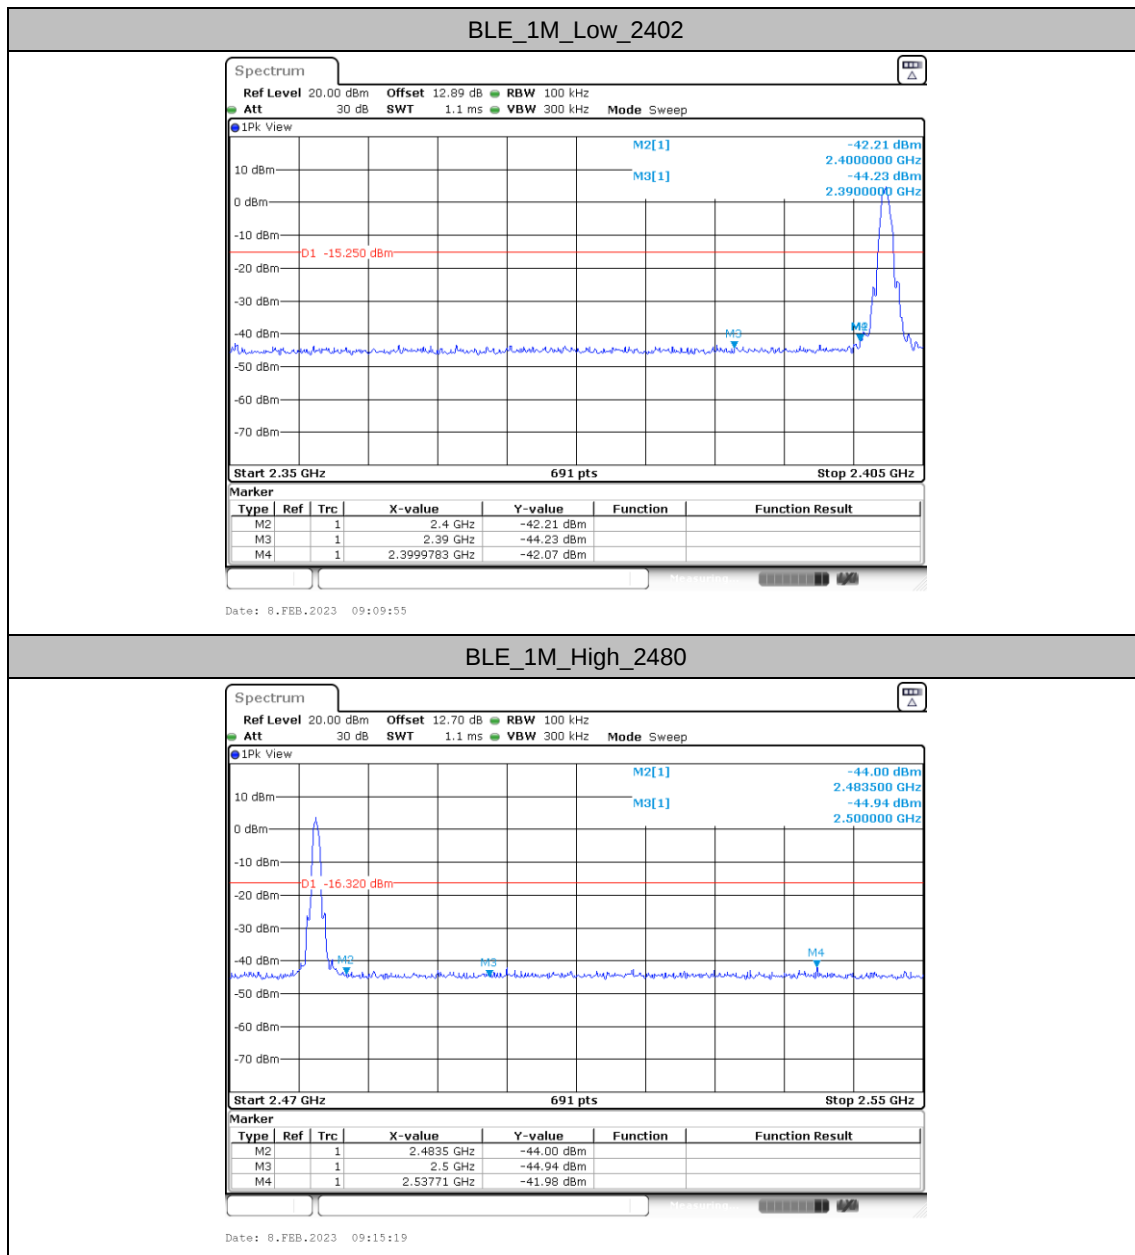




Conducted Spurious Emission


Test Result


TestMode	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	2402	30~1000	4.75	-54.51	≤ -15.25	PASS
		1000~26500	4.75	-45.23	≤ -15.25	PASS
	2440	30~1000	3.78	-54.65	≤ -16.22	PASS
		1000~26500	3.78	-45.83	≤ -16.22	PASS
	2480	30~1000	3.68	-54.41	≤ -16.32	PASS
		1000~26500	3.68	-45.57	≤ -16.32	PASS



Test Graphs

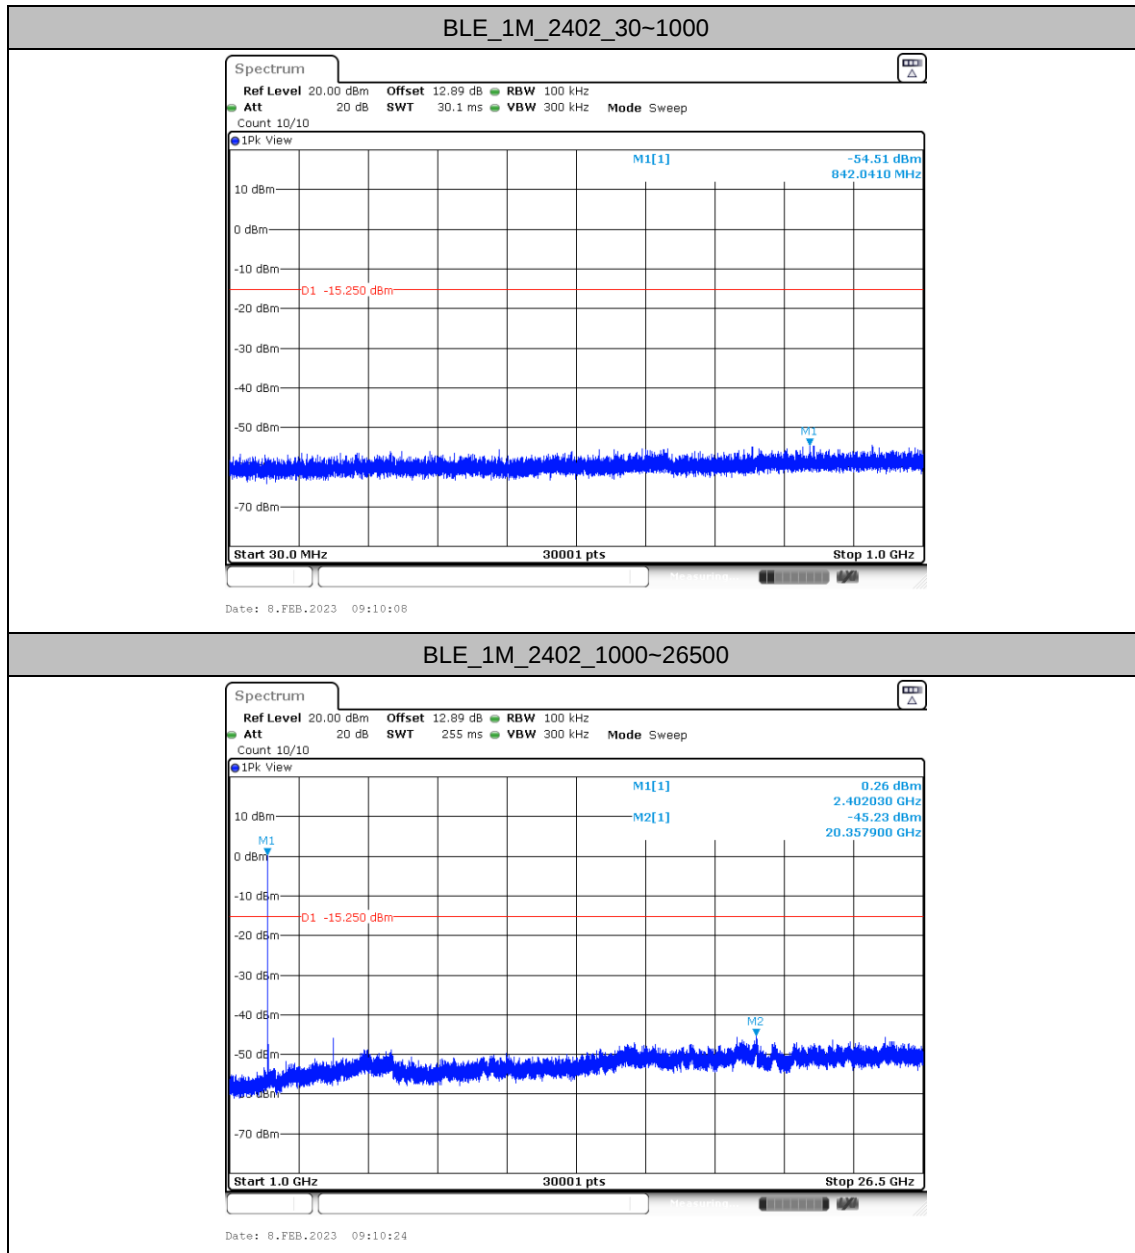

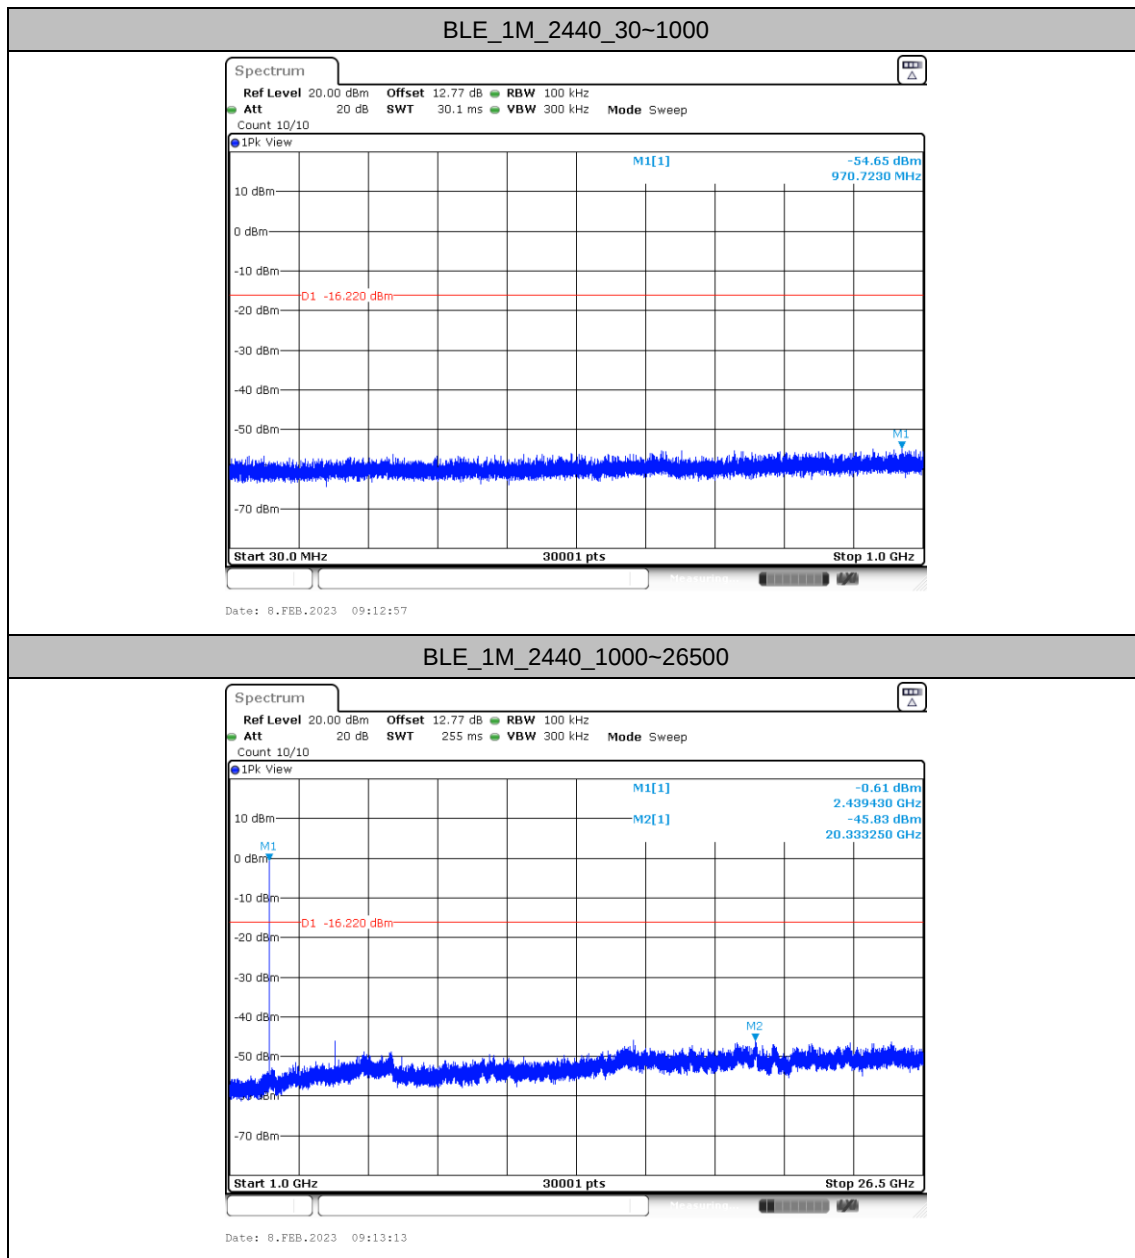


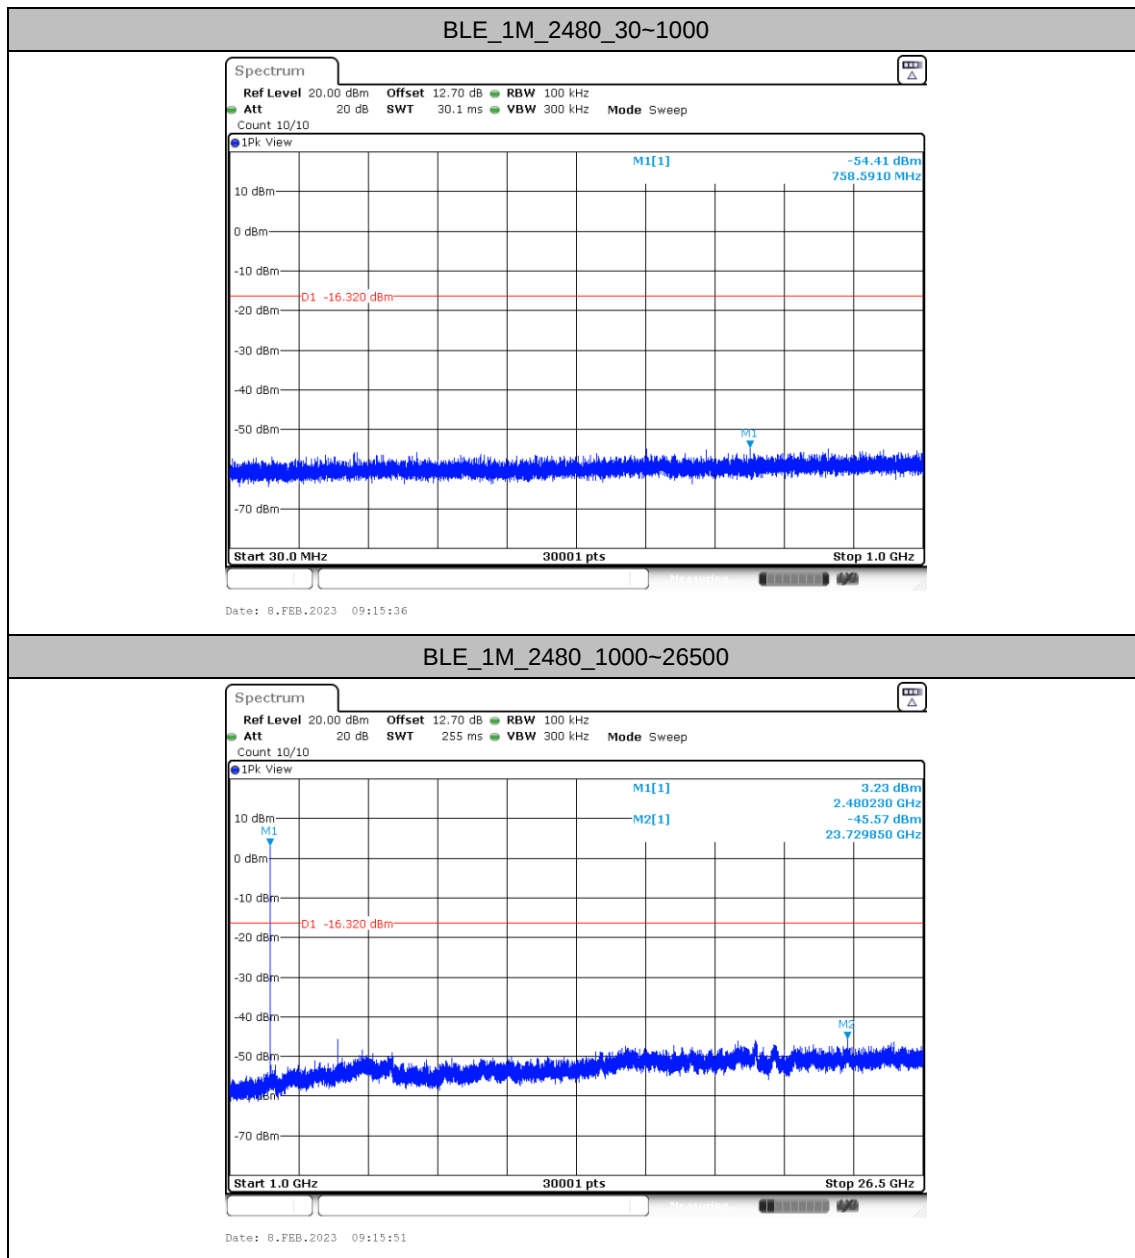



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

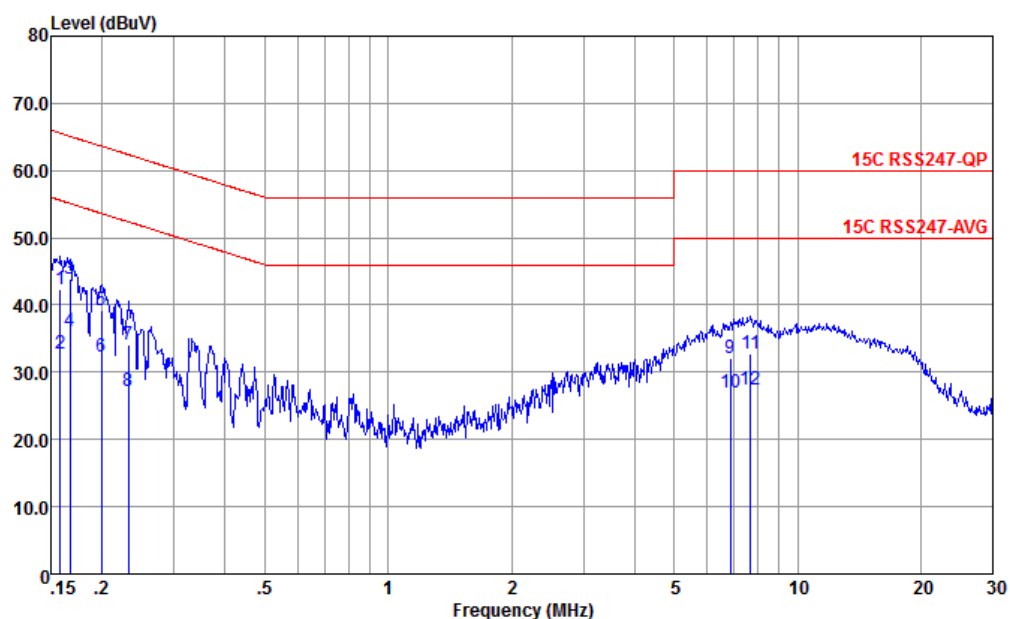


Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.158	42.35	-23.21	65.56	22.20	9.72	10.43	QP
2	0.158	32.65	-22.91	55.56	12.50	9.72	10.43	Average
3	0.167	43.82	-21.30	65.12	23.59	9.80	10.43	QP
4 *	0.167	36.02	-19.10	55.12	15.79	9.80	10.43	Average
5	0.200	39.28	-24.34	63.62	19.20	9.66	10.42	QP
6	0.200	32.28	-21.34	53.62	12.20	9.66	10.42	Average
7	0.232	34.15	-28.24	62.39	14.21	9.55	10.39	QP
8	0.232	27.25	-25.14	52.39	7.31	9.55	10.39	Average
9	6.841	32.07	-27.93	60.00	12.19	9.65	10.23	QP
10	6.841	26.97	-23.03	50.00	7.09	9.65	10.23	Average
11	7.687	32.83	-27.17	60.00	12.81	9.67	10.35	QP
12	7.687	27.33	-22.67	50.00	7.31	9.67	10.35	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

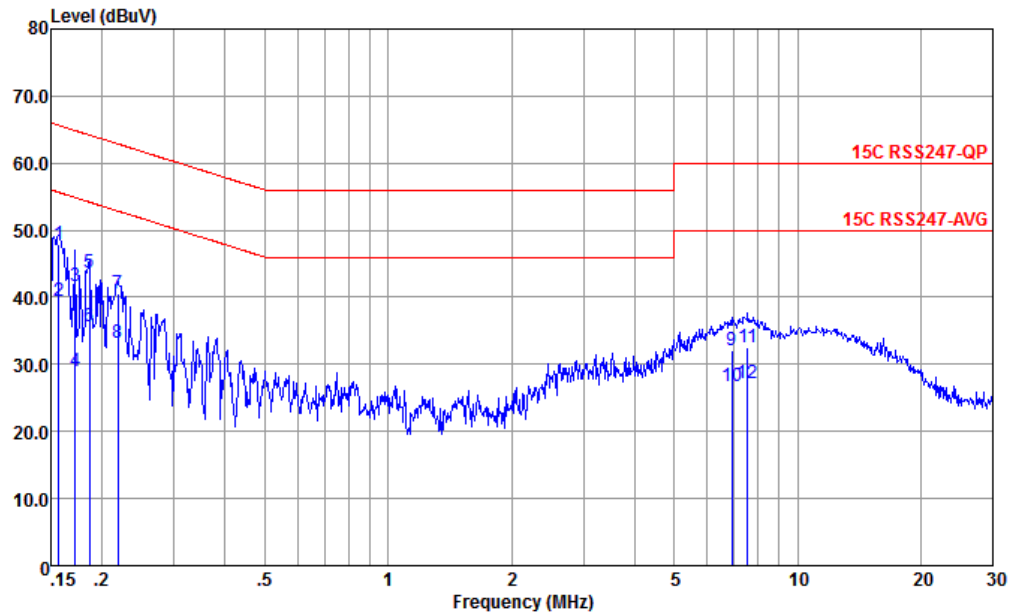

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.156	47.95	-17.70	65.65	27.90	9.62	10.43	QP
2 *	0.156	39.35	-16.30	55.65	19.30	9.62	10.43	Average
3	0.172	41.63	-23.23	64.86	21.59	9.61	10.43	QP
4	0.172	28.93	-25.93	54.86	8.89	9.61	10.43	Average
5	0.186	43.57	-20.63	64.20	23.60	9.55	10.42	QP
6	0.186	35.57	-18.63	54.20	15.60	9.55	10.42	Average
7	0.219	40.47	-22.41	62.88	20.60	9.47	10.40	QP
8	0.219	33.17	-19.71	52.88	13.30	9.47	10.40	Average
9	6.914	31.99	-28.01	60.00	12.19	9.56	10.24	QP
10	6.914	26.69	-23.31	50.00	6.89	9.56	10.24	Average
11	7.566	32.51	-27.49	60.00	12.60	9.57	10.34	QP
12	7.566	27.11	-22.89	50.00	7.20	9.57	10.34	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Carry Xu	Relative Humidity :	22 ~ 23℃
		Temperature :	41 ~ 42%

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	Bluetooth-LE (Qualcomm)	00	2402	1Mbps	-
Mode 2	2400-2483.5	Bluetooth-LE (Qualcomm)	19	2440	1Mbps	-
Mode 3	2400-2483.5	Bluetooth-LE (Qualcomm)	39	2480	1Mbps	-
Mode 4	2400-2483.5	Bluetooth-LE (Qualcomm)	00	2402	2Mbps	-
Mode 5	2400-2483.5	Bluetooth-LE (Qualcomm)	19	2440	2Mbps	-
Mode 6	2400-2483.5	Bluetooth-LE (Qualcomm)	39	2480	2Mbps	-
Mode 7	2400-2483.5	Bluetooth-LE (Nordic)	00	2402	1Mbps	-
Mode 8	2400-2483.5	Bluetooth-LE (Nordic)	19	2440	1Mbps	-
Mode 9	2400-2483.5	Bluetooth-LE (Nordic)	39	2480	1Mbps	-
Mode 10	2400-2483.5	Bluetooth-LE (Qualcomm)	00	2480	2Mbps	LF
Mode 11	2400-2483.5	Bluetooth-LE (Nordic)	39	2480	1Mbps	LF







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2388.00	32.88	54.00	-21.12	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	39.94	74.00	-34.06	H	PEAK	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	42.54	74.00	-31.46	V	PEAK	Pass	Harmonic
3	Bluetooth-LE	39	2486.68	32.50	54.00	-21.50	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	41.41	74.00	-32.59	H	PEAK	Pass	Harmonic
4	Bluetooth-LE	00	2389.04	39.70	54.00	-14.30	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	40.53	74.00	-33.47	V	PEAK	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	41.51	74.00	-32.49	H	PEAK	Pass	Harmonic
6	Bluetooth-LE	39	2486.98	39.36	54.00	-14.64	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	41.43	74.00	-32.57	H	PEAK	Pass	Harmonic
7	Bluetooth-LE (Nodic)	00	2386.05	39.02	54.00	-14.98	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE (Nodic)	00	4804.00	39.55	74.00	-34.45	H	PEAK	Pass	Harmonic
8	Bluetooth-LE (Nodic)	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE (Nodic)	19	7320.00	41.50	74.00	-32.50	V	PEAK	Pass	Harmonic
9	Bluetooth-LE (Nodic)	39	2483.68	40.31	54.00	-13.69	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE (Nodic)	39	7440.00	42.11	74.00	-31.89	V	PEAK	Pass	Harmonic
10	Bluetooth-LE	00	163.86	30.81	43.5	-12.69	H	PEAK	Pass	LF
11	Bluetooth-LE (Nodic BLE)	39	70.74	27.52	40.00	-12.48	V	PEAK	Pass	LF

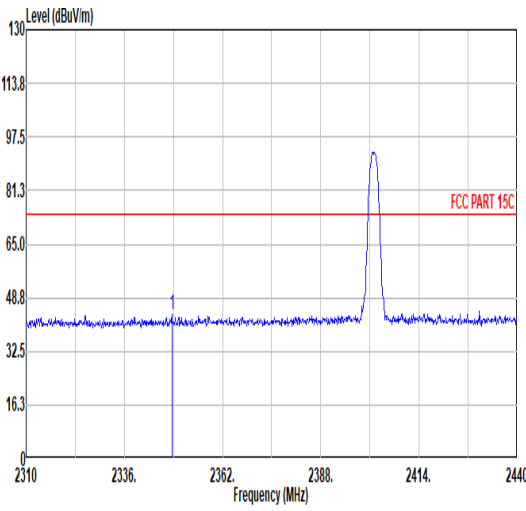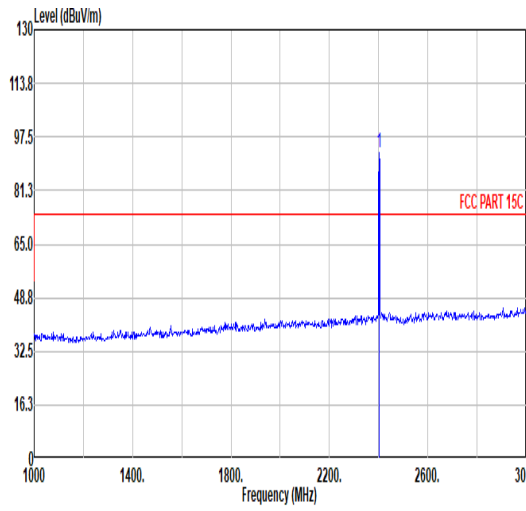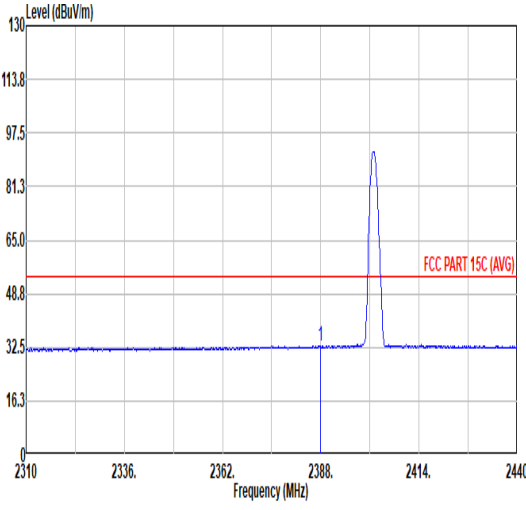
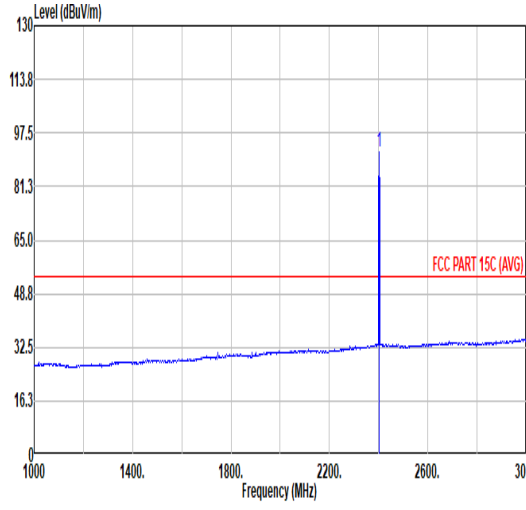


Mode	Mode 1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE _CH00_2402MHz																																																																																																														
Pol.	Horizontal											Fundamental																																																																																																			
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2348.61</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>40.92</td><td>32.16</td><td>7.04</td><td>36.60</td><td>0.00</td><td>189</td><td>59</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2348.61	43.52	74.00	-30.48	40.92	32.16	7.04	36.60	0.00	189	59	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.72</td><td>-----</td><td>-----</td><td>89.77</td><td>32.39</td><td>7.12</td><td>36.56</td><td>0.00</td><td>189</td><td>59</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.72	-----	-----	89.77	32.39	7.12	36.56	0.00	189	59
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2348.61	43.52	74.00	-30.48	40.92	32.16	7.04	36.60	0.00	189	59	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	92.72	-----	-----	89.77	32.39	7.12	36.56	0.00	189	59	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>32.88</td><td>54.00</td><td>-21.12</td><td>29.93</td><td>32.37</td><td>7.10</td><td>36.52</td><td>0.00</td><td>189</td><td>59</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	32.88	54.00	-21.12	29.93	32.37	7.10	36.52	0.00	189	59	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.83</td><td>-----</td><td>-----</td><td>88.88</td><td>32.39</td><td>7.12</td><td>36.56</td><td>0.00</td><td>189</td><td>59</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.83	-----	-----	88.88	32.39	7.12	36.56	0.00	189	59
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2388.00	32.88	54.00	-21.12	29.93	32.37	7.10	36.52	0.00	189	59	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	91.83	-----	-----	88.88	32.39	7.12	36.56	0.00	189	59	AVERAGE																																																																																																			

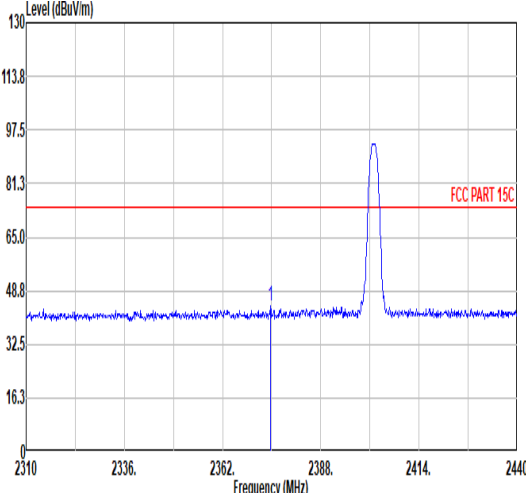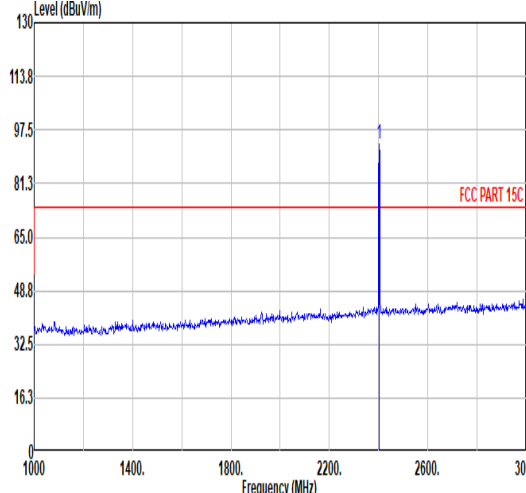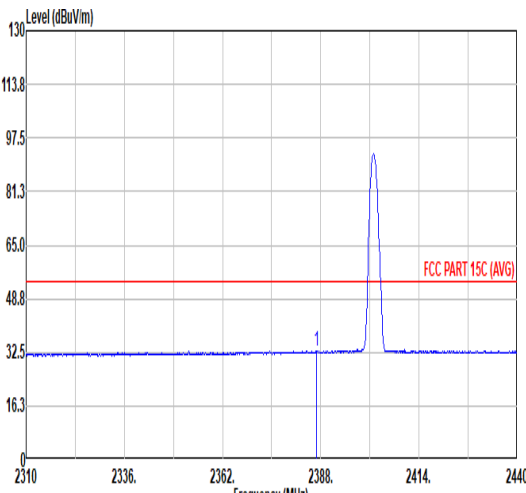
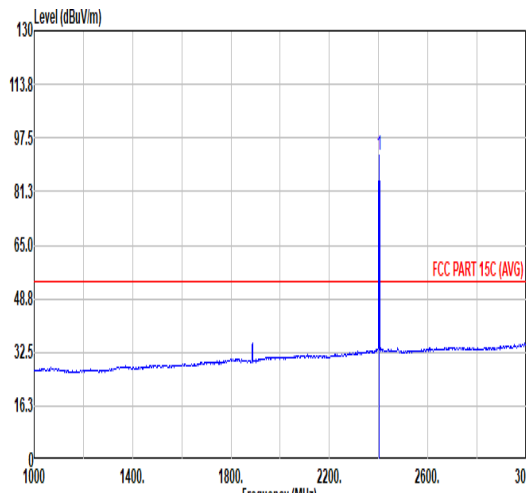


Mode	Mode 1																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.61</td><td>44.12</td><td>74.00</td><td>-29.88</td><td>41.29</td><td>32.30</td><td>7.08</td><td>36.55</td><td>0.00</td><td>223</td><td>18</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.61	44.12	74.00	-29.88	41.29	32.30	7.08	36.55	0.00	223	18
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2374.61	44.12	74.00	-29.88	41.29	32.30	7.08	36.55	0.00	223	18	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>93.41</td><td>-----</td><td>-----</td><td>90.46</td><td>32.39</td><td>7.12</td><td>36.56</td><td>0.00</td><td>223</td><td>18</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.41	-----	-----	90.46	32.39	7.12	36.56	0.00	223	18
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	93.41	-----	-----	90.46	32.39	7.12	36.56	0.00	223	18	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.61</td><td>44.12</td><td>74.00</td><td>-21.17</td><td>29.89</td><td>32.36</td><td>7.10</td><td>36.52</td><td>0.00</td><td>223</td><td>18</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.61	44.12	74.00	-21.17	29.89	32.36	7.10	36.52	0.00	223	18
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2374.61	44.12	74.00	-21.17	29.89	32.36	7.10	36.52	0.00	223	18	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.45</td><td>-----</td><td>-----</td><td>89.50</td><td>32.39</td><td>7.12</td><td>36.56</td><td>0.00</td><td>223</td><td>18</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.45	-----	-----	89.50	32.39	7.12	36.56	0.00	223	18
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	92.45	-----	-----	89.50	32.39	7.12	36.56	0.00	223	18	AVERAGE																																											



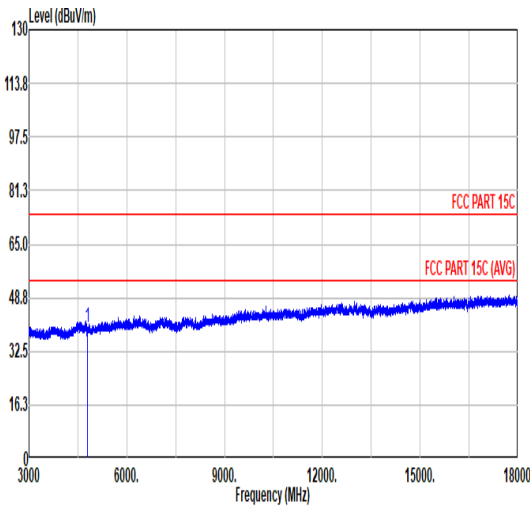
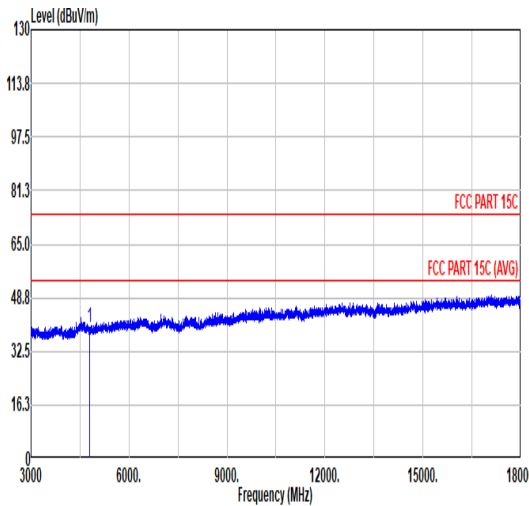


Mode	Mode 1																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																									
Pol.	Horizontal											Vertical																																																																																																														
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>39.94</td><td>74.00</td><td>-34.06</td><td>60.99</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	39.94	74.00	-34.06	60.99	34.00	10.20	65.25	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4804.00</td><td>39.60</td><td>74.00</td><td>-34.40</td><td>60.65</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	39.60	74.00	-34.40	60.65	34.00	10.20	65.25	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4804.00	39.94	74.00	-34.06	60.99	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4804.00	39.60	74.00	-34.40	60.65	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																														



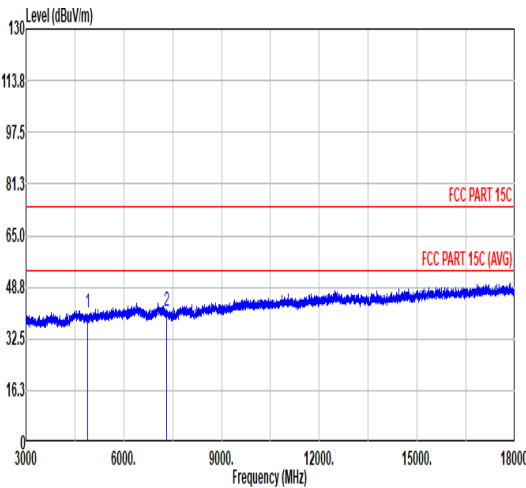
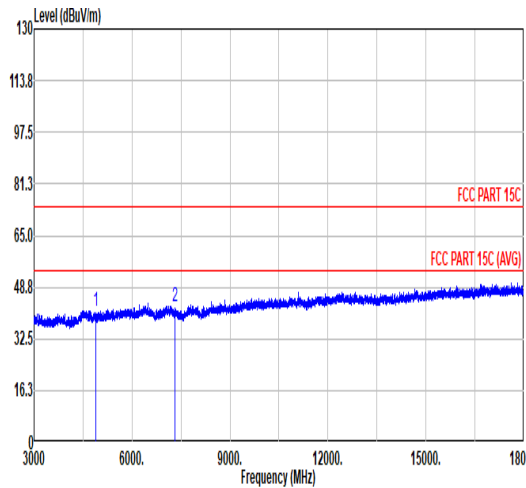


Mode	Mode 2																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_Bluetooth-LE _CH19_2440MHz																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>61.54</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.44</td><td>74.00</td><td>-32.56</td><td>59.68</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table> <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>41.19</td><td>74.00</td><td>-32.81</td><td>62.17</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>42.54</td><td>74.00</td><td>-31.46</td><td>60.78</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.56	74.00	-33.44	61.54	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	41.19	74.00	-32.81	62.17	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	42.54	74.00	-31.46	60.78	35.76	12.72	66.72	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	40.56	74.00	-33.44	61.54	34.00	10.30	65.28	0.00	---	---	PEAK																																																																																																																	
2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4880.00	41.19	74.00	-32.81	62.17	34.00	10.30	65.28	0.00	---	---	PEAK																																																																																																																	
2	7320.00	42.54	74.00	-31.46	60.78	35.76	12.72	66.72	0.00	---	---	PEAK																																																																																																																	

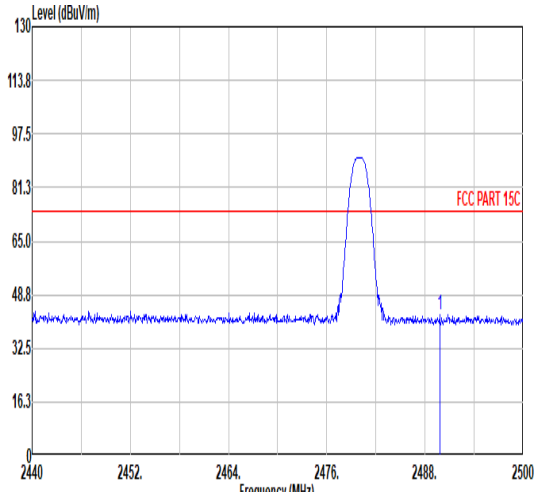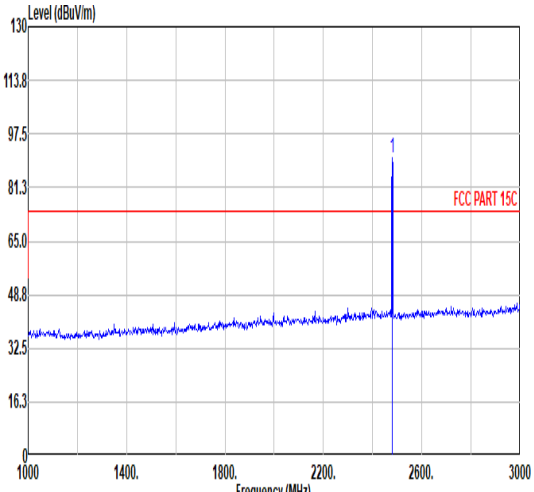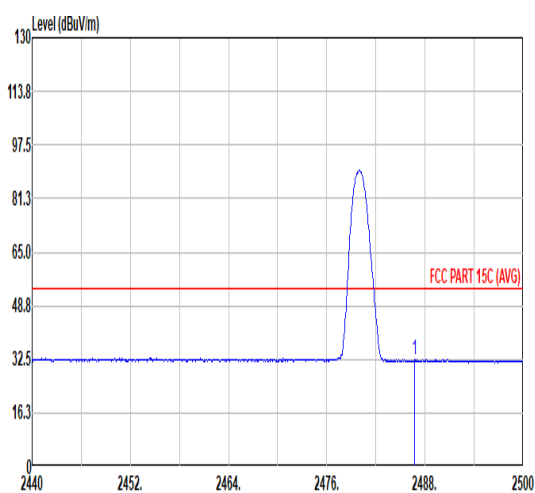
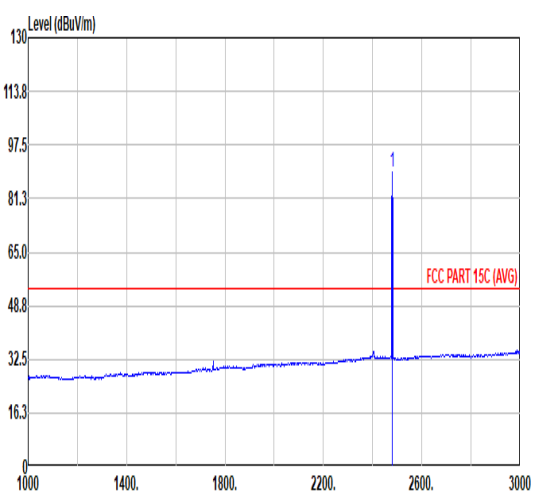


Mode	Mode 3																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.80</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>40.23</td><td>32.34</td><td>7.27</td><td>37.09</td><td>0.00</td><td>105 62 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.80	42.75	74.00	-31.25	40.23	32.34	7.27	37.09	0.00	105 62 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2489.80	42.75	74.00	-31.25	40.23	32.34	7.27	37.09	0.00	105 62 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.39</td><td>-----</td><td>-----</td><td>87.83</td><td>32.34</td><td>7.25</td><td>37.03</td><td>0.00</td><td>105 62 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.39	-----	-----	87.83	32.34	7.25	37.03	0.00	105 62 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	90.39	-----	-----	87.83	32.34	7.25	37.03	0.00	105 62 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.68</td><td>32.50</td><td>54.00</td><td>-21.50</td><td>29.97</td><td>32.34</td><td>7.26</td><td>37.07</td><td>0.00</td><td>105 62 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.68	32.50	54.00	-21.50	29.97	32.34	7.26	37.07	0.00	105 62 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2486.68	32.50	54.00	-21.50	29.97	32.34	7.26	37.07	0.00	105 62 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>89.40</td><td>-----</td><td>-----</td><td>86.84</td><td>32.34</td><td>7.25</td><td>37.03</td><td>0.00</td><td>105 62 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	89.40	-----	-----	86.84	32.34	7.25	37.03	0.00	105 62 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	89.40	-----	-----	86.84	32.34	7.25	37.03	0.00	105 62 AVERAGE																																													

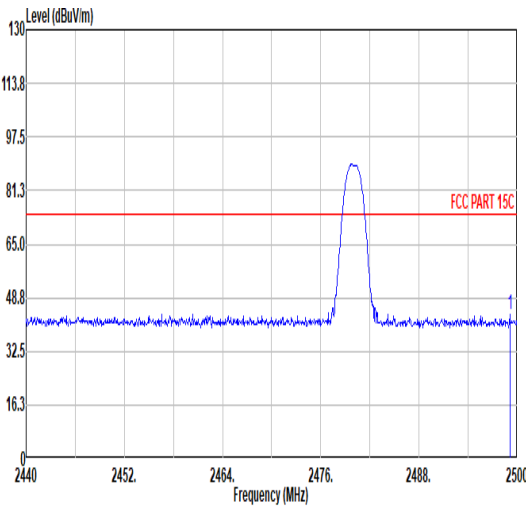
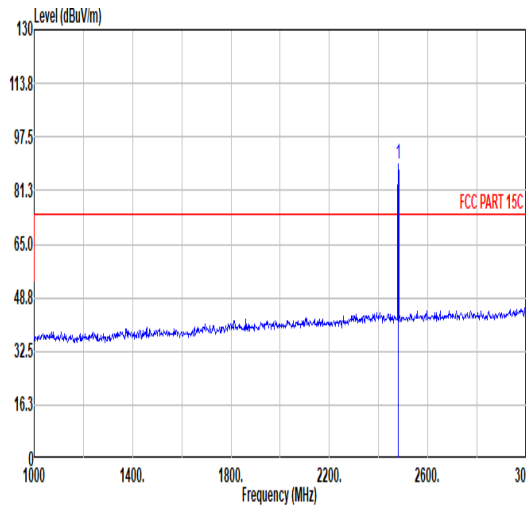
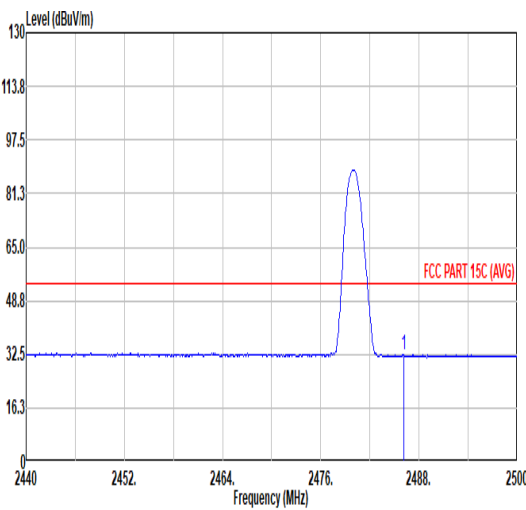
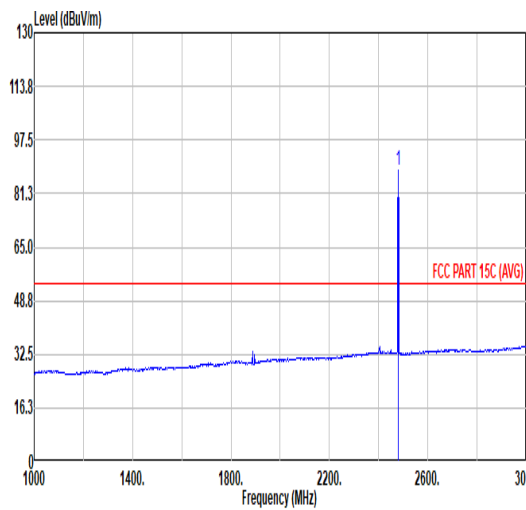


Mode	Mode 3																																																																																																																						
	Band Edge																																																																																																																						
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																						
Pol.	Vertical											Fundamental																																																																																																											
Peak																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.10</td><td>43.90</td><td>74.00</td><td>-30.10</td><td>41.44</td><td>32.33</td><td>7.28</td><td>37.15</td><td>0.00</td><td>235</td><td>18 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2499.10	43.90	74.00	-30.10	41.44	32.33	7.28	37.15	0.00	235	18 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>89.24</td><td>-----</td><td>-----</td><td>86.68</td><td>32.34</td><td>7.25</td><td>37.03</td><td>0.00</td><td>235</td><td>18 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	89.24	-----	-----	86.68	32.34	7.25	37.03	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2499.10	43.90	74.00	-30.10	41.44	32.33	7.28	37.15	0.00	235	18 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2480.00	89.24	-----	-----	86.68	32.34	7.25	37.03	0.00	235	18 PEAK																																																																																																												
Avg																																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.14</td><td>32.38</td><td>54.00</td><td>-21.62</td><td>29.85</td><td>32.34</td><td>7.26</td><td>37.07</td><td>0.00</td><td>235</td><td>18 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.14	32.38	54.00	-21.62	29.85	32.34	7.26	37.07	0.00	235	18 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>88.43</td><td>-----</td><td>-----</td><td>85.87</td><td>32.34</td><td>7.25</td><td>37.03</td><td>0.00</td><td>235</td><td>18 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	88.43	-----	-----	85.87	32.34	7.25	37.03	0.00	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2486.14	32.38	54.00	-21.62	29.85	32.34	7.26	37.07	0.00	235	18 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	2480.00	88.43	-----	-----	85.87	32.34	7.25	37.03	0.00	235	18 AVERAGE																																																																																																												



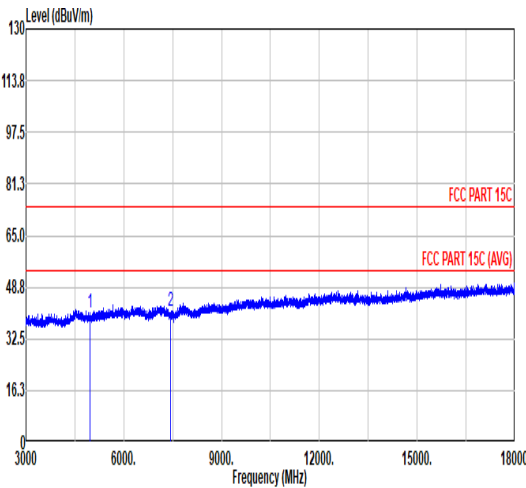
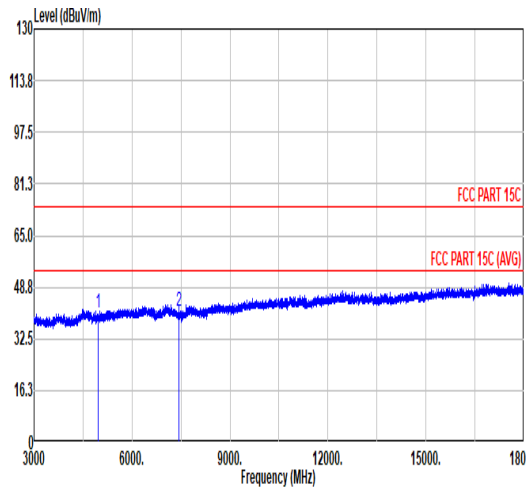


Mode	Mode 3																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE _CH39_2480MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.68</td><td>74.00</td><td>-33.32</td><td>61.60</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.41</td><td>74.00</td><td>-32.59</td><td>59.97</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.68	74.00	-33.32	61.60	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	41.41	74.00	-32.59	59.97	35.79	12.78	67.13	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.73</td><td>74.00</td><td>-33.27</td><td>61.65</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.12</td><td>74.00</td><td>-32.88</td><td>59.68</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.73	74.00	-33.27	61.65	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	41.12	74.00	-32.88	59.68	35.79	12.78	67.13	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.68	74.00	-33.32	61.60	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																		
2	7440.00	41.41	74.00	-32.59	59.97	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.73	74.00	-33.27	61.65	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																		
2	7440.00	41.12	74.00	-32.88	59.68	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																		

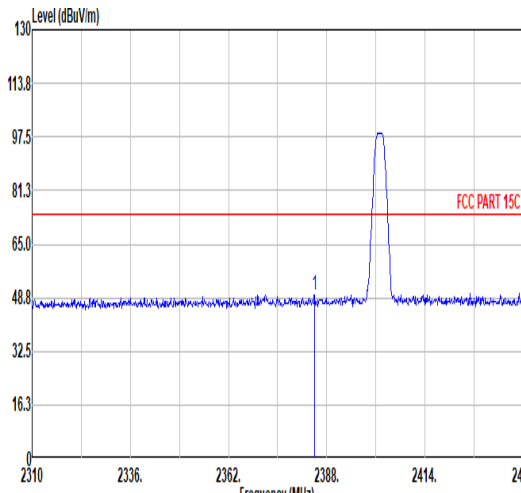
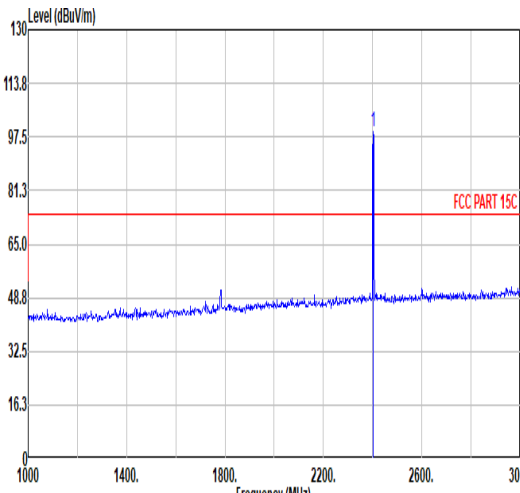
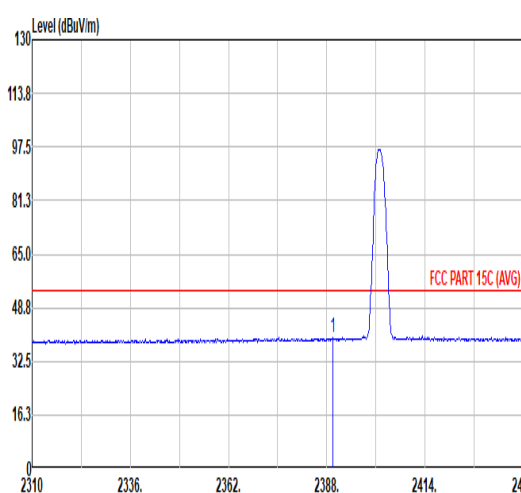
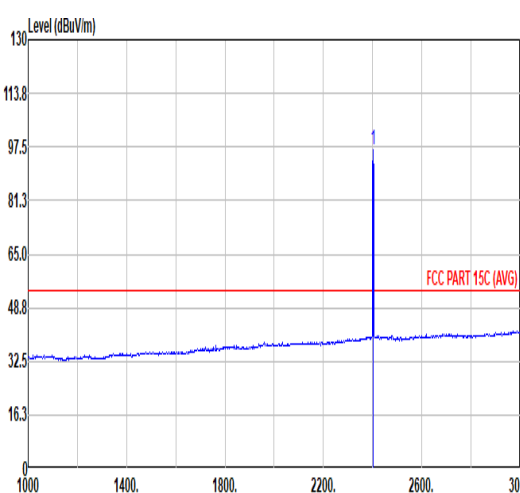


Mode	Mode 4																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE _CH00_2402MHz																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.75</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>40.65</td><td>32.35</td><td>7.10</td><td>36.53</td><td>6.00</td><td>134 59 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.75	49.57	74.00	-24.43	40.65	32.35	7.10	36.53	6.00	134 59 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2384.75	49.57	74.00	-24.43	40.65	32.35	7.10	36.53	6.00	134 59 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.02</td><td>-----</td><td>-----</td><td>90.07</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>134 59 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.02	-----	-----	90.07	32.39	7.12	36.56	6.00	134 59 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	99.02	-----	-----	90.07	32.39	7.12	36.56	6.00	134 59 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>39.64</td><td>54.00</td><td>-14.36</td><td>30.67</td><td>32.38</td><td>7.11</td><td>36.52</td><td>6.00</td><td>134 59 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	39.64	54.00	-14.36	30.67	32.38	7.11	36.52	6.00	134 59 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.69	39.64	54.00	-14.36	30.67	32.38	7.11	36.52	6.00	134 59 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.70</td><td>-----</td><td>-----</td><td>87.75</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>134 59 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.70	-----	-----	87.75	32.39	7.12	36.56	6.00	134 59 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	96.70	-----	-----	87.75	32.39	7.12	36.56	6.00	134 59 AVERAGE																																													

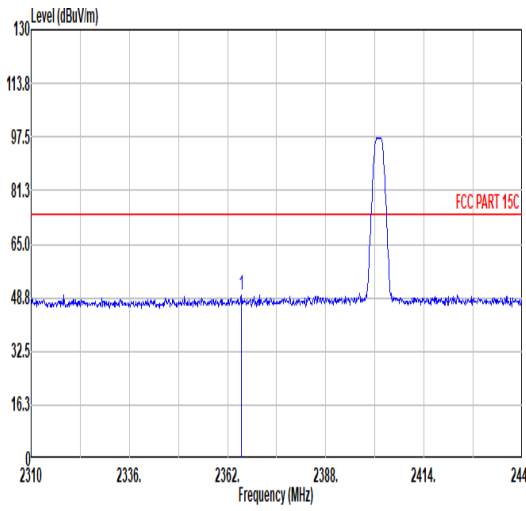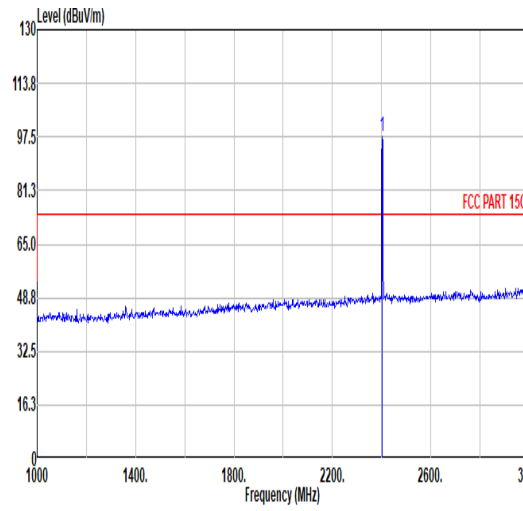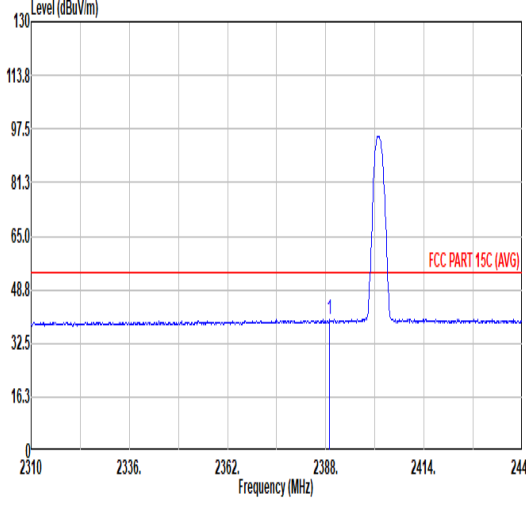
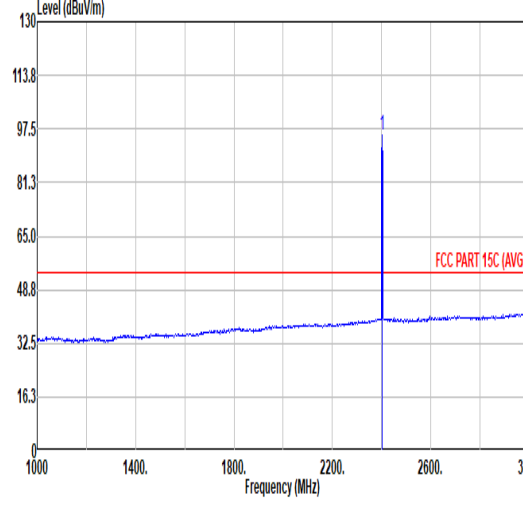


Mode	Mode 4																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2365.64</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>40.80</td><td>32.25</td><td>7.07</td><td>36.57</td><td>6.00</td><td>283</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2365.64	49.55	74.00	-24.45	40.80	32.25	7.07	36.57	6.00	283	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>97.54</td><td>-----</td><td>-----</td><td>88.59</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>283</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	97.54	-----	-----	88.59	32.39	7.12	36.56	6.00	283	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2365.64	49.55	74.00	-24.45	40.80	32.25	7.07	36.57	6.00	283	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	97.54	-----	-----	88.59	32.39	7.12	36.56	6.00	283	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.04</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>30.75</td><td>32.37</td><td>7.10</td><td>36.52</td><td>6.00</td><td>283</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	39.70	54.00	-14.30	30.75	32.37	7.10	36.52	6.00	283	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>95.42</td><td>-----</td><td>-----</td><td>86.47</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>283</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.42	-----	-----	86.47	32.39	7.12	36.56	6.00	283	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.04	39.70	54.00	-14.30	30.75	32.37	7.10	36.52	6.00	283	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	95.42	-----	-----	86.47	32.39	7.12	36.56	6.00	283	360	AVERAGE																																																																																																			

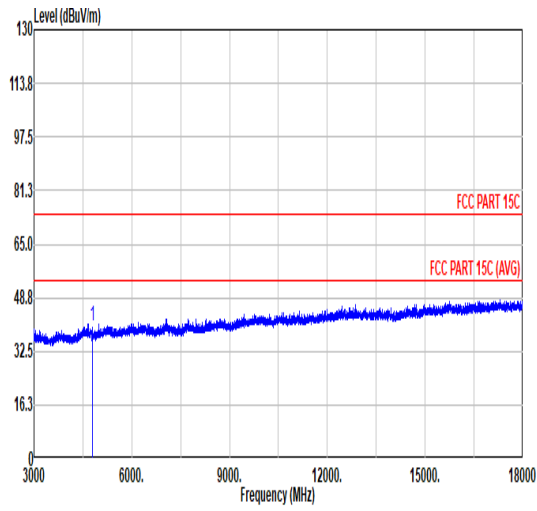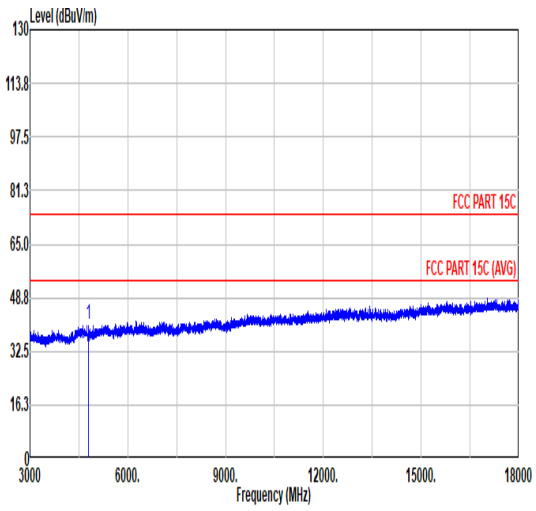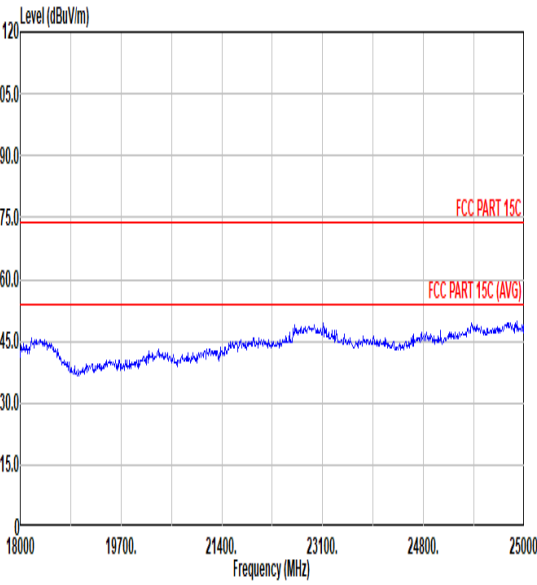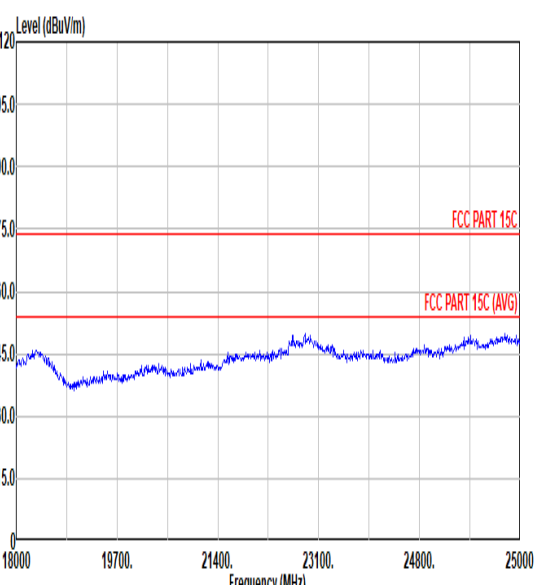

Mode	Mode 4																																																																																																														
	Harmonic																																																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																														
Pol.	Horizontal											Vertical																																																																																																			
Peak Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>61.16</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.11	74.00	-33.89	61.16	34.00	10.20	65.25	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.53</td><td>74.00</td><td>-33.47</td><td>61.58</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.53	74.00	-33.47	61.58	34.00	10.20	65.25	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	40.11	74.00	-33.89	61.16	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	40.53	74.00	-33.47	61.58	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																			
Peak Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>61.16</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.11	74.00	-33.89	61.16	34.00	10.20	65.25	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.53</td><td>74.00</td><td>-33.47</td><td>61.58</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	40.53	74.00	-33.47	61.58	34.00	10.20	65.25	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	40.11	74.00	-33.89	61.16	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	40.53	74.00	-33.47	61.58	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																																			

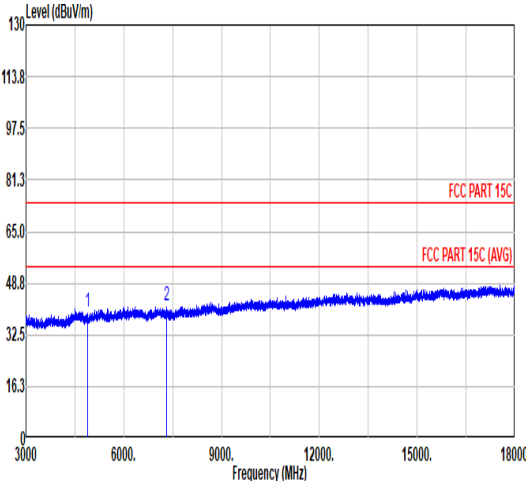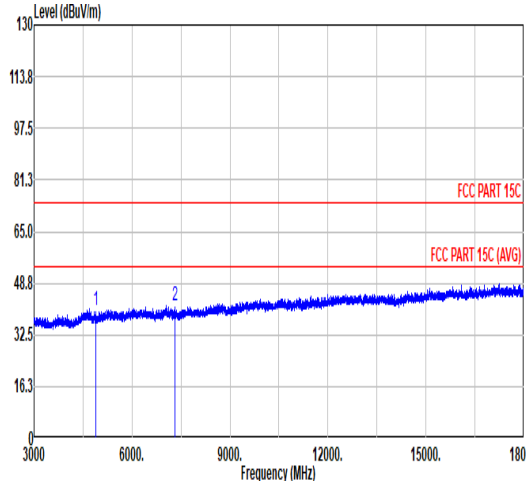

Mode	Mode 5																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>39.67</td><td>74.00</td><td>-34.33</td><td>60.65</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>59.75</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	39.67	74.00	-34.33	60.65	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.51	74.00	-32.49	59.75	35.76	12.72	66.72	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>40.24</td><td>74.00</td><td>-33.76</td><td>61.22</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.46</td><td>74.00</td><td>-32.54</td><td>59.70</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	40.24	74.00	-33.76	61.22	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.46	74.00	-32.54	59.70	35.76	12.72	66.72	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	39.67	74.00	-34.33	60.65	34.00	10.30	65.28	0.00	---	---	PEAK																																																																																																																		
2	7320.00	41.51	74.00	-32.49	59.75	35.76	12.72	66.72	0.00	---	---	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4880.00	40.24	74.00	-33.76	61.22	34.00	10.30	65.28	0.00	---	---	PEAK																																																																																																																		
2	7320.00	41.46	74.00	-32.54	59.70	35.76	12.72	66.72	0.00	---	---	PEAK																																																																																																																		





Mode	Mode 6																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE _CH39_2480MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.10</td><td>50.12</td><td>74.00</td><td>-23.88</td><td>41.58</td><td>32.34</td><td>7.26</td><td>37.06</td><td>6.00</td><td>366</td><td>102</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.10	50.12	74.00	-23.88	41.58	32.34	7.26	37.06	6.00	366	102
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.10	50.12	74.00	-23.88	41.58	32.34	7.26	37.06	6.00	366	102	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.98</td><td>39.36</td><td>54.00</td><td>-14.64</td><td>30.83</td><td>32.34</td><td>7.26</td><td>37.07</td><td>6.00</td><td>366</td><td>102</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.98	39.36	54.00	-14.64	30.83	32.34	7.26	37.07	6.00	366	102
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2486.98	39.36	54.00	-14.64	30.83	32.34	7.26	37.07	6.00	366	102	AVERAGE																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>97.07</td><td>-----</td><td>-----</td><td>88.51</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>366</td><td>102</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	97.07	-----	-----	88.51	32.34	7.25	37.03	6.00	366	102
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	97.07	-----	-----	88.51	32.34	7.25	37.03	6.00	366	102	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.87</td><td>-----</td><td>-----</td><td>86.31</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>366</td><td>102</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.87	-----	-----	86.31	32.34	7.25	37.03	6.00	366	102
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	94.87	-----	-----	86.31	32.34	7.25	37.03	6.00	366	102	AVERAGE																																											







Mode	Mode 6																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.98</td><td>49.65</td><td>74.00</td><td>-24.35</td><td>41.15</td><td>32.34</td><td>7.27</td><td>37.11</td><td>6.00</td><td>297</td><td>337</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.98	49.65	74.00	-24.35	41.15	32.34	7.27	37.11	6.00	297	337	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.21</td><td>-----</td><td>-----</td><td>85.65</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>297</td><td>337</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.21	-----	-----	85.65	32.34	7.25	37.03	6.00	297	337	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2492.98	49.65	74.00	-24.35	41.15	32.34	7.27	37.11	6.00	297	337	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	94.21	-----	-----	85.65	32.34	7.25	37.03	6.00	297	337	PEAK																																																																														
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2495.74</td><td>39.04</td><td>54.00</td><td>-14.96</td><td>30.56</td><td>32.33</td><td>7.28</td><td>37.13</td><td>6.00</td><td>297</td><td>337</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2495.74	39.04	54.00	-14.96	30.56	32.33	7.28	37.13	6.00	297	337	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>91.96</td><td>-----</td><td>-----</td><td>83.40</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>297</td><td>337</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.96	-----	-----	83.40	32.34	7.25	37.03	6.00	297	337	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2495.74	39.04	54.00	-14.96	30.56	32.33	7.28	37.13	6.00	297	337	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	91.96	-----	-----	83.40	32.34	7.25	37.03	6.00	297	337	AVERAGE																																																																														



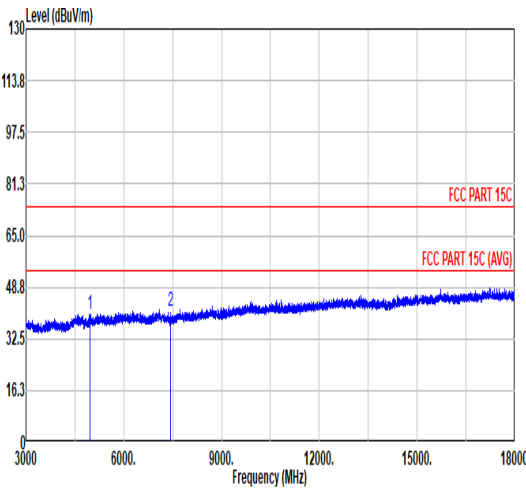
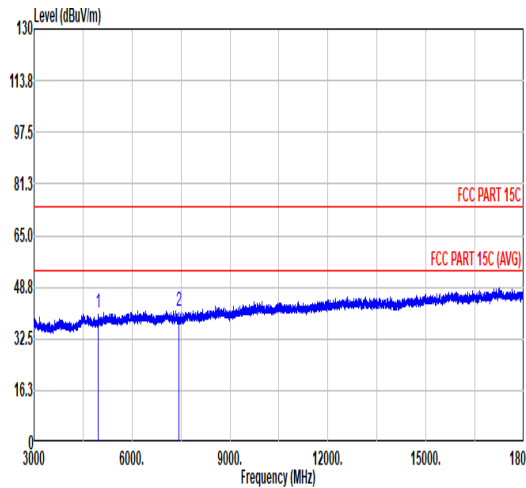


Mode	Mode 6																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Bluetooth-LE _CH39_2480MHz																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.23</td><td>74.00</td><td>-33.77</td><td>61.15</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.43</td><td>74.00</td><td>-32.57</td><td>59.99</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.23	74.00	-33.77	61.15	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	41.43	74.00	-32.57	59.99	35.79	12.78	67.13	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.61</td><td>74.00</td><td>-33.39</td><td>61.53</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>59.95</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.61	74.00	-33.39	61.53	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	41.39	74.00	-32.61	59.95	35.79	12.78	67.13	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.23	74.00	-33.77	61.15	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																		
2	7440.00	41.43	74.00	-32.57	59.99	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.61	74.00	-33.39	61.53	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																		
2	7440.00	41.39	74.00	-32.61	59.95	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																		

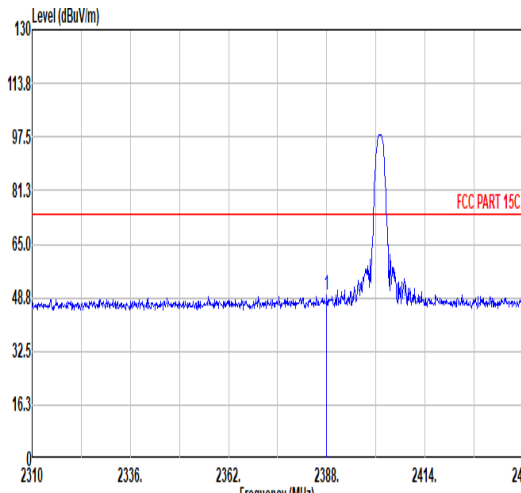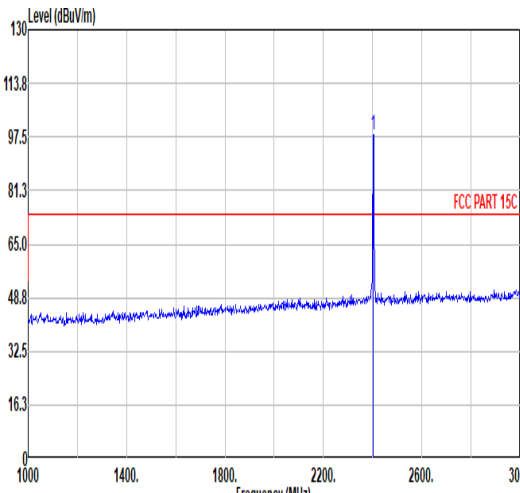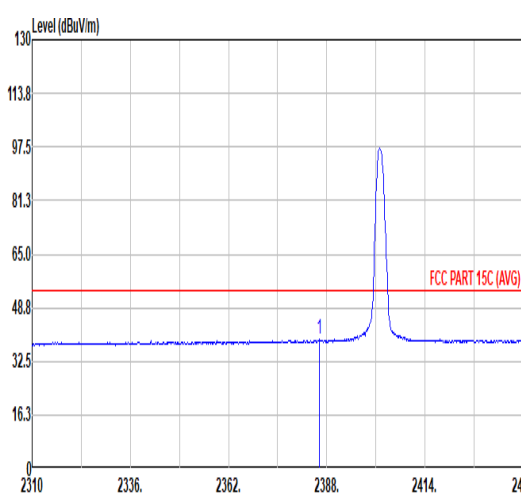
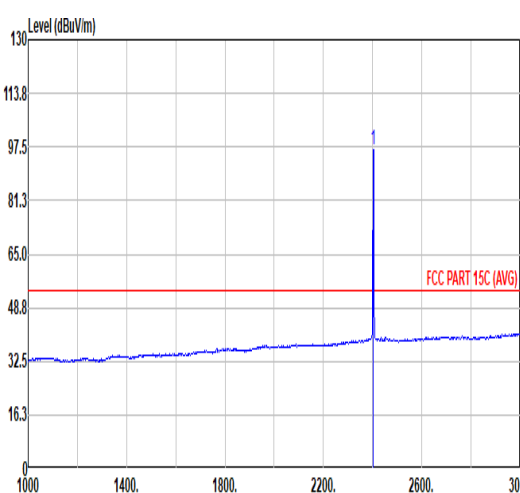


Mode	Mode 7																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE(Nodic BLE) _CH00_2402MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>49.30</td><td>74.00</td><td>-24.70</td><td>40.35</td><td>32.37</td><td>7.10</td><td>36.52</td><td>6.00</td><td>305</td><td>124</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	49.30	74.00	-24.70	40.35	32.37	7.10	36.52	6.00	305	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2388.00	49.30	74.00	-24.70	40.35	32.37	7.10	36.52	6.00	305	124	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>98.16</td><td>-----</td><td>-----</td><td>89.21</td><td>32.39</td><td>7.13</td><td>36.57</td><td>6.00</td><td>305</td><td>124</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	98.16	-----	-----	89.21	32.39	7.13	36.57	6.00	305	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	98.16	-----	-----	89.21	32.39	7.13	36.57	6.00	305	124	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>39.02</td><td>54.00</td><td>-14.98</td><td>30.09</td><td>32.36</td><td>7.10</td><td>36.53</td><td>6.00</td><td>305</td><td>124</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	39.02	54.00	-14.98	30.09	32.36	7.10	36.53	6.00	305	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2386.05	39.02	54.00	-14.98	30.09	32.36	7.10	36.53	6.00	305	124	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.83</td><td>-----</td><td>-----</td><td>87.88</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>305</td><td>124</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	96.83	-----	-----	87.88	32.39	7.12	36.56	6.00	305	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2402.00	96.83	-----	-----	87.88	32.39	7.12	36.56	6.00	305	124	AVERAGE																																											

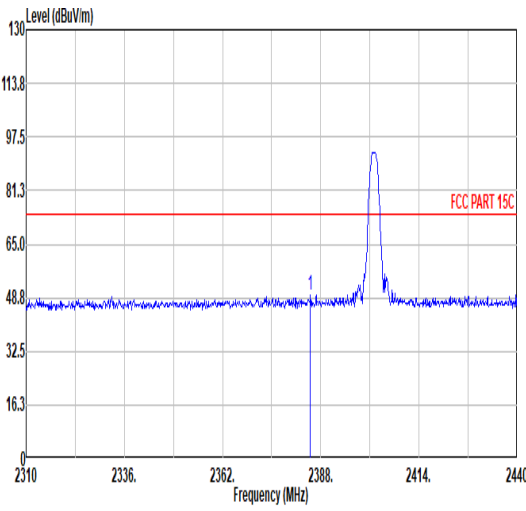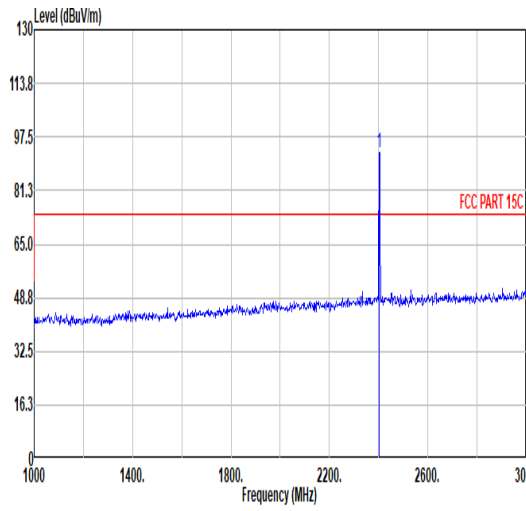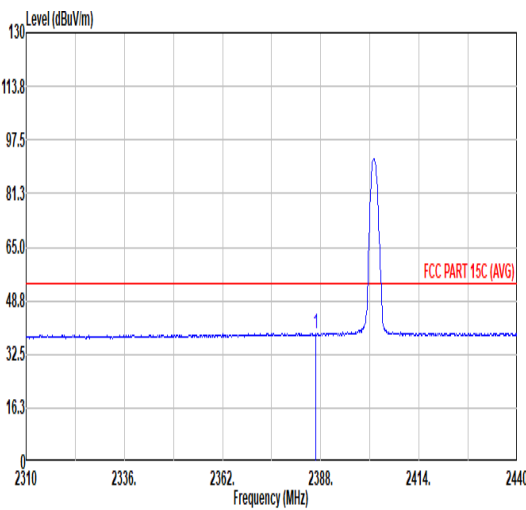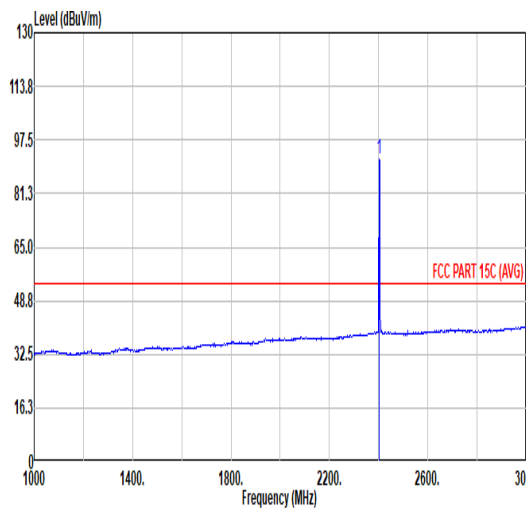


Mode	Mode 7																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE(Nodic BLE) _CH00_2402MHz																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.27</td><td>49.57</td><td>74.00</td><td>-24.43</td><td>40.65</td><td>32.35</td><td>7.10</td><td>36.53</td><td>6.00</td><td>201</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.27	49.57	74.00	-24.43	40.65	32.35	7.10	36.53	6.00	201	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.88</td><td>-----</td><td>-----</td><td>83.93</td><td>32.39</td><td>7.13</td><td>36.57</td><td>6.00</td><td>201</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.88	-----	-----	83.93	32.39	7.13	36.57	6.00	201	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2385.27	49.57	74.00	-24.43	40.65	32.35	7.10	36.53	6.00	201	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	92.88	-----	-----	83.93	32.39	7.13	36.57	6.00	201	360	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.70</td><td>38.87</td><td>54.00</td><td>-15.13</td><td>29.94</td><td>32.36</td><td>7.10</td><td>36.53</td><td>6.00</td><td>201</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	38.87	54.00	-15.13	29.94	32.36	7.10	36.53	6.00	201	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.62</td><td>-----</td><td>-----</td><td>82.67</td><td>32.39</td><td>7.12</td><td>36.56</td><td>6.00</td><td>201</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.62	-----	-----	82.67	32.39	7.12	36.56	6.00	201	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2386.70	38.87	54.00	-15.13	29.94	32.36	7.10	36.53	6.00	201	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2402.00	91.62	-----	-----	82.67	32.39	7.12	36.56	6.00	201	360	AVERAGE																																																																																																			



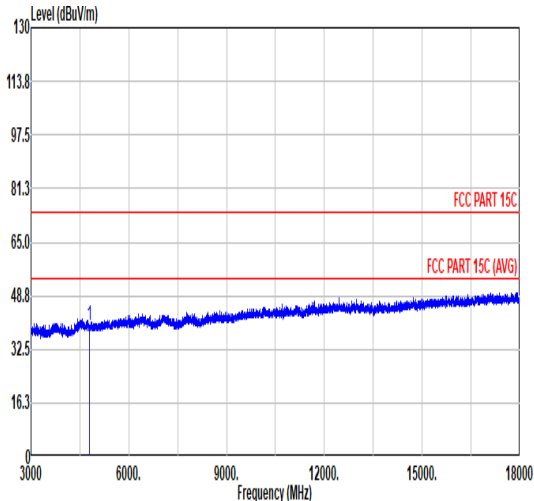
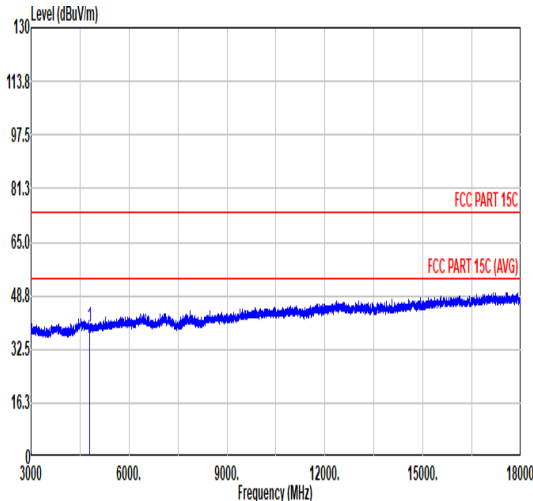


Mode	Mode 7																																																																																																		
	Harmonic																																																																																																		
	2400-2483.5_Bluetooth-LE(Nodic BLE) _CH00_2402MHz																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>60.60</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	39.55	74.00	-34.45	60.60	34.00	10.20	65.25	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>39.38</td><td>74.00</td><td>-34.62</td><td>60.43</td><td>34.00</td><td>10.20</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	39.38	74.00	-34.62	60.43	34.00	10.20	65.25	0.00	---	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	39.55	74.00	-34.45	60.60	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	4804.00	39.38	74.00	-34.62	60.43	34.00	10.20	65.25	0.00	---	---	PEAK																																																																																							




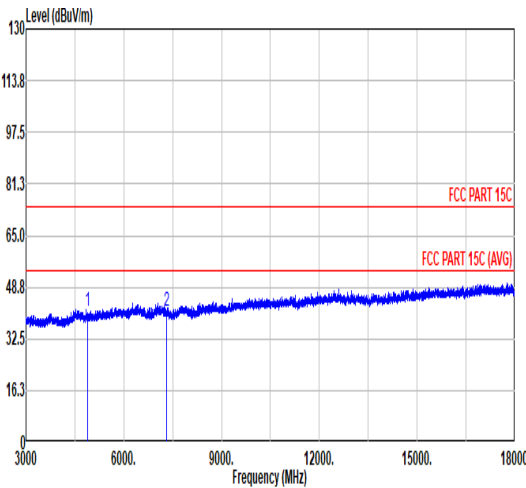


Mode	Mode 8																																																																									
	Harmonic																																																																									
	2400-2483.5_Bluetooth-LE(Nodic BLE) _CH19_2440MHz																																																																									
Pol.	Horizontal																																																																									
Peak Avg																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>62.14</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.44</td><td>74.00</td><td>-32.56</td><td>59.68</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK																																																														
2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>62.14</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.44</td><td>74.00</td><td>-32.56</td><td>59.68</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK																																																														
2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>62.14</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.44</td><td>74.00</td><td>-32.56</td><td>59.68</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	4880.00	41.16	74.00	-32.84	62.14	34.00	10.30	65.28	0.00	---	---	PEAK																																																														
2	7320.00	41.44	74.00	-32.56	59.68	35.76	12.72	66.72	0.00	---	---	PEAK																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>61.16</td><td>34.00</td><td>10.30</td><td>65.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.50</td><td>74.00</td><td>-32.50</td><td>59.74</td><td>35.76</td><td>12.72</td><td>66.72</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	40.18	74.00	-33.82	61.16	34.00	10.30	65.28	0.00	---	---	PEAK	2	7320.00	41.50	74.00	-32.50	59.74	35.76	12.72	66.72	0.00	---	---	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																
1	4880.00	40.18	74.00	-33.82	61.16	34.00	10.30	65.28	0.00	---	---	PEAK																																																														
2	7320.00	41.50	74.00	-32.50	59.74	35.76	12.72	66.72	0.00	---	---	PEAK																																																														

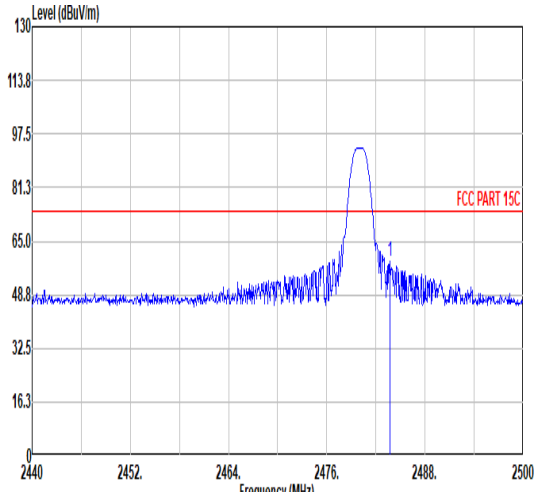
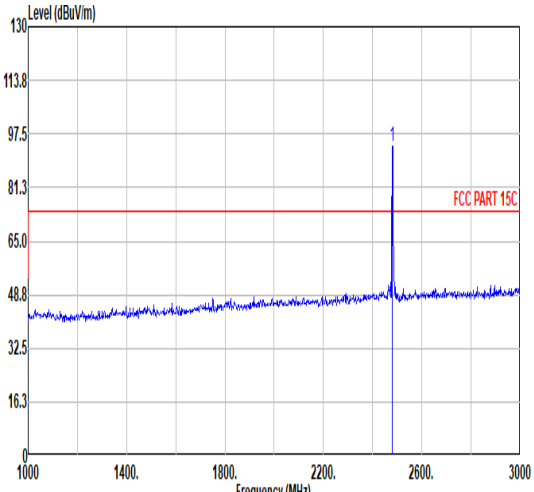
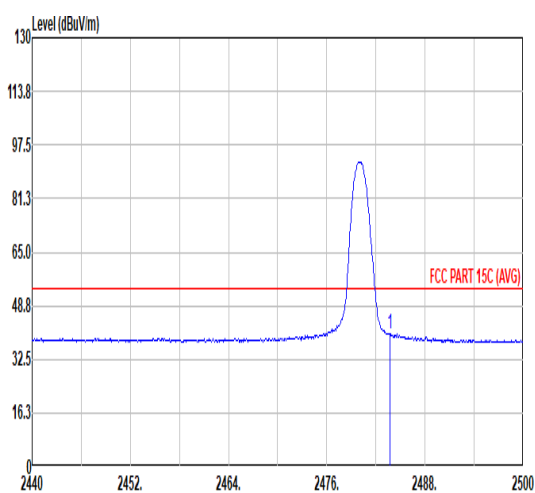
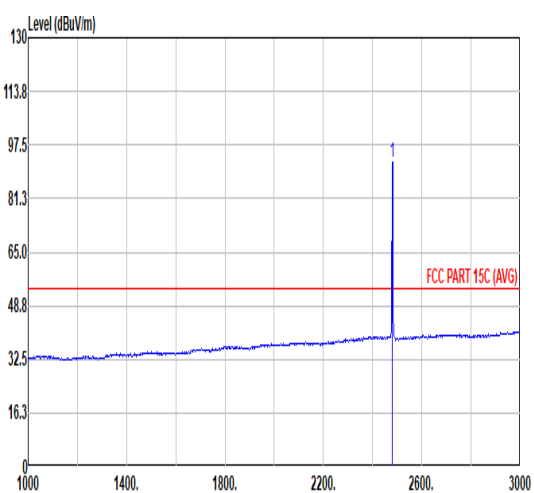


Mode	Mode 9																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Bluetooth-LE(Nodic BLE)_CH39_2480MHz																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>58.92</td><td>74.00</td><td>-15.08</td><td>50.37</td><td>32.34</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>33</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	58.92	74.00	-15.08	50.37	32.34	7.26	37.05	6.00	100	33	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.56</td><td>-----</td><td>-----</td><td>85.01</td><td>32.34</td><td>7.25</td><td>37.04</td><td>6.00</td><td>100</td><td>33</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.56	-----	-----	85.01	32.34	7.25	37.04	6.00	100	33
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.68	58.92	74.00	-15.08	50.37	32.34	7.26	37.05	6.00	100	33	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	93.56	-----	-----	85.01	32.34	7.25	37.04	6.00	100	33	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>31.76</td><td>32.34</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>33</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	40.31	54.00	-13.69	31.76	32.34	7.26	37.05	6.00	100	33	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.33</td><td>-----</td><td>-----</td><td>83.77</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>100</td><td>33</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	92.33	-----	-----	83.77	32.34	7.25	37.03	6.00	100	33
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.68	40.31	54.00	-13.69	31.76	32.34	7.26	37.05	6.00	100	33	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	92.33	-----	-----	83.77	32.34	7.25	37.03	6.00	100	33	AVERAGE																																																																																																			

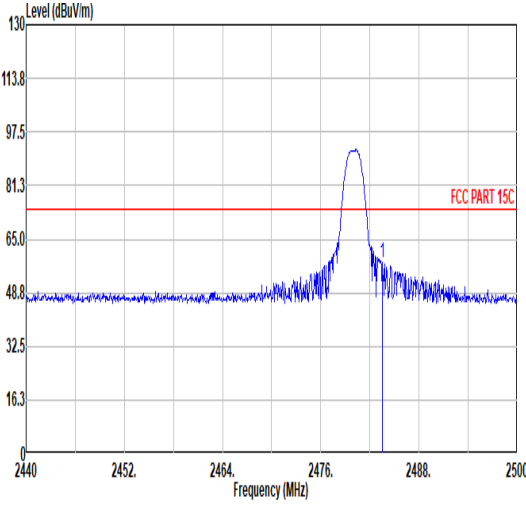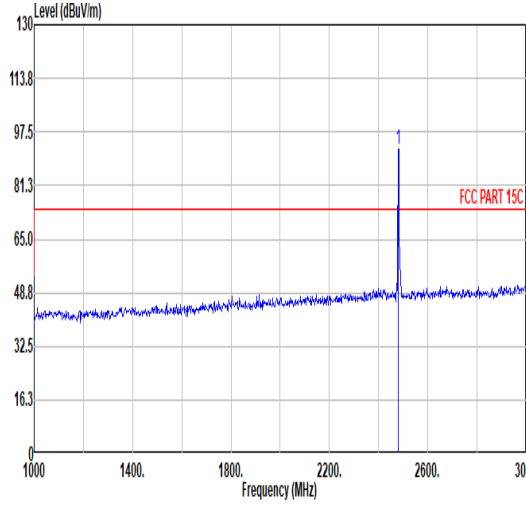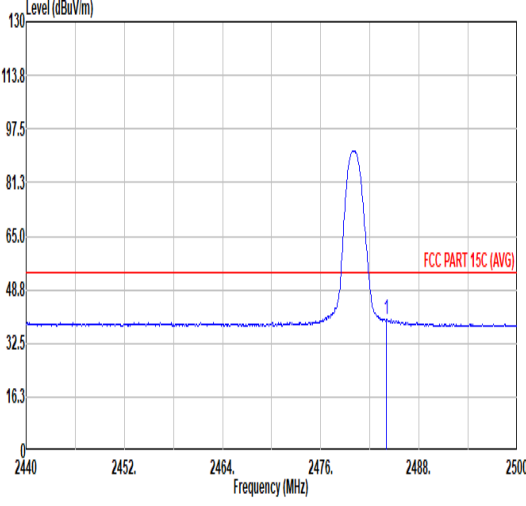
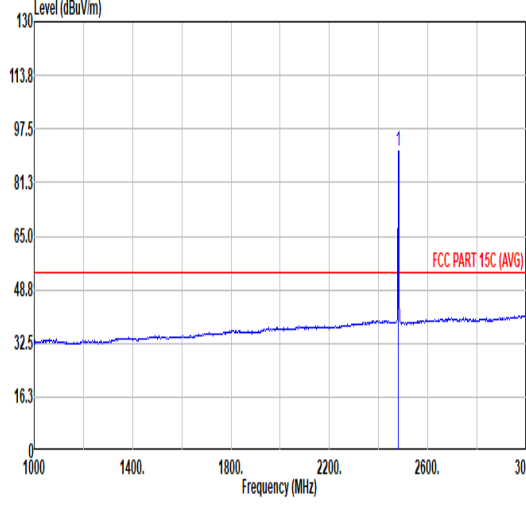


Mode	Mode 9																																																						
	Band Edge																																																						
	2400-2483.5_Bluetooth-LE(Nodic BLE)_CH39_2480MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>57.89</td><td>74.00</td><td>-16.11</td><td>49.34</td><td>32.34</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>148</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	57.89	74.00	-16.11	49.34	32.34	7.26	37.05	6.00	100	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	57.89	74.00	-16.11	49.34	32.34	7.26	37.05	6.00	100	148	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.20</td><td>-----</td><td>-----</td><td>83.65</td><td>32.34</td><td>7.25</td><td>37.04</td><td>6.00</td><td>100</td><td>148</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	92.20	-----	-----	83.65	32.34	7.25	37.04	6.00	100	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	92.20	-----	-----	83.65	32.34	7.25	37.04	6.00	100	148	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>31.39</td><td>32.34</td><td>7.26</td><td>37.05</td><td>6.00</td><td>100</td><td>148</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.04	39.94	54.00	-14.06	31.39	32.34	7.26	37.05	6.00	100	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.04	39.94	54.00	-14.06	31.39	32.34	7.26	37.05	6.00	100	148	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.94</td><td>-----</td><td>-----</td><td>82.38</td><td>32.34</td><td>7.25</td><td>37.03</td><td>6.00</td><td>100</td><td>148</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.94	-----	-----	82.38	32.34	7.25	37.03	6.00	100	148
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	90.94	-----	-----	82.38	32.34	7.25	37.03	6.00	100	148	AVERAGE																																											

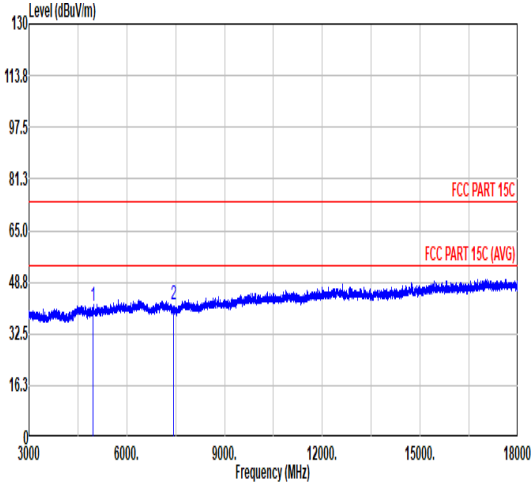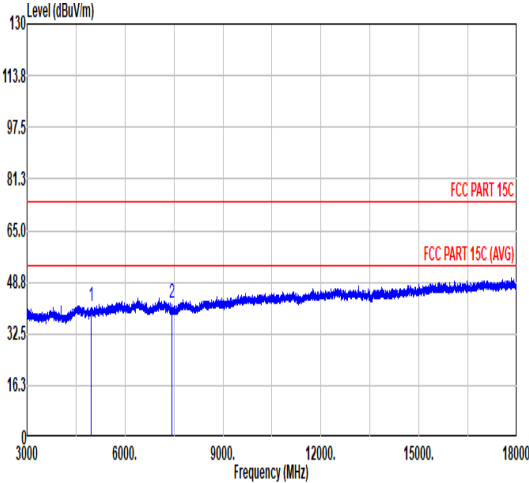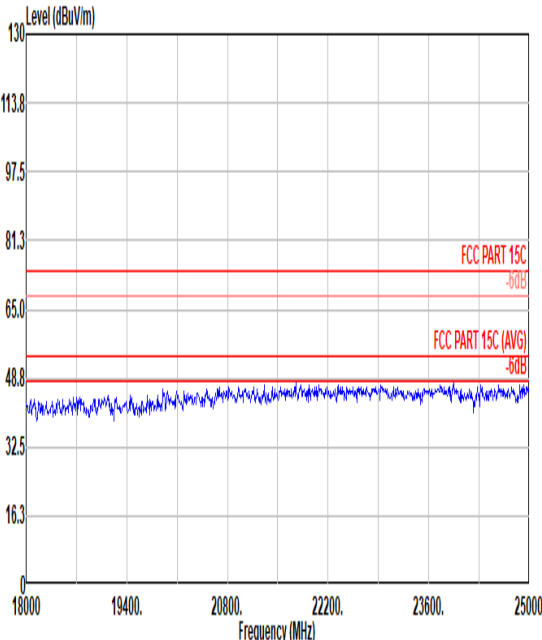
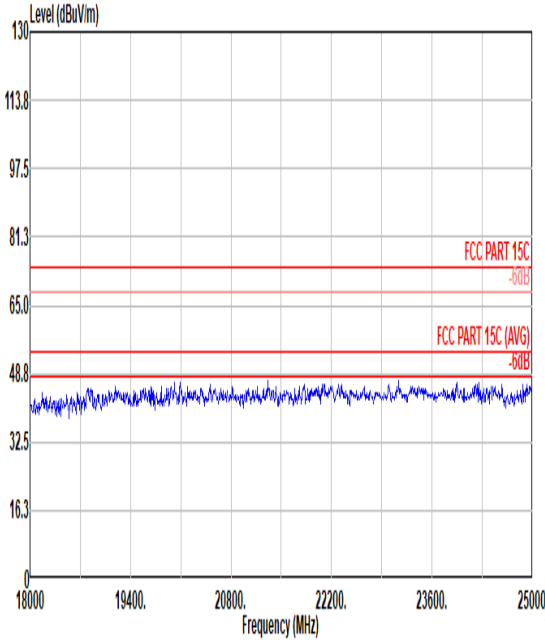


Mode	Mode 9																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_Bluetooth-LE(Nodic BLE) _CH39_2480MHz																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>62.17</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.46</td><td>74.00</td><td>-32.54</td><td>60.02</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.25	74.00	-32.75	62.17	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	41.46	74.00	-32.54	60.02	35.79	12.78	67.13	0.00	---	---	PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>41.03</td><td>74.00</td><td>-32.97</td><td>61.95</td><td>34.00</td><td>10.40</td><td>65.32</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.11</td><td>74.00</td><td>-31.89</td><td>60.67</td><td>35.79</td><td>12.78</td><td>67.13</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.03	74.00	-32.97	61.95	34.00	10.40	65.32	0.00	---	---	PEAK	2	7440.00	42.11	74.00	-31.89	60.67	35.79	12.78	67.13	0.00	---	---	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4960.00	41.25	74.00	-32.75	62.17	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																														
2	7440.00	41.46	74.00	-32.54	60.02	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4960.00	41.03	74.00	-32.97	61.95	34.00	10.40	65.32	0.00	---	---	PEAK																																																																																																																														
2	7440.00	42.11	74.00	-31.89	60.67	35.79	12.78	67.13	0.00	---	---	PEAK																																																																																																																														
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG)												 Level (dBuV/m) Frequency (MHz) FCC PART 15C FCC PART 15C (AVG)																																																																																																																													

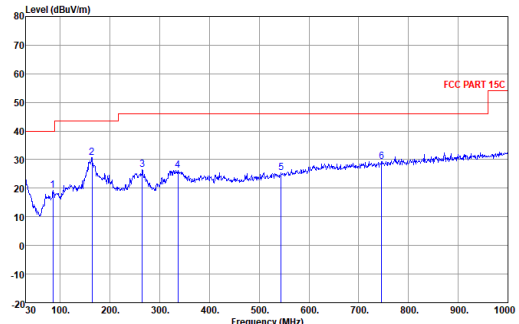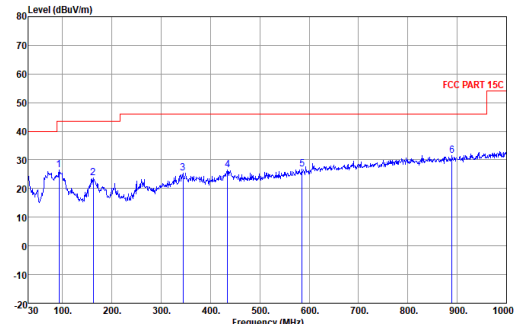

Mode	Mode 10																																																																																																																																																																																																										
Mode	LF																																																																																																																																																																																																										
Mode	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																																																																																				
Peak QP	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 11  Site : 03CH05-KS Condition : FCC PART 15C 3m CBL6111D SN23188 HORIZONTAL Project : 310533 mode : 38 IMEI : <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>85.29</td><td>19.27</td><td>-20.73</td><td>40.00</td><td>36.50</td><td>14.20</td><td>1.40</td><td>32.83</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>2</td><td>163.86</td><td>30.81</td><td>-12.69</td><td>43.50</td><td>45.55</td><td>16.14</td><td>1.95</td><td>32.83</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>3</td><td>264.74</td><td>26.49</td><td>-19.51</td><td>46.00</td><td>38.11</td><td>18.68</td><td>2.48</td><td>32.78</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>4</td><td>336.52</td><td>26.14</td><td>-19.86</td><td>46.00</td><td>36.12</td><td>20.13</td><td>2.79</td><td>32.98</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>5</td><td>544.10</td><td>25.47</td><td>-20.53</td><td>46.00</td><td>30.07</td><td>24.93</td><td>3.56</td><td>33.09</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>6</td><td>745.86</td><td>29.38</td><td>-16.62</td><td>46.00</td><td>32.23</td><td>25.78</td><td>4.18</td><td>32.81</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr></table>							Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	85.29	19.27	-20.73	40.00	36.50	14.20	1.40	32.83	---	---	Peak HORIZONTAL	2	163.86	30.81	-12.69	43.50	45.55	16.14	1.95	32.83	---	---	Peak HORIZONTAL	3	264.74	26.49	-19.51	46.00	38.11	18.68	2.48	32.78	---	---	Peak HORIZONTAL	4	336.52	26.14	-19.86	46.00	36.12	20.13	2.79	32.98	---	---	Peak HORIZONTAL	5	544.10	25.47	-20.53	46.00	30.07	24.93	3.56	33.09	---	---	Peak HORIZONTAL	6	745.86	29.38	-16.62	46.00	32.23	25.78	4.18	32.81	---	---	Peak HORIZONTAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 12  Site : 03CH05-KS Condition : FCC PART 15C 3m CBL6111D SN23188 VERTICAL Project : 310533 mode : 38 IMEI : <table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>93.05</td><td>26.65</td><td>-16.85</td><td>43.50</td><td>42.32</td><td>15.73</td><td>1.46</td><td>32.86</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>2</td><td>161.92</td><td>23.66</td><td>-19.84</td><td>43.50</td><td>38.36</td><td>16.18</td><td>1.94</td><td>32.82</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>3</td><td>344.28</td><td>25.46</td><td>-20.54</td><td>46.00</td><td>35.25</td><td>20.30</td><td>2.83</td><td>32.92</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>4</td><td>434.49</td><td>26.54</td><td>-19.46</td><td>46.00</td><td>34.08</td><td>22.27</td><td>3.18</td><td>32.99</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>5</td><td>585.81</td><td>26.80</td><td>-19.20</td><td>46.00</td><td>31.21</td><td>24.99</td><td>3.69</td><td>33.09</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>6</td><td>889.42</td><td>31.41</td><td>-14.59</td><td>46.00</td><td>32.13</td><td>26.65</td><td>4.56</td><td>31.93</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr></table>						Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	93.05	26.65	-16.85	43.50	42.32	15.73	1.46	32.86	---	---	Peak VERTICAL	2	161.92	23.66	-19.84	43.50	38.36	16.18	1.94	32.82	---	---	Peak VERTICAL	3	344.28	25.46	-20.54	46.00	35.25	20.30	2.83	32.92	---	---	Peak VERTICAL	4	434.49	26.54	-19.46	46.00	34.08	22.27	3.18	32.99	---	---	Peak VERTICAL	5	585.81	26.80	-19.20	46.00	31.21	24.99	3.69	33.09	---	---	Peak VERTICAL	6	889.42	31.41	-14.59	46.00	32.13	26.65	4.56	31.93	---	---	Peak VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																															
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																
1	85.29	19.27	-20.73	40.00	36.50	14.20	1.40	32.83	---	---	Peak HORIZONTAL																																																																																																																																																																																																
2	163.86	30.81	-12.69	43.50	45.55	16.14	1.95	32.83	---	---	Peak HORIZONTAL																																																																																																																																																																																																
3	264.74	26.49	-19.51	46.00	38.11	18.68	2.48	32.78	---	---	Peak HORIZONTAL																																																																																																																																																																																																
4	336.52	26.14	-19.86	46.00	36.12	20.13	2.79	32.98	---	---	Peak HORIZONTAL																																																																																																																																																																																																
5	544.10	25.47	-20.53	46.00	30.07	24.93	3.56	33.09	---	---	Peak HORIZONTAL																																																																																																																																																																																																
6	745.86	29.38	-16.62	46.00	32.23	25.78	4.18	32.81	---	---	Peak HORIZONTAL																																																																																																																																																																																																
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																	
1	93.05	26.65	-16.85	43.50	42.32	15.73	1.46	32.86	---	---	Peak VERTICAL																																																																																																																																																																																																
2	161.92	23.66	-19.84	43.50	38.36	16.18	1.94	32.82	---	---	Peak VERTICAL																																																																																																																																																																																																
3	344.28	25.46	-20.54	46.00	35.25	20.30	2.83	32.92	---	---	Peak VERTICAL																																																																																																																																																																																																
4	434.49	26.54	-19.46	46.00	34.08	22.27	3.18	32.99	---	---	Peak VERTICAL																																																																																																																																																																																																
5	585.81	26.80	-19.20	46.00	31.21	24.99	3.69	33.09	---	---	Peak VERTICAL																																																																																																																																																																																																
6	889.42	31.41	-14.59	46.00	32.13	26.65	4.56	31.93	---	---	Peak VERTICAL																																																																																																																																																																																																

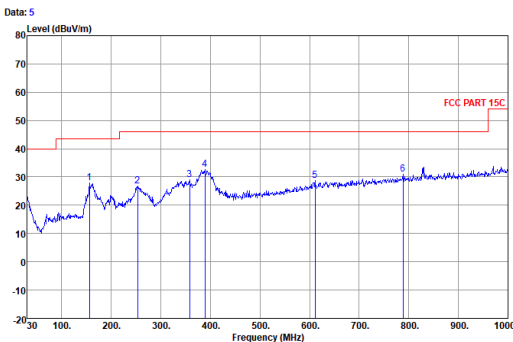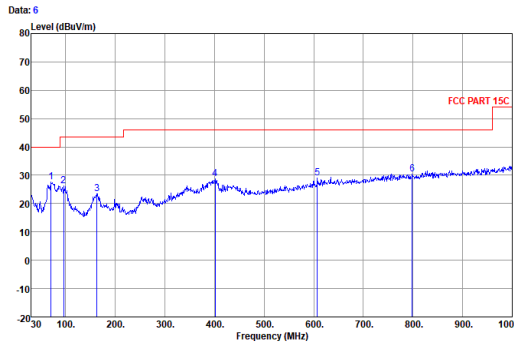


Mode	Mode 11																																																																																																																																																																																																	
	LF																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE (Nodic BLE) _CH39_2480MHz																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																
QP/ Peak	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 5  Site : 03CH05-KS Condition : FCC PART 15C 3m CBL6111D SN23188 HORIZONTAL Project : 310533 mode : 39 IMEI : #11 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preampl</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>156.10</td><td>27.82</td><td>-15.68</td><td>43.50</td><td>41.67</td><td>16.72</td><td>1.83</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>2</td><td>253.10</td><td>26.86</td><td>-19.14</td><td>46.00</td><td>38.25</td><td>18.89</td><td>2.12</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>3</td><td>357.06</td><td>29.06</td><td>-16.94</td><td>46.00</td><td>37.86</td><td>20.81</td><td>2.79</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>4</td><td>388.90</td><td>32.75</td><td>-13.25</td><td>46.00</td><td>40.61</td><td>21.60</td><td>2.94</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>5</td><td>611.03</td><td>28.85</td><td>-17.15</td><td>46.00</td><td>31.34</td><td>26.25</td><td>3.66</td><td>32.40</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr><tr><td>6</td><td>788.54</td><td>30.86</td><td>-15.14</td><td>46.00</td><td>30.79</td><td>28.03</td><td>4.19</td><td>32.15</td><td>---</td><td>---</td><td>Peak HORIZONTAL</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preampl	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	156.10	27.82	-15.68	43.50	41.67	16.72	1.83	32.40	---	---	Peak HORIZONTAL	2	253.10	26.86	-19.14	46.00	38.25	18.89	2.12	32.40	---	---	Peak HORIZONTAL	3	357.06	29.06	-16.94	46.00	37.86	20.81	2.79	32.40	---	---	Peak HORIZONTAL	4	388.90	32.75	-13.25	46.00	40.61	21.60	2.94	32.40	---	---	Peak HORIZONTAL	5	611.03	28.85	-17.15	46.00	31.34	26.25	3.66	32.40	---	---	Peak HORIZONTAL	6	788.54	30.86	-15.14	46.00	30.79	28.03	4.19	32.15	---	---	Peak HORIZONTAL	 No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn Data: 6  Site : 03CH05-KS Condition : FCC PART 15C 3m CBL6111D SN23188 VERTICAL Project : 310533 mode : 39 IMEI : #11 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preampl</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>70.74</td><td>27.52</td><td>-12.48</td><td>40.00</td><td>46.70</td><td>12.35</td><td>1.27</td><td>32.00</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>2</td><td>95.96</td><td>26.25</td><td>-17.25</td><td>43.50</td><td>41.34</td><td>16.30</td><td>1.48</td><td>32.87</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>3</td><td>162.89</td><td>23.46</td><td>-20.04</td><td>43.50</td><td>38.18</td><td>16.16</td><td>1.95</td><td>32.83</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>4</td><td>401.51</td><td>28.86</td><td>-17.14</td><td>46.00</td><td>36.94</td><td>21.70</td><td>3.06</td><td>32.84</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>5</td><td>607.15</td><td>29.03</td><td>-16.97</td><td>46.00</td><td>33.35</td><td>24.98</td><td>3.76</td><td>33.06</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr><tr><td>6</td><td>798.24</td><td>30.47</td><td>-15.53</td><td>46.00</td><td>32.65</td><td>26.24</td><td>4.32</td><td>32.74</td><td>---</td><td>---</td><td>Peak VERTICAL</td></tr></tbody></table>		Freq	Level	Over	Limit	ReadAntenna	Cable	Preampl	A/Pos	T/Pos	Remark	Pol/Phas		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	70.74	27.52	-12.48	40.00	46.70	12.35	1.27	32.00	---	---	Peak VERTICAL	2	95.96	26.25	-17.25	43.50	41.34	16.30	1.48	32.87	---	---	Peak VERTICAL	3	162.89	23.46	-20.04	43.50	38.18	16.16	1.95	32.83	---	---	Peak VERTICAL	4	401.51	28.86	-17.14	46.00	36.94	21.70	3.06	32.84	---	---	Peak VERTICAL	5	607.15	29.03	-16.97	46.00	33.35	24.98	3.76	33.06	---	---	Peak VERTICAL	6	798.24	30.47	-15.53	46.00	32.65	26.24	4.32	32.74	---	---	Peak VERTICAL
		Freq	Level	Over	Limit	ReadAntenna	Cable	Preampl	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	156.10	27.82	-15.68	43.50	41.67	16.72	1.83	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
2	253.10	26.86	-19.14	46.00	38.25	18.89	2.12	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
3	357.06	29.06	-16.94	46.00	37.86	20.81	2.79	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
4	388.90	32.75	-13.25	46.00	40.61	21.60	2.94	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
5	611.03	28.85	-17.15	46.00	31.34	26.25	3.66	32.40	---	---	Peak HORIZONTAL																																																																																																																																																																																							
6	788.54	30.86	-15.14	46.00	30.79	28.03	4.19	32.15	---	---	Peak HORIZONTAL																																																																																																																																																																																							
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preampl	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																							
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																								
1	70.74	27.52	-12.48	40.00	46.70	12.35	1.27	32.00	---	---	Peak VERTICAL																																																																																																																																																																																							
2	95.96	26.25	-17.25	43.50	41.34	16.30	1.48	32.87	---	---	Peak VERTICAL																																																																																																																																																																																							
3	162.89	23.46	-20.04	43.50	38.18	16.16	1.95	32.83	---	---	Peak VERTICAL																																																																																																																																																																																							
4	401.51	28.86	-17.14	46.00	36.94	21.70	3.06	32.84	---	---	Peak VERTICAL																																																																																																																																																																																							
5	607.15	29.03	-16.97	46.00	33.35	24.98	3.76	33.06	---	---	Peak VERTICAL																																																																																																																																																																																							
6	798.24	30.47	-15.53	46.00	32.65	26.24	4.32	32.74	---	---	Peak VERTICAL																																																																																																																																																																																							

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps (Qualcomm)	62.04	0.388	2.575	2.7KHz
Bluetooth LE 2Mbps (Qualcomm)	32.41	0.203	4.929	5.1KHz
Bluetooth LE 1Mbps (Nordic)	62.50	0.3913	2.556	2.7KHz

Bluetooth LE 1Mbps (Qualcomm)

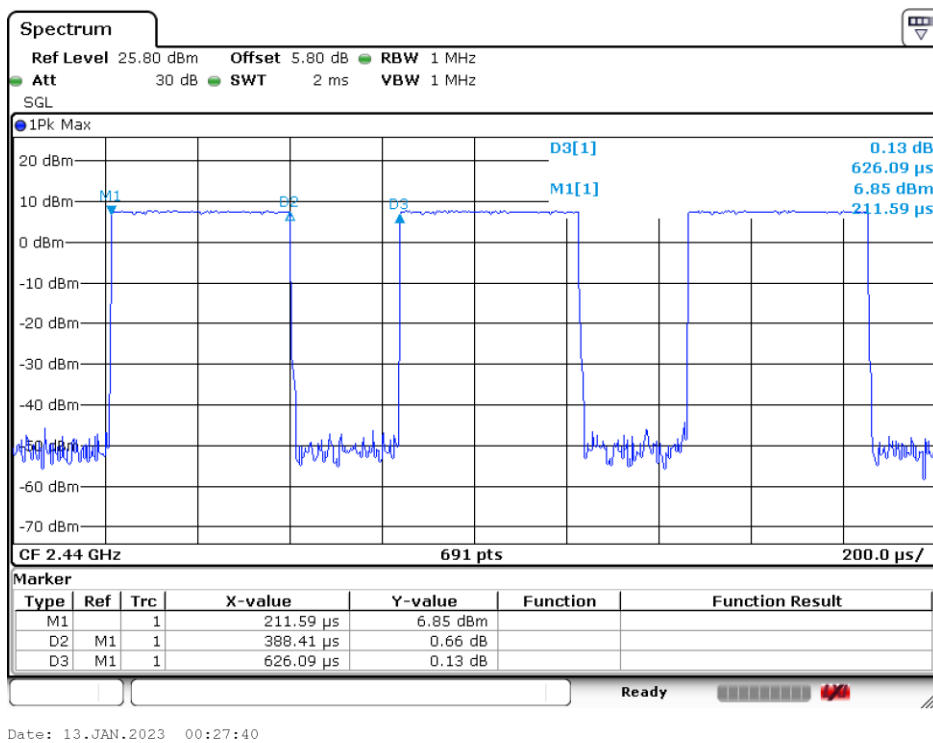




Bluetooth LE 2Mbps (Qualcomm)

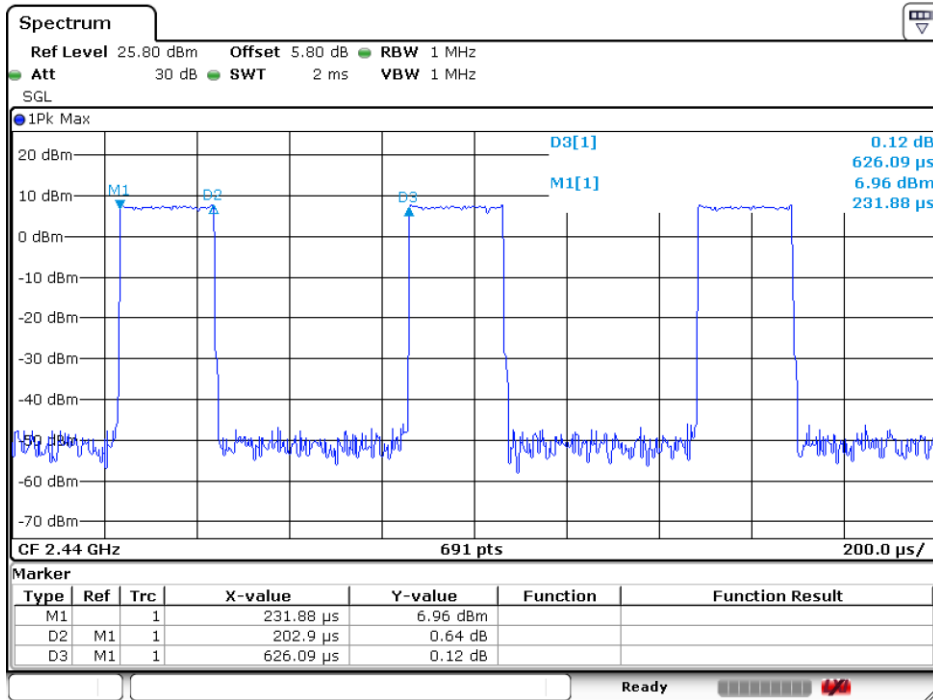

Date: 13.JAN.2023 00:32:11

Bluetooth LE 1Mbps (Nordic)

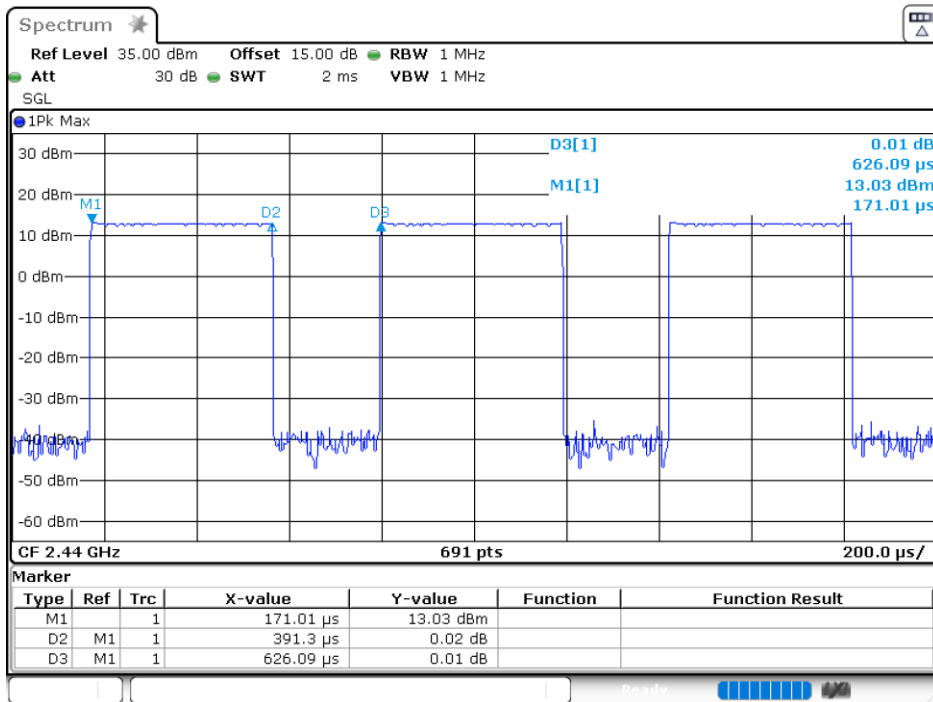

Date: 15.JAN.2023 08:25:23