



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : Lenovo YT-J706F  
**FCC ID** : O57YTJ706F  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Apr. 22, 2021 ~ May 07, 2021

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*Alex Wang*

Approved by: Alex Wang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 7

    1.7 Test Software..... 7

    1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 12

    3.2 Maximum Conducted Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Unwanted Emissions Measurement ..... 19

    3.5 AC Conducted Emission Measurement..... 24

    3.6 Automatically Discontinue Transmission ..... 26

    3.7 Antenna Requirements ..... 27

**4 LIST OF MEASURING EQUIPMENT ..... 28**

**5 UNCERTAINTY OF EVALUATION ..... 29**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 6.81 dB at 5649.600 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.58 dB at 0.150 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**  
Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2 Manufacturer

**Lenovo PC HK Limited**  
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo YT-J706F
FCC ID	O57YTJ706F
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	Lenovo Tablet YT-J706F
SW Version	YT-J706F_RF01_210408
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	<p>&lt;MIMO Ant.1+2&gt;                      &lt;5745 MHz ~ 5825 MHz&gt;                      802.11a : 20.77 dBm / 0.1194 W                      802.11n HT20 : 19.87 dBm / 0.0971 W                      802.11n HT40 : 19.95 dBm / 0.0989 W                      802.11ac VHT20: 19.82 dBm / 0.0959 W                      802.11ac VHT40: 19.94 dBm / 0.0986 W                      802.11ac VHT80: 19.74 dBm / 0.0942 W</p>
<b>99% Occupied Bandwidth</b>	<p>&lt;MIMO Ant.1+2&gt;                      802.11a : 18.03 MHz                      802.11n HT20 : 18.83 MHz                      802.11n HT40 : 36.86 MHz                      802.11ac VHT80 : 75.64 MHz</p>
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
<b>Antenna Type / Gain</b>	<Ant. 1> : PIFA Antenna with gain -10.00 dBi <Ant. 2> : PIFA Antenna with gain -10.50 dBi

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ n HT40 by referring to their maximum conducted power.
2. For SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### MIMO Mode


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : Bluetooth Link + WLAN Link(5G) + USB Cable 1(Charging from Adapter 1) + Battery1
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter 1, Battery 1 and USB Cable 1.	


Ch. #		U-NII-3 : 5745-5825 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

## 2.3 Connection Diagram of Test System

For Radiated Emission

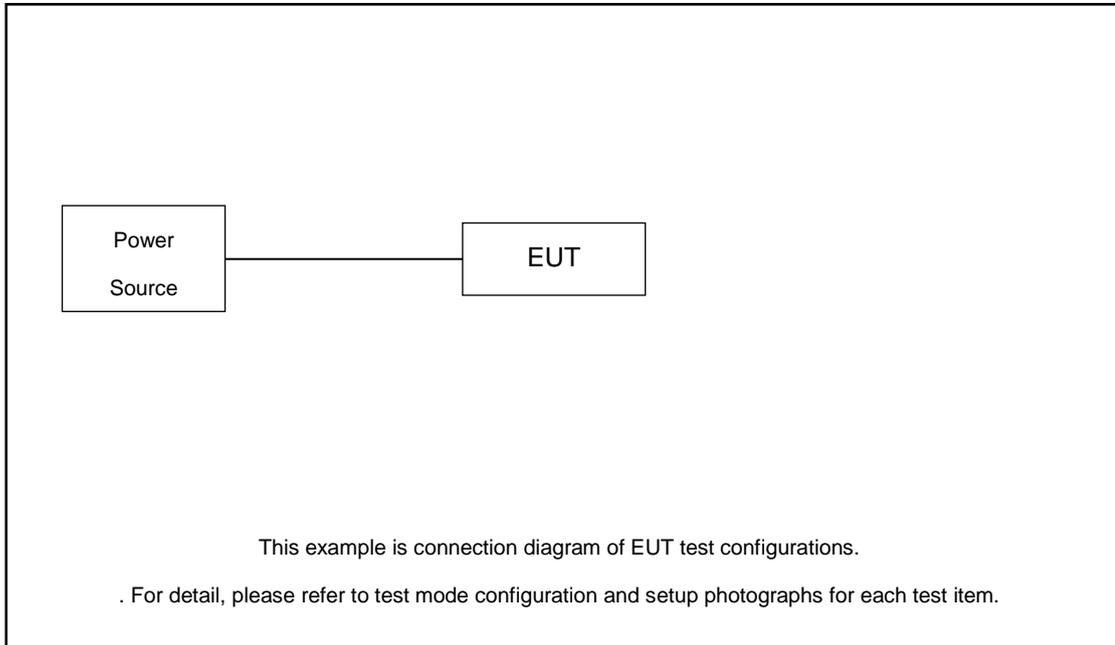

For Conducted Emission

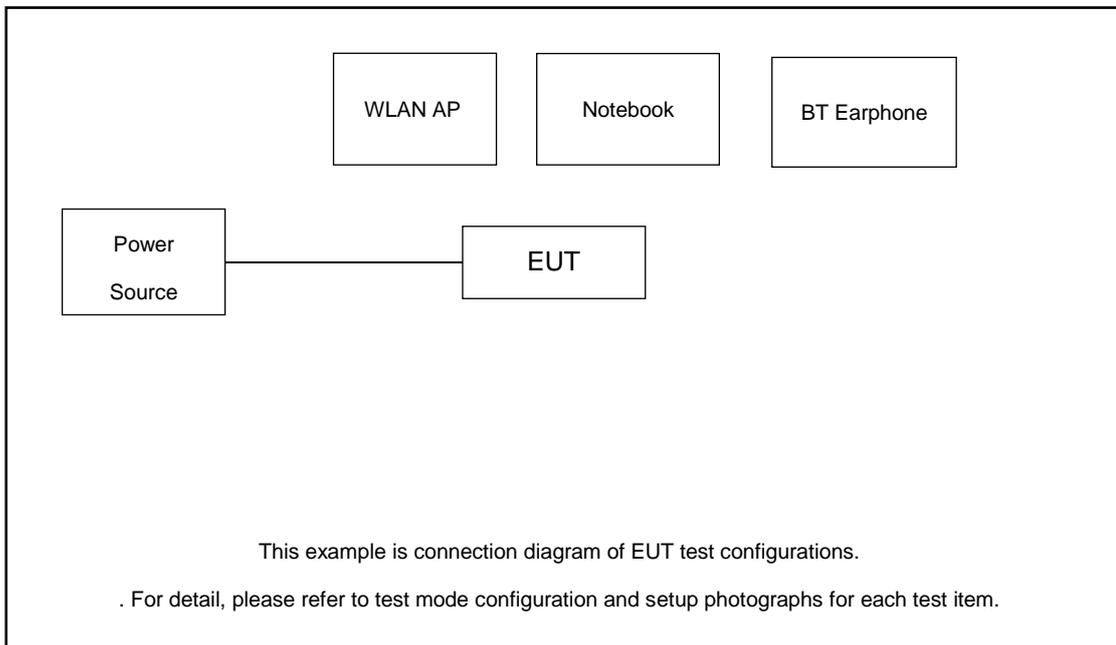

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.5dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 7.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

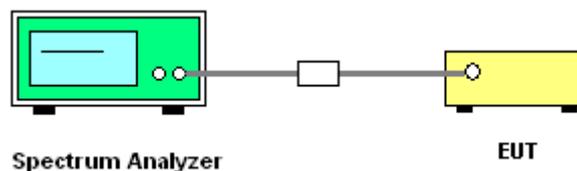

##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

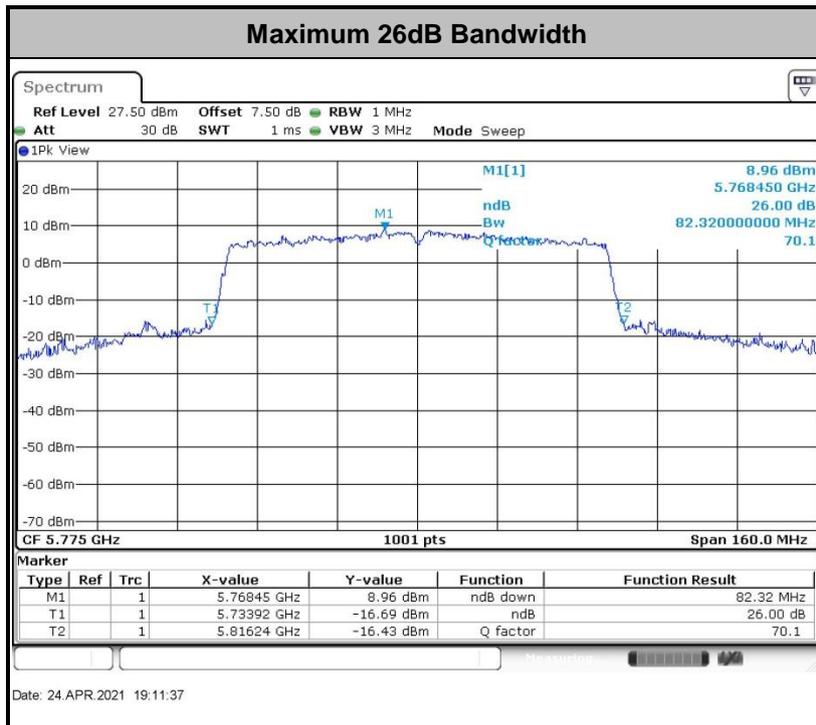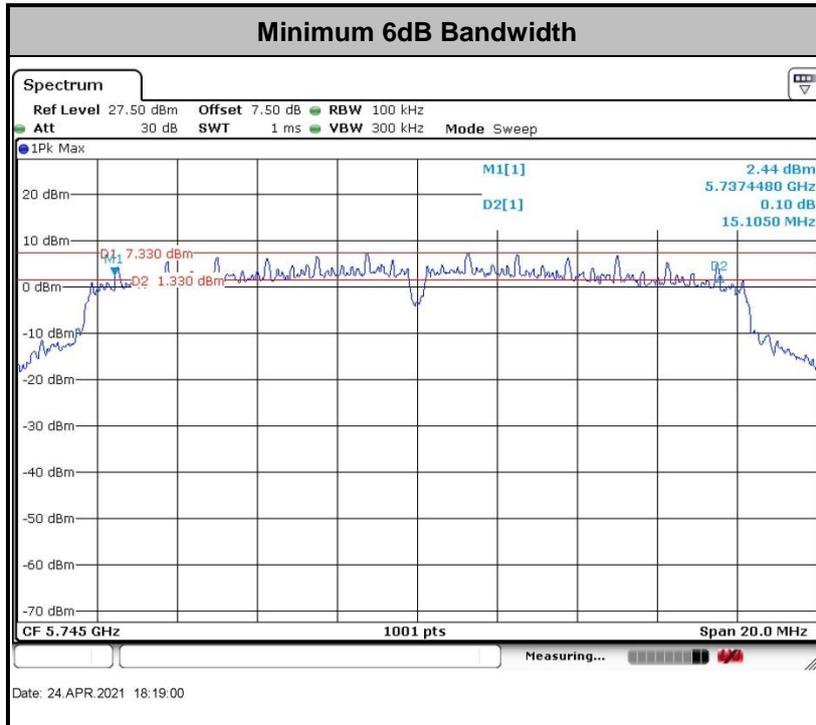

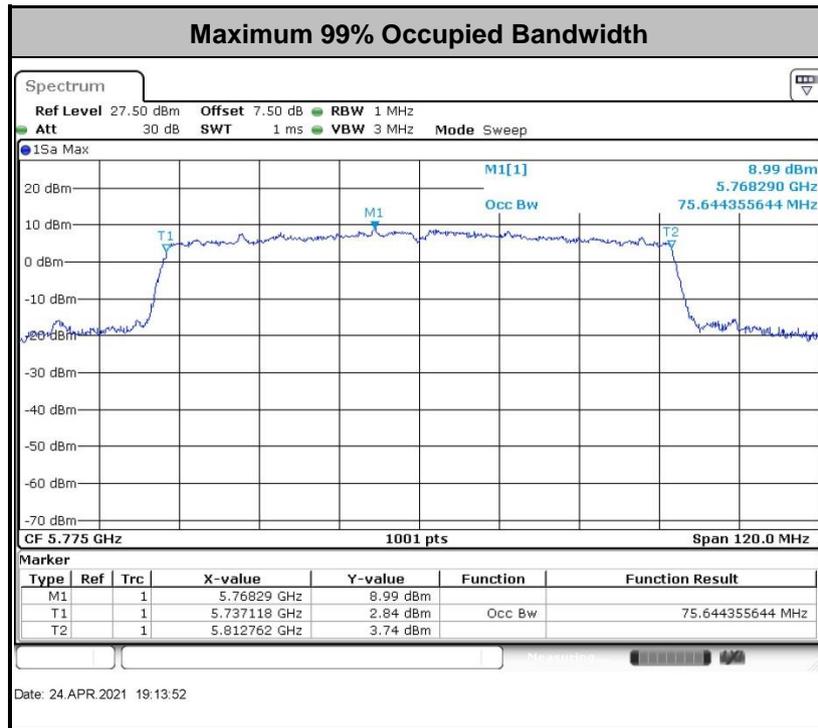

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

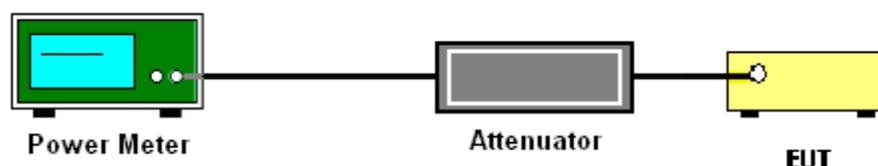

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{th}$  of the PSD limit.


### 3.3.4 Test Setup

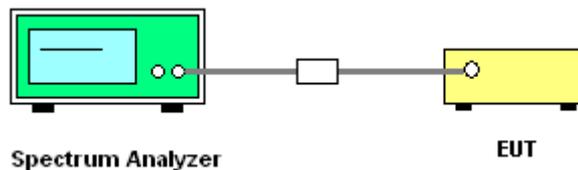



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

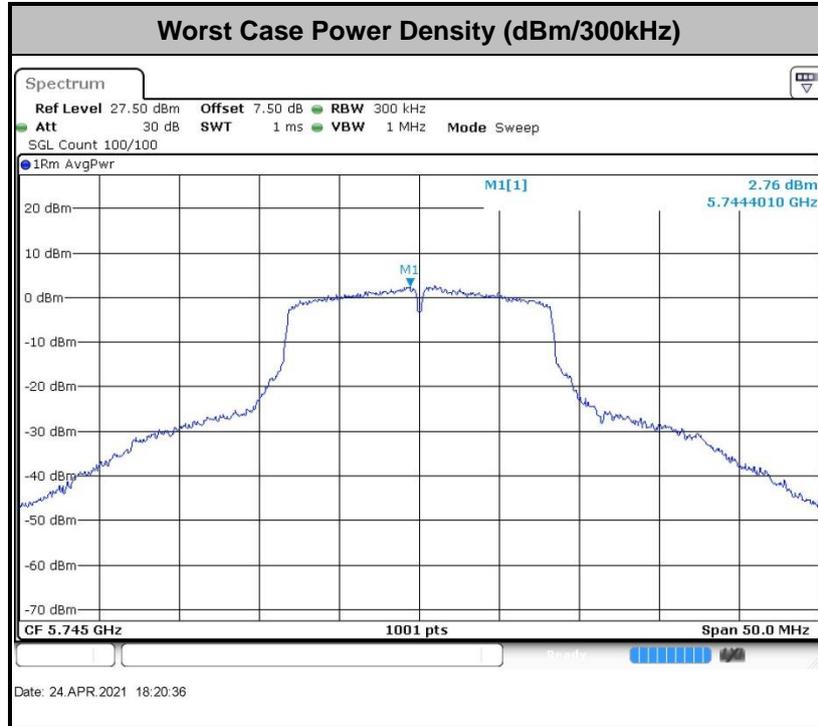



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dBμV/m

$d_{Meas}$  is the measurement distance, in m

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

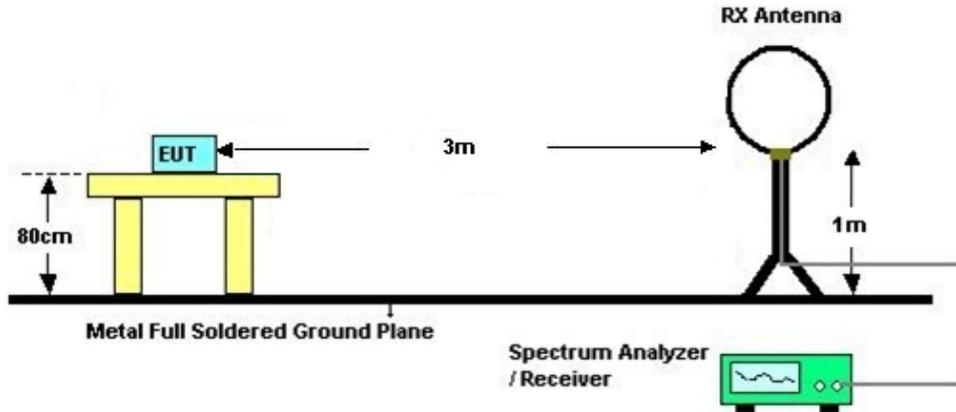

For radiated emissions from 30MHz to 1GHz

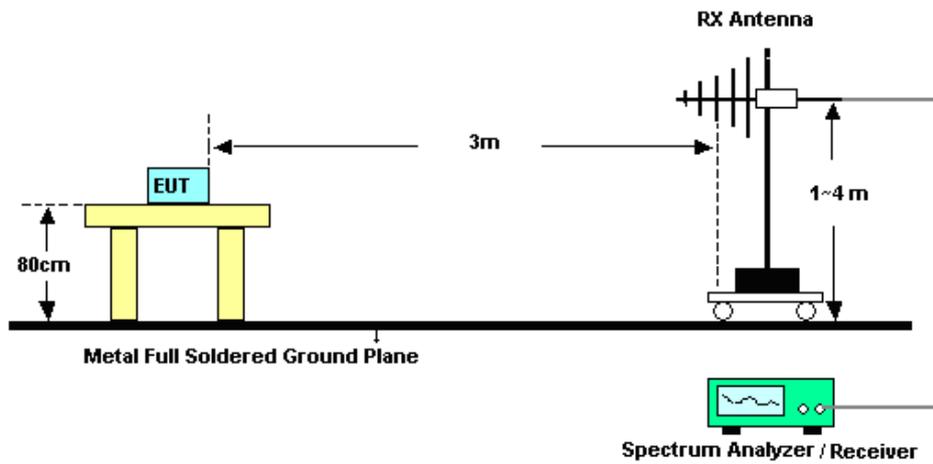

For radiated emissions above 1GHz

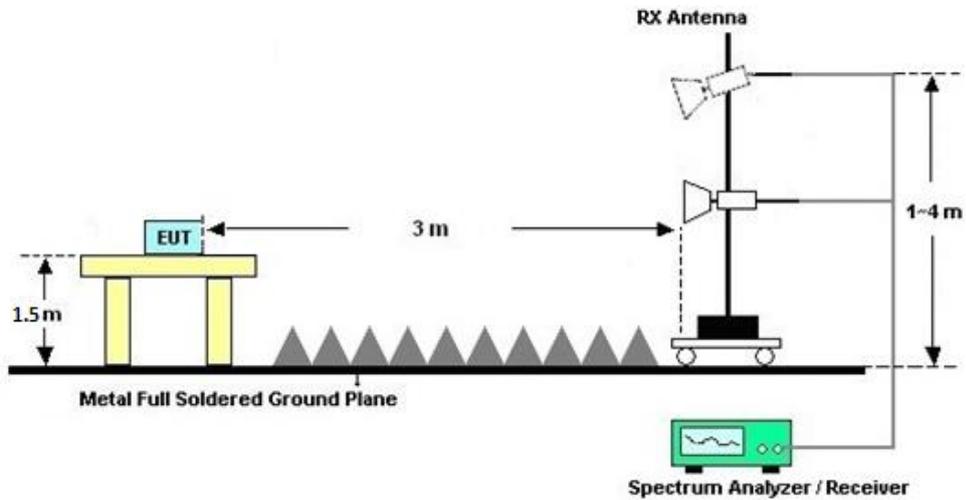

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

### 3.4.7 Duty Cycle

Please refer to Appendix D.

### 3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

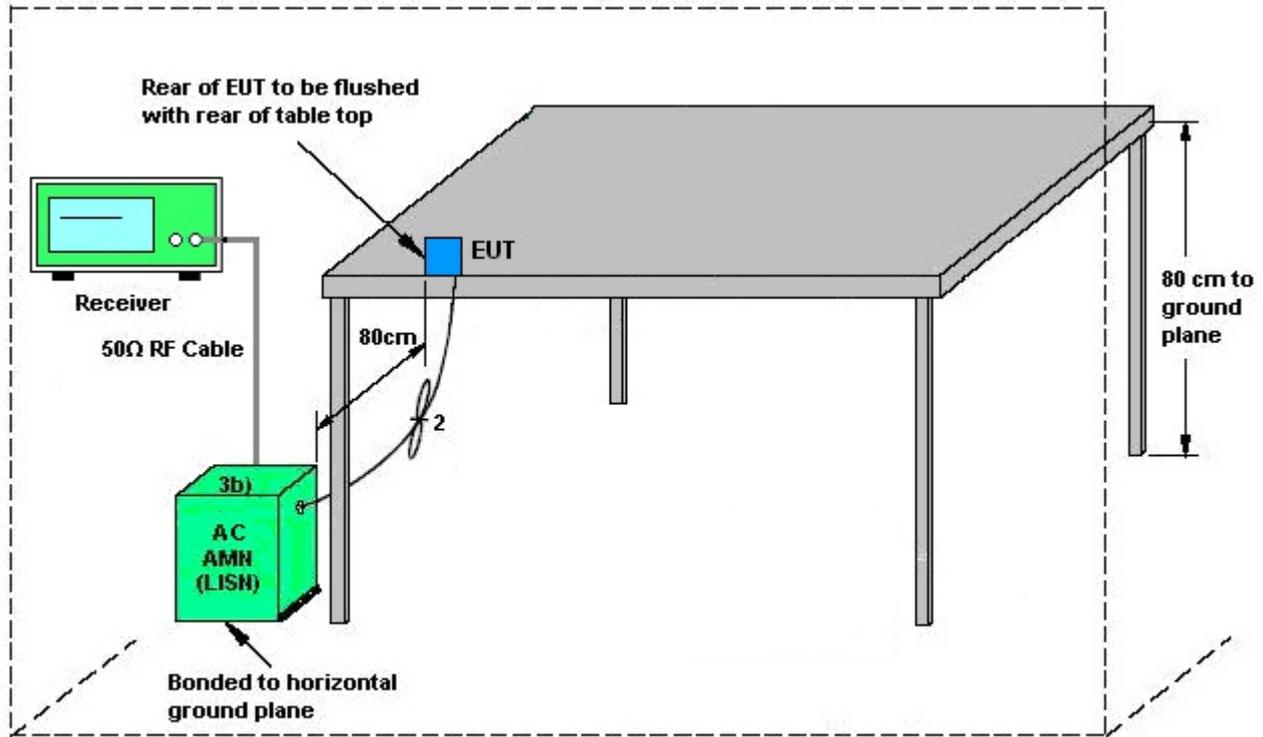

AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Chain Port 0	Chain Port 1	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	Ant 1 (dBi)	Ant 2 (dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII 3	-10.00	-10.50	-10.00	-7.24	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, ( min = 0 )

PSD Limit Reduction = DG(PSD) – 6dBi, ( min = 0 )



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Apr. 24, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Apr. 24, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Apr. 24, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	May 07, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G, MAX 30dB	Apr. 13, 2021	May 07, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	May 07, 2021	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2020	May 07, 2021	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	May 07, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2020	May 07, 2021	Nov. 09, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 13, 2021	May 07, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	May 07, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 17, 2020	May 07, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	May 07, 2021	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 07, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 07, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 07, 2021	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 21, 2021	Apr. 22, 2021	Apr. 20, 2022	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Apr. 22, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 13, 2021	Apr. 22, 2021	Apr. 12, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Apr. 22, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Kib Shi	Temperature:	21~25	°C
Test Date:	2021/4/24	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	18.03	17.88	24.43	22.53	15.13	15.11	0.5		Pass
11a	6Mbps	2	157	5785	17.98	17.98	24.93	23.03	15.11	15.11	0.5		Pass
11a	6Mbps	2	165	5825	17.98	17.78	23.08	22.13	15.11	15.11	0.5		Pass
HT20	MCS0	2	149	5745	18.63	18.43	25.23	22.53	15.11	15.70	0.5		Pass
HT20	MCS0	2	157	5785	18.83	18.58	28.42	23.08	15.11	15.11	0.5		Pass
HT20	MCS0	2	165	5825	18.58	18.33	22.83	21.63	15.11	15.70	0.5		Pass
HT40	MCS0	2	151	5755	36.56	36.76	42.17	41.63	35.09	35.05	0.5		Pass
HT40	MCS0	2	159	5795	36.66	36.86	47.47	41.99	35.09	35.05	0.5		Pass
VHT80	MCS0	2	155	5775	75.64	75.28	82.32	81.04	75.13	75.05	0.5		Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.11	0.14	17.74	17.75	20.76	30.00		-10.00		Pass
11a	6Mbps	2	157	5785	0.11	0.14	17.75	17.76	20.77	30.00		-10.00		Pass
11a	6Mbps	2	165	5825	0.11	0.14	17.70	17.71	20.72	30.00		-10.00		Pass
HT20	MCS0	2	149	5745	0.15	0.12	16.83	16.84	19.84	30.00		-10.00		Pass
HT20	MCS0	2	157	5785	0.15	0.12	16.80	16.83	19.82	30.00		-10.00		Pass
HT20	MCS0	2	165	5825	0.15	0.12	16.82	16.90	19.87	30.00		-10.00		Pass
HT40	MCS0	2	151	5755	0.29	0.27	16.93	16.95	19.95	30.00		-10.00		Pass
HT40	MCS0	2	159	5795	0.29	0.27	16.94	16.89	19.93	30.00		-10.00		Pass
VHT20	MCS0	2	149	5745	0.14	0.15	16.76	16.81	19.80	30.00		-10.00		Pass
VHT20	MCS0	2	157	5785	0.14	0.15	16.75	16.79	19.78	30.00		-10.00		Pass
VHT20	MCS0	2	165	5825	0.14	0.15	16.76	16.86	19.82	30.00		-10.00		Pass
VHT40	MCS0	2	151	5755	0.31	0.29	16.92	16.94	19.94	30.00		-10.00		Pass
VHT40	MCS0	2	159	5795	0.31	0.29	16.93	16.86	19.90	30.00		-10.00		Pass
VHT80	MCS0	2	155	5775	0.56	0.56	16.75	16.70	19.74	30.00		-10.00		Pass


**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	0.11	0.14	2.22				8.24	30.00	-7.24	Pass		
11a	6Mbps	2	157	5785	0.11	0.14	2.22			8.03	30.00	-7.24	Pass			
11a	6Mbps	2	165	5825	0.11	0.14	2.22			8.16	30.00	-7.24	Pass			
HT20	MCS0	2	149	5745	0.15	0.12	2.22			6.94	30.00	-7.24	Pass			
HT20	MCS0	2	157	5785	0.15	0.12	2.22			6.68	30.00	-7.24	Pass			
HT20	MCS0	2	165	5825	0.15	0.12	2.22			7.02	30.00	-7.24	Pass			
HT40	MCS0	2	151	5755	0.29	0.27	2.22			3.85	30.00	-7.24	Pass			
HT40	MCS0	2	159	5795	0.29	0.27	2.22			3.90	30.00	-7.24	Pass			
VHT80	MCS0	2	155	5775	0.56	0.56	2.22			1.15	30.00	-7.24	Pass			



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

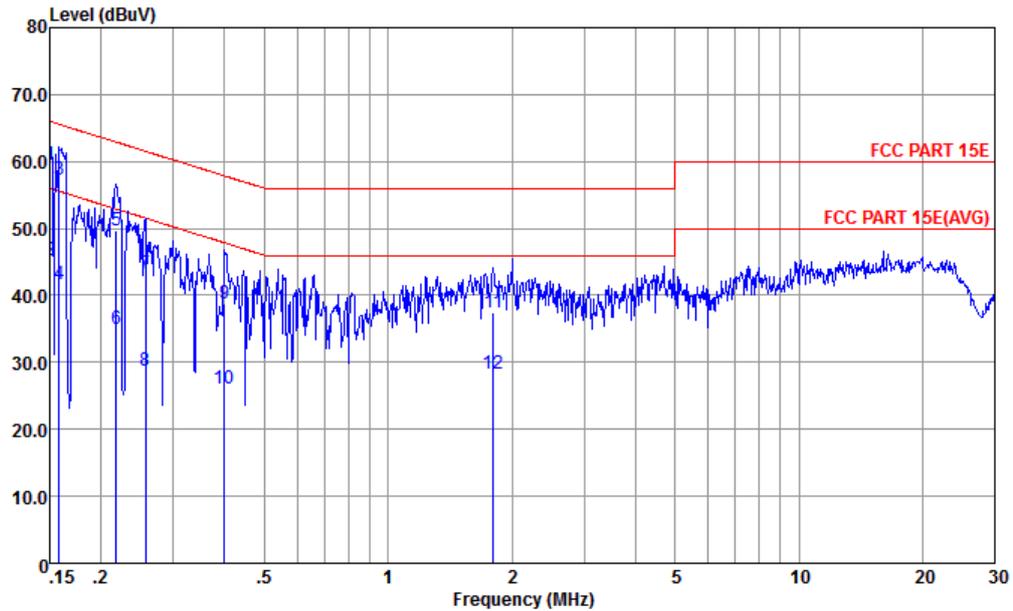


Site : CO01-KS  
 Condition : FCC PART 15E TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	59.42	-6.58	66.00	39.30	9.64	10.48	QP
2	0.150	45.32	-10.68	56.00	25.20	9.64	10.48	Average
3	0.158	57.30	-8.26	65.56	37.20	9.64	10.46	QP
4	0.158	41.70	-13.86	55.56	21.60	9.64	10.46	Average
5	0.217	49.79	-13.13	62.92	29.80	9.64	10.35	QP
6	0.217	34.89	-18.03	52.92	14.90	9.64	10.35	Average
7	0.256	43.27	-18.29	61.56	23.30	9.64	10.33	QP
8	0.256	28.77	-22.79	51.56	8.80	9.64	10.33	Average
9	0.400	38.81	-19.05	57.86	18.89	9.65	10.27	QP
10	0.400	26.11	-21.75	47.86	6.19	9.65	10.27	Average
11	1.800	37.33	-18.67	56.00	17.20	9.90	10.23	QP
12	1.800	28.23	-17.77	46.00	8.10	9.90	10.23	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

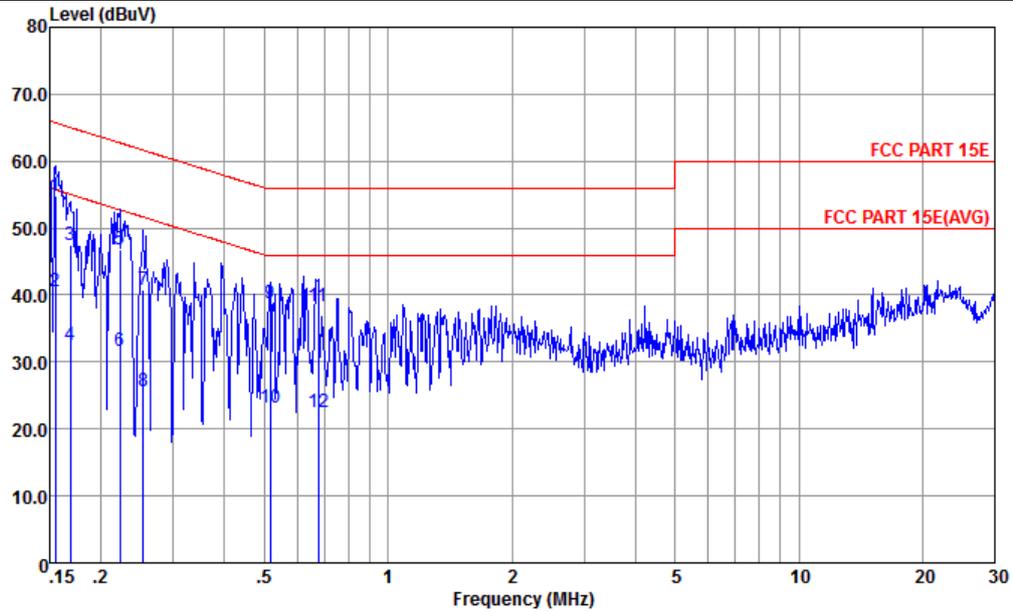

Site : CO01-KS  
 Condition : FCC PART 15E TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.155	54.77	-10.97	65.74	34.49	9.81	10.47	QP
2	0.155	40.57	-15.17	55.74	20.29	9.81	10.47	Average
3	0.169	47.47	-17.56	65.03	27.20	9.84	10.43	QP
4	0.169	32.47	-22.56	55.03	12.20	9.84	10.43	Average
5	0.222	46.82	-15.92	62.74	26.60	9.87	10.35	QP
6	0.222	31.72	-21.02	52.74	11.50	9.87	10.35	Average
7	0.253	40.77	-20.87	61.64	20.61	9.83	10.33	QP
8	0.253	25.67	-25.97	51.64	5.51	9.83	10.33	Average
9	0.516	38.86	-17.14	56.00	18.89	9.73	10.24	QP
10	0.516	23.26	-22.74	46.00	3.29	9.73	10.24	Average
11	0.675	38.26	-17.74	56.00	18.29	9.73	10.24	QP
12	0.675	22.56	-23.44	46.00	2.59	9.73	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

### UNII 3 - 5725~5850MHz

#### WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11a CH 149 5745MHz		5613.6	58.77	-9.53	68.3	43.17	34.7	11.67	30.77	109	193	P	H
		5650.2	58.48	-9.97	68.45	42.66	34.86	11.74	30.78	109	193	P	H
		5719.8	71.52	-39.32	110.84	55.41	35.08	11.84	30.81	109	193	P	H
		5724.8	77.09	-44.75	121.84	60.99	35.08	11.84	30.82	109	193	P	H
		5752	114.28	-	-	98.03	35.19	11.89	30.83	109	193	P	H
		5752	107.3	-	-	91.05	35.19	11.89	30.83	109	193	A	H
		5615.2	57.34	-10.96	68.3	41.74	34.7	11.67	30.77	301	47	P	V
		5688.4	57.9	-38.84	96.74	41.94	34.97	11.79	30.8	301	47	P	V
		5718	63.32	-47.02	110.34	47.21	35.08	11.84	30.81	301	47	P	V
		5724	69.12	-50.9	120.02	53.02	35.08	11.84	30.82	301	47	P	V
		5740	106.21	-	-	90.02	35.14	11.87	30.82	301	47	P	V
		5740	99.86	-	-	83.67	35.14	11.87	30.82	301	47	A	V



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a CH 165 5825MHz		5850	68.52	-53.78	122.3	52.07	35.35	11.97	30.87	100	201	P	H
		5855.6	65.7	-45.03	110.73	49.23	35.37	11.98	30.88	100	201	P	H
		5895.6	59.47	-30.55	90.02	42.96	35.4	12	30.89	100	201	P	H
		5973.6	58.17	-10.13	68.3	41.56	35.48	12.05	30.92	100	201	P	H
		5824	114.77	-	-	98.34	35.33	11.96	30.86	100	201	P	H
		5824	107.9	-	-	91.47	35.33	11.96	30.86	100	201	A	H
		5850	62.15	-60.15	122.3	45.7	35.35	11.97	30.87	400	304	P	V
		5855.2	59.77	-51.07	110.84	43.3	35.37	11.98	30.88	400	304	P	V
		5877.6	57.54	-45.83	103.37	41.06	35.38	11.99	30.89	400	304	P	V
		5968.8	57.96	-10.34	68.3	41.37	35.47	12.04	30.92	400	304	P	V
		5824	109.18	-	-	92.75	35.33	11.96	30.86	400	304	P	V
		5824	101.8	-	-	85.37	35.33	11.96	30.86	400	304	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 3 5725~5850MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11a		11490	46.32	-27.68	74	51.49	38.19	17.07	60.43	300	0	P	H
CH 149 5745MHz		11490	45.05	-28.95	74	50.22	38.19	17.07	60.43	300	0	P	V
802.11a		11570	46.21	-27.79	74	51.16	38.3	17.13	60.38	100	360	P	H
CH 157 5785MHz		11570	45.02	-28.98	74	49.97	38.3	17.13	60.38	100	360	P	V
802.11a		11650	45.09	-28.91	74	49.85	38.39	17.18	60.33	100	360	P	H
CH 165 5825MHz		11650	44.39	-29.61	74	49.15	38.39	17.18	60.33	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5619.6 to 5746 MHz with various level and limit values.



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 165 5825MHz		5850	66.75	-55.55	122.3	50.3	35.35	11.97	30.87	105	202	P	H
		5857.2	65.59	-44.69	110.28	49.12	35.37	11.98	30.88	105	202	P	H
		5924	58.95	-10.09	69.04	42.4	35.43	12.02	30.9	105	202	P	H
		5981.2	59.28	-9.02	68.3	42.67	35.48	12.05	30.92	105	202	P	H
		5824	112.71	-	-	96.28	35.33	11.96	30.86	105	202	P	H
		5824	106.01	-	-	89.58	35.33	11.96	30.86	105	202	A	H
		5850	62.69	-59.61	122.3	46.24	35.35	11.97	30.87	400	305	P	V
		5860.8	58.4	-50.87	109.27	41.93	35.37	11.98	30.88	400	305	P	V
		5880	57.93	-43.66	101.59	41.45	35.38	11.99	30.89	400	305	P	V
		5934.4	57.19	-11.11	68.3	40.65	35.43	12.02	30.91	400	305	P	V
		5824	106.63	-	-	90.2	35.33	11.96	30.86	400	305	P	V
	5824	99.89	-	-	83.46	35.33	11.96	30.86	400	305	A	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 3 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		11490	44.81	-29.19	74	49.98	38.19	17.07	60.43	100	360	P	H
		11490	43.96	-30.04	74	49.13	38.19	17.07	60.43	100	360	P	V
802.11n HT20 CH 157 5785MHz		11570	43.96	-30.04	74	48.91	38.3	17.13	60.38	100	360	P	H
		11570	44.2	-29.8	74	49.15	38.3	17.13	60.38	100	360	P	V
802.11n HT20 CH 165 5825MHz		11650	46.16	-27.84	74	50.92	38.39	17.18	60.33	100	360	P	H
		11650	44.77	-29.23	74	49.53	38.39	17.18	60.33	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 3 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include frequencies from 5628.4 to 5960 MHz and 5752 MHz.



WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5623.2	57.79	-10.51	68.3	42.12	34.75	11.69	30.77	100	191	P	H
		5682	58.16	-33.86	92.02	42.26	34.92	11.77	30.79	100	191	P	H
		5716.4	59.25	-50.64	109.89	43.21	35.03	11.82	30.81	100	191	P	H
		5722.4	61.3	-55.07	116.37	45.2	35.08	11.84	30.82	100	191	P	H
		5851.6	60.71	-57.94	118.65	44.26	35.35	11.97	30.87	100	191	P	H
		5866.4	60.4	-47.31	107.71	43.93	35.37	11.98	30.88	100	191	P	H
		5910	58.07	-21.3	79.37	41.53	35.42	12.01	30.89	100	191	P	H
		5997.2	57.97	-10.33	68.3	41.34	35.5	12.06	30.93	100	191	P	H
		5794	110.89	-	-	94.49	35.3	11.94	30.84	100	191	P	H
		5794	103.61	-	-	87.21	35.3	11.94	30.84	100	191	A	H
		5646.4	56.32	-11.98	68.3	40.57	34.81	11.72	30.78	383	302	P	V
		5663.2	56.49	-21.61	78.1	40.67	34.86	11.74	30.78	383	302	P	V
		5701.2	56.32	-49.32	105.64	40.27	35.03	11.82	30.8	383	302	P	V
		5722.8	56.74	-60.54	117.28	40.64	35.08	11.84	30.82	383	302	P	V
		5853.2	57.96	-57.04	115	41.51	35.35	11.97	30.87	383	302	P	V
		5864.4	57.55	-50.72	108.27	41.08	35.37	11.98	30.88	383	302	P	V
		5911.6	57.01	-21.18	78.19	40.48	35.42	12.01	30.9	383	302	P	V
		5947.2	57.58	-10.72	68.3	41.01	35.45	12.03	30.91	383	302	P	V
	5794	104.02	-	-	87.62	35.3	11.94	30.84	383	302	P	V	
	5794	96.73	-	-	80.33	35.3	11.94	30.84	383	302	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 3 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		11510	44.03	-29.97	74	49.18	38.2	17.08	60.43	100	360	P	H
		11510	42.85	-31.15	74	48	38.2	17.08	60.43	100	360	P	V
802.11n HT40 CH 159 5795MHz		11590	45.43	-28.57	74	50.34	38.32	17.14	60.37	100	360	P	H
		11590	43.28	-30.72	74	48.19	38.32	17.14	60.37	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**UNII 3 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz		5649.6	61.49	-6.81	68.3	45.67	34.86	11.74	30.78	100	190	P	H
		5689.2	75.36	-21.98	97.34	59.4	34.97	11.79	30.8	100	190	P	H
		5719.8	81.28	-29.56	110.84	65.17	35.08	11.84	30.81	100	190	P	H
		5720.2	81.28	-30.08	111.36	65.17	35.08	11.84	30.81	100	190	P	H
		5852.8	72.87	-43.05	115.92	56.42	35.35	11.97	30.87	100	190	P	H
		5861.2	73.28	-35.88	109.16	56.81	35.37	11.98	30.88	100	190	P	H
		5877.6	65.41	-37.96	103.37	48.93	35.38	11.99	30.89	100	190	P	H
		5935.6	58.93	-9.37	68.3	42.39	35.43	12.02	30.91	100	190	P	H
		5764	107.04	-	-	90.8	35.19	11.89	30.84	100	190	P	H
		5764	100.11	-	-	83.87	35.19	11.89	30.84	100	190	A	H
		5647.2	58.23	-10.07	68.3	42.48	34.81	11.72	30.78	366	301	P	V
		5681.2	66.99	-24.44	91.43	51.09	34.92	11.77	30.79	366	301	P	V
		5717.6	69.36	-40.87	110.23	53.25	35.08	11.84	30.81	366	301	P	V
		5721.2	69.34	-44.3	113.64	53.23	35.08	11.84	30.81	366	301	P	V
		5853.6	63.44	-50.65	114.09	46.96	35.37	11.98	30.87	366	301	P	V
		5856.4	63.06	-47.45	110.51	46.59	35.37	11.98	30.88	366	301	P	V
		5881.6	58.24	-42.16	100.4	41.76	35.38	11.99	30.89	366	301	P	V
		5972.4	57.06	-11.24	68.3	40.47	35.47	12.04	30.92	366	301	P	V
	5776	101.26	-	-	84.93	35.25	11.92	30.84	366	301	P	V	
	5776	93.16	-	-	76.83	35.25	11.92	30.84	366	301	A	V	

**Remark**  
 1. No other spurious found.  
 2. All results are PASS against Peak and Average limit line.



UNII 3 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). It contains two rows of test data for 802.11ac VHT80 CH 155 at 5775MHz.

Remark
1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



**UNII 3 5725~5850MHz**  
**Emission below 1GHz**  
**WIFI 802.11ac VHT80 (LF @ 3m)**

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11ac VHT80 LF		31.94	19.08	-20.92	40	26.18	24.24	0.86	32.2	-	-	P	H
		169.68	23.07	-20.43	43.5	36.32	16.58	2.27	32.1	-	-	P	H
		215.27	19.12	-24.38	43.5	33.35	15.34	2.56	32.13	-	-	P	H
		315.18	20.25	-25.75	46	29.77	19.51	3.1	32.13	-	-	P	H
		641.1	25.08	-20.92	46	26.38	26.52	4.4	32.22	-	-	P	H
		753.62	26.94	-19.06	46	25.98	28.49	4.77	32.3	216	54	P	H
		37.76	32.78	-7.22	40	42.9	21.03	1.01	32.16	165	62	P	V
		42.61	30.79	-9.21	40	43.52	18.29	1.12	32.14	-	-	P	V
		66.86	22.67	-17.33	40	41.18	12.24	1.39	32.14	-	-	P	V
		169.68	23.03	-20.47	43.5	36.28	16.58	2.27	32.1	-	-	P	V
		740.04	25.64	-20.36	46	25.02	28.17	4.73	32.28	-	-	P	V
	957.32	27.55	-26.45	54	23.4	30.97	5.37	32.19	-	-	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a Ant 1+2	97.39	1.397	0.716	0.75kHz
802.11n HT20 Ant 1+2	97.22	1.310	0.763	0.82kHz
802.11n HT40 Ant 1+2	93.97	0.650	1.538	1.6kHz
802.11ac VHT80 Ant 1+2	87.84	0.323	3.096	3.3kHz

### 802.11a

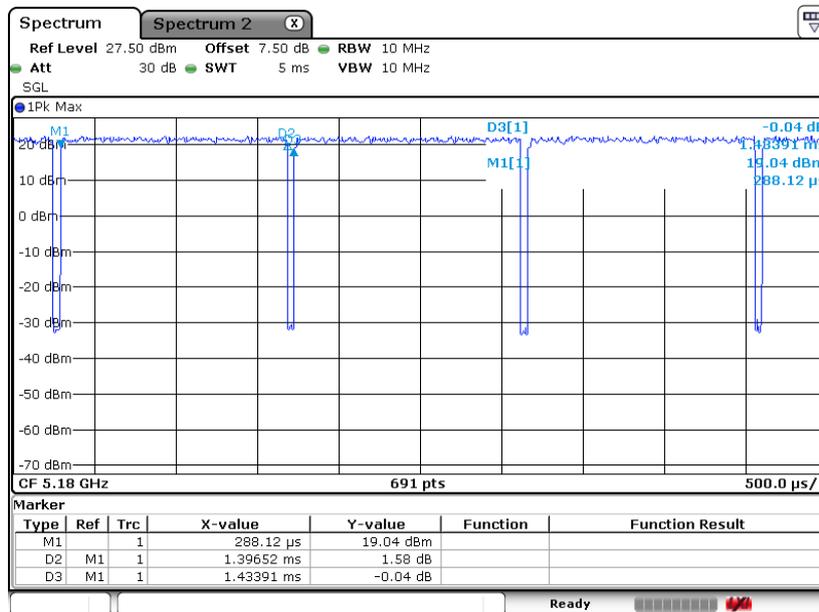




802.11n HT20

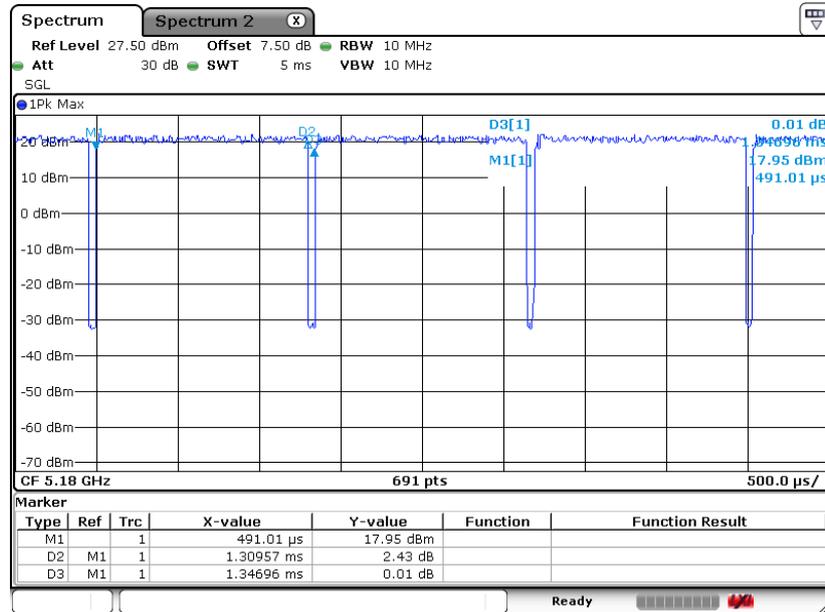

802.11n HT40

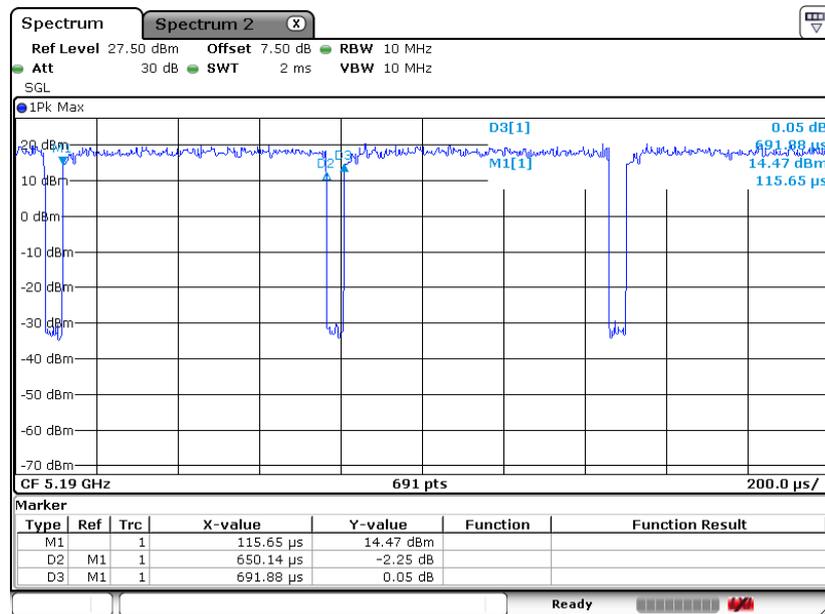



802.11ac VHT80

