

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Design Trends, Inc.

5585 Brooks Street, Montclair, California 91763

E.U.T.: Nano

Model Name: RN8

/Additional Model & Model Difference Refer to Section 1.

Trade name: G-CUBE

FCC ID: O5ERN8

Report Number: NTC1210888F

Test Date(s): October 10, 2012 to November 07, 2012

Report Date(s): November 07, 2012

Prepared by

Dongguan NTC Co., Ltd.

**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong Province, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Rose Hu / Engineer



Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan NTC Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	3
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	6
1.6 TEST MODE	6
1.7 TEST FACILITY AND LOCATION.....	6
1.8 SUMMARY OF TEST RESULTS	7
2. CONDUCTED EMISSIONS TEST	8
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	8
TEST CONDITIATION.....	8
MEASURMENT RESULTS.....	8
3. RADIATED EMISSION TEST.....	11
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
MEASUREMENT RESULTS	14
4. 20DB BANDWIDTH.....	18
MEASUREMENT PROCEDURE	18
MEASUREMENT RESULTS.....	18
5. BAND EDGE	21
MEASUREMENT PROCEDURE	21
MEASUREMENT RESULTS.....	21
6. ANTENNA APPLICATION	23
ANTENNA REQUIREMENT	23
MEASUREMENT RESULTS.....	23
7. TEST EQUIPMENT LIST.....	24

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

The Design Trends, Inc.'s product, model name: RN8 is a USB Dongle. It's DC 5V power by PC. For more details features, please refer to User's Manual.

Manufacturer	: Design Trends, Inc.
Address	: 5585 Brooks Street, Montclair, California 91763
Frequency:	: 2405-2476MHz
Modulation	: GFSK
Number of Channel	: 64 channels (There are 2 groups frequency and each of group has 32 channels, details see below channel list.)
Antenna Type	: Integral
Antenna Gain	: 0 dBi
Model name:	: RN-8, RN-8X, RN-8XX, RN-9, RN-9X, RN-9XX, RN-7, RN-7X, RN-7XX("XX" represent product color code)
Note	: These models are the same except colour and model number.

Channel List

Frequency Group 1				Frequency Group 2			
CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
1	2407	17	2442	33	2405	49	2443
2	2408	18	2447	34	2406	50	2444
3	2412	19	2451	35	2419	51	2446
4	2414	20	2452	36	2410	52	2448
5	2417	21	2457	37	2411	53	2449
6	2420	22	2458	38	2413	54	2453
7	2421	23	2459	39	2415	55	2455
8	2422	24	2460	40	2416	56	2456
9	2427	25	2461	41	2418	57	2462
10	2428	26	2465	42	2419	58	2463
11	2431	27	2468	43	2423	59	2464
12	2435	28	2469	44	2425	60	2466
13	2436	29	2472	45	2429	61	2467
14	2437	30	2473	46	2430	62	2470
15	2438	31	2475	47	2432	63	2471
16	2439	32	2476	48	2434	64	2474

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the lowest, middle, and the highest frequency of channel were selected to perform the test. The selected frequency see below:

The lowest frequency: 2405MHz
The middle frequency: 2439MHz
The highest frequency: 2476MHz

1.2 Related Submittal(s) / Grant (s)

This is an application for certification of a transceiver for the USB Dongle unit, and the corresponding wireless mouse unit is subjected to FCC certification with FCC ID: O5EG9330.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

PC	:	M/N: HP Pro 3005 MT
Manufacturer: HP	:	S/N: 4CV1324FBS
		Power Cord: 1.8m Unshielded, with core CE, FCC: DOC
LCD Monitor	:	M/N: Q1910
Manufacturer: HP	:	S/N: 3CQ0512BNW
		Data Cable: 1.5m Shielded, with core
		Power Cord: 1.5m Unshielded, with core CE, FCC:DOC
Printer	:	M/N: 3518
Manufacturer:	:	Data Cable: 1.5m Shielded
Lenovo	:	Power Cord: 1.5m Unshielded with core CE, FCC: DOC

1.6 Test Mode

All test performance in normal operation and transmitting mode (TX), and keep the EUT with modulation in transmitting mode.

1.7 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 46405-9743.


Dongguan NTC Co., Ltd.
Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

1.8 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	Conduction Emissions	Compliant
§15.249(a)/15.209	Radiated Emission	Compliant
§15.249(d)/15.205	Band edge	Compliant
§15.215(c)	20dB Occupied Bandwidth	Compliant
§15.203	Antenna Requirement	Compliant

2. Conducted Emissions Test

Test SET-UP (Block Diagram of Configuration)

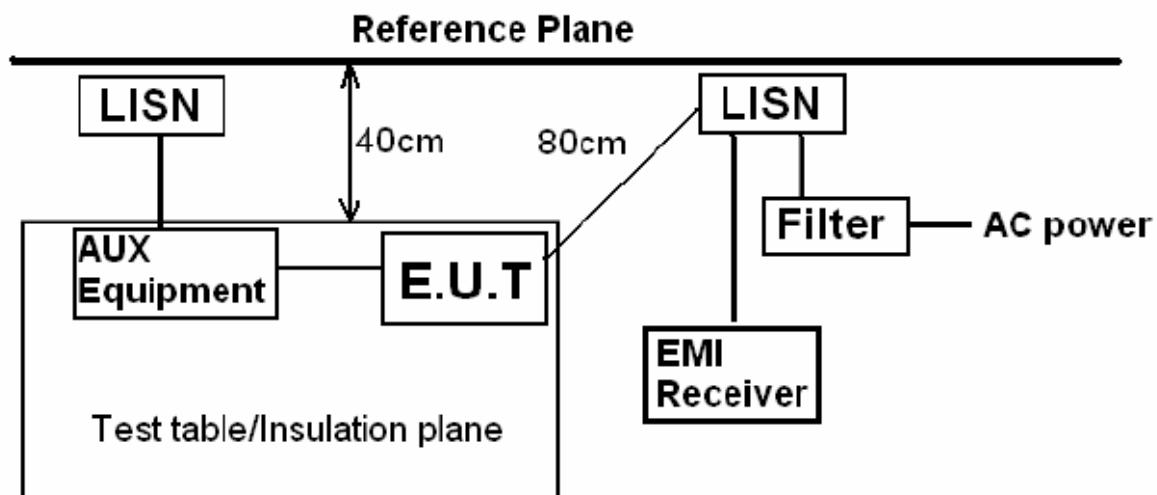

Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: Normal

Measurement Results


Please refer to following plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2012-10-11 15:35:40

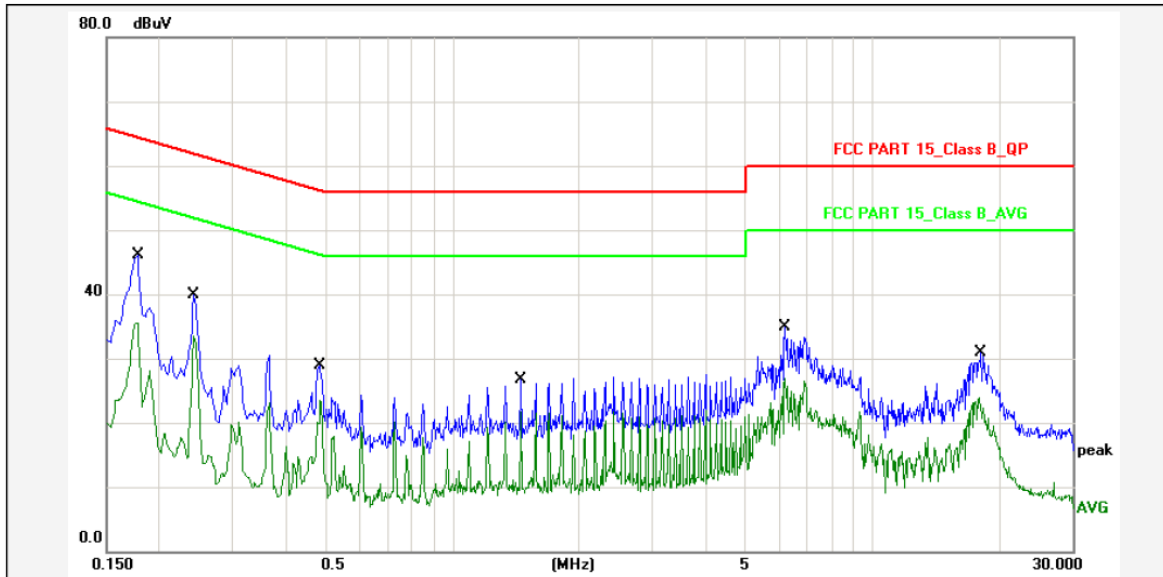

Report No.: RN8

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Design

Temp.()/Hum.(%): 30(C) / 42 %

Product: Nano

Power Rating: AC 120V/60Hz (PC Input)

Model No.: RN8

Test Engineer: Think

Test Mode: Normal

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1780	10.80	35.34	46.14	64.57	-18.43	QP	P	
2	0.1780	10.80	24.72	35.52	54.57	-19.05	AVG	P	
3	0.2420	10.80	29.03	39.83	62.02	-22.19	QP	P	
4	0.2420	10.80	22.67	33.47	52.02	-18.55	AVG	P	
5	0.4820	10.80	18.19	28.99	56.30	-27.31	QP	P	
6	0.4820	10.80	12.78	23.58	46.30	-22.72	AVG	P	
7	1.4580	10.80	15.86	26.66	56.00	-29.34	QP	P	
8	1.4580	10.80	10.95	21.75	46.00	-24.25	AVG	P	
9	6.2099	10.80	24.19	34.99	60.00	-25.01	QP	P	
10	6.2099	10.80	16.01	26.81	50.00	-23.19	AVG	P	
11	18.2219	10.80	20.09	30.89	60.00	-29.11	QP	P	
12	18.2219	10.80	13.14	23.94	50.00	-26.06	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2012-10-11 15:34:00

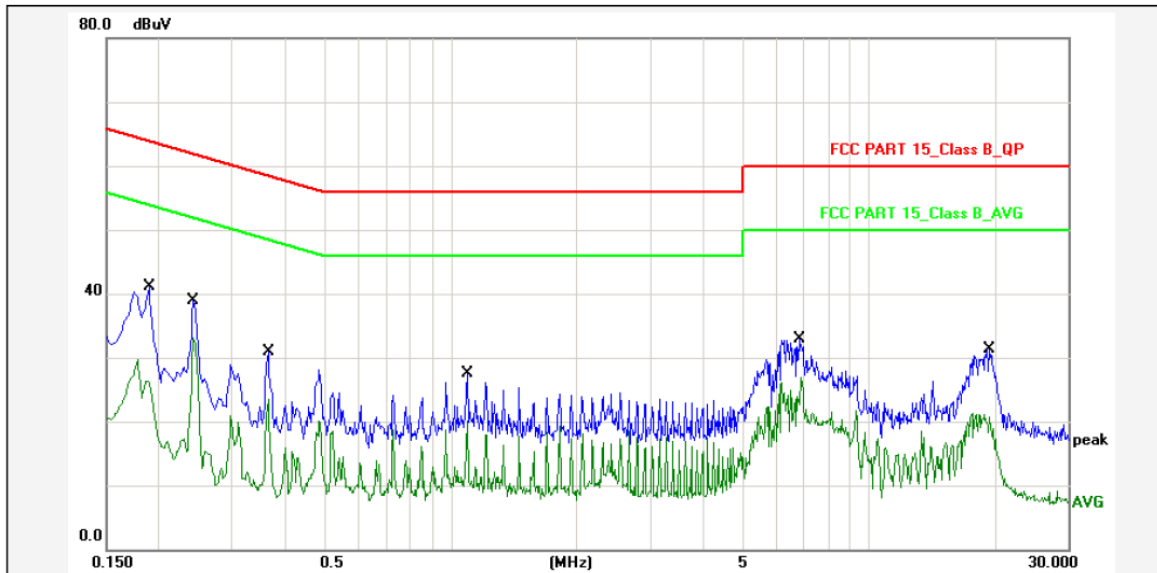

Report No.: RN8

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Applicant: Design

Product: Nano

Model No.: RN8

Phase: N

Temp.()/Hum.(%): 30(C) / 42 %

Power Rating: AC 120V/60Hz (PC Input)

Test Engineer: Think

Test Mode: Normal

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1900	10.80	30.25	41.05	64.03	-22.98	QP	P	
2	0.1900	10.80	15.44	26.24	54.03	-27.79	AVG	P	
3	0.2420	10.80	28.14	38.94	62.02	-23.08	QP	P	
4	0.2420	10.80	18.38	29.18	52.02	-22.84	AVG	P	
5	0.3660	10.80	20.07	30.87	58.59	-27.72	QP	P	
6	0.3660	10.80	12.60	23.40	48.59	-25.19	AVG	P	
7	1.0940	10.80	16.72	27.52	56.00	-28.48	QP	P	
8	1.0940	10.80	9.37	20.17	46.00	-25.83	AVG	P	
9	6.8299	10.80	22.02	32.82	60.00	-27.18	QP	P	
10	6.8299	10.80	16.04	26.84	50.00	-23.16	AVG	P	
11	19.4379	10.80	20.57	31.37	60.00	-28.63	QP	P	
12	19.4379	10.80	10.47	21.27	50.00	-28.73	AVG	P	


Note: Level=Reading+Factor.

Margin=Limit-Level.


3. Radiated Emission Test

Test SET-UP (Block Diagram of Configuration)

Radiated Emission Test Set-Up, Frequency Below 1GHz

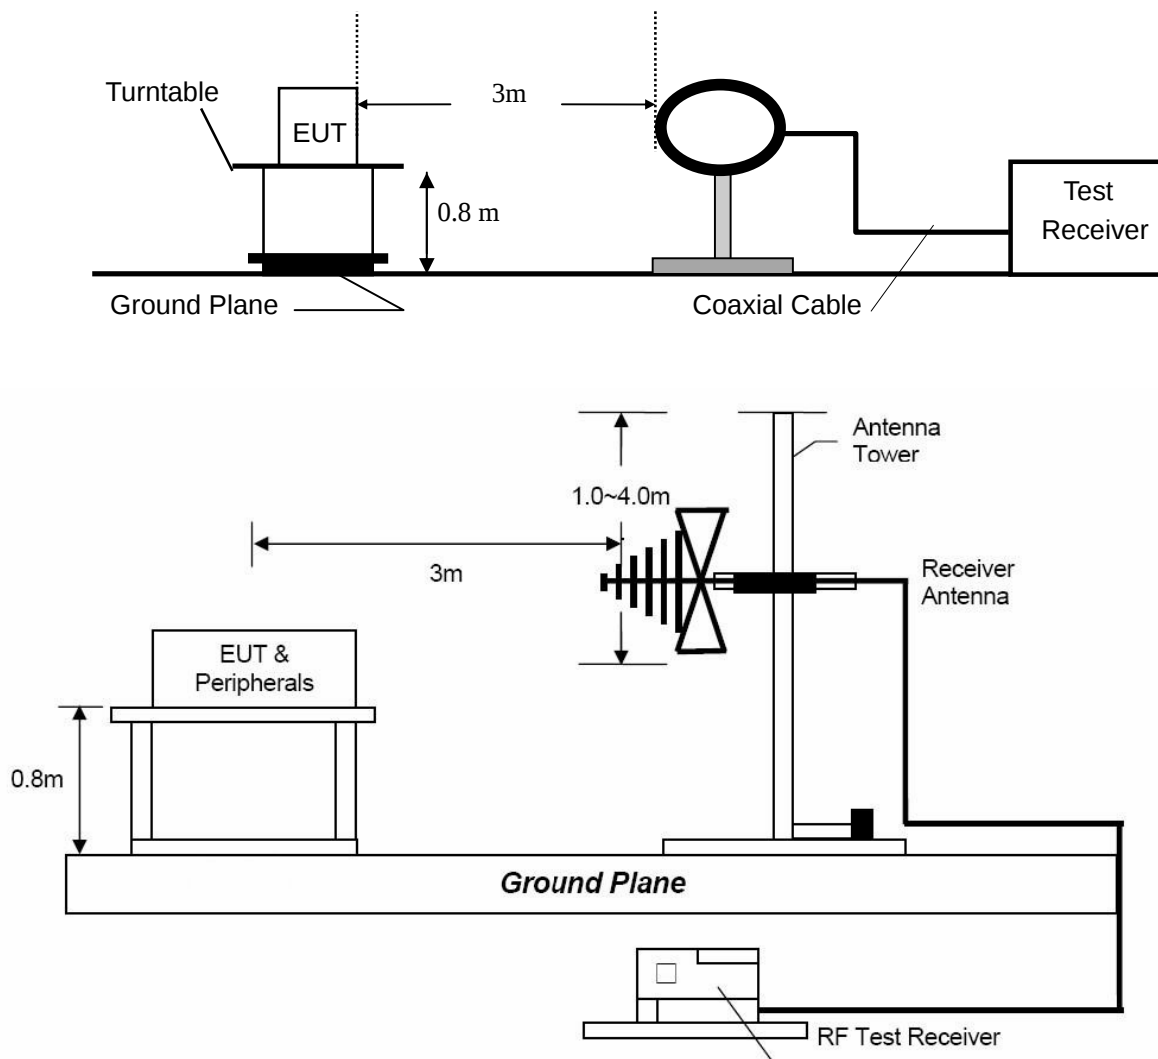

Radiated Emission Test Set-Up, Frequency above 1GHz

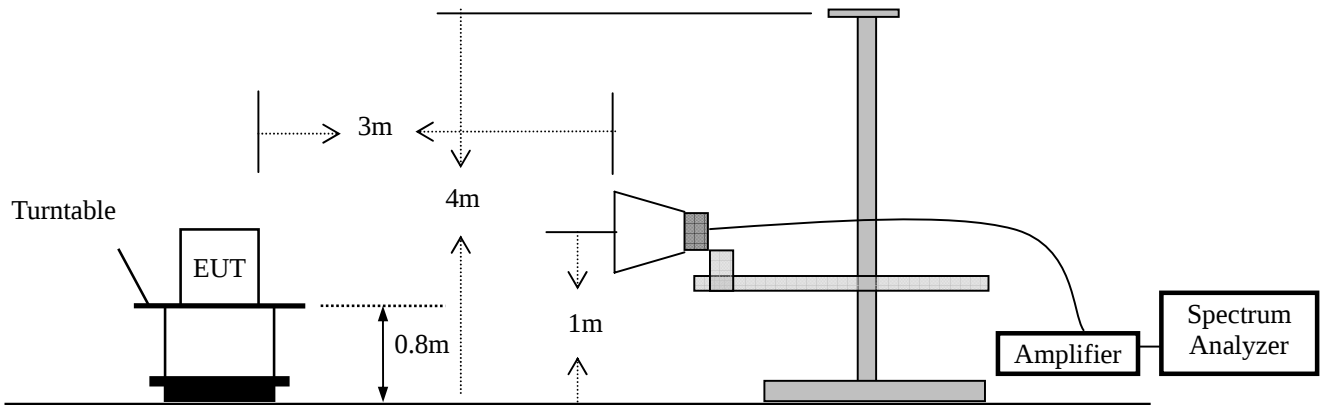

Measurement Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)	
		$\mu\text{V/m}$	
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	
88 ~ 216	3	150	
216 ~ 960	3	200	
Above 960	3	500	
Frequency range MHz	Distance Meters	Field Strengths Limit (15.249)	
		mV/m (Field strength of fundamental)	$\mu\text{V/m}$ (Field strength of Harmonics)
902 ~ 928	3	50	500
2400 ~ 2483.5	3	50	500
5725 ~ 5875	3	50	500
24000 ~ 2425000	3	250	2500

- Remark:** (1)Emission level (dB) μV =20log Emission level $\mu\text{V/m}$
(2)The smaller limit shall apply at the cross point between two frequency bands.
(3)As shown in 15.35(b), for frequency above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4)The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than frequency of 40 GHz, whichever is lower.

Measurement Results

Operation Mode: Normal
Frequency Range: Below 1GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Iori
Test Date : October 11, 2012

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
58.1300	V	36.30	40.00	-3.70	QP
116.3299	V	32.37	43.50	-11.13	QP
143.4900	V	29.83	43.50	-13.67	QP
191.9900	V	26.88	43.50	-16.62	QP
263.7699	V	23.39	46.00	-22.61	QP
335.5500	V	23.69	46.00	-22.31	QP
58.1300	H	28.92	40.00	-11.08	QP
116.3300	H	28.17	43.50	-15.33	QP
143.4900	H	25.72	43.50	-17.78	QP
251.1600	H	24.48	46.00	-21.52	QP
356.8900	H	25.81	46.00	-20.19	QP
418.0000	H	26.44	46.00	-19.56	QP

Note: (1) Quasi-Peak detector is used except for others stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : $\pm 3.7\text{dB}$
(4) The margin of the other data was larger than 10dB.

Modulation: GFSK
Operation Mode: TX Mode (Low) Test Date : November 07, 2012
Frequency Range: Above 1GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2405	V	82.79	59.24	114.00	94.00	-31.21	-34.76
4810	V	51.98	31.05	74.00	54.00	-22.02	-22.95
7215	V	50.07	28.96	74.00	54.00	-23.93	-25.04
9620	V	51.24	29.73	74.00	54.00	-22.76	-24.27
2405	H	91.67	66.43	114.00	94.00	-22.33	-27.57
4810	H	59.42	37.49	74.00	54.00	-14.58	-16.51
7215	H	57.41	35.68	74.00	54.00	-16.59	-18.32
9620	H	51.34	30.02	74.00	54.00	-22.66	-23.98

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) Peak Detector Data unless otherwise stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

Modulation:	GFSK	Test Date :	November 07, 2012
Operation Mode:	TX Mode (Mid)	Temperature :	25 °C
Frequency Range:	Above 1GHz	Humidity :	50 %
Test Result:	PASS	Test By:	Think
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2439	V	83.59	60.02	114.00	94.00	-30.41	-33.98
4878	V	50.74	30.13	74.00	54.00	-23.26	-23.87
7317	V	49.75	29.68	74.00	54.00	-24.25	-24.32
9756	V	51.48	30.47	74.00	54.00	-22.52	-23.53
2439	H	92.64	67.75	114.00	94.00	-21.36	-26.25
4878	H	56.78	35.04	74.00	54.00	-17.22	-18.96
7317	H	53.19	31.69	74.00	54.00	-20.81	-22.31
9756	H	51.70	30.56	74.00	54.00	-22.30	-23.44

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) Peak Detector Data unless otherwise stated.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : $\pm 3.7\text{dB}$

Modulation: GFSK
Operation Mode: TX Mode (High) Test Date : November 07, 2012
Frequency Range: Above 1GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Think

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2476	V	86.01	64.07	114.00	94.00	-27.99	-29.93
4952	V	51.45	30.92	74.00	54.00	-22.55	-23.08
7428	V	48.86	28.15	74.00	54.00	-25.14	-25.85
9904	V	50.52	29.94	74.00	54.00	-23.48	-24.06
2476	H	92.78	68.13	114.00	94.00	-21.22	-25.87
4952	H	57.49	37.08	74.00	54.00	-16.51	-16.92
7428	H	51.37	31.02	74.00	54.00	-22.63	-22.98
9904	H	50.85	29.76	74.00	54.00	-23.15	-24.26

Other harmonics emissions are lower than 10dB below the allowable limit.

Note: (1) Peak Detector Data unless otherwise stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB

4. 20dB Bandwidth

Measurement Procedure



The 20dB bandwidth of the emission was contained within the frequency band designated which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered, FCC Rule 15.215(c):


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

Measurement Results

RBW:	100KHz	VBW:	300KHz
Spectrum Detector:	PK	Test Date :	October 19, 2012
Temperature :	24 °C	Humidity :	53 %
Test By:	Think		
Channel frequency (MHz)		20dB Down BW(kHz)	
2405		3680	
2439		2440	
2476		2260	

Please see below the plots.

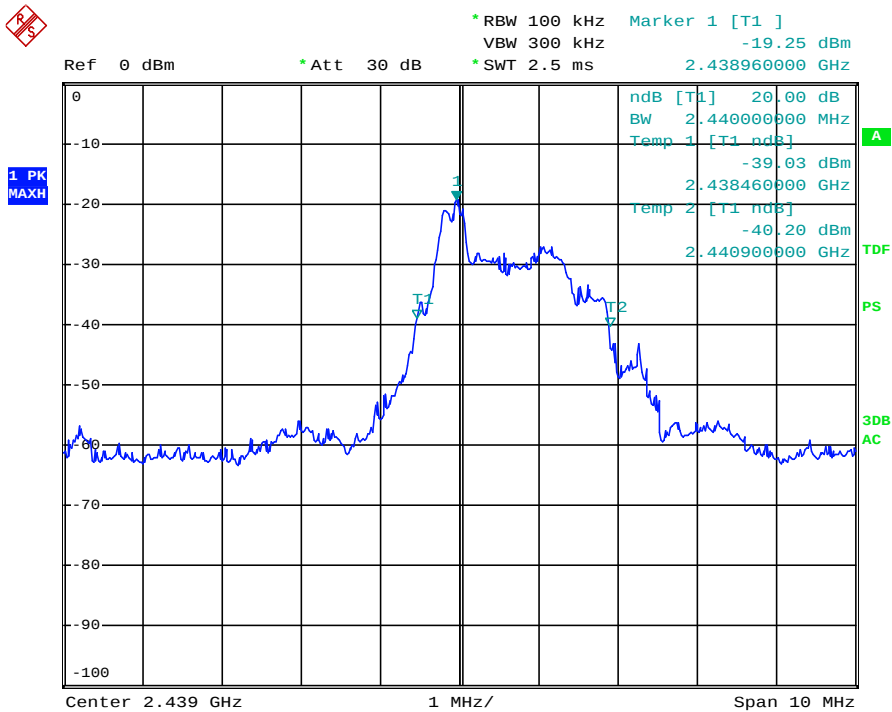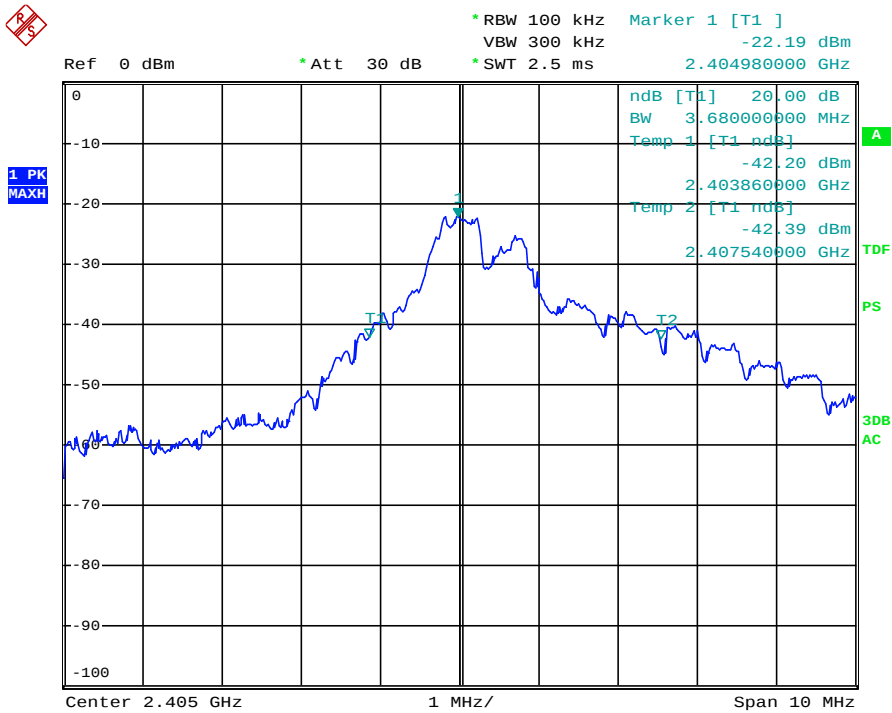

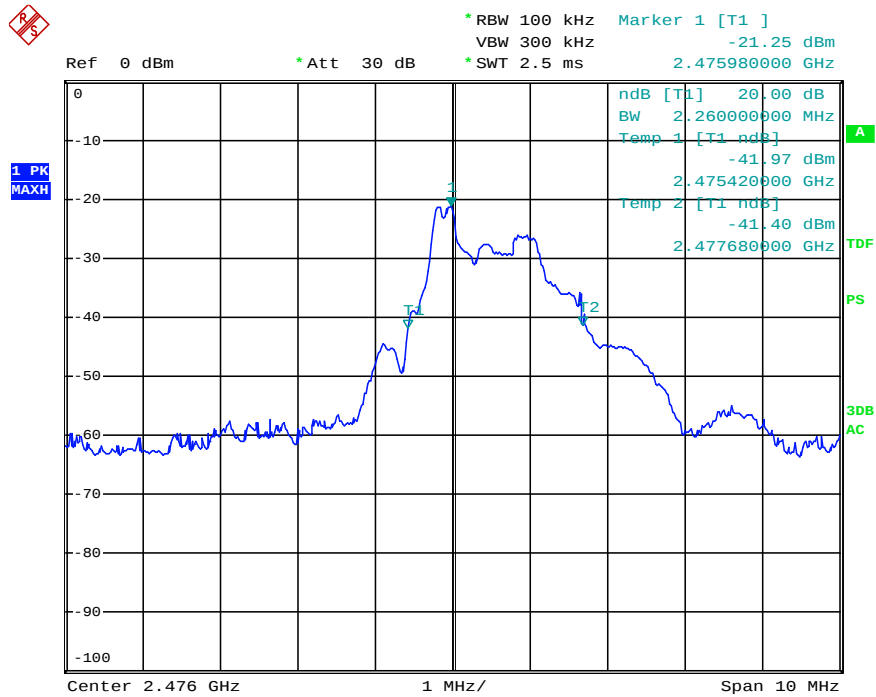

5. Band Edge

Measurement Procedure


Same as Radiated Emission Test

Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

Measurement Results

Please see below the plots.

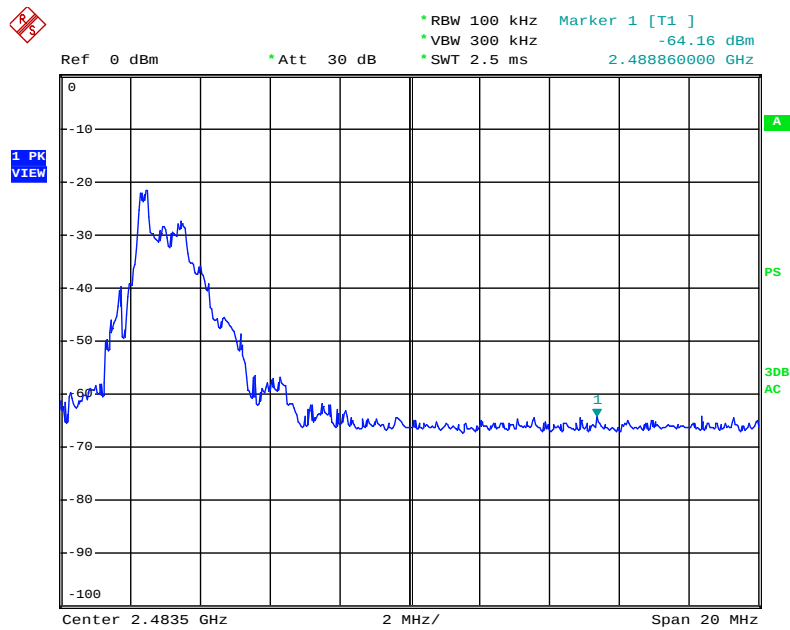

Note: 1. The peak value is 42.84dBuV,
2. 0dBm=107dBuV



Note: 1. The Peak Value is 43.11dBuV
2. 0dBm=107dBuV

6. Antenna Application

Antenna requirement

According to of FCC part 15C section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

7. Test Equipment List

Description	Manfucaturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 06, 2012	Nov. 06, 2013
L.I.S.N	Rohde & Schwarz	ENV 216	101317	Nov. 06, 2012	Nov. 06, 2013
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2011	Nov. 28, 2012
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSPO	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	UBER+SUHNER	CBL2-NN-1M	22320001	Nov. 06, 2012	Nov. 06, 2013
Cable	Schwarzbeck	CIL02	N/A	Nov. 06, 2012	Nov. 06, 2013
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 06, 2012	Nov. 06, 2013
Horn Antenna	EMCO	3117	00062558	Oct. 19, 2012	Oct. 19, 2013
Horn Antenna (AUX)	EMCO	3117	00085519	Nov. 06, 2012	Nov. 06, 2013
Loop antenna	Daze	ZA30900A	0708	Oct.16, 2012	Oct.16, 2013
Spectrum Analyzer	Rohde&Schwarz	ESU	100005	May 25, 2012	May 25, 2013
Cable	Schwarzbeck	CIL02	N/A	Nov. 06, 2012	Nov. 06, 2013
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 06, 2012	Nov. 06, 2013
Pre-Amplifier	Agilent	8449B	3008A02964	Dec. 19, 2011	Dec. 19, 2012