



# PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road • Columbia, MD 21045 • U.S.A.

TEL (410) 290-6652 • FAX (410) 290-6654

[www.pctestlab.com](http://www.pctestlab.com)



## CERTIFICATE OF COMPLIANCE FCC Part 22 Certification

GTRAN KOREA, INC.  
1600-1 Kwanyang 2-Dong, Dongan-Ku  
Anyang, Kyunggi-Ko, KOREA 431-060  
Attn: Mr. Howard Kim, Project Manager

Dates of Tests: July 24-27, 2000  
Test Report S/N: 22.200724341.O5T  
Test Site: PCTEST Lab, Columbia MD USA

FCC ID

05TGCP-2000

APPLICANT

GTRAN KOREA, INC.

Classification: Non-Broadcast Transmitter held to ear (TNE)

FCC Rule Part(s): §22(H), §22.901(d), §2

EUT Type: Dual-Mode Cellular Phone (AMPS/CDMA)

Trade Name/Model(s): GTRAN GCP-2000

Tx Frequency Range: 824.04 ~ 848.97MHz (AMPS) / 824.70 ~ 848.31 MHz (CDMA)

Rx Frequency Range: 869.04 ~ 893.97MHz (AMPS) / 869.70 ~ 893.31 MHz (CDMA)

Max. RF Output Power: 0.559W ERP AMPS (27.47 dBm) / 0.353W ERP CDMA (25.48 dBm)

Frequency Tolerance: 0.00025% (2.5 ppm)

Emission Designators: 40K0F8W, 40K0F1D, 1M25F9W

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947 with the following remarks (Note Codes):

\* (BC) The output power is continuously variable from the value listed in this entry to 5%-10% of the value listed.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

  
\_\_\_\_\_  
Randy Ortanez  
President & Chief Engineer



2 0 0 7 2 4 3 4 1 . 0 5 T

NVLAP®  
LAB CODE 100431-0

---

## TABLE OF CONTENTS



---

ATTACHMENT A: COVER LETTER	
ATTACHMENT B: ATTESTATION STATEMENT(S)	
ATTACHMENT C: TEST REPORT	
1.1 SCOPE	1
2.1 INTRODUCTION	2
3.1 INSERTS PER §2.1033(d)	3
4.1 DESCRIPTION OF TESTS	4-6
5.1 EFFECTIVE RADIATED POWER OUTPUT	7-8
6.1 RADIATED MEASUREMENTS	9-14
7.1 FREQUENCY STABILITY	15-16
8.1 PLOTS OF EMISSIONS	17
9.1 LIST OF TEST EQUIPMENT	18
10.1 SAMPLE CALCULATIONS	19
11.1 CONCLUSION	20
ATTACHMENT D: TEST PLOTS	
ATTACHMENT E: FCC ID LABEL & LOCATION	
ATTACHMENT F: TEST SETUP PHOTOGRAPHS	
ATTACHMENT G: EXTERNAL PHOTOGRAPHS	
ATTACHMENT H: INTERNAL PHOTOGRAPHS	
ATTACHMENT I: BLOCK DIAGRAM(S)	
ATTACHMENT J: CIRCUIT DIAGRAMS	
ATTACHMENT K: PARTS LIST/TUNE UP PROCEDURE	
ATTACHMENT L: OPERATIONAL DESCRIPTION	
ATTACHMENT M: USER'S MANUAL	
ATTACHMENT N: SAR MEASUREMENT REPORT	
ATTACHMENT O: SAR TEST DATA	
ATTACHMENT P: SAR TEST SETUP PHOTOGRAPHS	

## **ATTACHMENT C – TEST REPORT**

---

# MEASUREMENT REPORT



## 1.1 Scope

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.*

## §2.1033 General Information

**Applicant:**

**GTRAN Korea, Inc.**

**Address:**

**1600-1 Kwanyang 2-Dong, Dongan-Ku**

**Anyang, Kyunggi-Ko, KOREA 431-060**

**Attention:**

**Mr. Howard Kim, Project Manager**

- FCC ID: **O5TGCP-2000**
- Trade Name(s): **GTRAN**
- Model(s): **GCP-2000**
- Quantity: Quantity production is planned
- Emission Designator: 40K0F8W, 40K0F1D, 1M25F9W
- Tx Freq. Range: 824.04 – 848.97 MHz (AMPS) / 824.70 ~ 848.31 (CDMA)  
Rx Freq. Range: 869.04 – 893.97 MHz (AMPS) / 869.70 ~ 893.31 (CDMA)
- Equipment Class: Non-Broadcast Transmitter Held to Ear (TNE)
- Equipment Type: Dual-Mode Cellular Phone
- Modulation(s): AMPS / CDMA
- Frequency Tolerance: ± 0.00025% (2.5 ppm)
- Max. RF Output Power: 0.559W ERF AMPS (27.47 dBm) / 0.353W ERF CDMA (25.48 dBm)
- FCC Rule Part(s): §22(H), §22.901(d), §2
- AC/DC Power Adapter: 3.6VDC 1600mA
- Battery Pack: 4.2 VDC 400mAh Li-Ion
- Dates of Tests: July 24-27, 2000
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.

**NVLAP**  
Lab Code 100431-0

## 2.1 INTRODUCTION

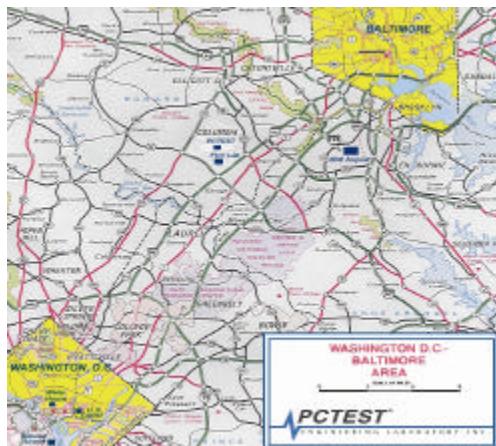


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are  $39^{\circ} 11'15''$  N latitude and  $76^{\circ} 49'38''$  W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

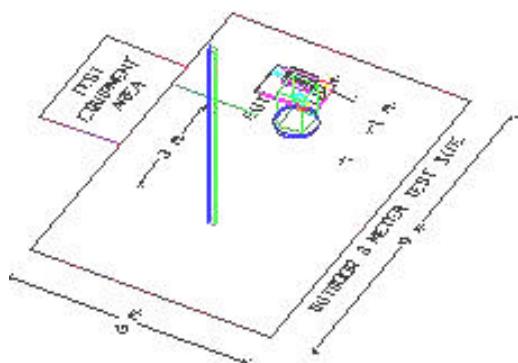


Figure 2. 3-meter Outdoor Test Site

### Measurement Procedure

The radiated and spurious measurements were made outdoors at 3-meter test range (see Figure 2). The equipment under test is placed on the turntable connected to a RF wattmeter and a dummy RF load, and then its power is adjusted to its rated output. A receiving antenna located 2 meters from the turntable picks up any signal radiated from the transmitter. The turntable containing the system was rotated; the receiving antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. The testing procedure is repeated for both horizontal and vertical polarization of the receiving antenna. The actual radiated signal strength is obtained by substitution method with a signal generator with a calibrated output. The signal generator is adjusted in output until its reading is identical to that obtained when the receiving antenna is connected to the receiver. Signal strength is then read directly from the signal generator.

### **3.1 INSERTS PER §2.1033(d)**

---

#### **§2.1033(d) Function of Active Devices (Confidential)**

The Function of active devices are shown in Attachment L.

#### **§2.1033(d) Block/Circuit Diagrams (Confidential)**

The circuit diagrams are shown in Attachment J, and the block diagrams are shown in Attachment I.

#### **§2.1033(d) Operating Instructions**

The instruction manual is shown in Attachment M.

#### **§2.1033(d) Parts List & Tune-Up Procedure (Confidential)**

The parts list & tune-up procedure are shown in Attachment K.

#### **§2.1033(d) Description of Freq. Stabilization Circuit (Confidential)**

The description of frequency stabilization circuit is shown in Attachment L.

#### **§2.1033(d) Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Supresion Circuits (Confidential)**

The description of suppression stabilization circuits are shown in Attachment L.

## 4.1 DESCRIPTION OF TESTS

### 4.2 §2.1047(a) Transmitter Audio Frequency Response

The frequency response of the audio modulating circuit over the frequency range 100 – 5000 Hz is measured. The audio signal generator is connected to the audio input circuit/microphone of the EUT. The audio signal input is adjusted to obtain 50% modulation at 1kHz and this point is taken as the 0dB reference. With the input held constant and below the limit at all frequencies, the audio signal generator is varied from 100 to 50 kHz.

### 4.3 §22.915(d) Audio Low Pass Filter Frequency Response

The response in dB relative to 1kHz is measured using the HP8901 a Modulation Analyzer. For the frequency response of the audio low-pass filter, the audio input is connected at the input to the modulation limiter and the modulated stage. The audio output is connected at the output of the modulated stage. The corresponding plots are shown herein.

### 4.4 §2.1047(b) & §22.915(b) Modulation Limiting

The audio signal generator is connected to the audio input circuit/microphone of the EUT. The modulation response is measured for each of the three modulating frequencies (300Hz, 1000 Hz, and 3000Hz), and the input voltage is varied from 30% modulation ( $\pm 3.6\text{kHz}$  deviation) to at least 20dB higher than the saturation point. Measurements of modulation and the plots are attached herein. Measurements were performed for ST, SAT, and wide-band data modulations. The corresponding results are shown herein.

Note: ST, SAT, & Wide-Band data were internally generated by the EUT.

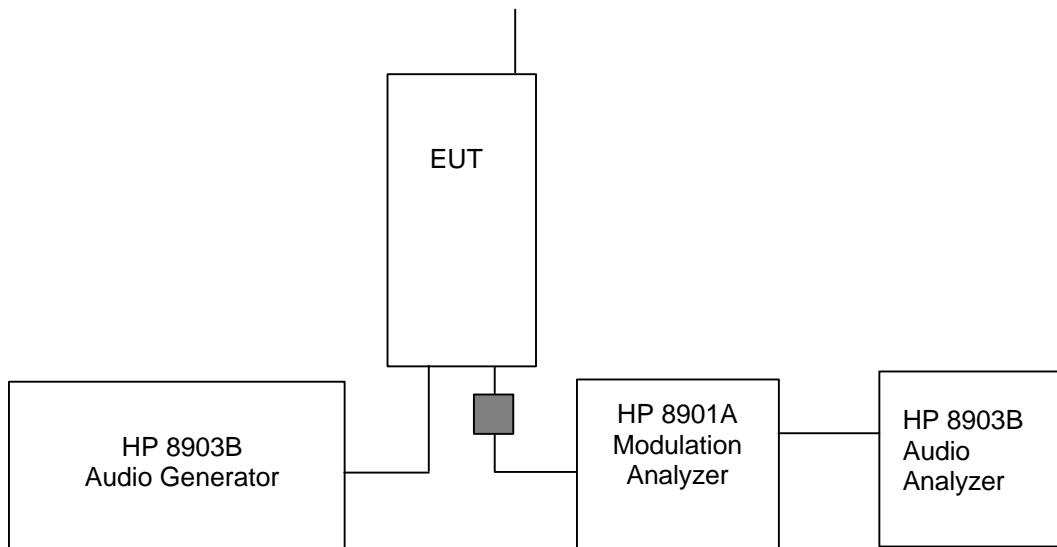


Fig. 3. Transmitter Audio Frequency & Tone Modulation Test Setup.

## 4.1 DESCRIPTION OF TESTS (CONTINUED)

---

### **4.4 §2.1049(c) Occupied Bandwidth**

The audio signal generator is adjusted to 1kHz. The output level is set to +/- 6kHz deviation. With the level constant, the freq. is set to 2,500Hz. Then the audio signal level is increased by 16dB. The occupied bandwidth data is obtained for the SAT (Supervisory Audio Tone), ST (Signaling Tone), WBD (Wideband Data), and DTMF (Dual Tone Multi Frequencies). The results are shown on the attached graphs.

Specified Limits:

- (a) On any frequency removed from the assigned carrier frequency by more than 20kHz, up to and including 45kHz, the sideband is at least 26dB below the carrier.
- (b) On any frequency removed from the assigned carrier frequency by more than 45kHz, up to and including 90kHz, the sideband is at least 45dB below the carrier.
- (c) On any frequency removed from the assigned carrier frequency by more than 90kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier of  $40 + \log_{10}$  (mean power output in Watts) dB, whichever is the smaller attenuation.

### **4.5 §2.1051 Spurious and Harmonic Emissions at Antenna Terminal**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provided 50% modulation.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with one port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than -90dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the bandpass filter insertion loss to be calibrated.

### **4.7 §2.1053 Radiation Spurious and Harmonic Emissions**

Radiation and harmonic emissions above 1 GHz is measured at out 3-meter indoor site. The EUT is placed on the turntable connected to a dummy load in normal operation using the intended power source. A receiving antenna located 3 meters from the turntable receives any signal radiated from the transmitter and its operating accessories. The antenna is varied from 1 to 4 meters and the polarization is varied (horizontal and vertical) to determine the worst-case emission level. To obtain actual radiated signal strength, a signal generator is adjusted in output until a reading identical to that obtained with the actual transmitter is obtained at the receiver. Signal strength is read directly from the generator and recorded on the attached table.

## 4.1 DESCRIPTION OF TESTS (CONTINUED)

---

### 4.8 §2.995 Frequency Stability/Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

*Specification – The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.*

#### Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at 30°C (usually 14-16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements is made at 10°C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10 intervals starting at 30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

**NOTE: The EUT is tested down to the battery endpoint.**

## 5.1 Test Data

---

### 5.2 Effective Radiated Power Output (ERP)

#### A. POWER: Low (Analog Mode)

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)
824.04	-33.80	H	0.00560	7.47
837.00	-35.00	H	0.00441	6.44
848.97	-34.31	H	0.00535	7.27

#### A. POWER: High (Analog Mode)

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.04	-13.80	H	0.55889	27.47	Standard
837.00	-15.00	H	0.44008	26.44	Standard
848.97	-14.31	H	0.53394	27.27	Standard
824.04	-13.95	H	0.53992	27.32	Extended

#### NOTES:

##### ERP Measurements by Substitution Method:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This ERP level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

## **5.1 Test Data (continued)**

### **5.3 Effective Radiated Power Output (ERP)**

#### **A. POWER: High (CDMA Mode)**

Freq. Tuned (MHz)	LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.70	-15.805	H	0.35290	25.477	Standard
835.89	-16.275	H	0.32785	25.146	Standard
848.31	-16.115	H	0.35169	25.462	Standard
824.70	-15.960	H	0.34134	25.322	Extended

#### **NOTES:**

##### **ERP Measurements by Substitution Method:**

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This ERP level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

## 6.1 Test Data

### 6.2 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 824.70 MHz  
CHANNEL: 1013 (Low)  
MEASURED OUTPUT POWER: 25.48 dBm = 0.353 W  
MODULATION SIGNAL: CDMA (Internal)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  38.48 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	(dBc)
1649.40	-78.44	34.6	H	1438.3	-34.22	59.70
2474.10	-77.26	38.8	H	2674.5	-28.83	54.31
3298.80	-81.22	42.6	H	2623.9	-29.00	54.48
4123.50	-93.50	46.2	H	966.1	-37.68	63.15
4948.20	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} ((r(mV/m)/1 \times 10^6)^2 / 49.2/1 \times 10^3)$$

$$\text{ERP (dBm)} = 10 \log_{10} [ (3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000 ]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS}/1 \times 10^6)^2 / 49.2\}$$

## 6.1 Test Data (continued)

### 6.3 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 835.89 MHz  
CHANNEL: 363 (Middle)  
MEASURED OUTPUT POWER: 25.48 dBm = 0.353 W  
MODULATION SIGNAL: CDMA (Internal)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  38.48 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	(dBc)
1671.78	-79.33	34.7	H	1313.6	-35.01	60.49
2507.67	-78.00	39.0	H	2511.9	-29.38	54.85
3343.56	-82.67	42.7	H	2247.2	-30.34	55.82
4179.45	-94.00	46.1	H	901.6	-38.28	63.75
5015.34	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} ((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [ (3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000 ]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

## 6.1 Test Data (continued)

### 6.4 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (CDMA)

OPERATING FREQUENCY: 848.31 MHz  
CHANNEL: 777 (High)  
MEASURED OUTPUT POWER: 25.48 dBm = 0.353 W  
MODULATION SIGNAL: CDMA (Internal)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  38.48 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	ERP (dBc)
1696.62	-79.00	34.8	H	1380.4	-34.58	60.05
2544.93	-77.56	39.3	H	2736.5	-28.63	54.11
3393.24	-82.50	43.1	H	2398.8	-29.78	55.25
4241.55	-94.33	46.2	H	877.8	-38.51	63.99
5089.86	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} ((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

## 6.1 Test Data (continued)

### 6.5 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 824.04 MHz  
CHANNEL: 991 (Low)  
MEASURED OUTPUT POWER: 27.47 dBm = 0.559 W  
MODULATION SIGNAL: ST (Signalling Tone)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  40.47 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	(dBc)
1648.08	-76.80	34.5	H	1717.9	-32.68	60.15
2472.12	-74.21	38.8	H	3798.0	-25.79	53.26
3296.16	-79.81	42.5	H	3051.1	-27.69	55.16
4120.20	-93.33	46.1	H	973.8	-37.61	65.08
4944.24	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} ((r(mV/m)/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [ (3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000 ]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

## 6.1 Test Data (continued)

### 6.6 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 836.49 MHz  
CHANNEL: 383 (Middle)  
MEASURED OUTPUT POWER: 27.47 dBm = 0.559 W  
MODULATION SIGNAL: ST (Signalling Tone)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) = 40.47$  dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	(dBc)
1672.98	-76.22	34.5	H	1836.3	-32.10	59.57
2509.47	-74.67	39.0	H	3686.8	-26.04	53.52
3345.96	-80.00	42.7	H	3054.9	-27.68	55.15
4182.45	-93.55	46.2	H	960.1	-37.73	65.20
5018.94	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} ((r(mV/m)/1 \times 10^6)^2 / 49.2/1 \times 10^3)$$

$$\text{ERP (dBm)} = 10 \log_{10} [ (3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000 ]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

## 6.1 Test Data (continued)

### 6.7 Radiated Measurements

#### Field Strength of SPURIOUS Radiation (Analog)

OPERATING FREQUENCY: 848.97 MHz  
CHANNEL: 799 (High)  
MEASURED OUTPUT POWER: 27.47 dBm = 0.559 W  
MODULATION SIGNAL: ST (Signalling Tone)  
DISTANCE: 3 meters  
LIMIT:  $43 + 10 \log_{10} (W) =$  40.47 dBc

FREQ. (MHz)	LEVEL (dBm)	AFCL (dB)	POL (H/V)	F/S ( $\mu$ V/m)	ERP (dBm)	ERP (dBc)
1697.94	-76.45	34.9	H	1873.5	-31.92	59.40
2546.91	-75.00	39.2	H	3630.8	-26.18	53.65
3395.88	-79.33	42.9	H	3376.4	-26.81	54.28
4244.85	-93.45	46.1	H	961.1	-37.72	65.19
5093.82	< -130					

#### NOTES:

1. The bandwidth is set per §22.917 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 25 MHz up to the 10th harmonic.
3. All emissions not listed were found to be more than 20dB below the limit.
4. < -130dBm is below the floor of the spectrum analyzer.
5. The EUT is manipulated through 3 orthogonal axis and the worst-case are reported.
6. The EUT is placed 3m. away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} (((r(mV/m)/1 \times 10^6)^2 / 49.2)/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

## 7.1 Test Data

---


### 7.2 FREQUENCY STABILITY

OPERATING FREQUENCY: 836,490,023 Hz  
CHANNEL: 383  
REFERENCE VOLTAGE: 3.8 VDC  
DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,490,023	0.000000
100 %		- 30	836,489,772	0.000030
100 %		- 20	836,489,797	0.000027
100 %		- 10	836,489,864	0.000019
100 %		0	836,489,998	0.000003
100 %		+ 10	836,489,998	0.000003
100 %		+ 20	836,490,023	0.000000
100 %		+ 25	836,489,948	0.000009
100 %		+ 30	836,490,065	-0.000005
100 %		+ 40	836,490,090	-0.000008
100 %		+ 50	836,490,207	-0.000022
100 %		+ 60	836,490,458	-0.000052
85 %	3.23	+ 20	836,490,023	0.000000
115 %	4.37	+ 20	836,490,023	0.000000
BATT. ENDPOINT	2.76	+ 20	836,490,023	0.000000

## 7.1 Test Data (continued)

### 7.3 Frequency Stability Graph

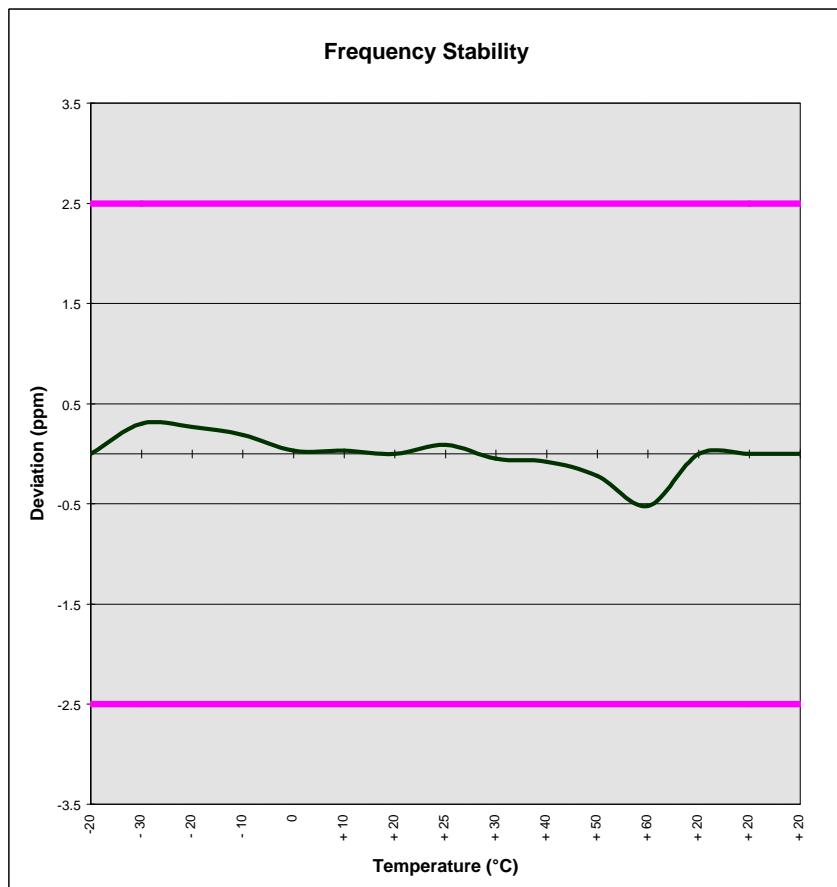

## **8.1 PLOT(S) OF EMISSIONS**

**SEE ATTACHMENT D**

## 9.1 TEST EQUIPMENT

Type	Model	Cal. Due Date	S/N
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	12/05/00	3638A08713
Microwave Spectrum Analyzer	HP 8566B (100Hz-22GHz)	04/17/01	2542A11898
Spectrum Analyzer/Tracking Gen.	HP 8591A (9kHz-1.8GHz)	06/02/01	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/00	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/00	3051A00187
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	2232A19558
Signal Generator*	HP 8640B (500Hz-1GHz)	06/02/01	1851A09816
Signal Generator*	Rohde & Schwarz (0.1-1000MHz)	09/11/00	894215/012
Alltech/Eaton Receiver	NM 37/57A-SL (30-1000MHz)	04/12/01	0792-03271
Alltech/Eaton Receiver	NM 37/57A (30-1000MHz)	03/11/01	0805-03334
Alltech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/00	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/00	2043A00301
Alltech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/01	0194-04082
RG58 Coax Test Cable	No. 167		n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)		3531A00115
Broadband Amplifier (2)	HP 8447D		1145A00470, 1937A03348
Broadband Amplifier	HP 8447F		2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)		2820A00300
Horn Antenna	EMCO Model 3115 (1-18GHz)		9704-5182
Horn Antenna	EMCO Model 3115 (1-18GHz)		9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)		9203-2178
Biconical Antenna (4)	Eaton 94455/Eaton 94455-1/Singer 94455-1/Compliance Design 1295, 1332, 0355		
Log-Spiral Antenna (3)	Ailtech/Eaton 93490-1		0608, 1103, 1104
Roberts Dipoles	Compliance Design (1 set) A100	08/25/00	5118
Alltech Dipoles	DM-105A (1 set)		33448-111
EMCO LISN (2)	3816/2		1077, 1079
EMCO LISN	3725/2		2009
Microwave Preamplifier 40dB Gain	HP 83017A (0.5-26.5GHz)		3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)		
Alltech/Eaton Receiver	NM37/57A-SL		0792-03271
Spectrum Analyzer	HP 8591A		3034A01395
Modulation Analyzer	HP 8901A		2432A03467
NTSC Pattern Generator	Leader 408		0377433
Noise Figure Meter	HP 8970B		3106A02189
Noise Figure Meter	Ailtech 7510		TE31700
Noise Generator	Ailtech 7010		1473
Microwave Survey Meter	Holaday Model 1501 (2.450GHz)		80931
Digital Thermometer	Extech Instruments 421305		426966
Attenuator	HP 8495A (0-70dB) DC-4GHz		
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)		
Shielded Screen Room	RF Lindgren Model 26-2/2-0		6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81		R2437 (PCT278)
Environmental Chamber	Associated Systems Model 1025 (Temperature/Humidity)		PCT285

\* Calibration traceable to the National Institute of Standards and Technology (NIST).

## 10.1 SAMPLE CALCULATIONS

---

### A. ERP Calculation

$$\text{Level } \mu/\text{Vm} @ 3 \text{ meters} = \frac{\log_{10}^{-1} (\text{dBm} + 107 + \text{AFCL})}{20}$$

$$\frac{\log_{10}^{-1} (-14 + 107 + 31.7)}{20}$$

1717908.4  $\mu/\text{Vm}$  @ 3 meters

Sample Calculation (relative to a dipole)

$$\text{ERP (dBm)} = 10 \log_{10} ((r(\mu\text{V}/\text{m})1 \times 10^6)^2 / 49.2 / 1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} ((3(1717908.4)1 \times 10^6)^2 / 49.2 / 1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 28.95$$

### B. Emission Designator per §2.201

CDMA Sample

2M + 2DK

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Emission Designator = 1M25F9W

## 11.1 CONCLUSION

---

The data collected shows that the **GTRAN Dual-Mode Cellular Phone FCC ID: O5TGCP-2000** complies with all the requirements of Parts 2 and 22 of the FCC rules.


## **ATTACHMENT D – TEST PLOTS**

---


## **ATTACHMENT D – TEST PLOTS**

---


\* Agilent 08:38:52 Jul 26, 2000

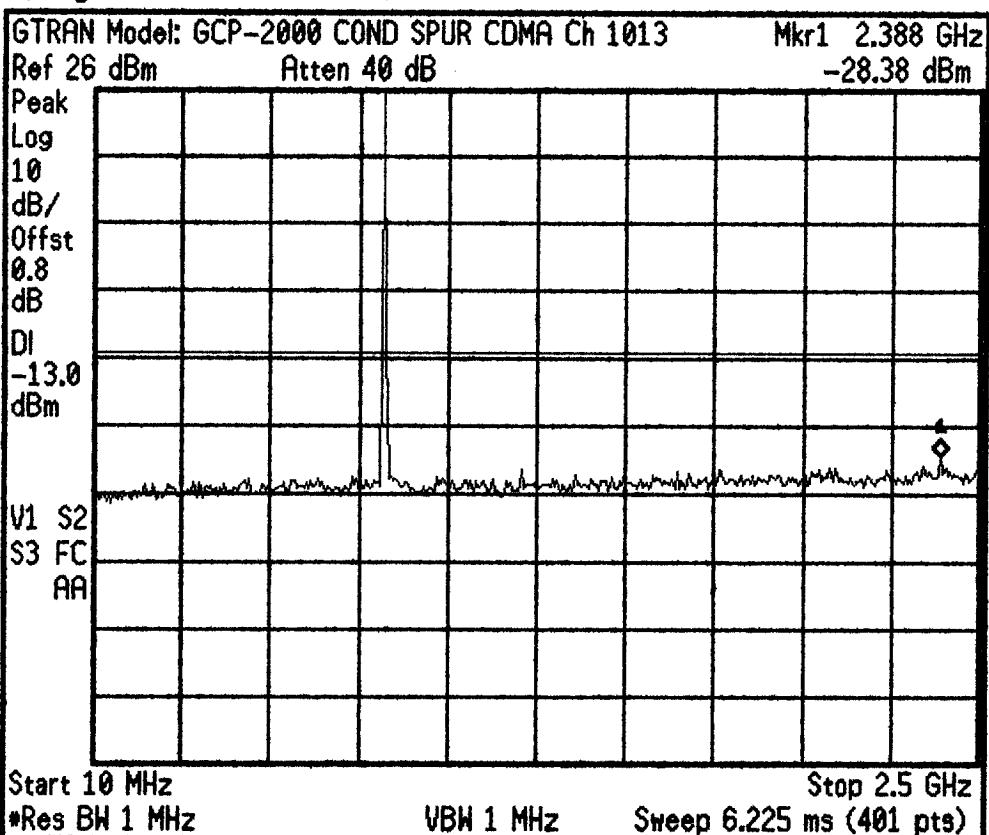

\* Agilent 08:40:09 Jul 26, 2000

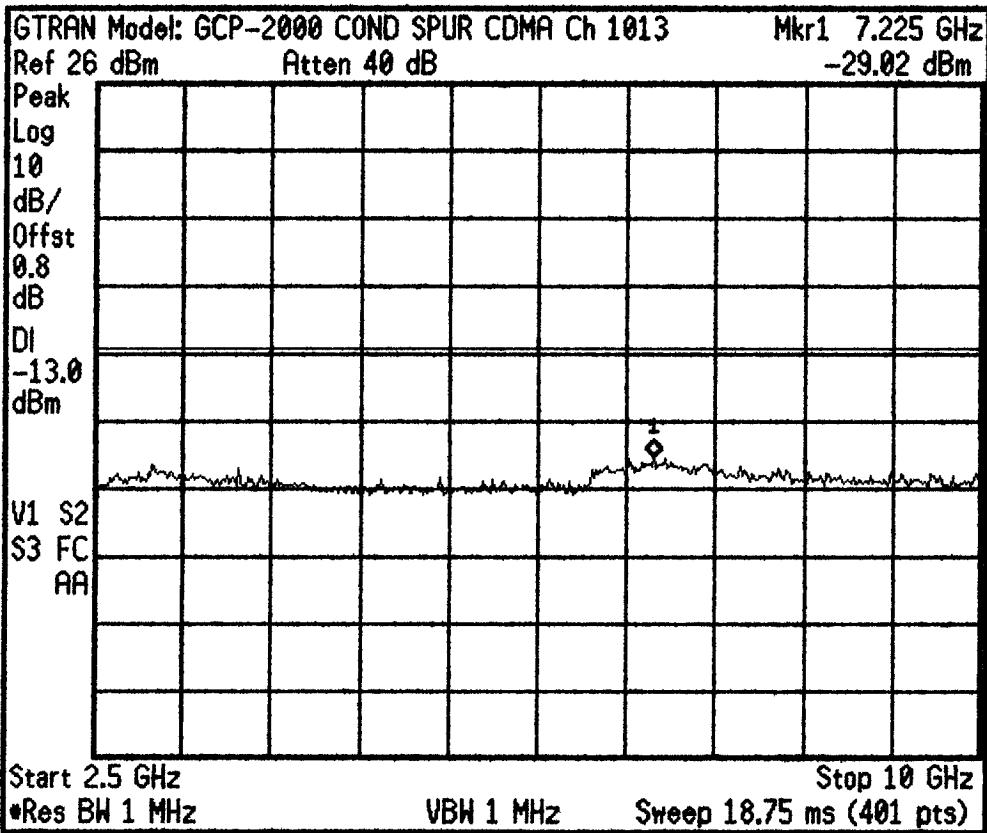

\* Agilent 08:35:57 Jul 26, 2000

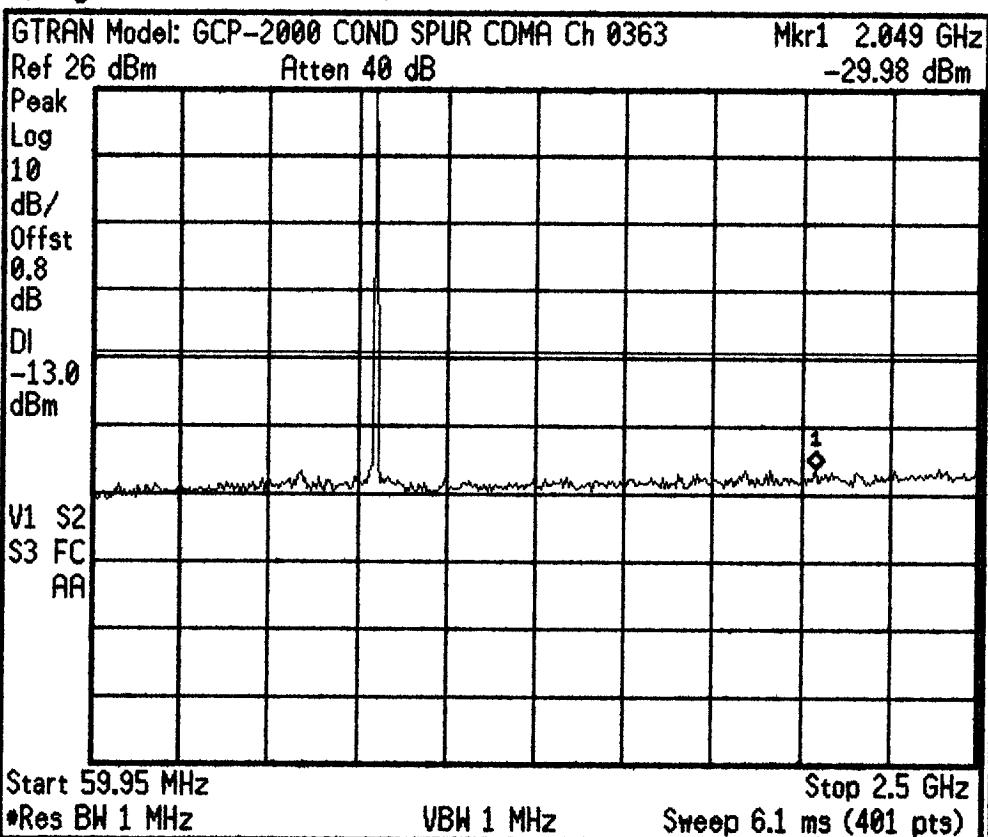

Freq/Channel

Center Freq 1.27997500 GHz

Start Freq 59.95000000 MHz


Stop Freq 2.500000000 GHz

CF Step 244.005000 MHz Auto Man

Freq Offset 0.0000000 Hz

Signal Track On Off

\* Agilent 08:36:50 Jul 26, 2000

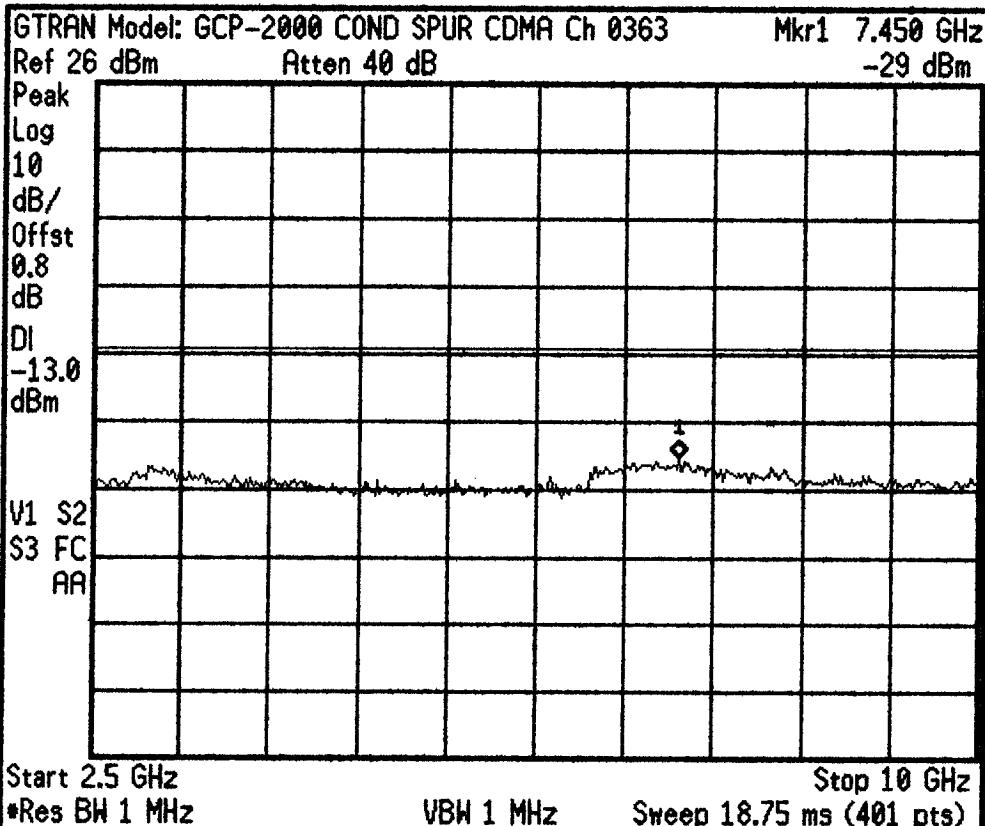

Freq/Channel

Center Freq 6.250000000 GHz

Start Freq 2.500000000 GHz


Stop Freq 10.00000000 GHz

CF Step 750.000000 MHz Auto Man


Freq Offset 0.0000000 Hz

Signal Track On Off

\* Agilent 08:31:36 Jul 26, 2000

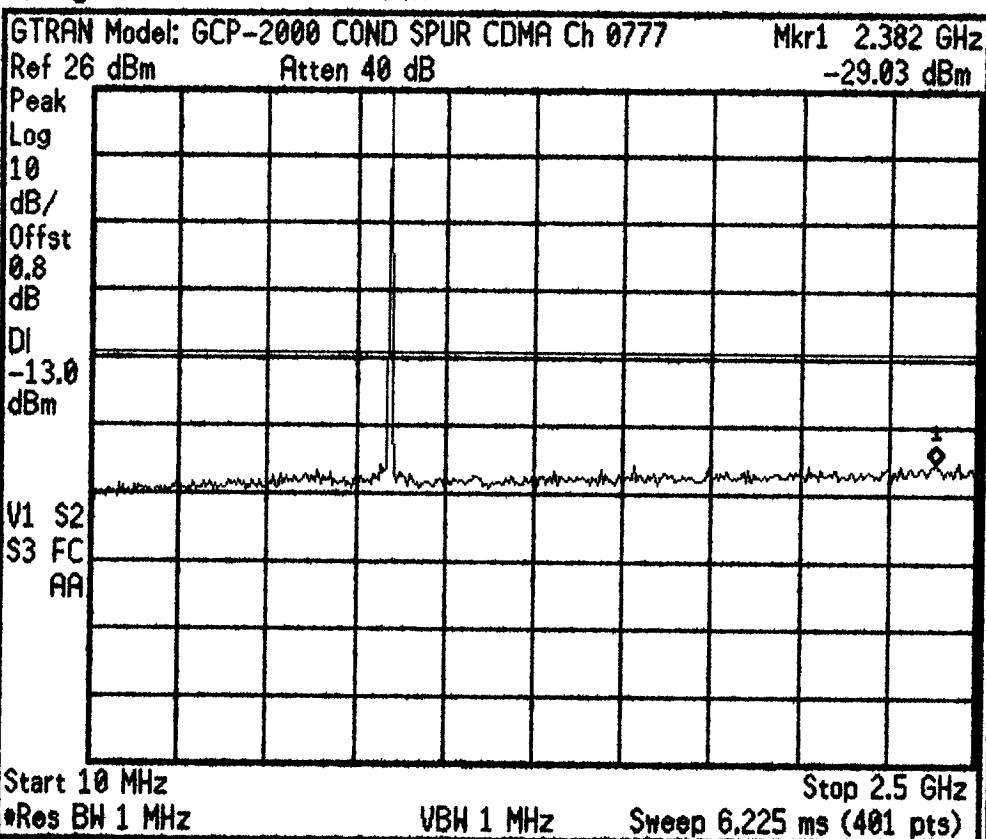

\* Agilent 08:32:33 Jul 26, 2000

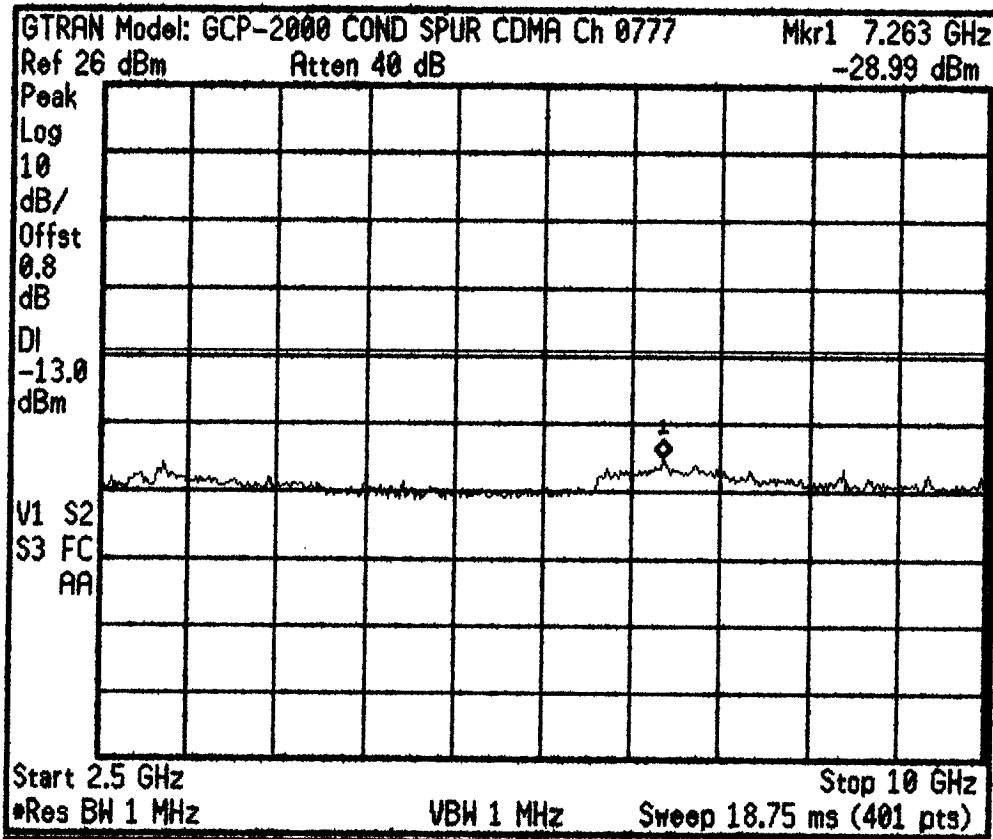

\* Agilent 09:09:56 Jul 26, 2000

GTRAN Model: GCP-2000 POWER OUT CDMA Ch 1013

Ref 26 dBm

Atten 40 dB

Peak  
Log  
10  
dB/  
Offst  
0.8  
dB

V1 S2  
S3 FC  
AA

Center 824.7 MHz  
•Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 5 ms (401 pts)

Freq/Channel

Center Freq  
824.700000 MHz

Start Freq  
819.700000 MHz

Stop Freq  
829.700000 MHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

\* Agilent 09:12:00 Jul 26, 2000

GTRAN Model: GCP-2000 POWER OUT CDMA Ch 0777

Ref 26 dBm

Atten 40 dB

Peak  
Log  
10  
dB/  
Offst  
0.8  
dB

V1 S2  
S3 FC  
AA

Center 848.3 MHz  
•Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 5 ms (401 pts)

Freq/Channel

Center Freq  
848.300000 MHz

Start Freq  
843.300000 MHz

Stop Freq  
853.300000 MHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


\* Agilent 08:59:35 Jul 26, 2000

GTRAN Model: GCP-2000 POWER OUT CDMA Ch 0363

Ref 26 dBm

Atten 40 dB

Peak  
Log  
10  
dB/  
Offst  
0.8  
dB

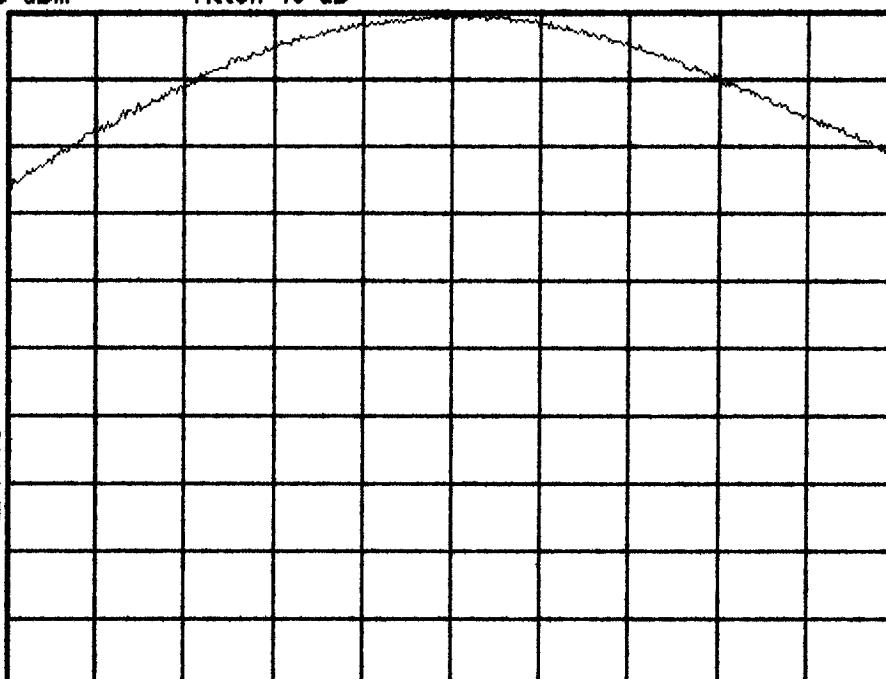

Center 835.9 MHz  
\*Res BW 3 MHz

VBW 3 MHz

Span 10 MHz  
Sweep 5 ms (401 pts)

Freq/Channel

Center Freq  
835.900000 MHz

Start Freq  
830.900000 MHz

Stop Freq  
840.900000 MHz

CF Step  
1.00000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off


\* Agilent 09:06:18 Jul 26, 2000

GTRAN Model: GCP-2000 POWER OUT CDMA Ch 0363

Ref 26 dBm

Atten 40 dB

Samp  
Log  
10  
dB/  
Offst  
0.8  
dB

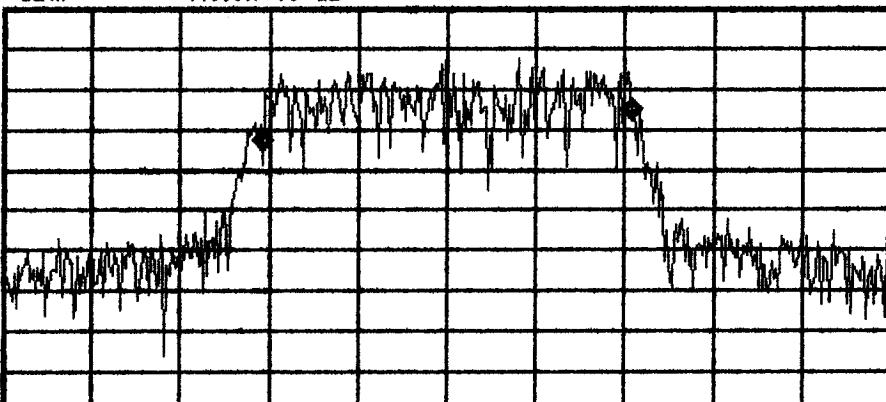

Center 835.9 MHz  
\*Res BW 30 kHz

\*VBW 300 kHz

Span 3 MHz  
Sweep 9.167 ms (401 pts)

Occupied Bandwidth Results (idle)

Occupied Bandwidth  
1.250 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error -139.6 Hz

Freq/Channel

Center Freq  
835.900000 MHz

Start Freq  
834.400000 MHz

Stop Freq  
837.400000 MHz

CF Step  
300.0000000 kHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode:Unmodulated Signal

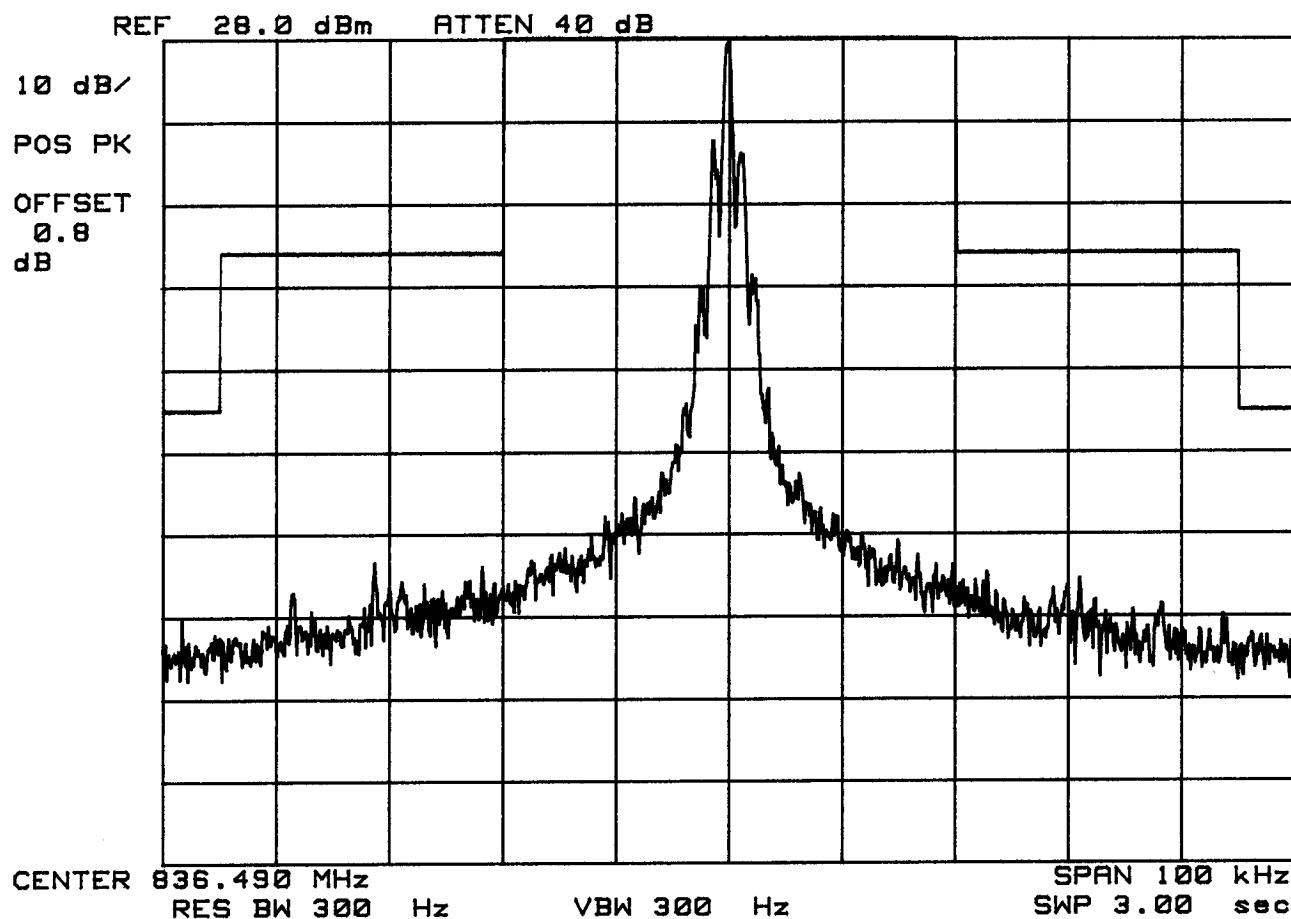

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode: SAT

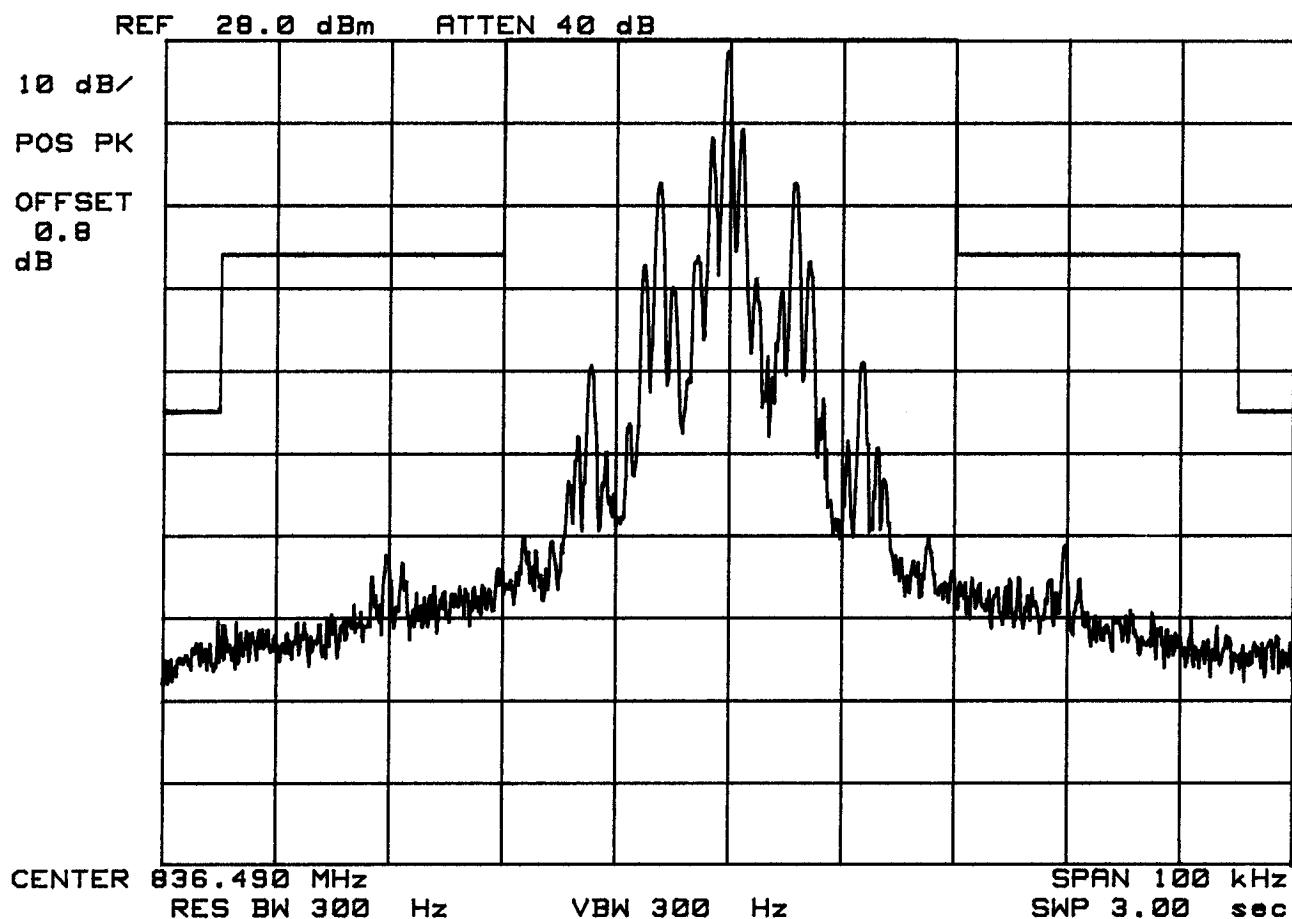

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode:ST

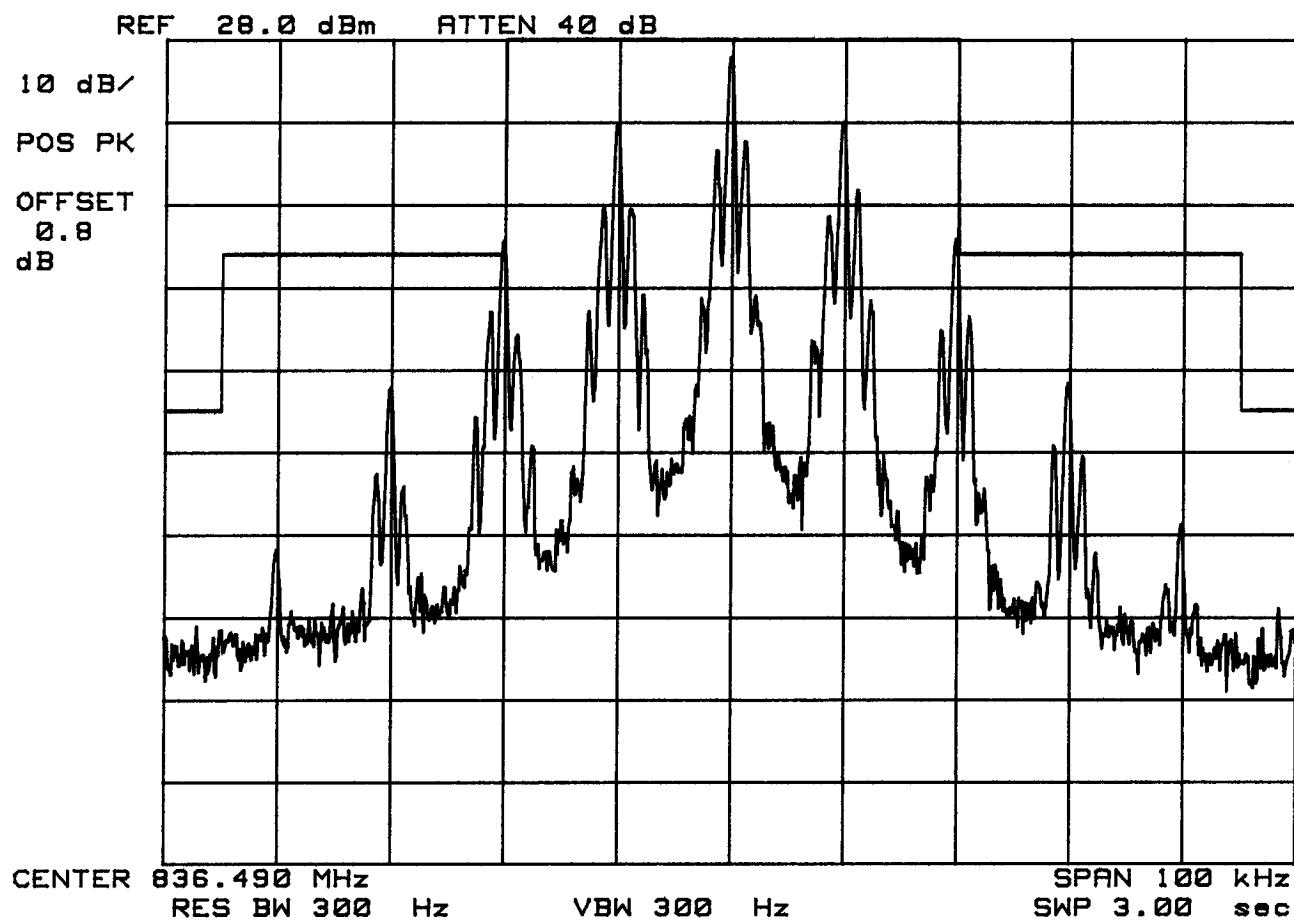

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode:Wide Band Data

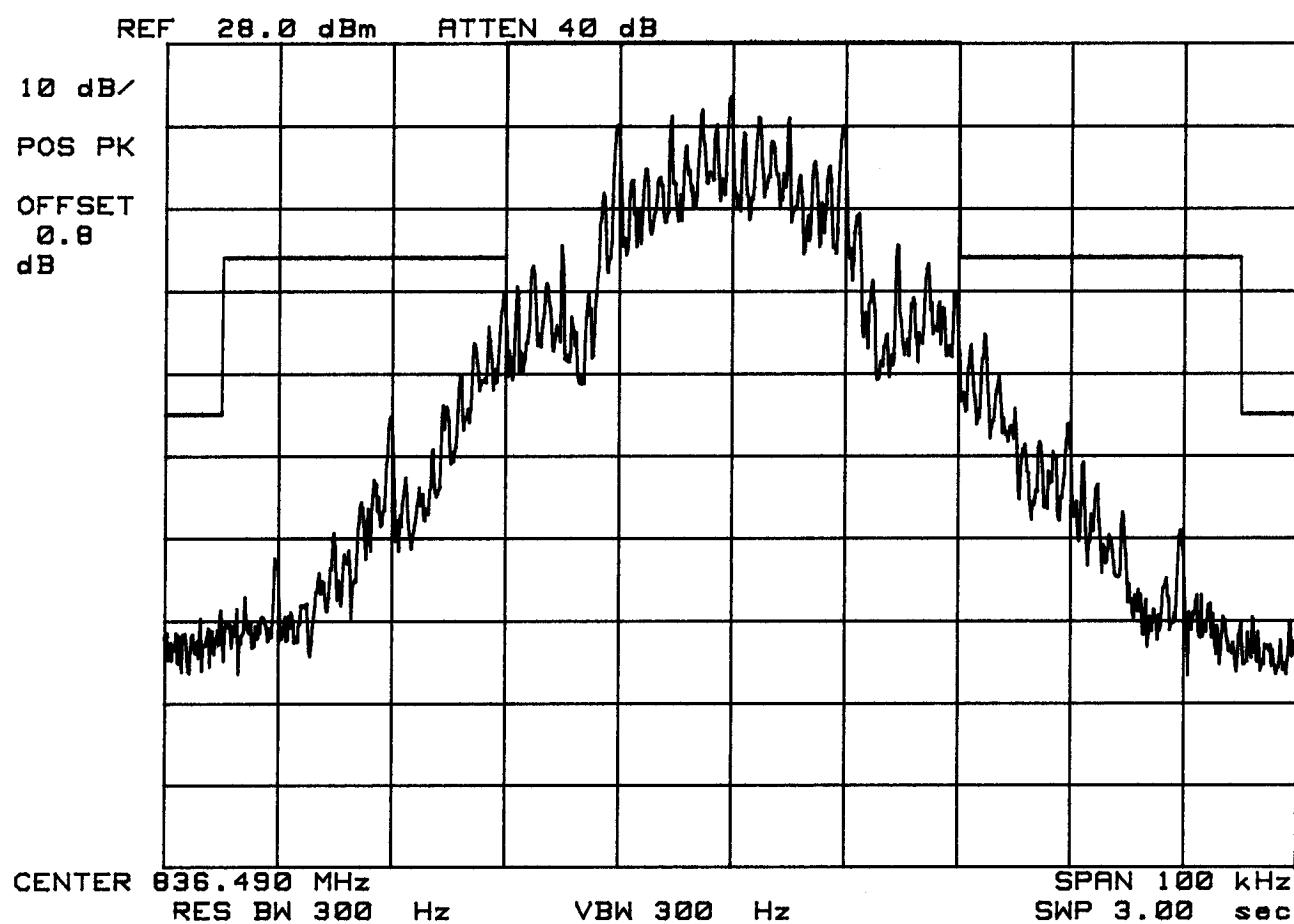

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode:Voice

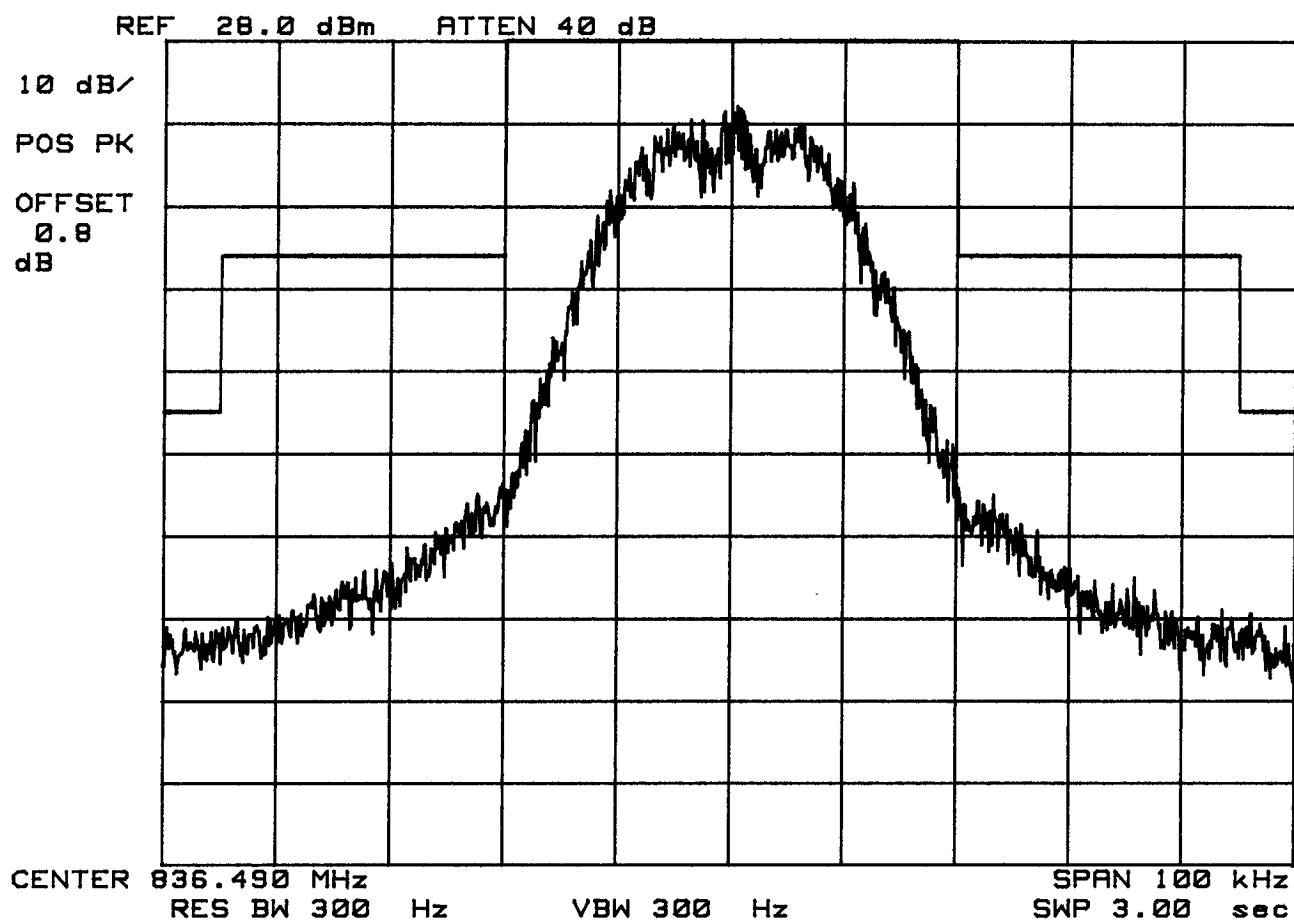

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383

Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode: SAT + Voice

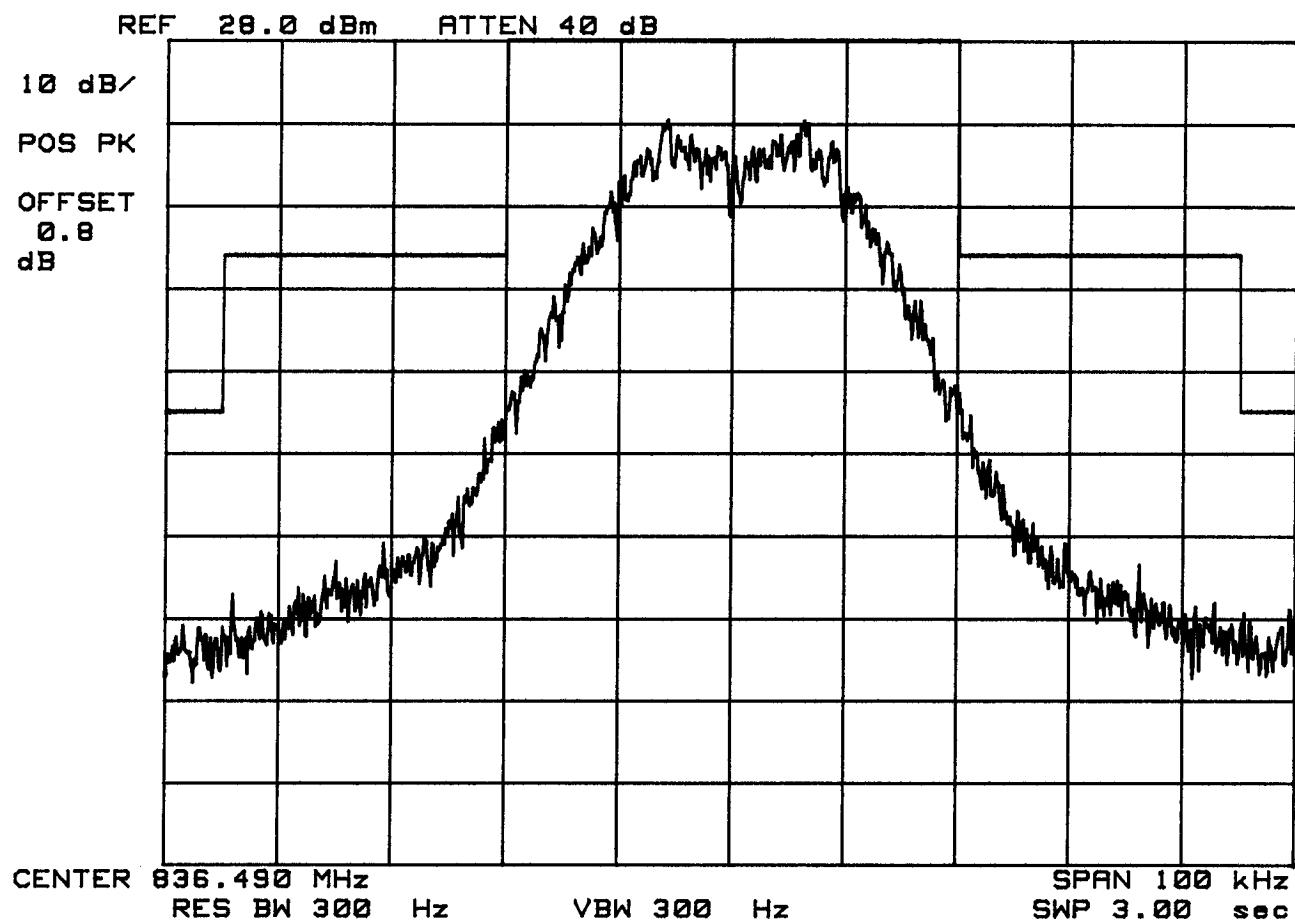

# PCTEST Engineering Lab.

## SPECTRUM ANALYZER PRESENTATION

FCC ID:MODEL: GCP-2000

GTRAN KOREA Inc.


FM MODE

Channel 383


Operating Frequency: 836.490 MHz

Output Power : 28.0 dBm

Test Mode: SAT + ST

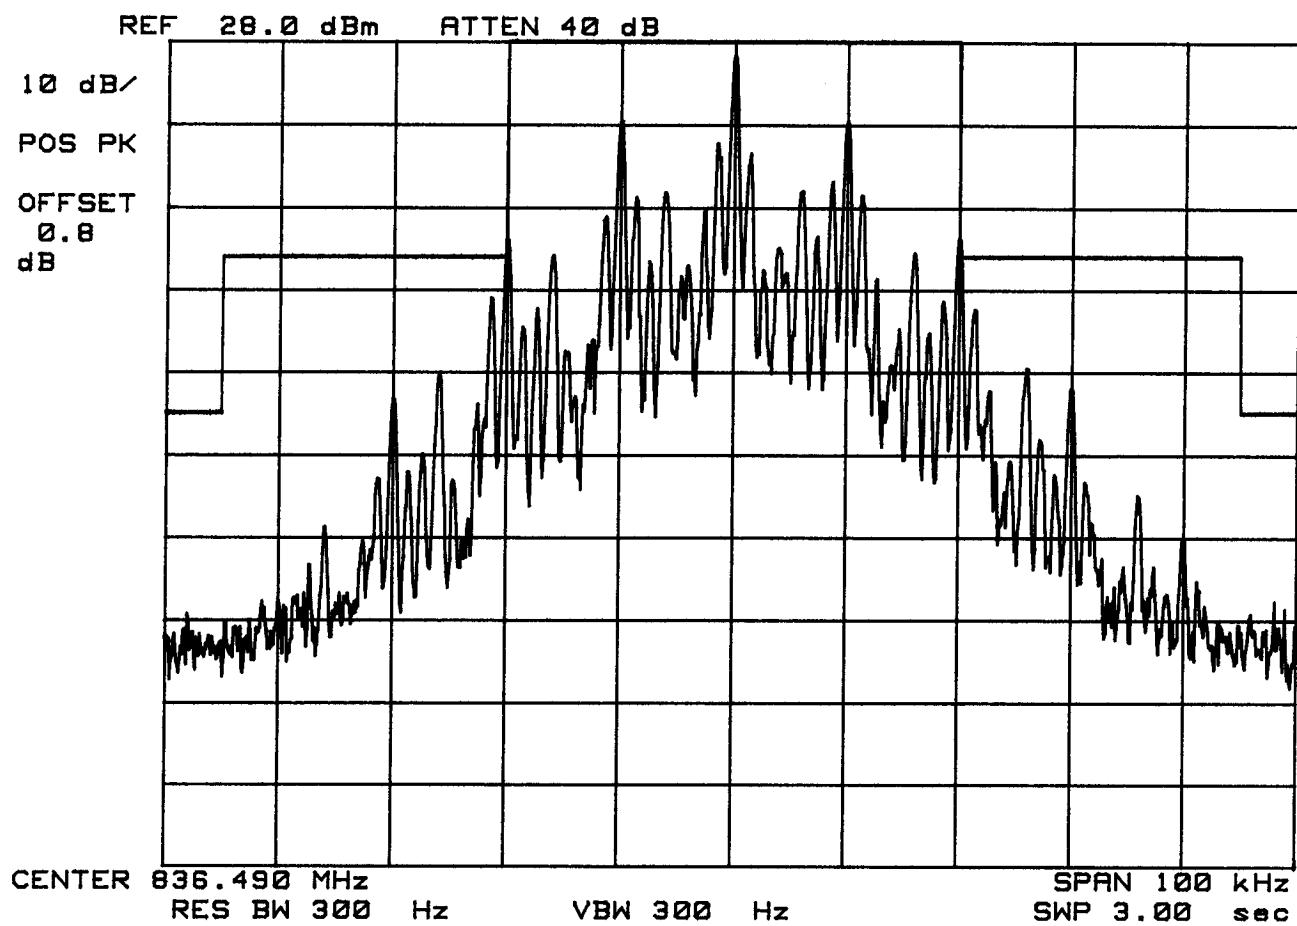

\* Agilent 08:15:23 Jul 26, 2000

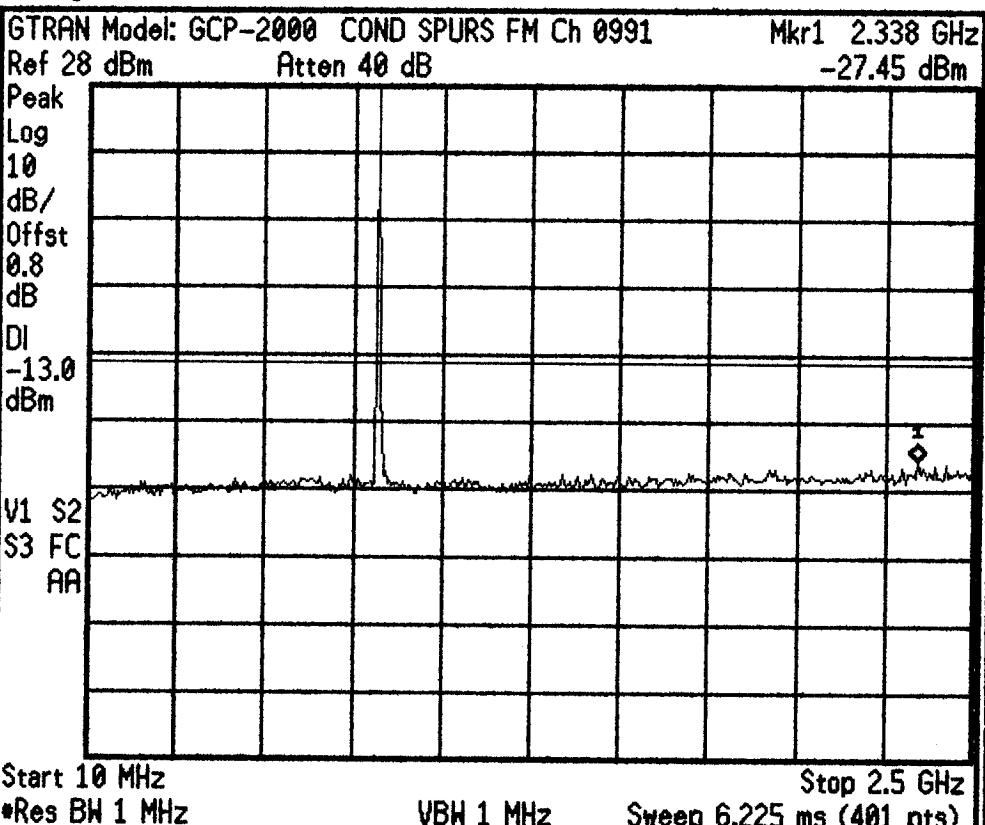

Freq/Channel

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz


Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.0000000 Hz

Signal Track  
On Off

\* Agilent 08:16:29 Jul 26, 2000

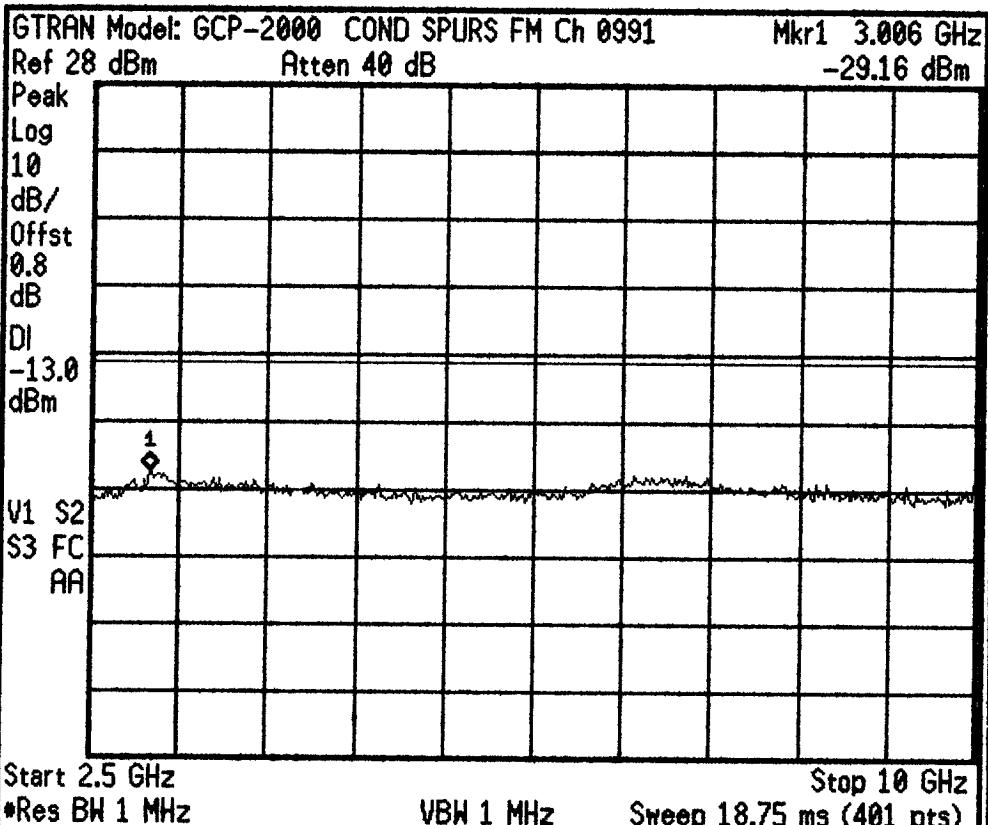

Freq/Channel

Center Freq  
6.25000000 GHz

Start Freq  
2.50000000 GHz


Stop Freq  
10.0000000 GHz

CF Step  
750.000000 MHz  
Auto Man


Freq Offset  
0.0000000 Hz

Signal Track  
On Off


\* Agilent 08:19:31 Jul 26, 2000

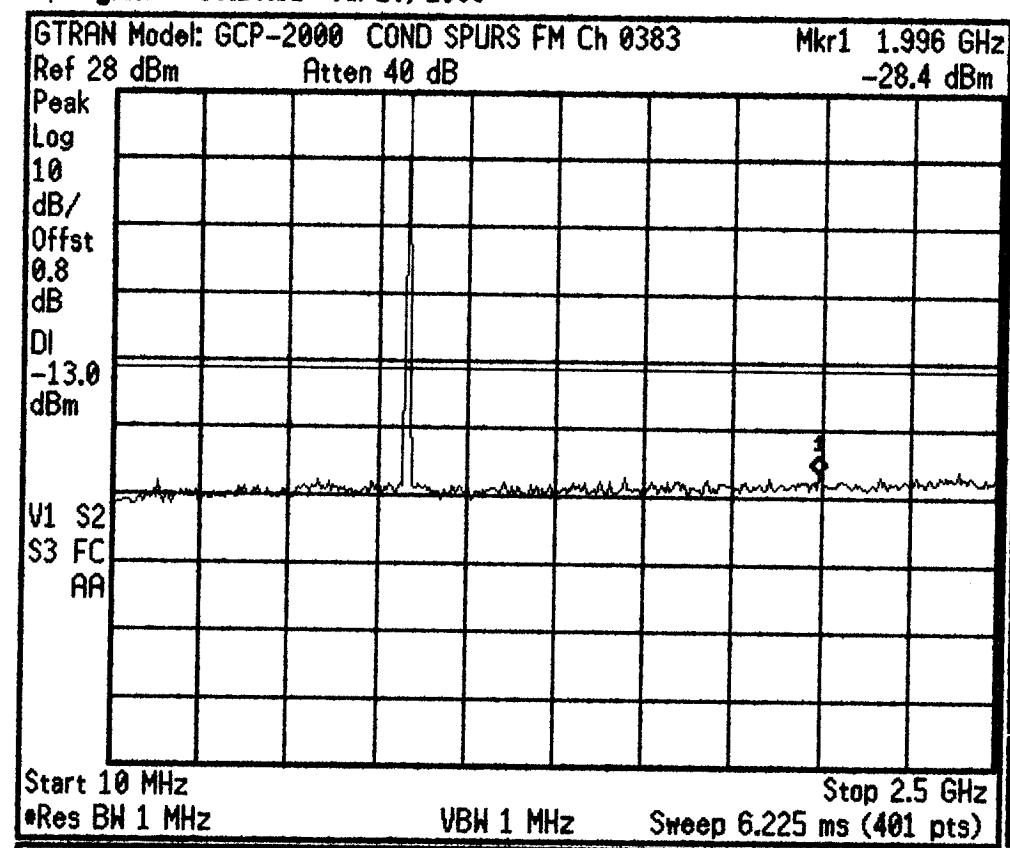


\* Agilent 08:20:44 Jul 26, 2000

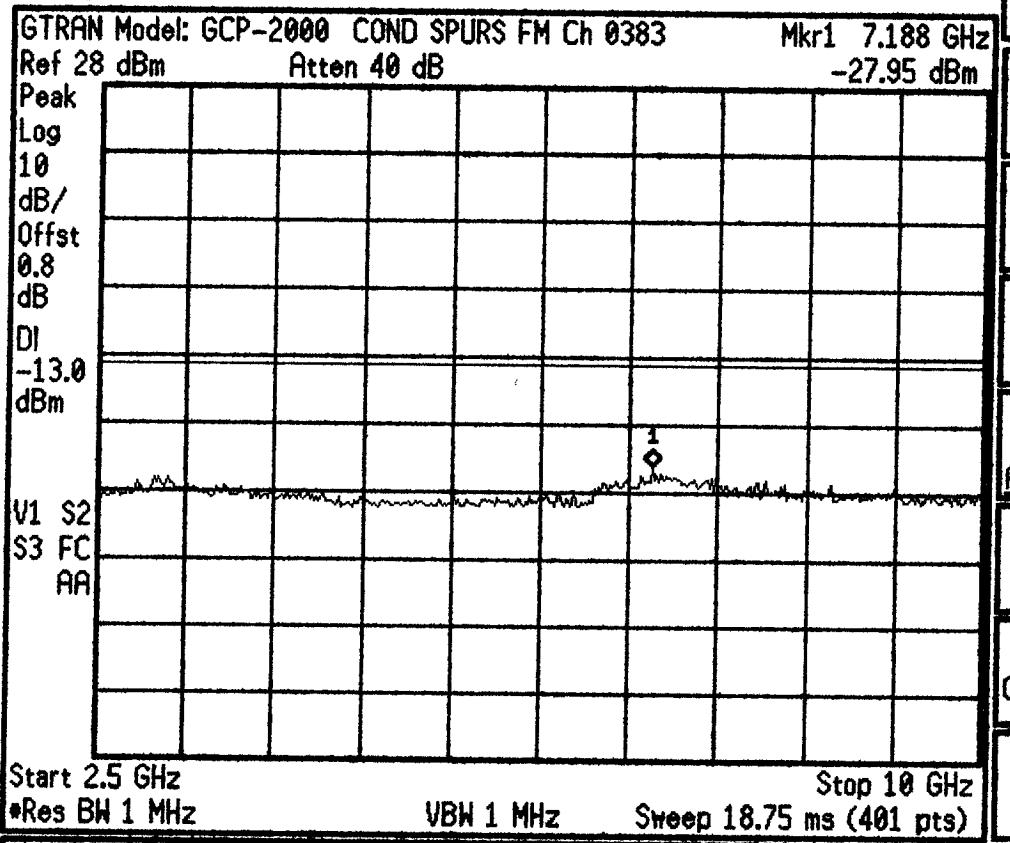

\* Agilent 08:11:13 Jul 26, 2000

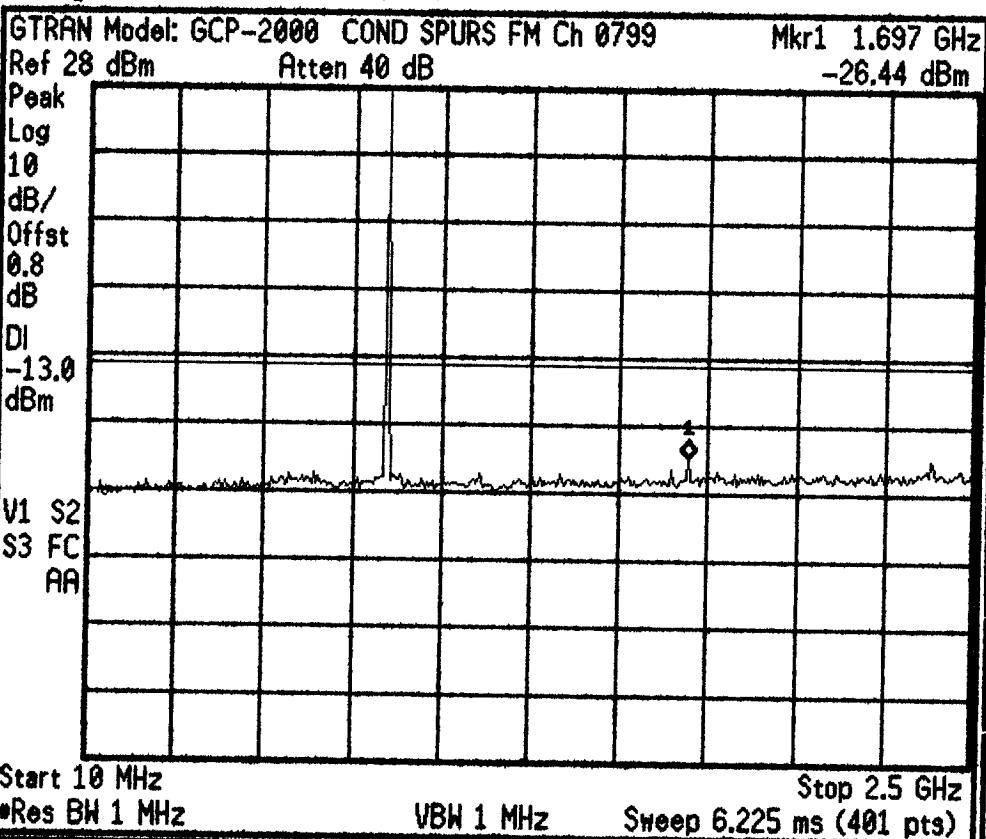


\* Agilent 08:12:20 Jul 26, 2000

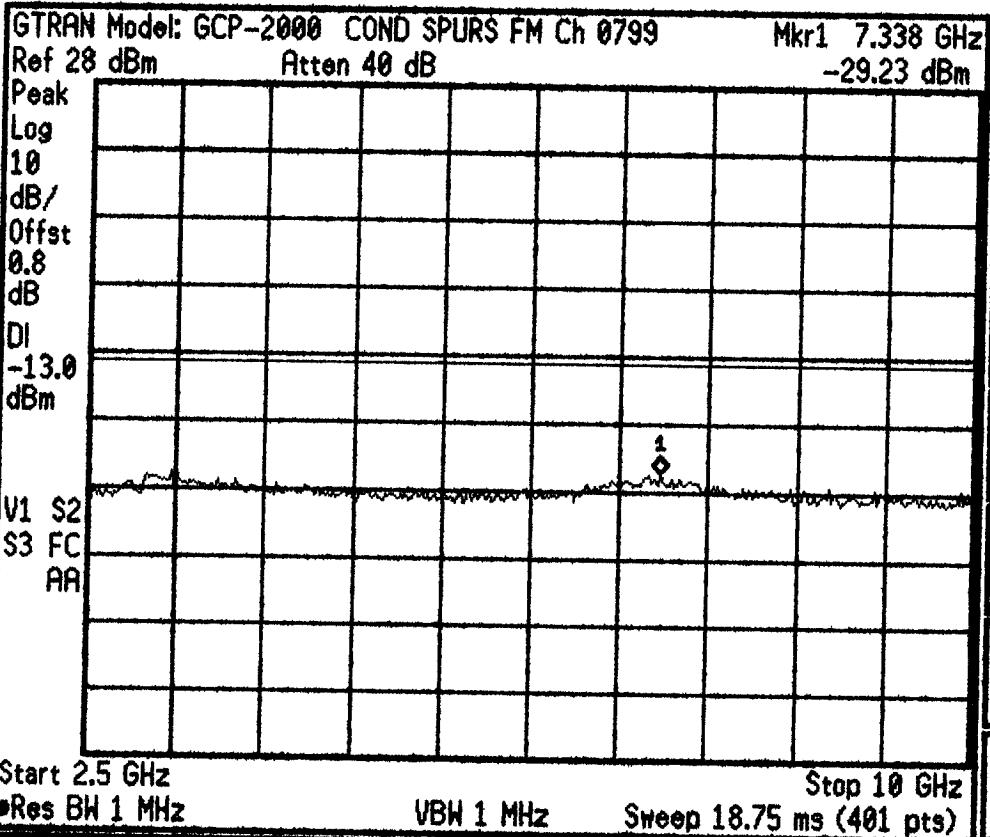

# FCC Part 22 Certification Check List

## 19. Low-pass Filter Frequency Audio Response


Frequency	Data
300Hz	-11.9dB
800Hz	-3.75dB
1300Hz	+3.9dB
1800Hz	+5.2dB
2300Hz	+6.7dB
2800Hz	+6.9dB
3000Hz	+6.0dB

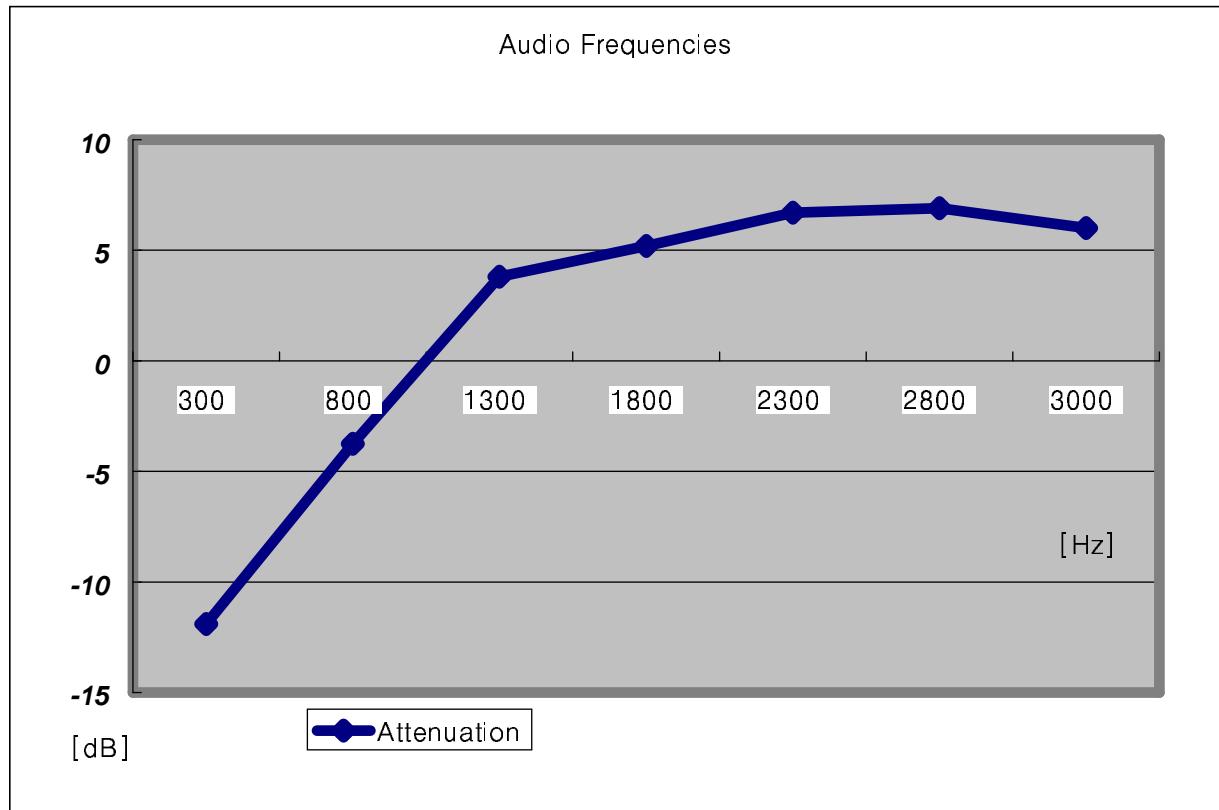

# FCC Part 22 Certification Check List

## 20. Audio Roll-off Filter Response

Frequency	Data
3500Hz	-3.5dB
4000Hz	-11.8dB
4500Hz	-11.3dB
5000Hz	-11.6dB
5500Hz	-11.2dB
5900Hz	-11.5dB
6000Hz	-11.6dB
6100Hz	-11.79dB
7000Hz	-11.78dB
8000Hz	-11.79dB
9000Hz	-11.78dB
10000Hz	-11.79dB
11000Hz	-11.79dB
12000Hz	-11.79dB
13000Hz	-11.79dB
14000Hz	-11.79dB
15000Hz	-11.79dB
20000Hz	-11.78dB
25000Hz	-11.8dB
30000Hz	-11.7dB

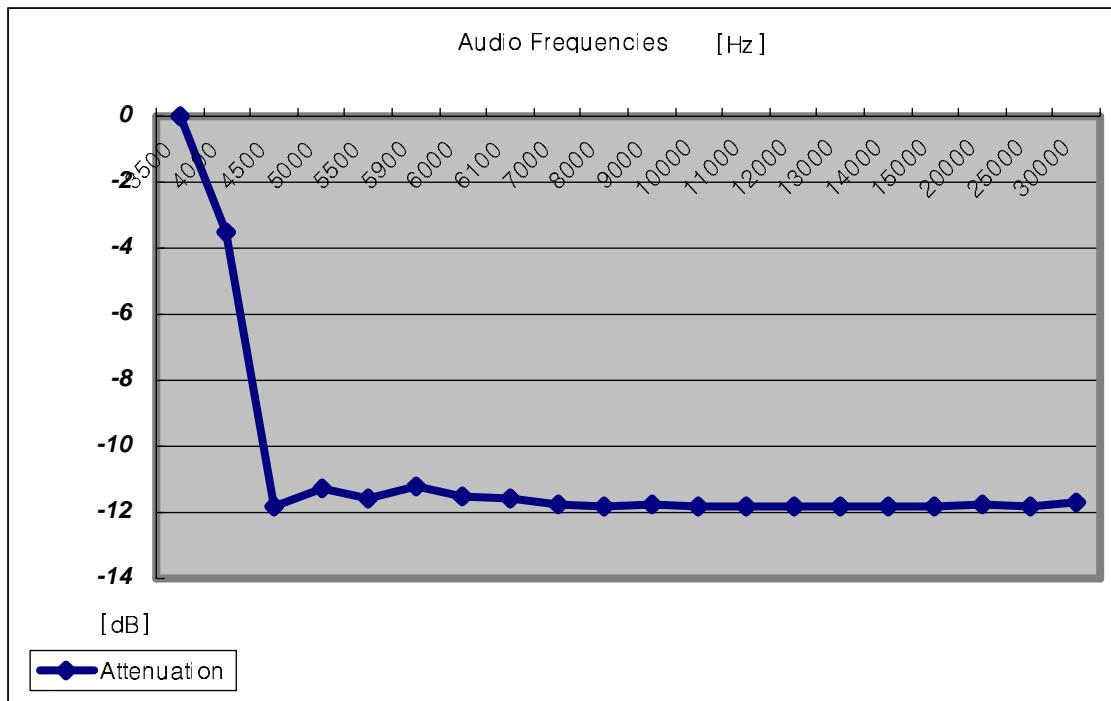

**PCTEST Engineering Lab., Inc.**

**SUBJECT:** Modulation Characteristics  
FCC Part 22

Test Report No.: 22.200724341.05T  
Test Date: 07.26.2000

**EUT:** GTRAN Dual-Mode Cellular Phone (AMPS/CDMA)  
**Model:** GCP-2000  
**FCC ID:** O5TGCP-2000

**REFERENCE:** 1 kHz = 0 dB

