

**TEST REPORT
MARINE RADAR
RA41C**

Foreword

The following information is being submitted in compliance with paragraphs 2.983, 2.985, 2.987, 2.989, 2.991, 2.993 and 2.995 as provided by part 83 of the FCC Rules and Regulations for Type Acceptance of the Koden Marine Radar, Type RA41C.

All testing was performed by the Koden Electronics Co., Ltd.

Uenohara Factory, 5278, Uenohara, Uenohara-Machi, Kitatsuru-Gun, Yamanashi, 409-0112, Japan.

**ENGINEERING TEST REPORT
ON RA41C KODEN MARINE RADAR**

APPLICANT: KODEN ELECTRONICS CO., LTD

EQUIPMENT: MARINE RADAR

TEST SITE: UENOHARA-FACTORY OF KODEN ELECTRONICS CO., LTD

TEST DATE: June 16 2000

To: Whom it concern

Good engineering practice were followed while performing test for FCC type acceptance application, and the result are accurate.

Respectfully,

Report Prepared by:

.....
H. Iida.....

H. Iida

Engineer of Design Section

Approved by:

.....
Y. Minegishi.....

Y. Minegishi

Manager

Design Section

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedure were observed during the testing:

ROOM TEMPERATURE = 25 ± 5 °
ROOM HUMIDITY = 20-50%

Prior to testing, the E.U.T. was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

MEASUREMENT DATA, unless otherwise noted, are WORST CASE measurements.

Table of contents

Data for the acceptance of the Koden Marine Radar Type RA41C

List of Exhibit

Exhibit Number

- 1 RF Power Output (2.985)
- 2 Modulation Characteristics (2.987)
- 3 Occupied Bandwidth (2.989)
- 4 Spurious Emissions at Antenna Terminal (2.991)
- 5 Spurious Emissions Field Strength (2.993)
- 6 Frequency Stability (2.995)

Exhibit 1

RF POWER OUTPUT (2.985)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz \pm 30 MHz
Frequency Source: Fixed Cavity Resonator
Pulse Rate: 600 Hz to 2000 Hz, Selectable as a function of Range
Pulse Width: 0.11 us to 0.8 us, Selectable as a function of Range

TEST EQUIPMENT

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>
1. X-Band Directional Coupler	Hewlett-Packard	X752D
2. Variable Attenuator	Hewlett-Packard	X382A
3. Power Meter	ANRITSU	ML83A
4. Crystal Detector	Hewlett-Packard	423B
5. Oscilloscope	TEKTRONIX	2445
6. Frequency meter	Hewlett-Packard	X532B
7. X-Band Dummy Load	NIHON KOSHUHA	WDL095

TEST PROCEDURE

The Marine Radar is capable of generating the following pulses:

110ns \times 2000Hz, 250ns \times 1500Hz, 0.8 \times 600Hz

The Power output for each of these combinations was measured by using the following procedure:

- (1) Set up the equipment as shown in Fig.1.
- (2) Record reading of Power Meter.
- (3) Calculate mean power according to attenuation.
- (4) Measure and record pulse width and P.R.F. by using oscilloscope and frequency counter.
- (5) Calculate peak power as follows:

$$P_0 = P_m / (F_r \times T)$$

P_0 : Peak Power, P_m : Mean Power, F_r : P.R.F.*

T : Pulse Width, * P.R.F. : Pulse Repetition Frequency

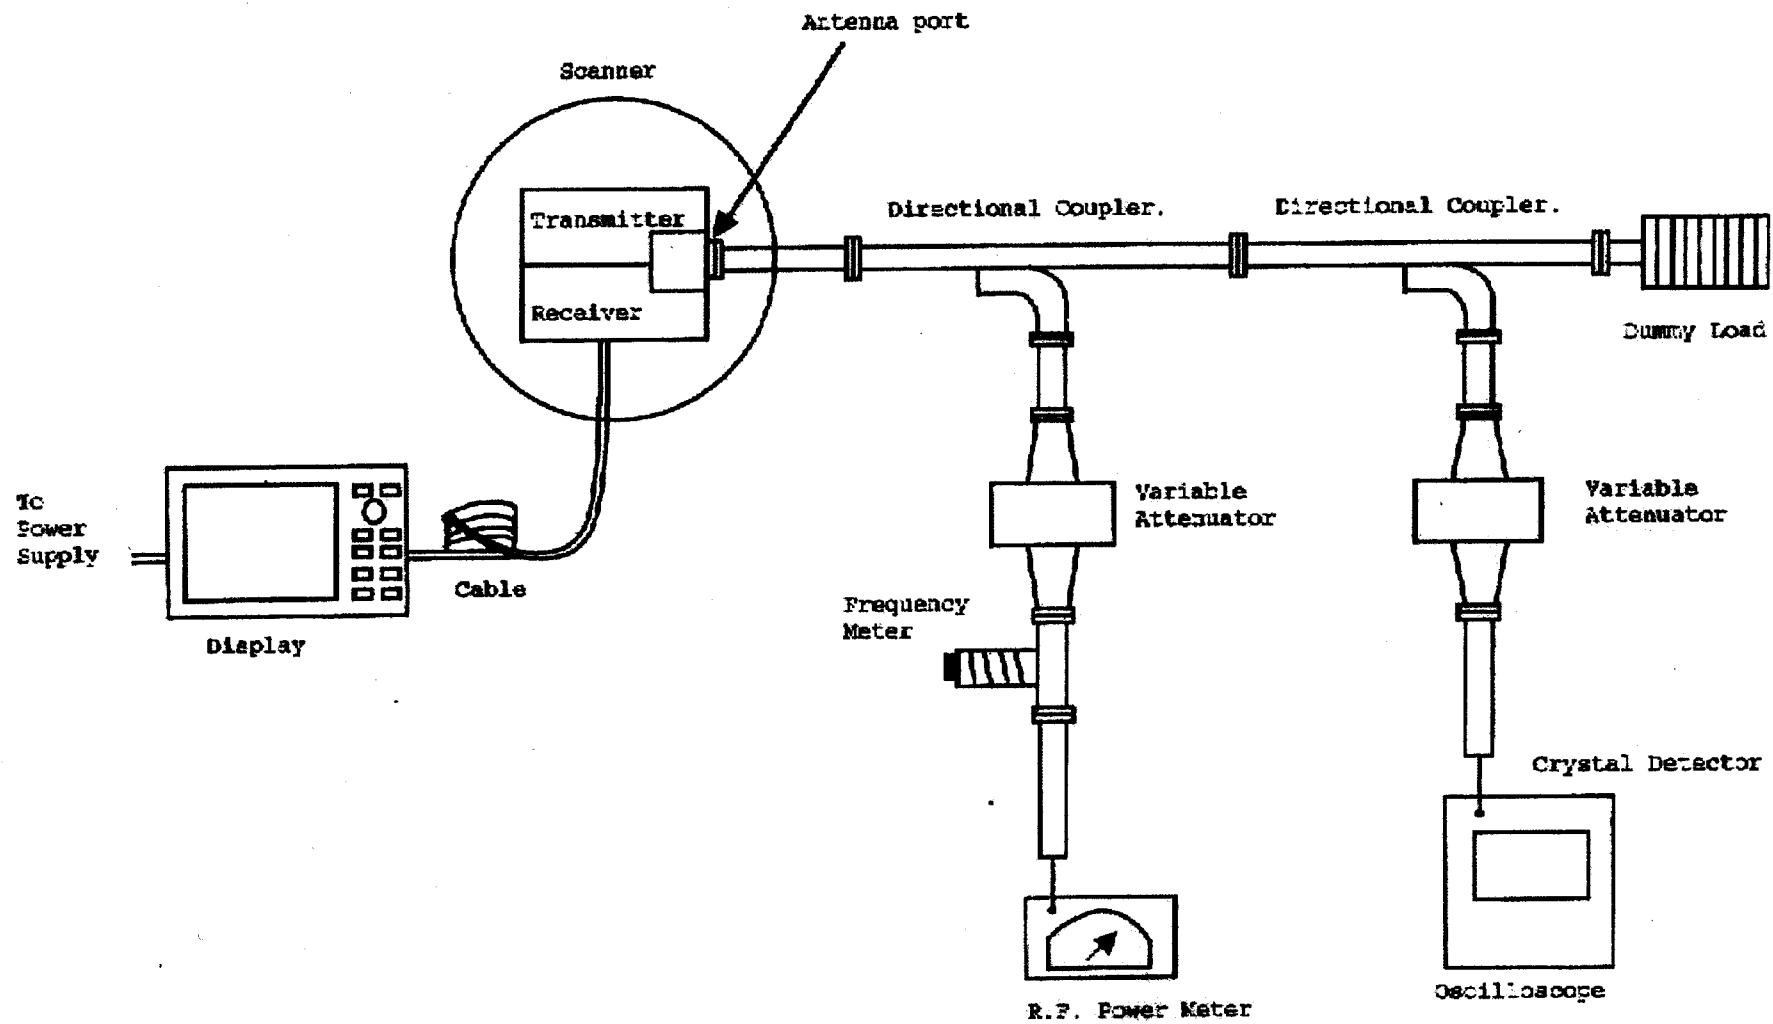


Figure 1. RF POWER OUTPUT & MODULATION CHARACTERISTICS (2.987)

Exhibit 1

TEST RESULT

<u>Transmit Pulse width and P.R.F.</u>	<u>Measured Mean Power</u>	<u>Measured Pulse width</u>	<u>Measured P.R.F.</u>	<u>Calculated Peak power Output</u>
110nsx2000Hz	0.97W	124.0ns	2008Hz	3.90kW
250nsx1500Hz	1.53W	243.7ns	1473Hz	4.26kW
800nsx600Hz	2.02W	773.0ns	583Hz	4.48kW

Exhibit 2

MODULATION CHARACTERISTICS (2.987)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz \pm 30MHz
Frequency Source: Fixed Cavity Resonator
Pulse Rate: 600 to 2000 Hz, Selectable as a function of Range
Pulse Width: 0.11 us to 0.8 us, Selectable as a function of Range

TEST EQUIPMENT

	<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>
1.	X-Band Directional Coupler	Hewlett-Packard	X752D
2.	Variable Attenuator	Hewlett-Packard	X382A
3.	Power Meter	ANRITSU	ML83A
4.	Crystal Detector	Hewlett-Packard	423B
5.	Oscilloscope	TEKTRONIX	2445
6.	Frequency meter	Hewlett-Packard	X532B
7.	X-Band Dummy Load	NIHON KOSHUHA	WDL095

TEST PROCEDURES

The Marine Radar is capable of generating the following pulses:
0.11 us x 2000 Hz, 0.25 us x 1500 Hz, 0.8 us x 600 Hz

The Modulation characteristics for each of these combinations was measured by using the following procedure:

- (1) Set up the equipment as shown in Fig.1.
- (2) Obtain a convenient display on the oscilloscope and adjust peak to the suitable cursor line.
- (3) Decrease variable attenuator 3 dB, and measure the pulse width at the cursor line.
- (4) Photograph the oscilloscope display.
- (5) Note and record the Frequency Readout of the counter as "Pulse Repetition Frequency".


TEST RESULT

Modulation Characteristics
(Detected Pulse)

(1) Short Pulse

Pulse width (-3 dB) = 124 ns

Pulse repetition Frequency = 2008 Hz

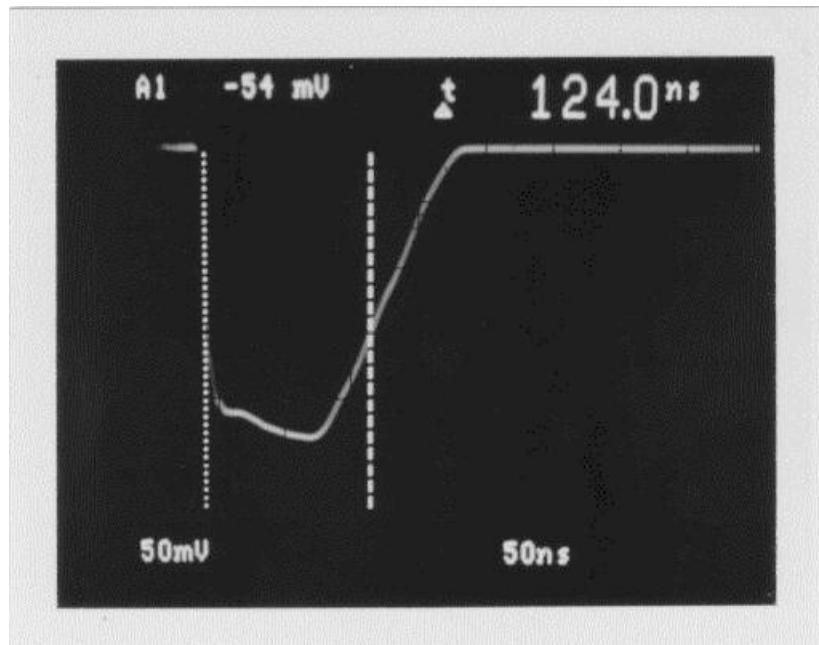

50 ns/div.


TEST RESULT

Modulation Characteristics
(Detected Pulse)

(2) Middle Pulse

Pulse width (-3 dB) = 244 ns

Pulse repetition Frequency = 1473 Hz

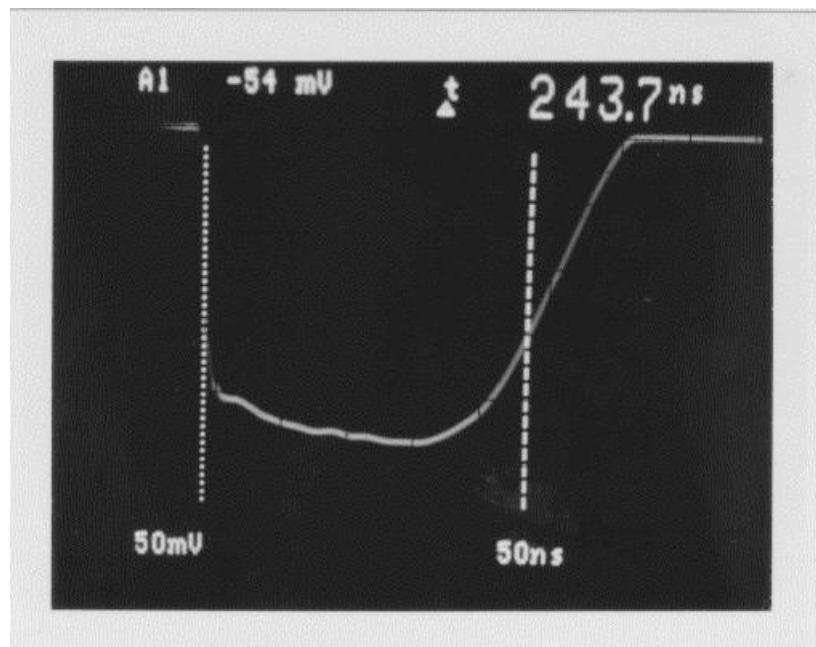

50 ns/div.


TEST RESULT

Modulation Characteristics
(Detected Pulse)

(3) Long Pulse

Pulse width (-3 dB) = 773 ns

Pulse repetition Frequency = 583 Hz

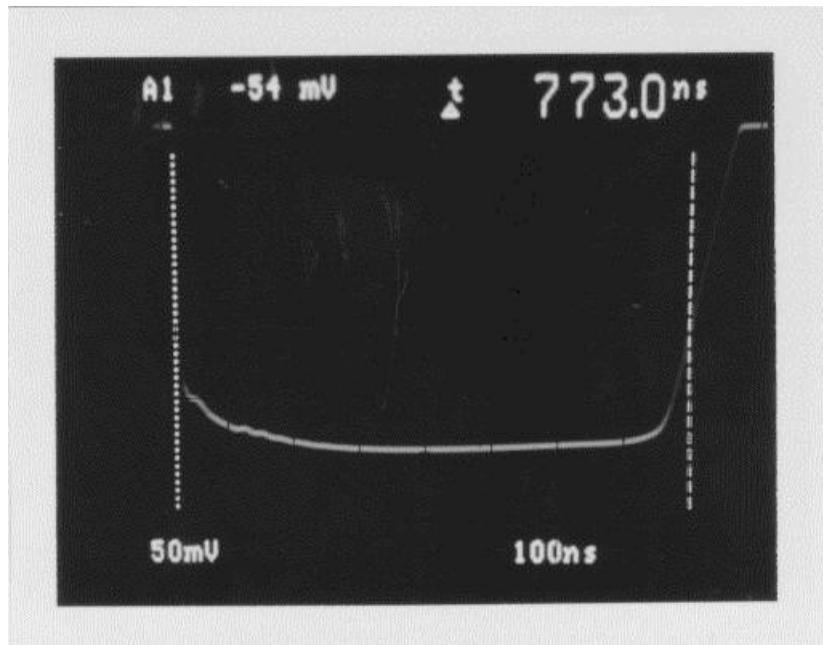

100 ns/div.

Exhibit 3

OCCUPIED BANDWIDTH (2.989)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz \pm 30 MHz
Frequency Source: Fixed Cavity Resonator
Pulse Rate: 600 to 2000 Hz, Selectable as a function of Range
Pulse Width: 0.11 us to 0.8 us, Selectable as a function of Range

TEST EQUIPMENT

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>
1. X-Band Directional Coupler	Hewlett-Packard	X752D
2. Variable Attenuator	Hewlett-Packard	X382A
3. X-Band Dummy Load	NIHON KOSHUHA	WDL095
4. Spectrum Analyzer	Anritsu	MS710C

TEST PROCEDURE

The Marine Radar is capable of generating the following pulses:

110 ns \times 2000 Hz, 250 ns \times 1500 Hz, 800 ns \times 600 Hz

The occupied bandwidth for each of these combinations was measured by using the following procedure:

- (1) Connect the equipment as shown in Fig.3.
- (2) Adjust center frequency, span reference level of spectrum analyzer and attenuator if necessary, such that the display nearly fills the screen.
- (3) Measure and record spectrum and bandwidth

The bandwidth is calculated so that the total powers lower than the lowest frequency in the bandwidth and higher than the highest frequency in the bandwidth occupy 0.5% of the transmitted total power respectively.


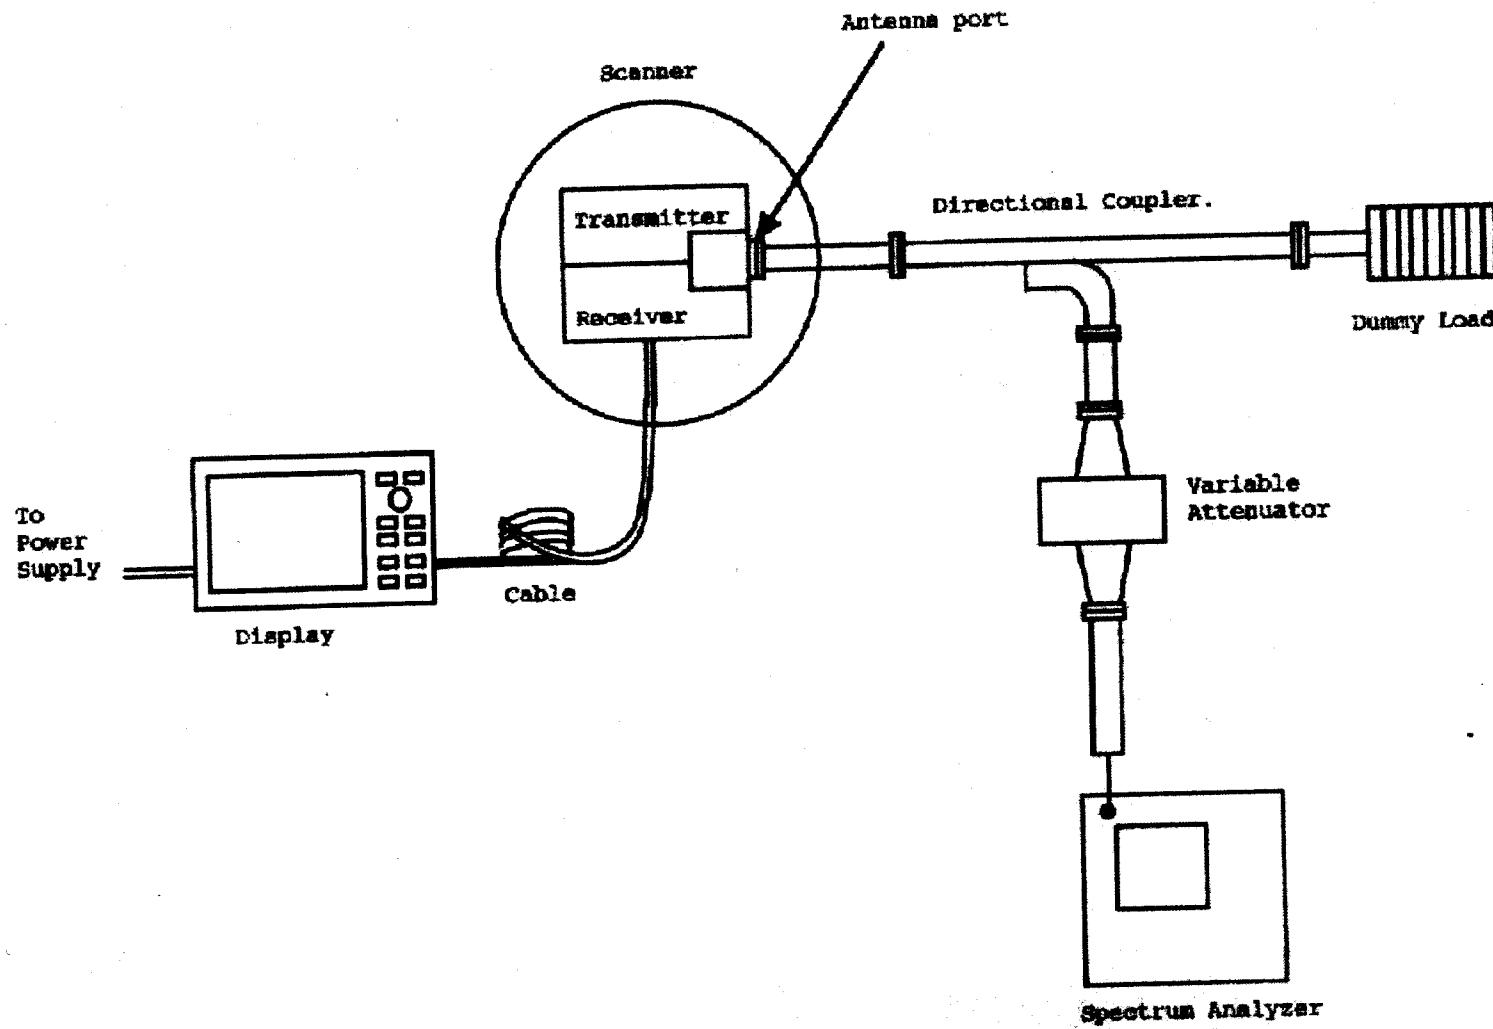


Figure 2 OCCUPIED BAND WIDTH(2.989) & SPURIOUS EMISSION AT ANTENNA TERMINAL(2.991)

TEST RESULT

Transmission Spectrum of 110 ns × 2000 Hz

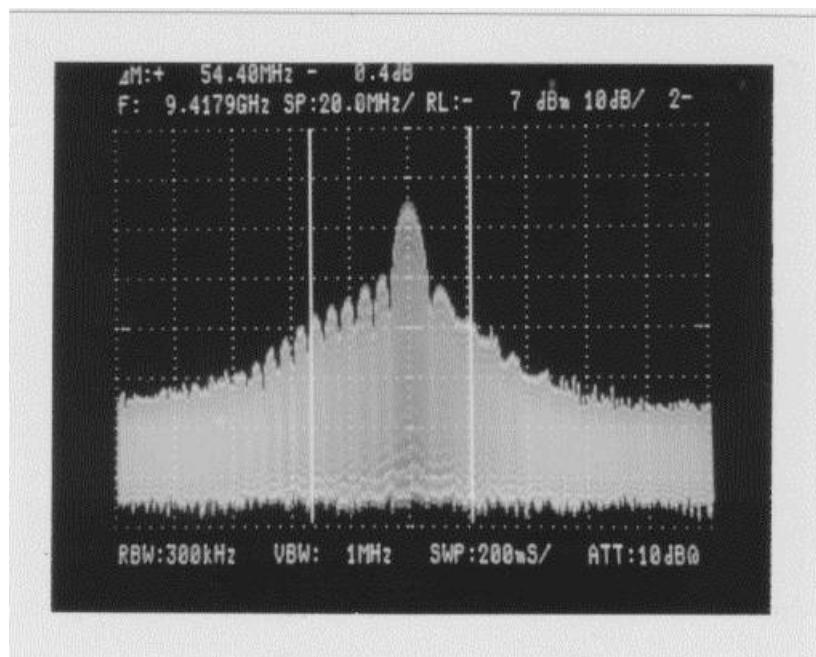


Center frequency	:	9.4179GHz
Frequency span	:	20.0 MHz/div.
Level	:	10 dB/div.
Resolution band width	:	300 kHz/div.
Video band width	:	1 MHz/div.
Sweep time	:	200 msec/div.

Occupied band width : 54.4 MHz

TEST RESULT

Transmission Spectrum of 250 ns × 1500 Hz

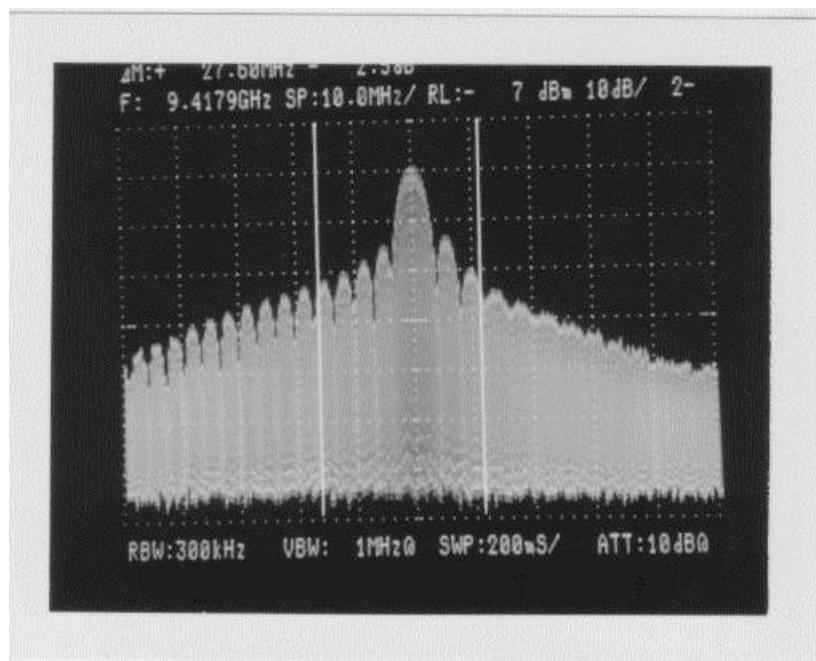


Center frequency	:	9.4179GHz
Frequency span	:	10.0 MHz/div.
Level	:	10 dB/div.
Resolution band width	:	300 kHz/div.
Video band width	:	1 MHz/div.
Sweep time	:	200 msec/div.

Occupied band width : 27.6 MHz

TEST RESULT

Transmission Spectrum of 800 ns x 600 Hz

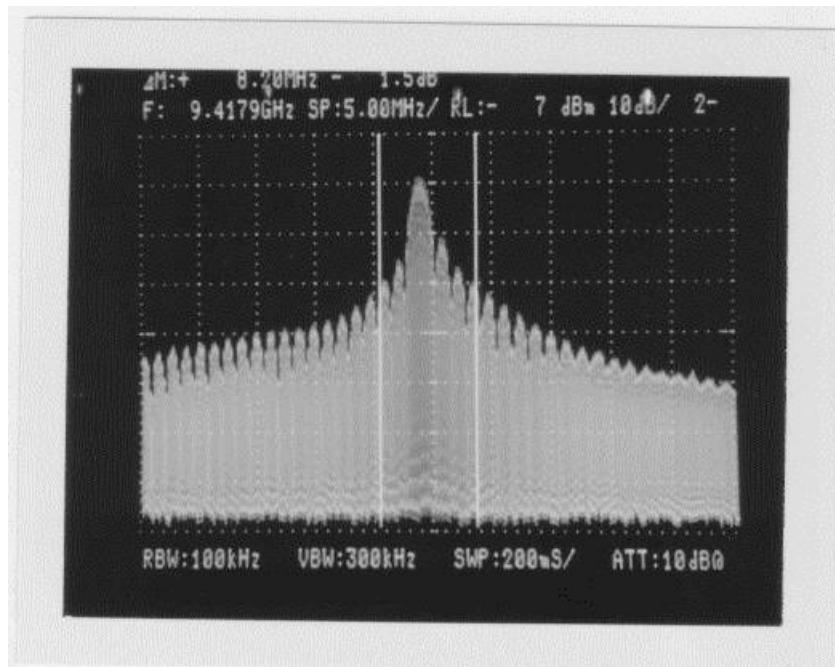

Center frequency	:	9.4179GHz
Frequency span	:	5.0 MHz/div.
Level	:	10 dB/div.
Resolution band width	:	100 kHz/div.
Video band width	:	300 kHz/div.
Sweep time	:	200 msec/div.

Occupied band width : 8.2 MHz

Section 3

Test Report

Pulse	Bandwidth
110 ns x 2000 Hz	54.4 MHz
250 ns x 1500 Hz	27.6 MHz
800 ns x 600 Hz	8.2 MHz

Exhibit 4

SPURIOUS EMISSION AT ANTENNA TERMINAL (2.991)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz \pm 30MHz
Frequency Source: Fixed cavity resonator
Pulse Rate: 600 Hz to 2000 Hz, Selectable as a function of Range

TEST EQUIPMENT

	<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>
1.	Directional Coupler	Hewlett-Packard	X752D
2.	Variable Attenuator	Hewlett-Packard	X382A
3.	Spectrum Analyzer	Anritsu	MS710C

TEST PROCEDURE

The Marine Radar is capable of generating the following pulse:
110 ns \times 2000 Hz, 250 ns \times 1500 Hz, 800 ns \times 600 Hz

The spurious emission at the antenna terminal for each of these combinations were measured by using the following procedure:

- (1) Set up the equipment as shown in Fig.2
- (2) At first, the 0 dB reference level for the main Pulse was established.
- (3) The spectrum was searched over the range 0 to 23 GHz using spectrum analyzer.

NOTE

The FCC limit is calculated as follows:

Spurious limit (L) = 43 + 10 Log P, in dB below the transmitter

CHLORIDE-CONTAINING POLY(1,3-PHENYLICARBOXYLIC ACID) IN WATER (See

144 *Journal of Health Politics*

Exhibit 4

TEST RESULT

9410 MHz	0 dB
2nd	-65 dB

All other spurious and harmonics up to 23 GHz were found to be than -70dB below maximum mean power, and/or 20 dB below limit.

Limit: $-(43 + 10 \log 2.02) = -46.1 \text{ dB}$

mean power: 2.02 watts at 0.8 us \times 600 Hz.

Exhibit 5

SPRIOS EMISSIONS FIELD STRENGTH (2.993)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz ± 30 MHz
Frequency Source: Fixed cavity resonator
Pulse Rate: 600 Hz to 2000 Hz, Selectable as a function of range

TEST EQUIPMENT

	<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>
1.	EMI Measuring system	Anritsu	ME2601A
2.	Antenna(10 kHz • 30 MHz)	AIL TECH	95010-1
3.	Antenna(30 MHz • 200 MHz)	EMCO	3104 (Biconical)
4.	Antenna(200 MHz • 1 GHz)	EMCO	3164 (Log-Periodic)
5.	Antenna(1 GHz • 23 GHz)	EMCO	3115 (Double Ridged Guide)
6.	Spectrum analyzer	Anritsu	MS710C
7.	Mains Network	Anritsu	MN424B

CALIBRATION

All test equipment is calibrated and maintained by Koden Quality Assurance Dept.

TEST PROCEDURE

The Marine Radar is capable of generating the following pulses:

110 ns × 2000 Hz, 250 ns × 1500 Hz, 800 ns × 600 Hz

The spurious emissions field strength for each of these combination was measured using following procedure.

- (1) Set up the equipment as shown in Fig.3.
- (2) Using the automatic EMI Measuring System, measure and record the spurious radiated emissions from 10 kHz to 1 GHz. The computer in the Measuring system program automatically adds antenna factors and cable losses to the raw voltage measurements to obtain field strength units.

- (3) Set up the equipment as shown in Fig.4.
- (4) Measure and record spurious radiated emissions from 1 GHz to 18GHz (antenna limit). Observe and note any emissions from 1GHz to 23 GHz.
- (5) Calculate the field strength of spurious emissions from 1 GHz to 18 GHz by add in antenna factor (including cable loss) to the observed reading.
- (6) Set up the equipment as shown in Fig.5.
- (7) Using the automatic EMI Measuring system, measure and record terminal interference voltage from 10 kHz to 30 MHz.

Note

Spurious emission limit is calculated as follows:


Limit (L) = 43 + 10 log P, in dB below the fundamental field strength ,where P is the mean power output in watts (See Exhibit 1).


Limit: -(43 + 10 log 2.02) = -46.1 dB


mean power: 2.02 watts at 0.8 us x 600 Hz

Figure 3

SOURCELINEE EMISSION FIELD STAND (2.993)
(10kHz - 1GHz)

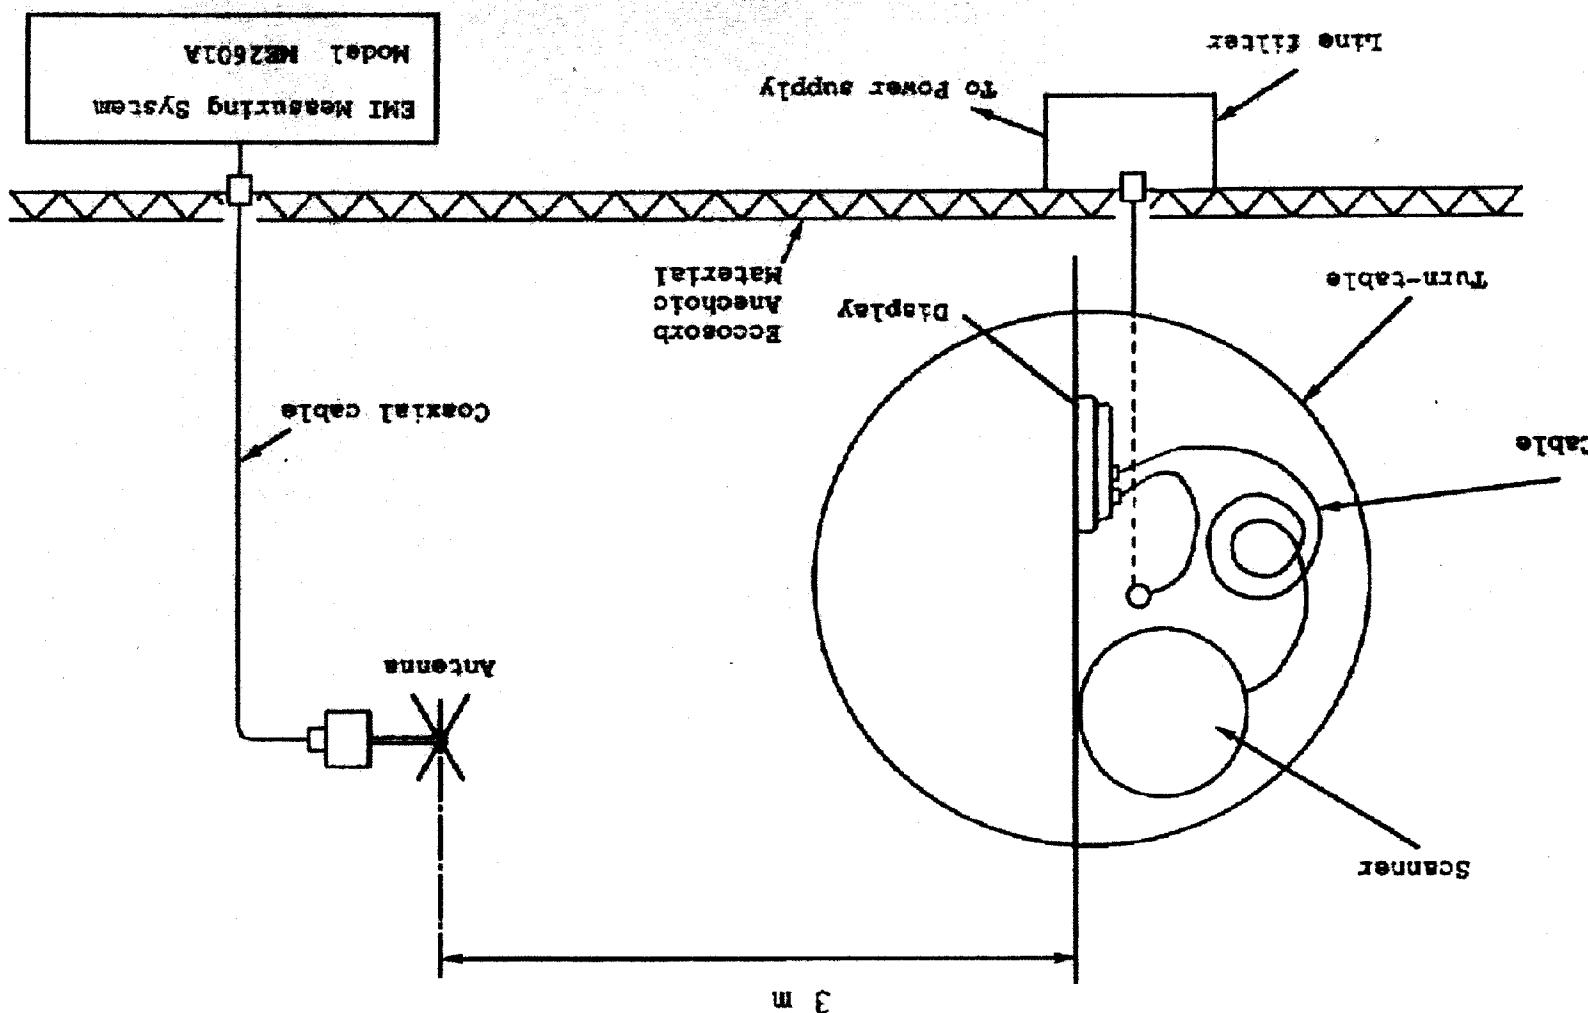

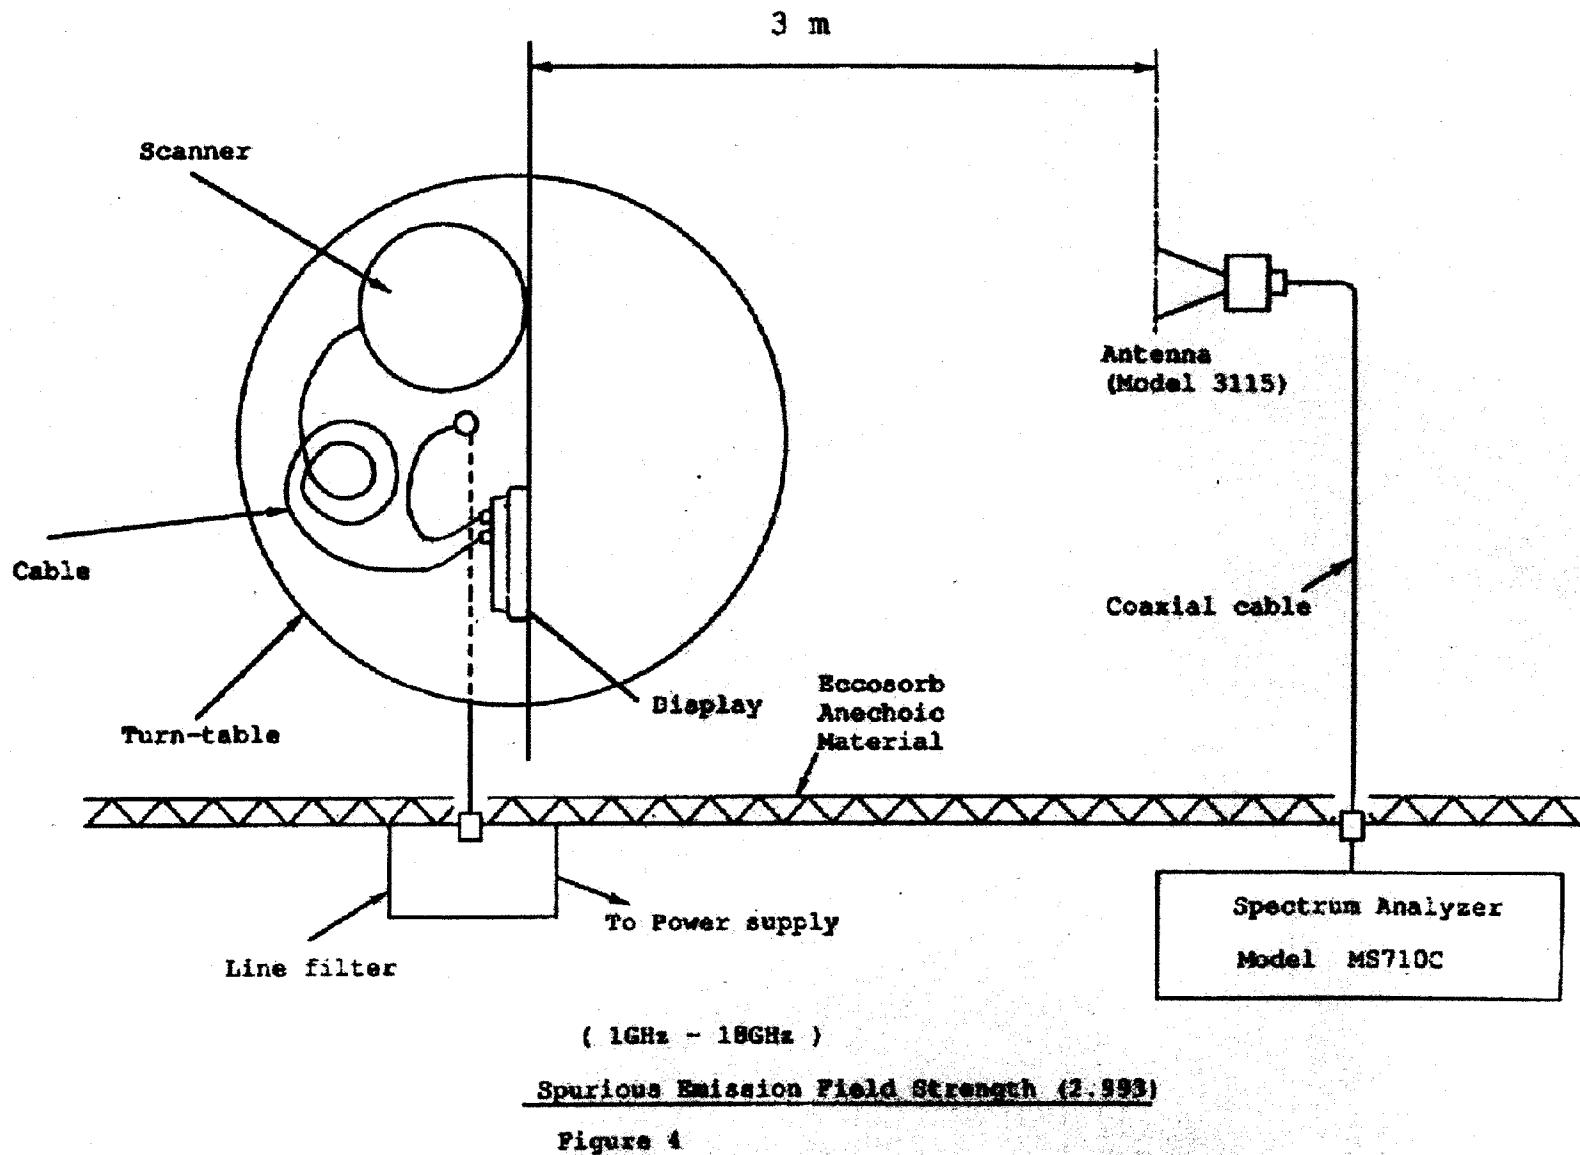


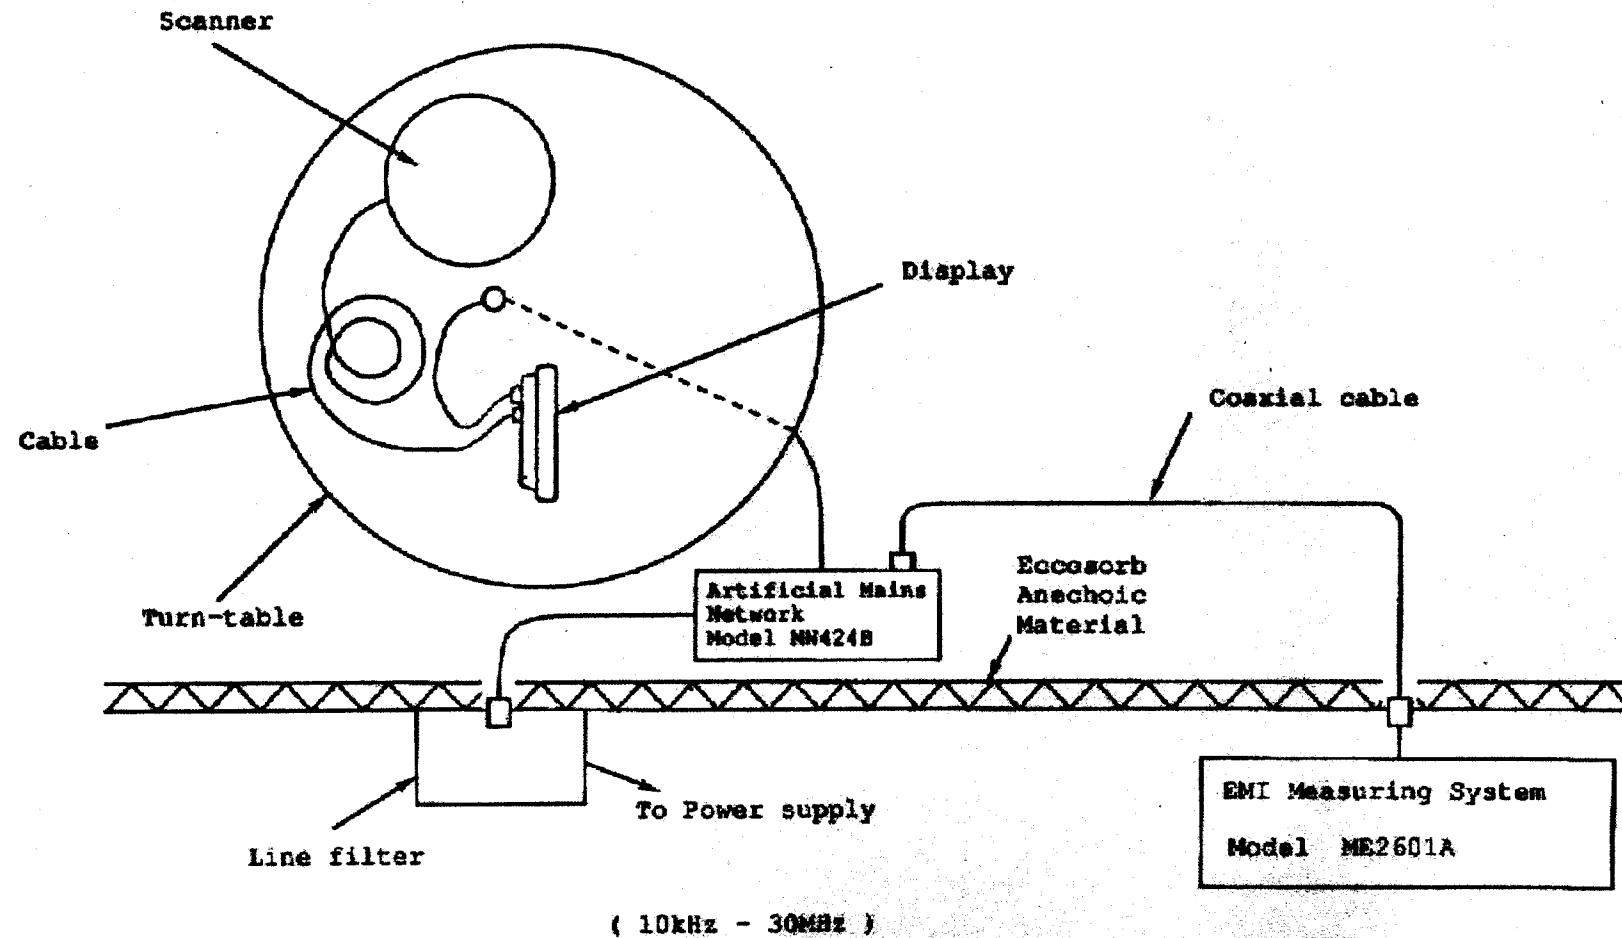


Spurious Emission Terminal Interference Voltage

Figure 5


(Radiated Interference Field Strength 10kHz ~ 30 MHz)

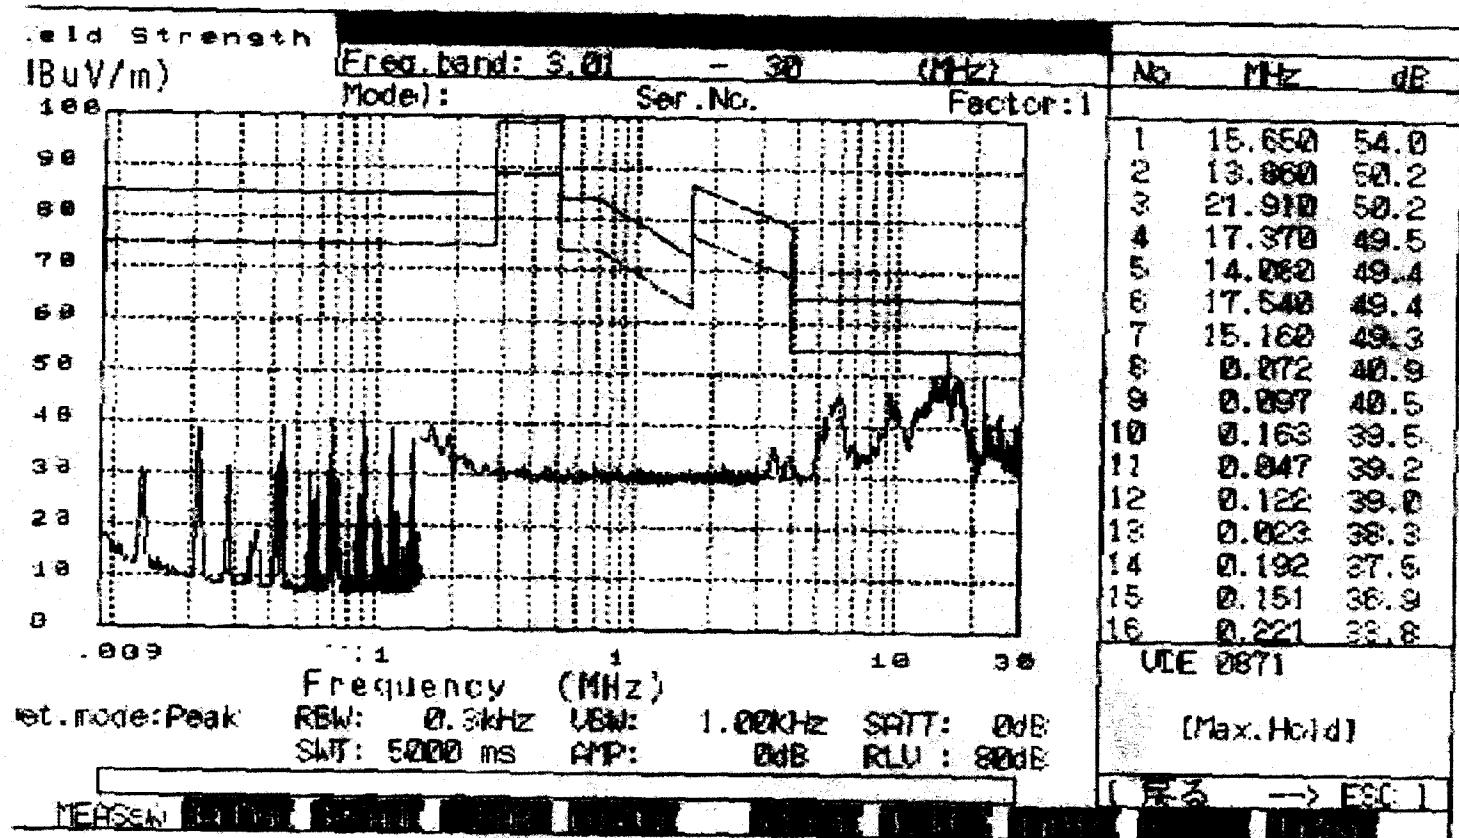

(Radiated Interference Field Strength 30 MHz ~ 1000MHz)

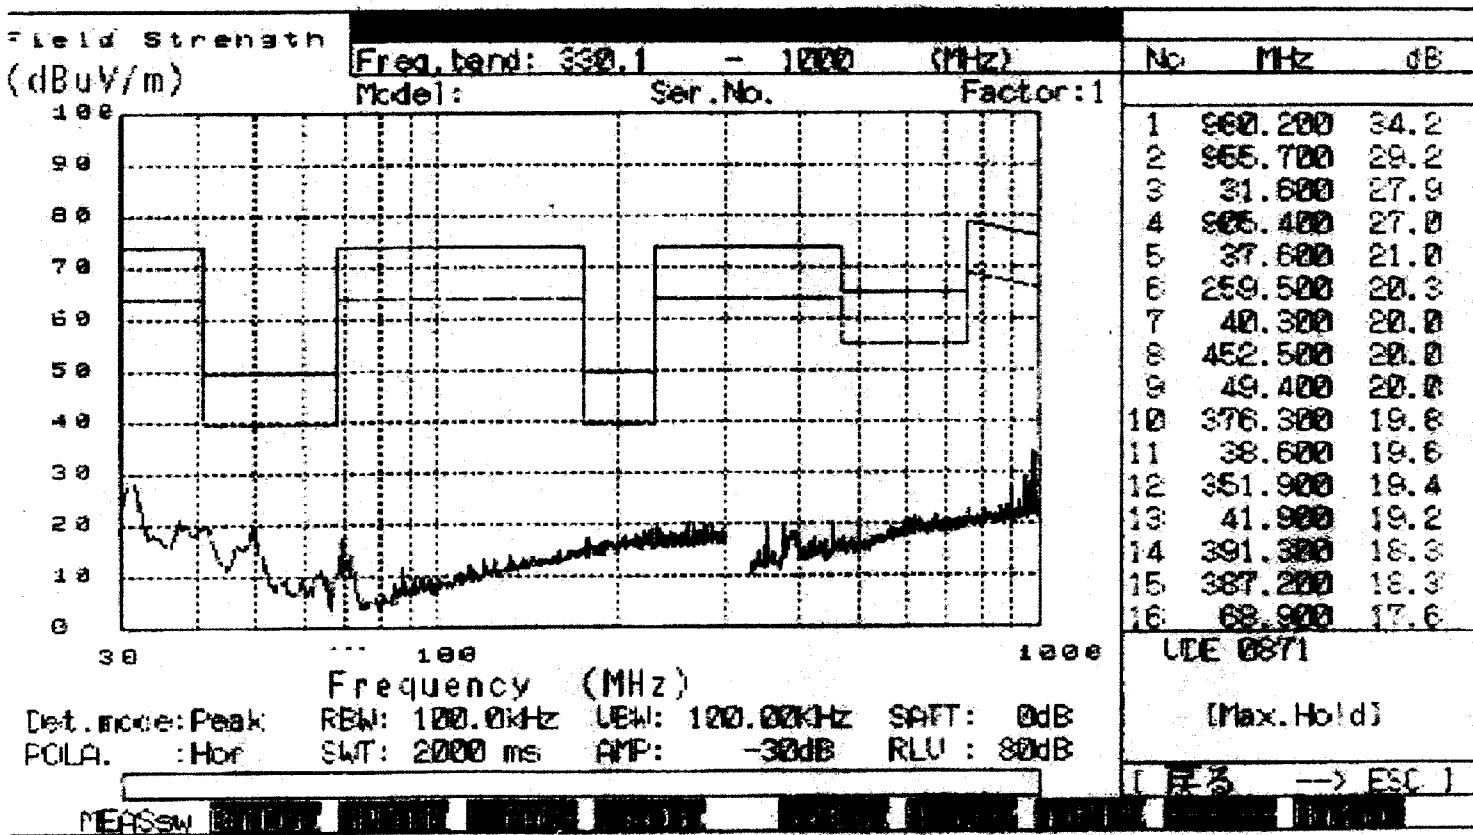

(Terminal Interference Voltage 10kHz ~ 30 MHz)

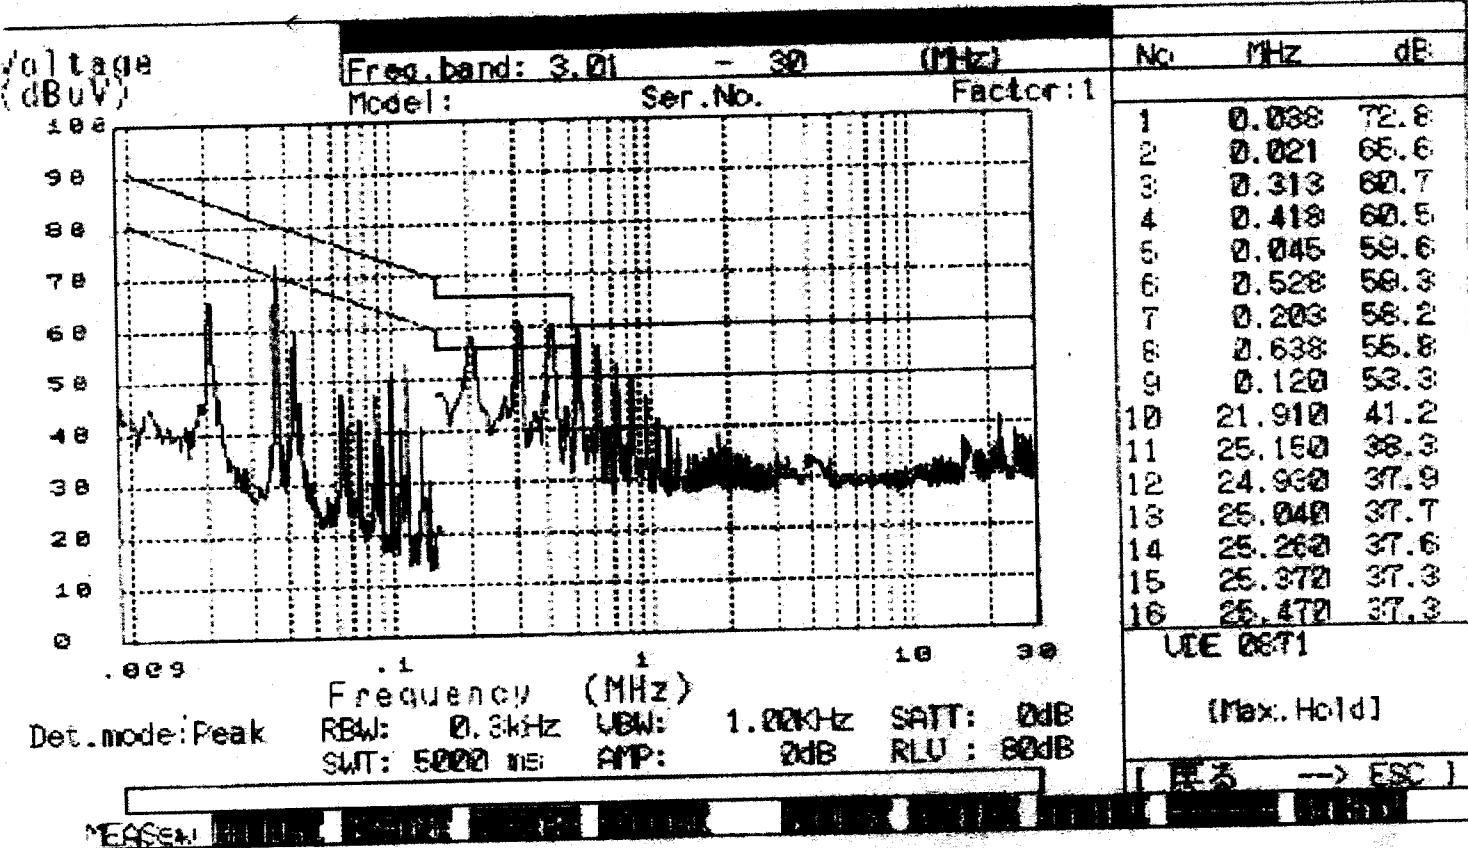

Test result (All data)

	Frequency	Measurement Level	Ratio to Main Transmission	Refer to
Spurious Emission Field Strength	9.410GHz	145dBu/m	0dB	Figure 4
	10kHz to 30MHz	Max. 54dBu/m	-91dB	Figure 3
	30MHz	Max. 34dBu/m	-111dB	Figure 3
	30MHz to 1GHz	Max. 60dBu/m	-85dB	Figure 4
	1GHz to 18GHz	(Max. 70dBu/m)	(-75dB)	Figure 4
Terminal Interference Voltage	18GHz to 23GHz			
	10kHz to 30MHz	73dBu	(-72dB)	Figure 5

Exhibit 6

FREQUENCY STABILITY (2.995)

Type of Transmission: PON
Type of Modulation: Pulse
Frequency Band: 9410 MHz \pm 30 MHz
Pulse Rate: 600 Hz to 2000 Hz, Selectable as a function of range
Pulse Width: 0.11 us to 0.8 us, Selectable as a function of Range

TEST EQUIPMENT

	Equipment	Manufacturer	Model
1.	Temperature Chamber	TABAII ESPEC	TBL-1.5HW4G2AC
2.	Directional Coupler	Hewlett-Packard	X752D
3.	frequency meter	Hewlett-Packard	X532B
4.	X-Band Dummy Load	NIHON KOSHUHA	WDL095
5.	Variable Attenuator	Hewlett-Packard	X382A
6.	Power Meter	ANRITSU	ML83A

TEST PROCEDURE

The Marine Radar is capable of generating the following pulses:

0.11 us x 2000 Hz, 0.25 us x 1500 Hz, 0.8 us x 600 Hz

The circuitry of the Radar contains a key-inhibit timer that prevents transmission until the magnetron has warmed-up for 2 minutes. Consequently, all data are taken after the 2 minutes warmed-up.

- (1) Set up the equipment in the temperature chamber as shown in Fig.6. Set the chamber to -20° and allow the equipment to stabilize.
- (2) Turn the equipment on and measure the transmitted frequency using the resonant cavity frequency meter. Measure each of the pulse types at one minute intervals until unit stability is achieved or 10 minutes have elapsed, whichever is longer.
- (3) Increase the chamber temperature by 10° and repeat step 1 and 2.

Continue in 10° increments until 50° has been achieved.

(4) Measure the output frequency at room ambient temperature following voltages applied to the power input.

12V input: Apply 10.2V and 13.8V

24V input: Apply 20.4V and 27.6V

32V input: Apply 27.2V and 36.8V

(5) Calculate test frequency limits from the followings;

The frequency of the principal emission must not be nearer to the edge of the authorized band than $1.5/t$ in MHz, (where t is the shortest pulse used, in micro second).

$t = 0.11\mu s$ (nominal)

$1.5/t = 13.64$ MHz

Band Limit = 9.300000 to 9.500000 GHz

Emission Limit = 9.31364 to 9.48636 GHz

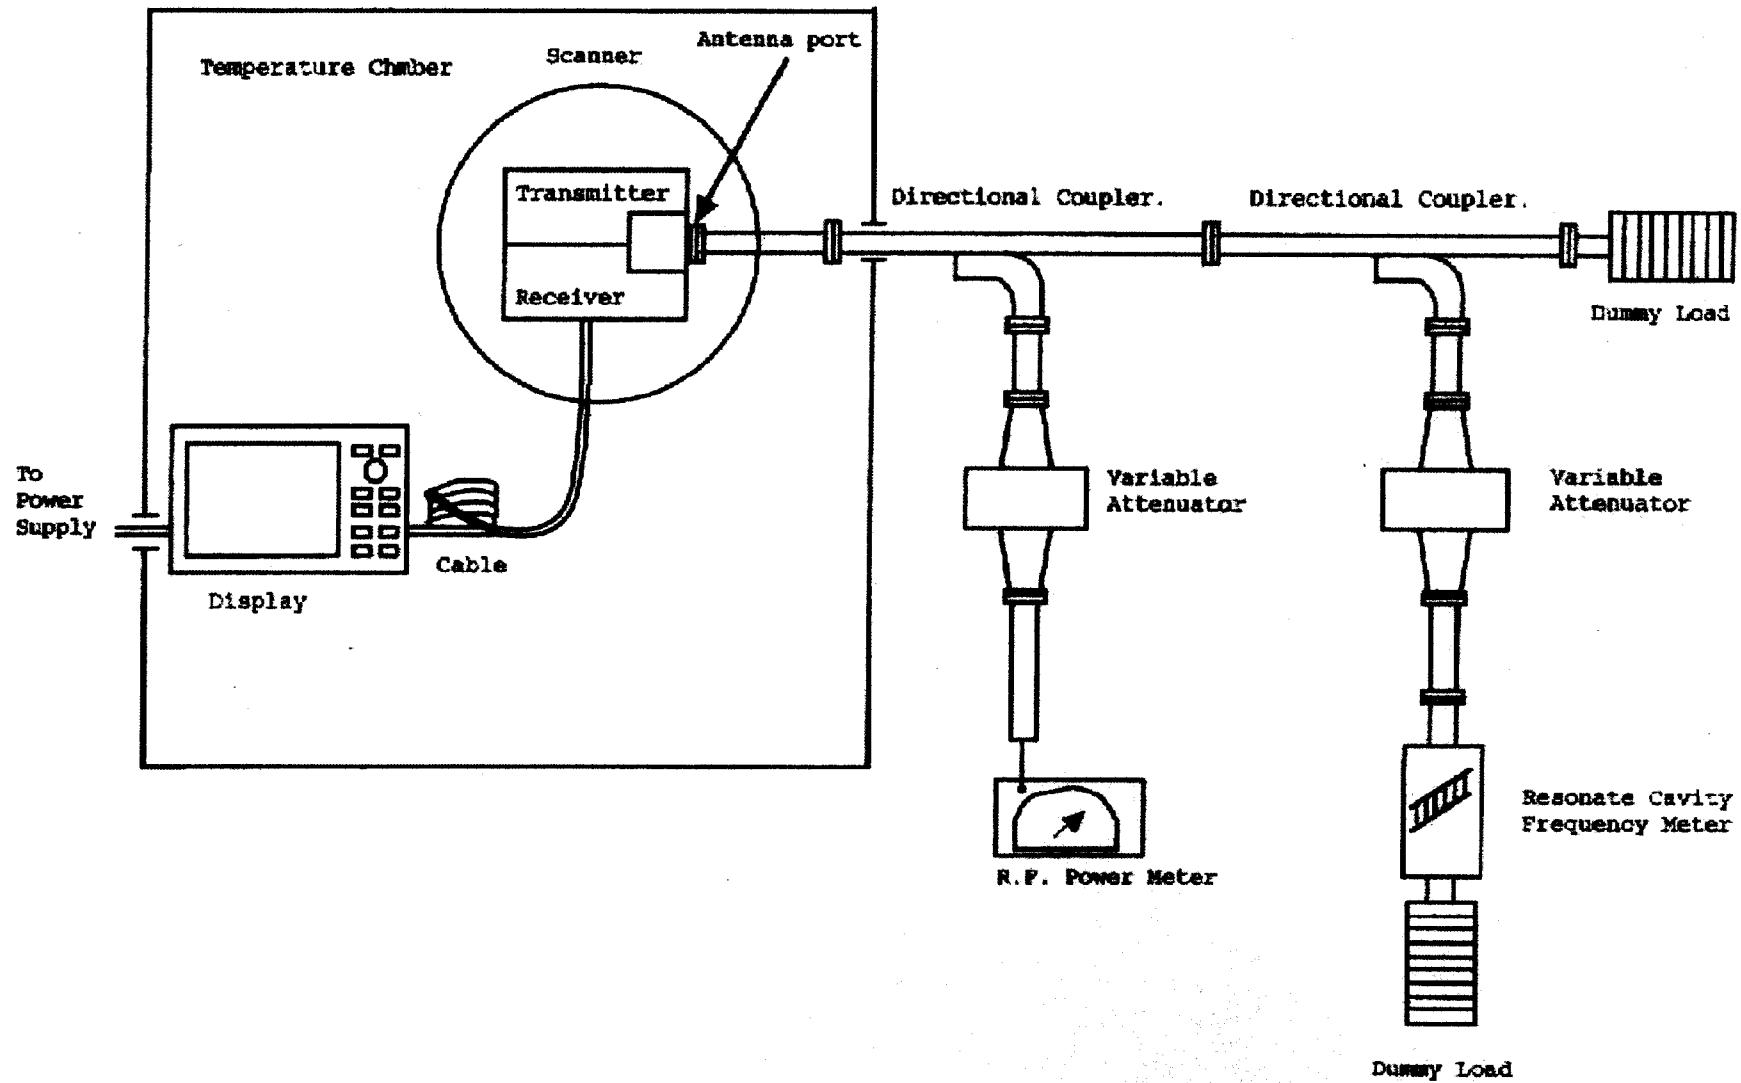


Figure 6 FREQUENCY STABILITY TEST

Exhibit 6

TEST DATA

Temperature Stability

Pulse Type		110nsx2000Hz	250nsx1500Hz	800nsx600Hz
Frequency (GHz)	Initial	Final	Final	Final
Temperature (•)				
-20	9.430	9.431	9.429	9.428
-10	9.428	9.429	9.427	9.427
0	9.426	9.427	9.425	9.425
+10	9.425	9.425	9.423	9.423
+20	9.423	9.423	9.421	9.421
+30	9.421	9.421	9.420	9.420
+40	9.419	9.418	9.418	9.418
+50	9.417	9.416	9.416	9.416

Voltage Stability

Applied Voltage (Vdc)	Initial Frequency (GHz)	Final
Frequency (GHz)		
10.2	9.424	9.422
12.0	9.424	9.422
13.8	9.424	9.422
24.0	See note below	
27.2	9.424	9.422
32.0	9.424	9.422
36.8	9.424	9.422

Note: All data taken in the 110 ns x 2000Hz mode.

Note: Qualification at both 12Vdc qualifies 24Vdc input by similarity.

*** Final reading taken 5 minutes following initial reading.