

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E126R-022

AGR No. : A110A-102R

Applicant : McPay Corp.

Address : 912, Byuksan3-cha Digitalvalley 271, Digital-ro, Guro-gu, Seoul, Korea

Manufacturer : McPay Corp.

Address : 912, Byuksan3-cha Digitalvalley 271, Digital-ro, Guro-gu, Seoul, Korea

Type of Equipment : Mobile(Card Acceptance) Printer

FCC ID. : O6GMPT700

Model Name : MPT-700

Serial number : N/A

Total page of Report : 40 pages (including this page)

Date of Incoming : February 06, 2012


Date of issue : June 13, 2012


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.247.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by: 
Ki-Hong, Nam / Senior Engineer
ONETECH Corp.

Approved by: 
Y. K. Kwon / Exe. Managing Director
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3.1 PRODUCT DESCRIPTION	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM	8
5.5 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	9
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	9
6.2 GENERAL RADIATED EMISSIONS TESTS	9
7. OCCUPIED BANDWIDTH	10
7.1 20 DB BANDWIDTH	10
7.1.1 OPERATING ENVIRONMENT	10
7.1.2 TEST SET-UP	10
7.1.3 TEST EQUIPMENT USED	10
7.1.4 TEST DATA	10
7.2 HOPPING FREQUENCY SEPARATION	13
7.2.1 OPERATING ENVIRONMENT	13
7.2.2 TEST SET-UP	13
7.2.3 TEST EQUIPMENT USED	13
7.2.4 TEST DATA	13

7.3. NUMBER OF HOPPING CHANNELS	15
7.3.1 OPERATING ENVIRONMENT	15
7.3.2 TEST SET-UP	15
7.3.3 TEST EQUIPMENT USED	15
7.3.4 TEST DATA	15
7.4 TIME OF OCCUPANCY	19
7.4.1 OPERATING ENVIRONMENT	19
7.4.2 TEST SET-UP	19
7.4.3 TEST EQUIPMENT USED	19
7.4.4 TEST DATA	20
7.5 MAXIMUM PEAK OUTPUT POWER.....	23
7.5.1 OPERATING ENVIRONMENT	23
7.5.2 TEST SET-UP	23
7.5.3 TEST EQUIPMENT USED	23
7.5.4 TEST DATA	23
7.6 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	26
7.6.1 OPERATING ENVIRONMENT	26
7.6.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	26
7.6.3 TEST SET-UP FOR RADIATED MEASUREMENT	26
7.6.4 TEST EQUIPMENT USED	26
7.6.5. TEST DATA	27
7.6.5.1. <i>Test data for conducted emission</i>	27
7.6.5.2. <i>Test data for radiated emission</i>	31
8. CONDUCTED EMISSION TEST	38
9. RADIO FREQUENCY EXPOSURE.....	40
9.1 RF EXPOSURE LIMIT	40
9.2 EUT DESCRIPTION	40
9.3 TEST RESULT	40

Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
E126R-022	June 13, 2012	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : McPay Corp.
 ADDRESS : 912, Byuksan3-cha Digitalvalley 271, Digital-ro, Guro-gu, Seoul, Korea
 CONTACT PERSON : Mr. D.S, Ha / General Manager
 TELEPHONE NO : +82-70-7784-1349
 FCC ID : O6GMPT700
 MODEL NAME : MPT-700
 BRAND NAME : -
 SERIAL NUMBER : N/A
 DATE : June 13, 2012

EQUIPMENT CLASS	<i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i>
KIND OF EQUIPMENT	Mobile(Card Acceptance) Printer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.4: 2009
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	10 m Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (b) (4)	Antenna Gain	Met requirement / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (i)	Radio Frequency Exposure Level	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

The radiated testing was performed according to the procedures in ANSI C63.4: 2009 at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. The Onetech Corp. has been accredited as a Conformity Assessment Body (CAB) with designation number KR0013.

3. GENERAL INFORMATION

3.1 Product Description

The Gaon-Int Co., LTD., Model MPT-700 (referred to as the EUT in this report) is a Mobile(Card Acceptance) Printer . The EUT has a function of RFID and Bluetooth. This report is for RFID function and the report for the Bluetooth will be issued by another report. The product specification described herein was obtained from product data sheet or user's manual..

DEVICE TYPE	Mobile(Card Acceptance) Printer
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
RF OUTPUT POWER	-1.39 dBm
NUMBER OF CHANNEL	79 Channels
MODULATION TYPE	GFSK
ANTENNA	Hirose Bluetooth Chip Antenna
ANTENNA CONNECTOR TYPE	Chip Antenna
ANTENNA GAIN	0.69 dBi
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1 MHz)	27.12MHz and 8 MHz
RATED SUPPLY VOLTAGE	Manufacturer: W&T, Model Name: AD18W084080K Input: 100-240 V~, 47-63 Hz, 0.5 A, Output: DC 8.4 V, 0.65 A

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	MPT-700 MAIN REV3.1	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	FCC ID	Description	Connected to
MPT-700	McPay Corp.	O6GMPT700	Mobile(Card Acceptance) Printer (EUT)	-
AD18W084080K	W&T	N/A	Adaptor	EUT

5.3 Mode of operation during the test

The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz). To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and worst case is “XY”

The used adaptor with the EUT shall be used for charging mode only, so the conducted emission was performed at charging mode.

5.4 Configuration of Test System

Line Conducted Test: The EUT was connected to adaptor and the power of adaptor was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2009 7.3.3 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2009 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m open area test site.
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The transmitter antenna of the EUT is chop antenna so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Only Charging Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Charging Mode	O
Transmitter Mode	X

7. OCCUPIED BANDWIDTH


7.1 20 dB BANDWIDTH

7.1.1 Operating environment

Temperature : 24 °C
Relative humidity : 43 % R.H.

7.1.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

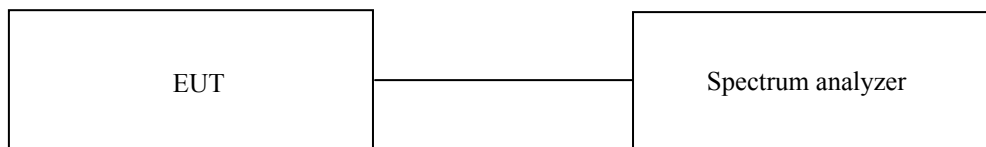

7.1.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)

All test equipment used is calibrated on a regular basis.


7.1.4 Test data

-. Test Date : March 02~06 , 2012


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (kHz)
Low	2 402	933.4
Middle	2 441	925.5
High	2 480	918.5

Remark: See next page for an overview sweep performed with peak detector.


Tested by: Chang-Uk, Jun / Engineer

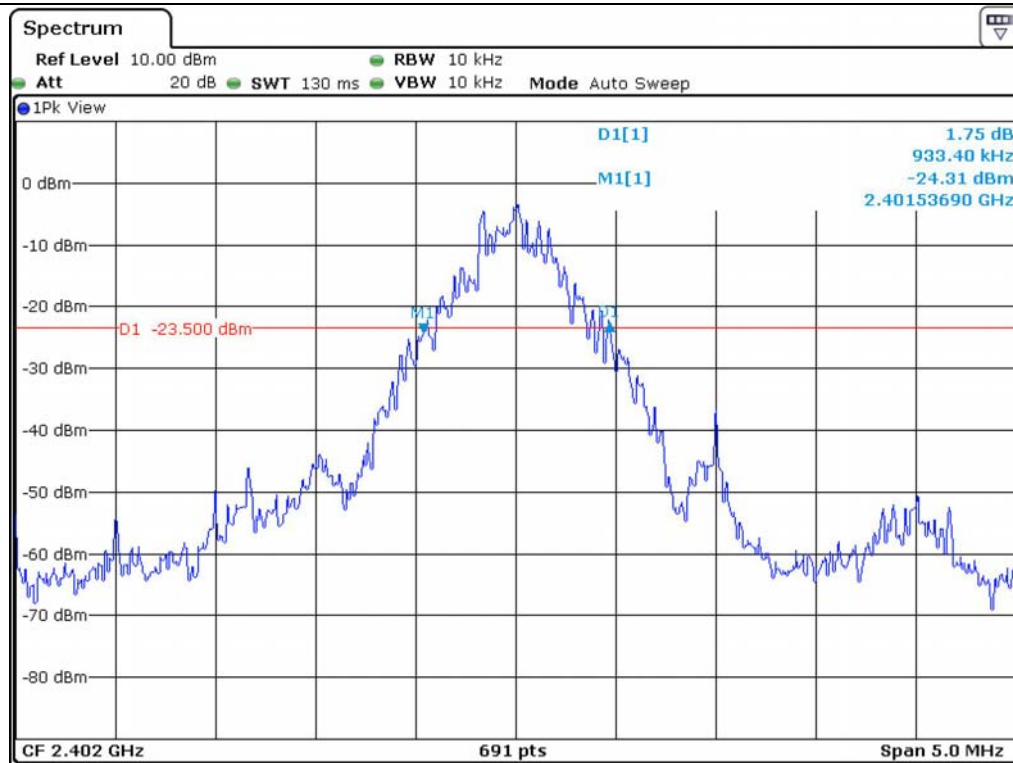

Low Channel

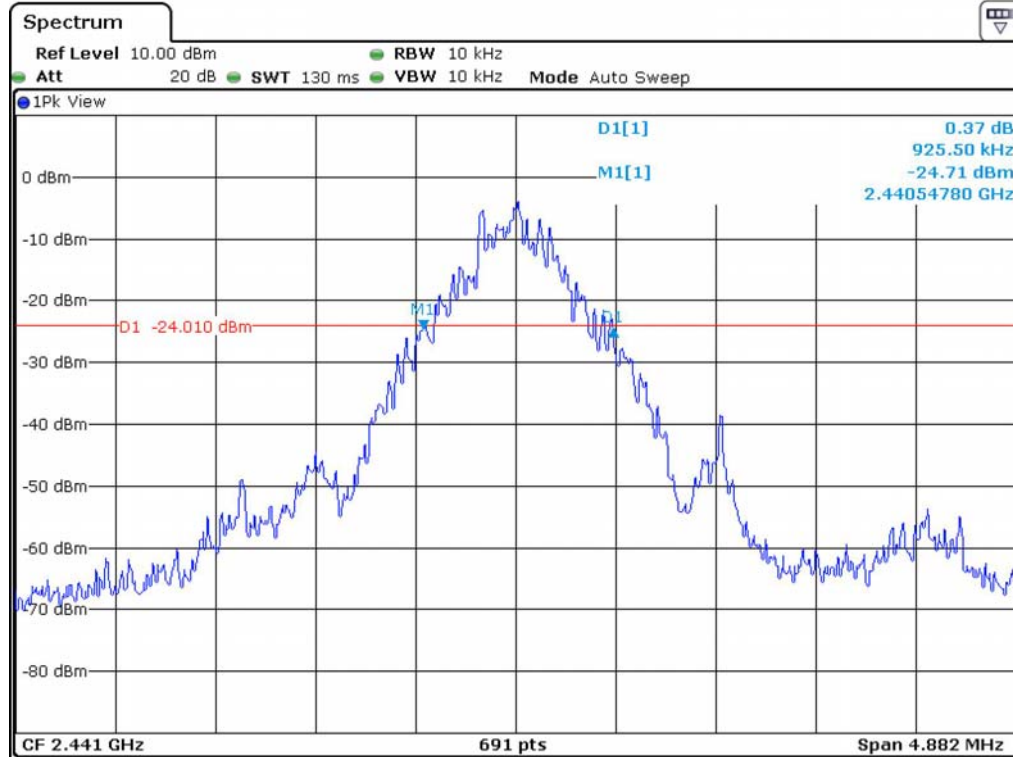

Middle Channel

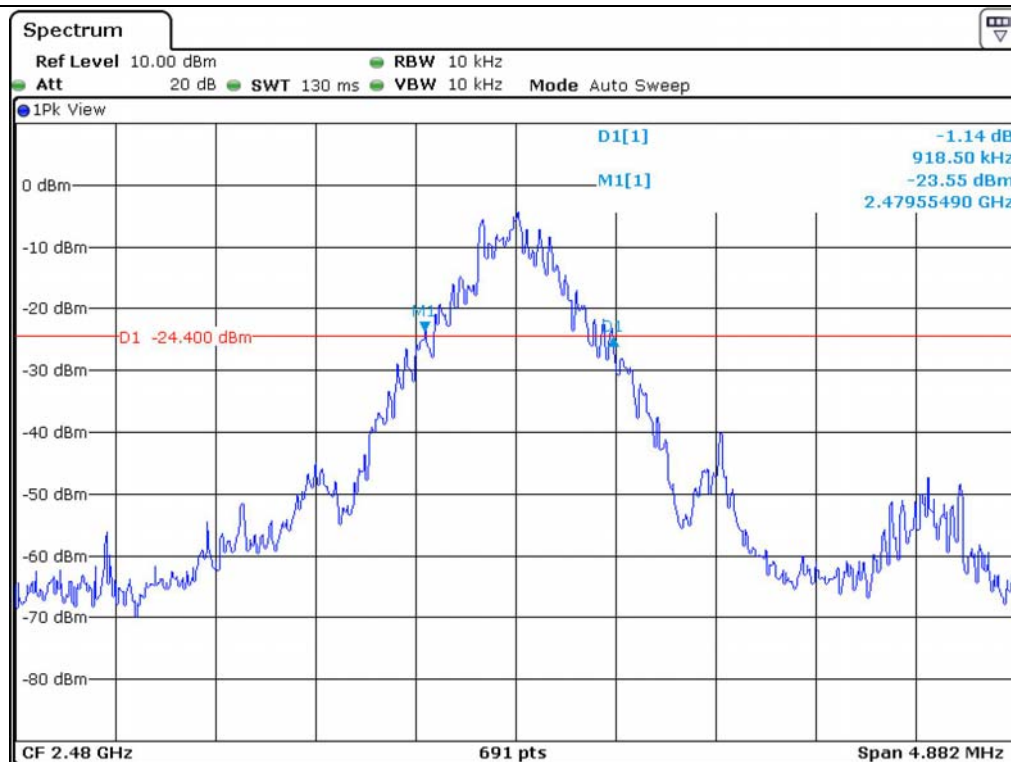

High Channel


7.2 HOPPING FREQUENCY SEPARATION

7.2.1 Operating environment

Temperature : 25 °C
Relative humidity : 43 % R.H.

7.2.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 10 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.

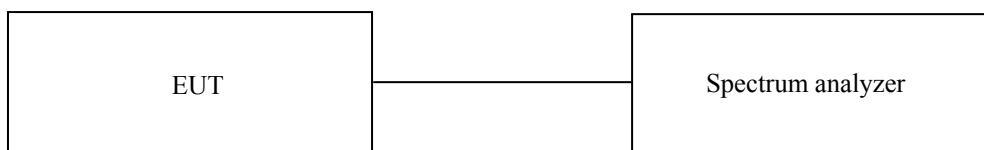

7.2.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)


All test equipment used is calibrated on a regular basis.

7.2.4 Test data


-. Test Date : March 02, 2012 ~ March 06, 2012
-. Test Result : Pass

MEASURED VLAUE (kHz)	LIMIT, 20 dB Bandwidth (kHz)	MARGIN (kHz)
999	933.4	-65.6

Remark: See next page for an overview sweep performed with peak detector.



Tested by: Chang-Uk, Jun / Engineer

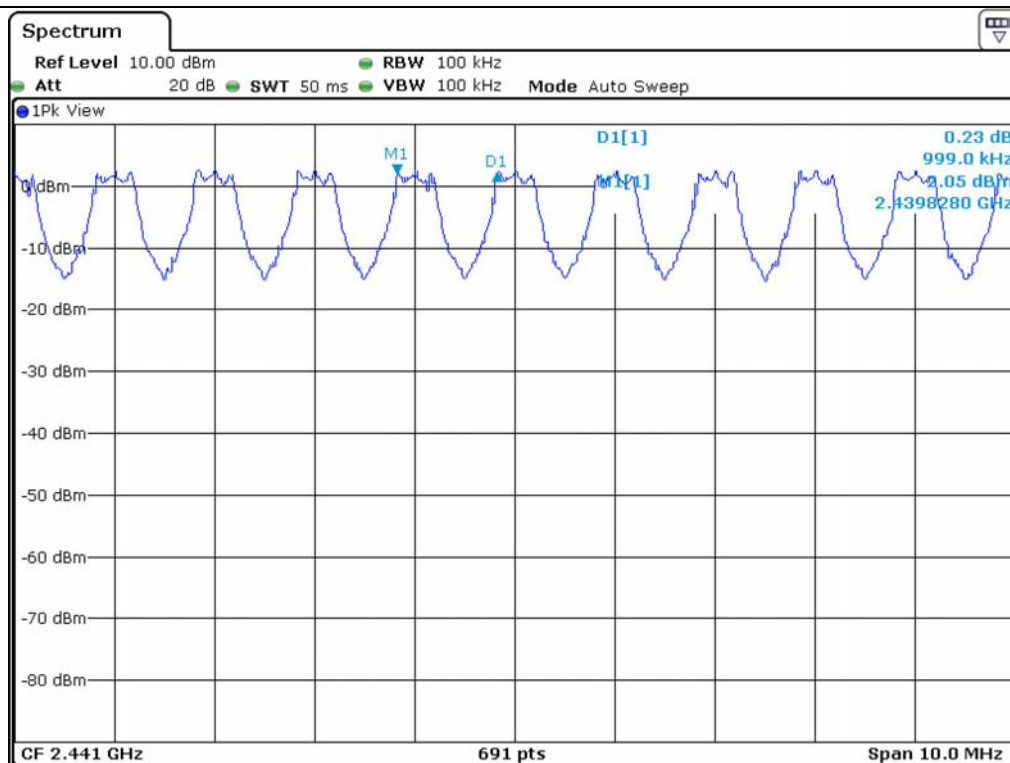


7.3. NUMBER OF HOPPING CHANNELS

7.3.1 Operating environment

Temperature : 25 °C
Relative humidity : 43 % R.H.

7.3.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 100 MHz and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.

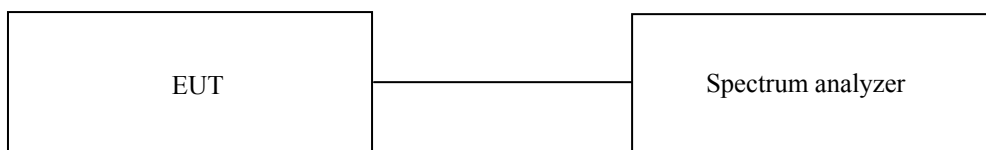

7.3.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)

All test equipment used is calibrated on a regular basis.


7.3.4 Test data

- Test Date : March 02, 2012 ~ March 06, 2012
- Test Result : Pass


MEASURED VLAUE (Number)	LIMIT (Number)	MARGIN (Number)
79	Minimum of 15	64




Tested by: Chang-Uk, Jun / Engineer

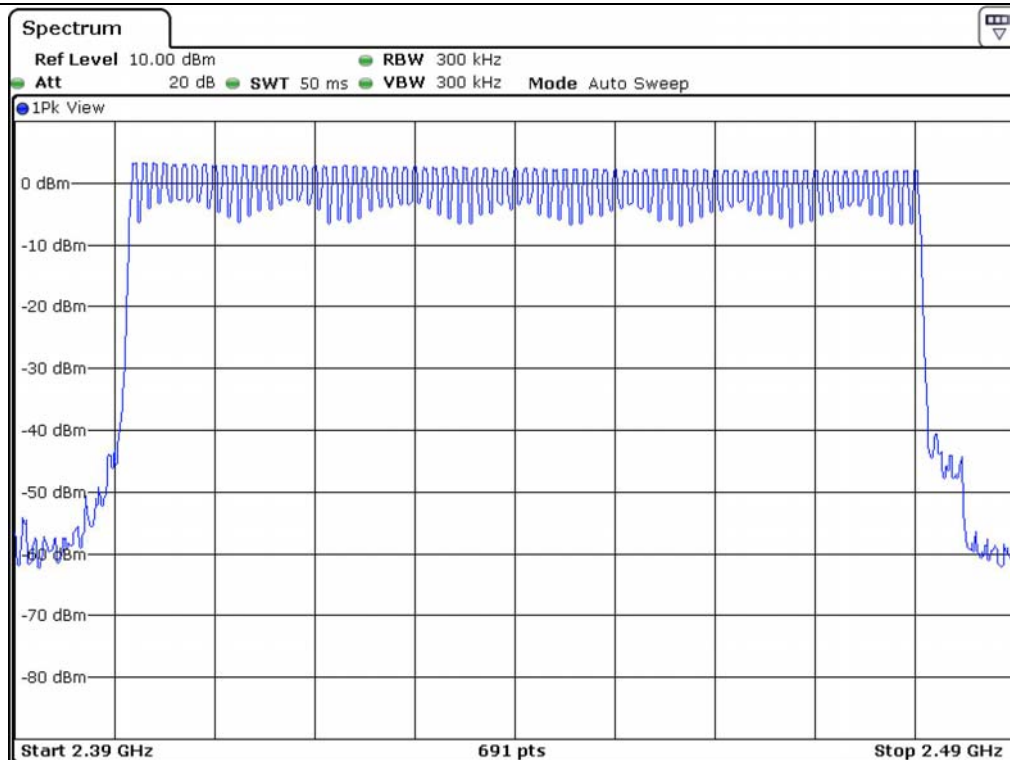


Total number of hopping channel: $28+30+21 = 79$

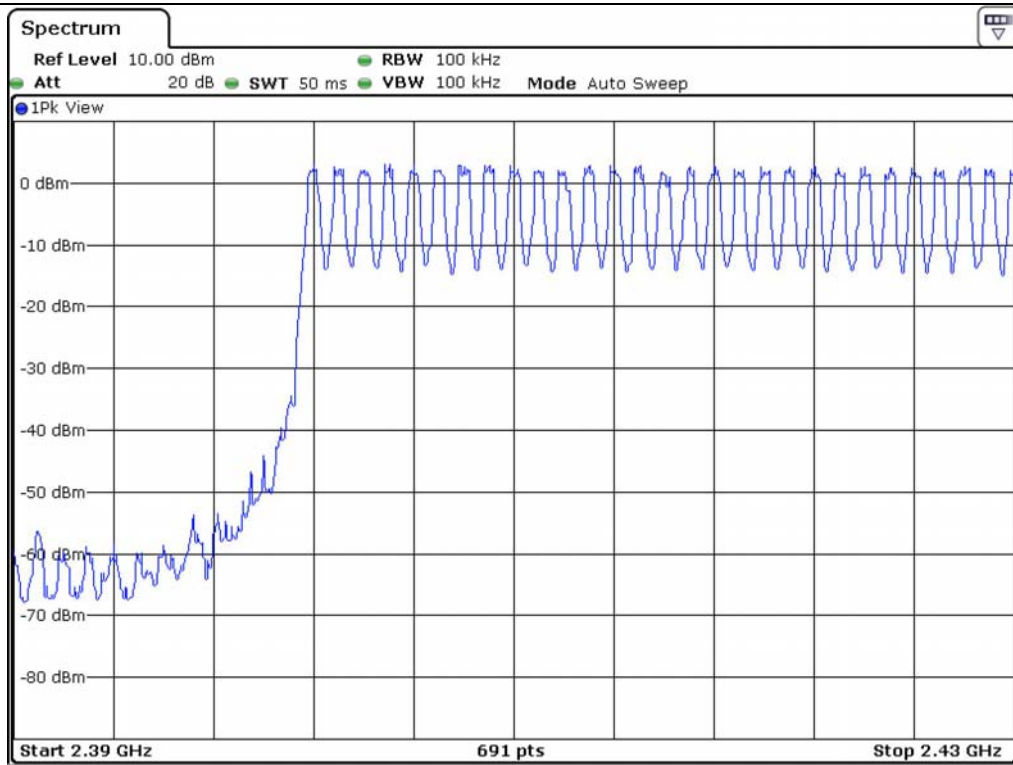

Number of hopping channel: 28

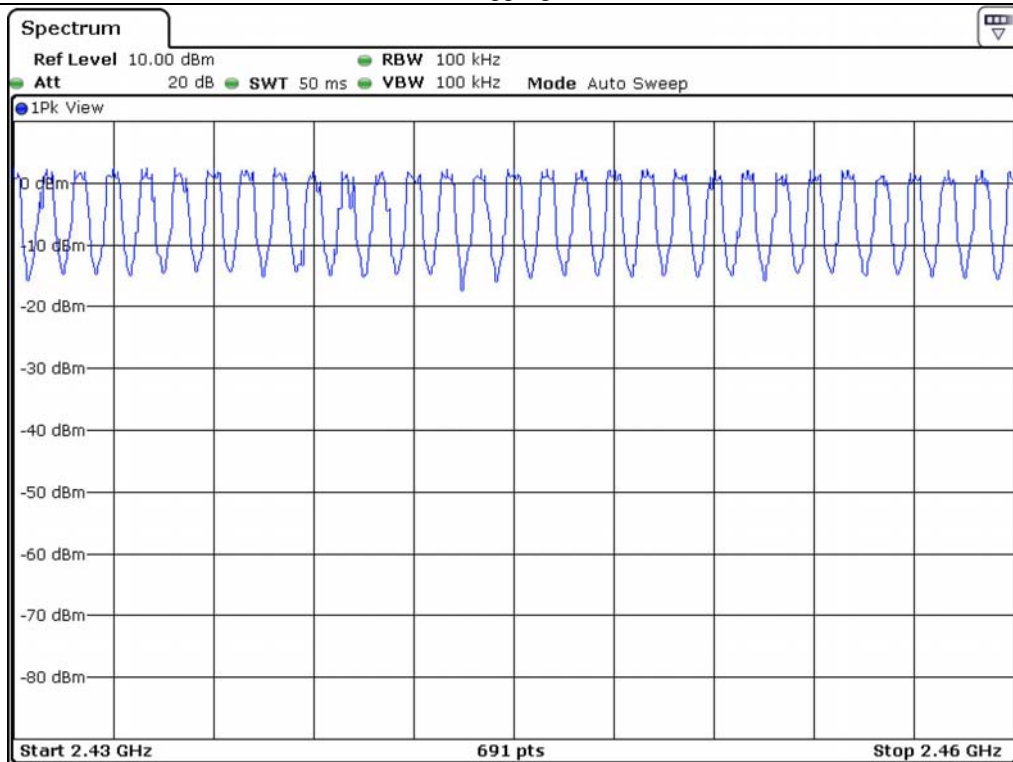

Number of hopping channel: 30

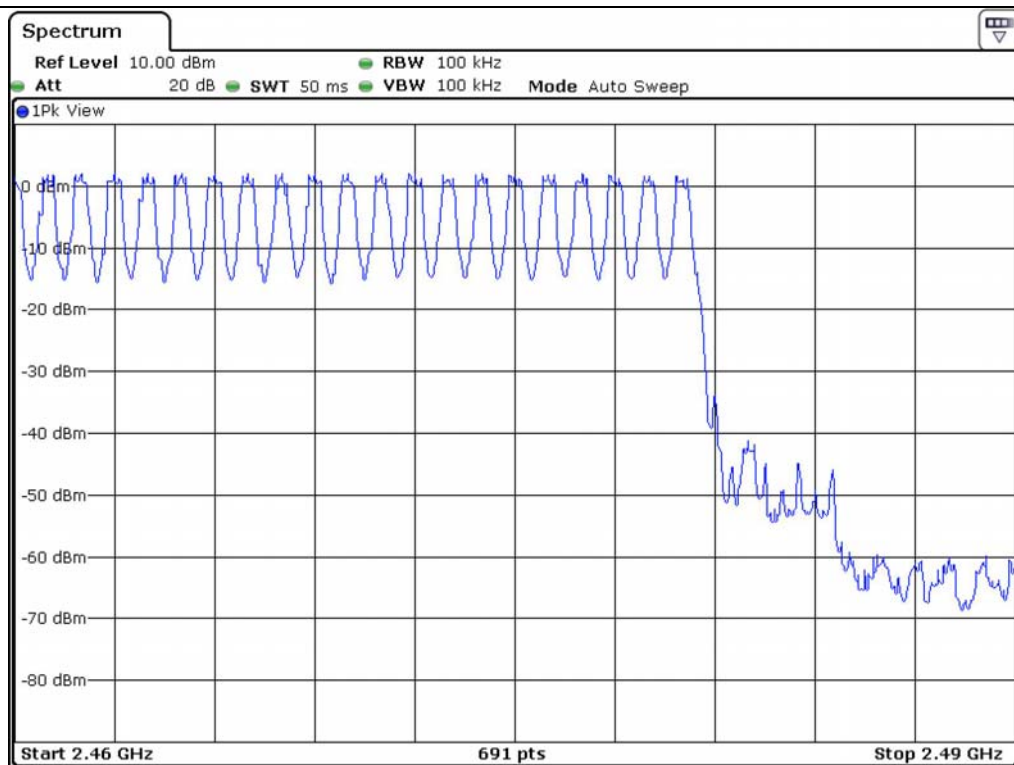

Number of hopping channel: 21


7.4 TIME OF OCCUPANCY

7.4.1 Operating environment

Temperature : 26 °C
Relative humidity : 46 % R.H.

7.4.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.

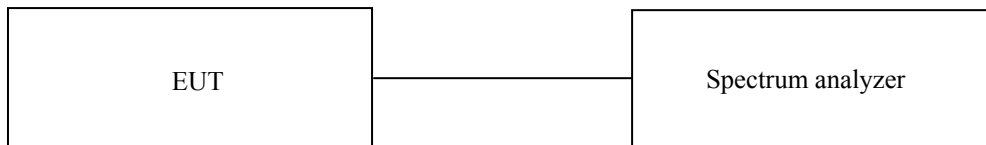

7.4.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)

All test equipment used is calibrated on a regular basis.

7.4.4 Test data

- Test Date : March 02, 2012 ~ March 06, 2012

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.


Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (ms)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.398 5	10.13	31.6	127.56	400	PASS
DH3	1.637 6	5.06	31.6	261.85	400	PASS
DH5	2.905 8	3.38	31.6	310.36	400	PASS

Total dwell time is calculated as following.


Total Dwell Time = Pulse time * Hops per second with channels * period time




Tested by: Chang-Uk, Jun / Engineer

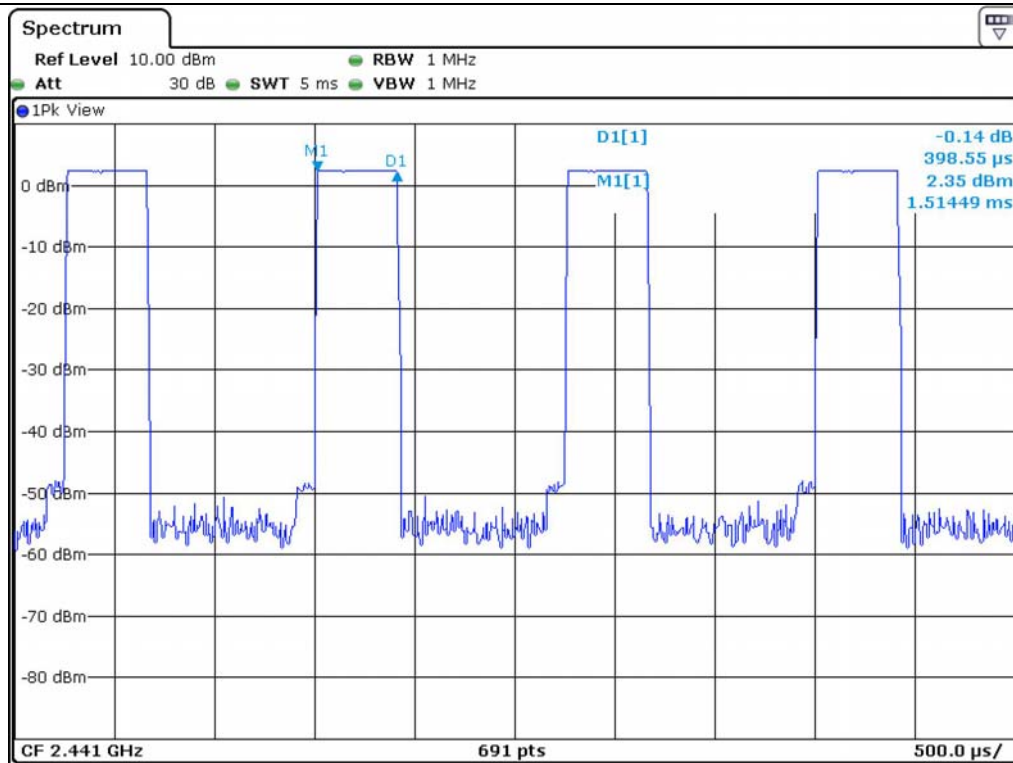

DH1

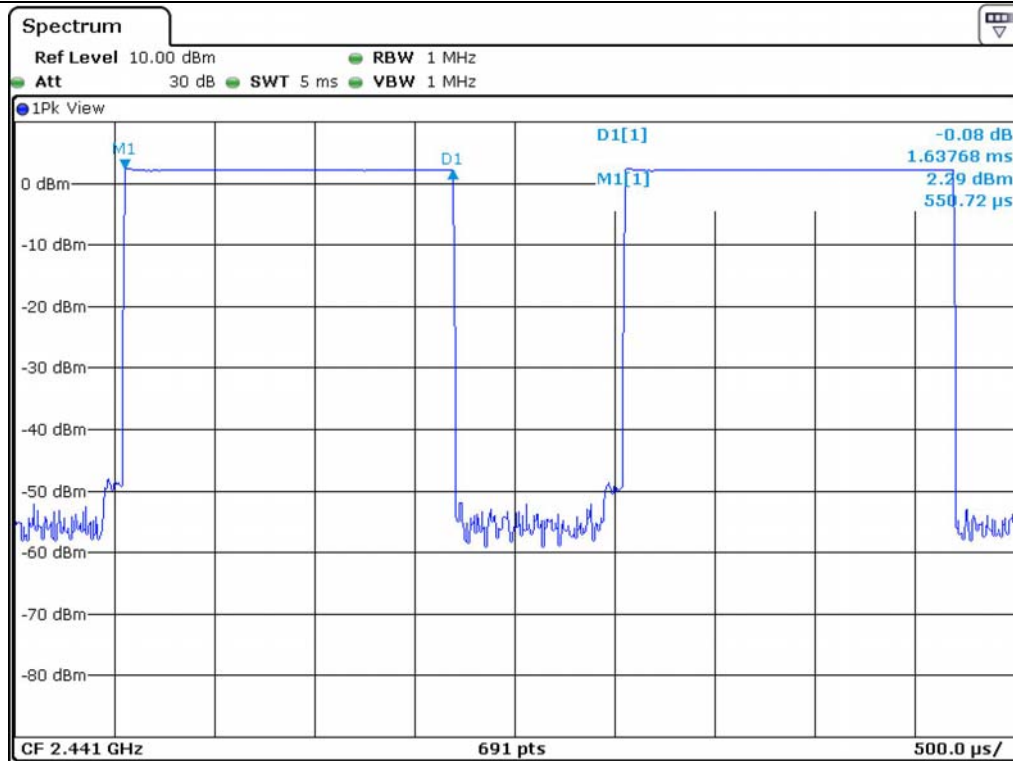

DH3

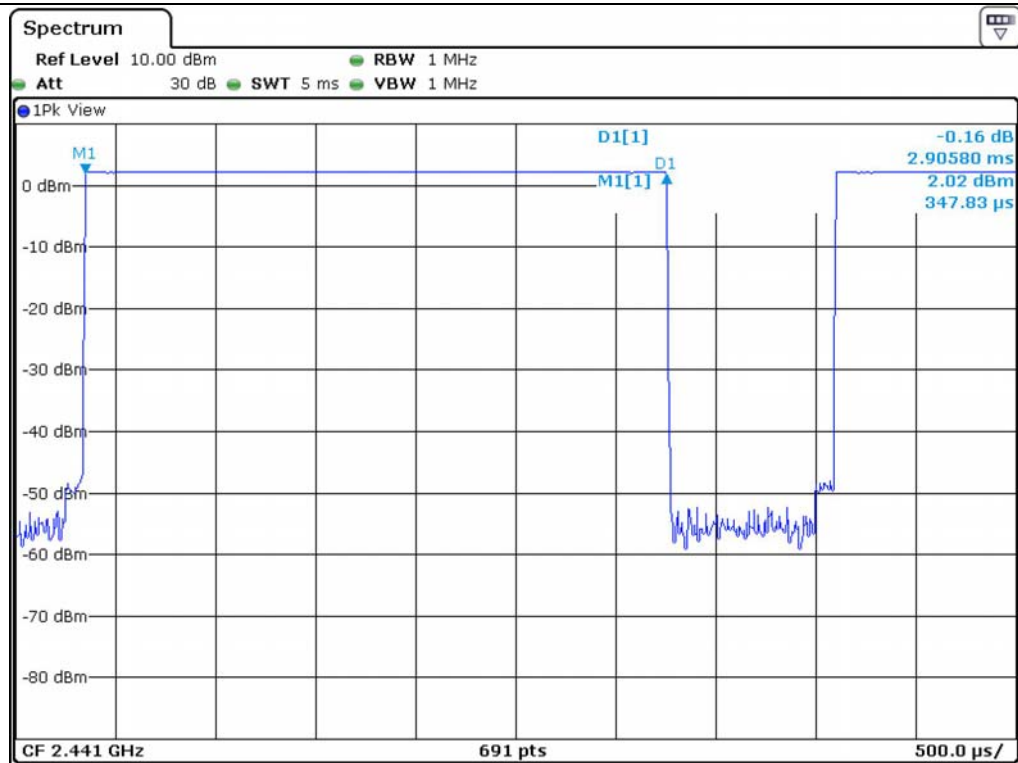

DH5


7.5 MAXIMUM PEAK OUTPUT POWER

7.5.1 Operating environment

Temperature : 25 °C
Relative humidity : 43 % R.H.

7.5.2 Test set-up

The maximum peak output power was measured with the power meter connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.

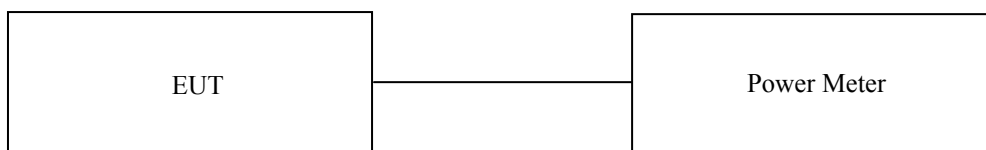

7.5.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)

All test equipment used is calibrated on a regular basis.


7.5.4 Test data

- Test Date : March 02, 2012 ~ March 06, 2012
- Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402	3.29	30	-26.71
Middle	2 441	2.48	30	-27.52
High	2 480	2.16	30	-27.84




Tested by: Chang-Uk, Jun / Engineer

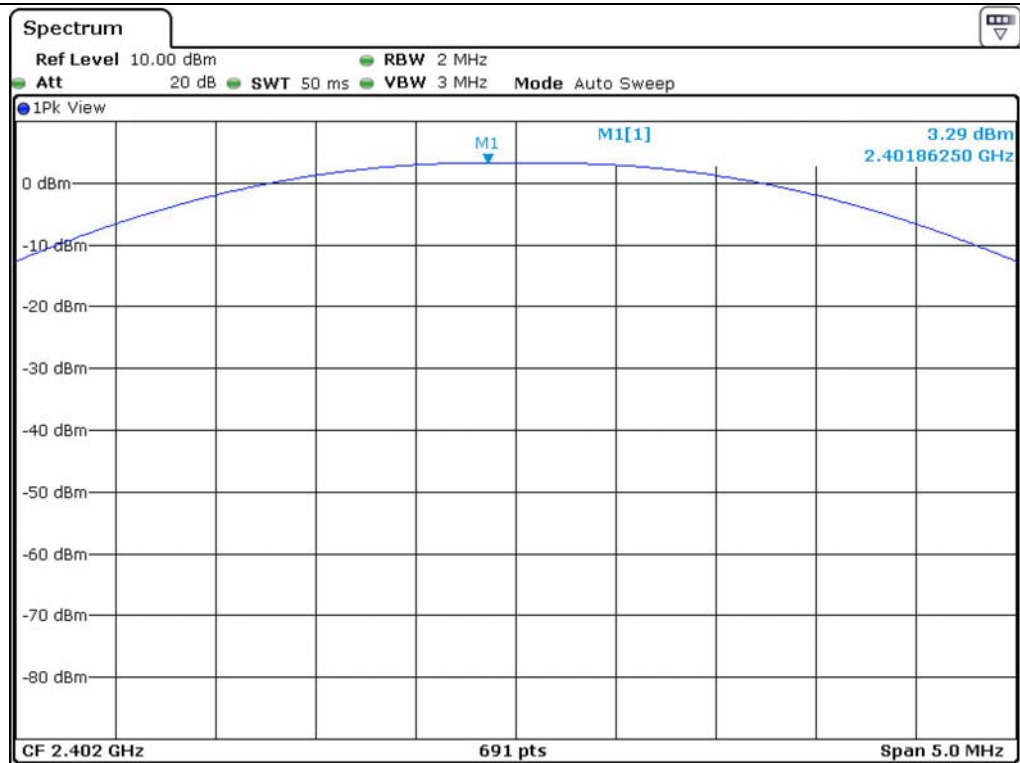

Low Channel

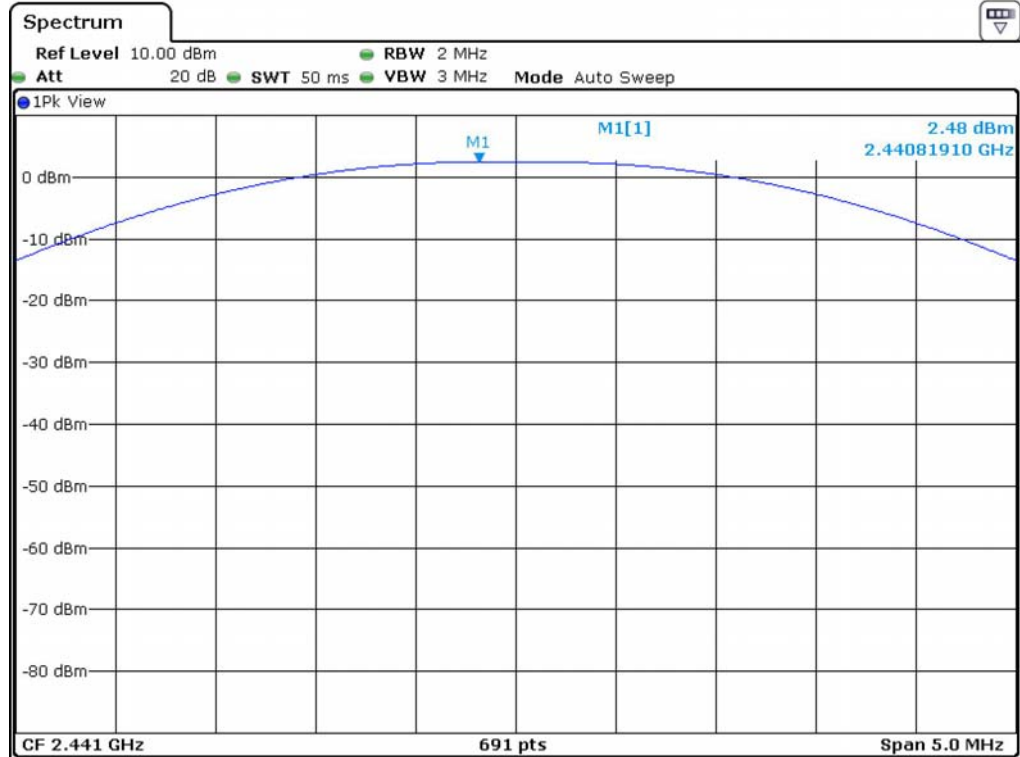

Middle Channel

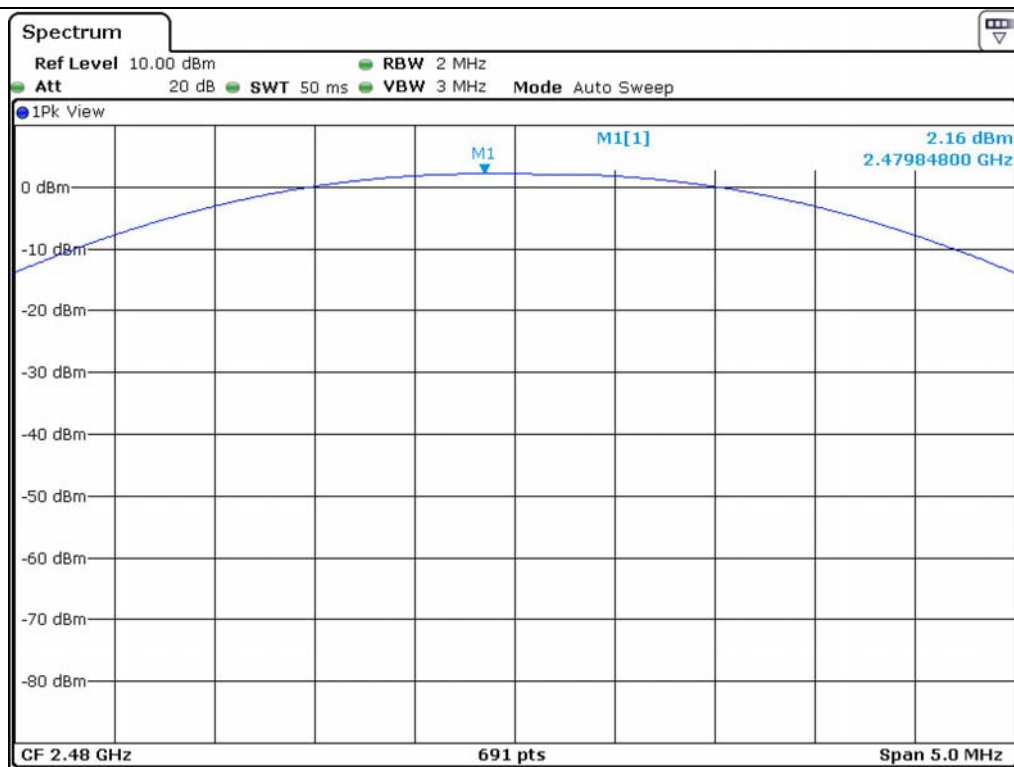

High Channel


7.6 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

7.6.1 Operating environment

Temperature : 25 °C
Relative humidity : 43 % R.H.

7.6.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

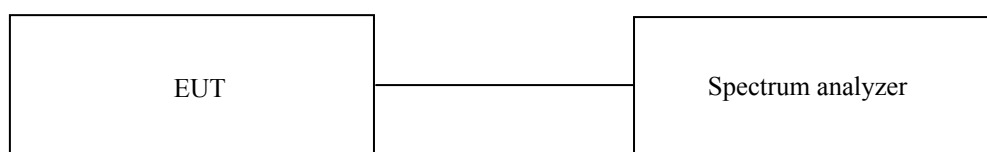

7.6.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 9 KHz to 25 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


7.6.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
□ -	ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Feb. 06, 2012 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	SEP.11, 2012 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Oct 11, 2012(1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101372	Aug. 29, 2011(1Y)
■ -	SCU-18	Rohde & Schwarz	PRE-AMPLIFIER	10041	Dec 15, 2011 (1Y)
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	VULB9163-202	May 27, 2010(2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D294	Jun. 17, 2011 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jun. 17, 2011 (2Y)
■ -	HFH2-Z2	Rohde & Schwarz	Loop Antenna	889 285 / 26	Nov. 08, 2010(2Y)

All test equipment used is calibrated on a regular basis.


7.6.5. Test data

7.6.5.1. Test data for conducted emission

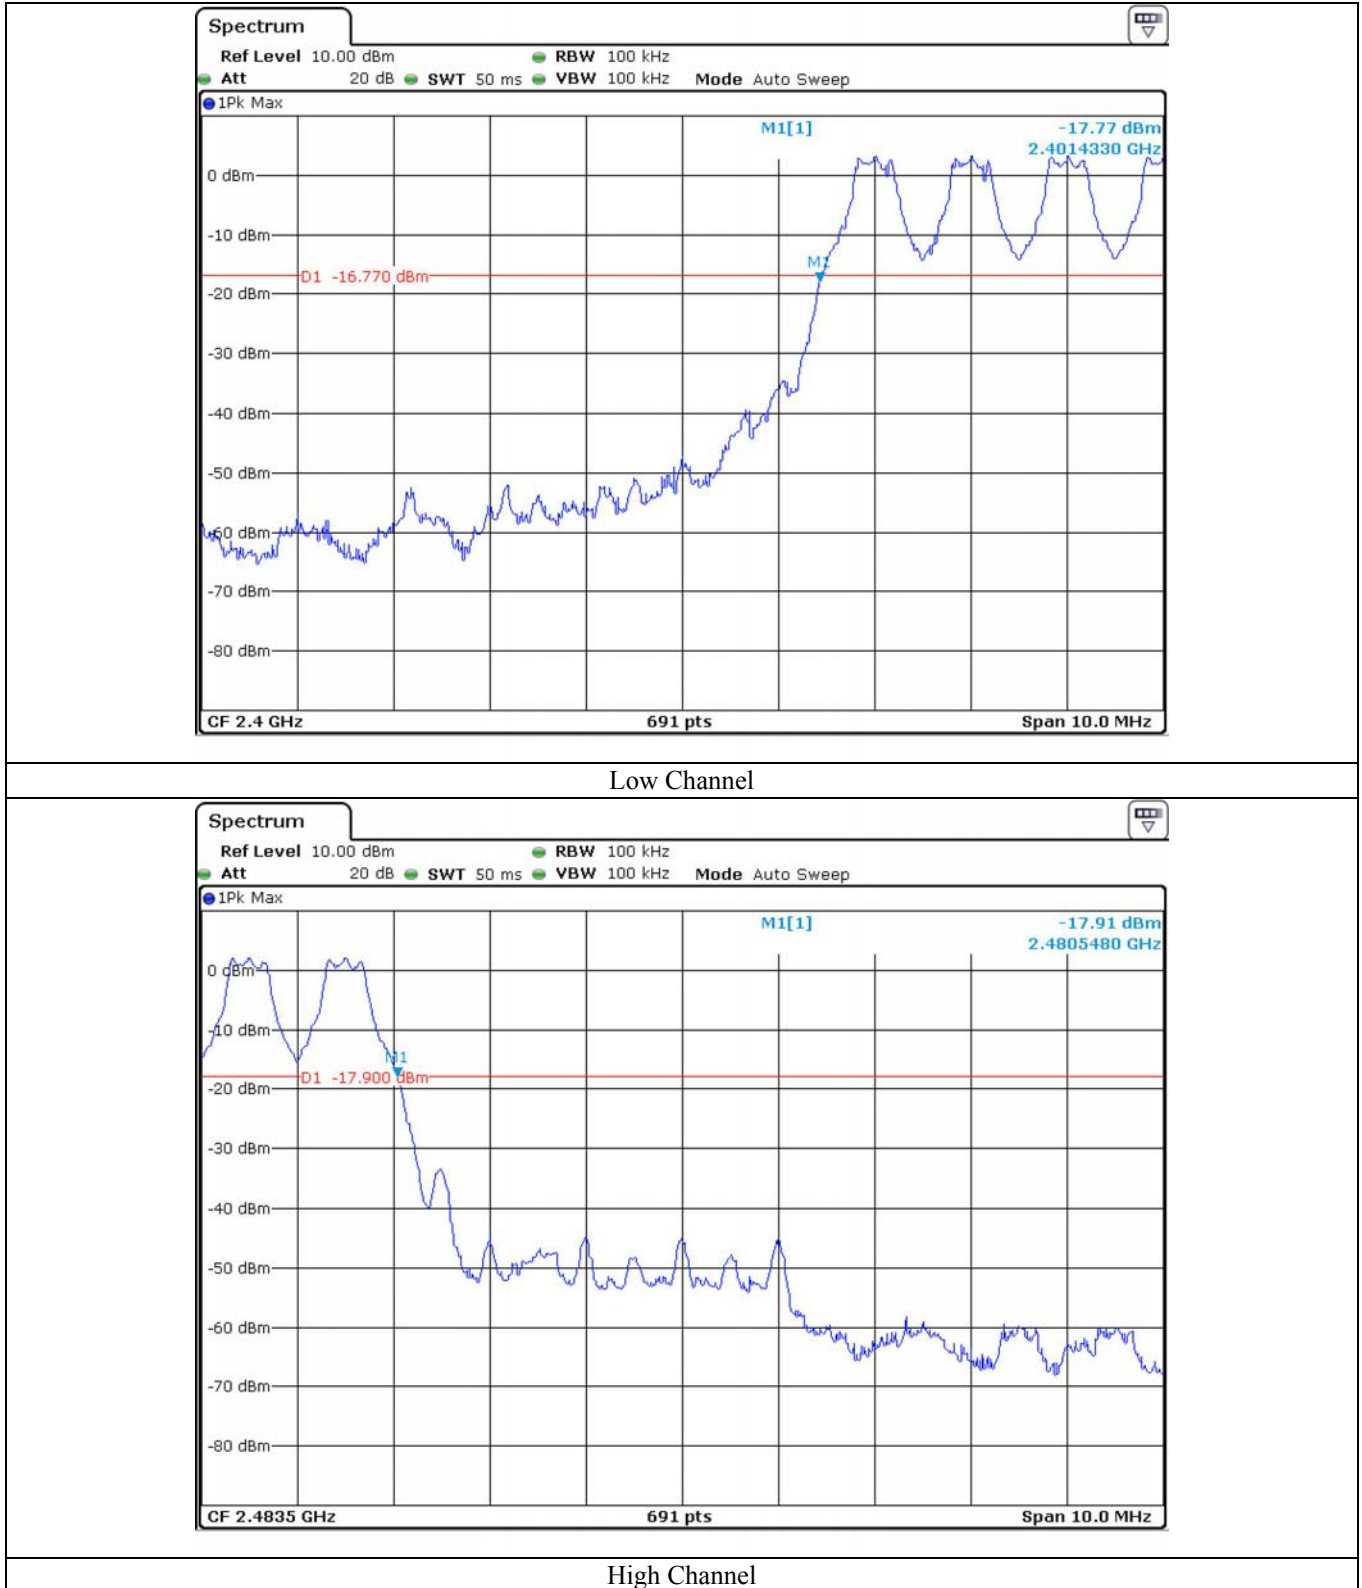


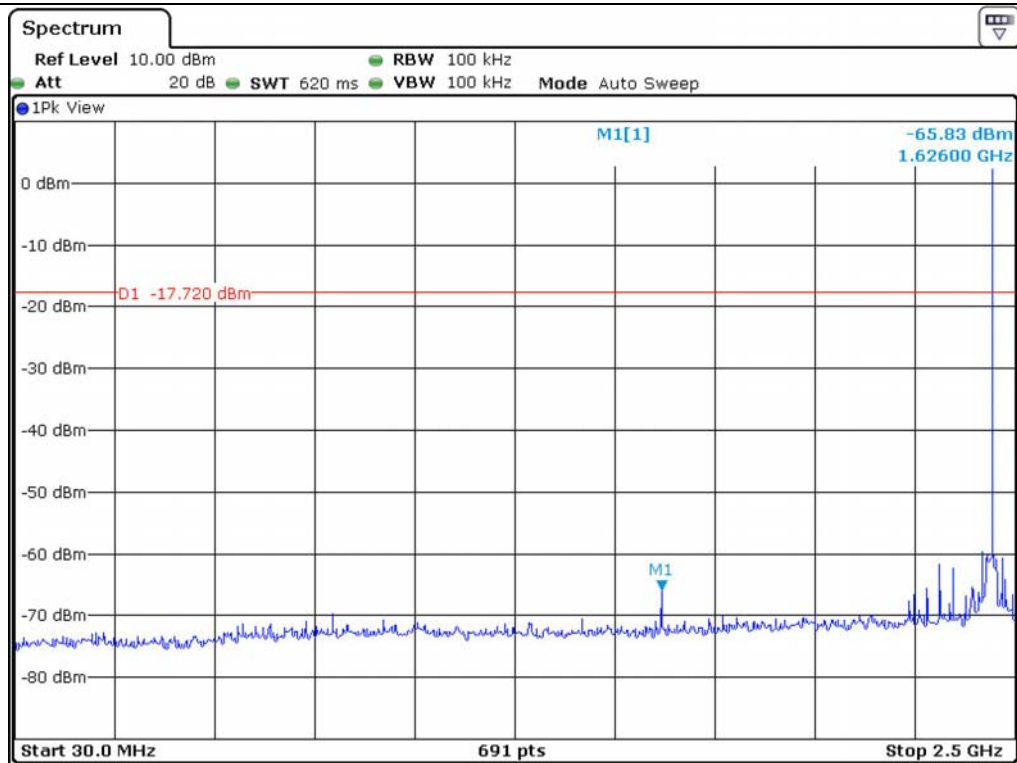


Low Channel

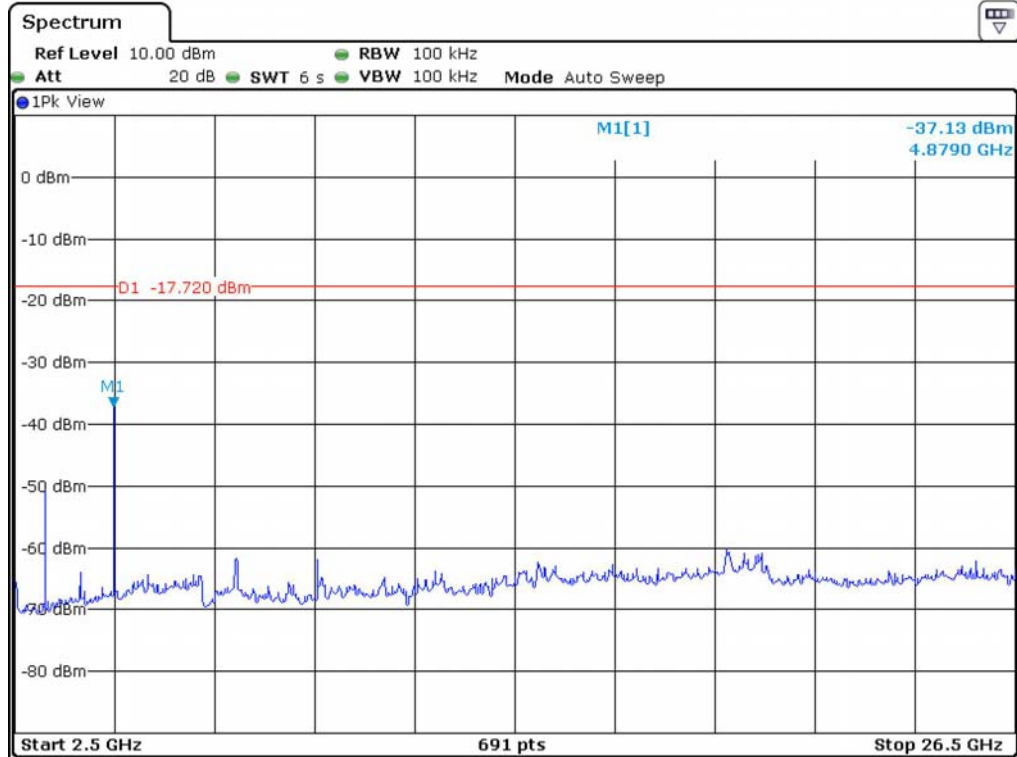


Low Channel

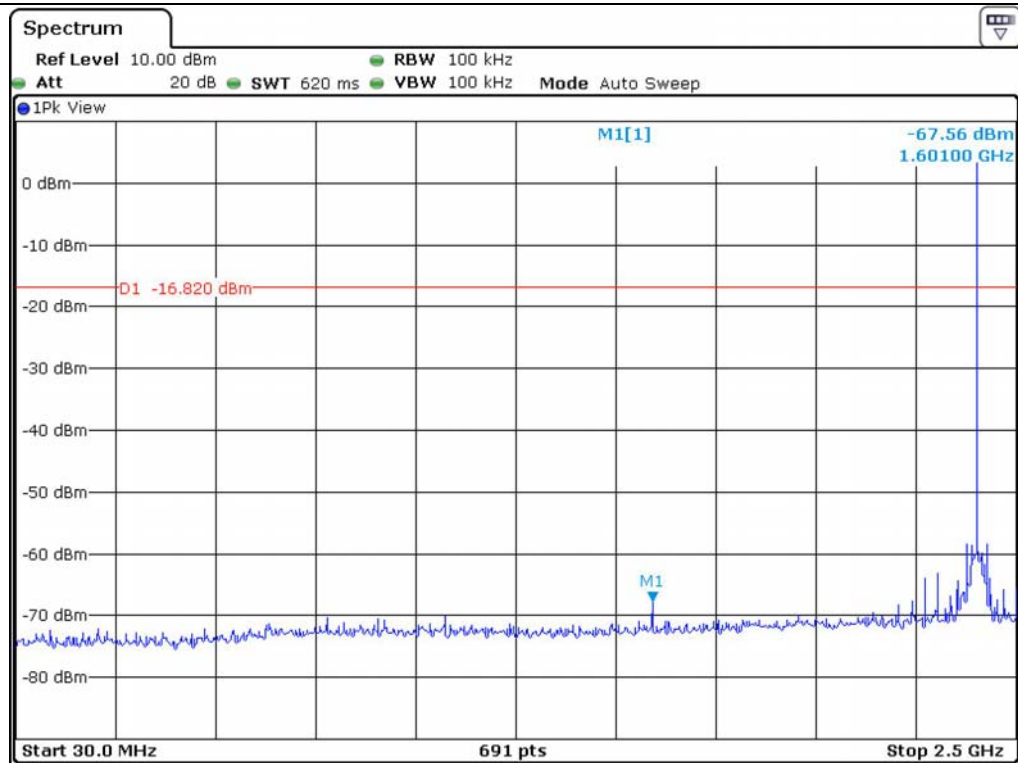


Middle Channel

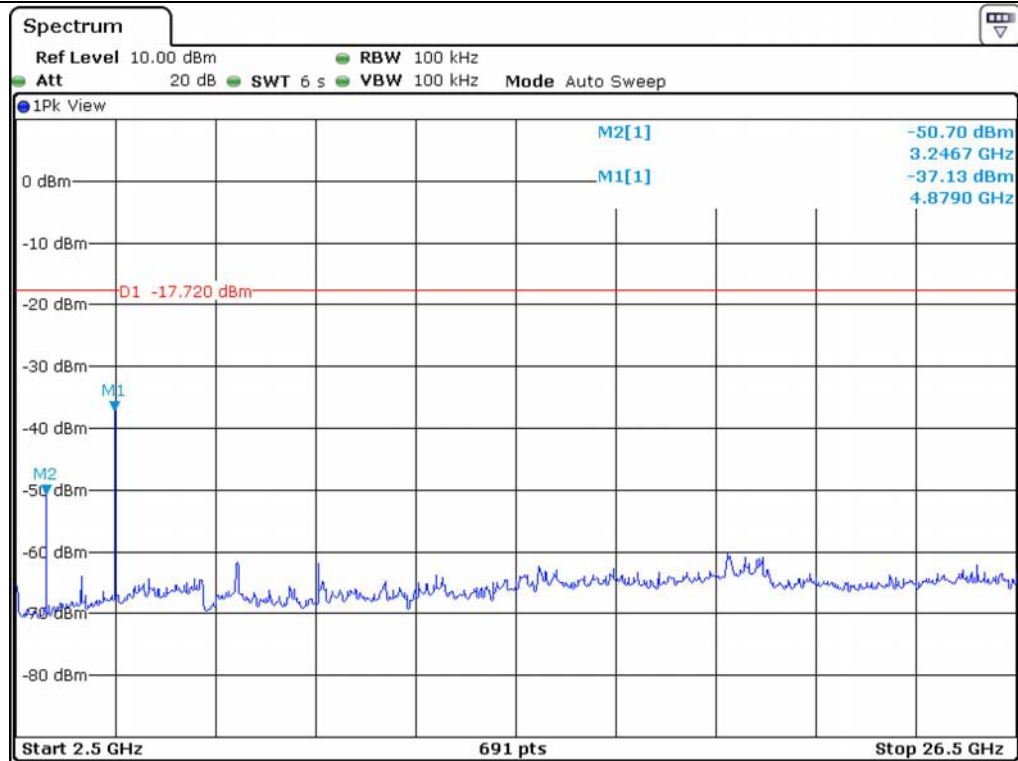

Middle Channel

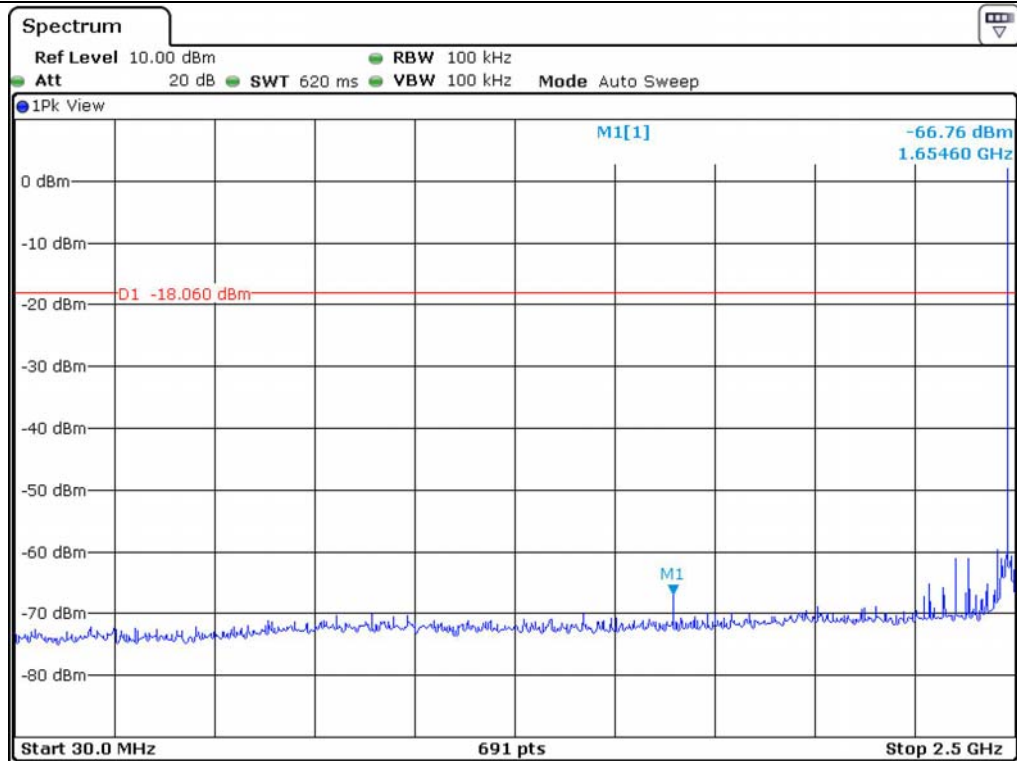

High Channel

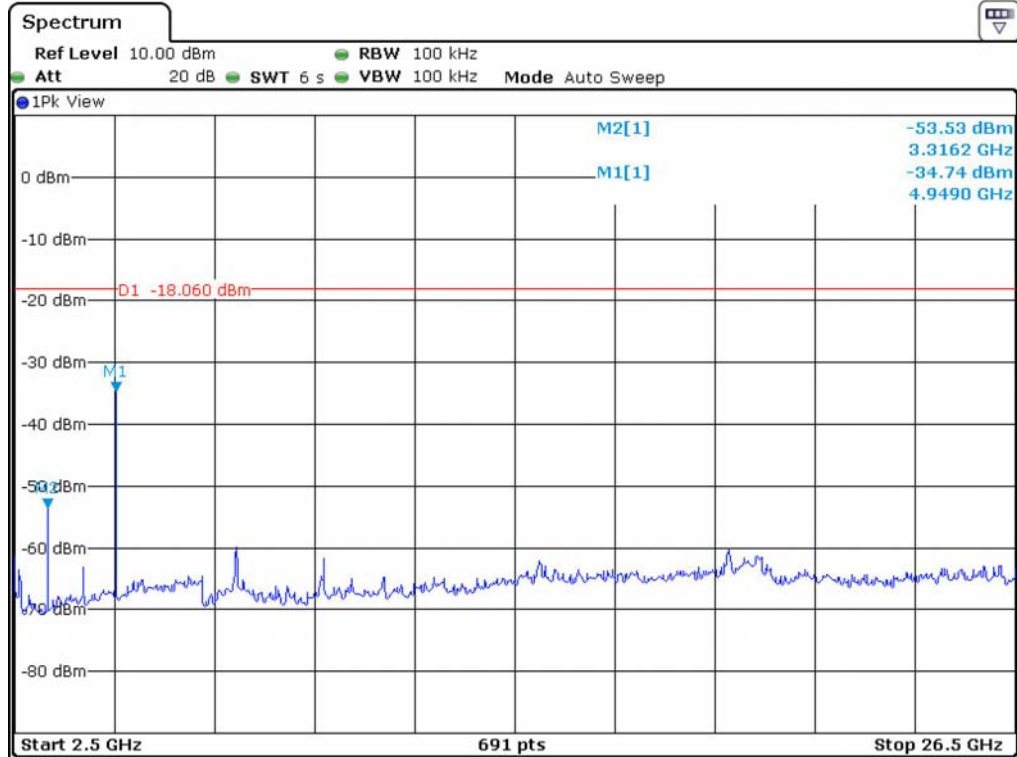

High Channel

7.6.5.2. Test data for radiated emission


7.6.5.2.1. Radiated Emission which fall in the Restricted Band

- . Test Date : March 02, 2012 ~ March 06, 2012
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Measurement distance : 3 m
- . Operating Condition : Low / High Channel
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2386.16	48.27	Peak	H	27.05	3.13	43.10	35.35	74.00	-38.65
2376.08	31.04	Average	H				18.12	54.00	-35.88
2385.84	48.04	Peak	V				35.12	74.00	-38.88
2376.08	30.14	Average	V				17.22	54.00	-36.78
Test Data for High Channel									
2483.50	52.14	Peak	H	27.05	3.13	43.10	39.52	74.00	-34.48
	33.60	Average	H				20.98	54.00	-33.02
	54.42	Peak	V				41.80	74.00	-32.20
	35.55	Average	V				22.93	54.00	-31.07

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



Tested by: Chang-Uk, Jun / Engineer

7.6.5.2.2. Spurious & Harmonic Radiated Emission above 1 GHz

- Test Date : March 02, 2012 ~ March 06, 2012
- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 402.00	96.87	Peak	H	27.09	3.16	43.10	84.02		84.02
	99.75	Peak	V				86.90		86.90
4 804.00*	55.08	Peak	H	31.07	4.10	42.80	47.45	74.00	-26.55
	46.14	Average	H				38.51	54.00	-15.49
	58.74	Peak	V				51.11	74.00	-22.89
	49.23	Average	V				41.60	54.00	-12.40
Test Data for Middle Channel									
2 441.00	94.72	Peak	H	27.19	3.16	43.10	81.97		81.97
	93.95	Peak	V				81.20		81.20
4 882.00*	50.36	Peak	H	31.19	4.12	42.80	42.87	74.00	-31.13
	40.54	Average	H				33.05	54.00	-20.95
	50.85	Peak	V				43.36	74.00	-30.64
	39.28	Average	V				31.79	54.00	-22.21

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

-Continued

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for High Channel									
2 480.00	90.24	Peak	H	27.30	3.16	43.10	77.60		77.60
	94.31	Peak	V				81.40		81.40
4 960.00*	49.35	Peak	H	31.32	4.15	42.80	42.02	74.00	-31.98
	37.12	Average	H				29.79	54.00	-24.21
	50.53	Peak	V				43.20	74.00	-30.80
	39.20	Average	V				31.87	54.00	-22.13

Tabulated test data for Restricted Band


Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band




Tested by: Chang-Uk, Jun / Engineer

7.6.5.2.3. Spurious Radiated Emission below 1 GHz


- Test Date : April 20, 2012
- Resolution bandwidth : 120 kHz
- Frequency range : 30 MHz ~ 1 000 MHz
- Measurement distance : 3 m
- Channel : Low

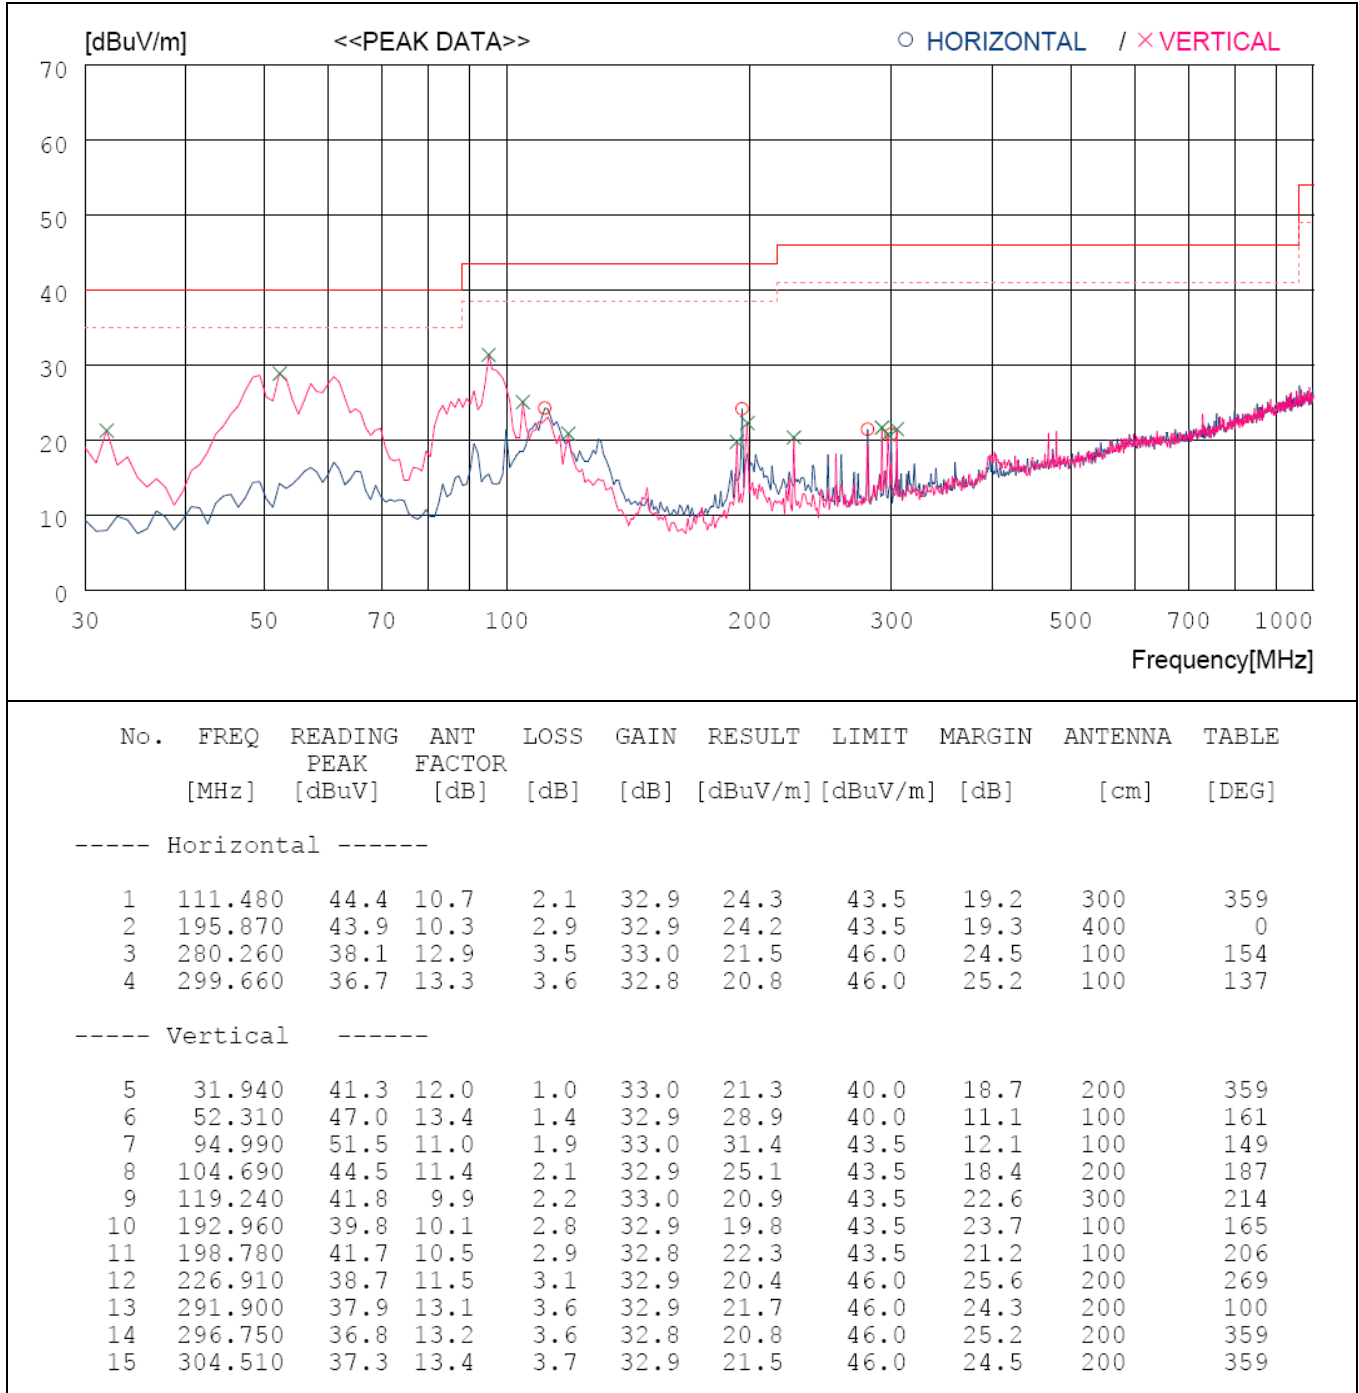

-. Channel : Middle

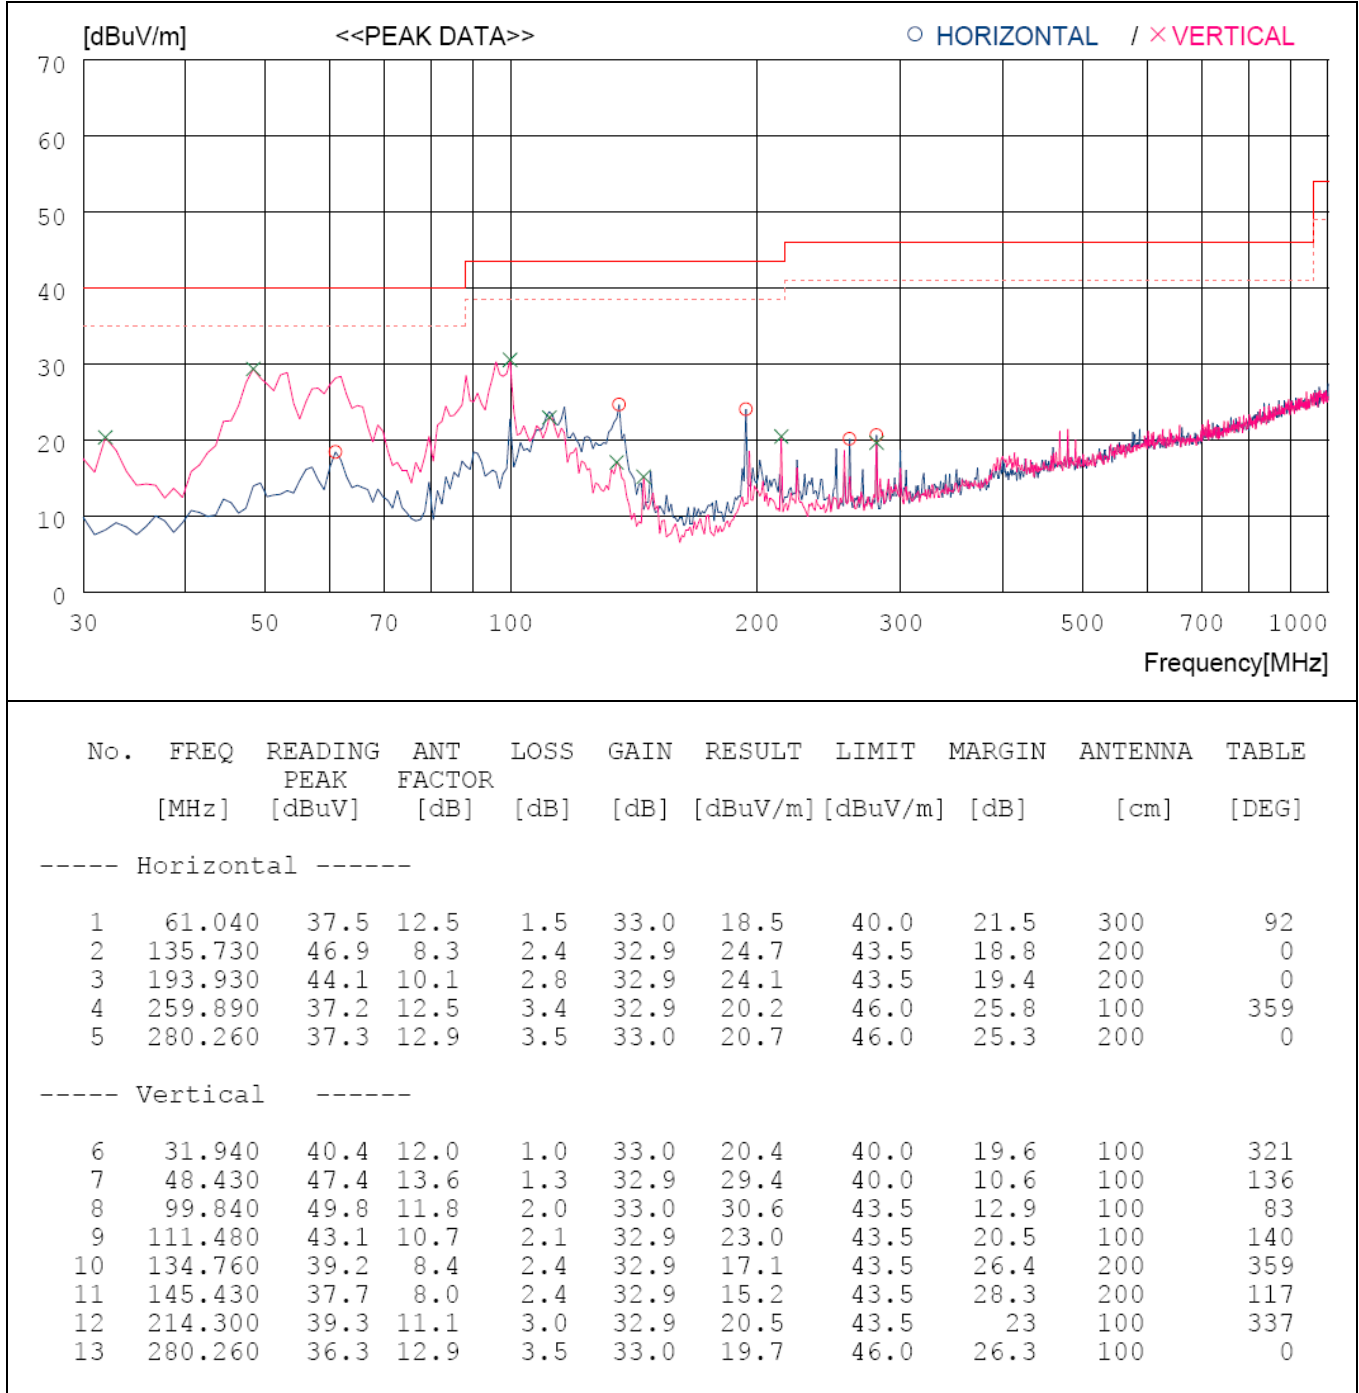

-. Channel : High

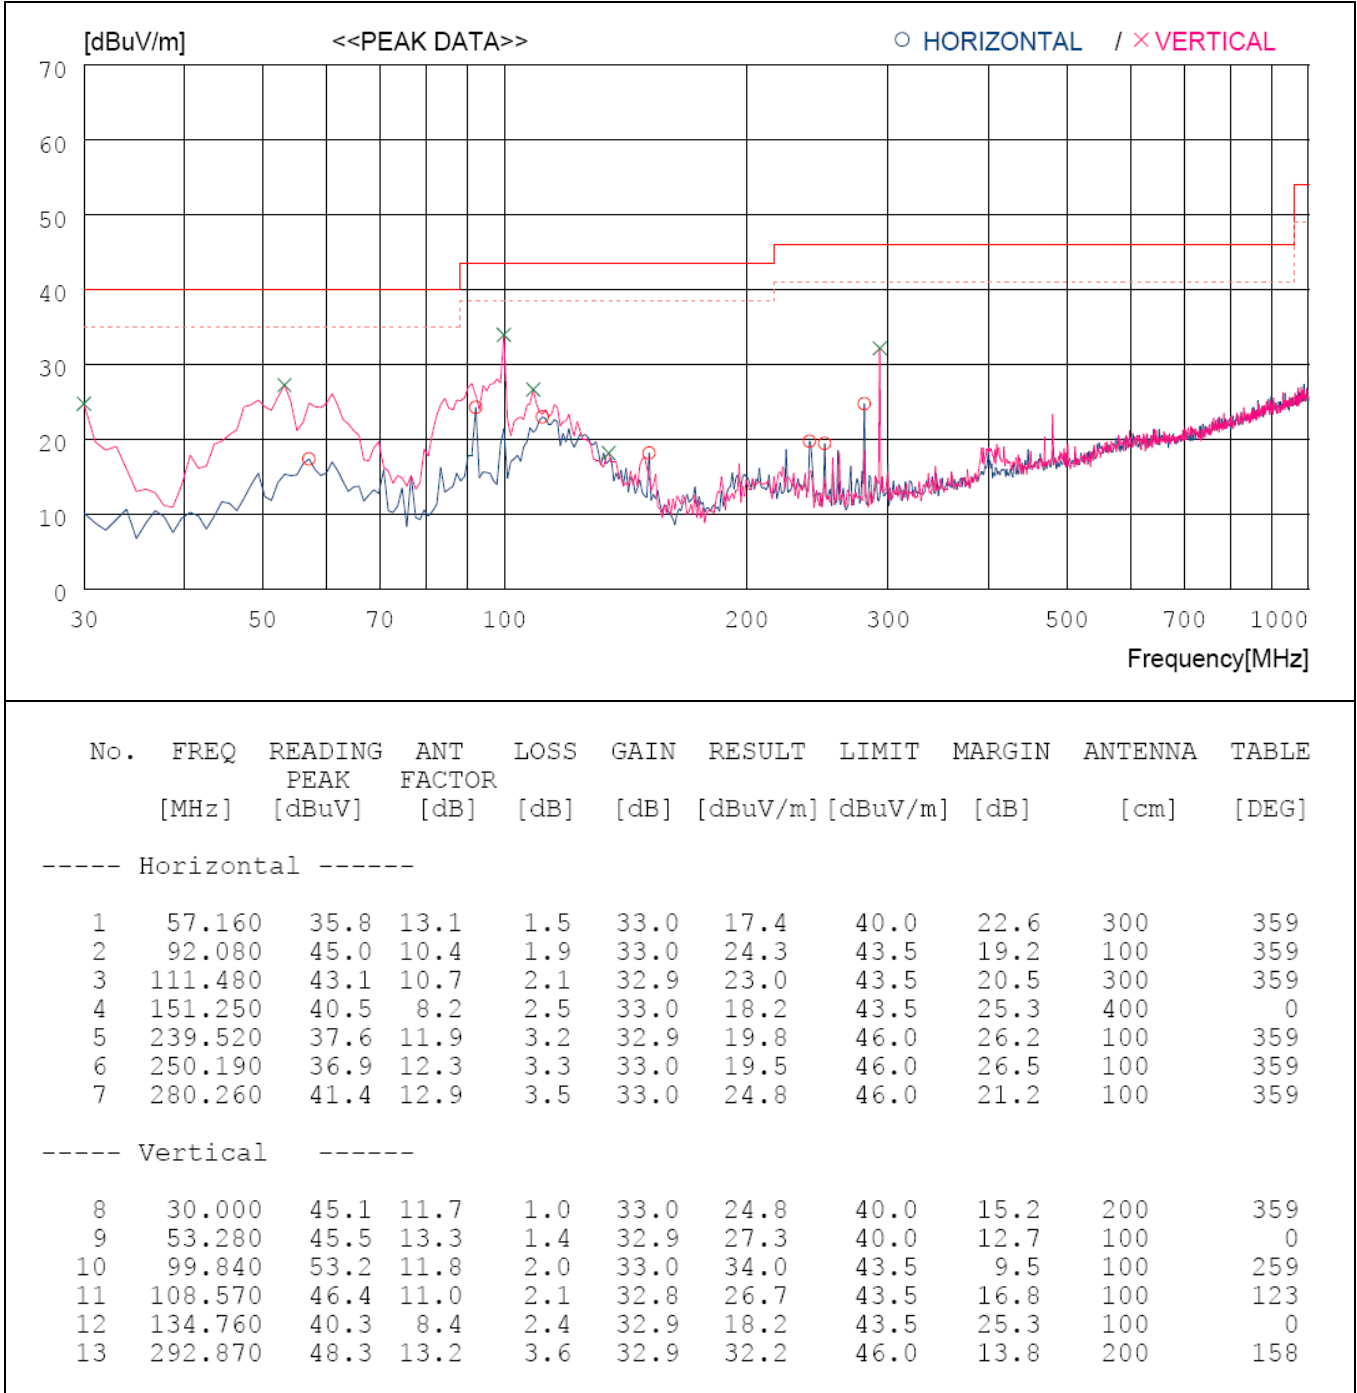

Remark: Margin (dB) = Limit – Result and Result = Reading Peak + Antenna Factor + Loss - Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.


Tested by: Chang-Uk, Jun / Engineer

7.6.5.2.4 Test Data for Below 30 MHz

Humidity Level : 47 % R.H. Temperature: 22 °C
Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
Frequency range : 9 kHz ~ 30 MHz
Measurement distance : 3 m
Result : PASSED

EUT : Mobile(Card Acceptance)Printer Date: March 06, 2012
Detector : CISPR Quasi-Peak (Resolution Bandwidth: 9 kHz)

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Chang-Uk, Jun / Engineer

8. Conducted Emission Test

Humidity Level : 41 % R.H.

Temperature: 23 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107(a)

Type of Test : CLASS B

Result : PASSED BY -10.90 dB at 0.53 MHz under quasi-peak detector mode

EUT : Mobile(Card Acceptance) Printer

Date: April 19, 2012


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Quasi-Peak (dBμV)		Margin (dB)
		Emission level	Q.P Limits	
0.18	N	41.70	64.30	-22.60
0.30	N	38.30	60.20	-21.90
0.33	N	39.70	59.30	-19.60
0.53	N	45.10	56.00	-10.90
0.56	N	39.30	56.00	-16.70
0.98	H	33.40	56.00	-22.60
Frequency (MHz)	Line	Average (dBμV)		Margin (dB)
		Emission level	Limits	
0.52	N	28.60	46.00	-17.40
0.57	N	20.70	46.00	-25.30
1.05	N	17.60	46.00	-28.40
1.54	N	18.10	46.00	-27.90


Line Conducted Emissions Tabulated Data

Remark: "H": Hot Line, "N": Neutral Line.

See next page for an overview sweep performed with quasi-peak and average detector.



Tested by: Chang-Uk, Jun / Engineer

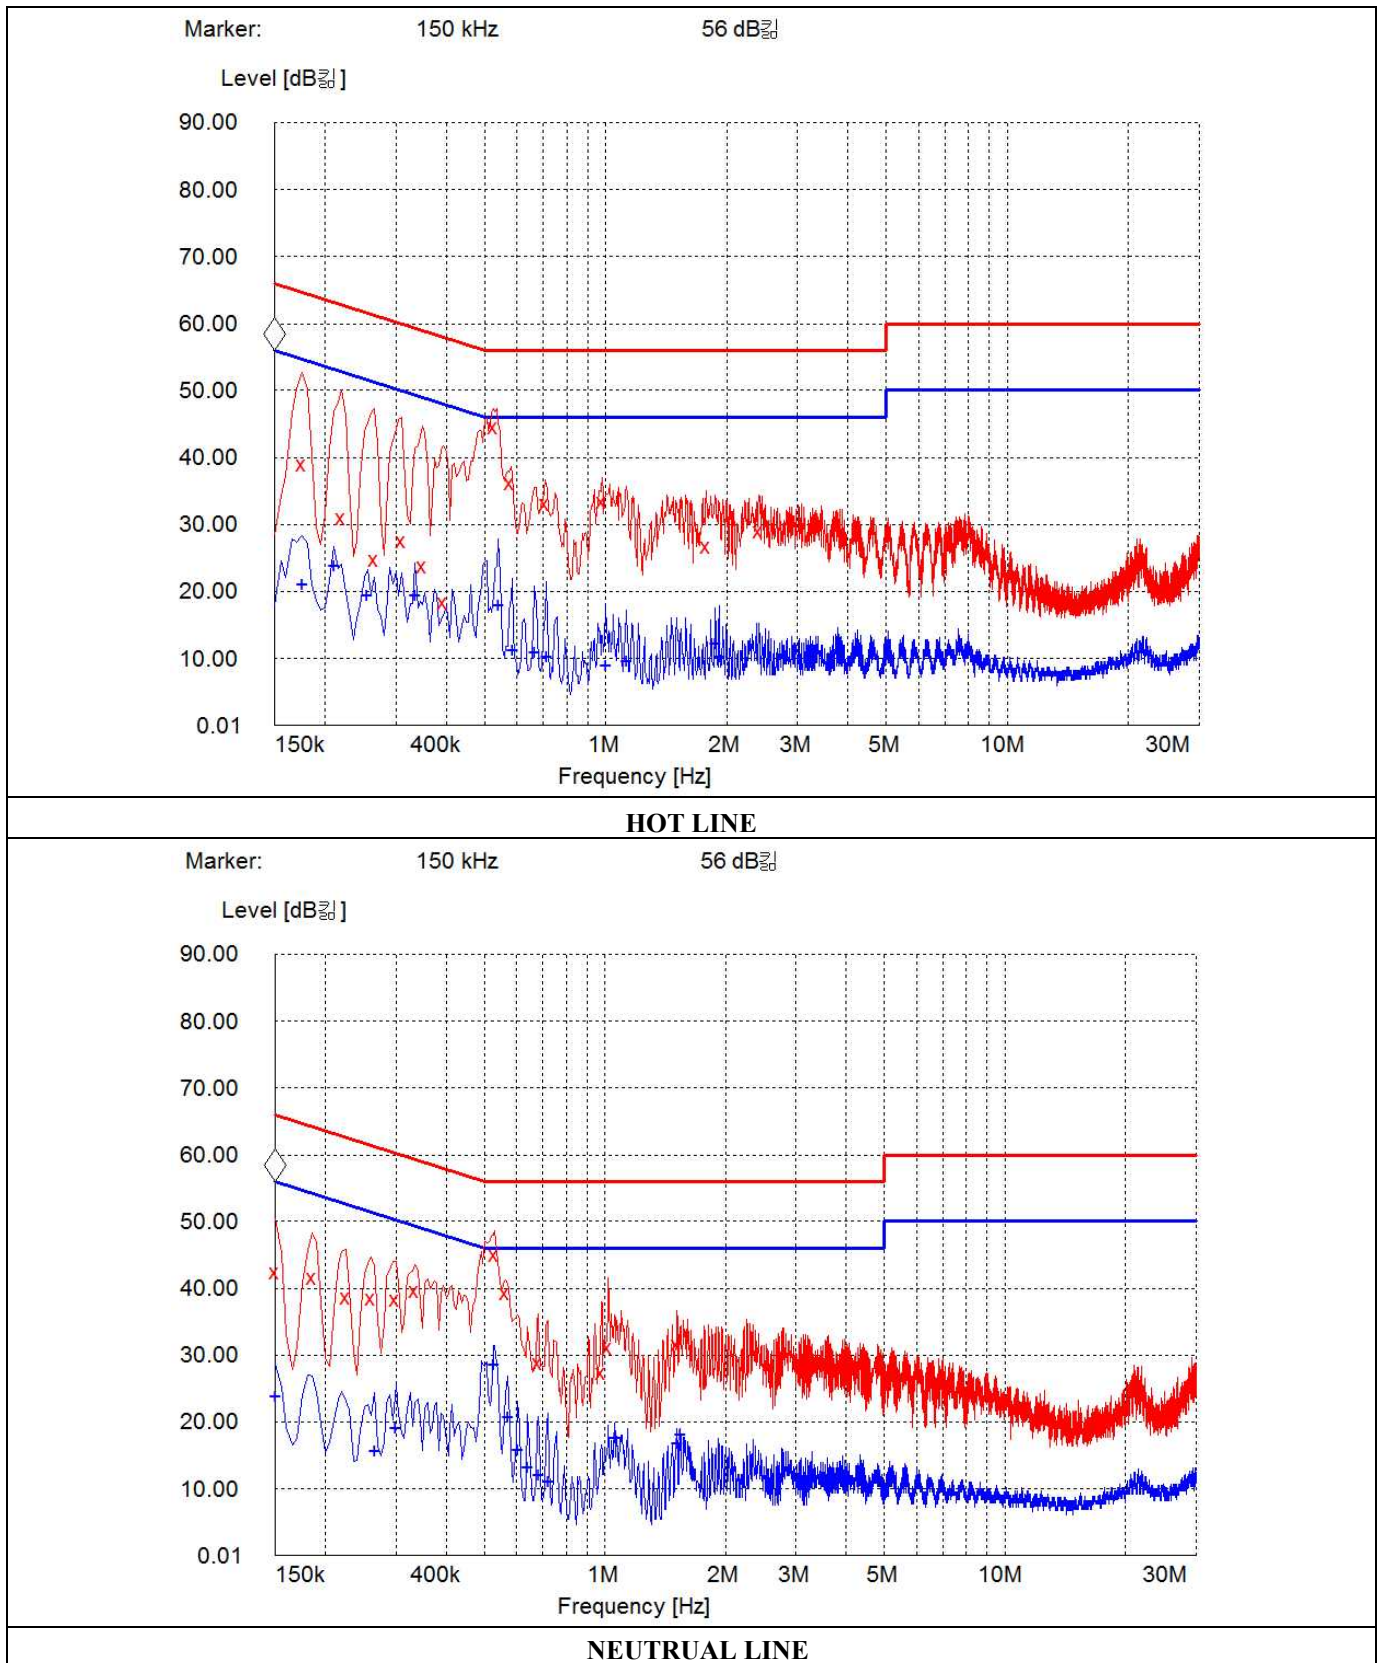

9. RADIO FREQUENCY EXPOSURE

9.1 RF Exposure Limit

According to the FCC rule §1.1310, the limit for General Population/Uncontrolled exposure is 1 mW/cm² for the device operating 1 500 ~ 100 000 MHz.

9.2 EUT Description

Kind of EUT	Mobile(Card Acceptance) Printer
Operating Frequency Band	☐ Wireless Microphone: 494.000 MHz ~ 501.000 MHz and 498.200 MHz ~ 505.200 MHz ☐ WLAN: 2 412 MHz ~ 2 462 MHz ☐ WLAN: 5 180 MHz ~ 5 320 MHz / 5 500 MHz ~ 5 700 MHz ☐ WLAN: 5 745 MHz ~ 5 825 MHz ☒ Bluetooth: 2 402 MHz ~ 2 480 MHz
Device Category	☒ Portable (< 20 cm separation) ☐ Mobile (> 20 cm separation) ☐ Others
Max. Output Power	3.29 dBm (2.13 mW)
Used Antenna	Chip antenna
Used Antenna Gain	0.69 dBi
Exposure Evaluation Applied	☐ MPE ☐ SAR ☒ N/A

9.3 Test Result

According to the rule, §1.1307(b) (1) and §2.1093, portable devices using Bluetooth technology according to §15.247 are exempt from the regulation.

Also, SAR evaluation is not required for the PORTABLE Device while its maximum output power is lower than threshold:
 $60/f(\text{GHz}) = 60/2.480 = 24.19 \text{ mW}$.

So, the device meets the RF exposure requirement.