

wijit HUB
wjthub
Owner's manual




Wijit Home automation – affordable control of your devices from your Smartphone or Tablets

Product Features –

- Control any plugs-in device
- Use your apple or android phone or tablet
- Control anywhere you have an internet connection
- Nice compact design
- Ultra easy setup
- Helps conserve energy

Installing the App and setup wijit hub & wijit plug -

- 1.) To get started, just download the wijit APP in the GOOGLE PLAY or APPLE APP Store.
- 2.) Upon opening the App, you will be greeted with a simple guided setup

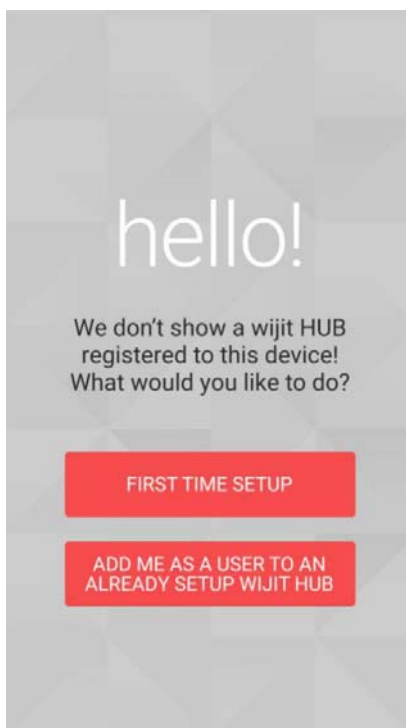

Step 1 - Startup page



Step 2 - Scan QR code to binding the Hub

[< BACK](#)

Great! Now plug in your wijit HUB within range of your router.

Your wijit HUB will connect to

Network Name

Please enter the WiFi password.

—

☐ Hidden SSID? ☐ Show Password

Now, on your wijit HUB, press and hold the **SYNC** button for 3 seconds. When the LED is **flashing**, hit the "CONNECT" button below!

CONNECT

Step 3 – Setup the WiFi connection

Success!

It looks like your wijit HUB is all setup!

You can now start adding devices!
You can also now easily add additional users on other mobile devices for even more control.

What would you like to do?

ADD DEVICES

EXIT SETUP

Step 4 – Success page for confirm setup

[< BACK](#)

Device Name:

—

Device Identifier:

1 2 3 4 5 6 7

NOTE: Once setup, the device identifier can not be altered. In order to change the Identifier, you will need to manually reset the device and reinstall

NEXT

DEVICES SETUP

Step 5 – Add device to control

[< BACK](#)

Great! Now, let's sync your device.

Press and HOLD the "SYNC" button on the wijit for 3 seconds, until the **RED LED** turns ON.

While the **RED LED** is ON, press the "SYNC WIJIT" button below.


SYNC WIJIT

Repeat the process above for all the wijits you would like to turn on and off at the same time. When you are done syncing, hit the "FINISHED" button below!

FINISHED

DEVICES SETUP

Step 6 – Sync device to Wijit PLUG

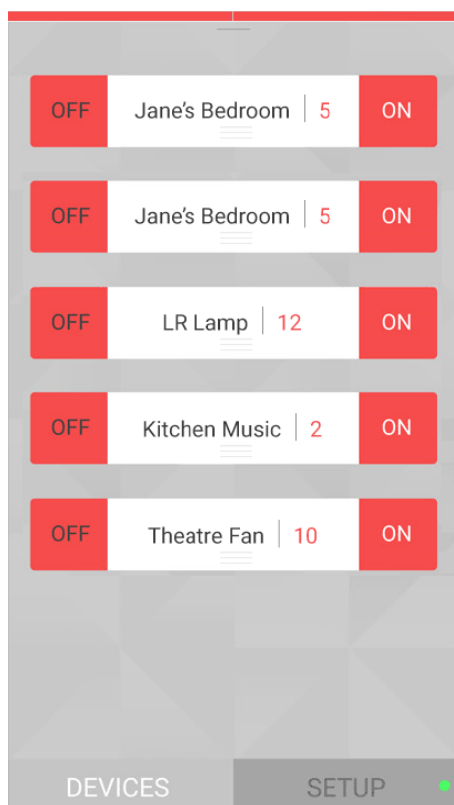

Step 7 – Control Device Main Page

Technical Specification -

WIJIT HUB

Operating Voltage:	120V ~ / 60Hz
Operating Current:	< 40mA
RF Frequency:	2400MHz – 2483.5MHz (WiFi transceiver) 433.92MHz +/- 100KHz (Radio Transmitter)
WiFi Protocol:	802.11b/g/n
Radio Signal Range :	30 meters (open area)
Working Temperature :	-10°C to + 50°C (operation) -20°C to +70°C (storage)
Dimension :	68.2 (L) x 68.2 (W) x 29.5 (H) mm

WIJIT PLUG

Operating Voltage:	120V ~ / 60Hz
Operating Current:	< 20mA capacitive
Output Loading:	10A Resistive max (1200W)
Receiver Sensitivity:	≥ -105dBm (direct measurement)
RF Frequency:	433.92MHz (only receive)
Ambient temperature:	-10°C to + 50°C (operation) -20°C to +70°C (storage)
Dimension:	68.2 (L) x 68.2 (W) x 29.5 (H) mm

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To comply with FCC RF exposure compliance requirements, this grant is applicable to only mobile configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.