

**Test Report
Application for
Certification
on Behalf of**

GLOBAL DIGITECH CO., LTD.

**EUT: Bluetooth Speaker
Model Number: BT3000**

**FCC ID:
O6TGD MALLBT3000**

**Prepared for:
GLOBAL DIGITECH CO., LTD.
No.25 Alley 56 Lane 245 Sec.4 Bade Rd, Taipei, Taiwan**

**Report By : Global EMC Standard Tech. Corp.
No.3, Baodoucuokeng, Linkou Dist.,
New Taipei City 244, Taiwan(R.O.C.)
Tel : 886-2-2603-5321
Fax : 886-2-2603-5325**

1. Test results given in this report only relate to the specimen(s) tested, measured.
2. This report is the property of GesTek, and shall not be reproduced, other than in full, without the written consent of GesTek.
3. The client should not use it to claim product endorsement by TAF, NEMKO or any government agencies.
4. All data in this report are traceable to national standard or international standard.

TABLE OF CONTENTS

DESCRIPTION	PAGE
1. CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 PRODUCTION DESCRIPTION	4
2.2 OPERATIONAL DESCRIPTION	6
2.3 TEST MODES & EUT COMPONENTS DESCRIPTION	6
2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS	6
2.5 CONFIGURATION OF THE TESTED SYSTEM	7
2.6 LAB AMBIENT	8
2.7 TEST FACILITY AUTHORIZATION AND ACCREDITATION	8
2.8 TEST SETUP	9
2.9 EUT OPERATING CONDITIONS	9
3. CONDUCTED EMISSION MEASUREMENT	10
3.1 TEST EQUIPMENTS	10
3.2 BLOCK DIAGRAM OF TEST SETUP	10
3.3 CONDUCTED EMISSION LIMITS	11
3.4 TEST CONFIGURATION ON MEASUREMENT	11
3.5 CONDUCTED EMISSION MEASURED PROCEDURE AND DATA	11
3.6 OPERATING CONDITIONS OF THE EUT	11
3.7 CONDUCTED EMISSION MEASUREMENT RESULTS	12
4. RADIATION EMISSION DATA	14
4.1 TEST EQUIPMENT	14
4.2 OPEN TEST SITE SETUP DIAGRAM	15
4.3 RADIATED EMISSION LIMIT	16
4.4 TEST CONFIGURATION	16
4.5 OPERATING CONDITION OF EUT	16
4.6 RADIATED EMISSION DATA	16
4.7 RADIATED EMISSIONS MEASUREMENT RESULTS	17
5. PEAK POWER OUTPUT	71
5.1 TEST EQUIPMENT	71
5.2 BLOCK DIAGRAM OF TEST SETUP	71
5.3 PEAK POWER OUTPUT LIMIT	71
5.4 TEST RESULT	72
6. BAND EDGE	78
6.1 TEST EQUIPMENT	78
6.2 BLOCK DIAGRAM OF TEST SETUP	78
6.3 BAND EDGE LIMIT	78
6.4 EUT CONFIGURATION	79
6.5 OPERATING CONDITION OF EUT	79
6.6 TEST RELULT	80
7. OCCUPIED BANDWIDTH	98
7.1 TEST EQUIPMENT	98
7.2 BLOCK DIAGRAM OF TEST SETUP	98
7.3 LIMIT	98
7.4 TEST RESULT	99
8. CHANNEL SEPARATION	105
8.1 TEST EQUIPMENT	105
8.2 BLOCK DIAGRAM OF TEST SETUP	105
8.3 LIMIT	105
8.4 TEST RESULT	106
9. DWELL TIME	112
9.1 TEST EQUIPMENT	112
9.2 BLOCK DIAGRAM OF TEST SETUP	112
9.3 LIMIT	112
9.4 TEST RESULT	113
10. HOPPING CHANNEL	140
10.1 TEST EQUIPMENT	140
10.2 BLOCK DIAGRAM OF TEST SETUP	140
10.3 LIMIT	140
10.4 TEST RELULT	141
11. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	147
12. PHOTOGRAPHS FOR TEST	148
12.1 TEST PHOTOGRAPHS FOR CONDUCTION	148
12.2 TEST PHOTOGRAPHS FOR RADIATION	149
13. PHOTOGRAPHS FOR PRODUCT	151

1. CERTIFICATION

Applicant : GLOBAL DIGITECH CO., LTD.

Applicant Address : No.25 Alley 56 Lane 245 Sec.4 Bade Rd, Taipei, Taiwan
EUT Description : Bluetooth Speaker
Model Number : BT3000
Serial Number : N/A
Brade Name : GDMALL
FCC ID : O6TGDMALLBT3000
Tested Power Supply : DC 5V
Manufacturer : GLOBAL DIGITECH CO., LTD.
Manufacturer Address : No7 Xialian Road, Xiangang, Changan Town, Dongguan, PRC

MEASUREMENT PROCEDURES USED:

- ☒ **CFR 47, Part 15** Radio Frequency Device Subpart C Intentional Radiators: 2012
☒ **ANSI C63.4** Methods of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz To 40GHz: 2009

☒ **FCC Public Notice DA 00-705**

THE MEASUREMENT SHOWN IN THE ATTACHMENT WAS MADE IN ACCORDANCE WITH THE PROCEDURES INDICATED, AND THE MAXIMUM ENERGY EMITTED BY THE EQUIPMENT WAS FOUND TO BE WITHIN THE ABOVE LIMITS APPLICABLE.


Sample Received Date : April 26, 2013

Date of Test : April 26, 2013 –May 08, 2013


Issue Date : May 16, 2013

In order to ensure the quality and accuracy of this document, the contents have been thoroughly reviewed by the following qualified personnel from GesTek Lab.


Documented By :


Alison Chu / Report Author

Tested By :


Albert Tzeng / Eng. Dept. Engineer

Approved By :


Tony Tsai / eng. Dept. Manager

2. GENERAL INFORMATION

2.1 PRODUCTION DESCRIPTION

Product Name	: Bluetooth Speaker
Model Number	: BT3000
Serial Number	: N/A
Brade Name	: GDMALL
FCC ID	: O6TGDMALLBT3000
Modulation Type	: GFSK, $\pi/4$ PSK, 8DPSK
Antenna Gain	: 1.13dBi
Antenna Type	: Printed on PCB
Frequencg Range	: 2402MHz to 2480MHz
Channel Number	: 79 Channel
Channel Control	: Control by Software
Working Voltage	: DC 5V

Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

Note:

1. This device is a Bluetooth Speaker include Bluetooth function and this report is for transmitter.
2. Test of channel was included the lowest 、middle and highest frequency in highest data rate and to perform the test, then record on this report.
3. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.

2.2 OPERATIONAL DESCRIPTION

The device is Bluetooth Speaker have Bluetooth function and can link with Bluetooth dongle for control PC.

Another information please refer to users manual.

2.3 TEST MODES & EUT COMPONENTS DESCRIPTION

EUT: Bluetooth Speaker, M/N: BT3000, The EUT tested with Notebook PC.			
Test Mode	Mode 1- GFSK	Mode 2- $\pi/4$ PSK	Mode 3- 8DPSK

2.4 SUMMARY OF TEST PROCEDURE AND TEST RESULTS

Test Item	Applied Standard Section	Test Result
Conducted Emission	15.207 ANSI C63.4 Section 7, 13, Annex I	Pass (refer to section 3.7)
Radiated Emission	15.209,15.247(d) ANSI C63.4 Section 8,13 Annex I	Pass (refer to section 4.7)
Peak Power Output	15.247(b), ANSI C63.4 Section 13 & Annex I	Pass (refer to section 5.4)
Band Edge	15.247(d) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 6.6)
Occupied Bandwidth	15.247(a) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 7.4)
Channel Separation	15.247(a) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 8.4)
Dwell Time	15.247(a) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 9.4)
Hopping Channel	15.247(b) , ANSI C63.4 Section 13 & Annex I	Pass (refer to section 10.4)

2.5 CONFIGURATION OF THE TESTED SYSTEM

The FCC IDs/Types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Item	Device	No.	Configuration
1	NOTEBOOK	DELL NB 1	Model Number : Latitude D600 PPO5L BSMI ID : R33002 FCC ID : E2K24CLNS Serial Number : 10826163280 C.P.U : Intel Pentium M 1.4G HZ DDR : PC2100 256MB WIRELESS LAN : Manufacturer :INTEL CARD : M/N:WM3A2100 FCC ID: E2K24CLNS H.D.D. : Manufacturer : FUJITSU 30G M/N: MHT2030AT S/N:NN15T421E09C BSMI ID:D33073 DVD-ROM : Manufacturer :DELL M/N:5W299-A01 BATTERY : Manufacturer :DELL Li-ion MODULE : M/N:6Y270 RATING:14.8V 220mAh AC ADAPTOR : Manufacturer :DELL M/N: PA-1650-05D S/N:CN-05U092-48010-39N-227C INPUT:AC 100-240 V~1.5A 50-60HZ Shielded, Undetachable, 2.5m

Note: All the peripherals above were selected specifically after confirming that there is no impact on test results.

2.6 LAB AMBIENT

Items	Range Requirement
Temperature (°C)	10-40
Humidity (%RH)	10-90
Barometric pressure (mbar)	860-1060

2.7 TEST FACILITY AUTHORIZATION AND ACCREDITATION

Global EMC Standard Tech. Corp. is accredited in respect of laboratory and the accreditation criteria is ISO/IEC 17025: 2005.


AUTHORIZATION	
FCC SITE DESCRIPTION	Aug. 10, 1995 /Aug. 25, 1998 File on FCC Engineering Laboratory Federal Communication Commission 7435 Oakland Mills Road Columbia, MD 21046 Reference 31040/SIT1300F2 Designation Number: TW1031 (No. 15, Neighborhood 3, Ruishukeng, Linkou Dist., New Taipei City, Taiwan) Designation Number: TW1032 (No.3, Baodoucuokeng, Linkou Dist., New Taipei City, Taiwan)

ACCREDITATION	
Taiwan Accreditation Foundation (TAF)	Recognized by the Council of Taiwan Accreditation Foundation and confirmed to meet the requirements of ISO/IEC 17025. Registration No.: 1082 Registration on TAF effective through Sep. 18, 2015

2.8 TEST SETUP

BLOCK DIAGRAM OF CONNECTIONS BETWEEN EUT AND SIMULATORS

Bluetooth Tx Mode + AC Conducted Emission Mode

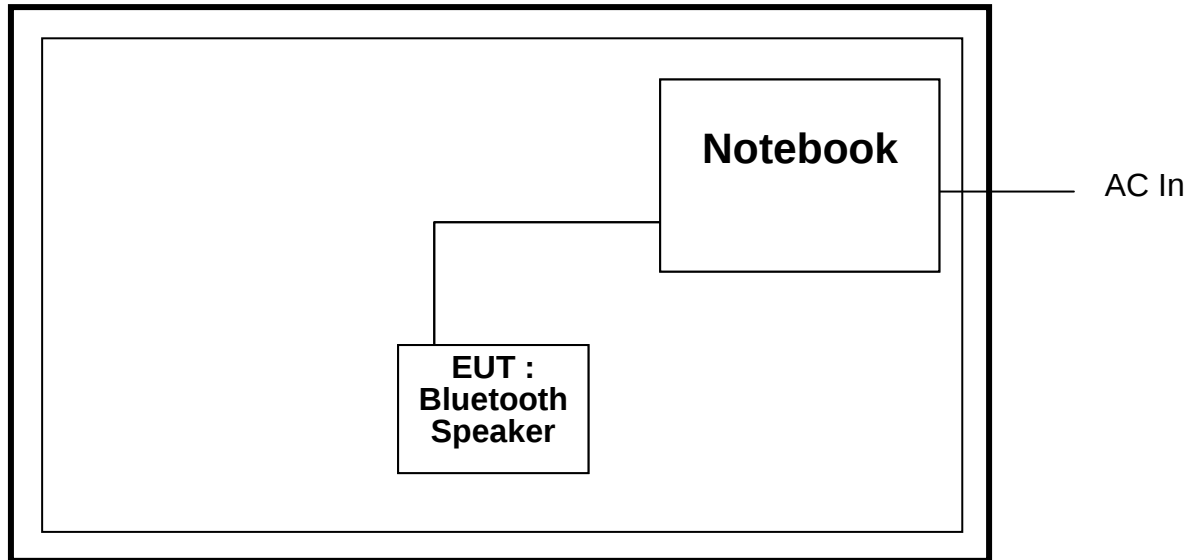

2.9 EUT OPERATING CONDITIONS

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

1. Setup the EUT as shown on 2.7.
2. Turn on the power of all equipments.
3. Execute the test program (EDR_RF_test_Customer).
4. Choose the test mode and setup the parameter.
5. Test it.
6. Repeat the above steps.

3. CONDUCTED EMISSION MEASUREMENT

3.1 TEST EQUIPMENTS


Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	TEST RECEIVER	RS	ESCS30	100393	2014.04.08
2	L.I.S.N.(EUT)	RS	ENV216	100006	2013.08.12
3	L.I.S.N.(AE)	ROLF HEINE	NNB-2/16Z	98091	2013.08.12
4	CABLE	GTK	N/A	GTK-E-A154-01	2014.01.11
5	50 Ohm Terminator	JYEBAO	BNC 0/3GHz	GTK-E-A424-01	2014.06.17
6	Software	FARAD	EZ-EMC	2A1.1(USB)	N/A

Note: 1. All equipments are calibrated and will be valid only for a period of 1 year.

2. The test was performed at GTK Shielded Room B5.

3.2 BLOCK DIAGRAM OF TEST SETUP

3.2.1 TEST SETUP FOR EMISSION MEASUREMENT AT MAINS TERMINAL

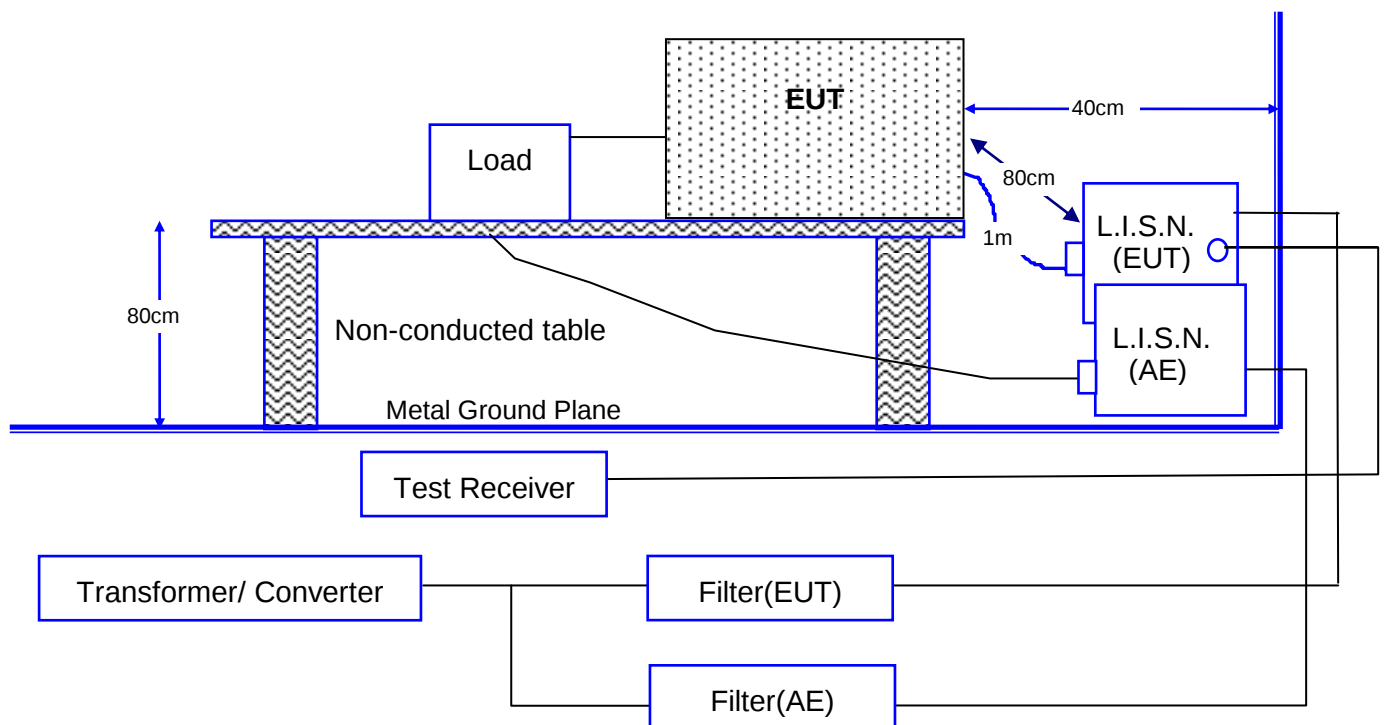

Note: This is a representative setup diagram for Table-top EUT.

For Floor-standing EUT, the table will be removed with all others setup condition remain the same.

3.3 CONDUCTED EMISSION LIMITS

3.3.1 CONDUCTED EMISSION LIMITS (MAINS TERMINAL)

Frequency	Voltage dB(μV)	
	Class B	
MHz	QUASI-PEAK	AVERAGE
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.0	56	46
5.0 to 30	60	50

Remarks: In the Above Table, the tighter limit applies at the band edges.

3.4 TEST CONFIGURATION ON MEASUREMENT

The equipments that are listed in section 4.1 are installed on Conducted Power Line Test in order to meet the requirement of the Commission and operating in a manner, which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 4.3, was placed on a non-conductive table whose total height equal to 80cm. Powered from one L.I.S.N. which signal output to receiver, and the other peripherals was powered from another L.I.S.N. which signal output was terminated by 50Ω.

3.5 CONDUCTED EMISSION MEASURED PROCEDURE AND DATA

3.5.1 CONDUCTED EMISSION (MAINS TERMINAL)

The measurement range of conducted emission, which is from 0.15 MHz to 30 MHz, was scan for peak emission curve of all the test modes. The worst mode is then measured using an average and/or quasi peak detector and record at least the disturbance levels and the frequencies of the six highest disturbances. The final measurement value is equal to the receiver reading plus the correction factor. If AMN insertion loss is more than 0.5dB, automatically the receiver will add the correction factor to the reading level.

3.6 OPERATING CONDITIONS OF THE EUT

Same as conducted emission measurement, which is listed in 2.9

3.7 CONDUCTED EMISSION MEASUREMENT RESULTS

Date of Test	May 02, 2013	Temperature	20 °C
EUT	Bluetooth Speaker	Humidity	59 %
Test Mode	Charge Mode	Display Pattern	Program
Test Power Supply	AC 110V/60Hz		


Line

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV	Limit dBμV	Over Limit dB	Detector
1	0.1861	44.30	9.81	54.11	64.21	-10.10	QP
2	★0.1861	35.16	9.81	44.97	54.21	-9.24	AVG
3	0.2084	43.52	9.81	53.33	63.27	-9.94	QP
4	0.2084	26.49	9.81	36.30	53.27	-16.97	AVG
5	0.2551	35.18	9.82	45.00	61.59	-16.59	QP
6	0.2551	23.51	9.82	33.33	51.59	-18.26	AVG
7	0.5202	26.88	9.86	36.74	56.00	-19.26	QP
8	0.5202	14.59	9.86	24.45	46.00	-21.55	AVG
9	0.5434	33.12	9.86	42.98	56.00	-13.02	QP
10	0.5434	17.91	9.86	27.77	46.00	-18.23	AVG
11	0.8102	32.62	9.86	42.48	56.00	-13.52	QP
12	0.8102	18.04	9.86	27.90	46.00	-18.10	AVG

Remarks :

1. All readings are Quasi-peak and Average values.
2. Measurement = Reading + Factor (Could have ±0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = L.I.S.N. insertion loss + cable loss
5. “★” means that this data is the worst case measurement level.
6. The measurement uncertainty is 3.93 dB.

Line

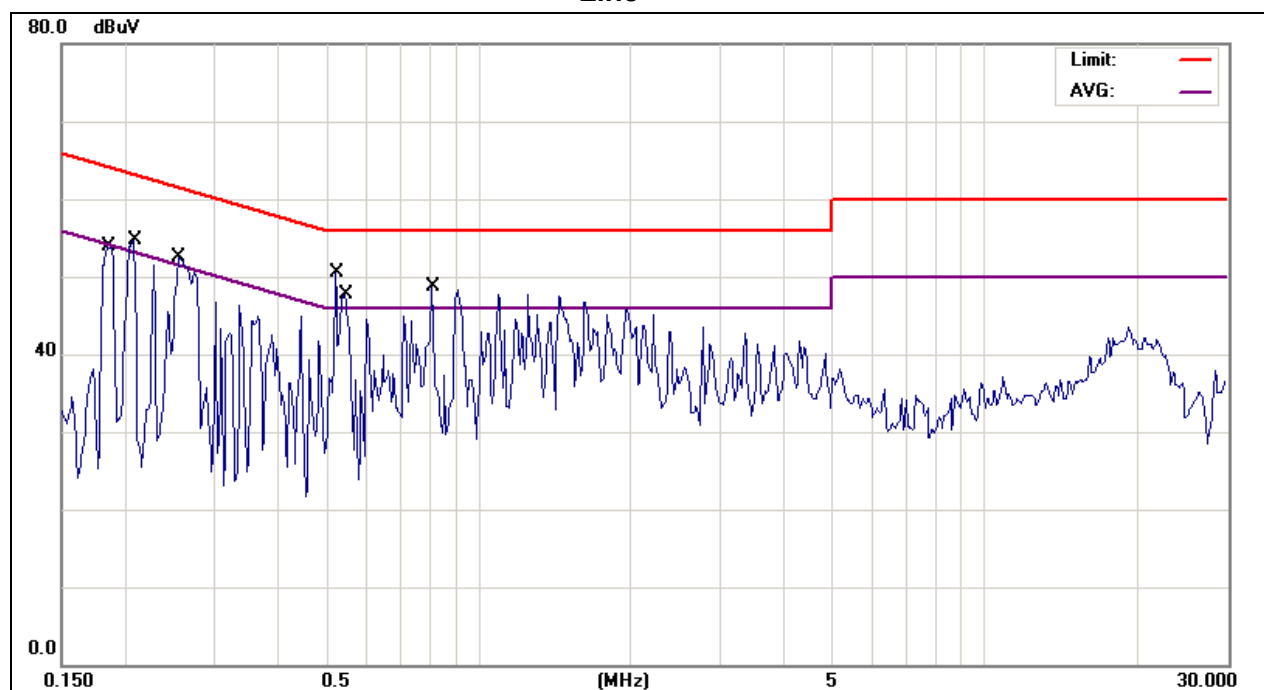

- Remark:
1. The Limit (The red line of the graph indicates the quasi-peak measurements).
 2. The AVG (The purple line of the graph indicates the average measurements).
 3. The scan curve indicates peak detector measurement.

Date of Test	May 02, 2013	Temperature	20 °C
EUT	Bluetooth Speaker	Humidity	59 %
Test Mode	Charge Mode	Display Pattern	Program
Test Power Supply	AC 110V/60Hz		


Neutral

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V	Limit dB μ V	Over Limit dB	Detector
1	0.1929	45.40	9.84	55.24	63.91	-8.67	QP
2	0.1929	37.68	9.84	47.52	53.91	-6.39	AVG
3	0.2160	41.22	9.84	51.06	62.97	-11.91	QP
4	0.2160	23.65	9.84	33.49	52.97	-19.48	AVG
5	0.2748	39.56	9.86	49.42	60.97	-11.55	QP
6	0.2748	34.65	9.86	44.51	50.97	-6.46	AVG
7	0.3762	38.12	9.88	48.00	58.36	-10.36	QP
8	0.3762	28.03	9.88	37.91	48.36	-10.45	AVG
9	0.4220	37.68	9.89	47.57	57.41	-9.84	QP
10	0.4220	23.12	9.89	33.01	47.41	-14.40	AVG
11	18.6118	28.94	10.23	39.17	60.00	-20.83	QP
12	18.6118	21.31	10.23	31.54	50.00	-18.46	AVG

Remarks :

1. All readings are Quasi-peak and Average values.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = L.I.S.N. insertion loss + cable loss
5. " ★ " means that this data is the worst case measurement level.
6. The measurement uncertainty is 3.93 dB.

Neutral

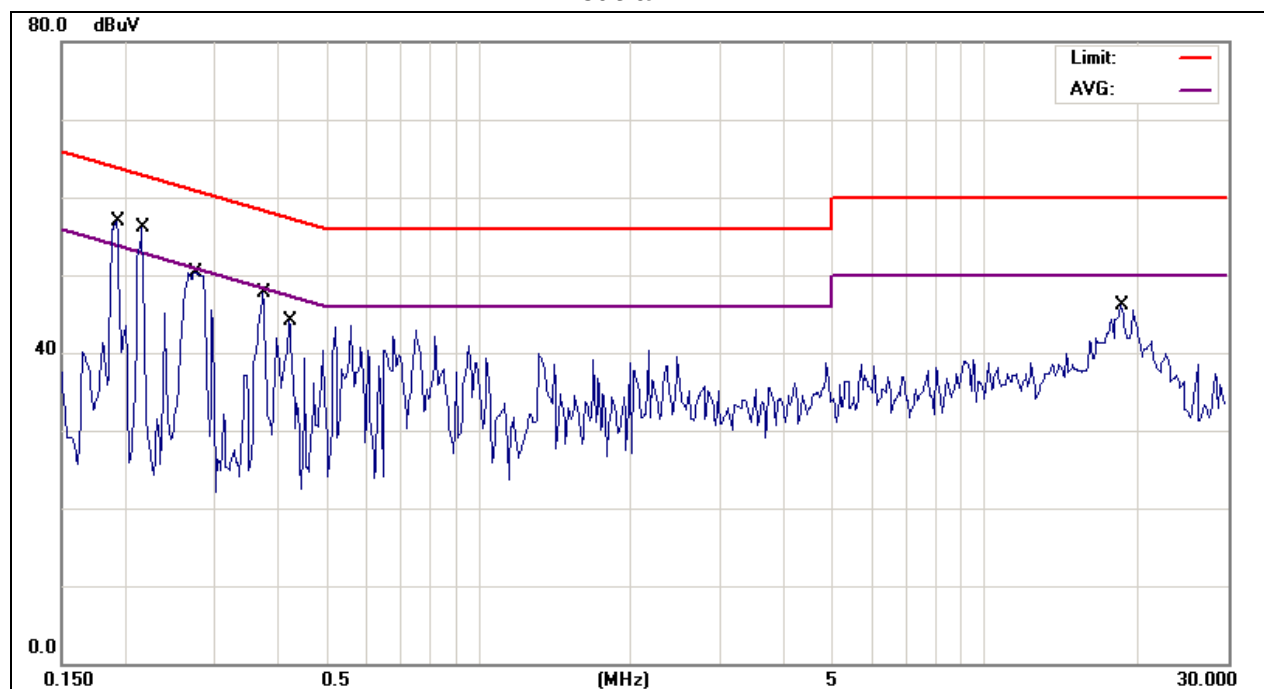

- Remark:
1. The Limit (The red line of the graph indicates the quasi-peak measurements).
 2. The AVG (The purple line of the graph indicates the average measurements).
 3. The scan curve indicates peak detector measurement.

4. RADIATION EMISSION DATA

4.1 TEST EQUIPMENT



The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSU26	200882	2013.09.19
2	Active Loop	EMCO	6507	95101353	2013.11.18
3	Pre-Amplifier	EMV-Technik	PA303	GTK-E-A339-01	2014.04.13
4	Pre-Amplifier	HP	8449B	3008A01264	2013.06.04
5	BILOG ANTENNA	SCHWARZBECK	VULB 9168	9168-253	2014.02.28
6	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2014.01.23
7	BOARD-BAND ANTENNA	SCHWARZBECK	BBHA 9170	BBHA9170164	2014.01.27
8	CABLE	INSULATED WIRE INC.	SPS-2801-3940-NPS	03262012	2014.04.07
9	CABLE	SUHNER	SUCOFLEX 104PEA	MY3501/4PEA	2013.10.08
10	CABLE	SUHNER	SUCOFLEX 102	23538/2	2013.06.26
11	CABLE	SUHNER	SUCOFLEX 102	28523/2	2013.09.19
12	Test Program Software	Hotlife	CSR BC4	N/A	N/A

Note: 1. All equipments are calibrated and will be valid only for a period of 1 year.

2. The test was performed at GTK Chamber A6 (Under 1GHz) and Chamber A6 (Above 1GHz).

4.2 OPEN TEST SITE SETUP DIAGRAM

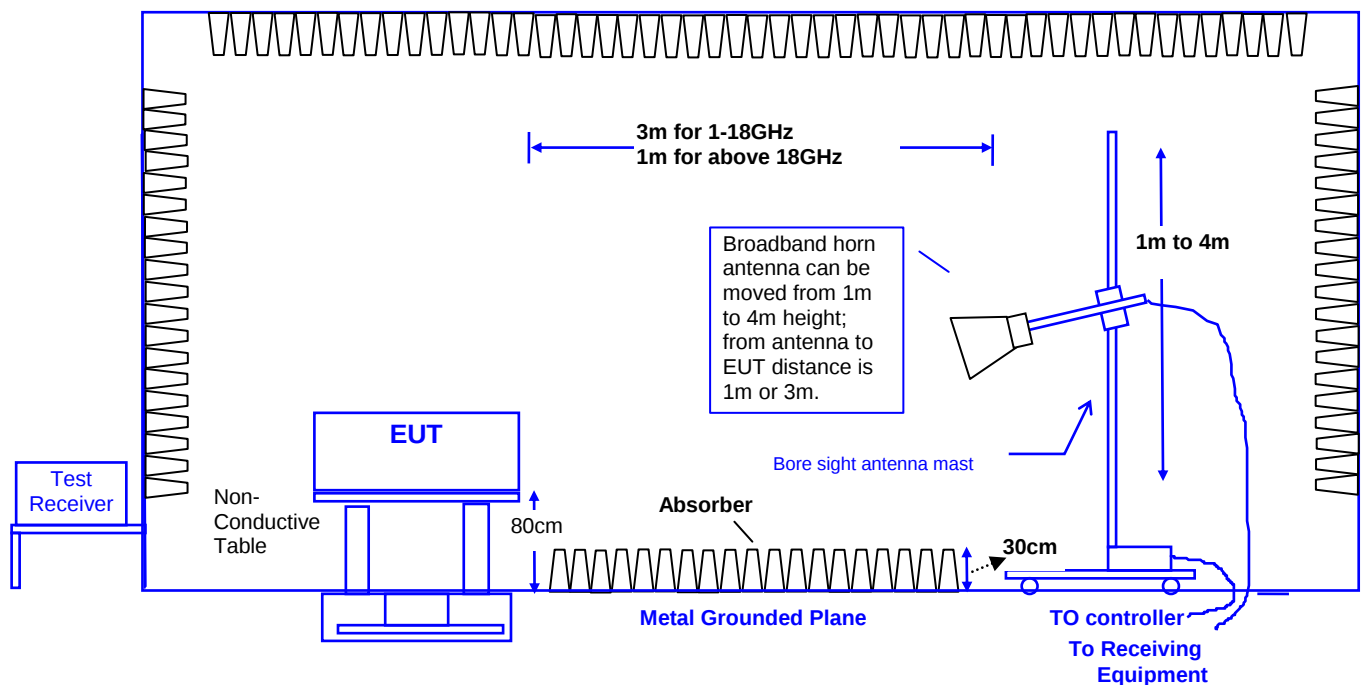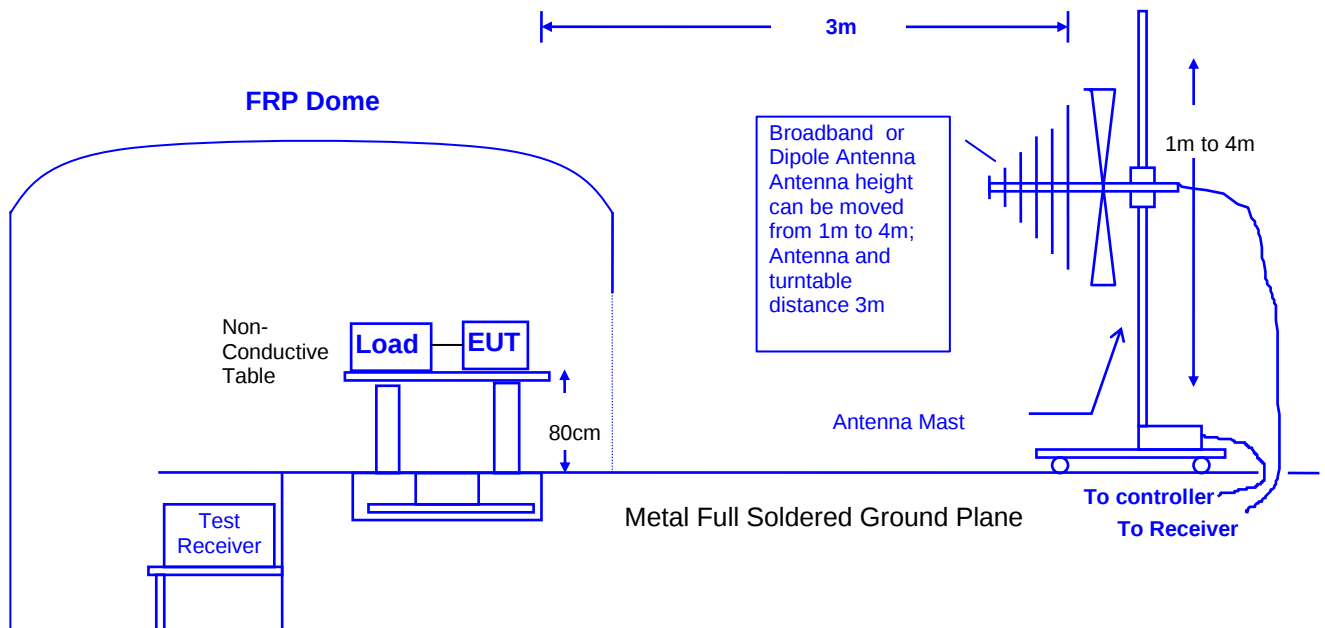

Note: This is a representative setup diagram for Table-top EUT.
For Floor-standing EUT, the table will be removed with all the other setup conditions remain the same.

4.3 RADIATED EMISSION LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

☒ FCC 15.209 Limit

Frequency	Distance	Field Strength	
MHz	Meter	$\mu\text{V/M}$	$\text{dB}\mu\text{V/M}$
0.009 – 0.490	300	$2400/F$ (KHz)	97.0 – 27.6
0.490 – 1.705	30	$24000/F$ (KHz)	67.6 – 45.9
1.705 – 30.0	30	30	59.0
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0

Note : The frequencies above 1000MHz, as measured using instrumentation with a peak detector function was corresponding to 20dB above the maximum permitted average limit.

4.4 TEST CONFIGURATION

The equipment which is listed 4.1 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

The device under test, installed in a representative system as described in section 4.2, was placed on a non-conductive table whose total height equaled 80 cm. This table can be rotated 360 degree. The measurement antenna was mounted to a non-conductive mast capable of moving the antenna vertically. Antenna height was varied from 1 meter to 4 meters and the system under test was rotated from 0 degree through 360 degrees relative to the antenna position and polarization (Horizontal and Vertical). Also the I/O cable position was investigated to find the maximum emission condition.

4.5 OPERATING CONDITION OF EUT

Same as section 2.9.

4.6 RADIATED EMISSION DATA

The measurement range of radiated emission, which is from **9 kHz to 10th Harmonics**, was investigated. All readings below 1GHz are quasi-peak values with a resolution bandwidth of 120 KHz. Above 1GHz are peak and avg. values with a resolution bandwidth of 1MHz. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.

The measured results between 9kHz and 30MHz are 20dB lower than the allowed limit already, therefore the test results are not recorded in this report.

4.7 RADIATED EMISSIONS MEASUREMENT RESULTS


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	126.3782	37.53	-16.74	20.79	43.50	-22.71	QP
2	180.7853	40.11	-16.07	24.04	43.50	-19.46	QP
3	★253.8462	46.09	-15.13	30.96	46.00	-15.04	QP
4	382.8686	32.62	-11.10	21.52	46.00	-24.48	QP
5	440.3846	34.97	-9.65	25.32	46.00	-20.68	QP
6	535.2083	32.52	-7.36	25.16	46.00	-20.84	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dBμV/m

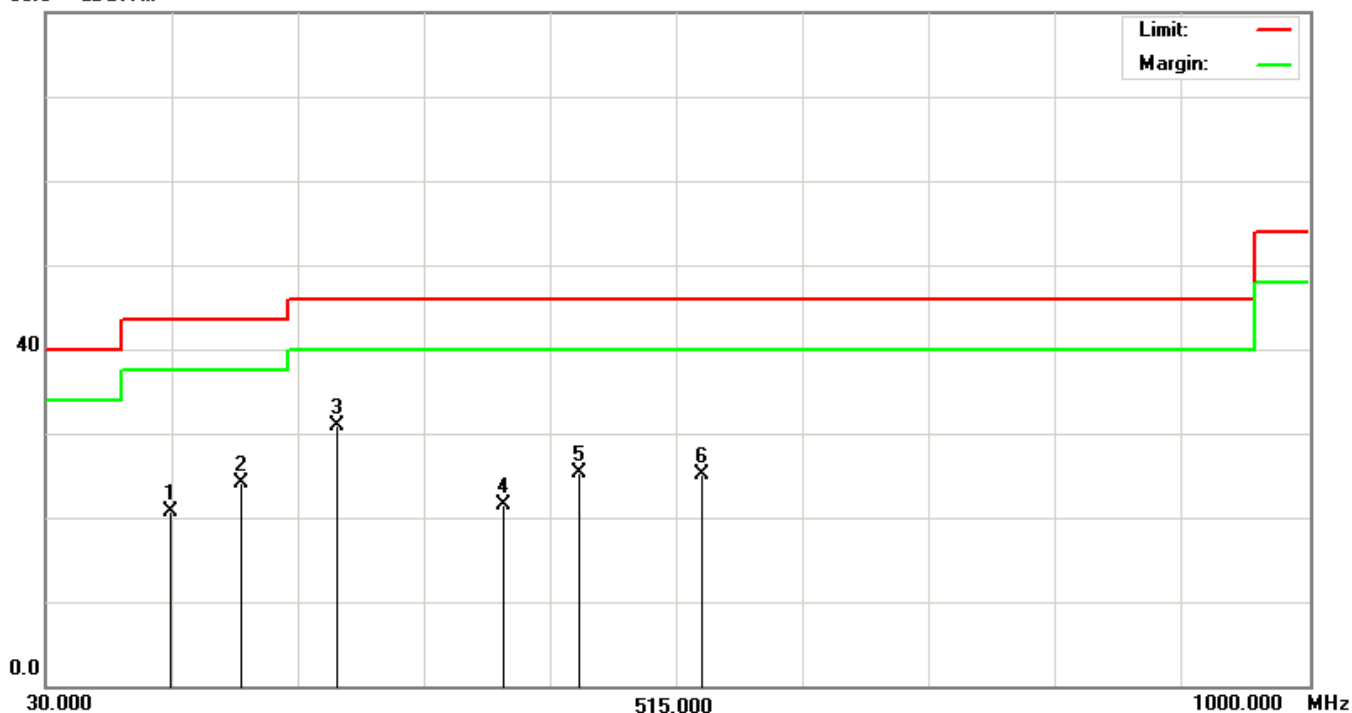

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★169.9038	44.22	-15.21	29.01	43.50	-14.49	QP
2	224.3109	37.04	-16.23	20.81	46.00	-25.19	QP
3	306.6987	34.54	-13.17	21.37	46.00	-24.63	QP
4	423.2853	31.58	-10.06	21.52	46.00	-24.48	QP
5	639.3590	27.67	-5.35	22.32	46.00	-23.68	QP
6	718.6378	27.74	-4.28	23.46	46.00	-22.54	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

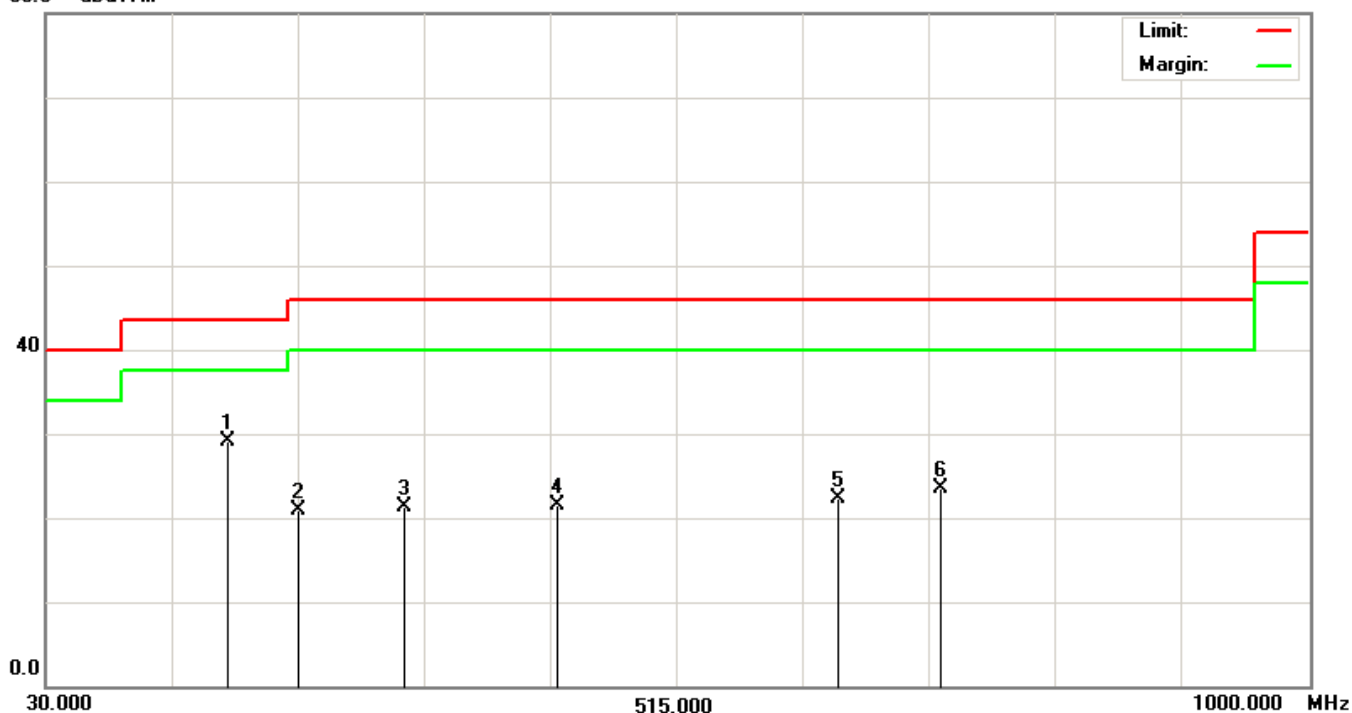

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	241.4103	45.70	-15.60	30.10	46.00	-15.90	QP
2	316.0256	36.40	-12.91	23.49	46.00	-22.51	QP
3	384.4231	34.72	-11.05	23.67	46.00	-22.33	QP
4	★449.7115	41.86	-9.42	32.44	46.00	-13.56	QP
5	541.4263	28.72	-7.21	21.51	46.00	-24.49	QP
6	684.4391	35.07	-4.81	30.26	46.00	-15.74	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

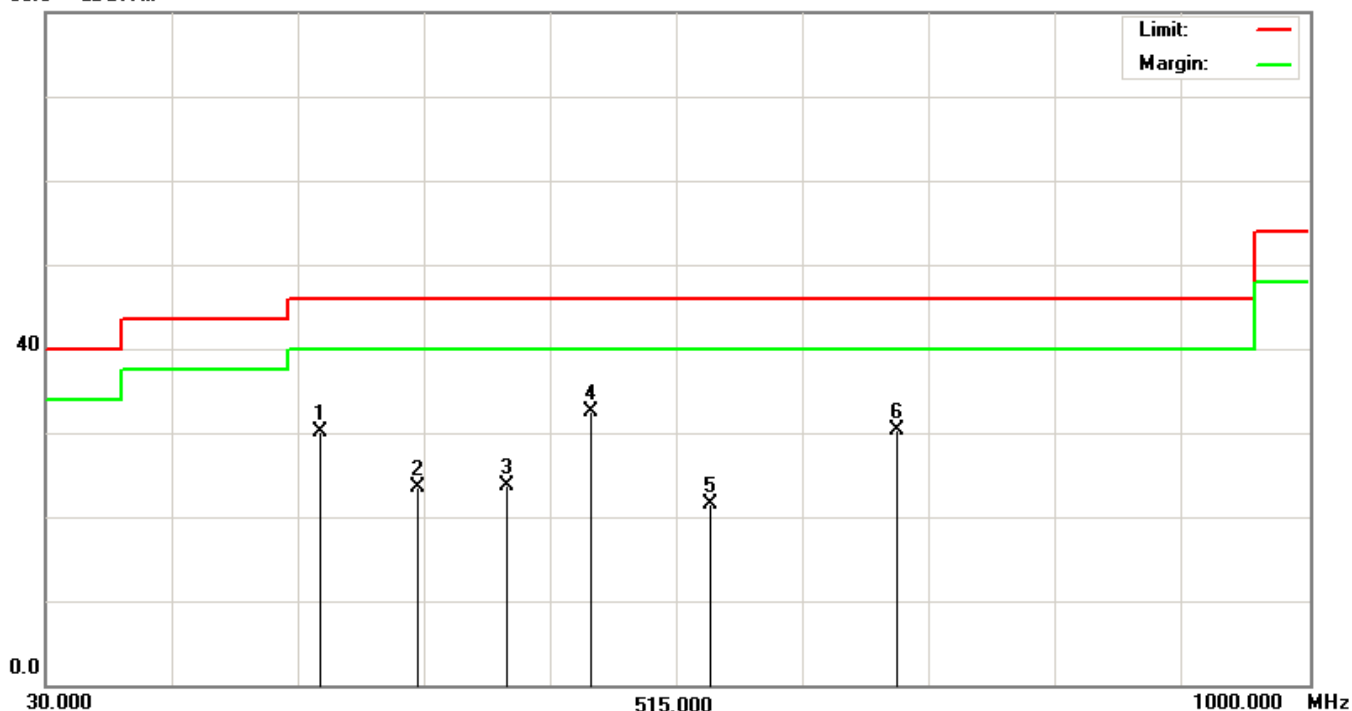

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★185.4487	42.74	-16.33	26.41	43.50	-17.09	QP
2	235.1923	35.15	-15.82	19.33	46.00	-26.67	QP
3	322.2436	35.34	-12.74	22.60	46.00	-23.40	QP
4	387.5321	35.62	-10.97	24.65	46.00	-21.35	QP
5	477.6923	30.34	-8.74	21.60	46.00	-24.40	QP
6	679.7756	27.21	-4.87	22.34	46.00	-23.66	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dBμV/m

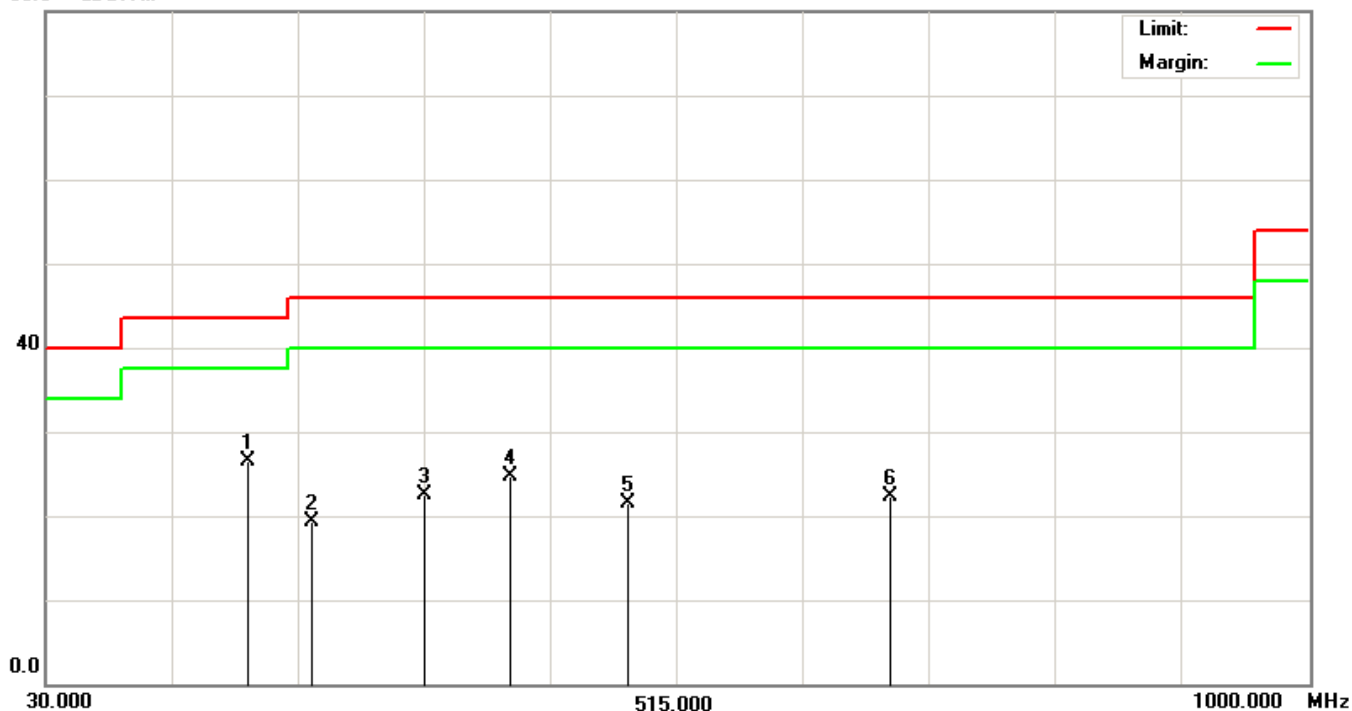

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	235.1923	35.24	-15.82	19.42	46.00	-26.58	QP
2	316.0256	36.40	-12.91	23.49	46.00	-22.51	QP
3	★359.5513	42.89	-11.73	31.16	46.00	-14.84	QP
4	426.3942	41.12	-9.99	31.13	46.00	-14.87	QP
5	504.1186	27.25	-8.10	19.15	46.00	-26.85	QP
6	595.8333	33.67	-5.91	27.76	46.00	-18.24	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

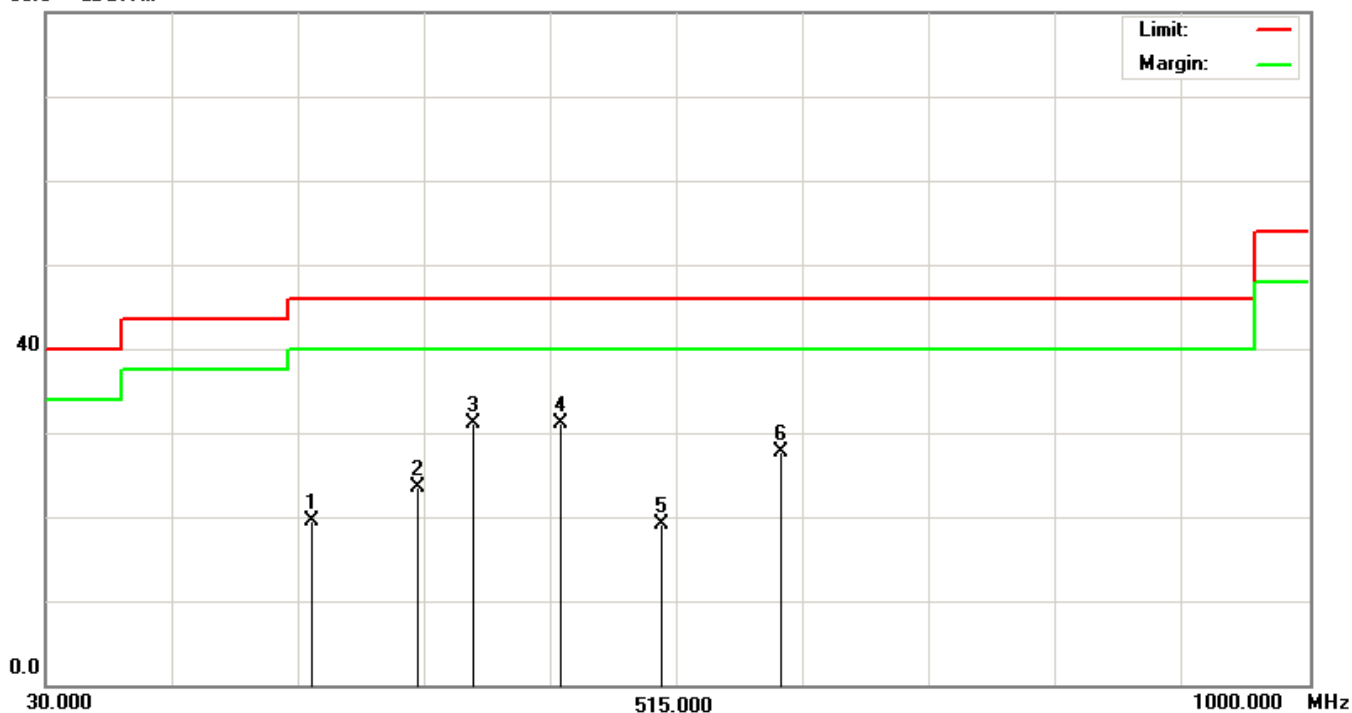

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	261.6186	33.95	-14.83	19.12	46.00	-26.88	QP
2	★340.8974	43.68	-12.24	31.44	46.00	-14.56	QP
3	392.1955	32.59	-10.84	21.75	46.00	-24.25	QP
4	473.0288	29.87	-8.86	21.01	46.00	-24.99	QP
5	561.6346	30.02	-6.73	23.29	46.00	-22.71	QP
6	661.1218	27.32	-5.09	22.23	46.00	-23.77	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

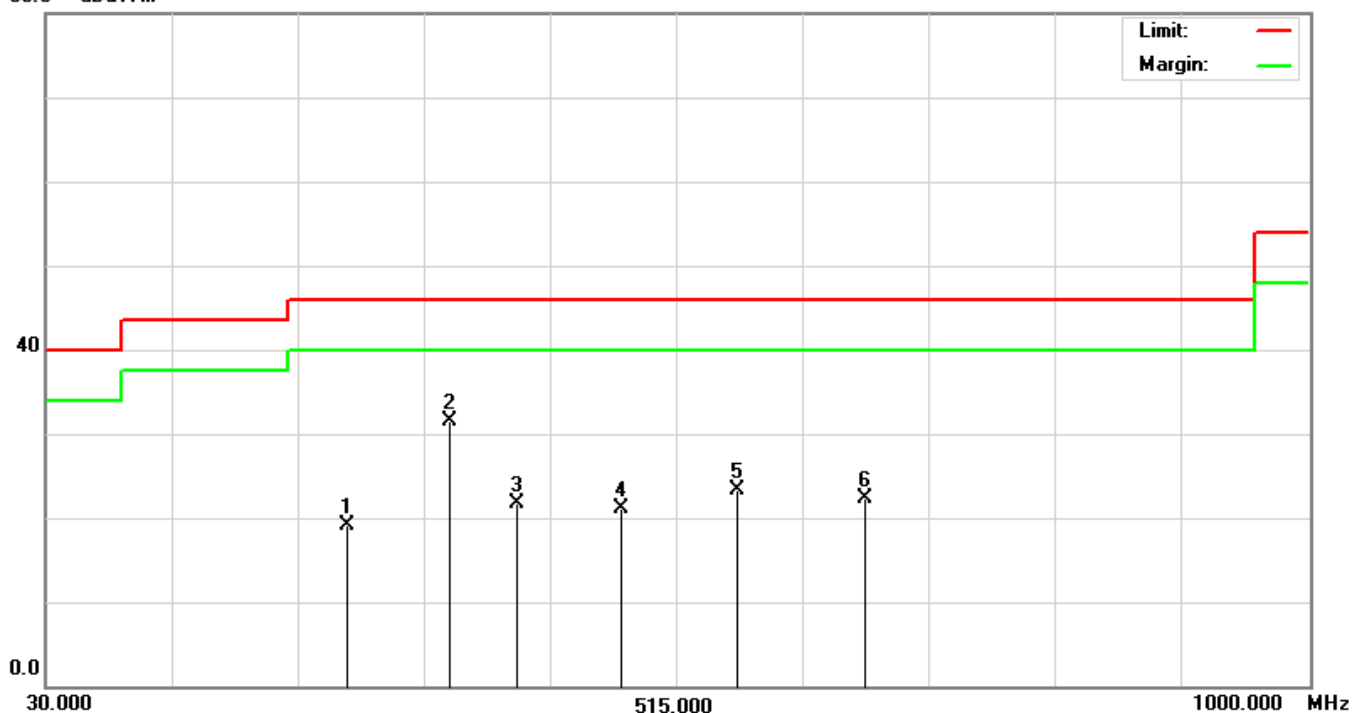

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	398.4135	35.84	-10.67	25.17	46.00	-20.83	QP
2	454.3750	31.96	-9.31	22.65	46.00	-23.35	QP
3	518.1090	28.87	-7.77	21.10	46.00	-24.90	QP
4	★595.8333	33.67	-5.91	27.76	46.00	-18.24	QP
5	706.2019	28.03	-4.51	23.52	46.00	-22.48	QP
6	779.2628	26.95	-3.13	23.82	46.00	-22.18	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dB μ V/m

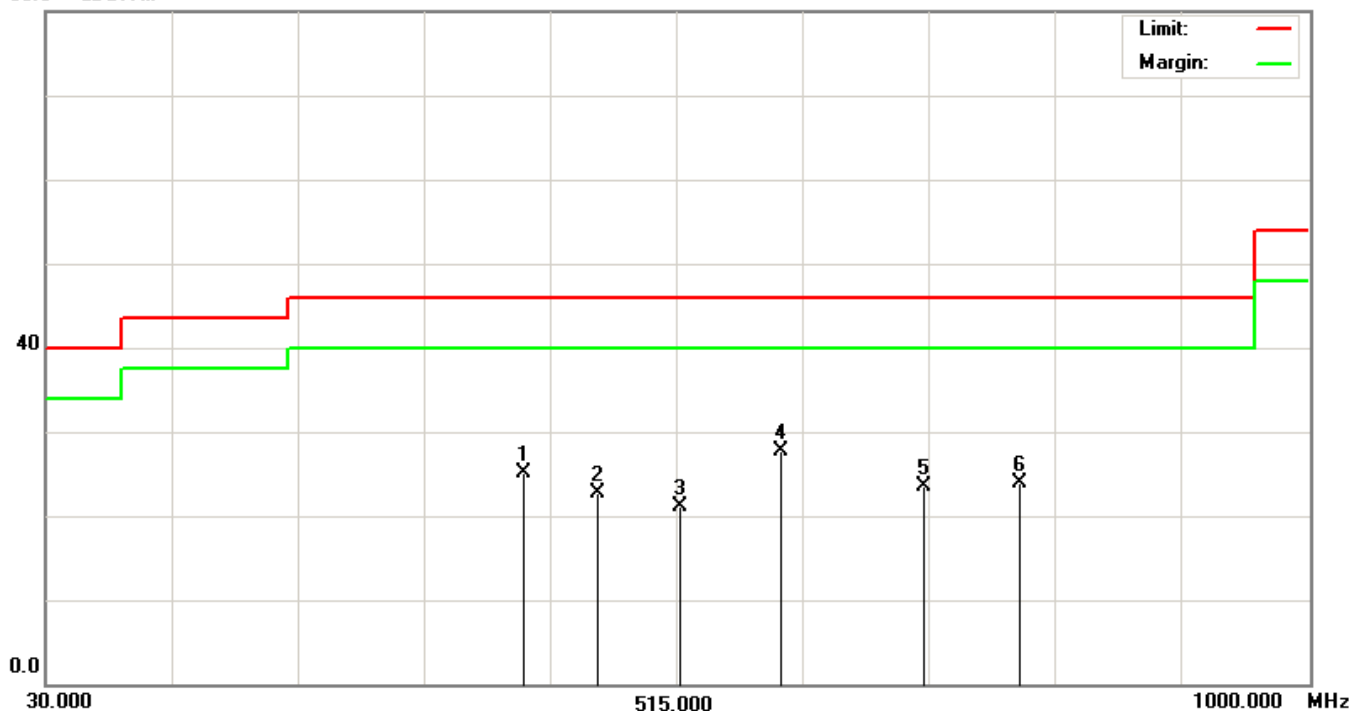

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - π /4 PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	311.3622	36.79	-13.04	23.75	46.00	-22.25	QP
2	392.1955	32.59	-10.84	21.75	46.00	-24.25	QP
3	462.1474	34.60	-9.12	25.48	46.00	-20.52	QP
4	★542.9808	35.30	-7.17	28.13	46.00	-17.87	QP
5	612.9327	27.56	-5.66	21.90	46.00	-24.10	QP
6	731.0737	27.43	-4.04	23.39	46.00	-22.61	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dB μ V/m

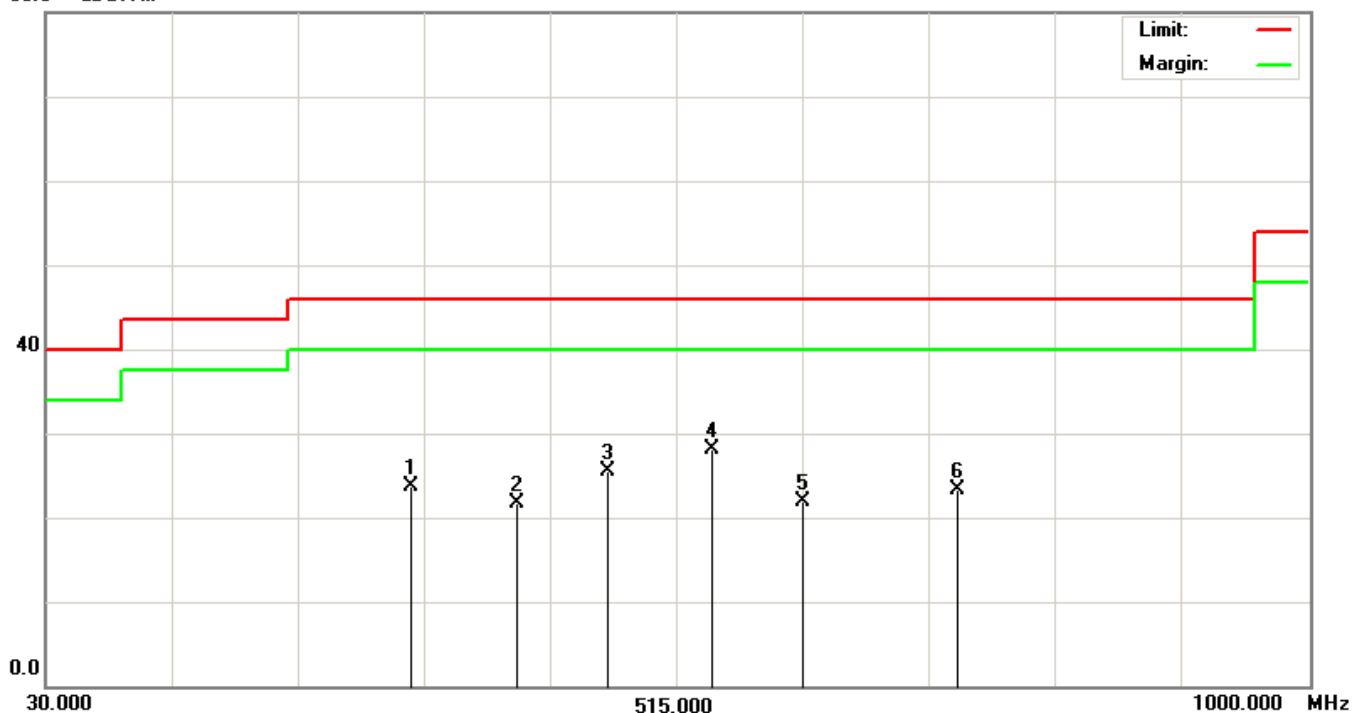

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	★376.6506	42.12	-11.27	30.85	46.00	-15.15	QP
2	446.6026	33.82	-9.50	24.32	46.00	-21.68	QP
3	564.7436	28.37	-6.65	21.72	46.00	-24.28	QP
4	648.6859	27.21	-5.24	21.97	46.00	-24.03	QP
5	695.3205	30.06	-4.69	25.37	46.00	-20.63	QP
6	797.9167	27.24	-2.78	24.46	46.00	-21.54	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dB μ V/m

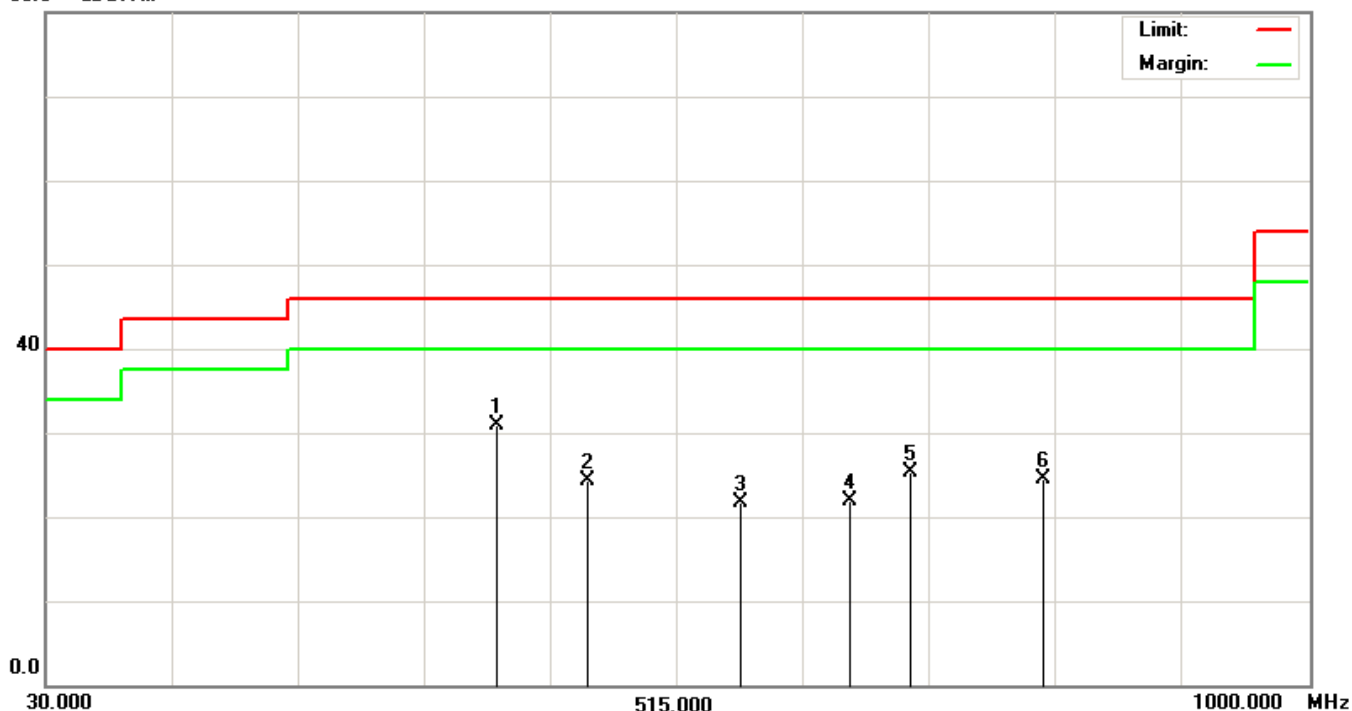

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	214.9840	38.50	-16.57	21.93	43.50	-21.57	QP
2	★289.5994	40.36	-13.75	26.61	46.00	-19.39	QP
3	371.9872	31.92	-11.39	20.53	46.00	-25.47	QP
4	441.9391	32.03	-9.61	22.42	46.00	-23.58	QP
5	614.4872	27.94	-5.64	22.30	46.00	-23.70	QP
6	707.7564	27.10	-4.48	22.62	46.00	-23.38	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dB μ V/m

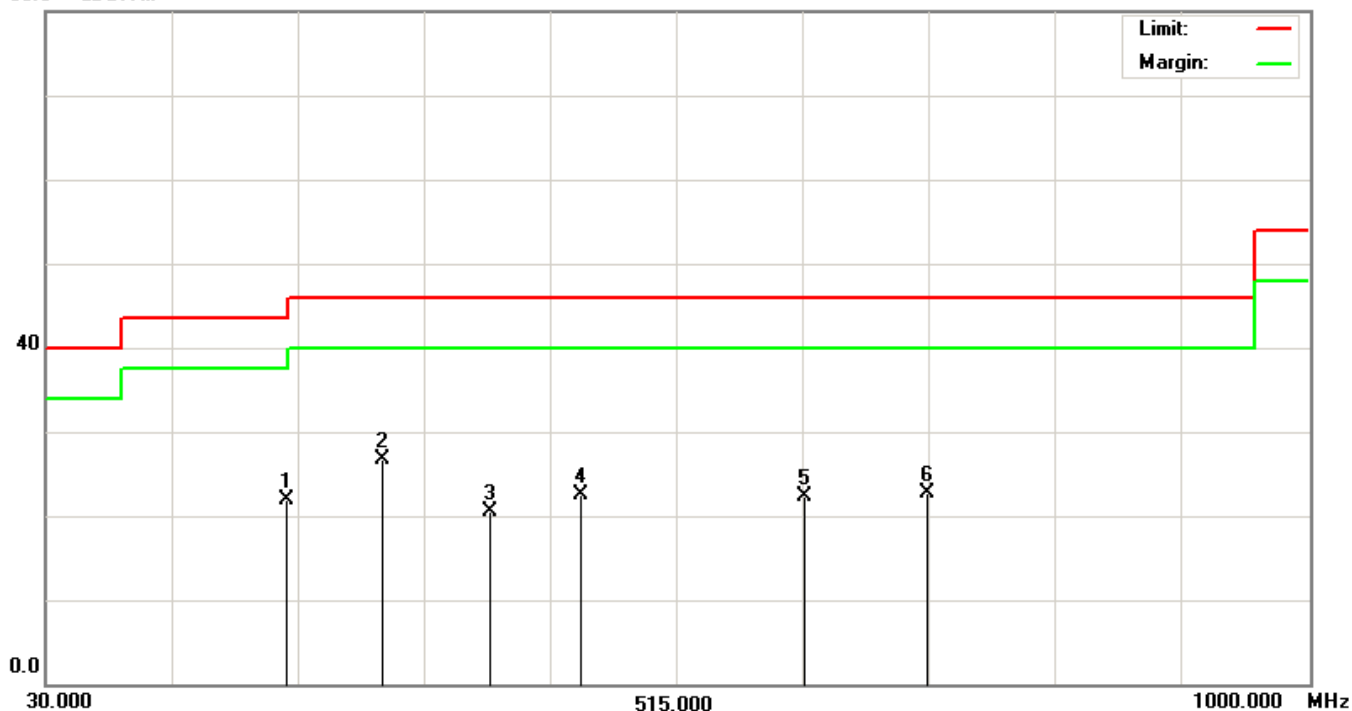

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - π /4 PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	325.3526	39.00	-12.66	26.34	46.00	-19.66	QP
2	396.8590	33.13	-10.72	22.41	46.00	-23.59	QP
3	454.3750	31.96	-9.31	22.65	46.00	-23.35	QP
4	600.4968	28.79	-5.80	22.99	46.00	-23.01	QP
5	★729.5192	30.84	-4.07	26.77	46.00	-19.23	QP
6	794.8077	26.87	-2.84	24.03	46.00	-21.97	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 4.61 dB.

80.0 dB μ V/m

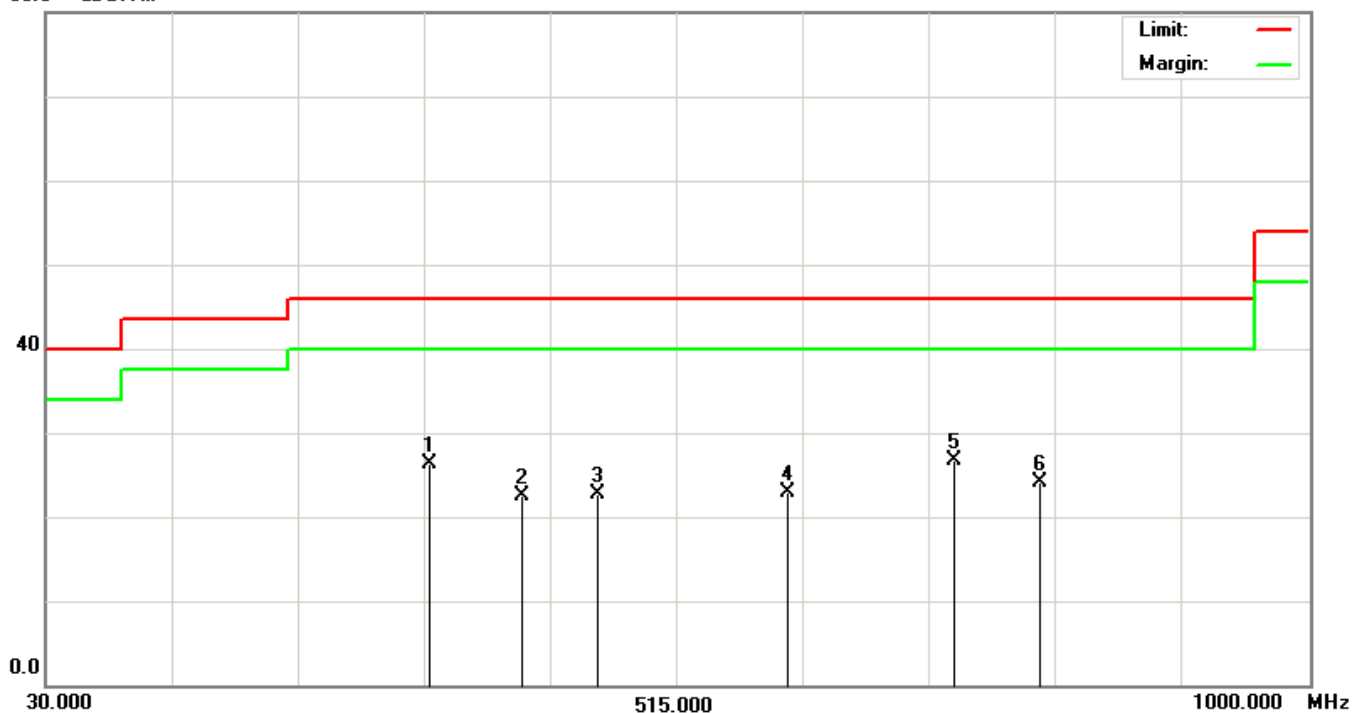

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	277.1635	41.22	-14.23	26.99	46.00	-19.01	QP
2	★340.8974	39.68	-12.24	27.44	46.00	-18.56	QP
3	431.0577	31.77	-9.88	21.89	46.00	-24.11	QP
4	608.2692	27.35	-5.71	21.64	46.00	-24.36	QP
5	706.2019	27.72	-4.51	23.21	46.00	-22.79	QP
6	787.0353	26.56	-2.99	23.57	46.00	-22.43	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dB μ V/m

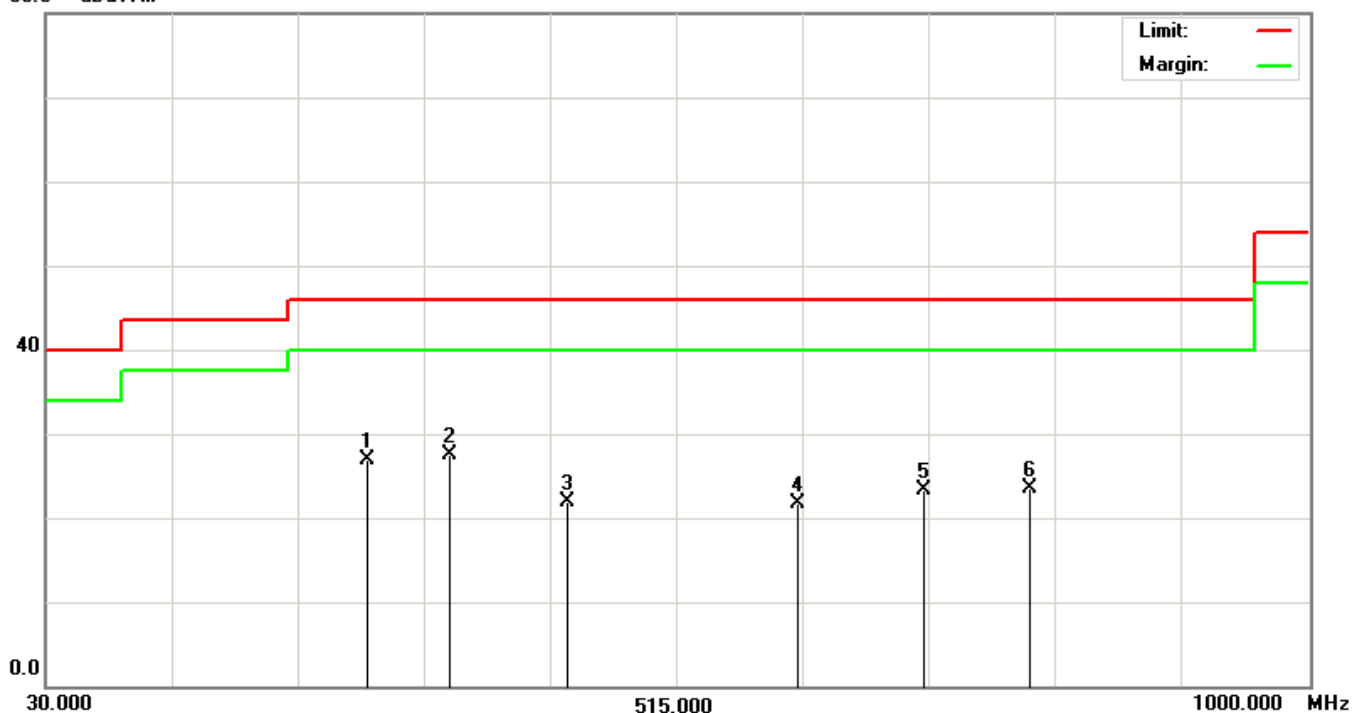

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	328.4615	40.23	-12.58	27.65	46.00	-18.35	QP
2	★434.1667	37.61	-9.80	27.81	46.00	-18.19	QP
3	501.0096	28.71	-8.18	20.53	46.00	-25.47	QP
4	564.7436	28.37	-6.65	21.72	46.00	-24.28	QP
5	633.1410	27.26	-5.42	21.84	46.00	-24.16	QP
6	816.5705	28.10	-2.52	25.58	46.00	-20.42	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dBμV/m

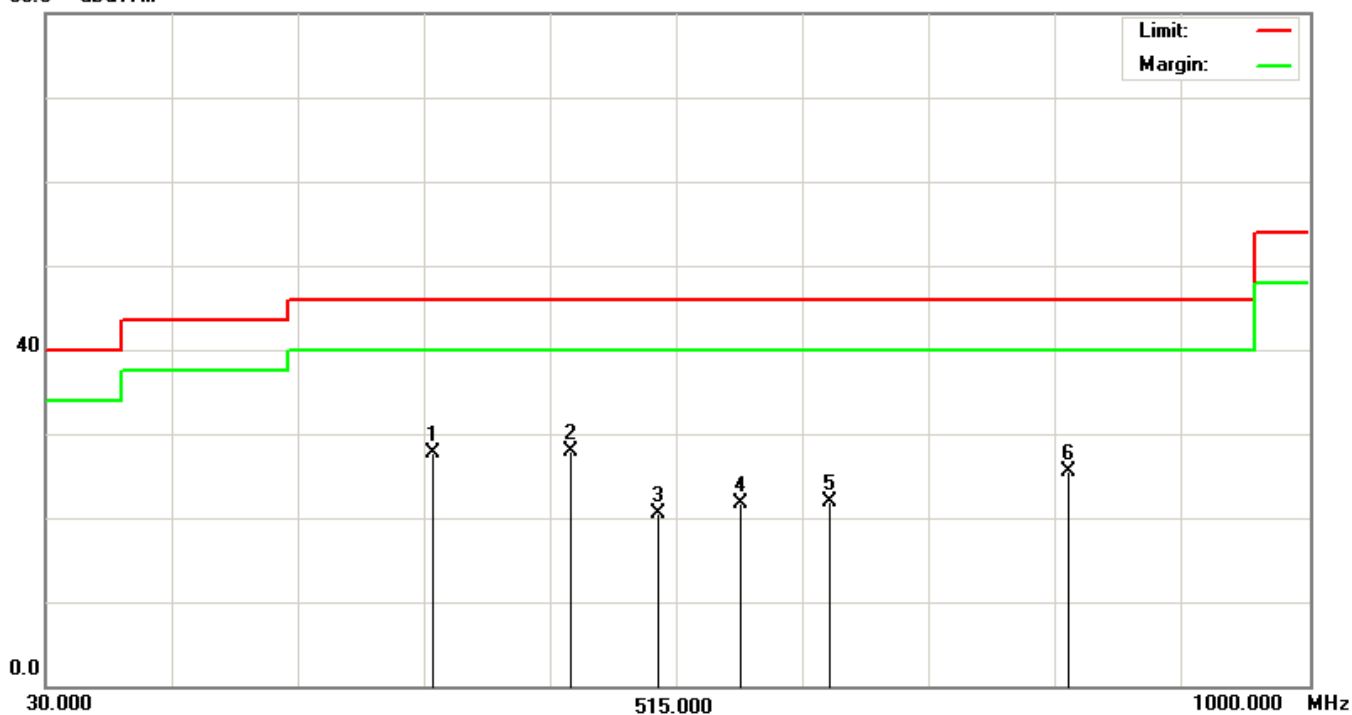

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★375.0962	37.02	-11.31	25.71	46.00	-20.29	QP
2	443.4936	29.97	-9.57	20.40	46.00	-25.60	QP
3	501.0096	28.35	-8.18	20.17	46.00	-25.83	QP
4	769.9359	26.50	-3.31	23.19	46.00	-22.81	QP
5	846.1058	27.53	-2.13	25.40	46.00	-20.60	QP
6	877.1955	26.92	-1.72	25.20	46.00	-20.80	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

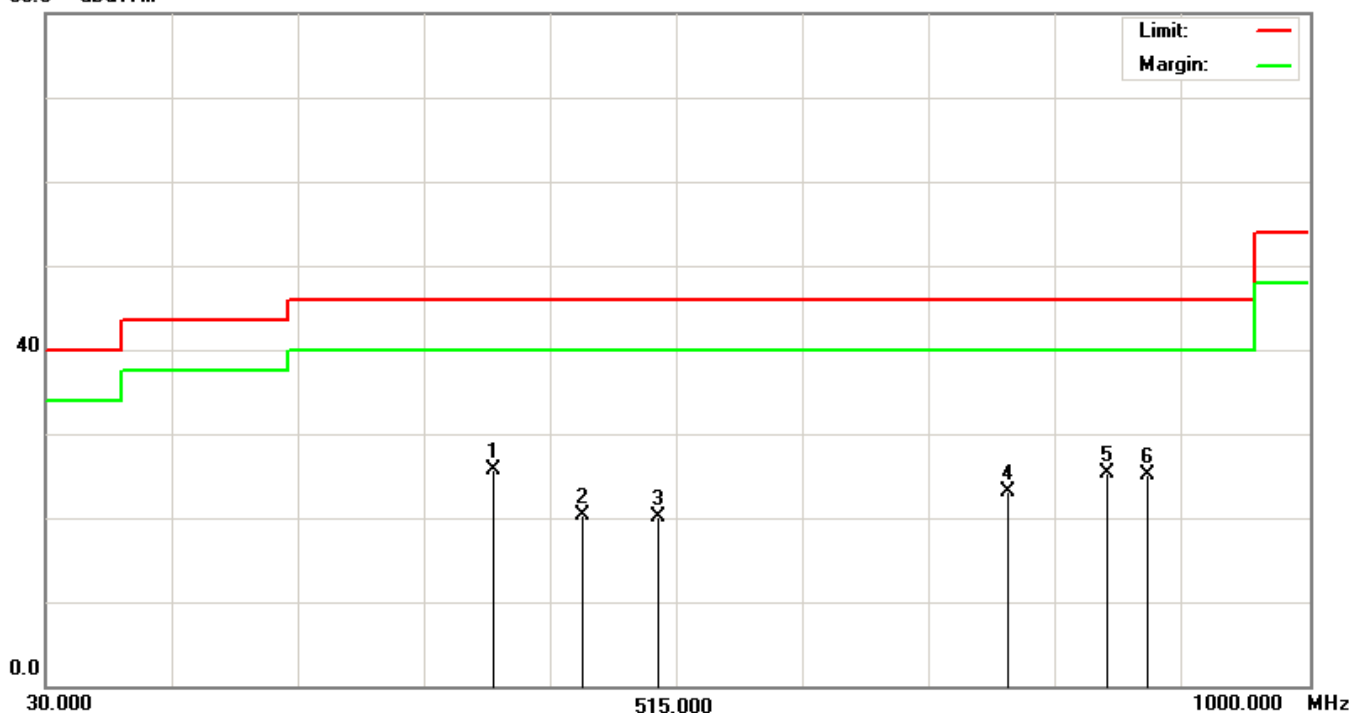

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	379.7596	33.46	-11.18	22.28	46.00	-23.72	QP
2	★435.7212	39.00	-9.76	29.24	46.00	-16.76	QP
3	522.7724	30.71	-7.66	23.05	46.00	-22.95	QP
4	602.0513	29.06	-5.79	23.27	46.00	-22.73	QP
5	773.0449	27.09	-3.25	23.84	46.00	-22.16	QP
6	825.8974	26.30	-2.40	23.90	46.00	-22.10	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

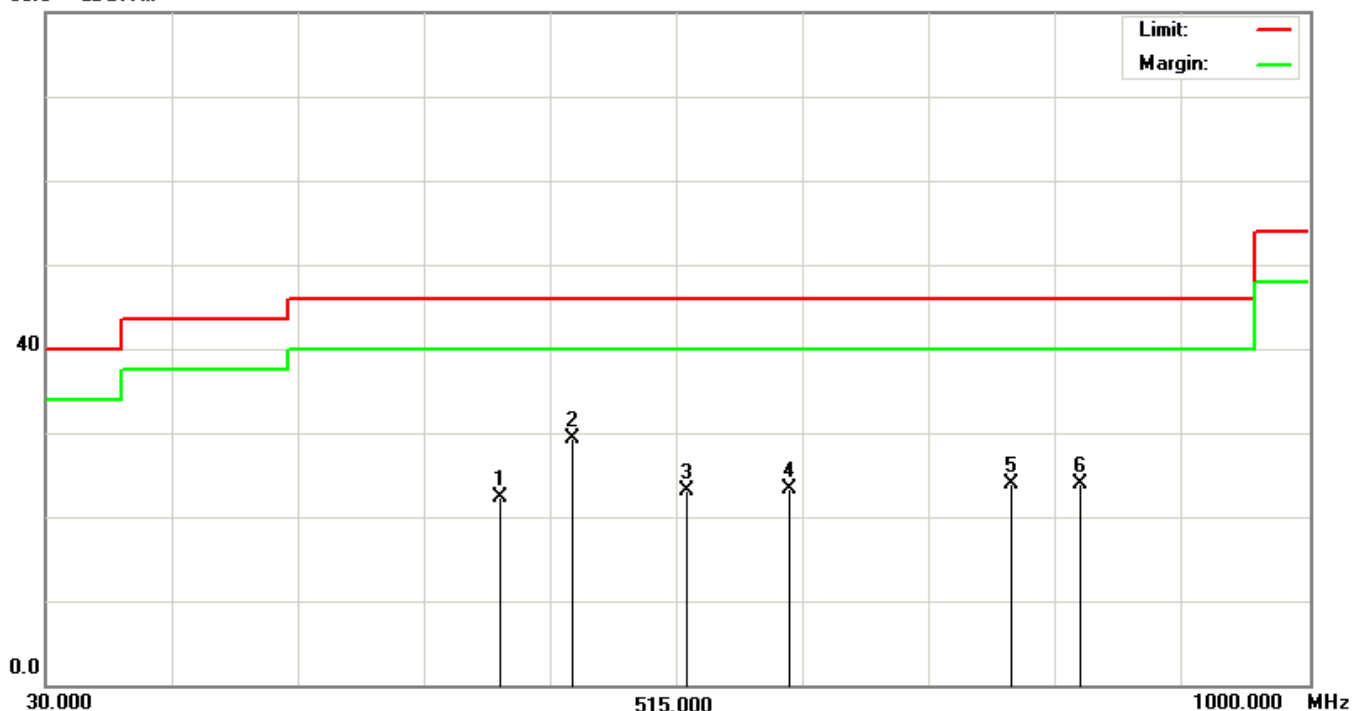

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	334.6795	34.35	-12.41	21.94	46.00	-24.06	QP
2	★412.4038	36.82	-10.33	26.49	46.00	-19.51	QP
3	518.1090	29.99	-7.77	22.22	46.00	-23.78	QP
4	620.7051	27.36	-5.57	21.79	46.00	-24.21	QP
5	779.2628	26.55	-3.13	23.42	46.00	-22.58	QP
6	853.8782	26.88	-2.03	24.85	46.00	-21.15	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93dB.

80.0 dBμV/m

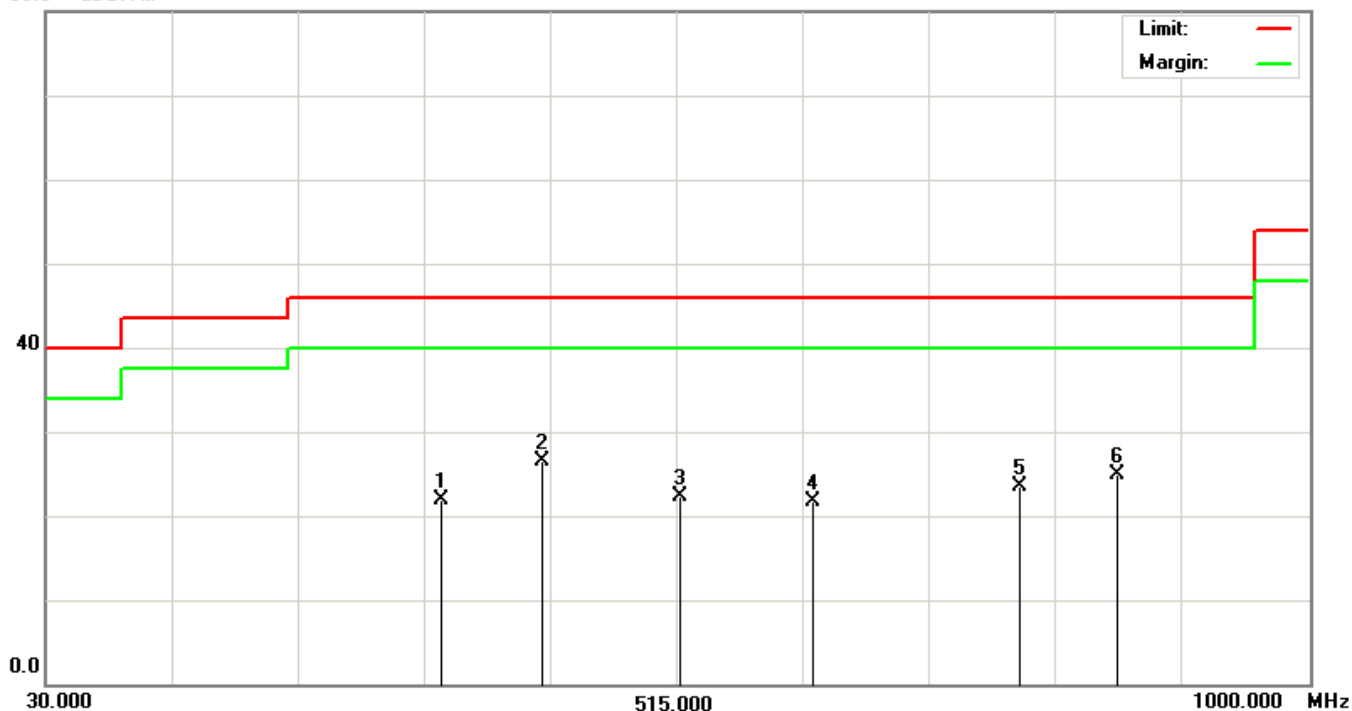

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	392.1955	30.41	-10.84	19.57	46.00	-26.43	QP
2	482.3558	35.49	-8.63	26.86	46.00	-19.14	QP
3	581.8429	28.90	-6.24	22.66	46.00	-23.34	QP
4	707.7564	27.87	-4.48	23.39	46.00	-22.61	QP
5	816.5705	28.10	-2.52	25.58	46.00	-20.42	QP
6	★911.3942	28.92	-1.24	27.68	46.00	-18.32	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 4.61 dB.

80.0 dBμV/m

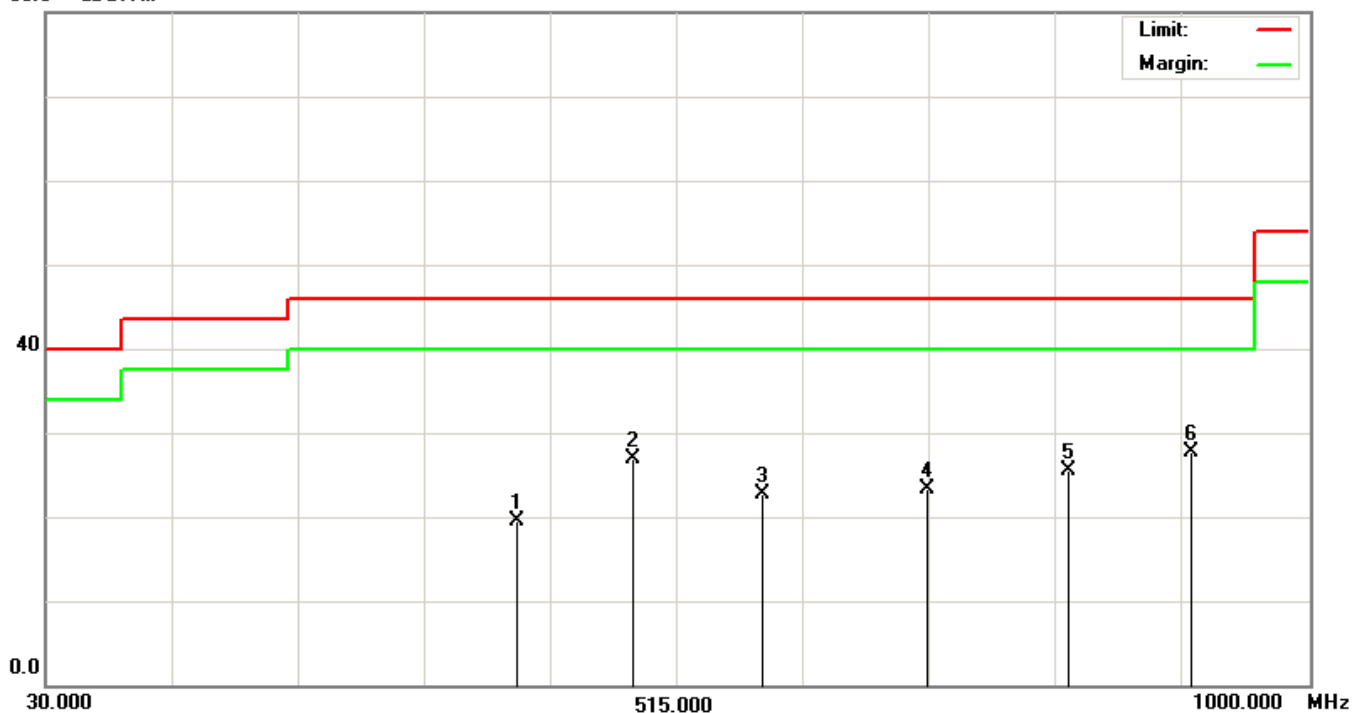

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★339.3429	38.51	-12.28	26.23	46.00	-19.77	QP
2	448.1571	34.17	-9.46	24.71	46.00	-21.29	QP
3	598.9423	30.27	-5.84	24.43	46.00	-21.57	QP
4	721.7468	28.13	-4.22	23.91	46.00	-22.09	QP
5	771.4904	27.64	-3.28	24.36	46.00	-21.64	QP
6	852.3237	28.27	-2.05	26.22	46.00	-19.78	QP

Remarks:

1. All Readings below 1GHz are Quasi-Peak.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. “★” means that this data is the worse case measurement level.
6. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
7. The measurement uncertainty is 3.93 dB.

80.0 dBμV/m

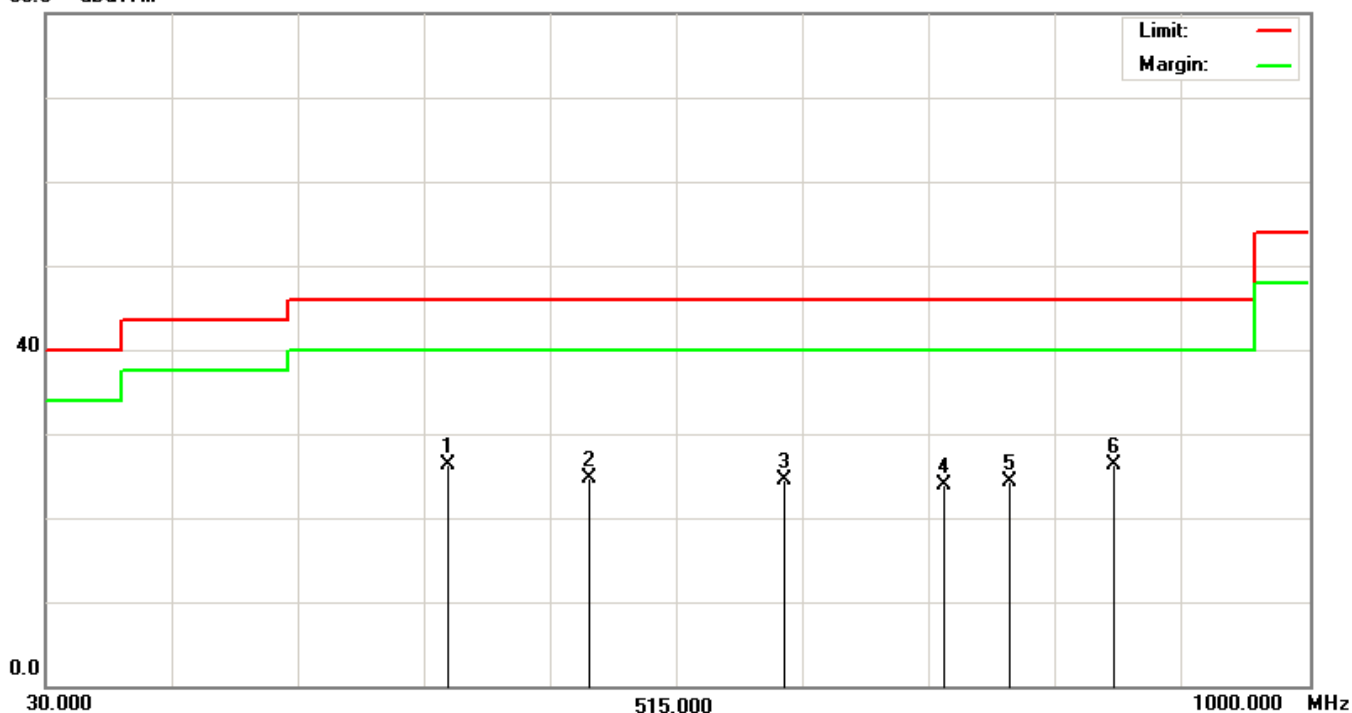

- Remark:
1. The Limit (The red line of the graph indicates the quasi -peak measurements).
 2. The Margin (The green line of the graph indicates the 6dB margin).

Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz


No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	41.15	9.12	50.27	74.00	-23.73	peak
2	7206.0000	38.55	14.38	52.93	74.00	-21.07	peak
3	9608.0000	37.59	10.98	48.57	74.00	-25.43	peak
4	12010.0000	38.06	15.70	53.76	74.00	-20.24	peak
5	14412.0000	39.44	10.39	49.83	74.00	-24.17	peak
6	16814.0000	38.64	13.64	52.28	74.00	-21.72	peak
7	19216.0000	45.06	-18.50	26.56	74.00	-47.44	peak
8	21618.0000	44.37	-18.50	25.87	74.00	-48.13	peak
9	24020.0000	45.68	-18.50	27.18	74.00	-46.82	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)

Horizontal

80.0 dBuV/m

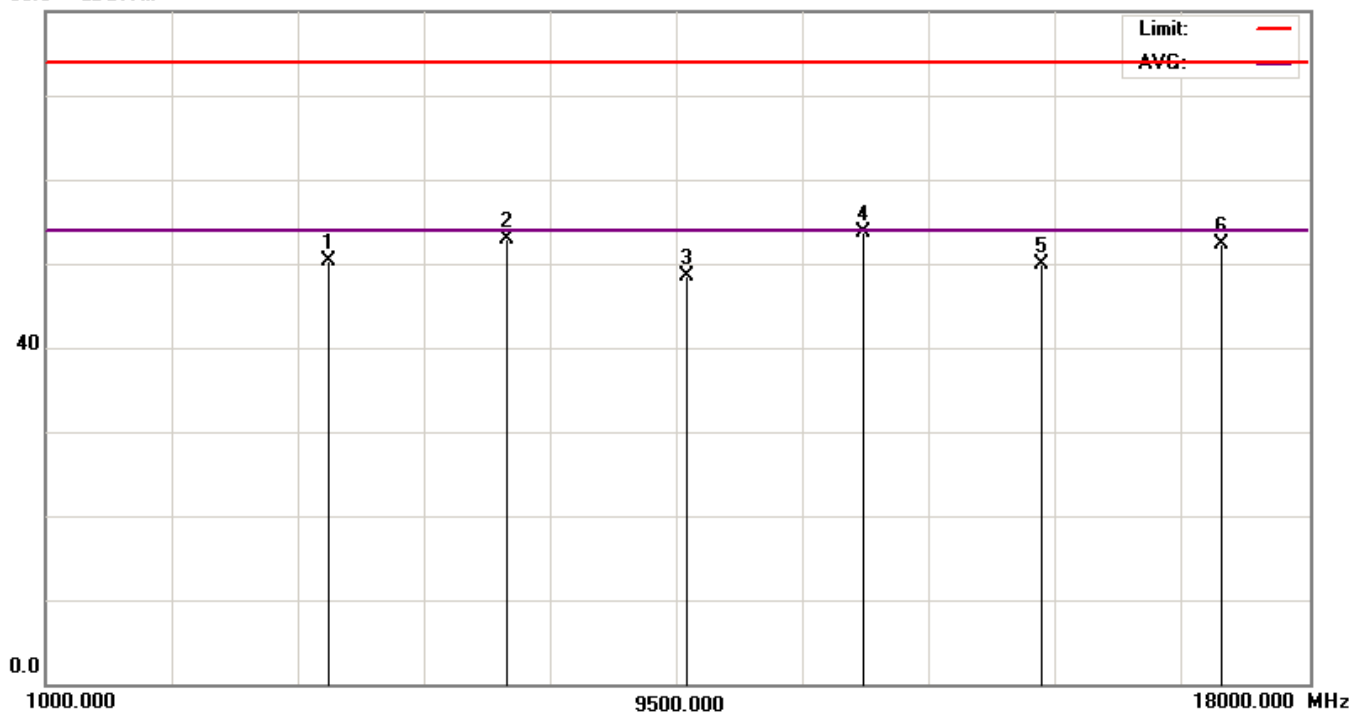


Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

80.0 dBuV/m

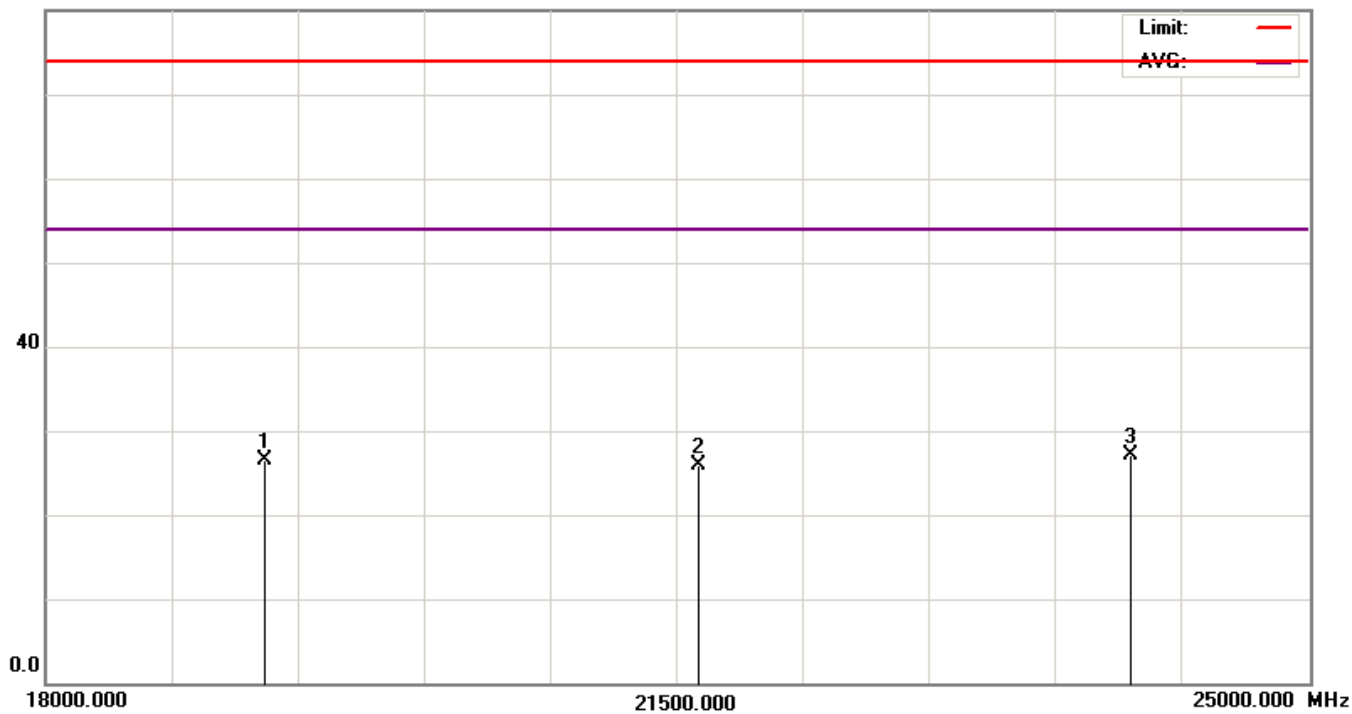

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	42.07	9.42	51.49	74.00	-22.51	peak
2	7206.0000	38.62	14.27	52.89	74.00	-21.11	peak
3	9608.0000	39.57	13.12	52.69	74.00	-21.31	peak
4	12010.0000	34.61	17.37	51.98	74.00	-22.02	peak
5	14412.0000	39.62	9.66	49.28	74.00	-24.72	peak
6	16814.0000	38.41	14.56	52.97	74.00	-21.03	peak
7	19216.0000	42.15	-17.50	24.65	74.00	-49.35	peak
8	21618.0000	45.08	-17.50	27.58	74.00	-46.42	peak
9	24020.0000	43.33	-17.50	25.83	74.00	-48.17	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

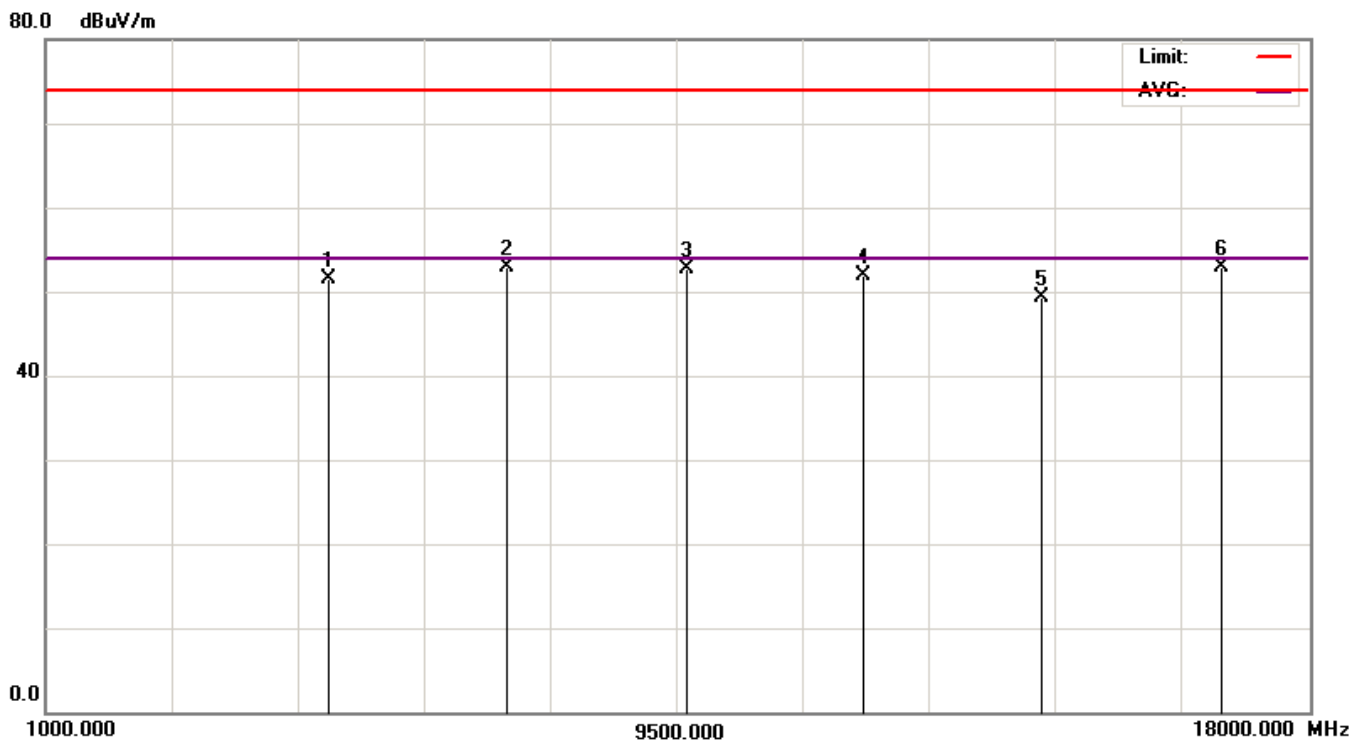

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

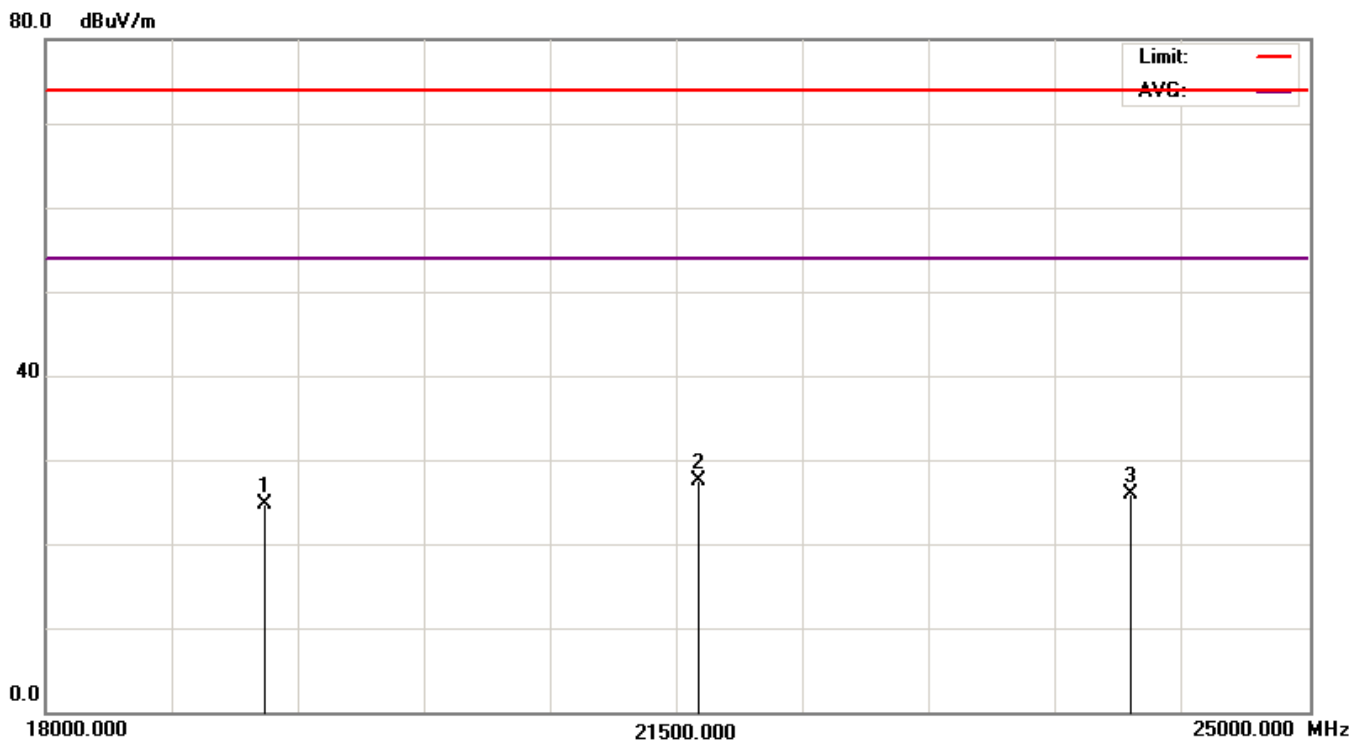

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440Hz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	41.02	9.46	50.48	74.00	-23.52	peak
2	7320.0000	38.14	14.74	52.88	74.00	-21.12	peak
3	9760.0000	40.06	11.24	51.30	74.00	-22.70	peak
4	12200.0000	34.45	16.10	50.55	74.00	-23.45	peak
5	14640.0000	38.49	11.61	50.10	74.00	-23.90	peak
6	17080.0000	37.03	14.24	51.27	74.00	-22.73	peak
7	19520.0000	43.27	-18.50	24.77	74.00	-49.23	peak
8	21960.0000	44.65	-18.50	26.15	74.00	-47.85	peak
9	24400.0000	43.57	-18.50	25.07	74.00	-48.93	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Horizontal

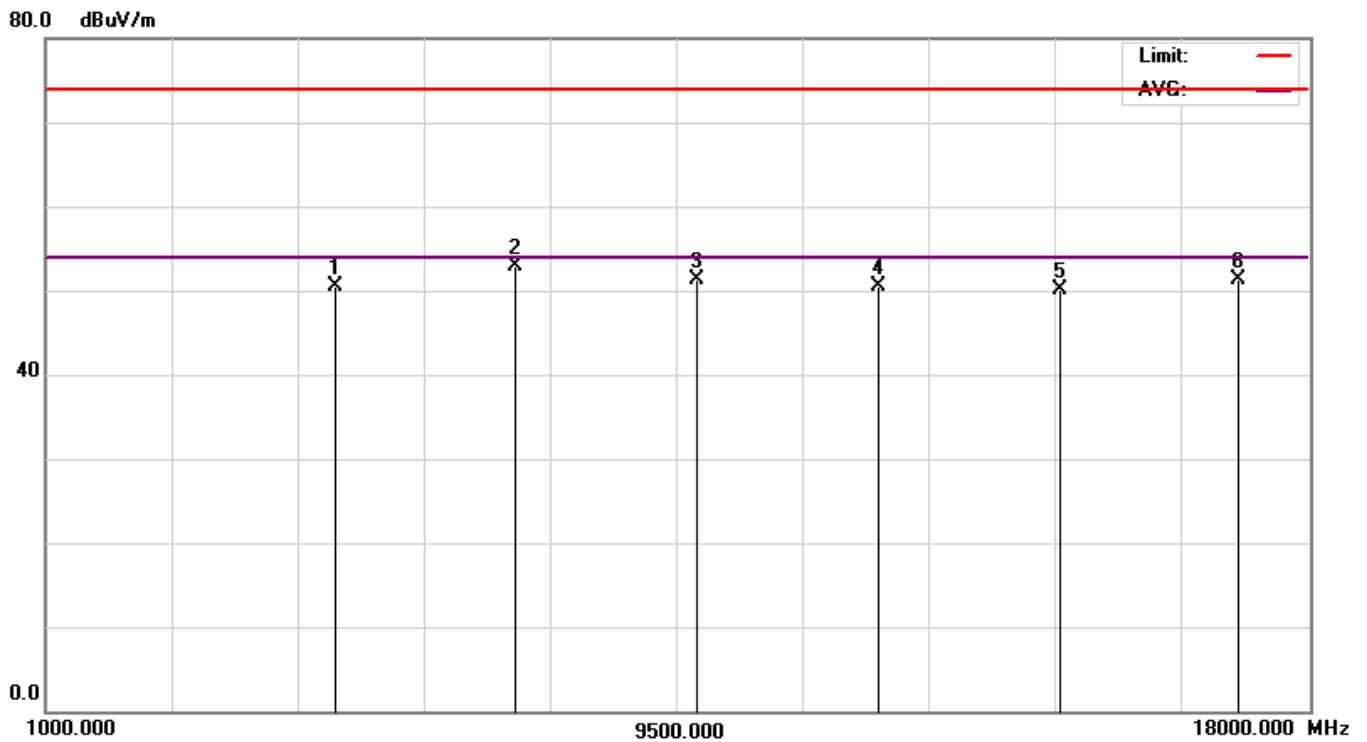

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

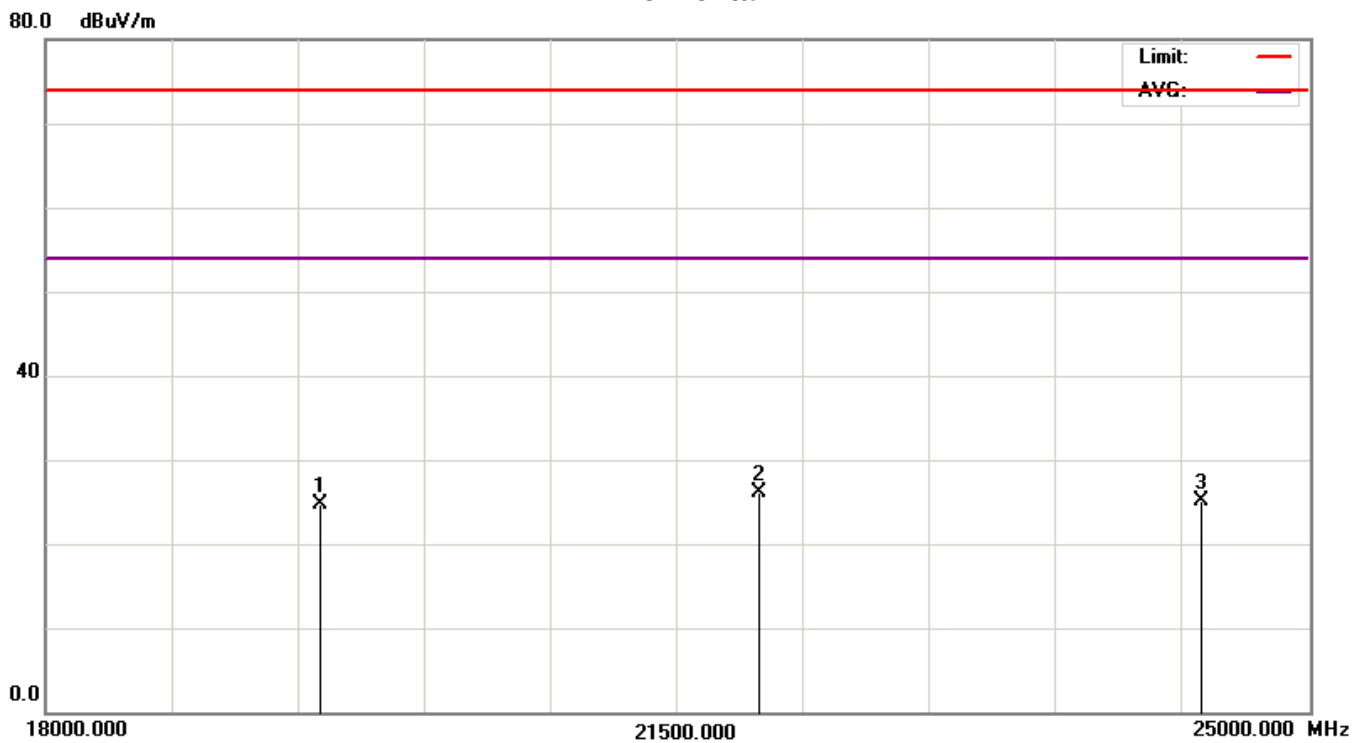

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440z

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	39.54	10.28	49.82	74.00	-24.18	peak
2	7320.0000	37.62	14.51	52.13	74.00	-21.87	peak
3	9760.0000	37.29	13.37	50.66	74.00	-23.34	peak
4	12200.0000	34.57	17.83	52.40	74.00	-21.60	peak
5	14640.0000	41.05	10.03	51.08	74.00	-22.92	peak
6	17080.0000	37.16	15.07	52.23	74.00	-21.77	peak
7	19520.0000	42.07	-17.50	24.57	74.00	-49.43	peak
8	21960.0000	43.69	-17.50	26.19	74.00	-47.81	peak
9	24400.0000	45.18	-17.50	27.68	74.00	-46.32	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

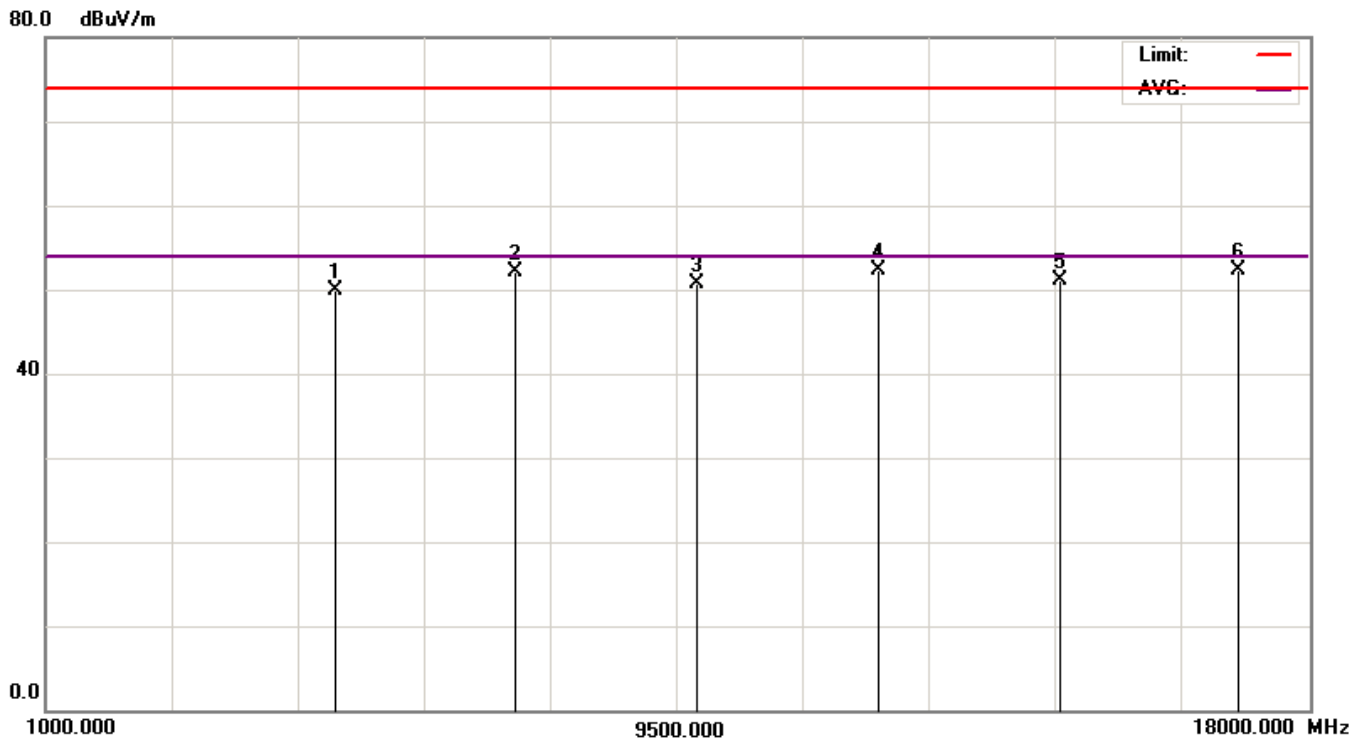

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

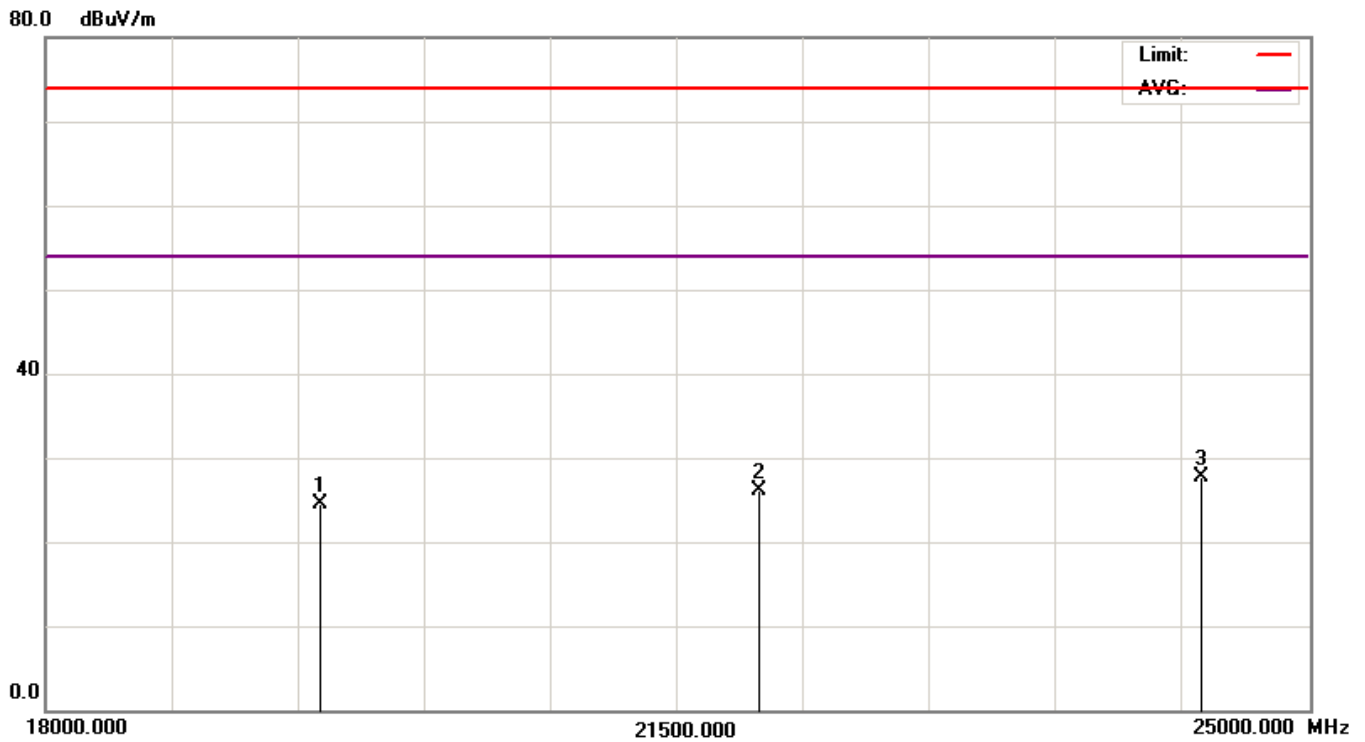

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480Hz


No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	40.59	10.26	50.85	74.00	-23.15	peak
2	7440.0000	37.82	14.40	52.22	74.00	-21.78	peak
3	9920.0000	41.52	8.67	50.19	74.00	-23.81	peak
4	12400.0000	39.63	12.45	52.08	74.00	-21.92	peak
5	14880.0000	38.49	12.52	51.01	74.00	-22.99	peak
6	17360.0000	36.57	15.80	52.37	74.00	-21.63	peak
7	19840.0000	44.58	-18.50	26.08	74.00	-47.92	peak
8	22320.0000	42.67	-18.50	24.17	74.00	-49.83	peak
9	24800.0000	44.23	-18.50	25.73	74.00	-48.27	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)

Horizontal

80.0 dBuV/m

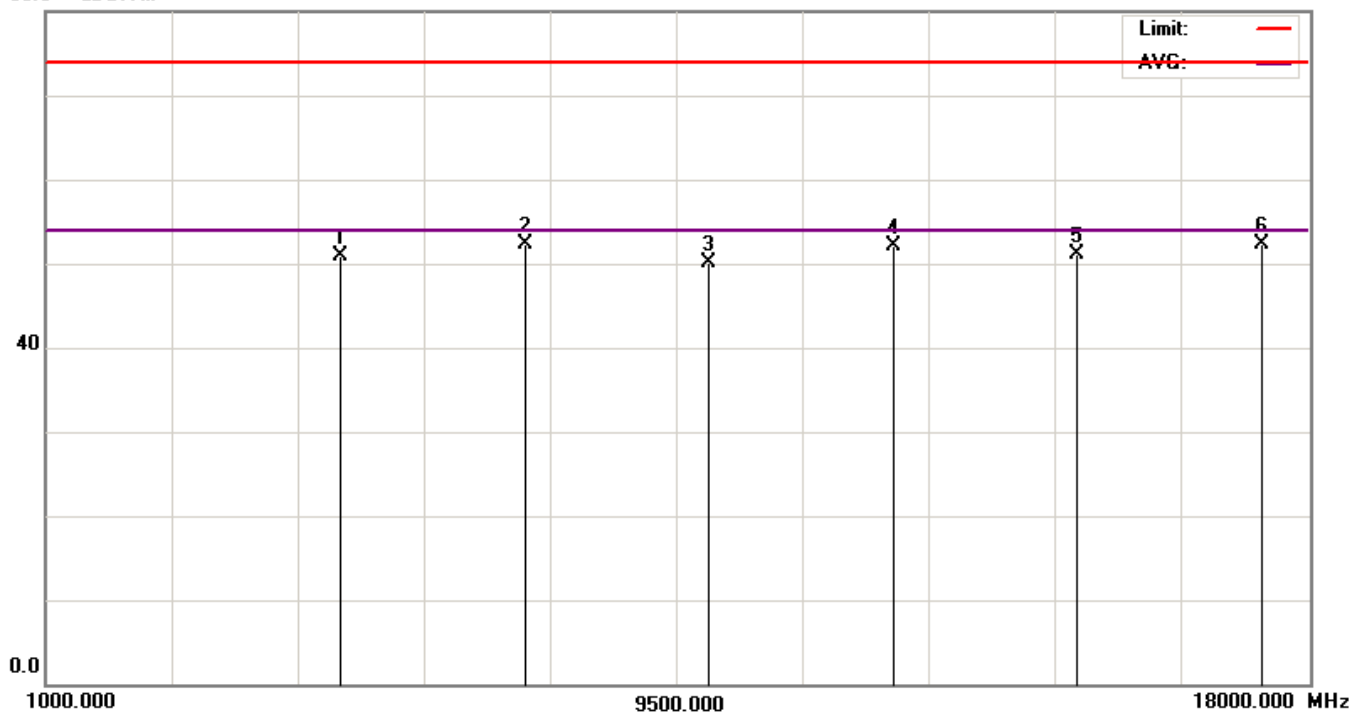


Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

80.0 dBuV/m

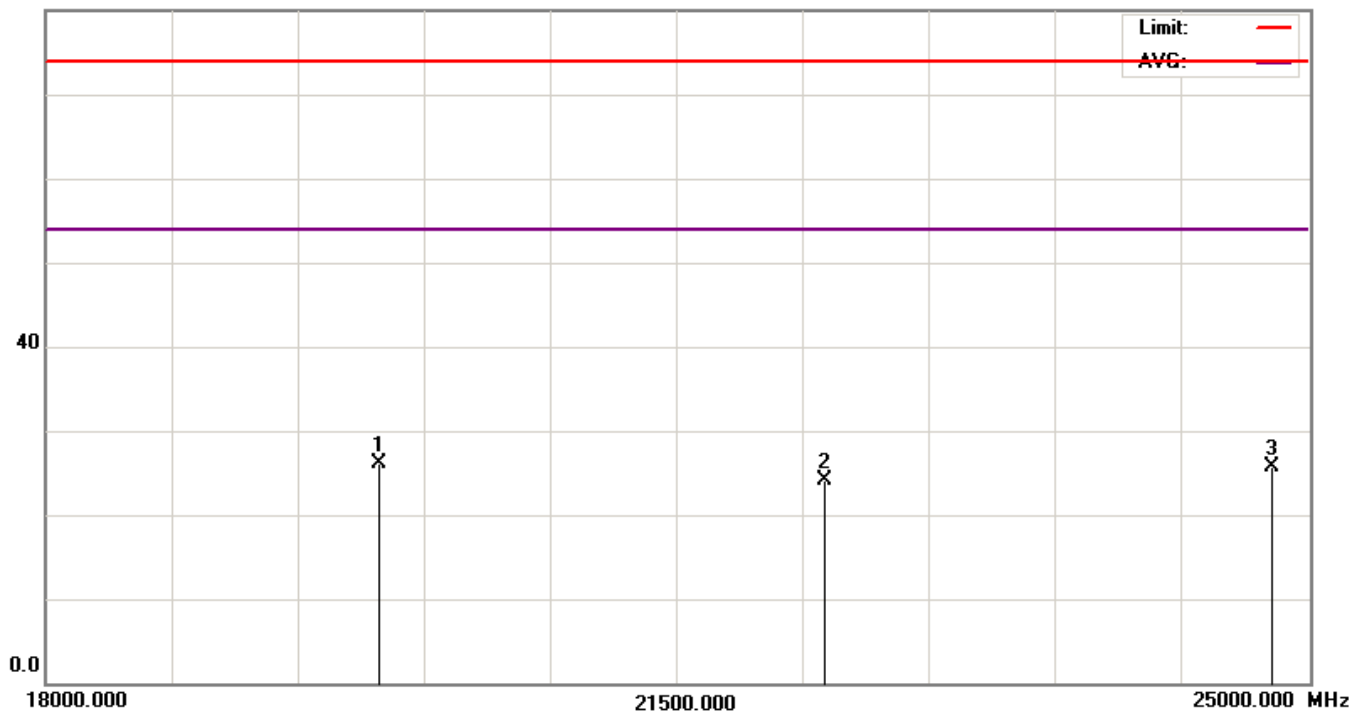

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	39.57	11.92	51.49	74.00	-22.51	peak
2	7440.0000	38.62	14.07	52.69	74.00	-21.31	peak
3	9920.0000	37.68	12.91	50.59	74.00	-23.41	peak
4	12400.0000	38.49	13.39	51.88	74.00	-22.12	peak
5	14880.0000	40.53	11.77	52.30	74.00	-21.70	peak
6	17360.0000	34.41	17.25	51.66	74.00	-22.34	peak
7	19840.0000	46.57	-17.50	29.07	74.00	-44.93	peak
8	22320.0000	44.64	-17.50	27.14	74.00	-46.86	peak
9	24800.0000	43.41	-17.50	25.91	74.00	-48.09	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

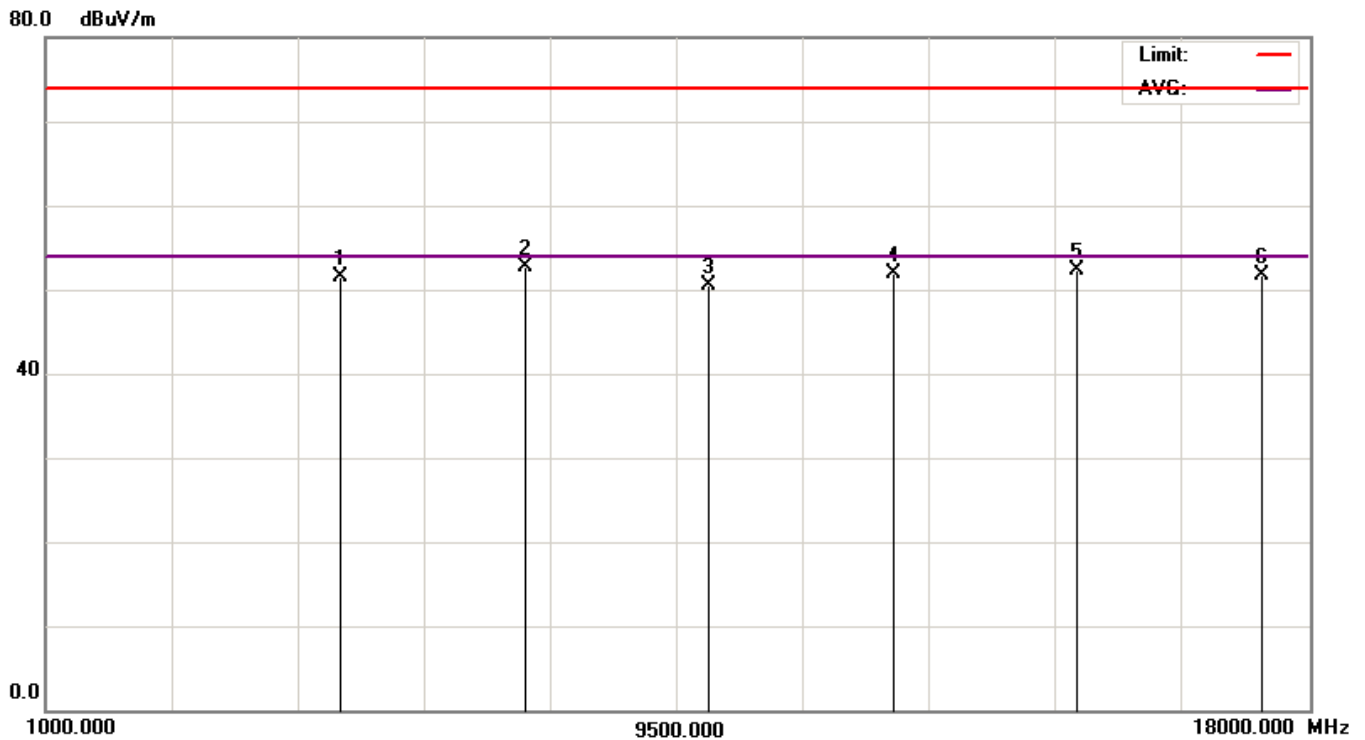

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

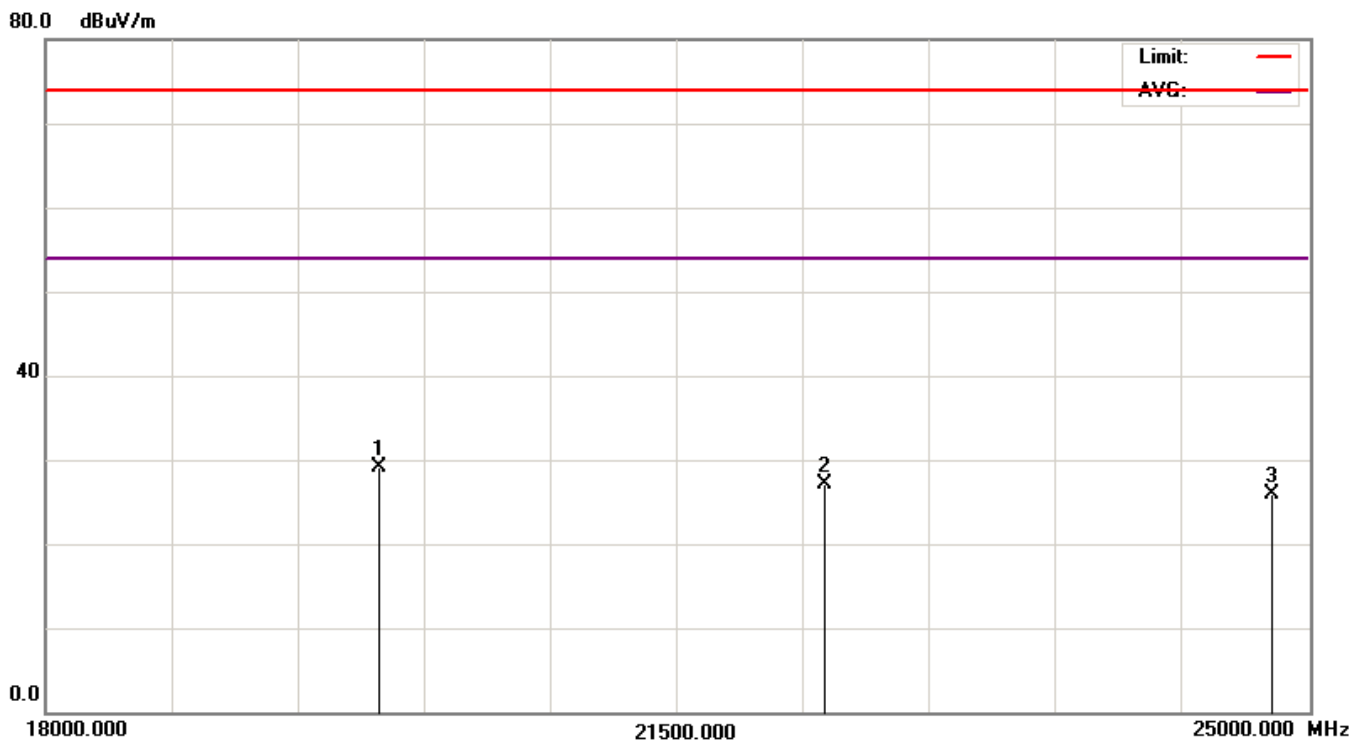

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - π /4 PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	40.03	9.12	49.15	74.00	-24.85	peak
2	7206.0000	37.69	14.38	52.07	74.00	-21.93	peak
3	9608.0000	36.54	10.98	47.52	74.00	-26.48	peak
4	12010.0000	37.18	15.70	52.88	74.00	-21.12	peak
5	14412.0000	38.65	10.39	49.04	74.00	-24.96	peak
6	16814.0000	37.04	13.64	50.68	74.00	-23.32	peak
7	19216.0000	44.35	-18.50	25.85	74.00	-48.15	peak
8	21618.0000	45.17	-18.50	26.67	74.00	-47.33	peak
9	24020.0000	44.61	-18.50	26.11	74.00	-47.89	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Horizontal

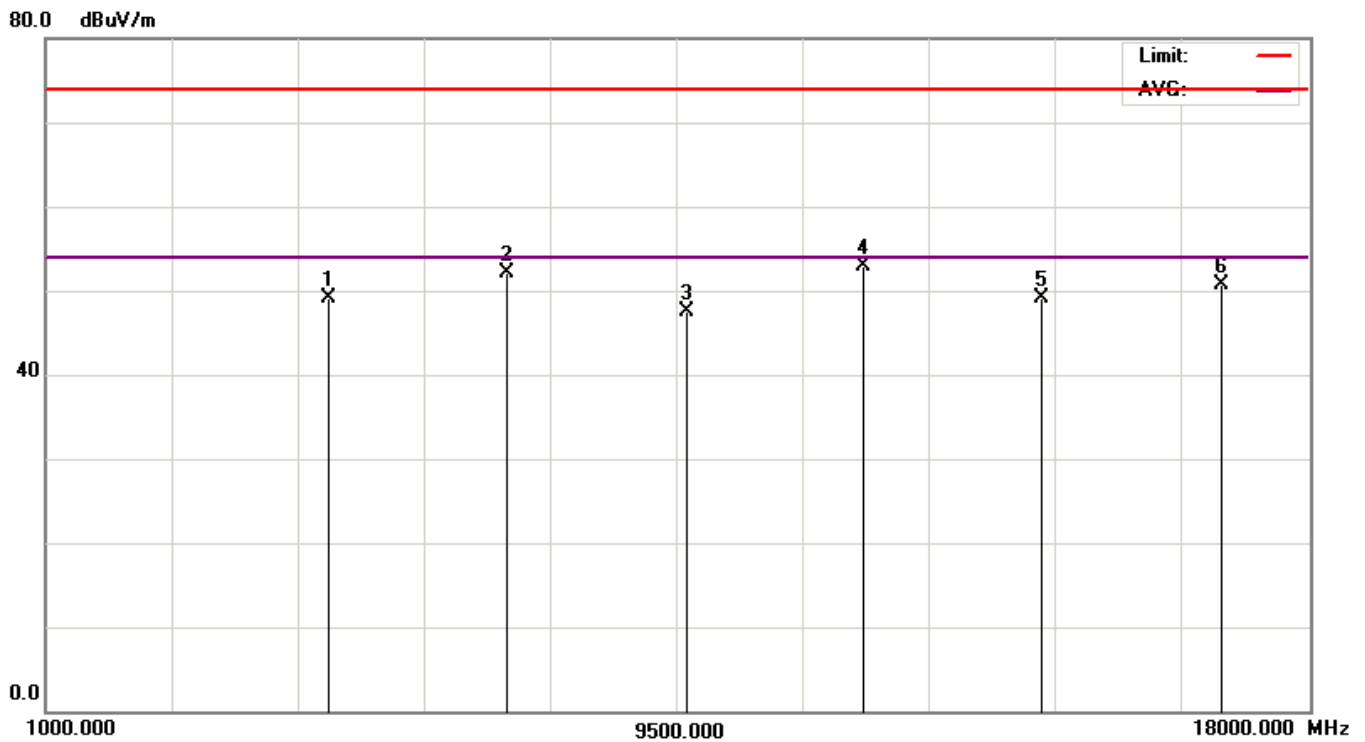

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

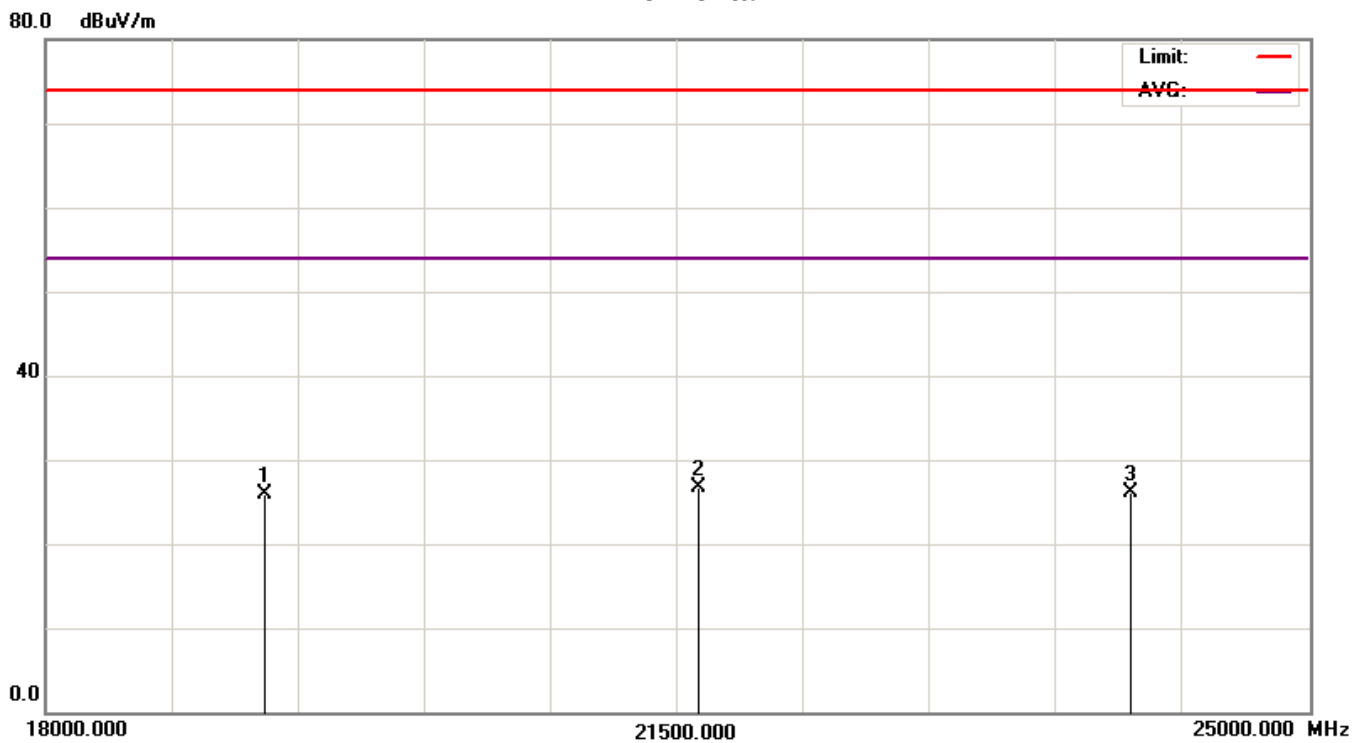

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	40.02	9.42	49.44	74.00	-24.56	peak
2	7206.0000	37.38	14.27	51.65	74.00	-22.35	peak
3	9608.0000	38.49	13.12	51.61	74.00	-22.39	peak
4	12010.0000	34.12	17.37	51.49	74.00	-22.51	peak
5	14412.0000	38.55	9.66	48.21	74.00	-25.79	peak
6	16814.0000	37.64	14.56	52.20	74.00	-21.80	peak
7	19216.0000	43.52	-17.50	26.02	74.00	-47.98	peak
8	21618.0000	44.16	-17.50	26.66	74.00	-47.34	peak
9	24020.0000	43.55	-17.50	26.05	74.00	-47.95	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

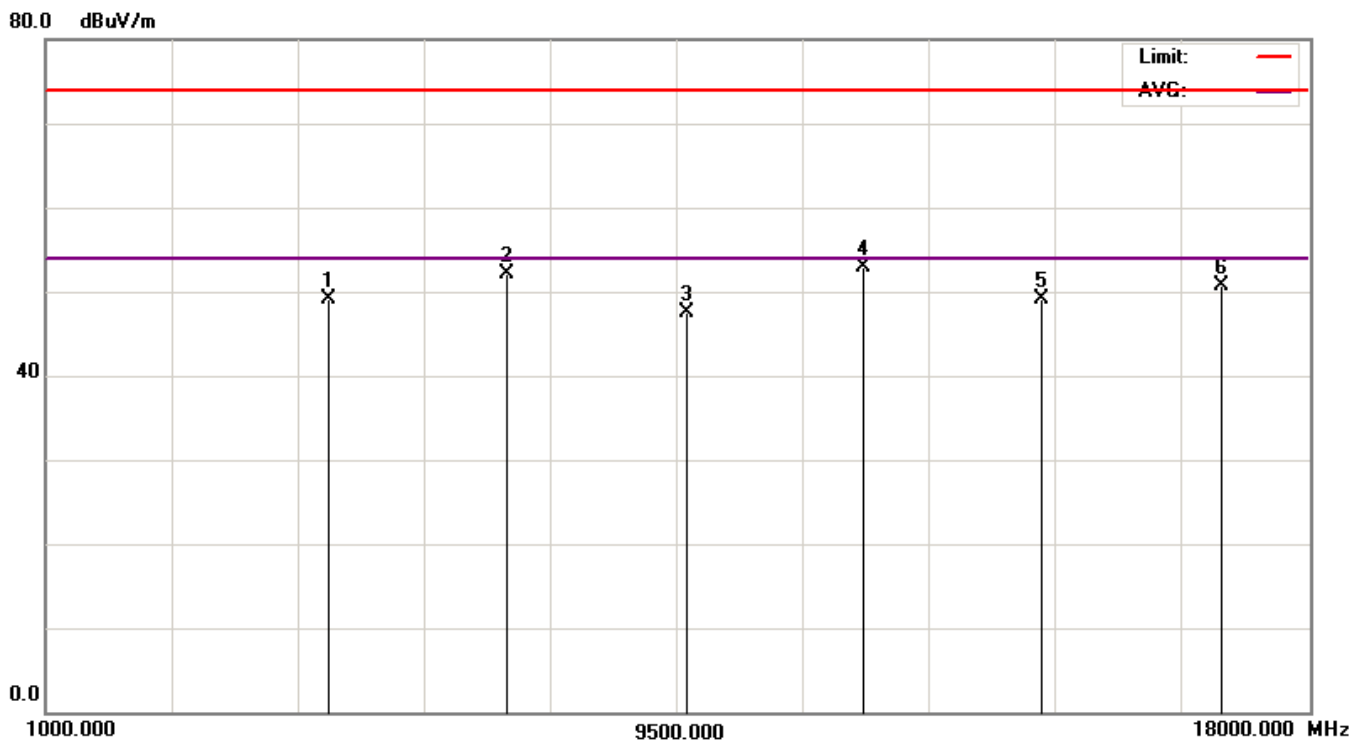

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

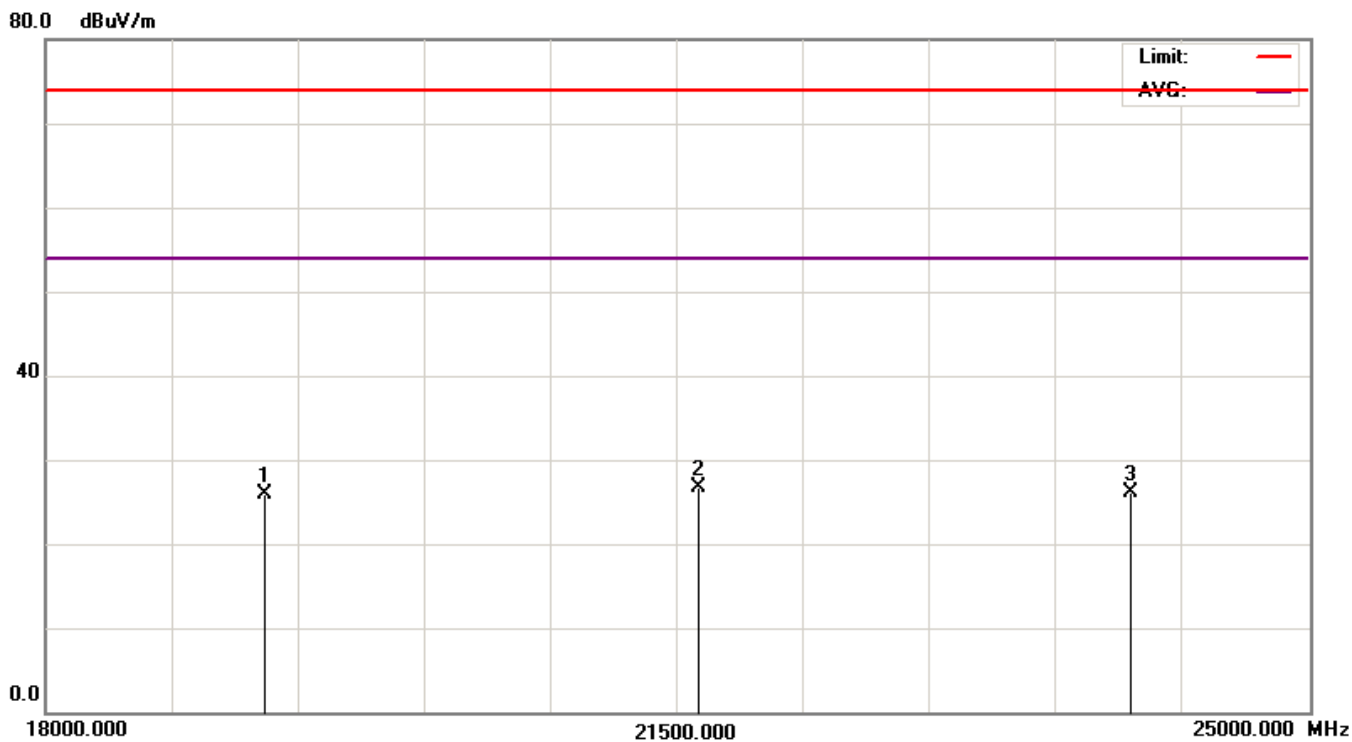

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - π /4 PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440 MHz


No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	40.68	9.46	50.14	74.00	-23.86	peak
2	7320.0000	37.57	14.74	52.31	74.00	-21.69	peak
3	9760.0000	39.06	11.24	50.30	74.00	-23.70	peak
4	12200.0000	33.36	16.10	49.46	74.00	-24.54	peak
5	14640.0000	37.59	11.61	49.20	74.00	-24.80	peak
6	17080.0000	36.03	14.24	50.27	74.00	-23.73	peak
7	19520.0000	44.01	-18.50	25.51	74.00	-48.49	peak
8	21960.0000	43.91	-18.50	25.41	74.00	-48.59	peak
9	24400.0000	45.21	-18.50	26.71	74.00	-47.29	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)

Horizontal


80.0 dBuV/m

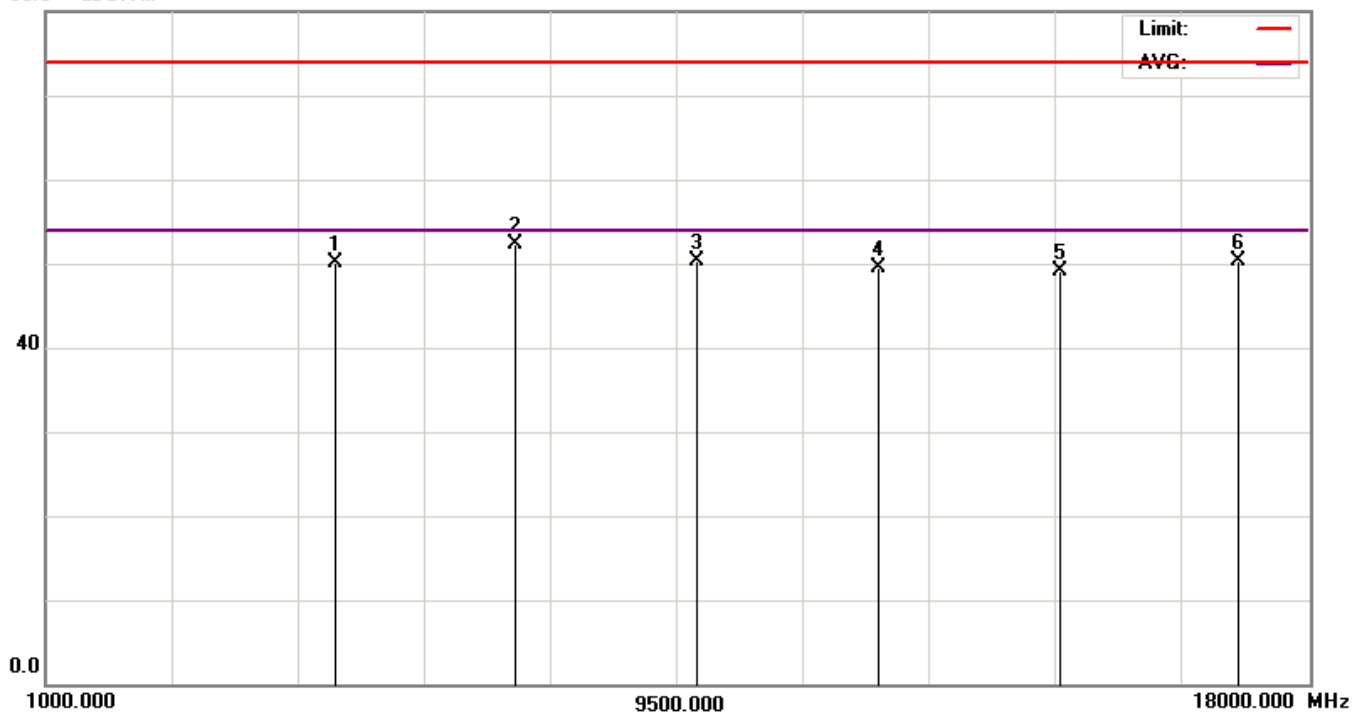

Remark: 1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

80.0 dBuV/m

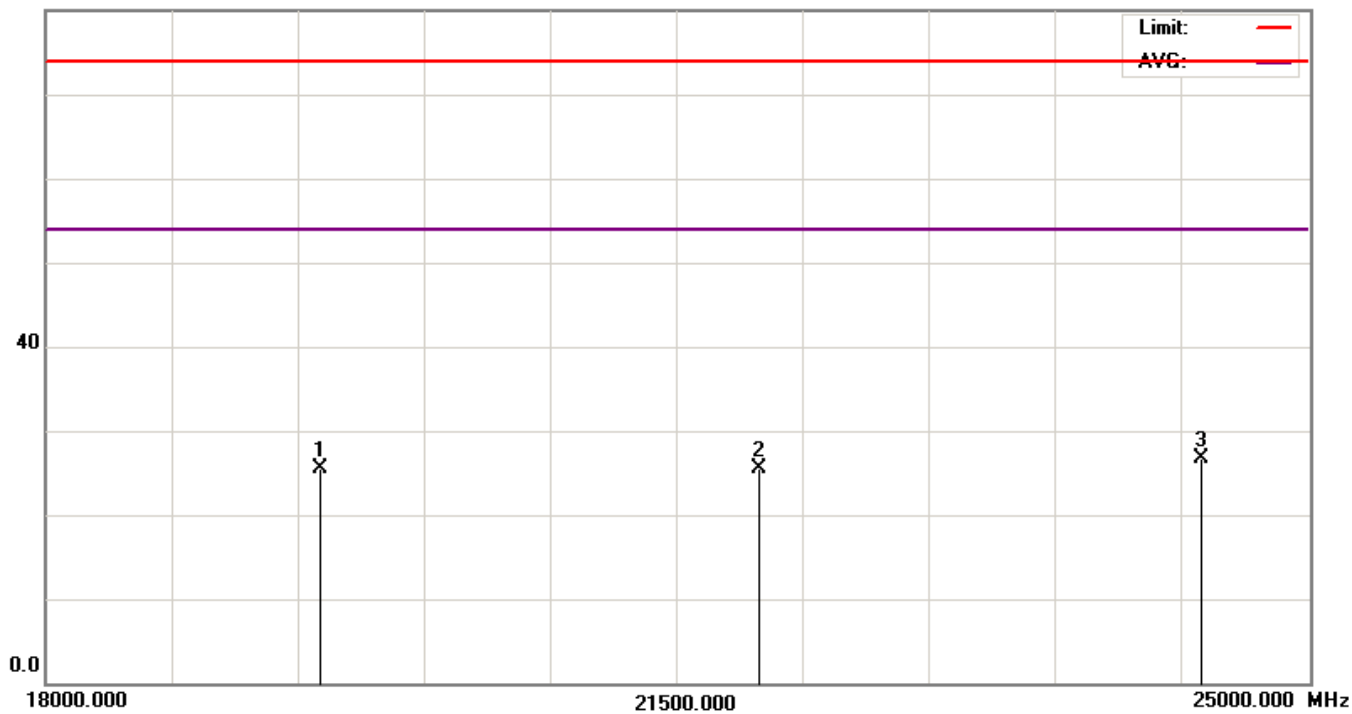

Remark: 1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	38.10	10.28	48.38	74.00	-25.62	peak
2	7320.0000	37.95	14.51	52.46	74.00	-21.54	peak
3	9760.0000	37.09	13.37	50.46	74.00	-23.54	peak
4	12200.0000	33.42	17.83	51.25	74.00	-22.75	peak
5	14640.0000	40.24	10.03	50.27	74.00	-23.73	peak
6	17080.0000	37.76	15.07	52.83	74.00	-21.17	peak
7	19520.0000	43.85	-17.50	26.35	74.00	-47.65	peak
8	21960.0000	42.08	-17.50	24.58	74.00	-49.42	peak
9	24400.0000	43.71	-17.50	26.21	74.00	-47.79	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

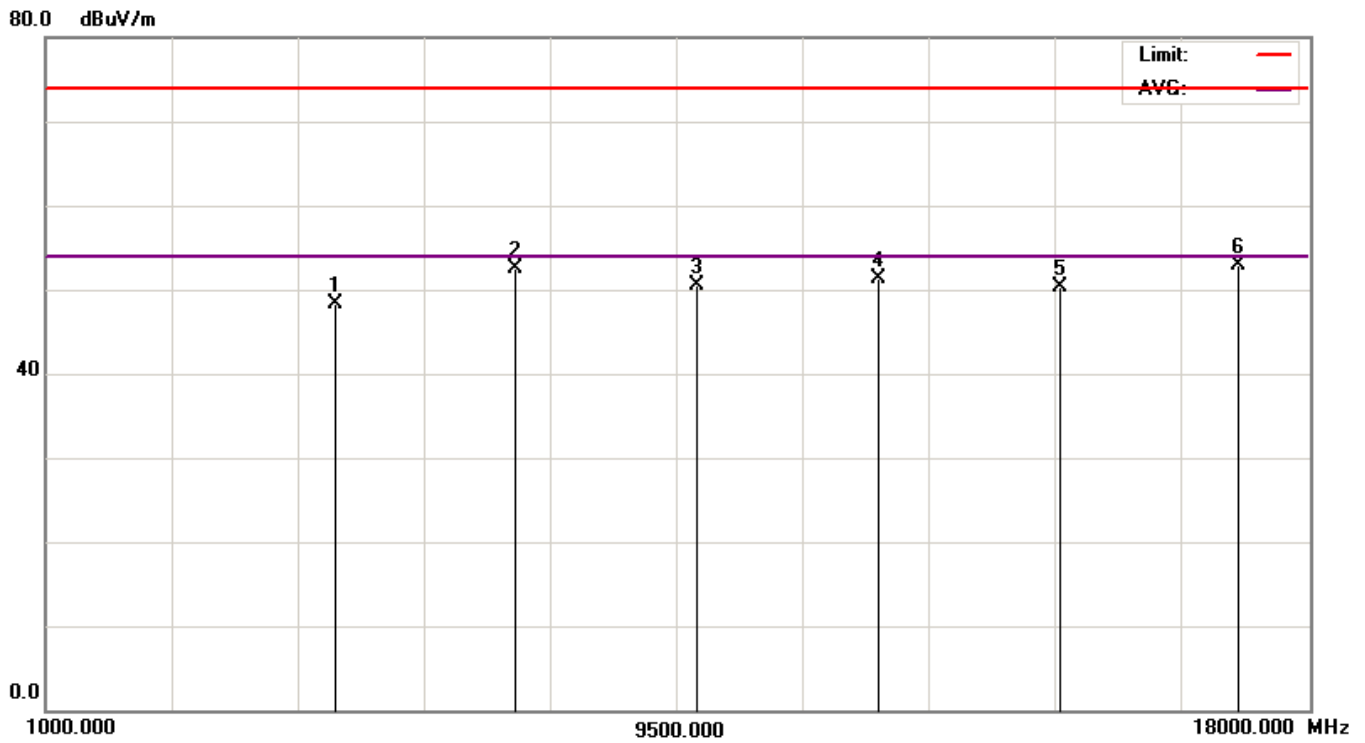

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

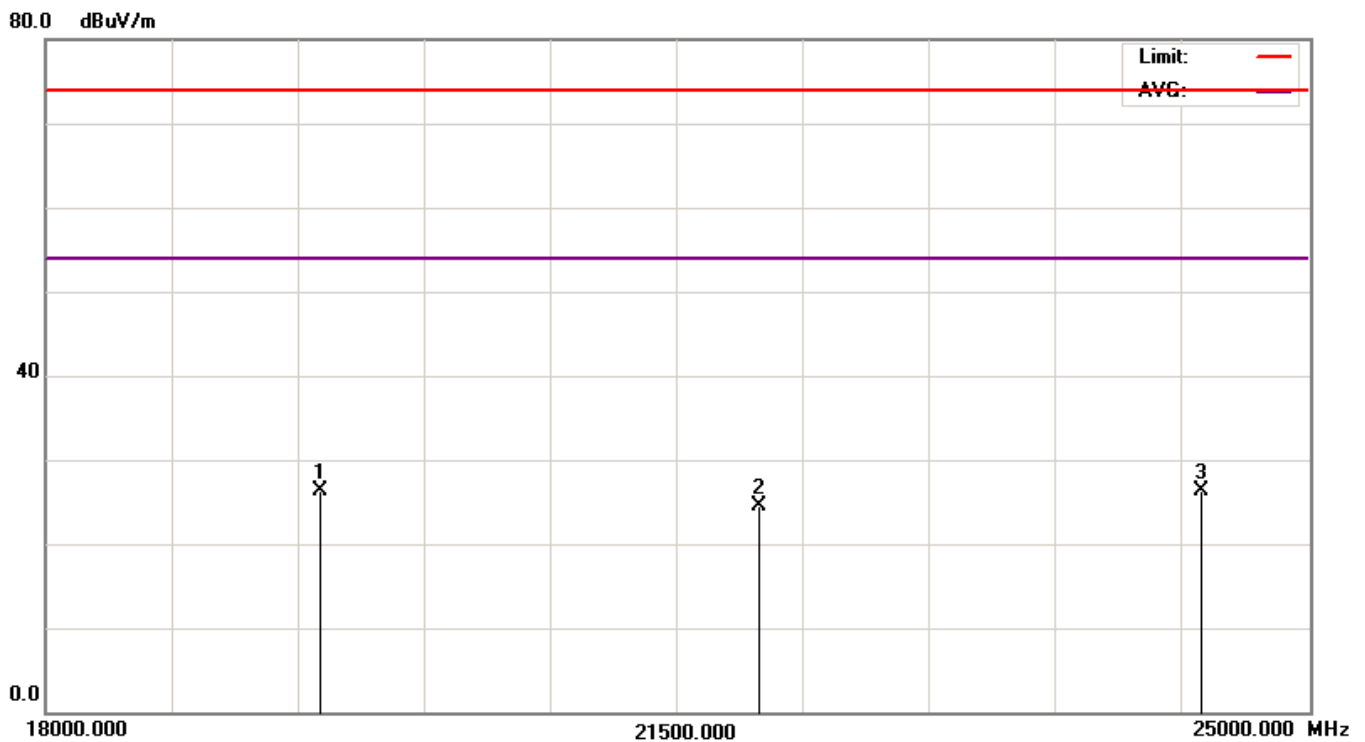

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - π /4 PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	39.80	10.26	50.06	74.00	-23.94	peak
2	7440.0000	37.30	14.40	51.70	74.00	-22.30	peak
3	9920.0000	40.22	8.67	48.89	74.00	-25.11	peak
4	12400.0000	38.90	12.45	51.35	74.00	-22.65	peak
5	14880.0000	37.59	12.52	50.11	74.00	-23.89	peak
6	17360.0000	37.04	15.80	52.84	74.00	-21.16	peak
7	19840.0000	45.23	-18.50	26.73	74.00	-47.27	peak
8	22320.0000	43.67	-18.50	25.17	74.00	-48.83	peak
9	24800.0000	43.23	-18.50	24.73	74.00	-49.27	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Horizontal

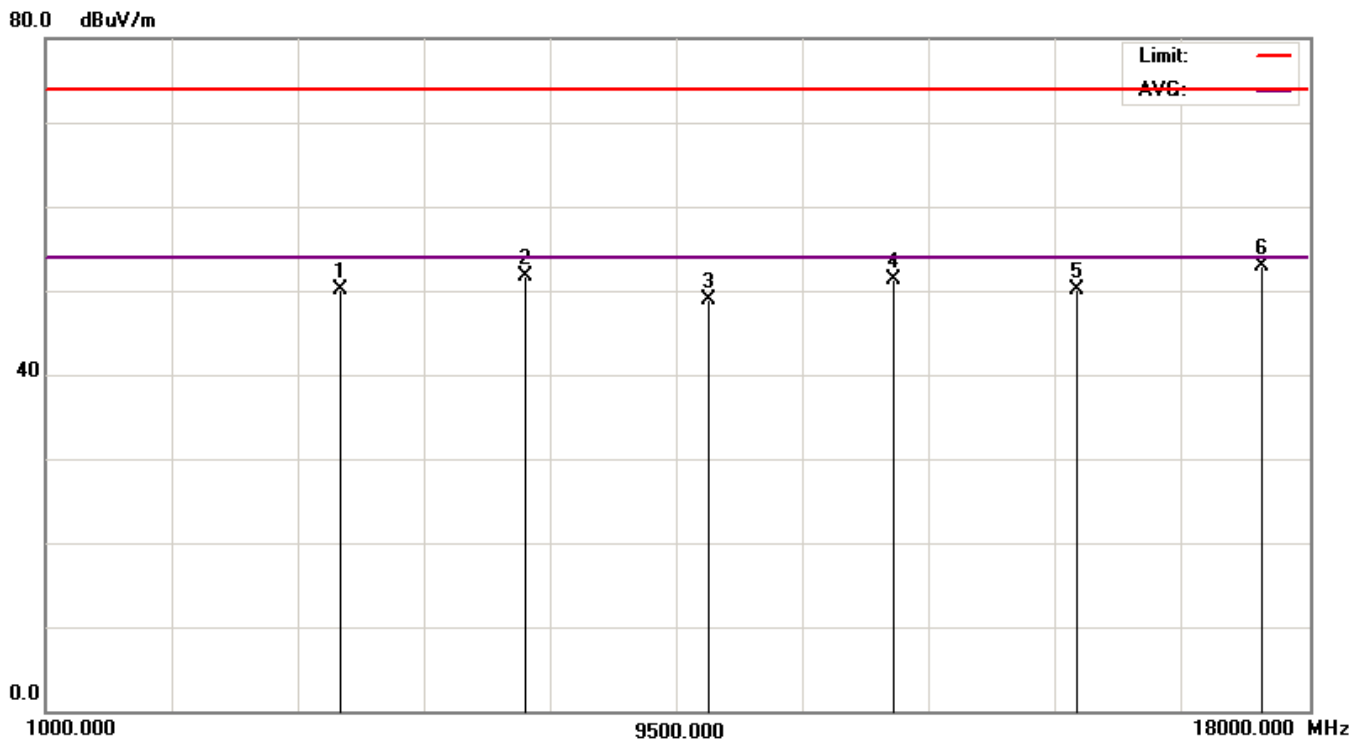

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

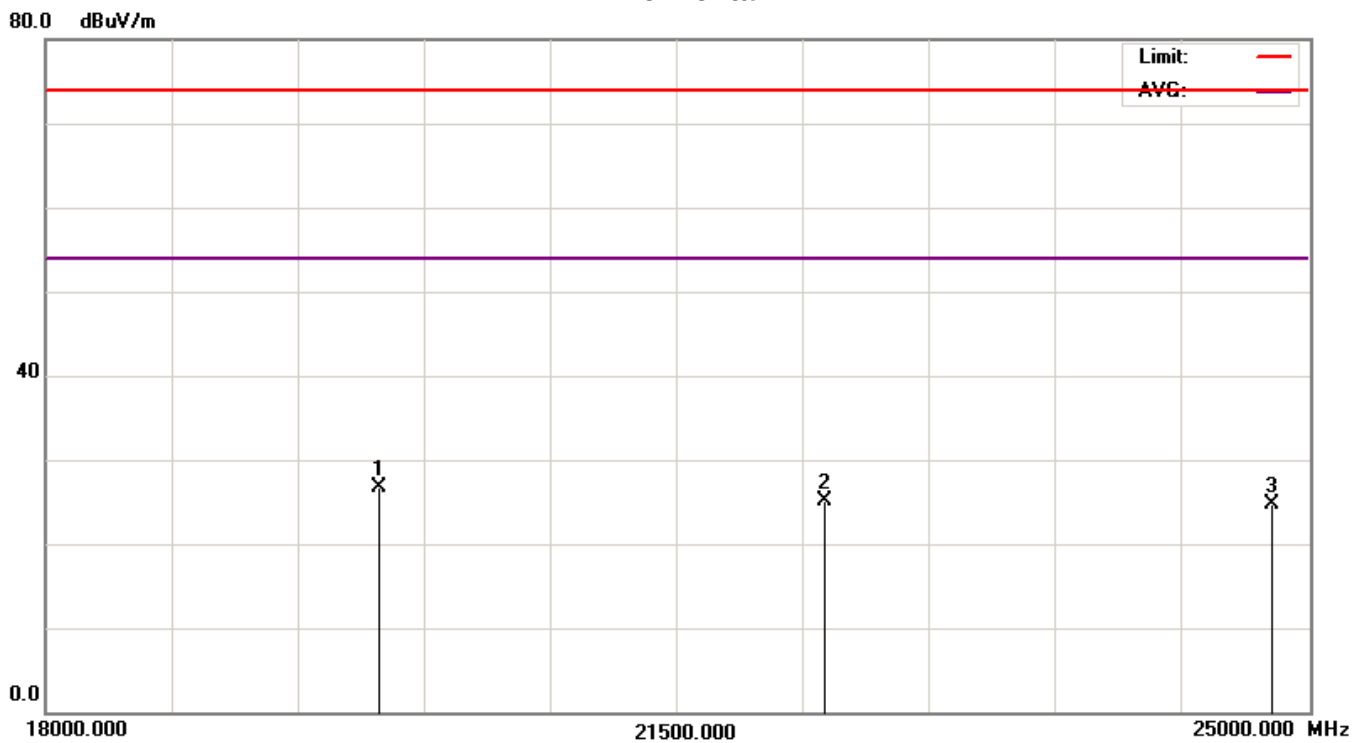

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	38.56	11.92	50.48	74.00	-23.52	peak
2	7440.0000	37.25	14.07	51.32	74.00	-22.68	peak
3	9920.0000	36.68	12.91	49.59	74.00	-24.41	peak
4	12400.0000	37.49	13.39	50.88	74.00	-23.12	peak
5	14880.0000	39.08	11.77	50.85	74.00	-23.15	peak
6	17360.0000	33.62	17.25	50.87	74.00	-23.13	peak
7	19840.0000	45.58	-17.50	28.08	74.00	-45.92	peak
8	22320.0000	43.29	-17.50	25.79	74.00	-48.21	peak
9	24800.0000	43.92	-17.50	26.42	74.00	-47.58	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

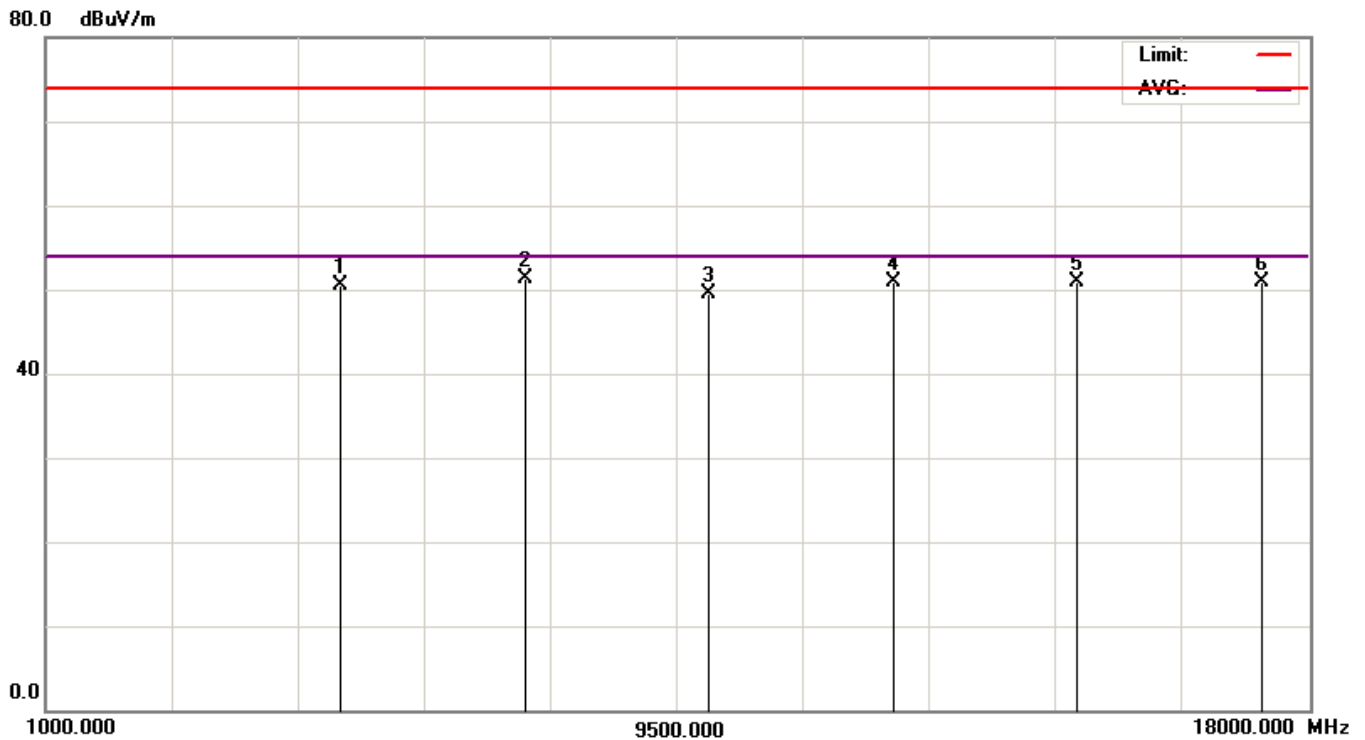

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

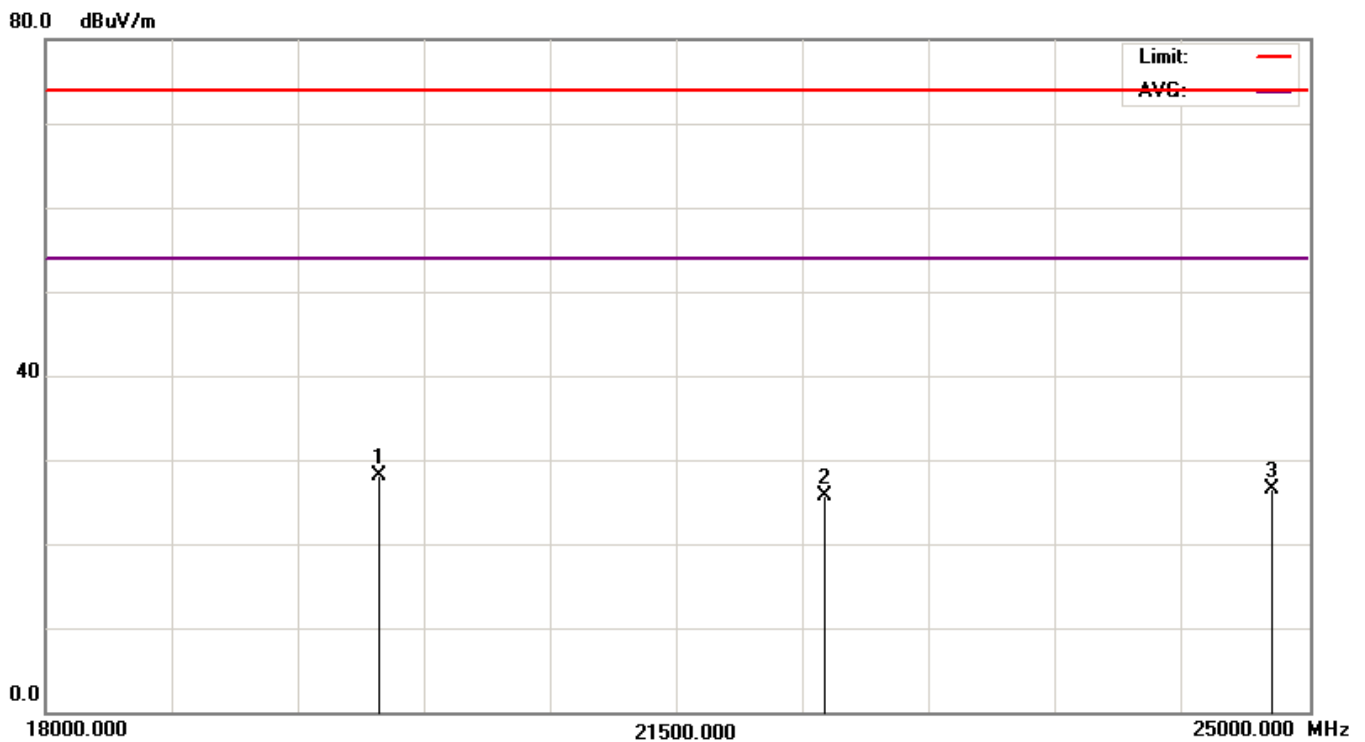

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	39.57	9.12	48.69	74.00	-25.31	peak
2	7206.0000	36.44	14.38	50.82	74.00	-23.18	peak
3	9608.0000	37.57	10.98	48.55	74.00	-25.45	peak
4	12010.0000	36.38	15.70	52.08	74.00	-21.92	peak
5	14412.0000	37.26	10.39	47.65	74.00	-26.35	peak
6	16814.0000	37.58	13.64	51.22	74.00	-22.78	peak
7	19216.0000	45.11	-18.50	26.61	74.00	-47.39	peak
8	21618.0000	44.72	-18.50	26.22	74.00	-47.78	peak
9	24020.0000	43.60	-18.50	25.10	74.00	-48.90	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Horizontal

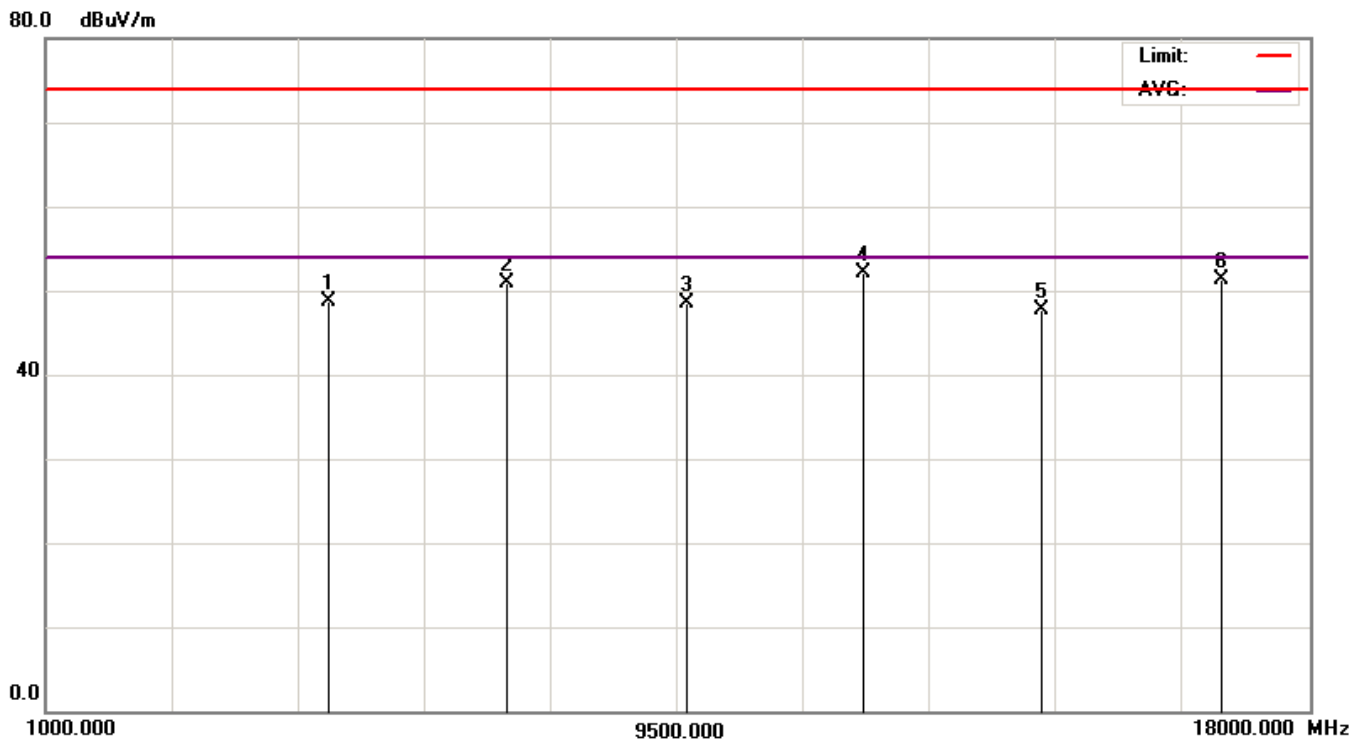

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

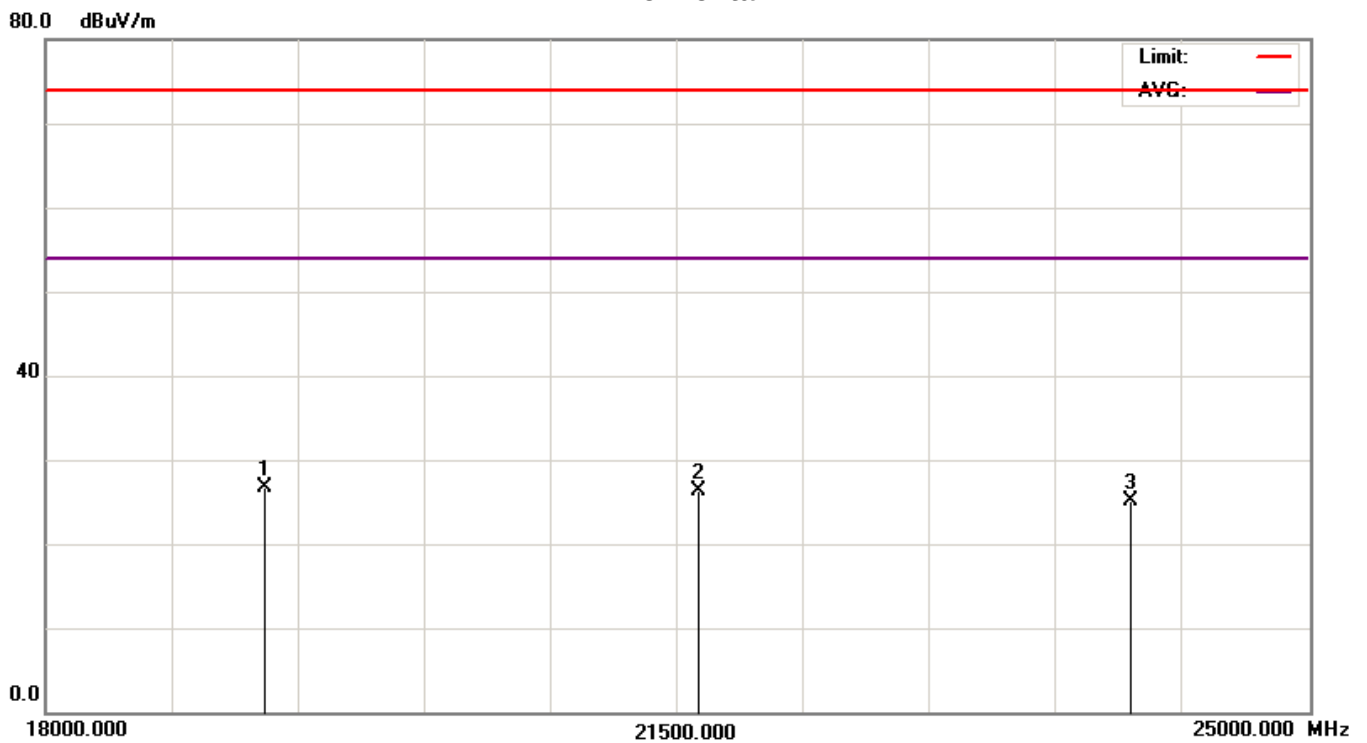

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4804.0000	39.28	9.42	48.70	74.00	-25.30	peak
2	7206.0000	37.54	14.27	51.81	74.00	-22.19	peak
3	9608.0000	36.58	13.12	49.70	74.00	-24.30	peak
4	12010.0000	35.29	17.37	52.66	74.00	-21.34	peak
5	14412.0000	37.33	9.66	46.99	74.00	-27.01	peak
6	16814.0000	36.42	14.56	50.98	74.00	-23.02	peak
7	19216.0000	44.23	-17.50	26.73	74.00	-47.27	peak
8	21618.0000	45.79	-17.50	28.29	74.00	-45.71	peak
9	24020.0000	43.84	-17.50	26.34	74.00	-47.66	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

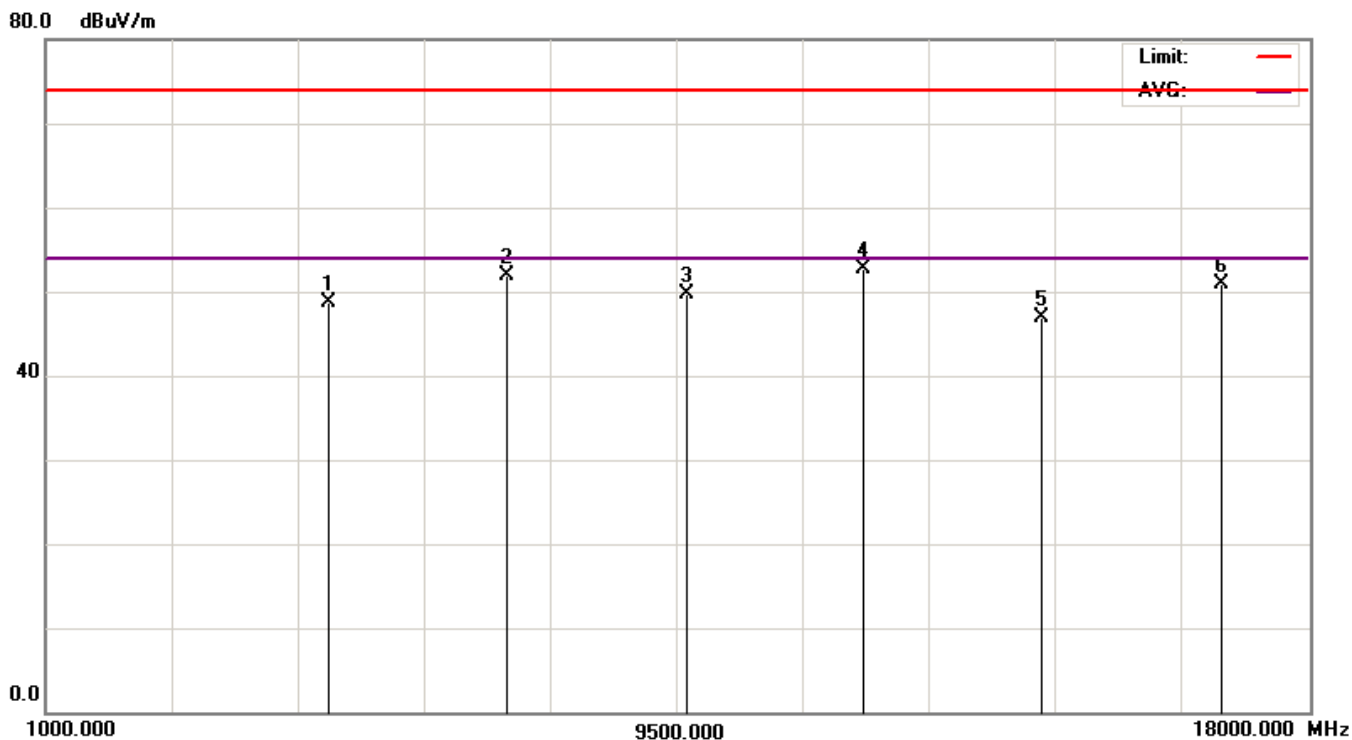

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

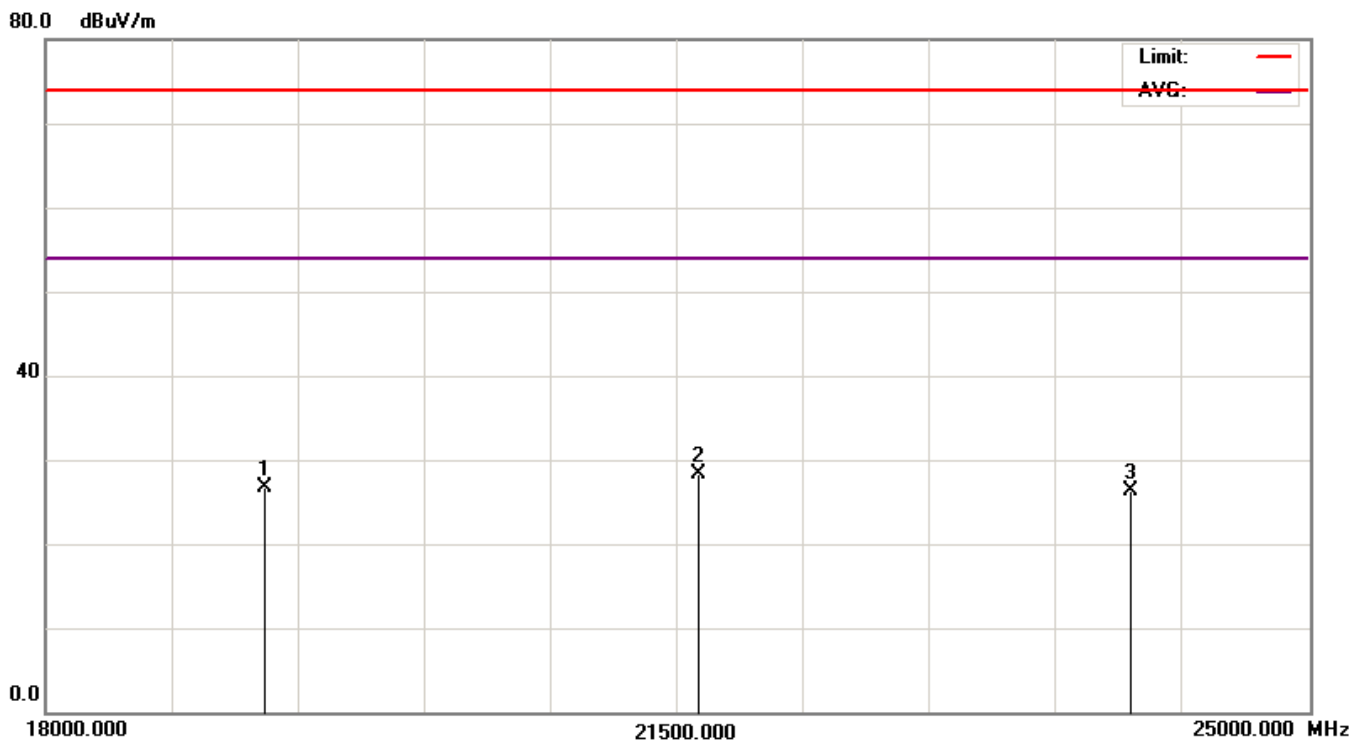

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2440 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	39.38	9.46	48.84	74.00	-25.16	peak
2	7320.0000	37.50	14.74	52.24	74.00	-21.76	peak
3	9760.0000	38.74	11.24	49.98	74.00	-24.02	peak
4	12200.0000	34.41	16.10	50.51	74.00	-23.49	peak
5	14640.0000	36.87	11.61	48.48	74.00	-25.52	peak
6	17080.0000	36.21	14.24	50.45	74.00	-23.55	peak
7	19520.0000	43.23	-18.50	24.73	74.00	-49.27	peak
8	21960.0000	44.73	-18.50	26.23	74.00	-47.77	peak
9	24400.0000	46.29	-18.50	27.79	74.00	-46.21	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Horizontal

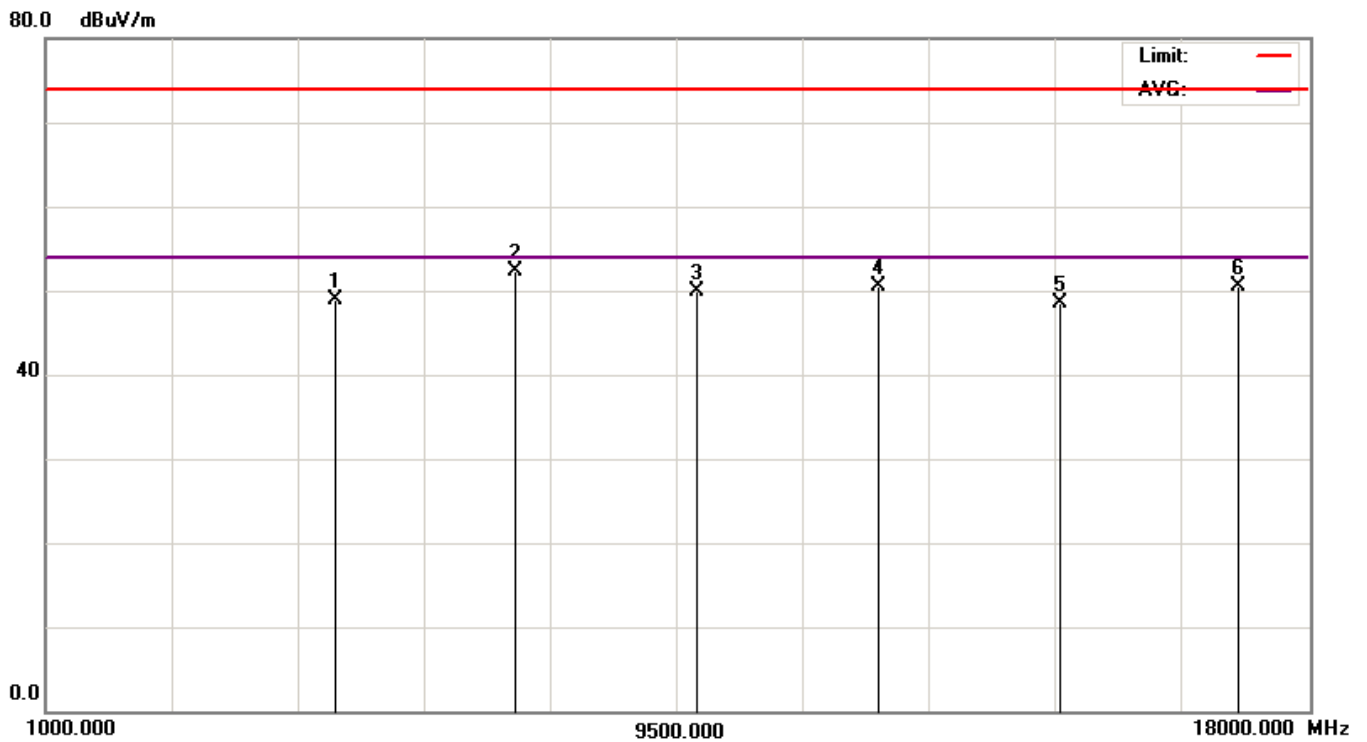

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

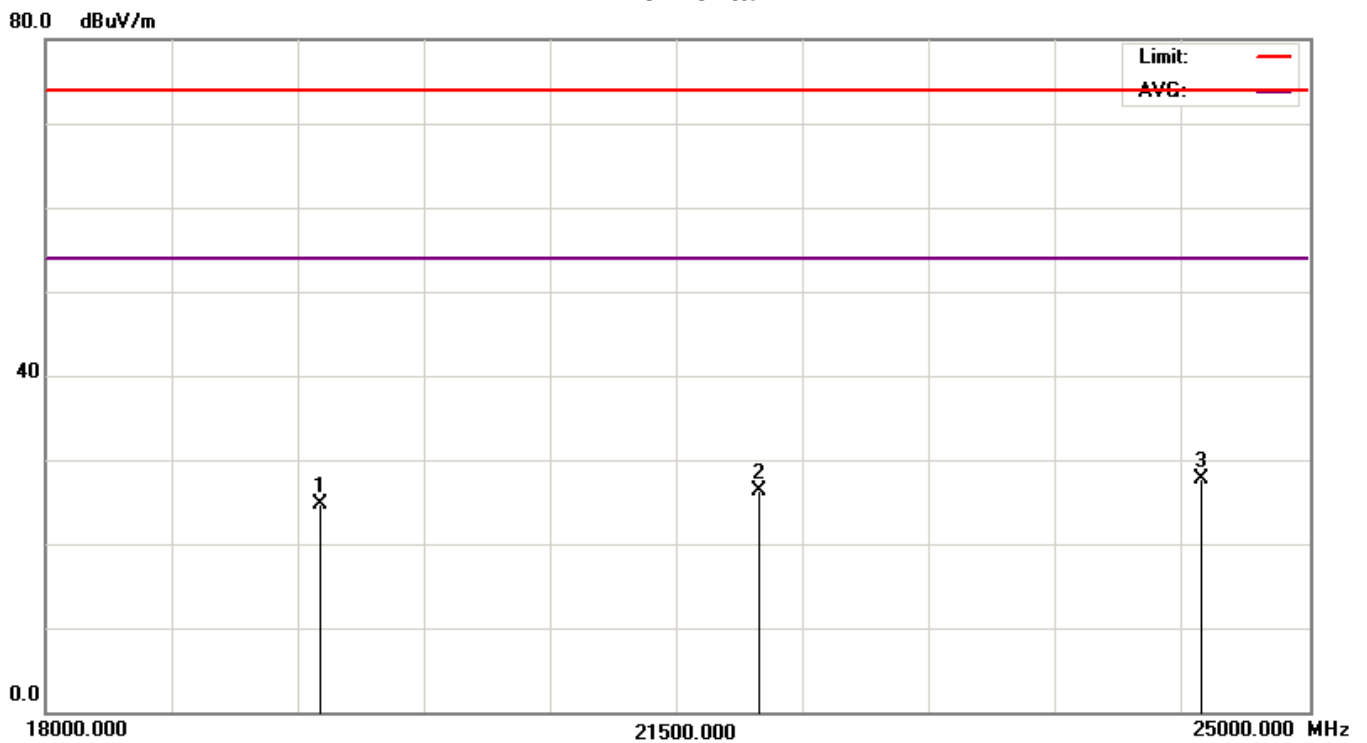

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2440MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4880.0000	38.56	10.28	48.84	74.00	-25.16	peak
2	7320.0000	37.71	14.51	52.22	74.00	-21.78	peak
3	9760.0000	36.84	13.37	50.21	74.00	-23.79	peak
4	12200.0000	34.43	17.83	52.26	74.00	-21.74	peak
5	14640.0000	39.35	10.03	49.38	74.00	-24.62	peak
6	17080.0000	36.15	15.07	51.22	74.00	-22.78	peak
7	19520.0000	44.85	-17.50	27.35	74.00	-46.65	peak
8	21960.0000	43.09	-17.50	25.59	74.00	-48.41	peak
9	24400.0000	44.11	-17.50	26.61	74.00	-47.39	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

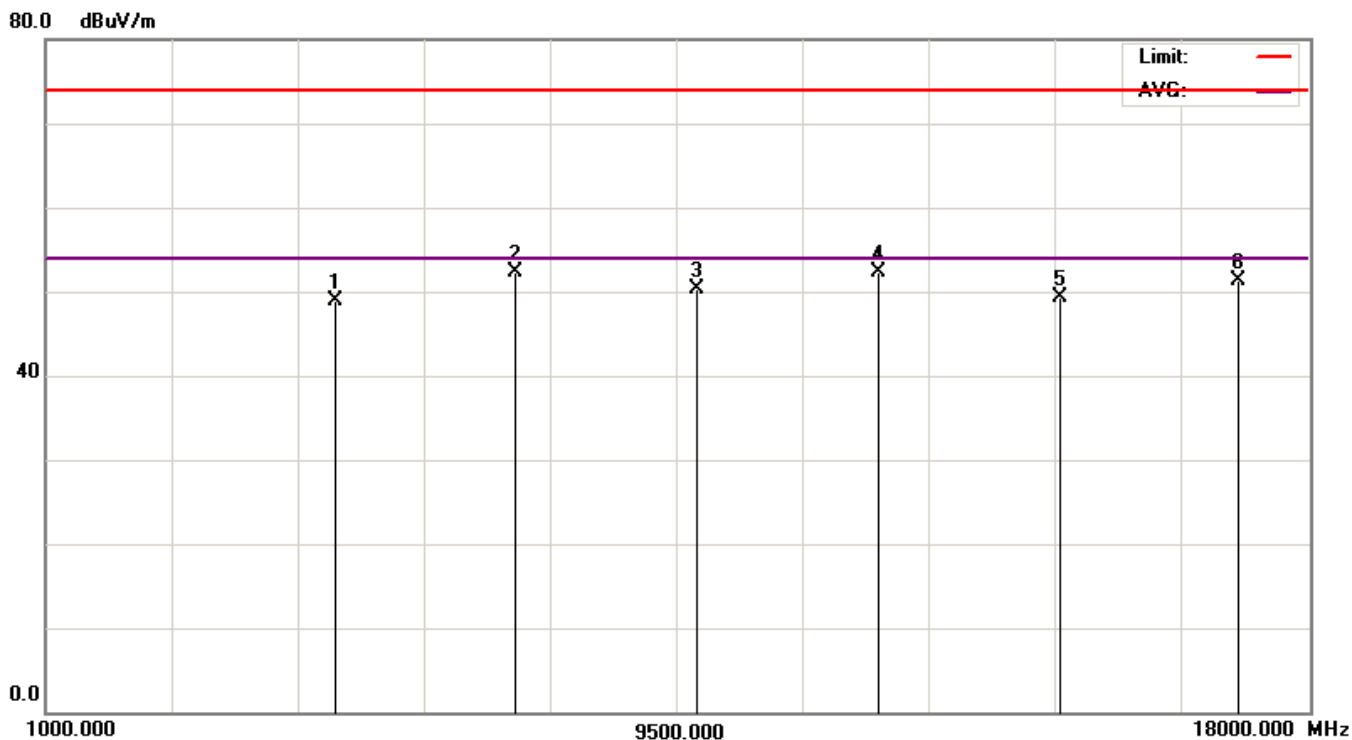

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

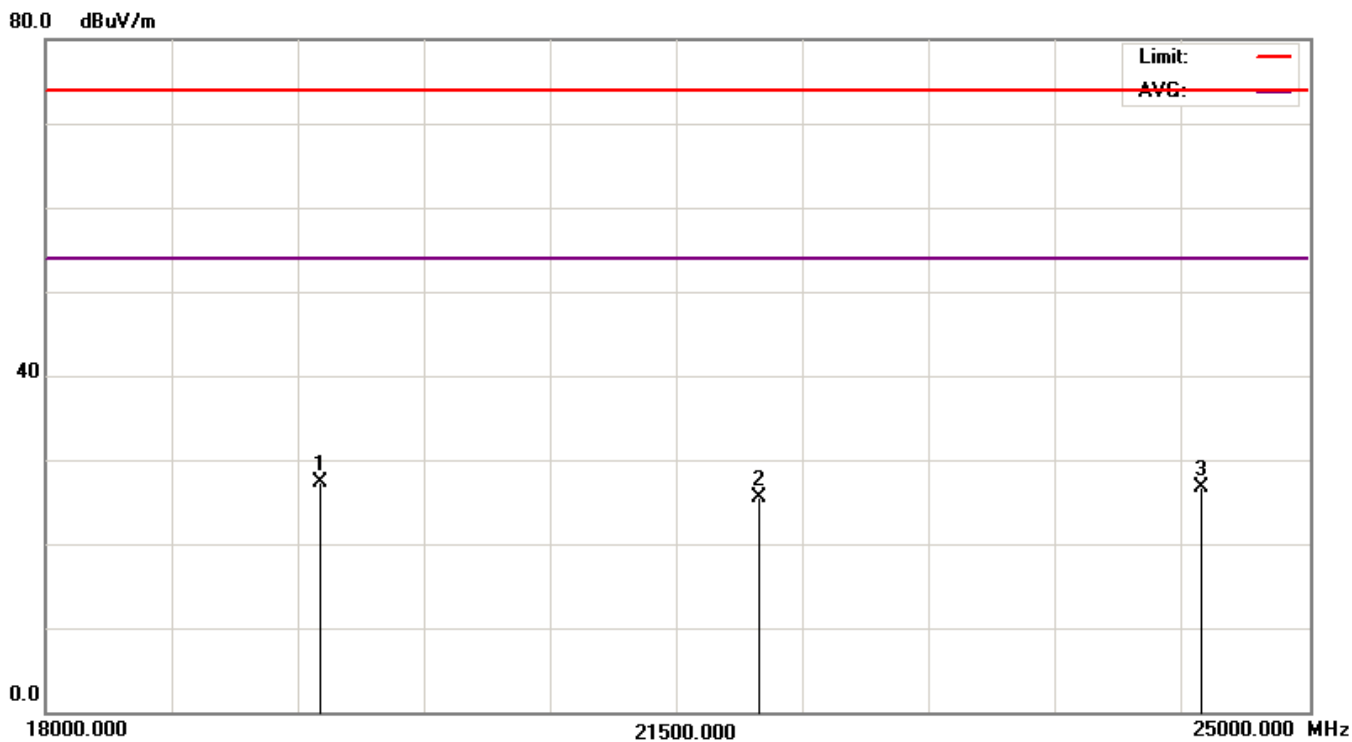

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz


No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	40.23	10.26	50.49	74.00	-23.51	peak
2	7440.0000	38.17	14.40	52.57	74.00	-21.43	peak
3	9920.0000	39.08	8.67	47.75	74.00	-26.25	peak
4	12400.0000	38.55	12.45	51.00	74.00	-23.00	peak
5	14880.0000	36.59	12.52	49.11	74.00	-24.89	peak
6	17360.0000	37.24	15.80	53.04	74.00	-20.96	peak
7	19840.0000	44.85	-18.50	26.35	74.00	-47.65	peak
8	22320.0000	43.19	-18.50	24.69	74.00	-49.31	peak
9	24800.0000	44.07	-18.50	25.57	74.00	-48.43	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)

Horizontal

80.0 dBuV/m

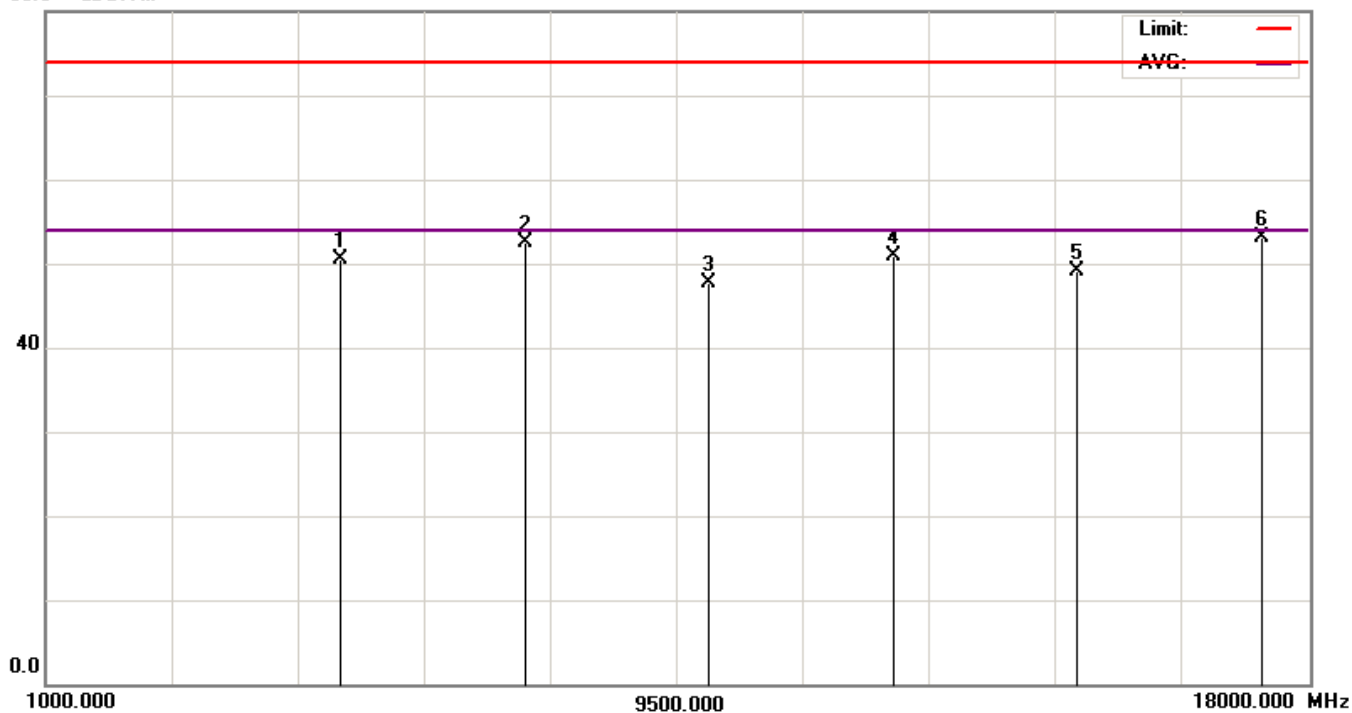


Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Horizontal

80.0 dBuV/m

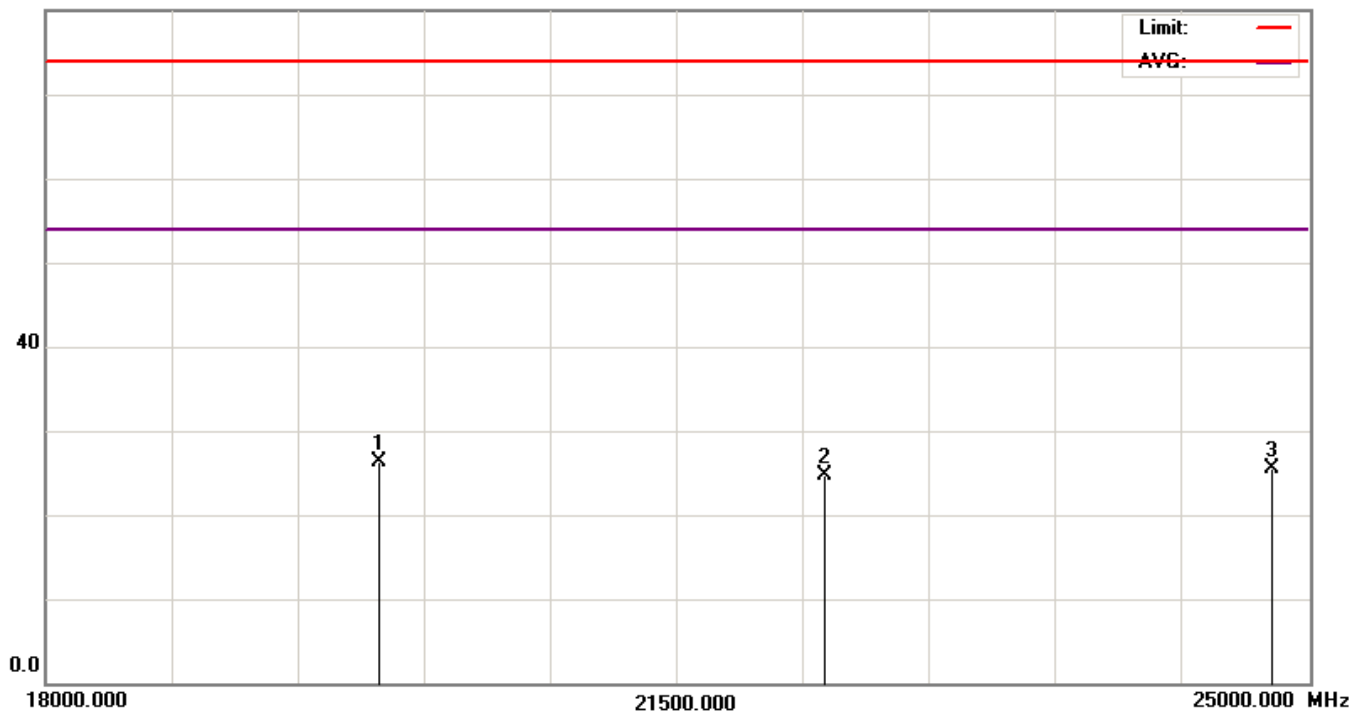

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.


Date of Test	May 05, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	4960.0000	39.62	11.92	51.54	74.00	-22.46	peak
2	7440.0000	36.91	14.07	50.98	74.00	-23.02	peak
3	9920.0000	36.84	12.91	49.75	74.00	-24.25	peak
4	12400.0000	37.35	13.39	50.74	74.00	-23.26	peak
5	14880.0000	39.26	11.77	51.03	74.00	-22.97	peak
6	17360.0000	34.39	17.25	51.64	74.00	-22.36	peak
7	19840.0000	46.33	-17.50	28.83	74.00	-45.17	peak
8	22320.0000	44.21	-17.50	26.71	74.00	-47.29	peak
9	24800.0000	44.62	-17.50	27.12	74.00	-46.88	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 4.35 dB.(1G-18G)
7. The measurement uncertainty is 4.37 dB.(18G-40G)


Vertical

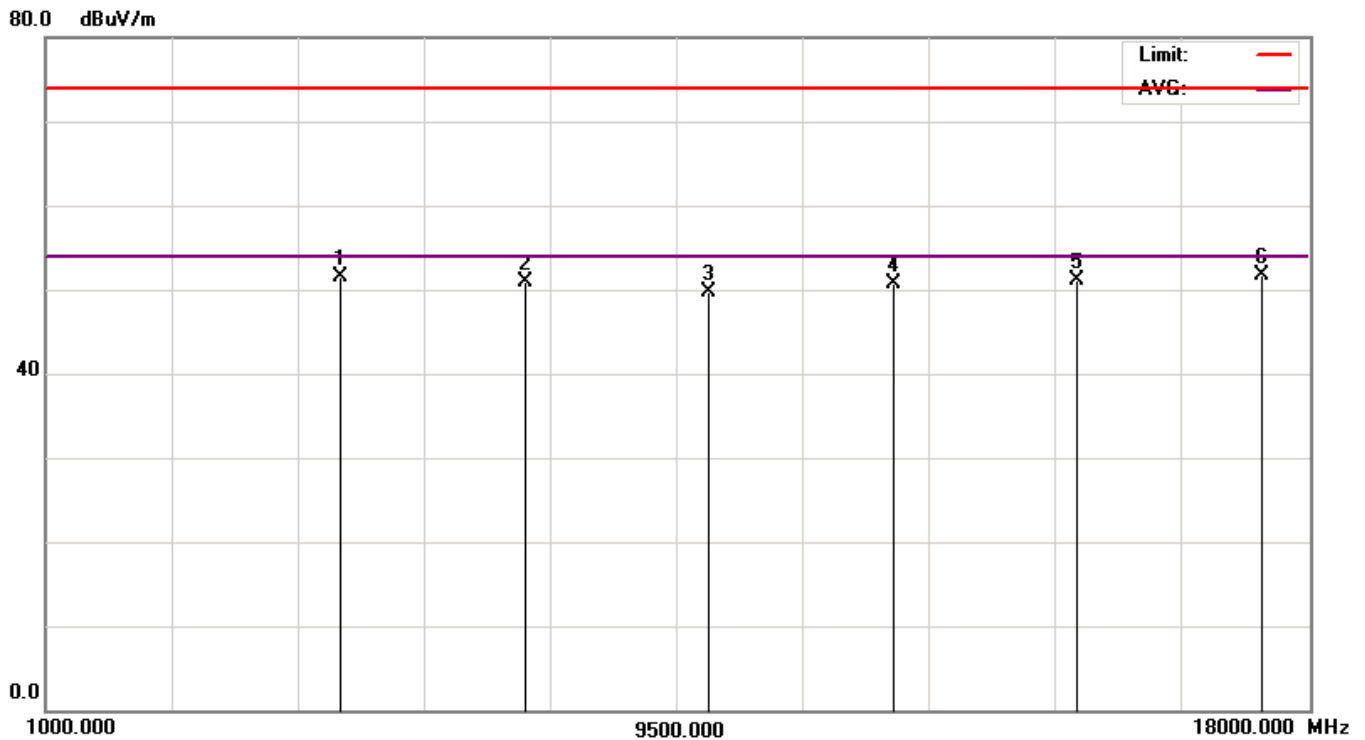

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

Vertical

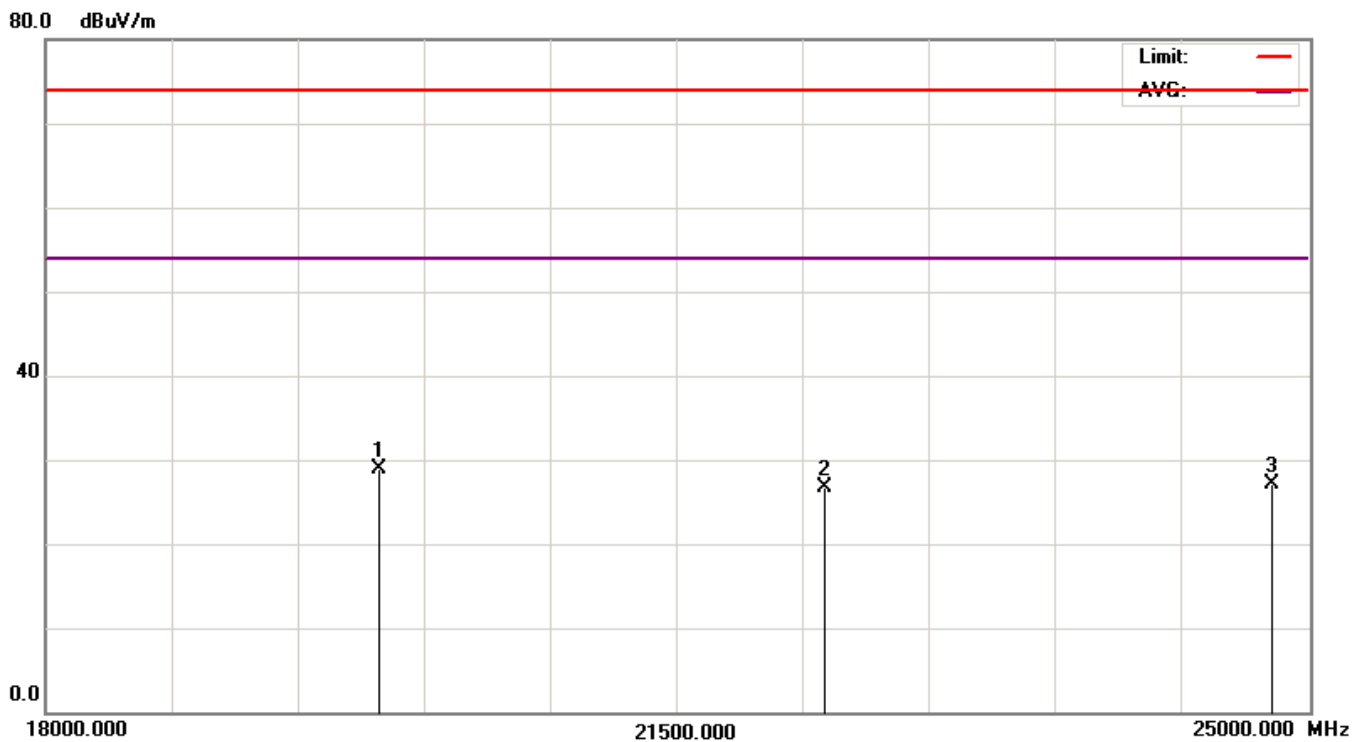

Remark:

1. The Peak (The red line of the graph indicates the peak measurements).
2. The AVG (The purple line of the graph indicates the average measurements).
3. The frequency range indicated in this graph is just a frequency range set automatically by the test equipment.
The tested frequency range is mention in above column of the test data table.

5. PEAK POWER OUTPUT


5.1 TEST EQUIPMENT

The following test equipments are used during the Conduct tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

5.2 BLOCK DIAGRAM OF TEST SETUP

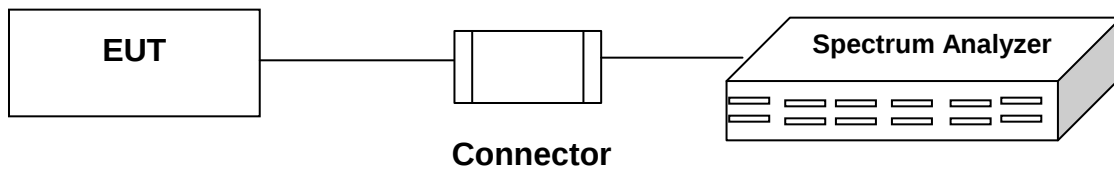

5.3 PEAK POWER OUTPUT LIMIT

The maximum peak power shall be less 1W.


5.4 TEST RESULT



Date of Test	May 06, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Test Mode	GFSK	Display Pattern	Program

Channel No.	Frequency (MHz)	Reading Level (dBm)	Cable loss (dB)	Measurement (dBm)	Required Limit	Result
0	2402	-18.46	0.59	-17.87	1W(30dBm)	Pass
38	2440	-17.52	0.69	-16.83	1W(30dBm)	Pass
78	2480	-17.15	0.73	-16.42	1W(30dBm)	Pass

Note :

Measurement = Reading Level +Cable loss

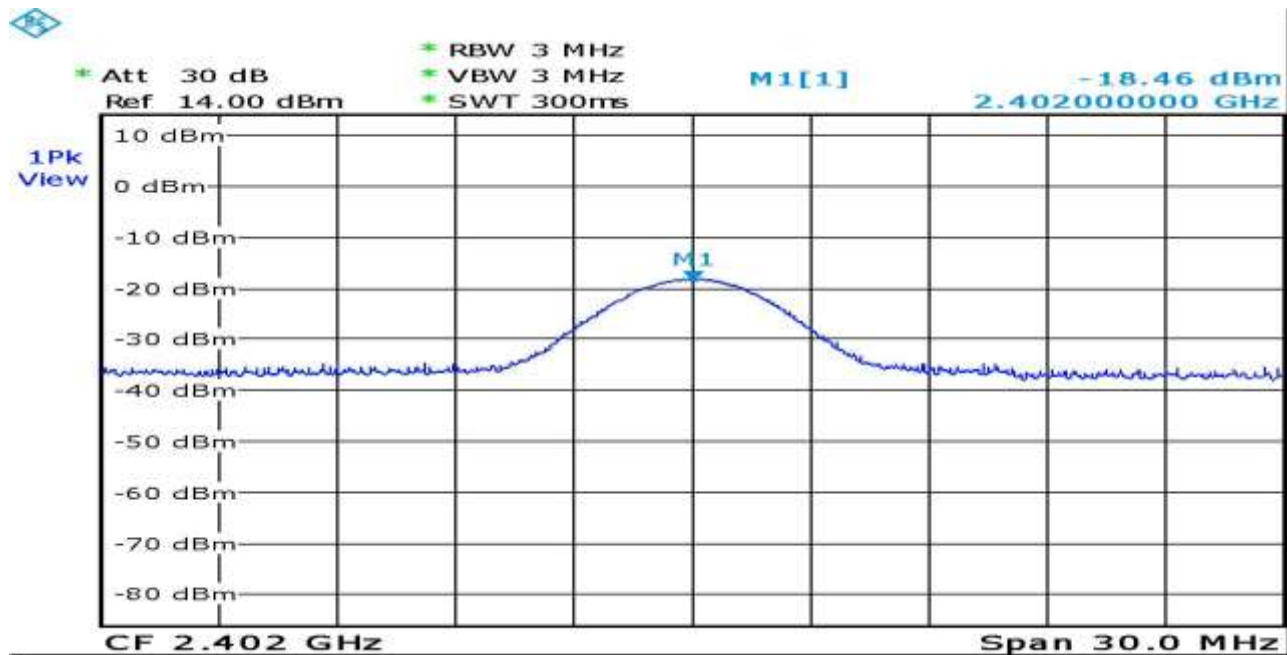

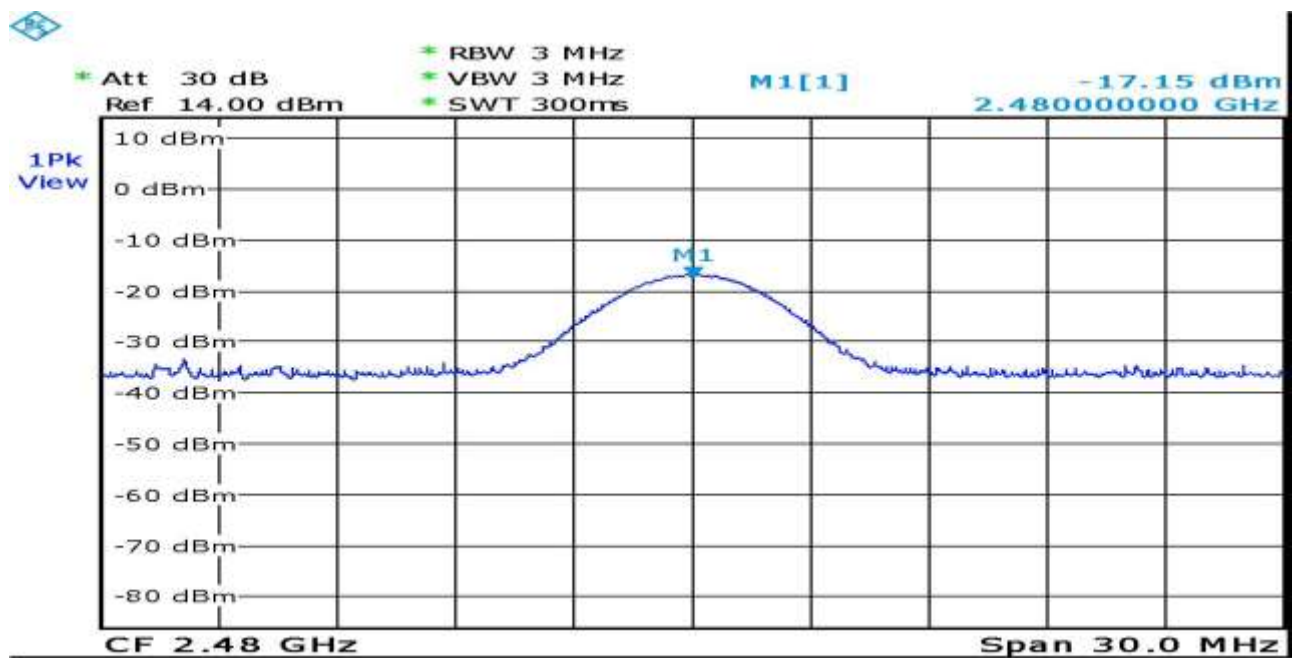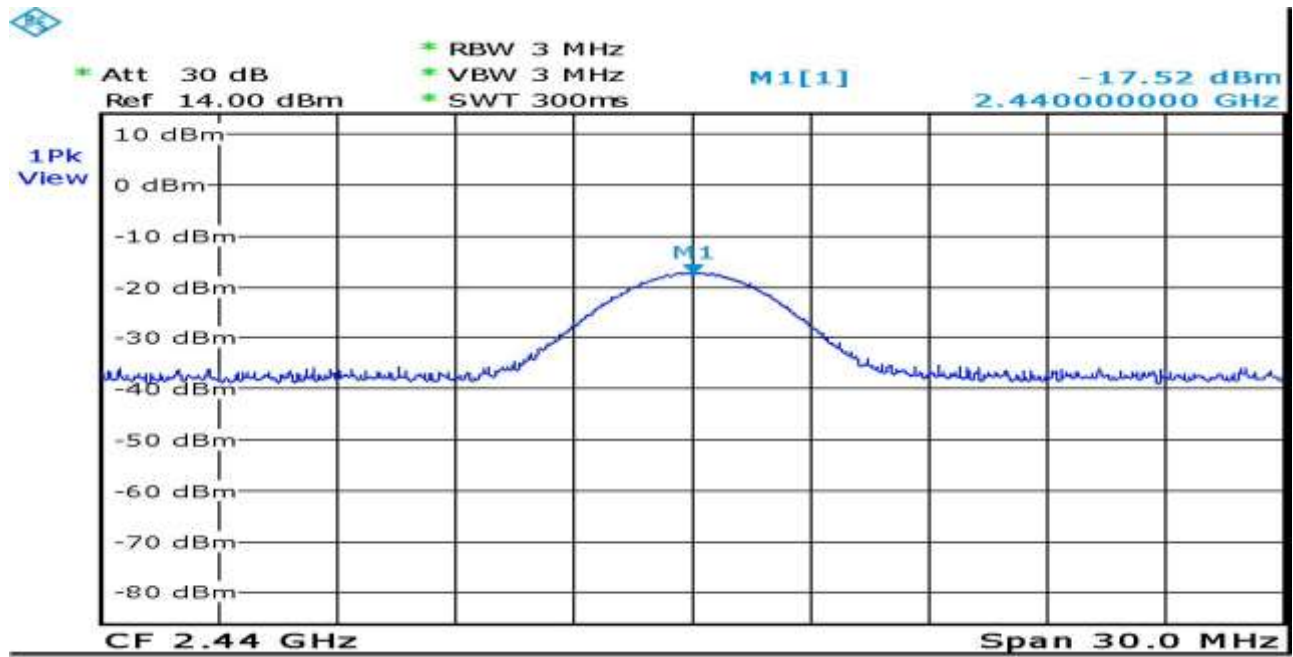




Date of Test	May 06, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Test Mode	$\pi/4$ PSK	Display Pattern	Program

Channel No.	Frequency (MHz)	Reading Level (dBm)	Cable loss (dB)	Measurement (dBm)	Required Limit	Result
0	2402	-18.11	0.59	-17.52	1W(30dBm)	Pass
38	2440	-17.29	0.69	-16.60	1W(30dBm)	Pass
78	2480	-17.40	0.73	-16.67	1W(30dBm)	Pass

Note :

Measurement = Reading Level +Cable loss

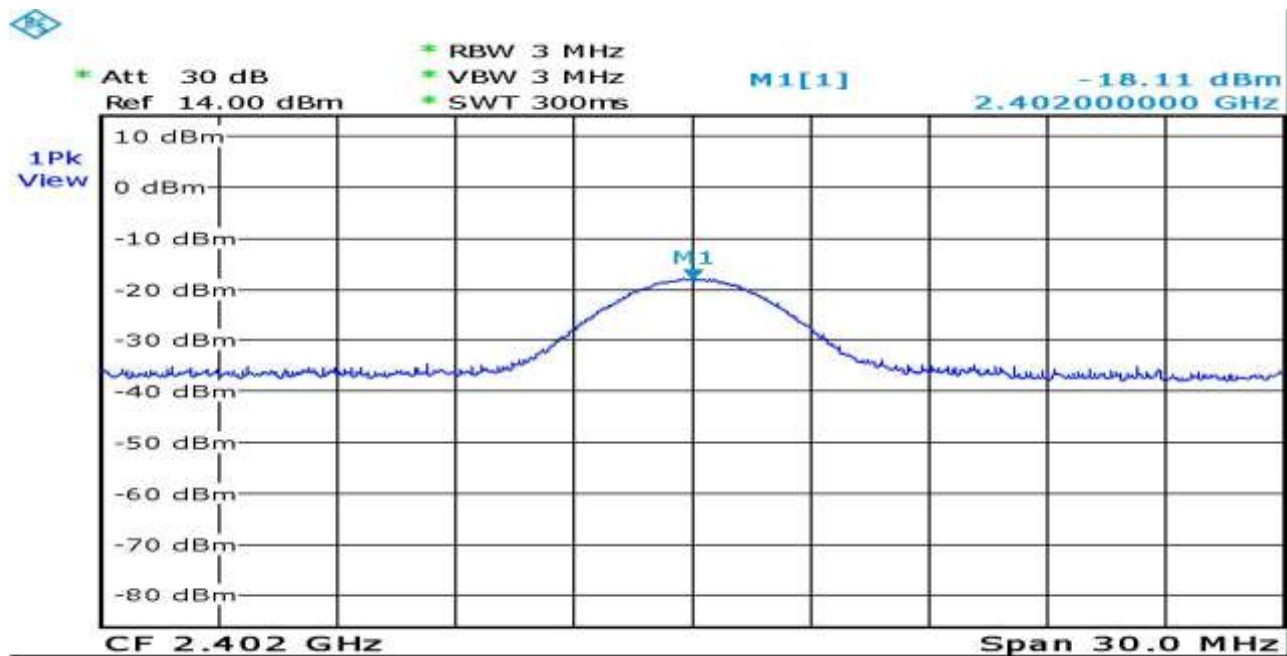

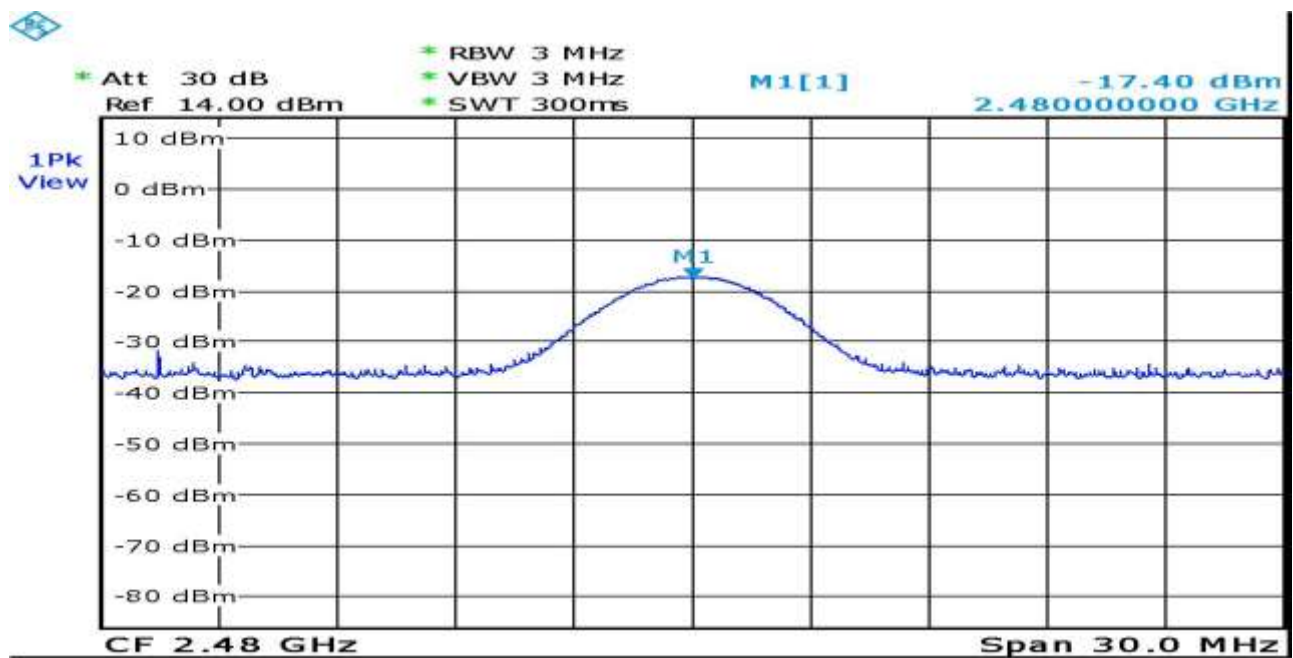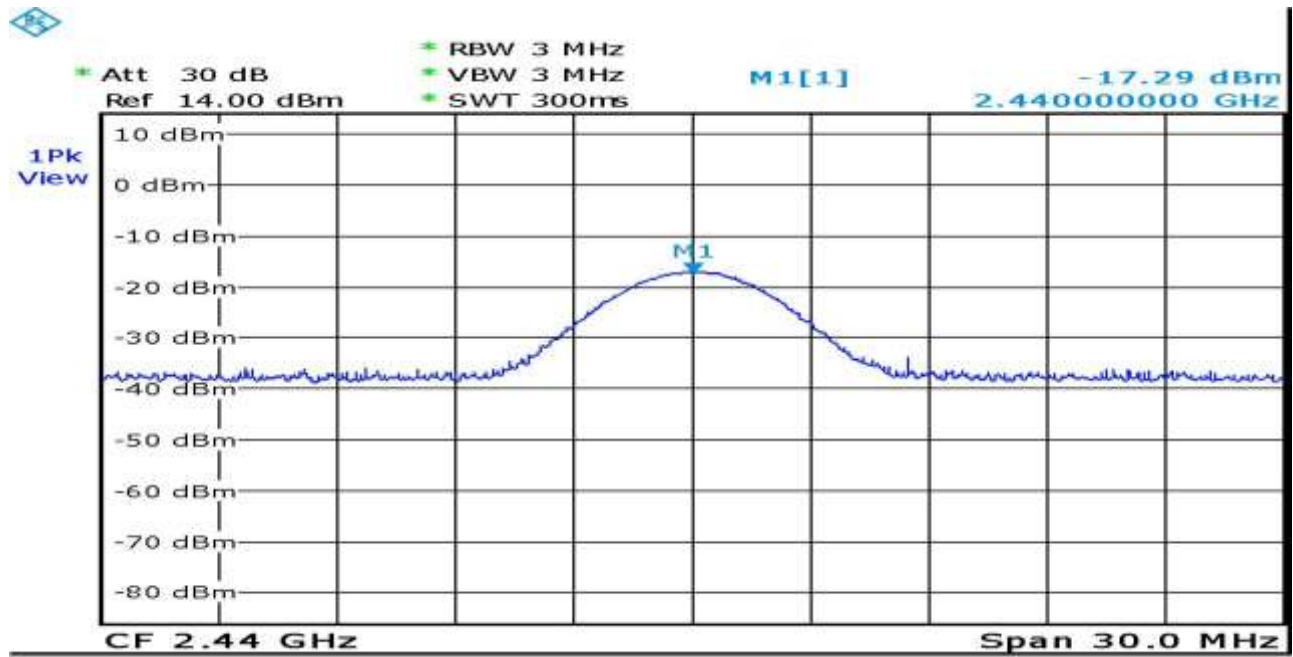




Date of Test	May 06, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Test Mode	8DPSK	Display Pattern	Program

Channel No.	Frequency (MHz)	Reading Level (dBm)	Cable loss (dB)	Measurement (dBm)	Required Limit	Result
0	2402	-18.84	0.59	-18.25	1W(30dBm)	Pass
38	2440	-17.42	0.69	-16.73	1W(30dBm)	Pass
78	2480	-17.44	0.73	-16.71	1W(30dBm)	Pass

Note :

Measurement = Reading Level +Cable loss

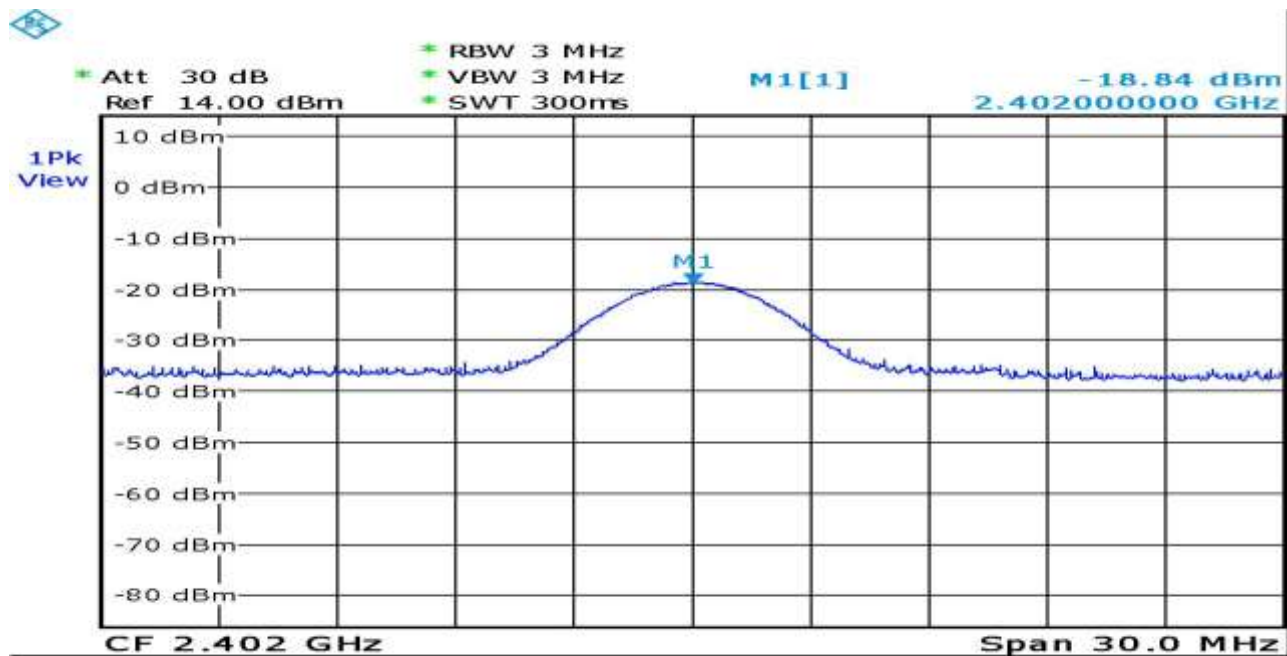

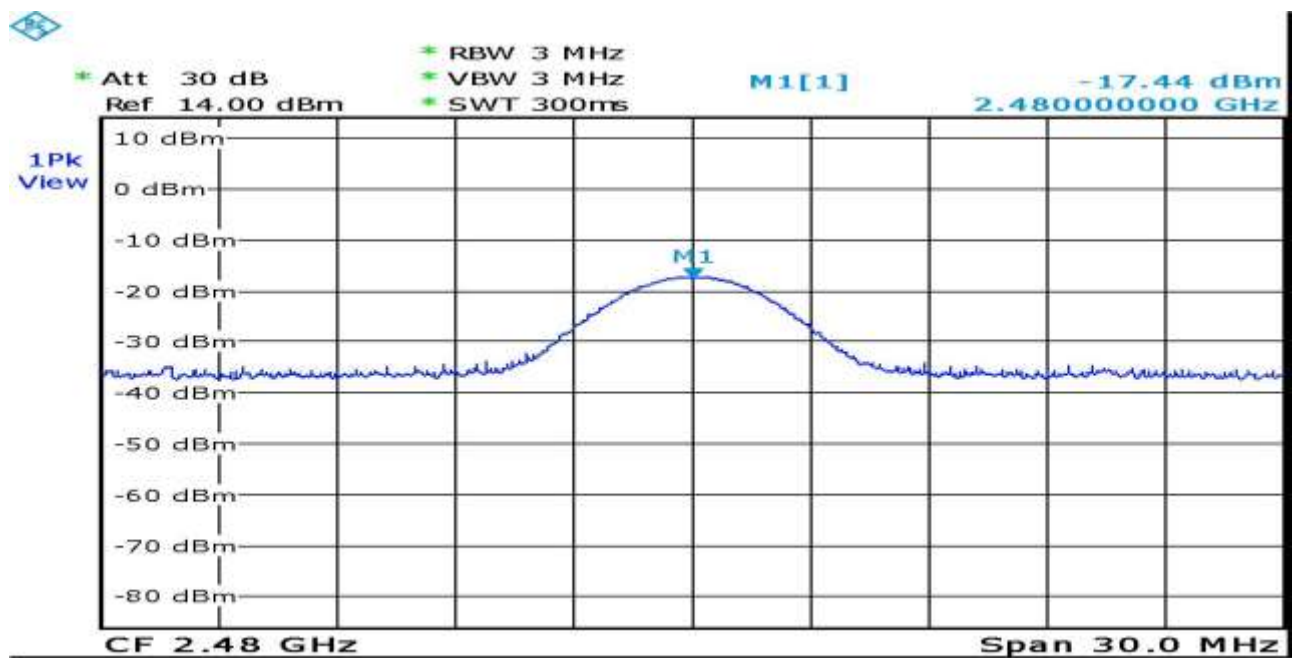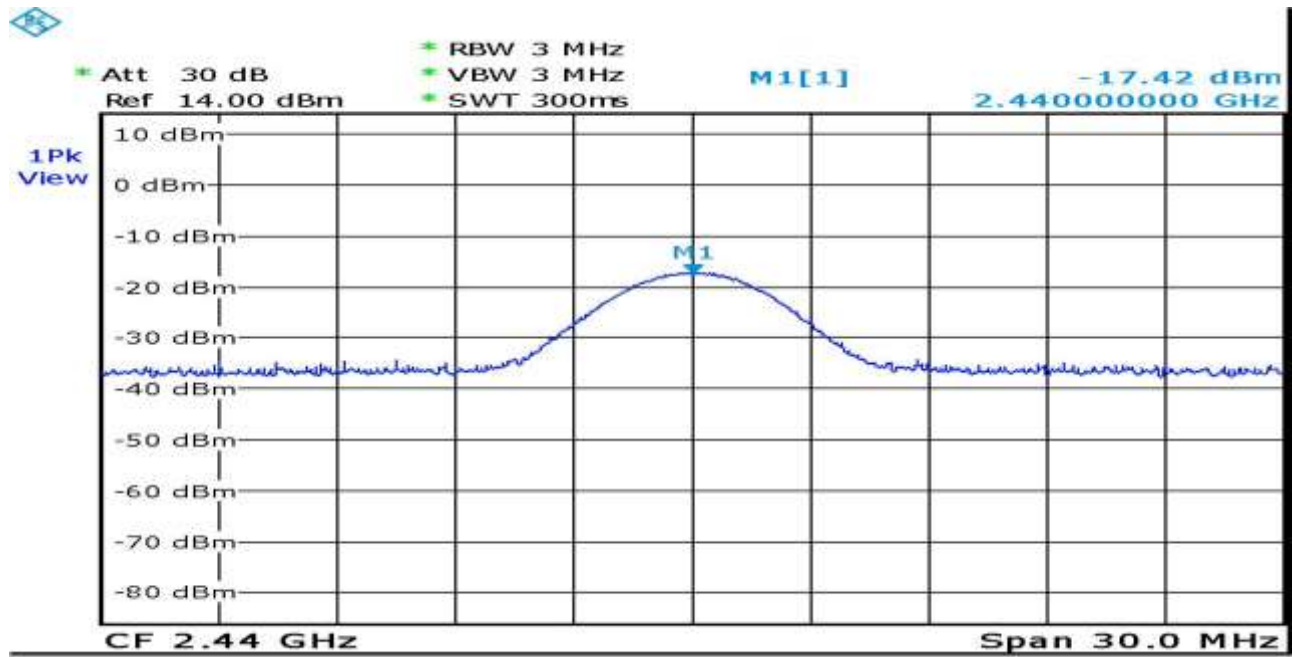

6. BAND EDGE

6.1 TEST EQUIPMENT

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26
2	Pre-Amplifier	HP	8449B	3008A01264	2013.06.04
3	HORN ANTENNA	SCHWARZBECK	BBHA 9120	D243	2014.01.23
4	BOARD-BAND ANTENNA	SCHWARZBECK	BBHA 9170	BBHA9170164	2014.01.27
5	CABLE	INSULATED WIRE INC.	SPS-2801-3940-NPS	03262012	2014.04.07
6	CABLE	SUHNER	SUCOFLEX 104PEA	MY3501/4PEA	2013.10.08
7	CABLE	SUHNER	SUCOFLEX 102	23538/2	2013.06.26
8	CABLE	SUHNER	SUCOFLEX 102	28523/2	2013.09.19
9	Test Program Software	Hotlife	CSR BC4	N/A	N/A

6.2 BLOCK DIAGRAM OF TEST SETUP

RF Radiated Measurement:

Refer to Section 4.2

RF Couductive Measurement:

Refer to Section 5.2

6.3 BAND EDGE LIMIT

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209 (a) (see Section 15.205(c)).

6.4 EUT CONFIGURATION

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2000 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120KHz, above 1GHz are 1MHz.

6.5 OPERATING CONDITION OF EUT

Same as section 2.9.


6.6 TEST RELULT

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	2399.7080	41.43	11.82	53.25	74.00	-20.75	peak
2	★2401.8420	84.28	11.82	96.10	114.00	-17.90	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
- 7 The No.2 2401.8420MHz is Carrier signal.

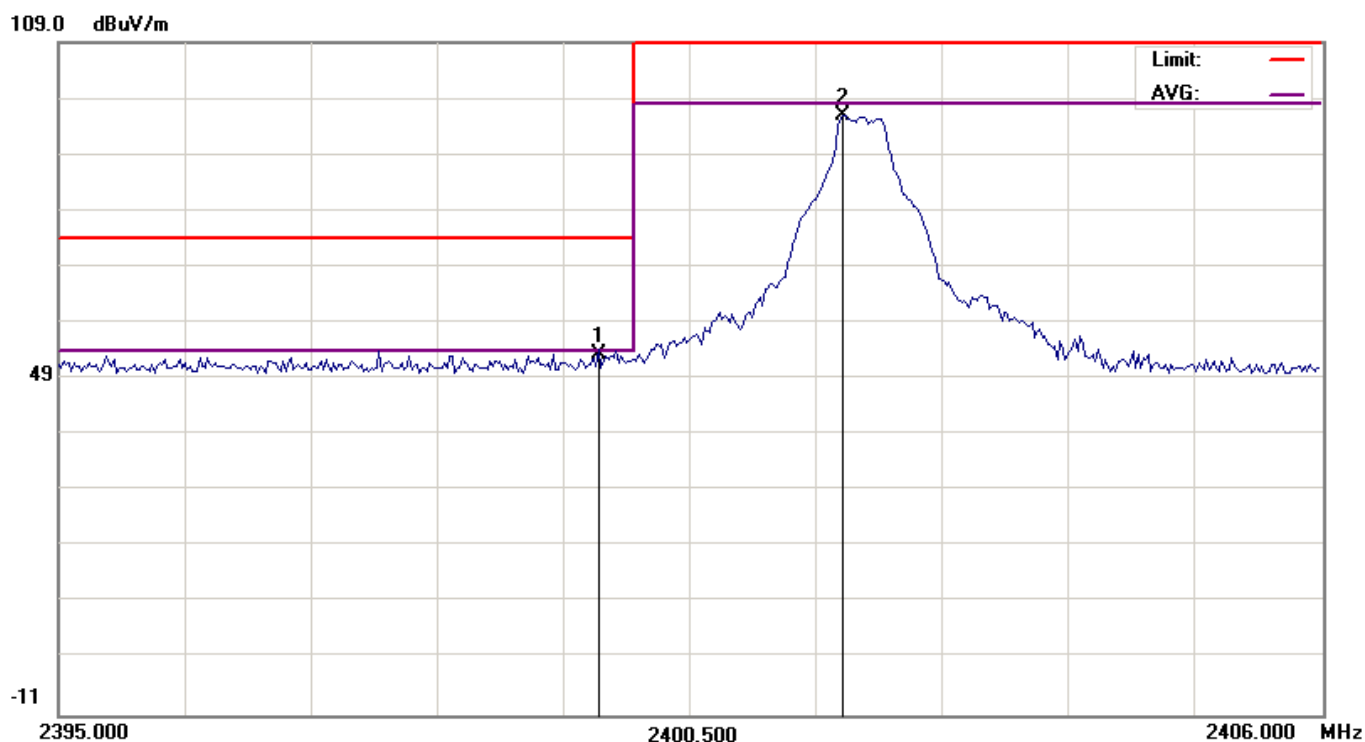


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	2399.6200	41.79	10.21	52.00	74.00	-22.00	peak
2	★2401.8420	82.82	10.21	93.03	114.00	-20.97	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.2 2401.8420MHz is Carrier signal.

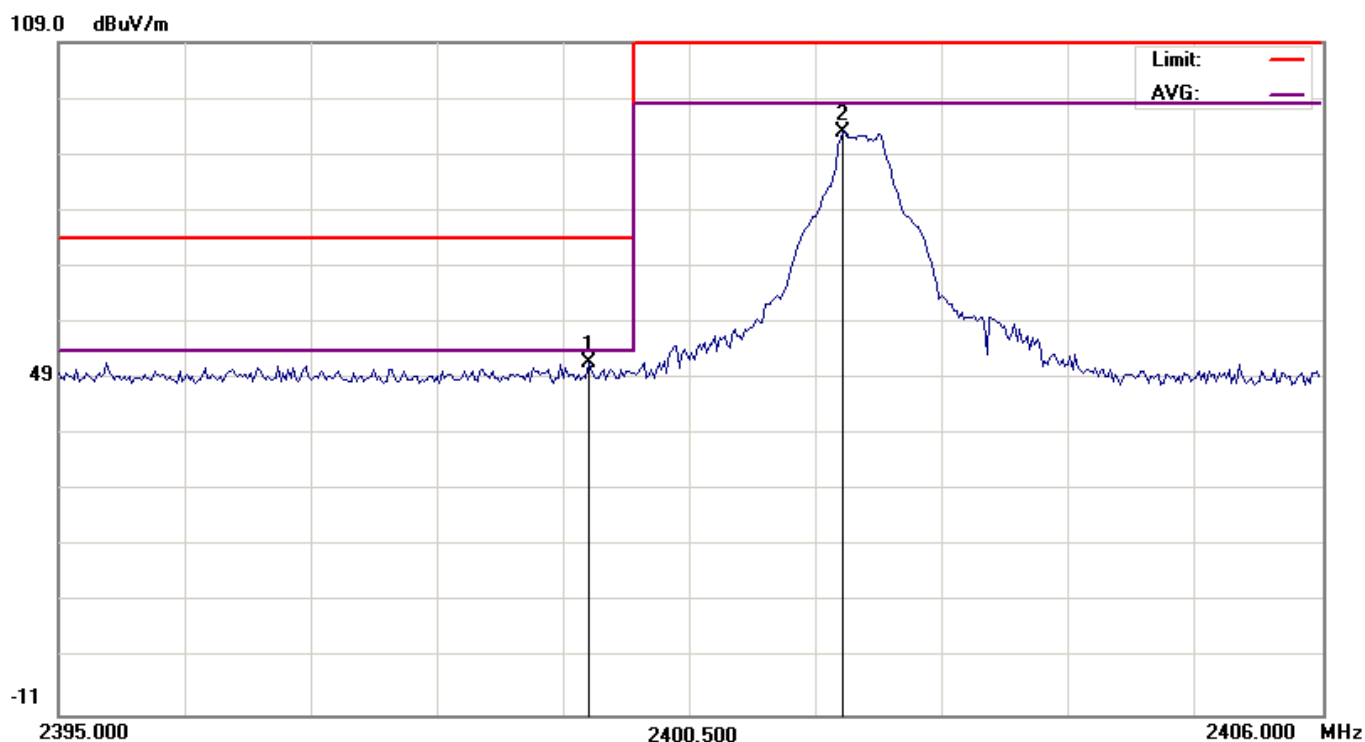


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★2479.8440	84.87	11.86	96.73	114.00	-17.27	peak
2	2484.2680	41.23	11.86	53.09	74.00	-20.91	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.1 2479.8440MHz is Carrier signal.

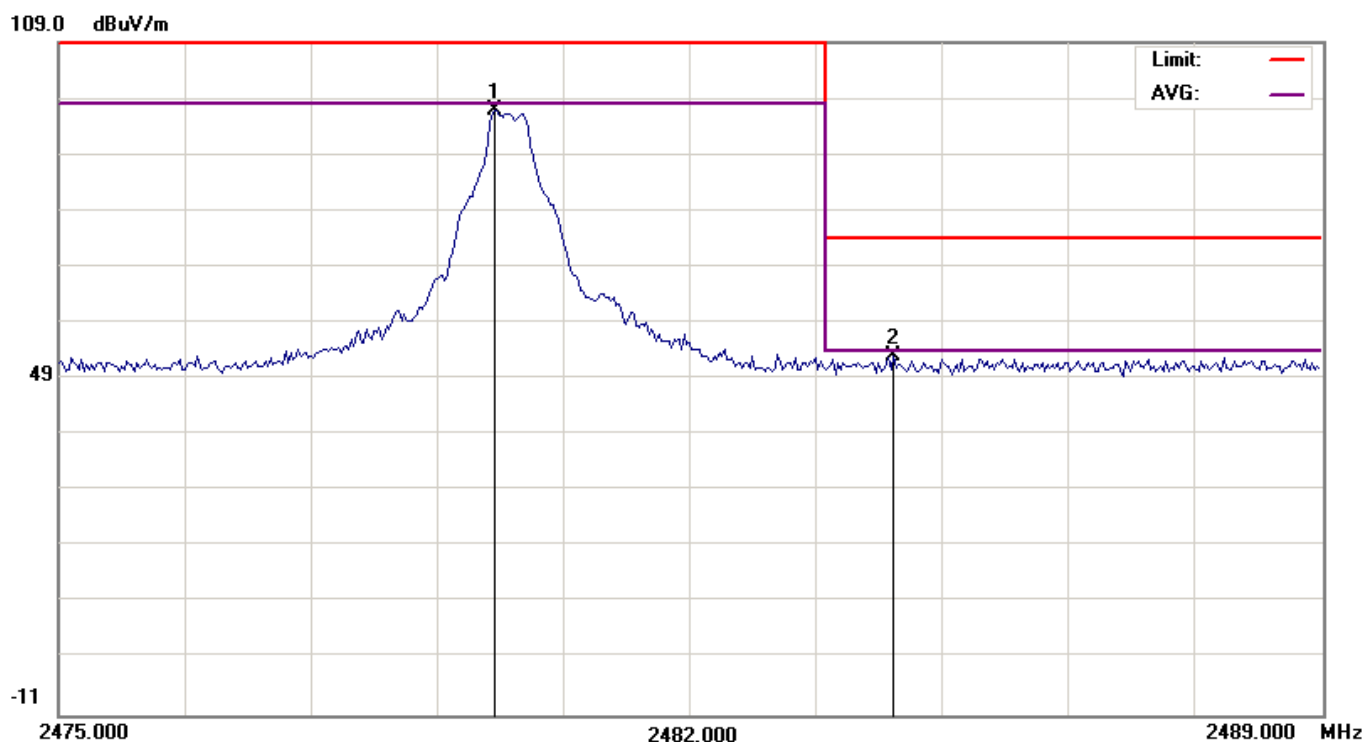


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1 -GFSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★2479.8440	85.77	10.24	96.01	114.00	-17.99	peak
2	2484.2400	41.10	10.24	51.34	74.00	-22.66	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
- 7 The No.1 2479.8440MHz is Carrier signal.

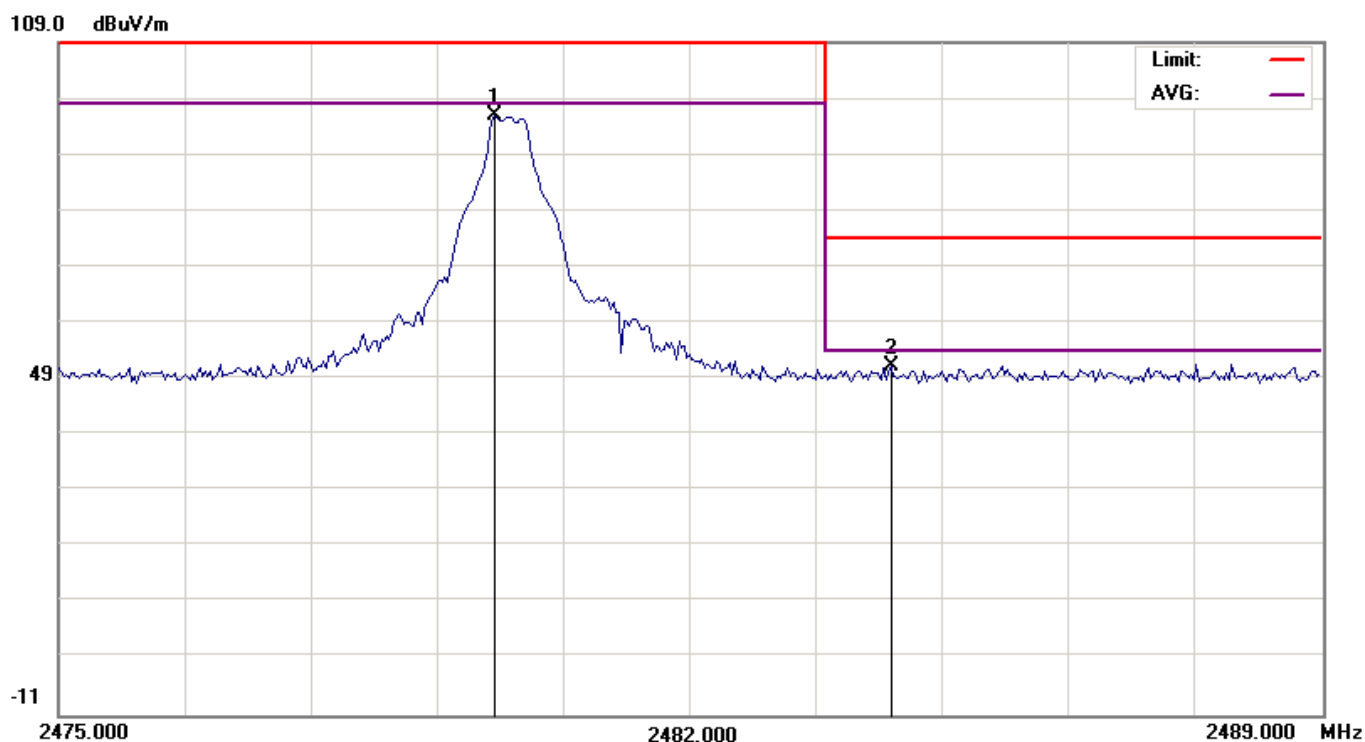


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB/m	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	2399.0920	41.00	11.82	52.82	74.00	-21.18	peak
2	★2401.8420	82.97	11.82	94.79	114.00	-19.21	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.2 2401.8420MHz is Carrier signal.

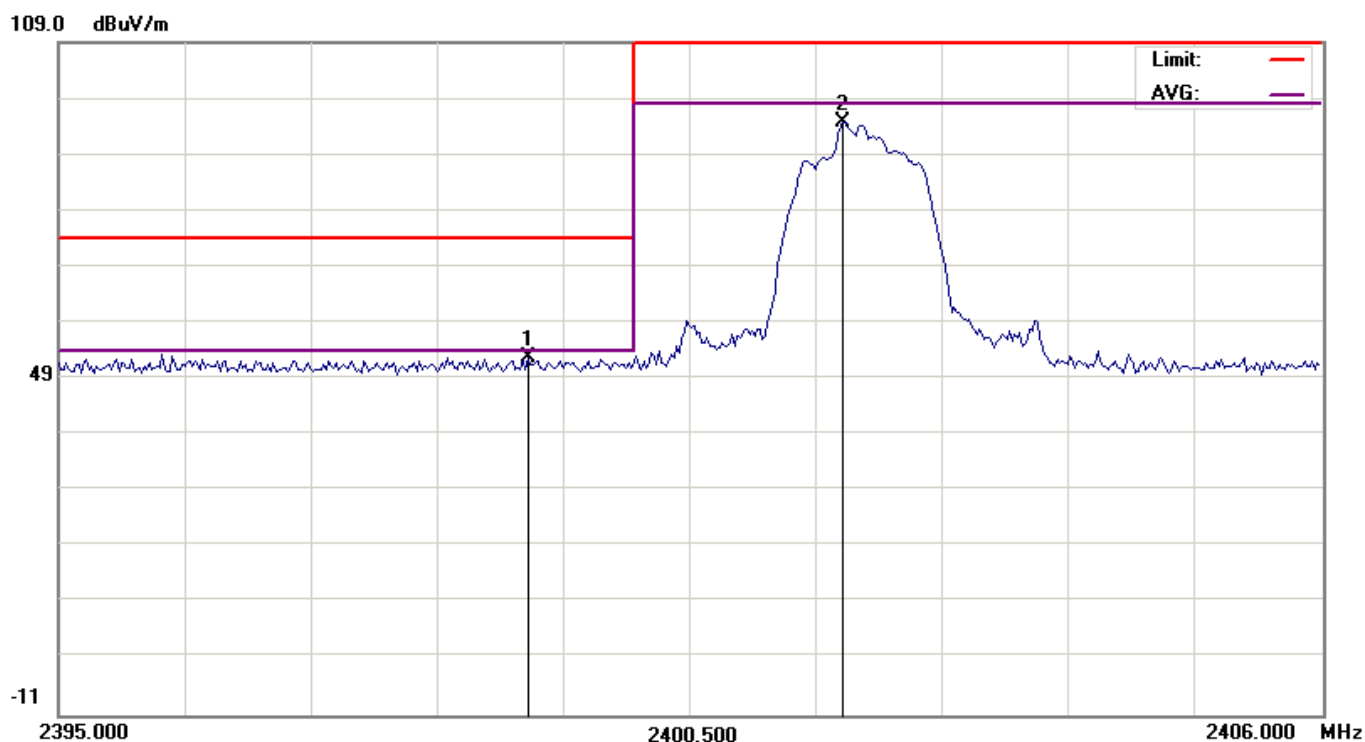


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB/m	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	2399.5540	40.96	10.21	51.17	74.00	-22.83	peak
2	★2401.8640	81.71	10.21	91.92	114.00	-22.08	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.2 2401.8640MHz is Carrier signal.

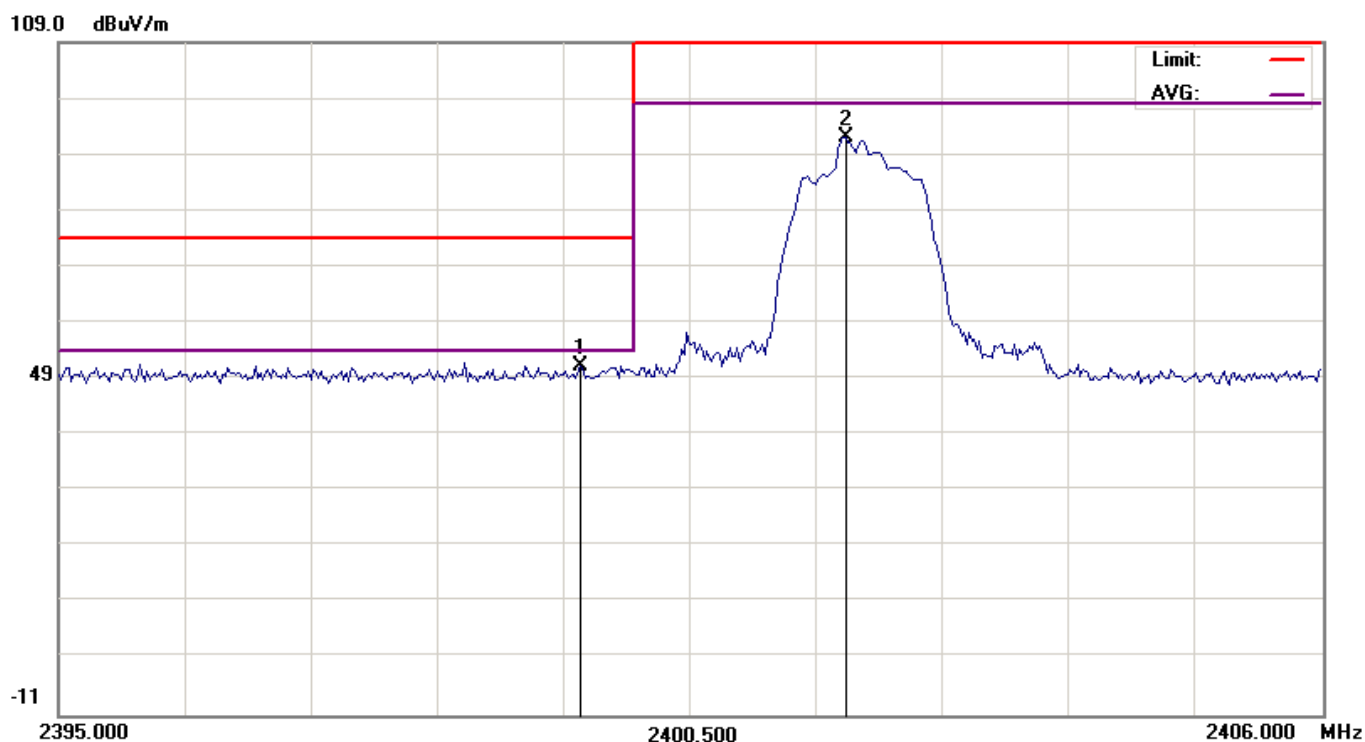


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB/m	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	★2479.8440	84.37	11.86	96.23	114.00	-17.77	peak
2	2484.2400	40.45	11.86	52.31	74.00	-21.69	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.1 2479.8440MHz is Carrier signal.

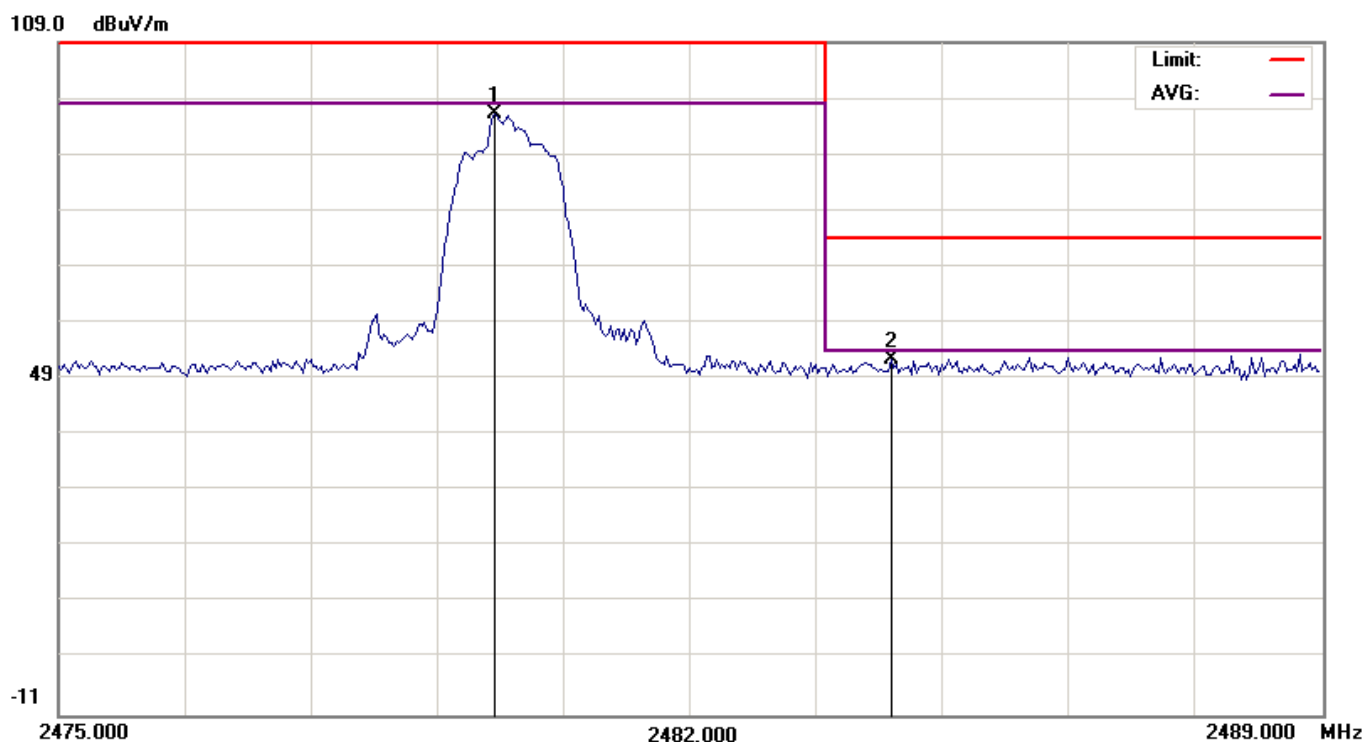


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2 - $\pi/4$ PSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dB μ V	Factor dB/m	Measurement dB μ V/m	Limit dB μ V/m	Over Limit dB	Detector
1	★2479.8440	86.80	10.24	97.04	114.00	-16.96	peak
2	2484.0720	40.64	10.24	50.88	74.00	-23.12	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.1 2479.8440MHz is Carrier signal.

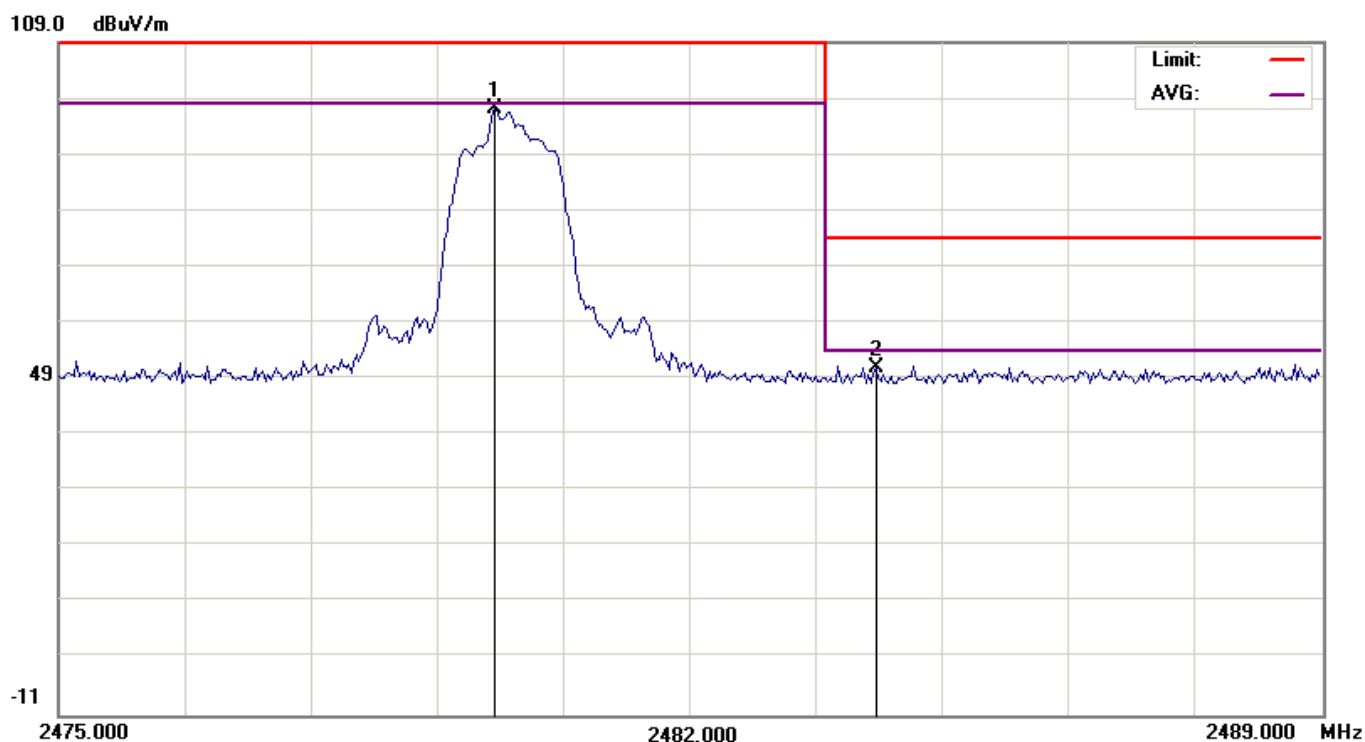


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	2398.7620	41.05	11.82	52.87	74.00	-21.13	peak
2	★2401.8420	82.93	11.82	94.75	114.00	-19.25	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.2 2401.8420MHz is Carrier signal.

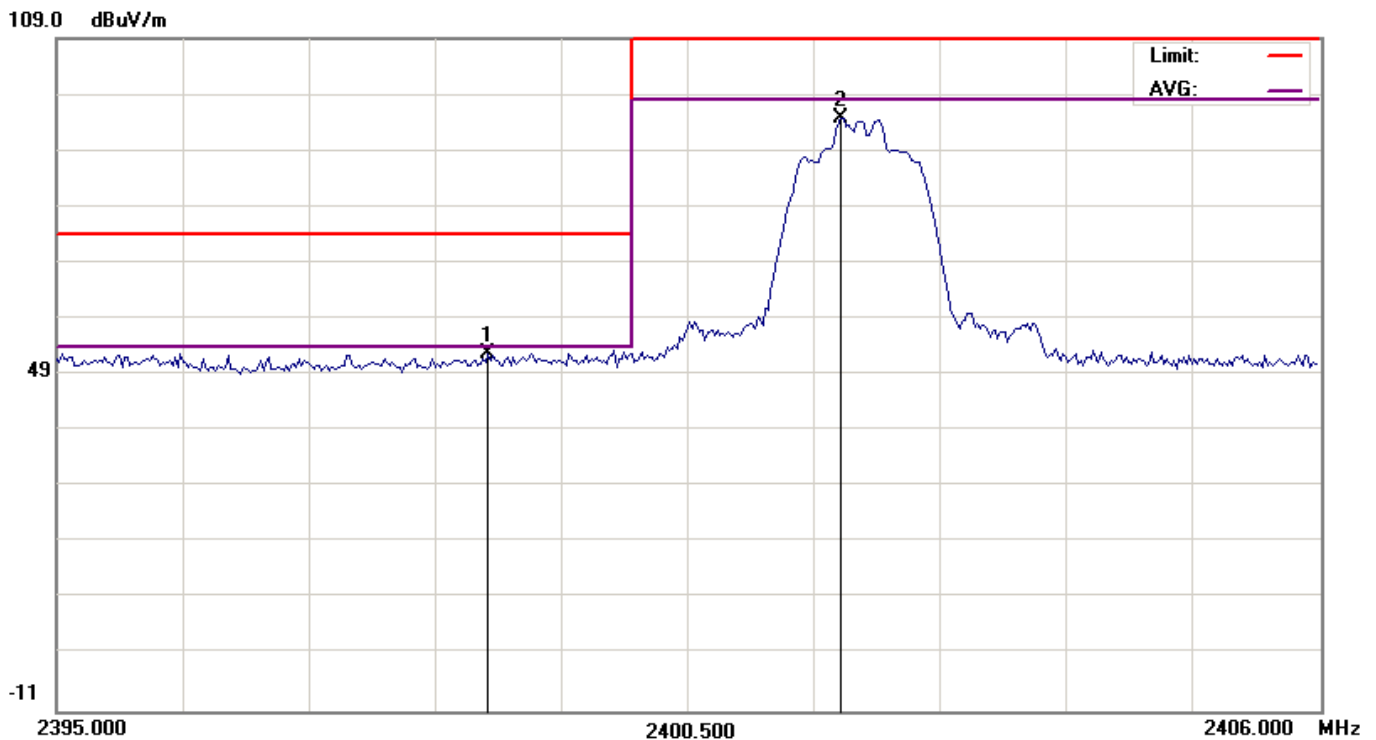


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2402 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	2399.5540	41.36	10.21	51.57	74.00	-22.43	peak
2	★2401.8640	81.69	10.21	91.90	114.00	-22.10	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.2 2401.8640MHz is Carrier signal.

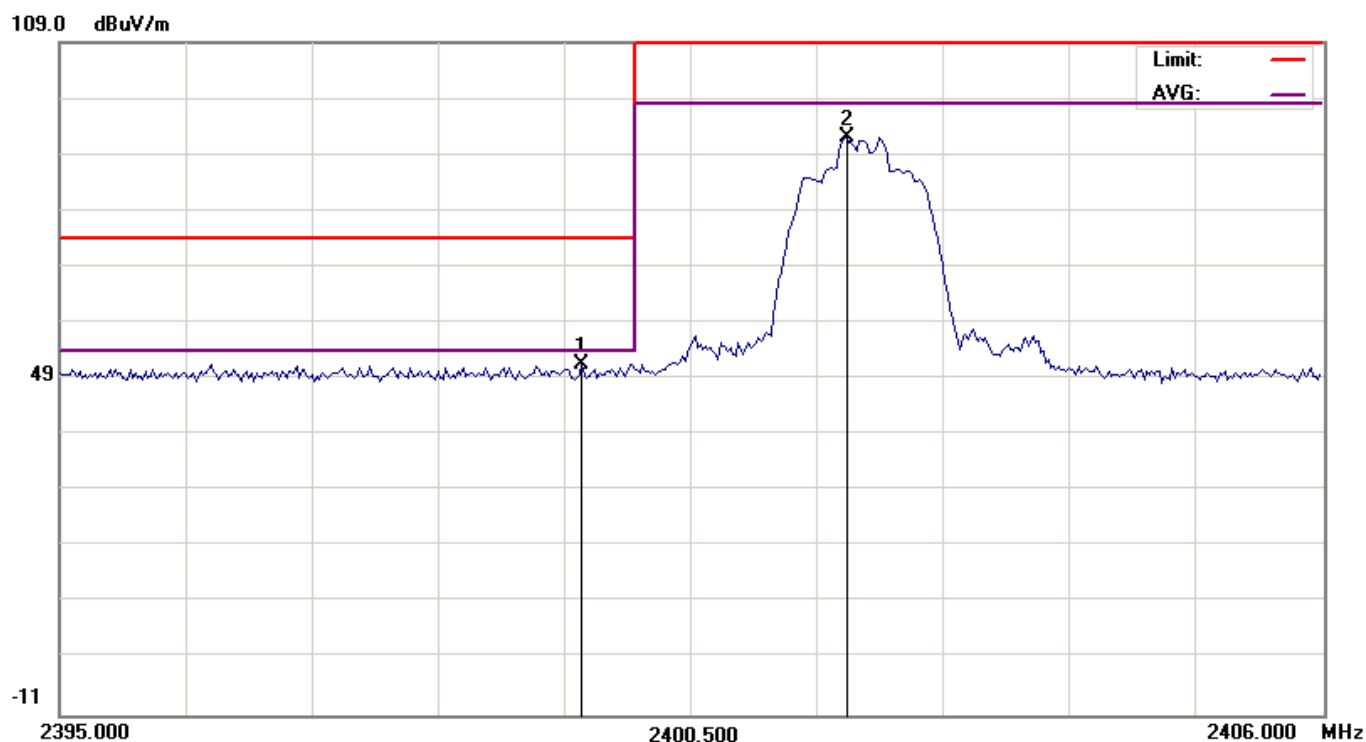


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Horizontal	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★2479.8440	84.33	11.86	96.19	114.00	-17.81	peak
2	2483.8760	40.82	11.86	52.68	74.00	-21.32	peak

Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.1 2479.8440MHz is Carrier signal.

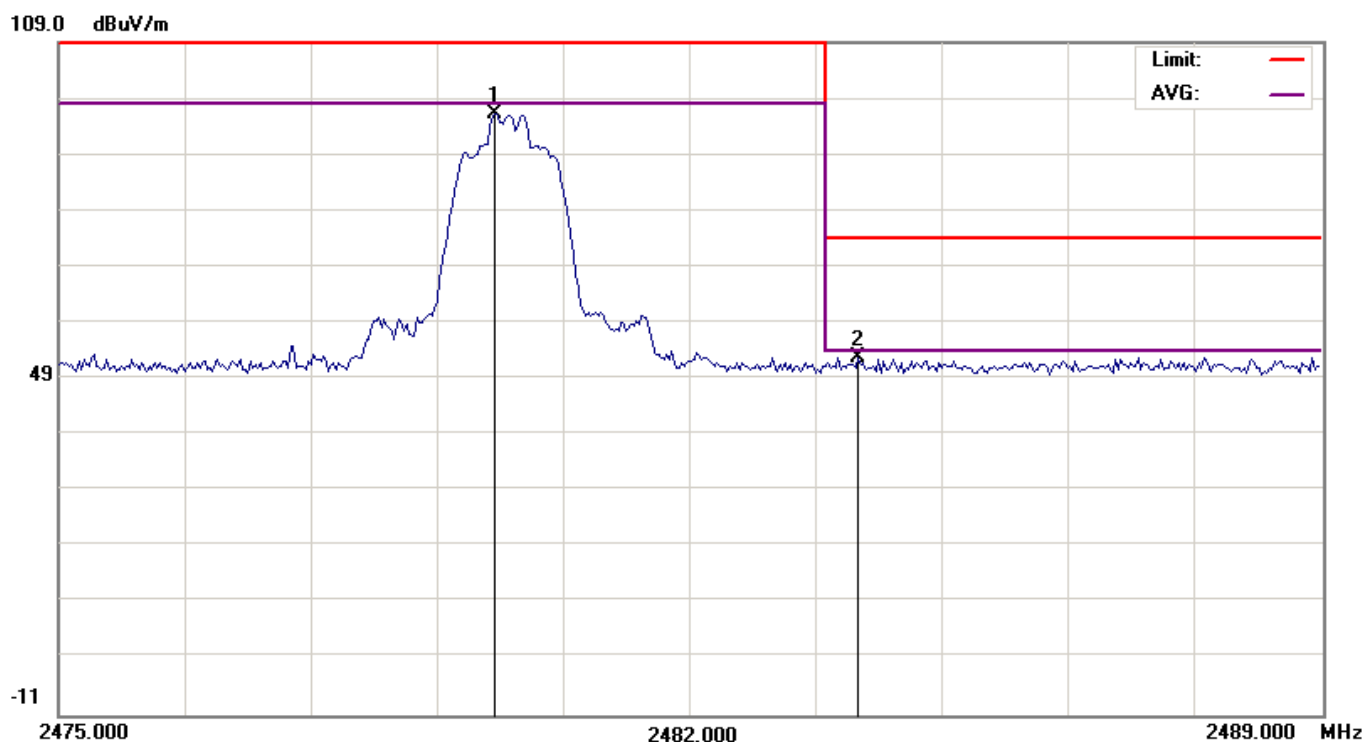


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3 -8DPSK	Display Pattern	Program
Antenna distance	3m at Vertical	Fundamental	2480 MHz

No.	Frequency MHz	Reading Level dBμV	Factor dB/m	Measurement dBμV/m	Limit dBμV/m	Over Limit dB	Detector
1	★2479.8440	86.56	10.24	96.80	114.00	-17.20	peak
2	2484.4360	40.64	10.24	50.88	74.00	-23.12	peak


Remarks:

1. All Readings are Peak and Average value.
2. Measurement = Reading + Factor (Could have ± 0.01 tolerance due to computer automatically round off calculation).
3. Over Limit (Margin Value)=Measurement level-Limit value.
4. Factor = antenna factor + cable loss – amplifier gain.
5. The antenna height could have ± 1 cm tolerance and the turn table degree could have $\pm 1^\circ$ tolerance.
6. The measurement uncertainty is 1.19 dB.
7. The No.1 2479.8440MHz is Carrier signal.

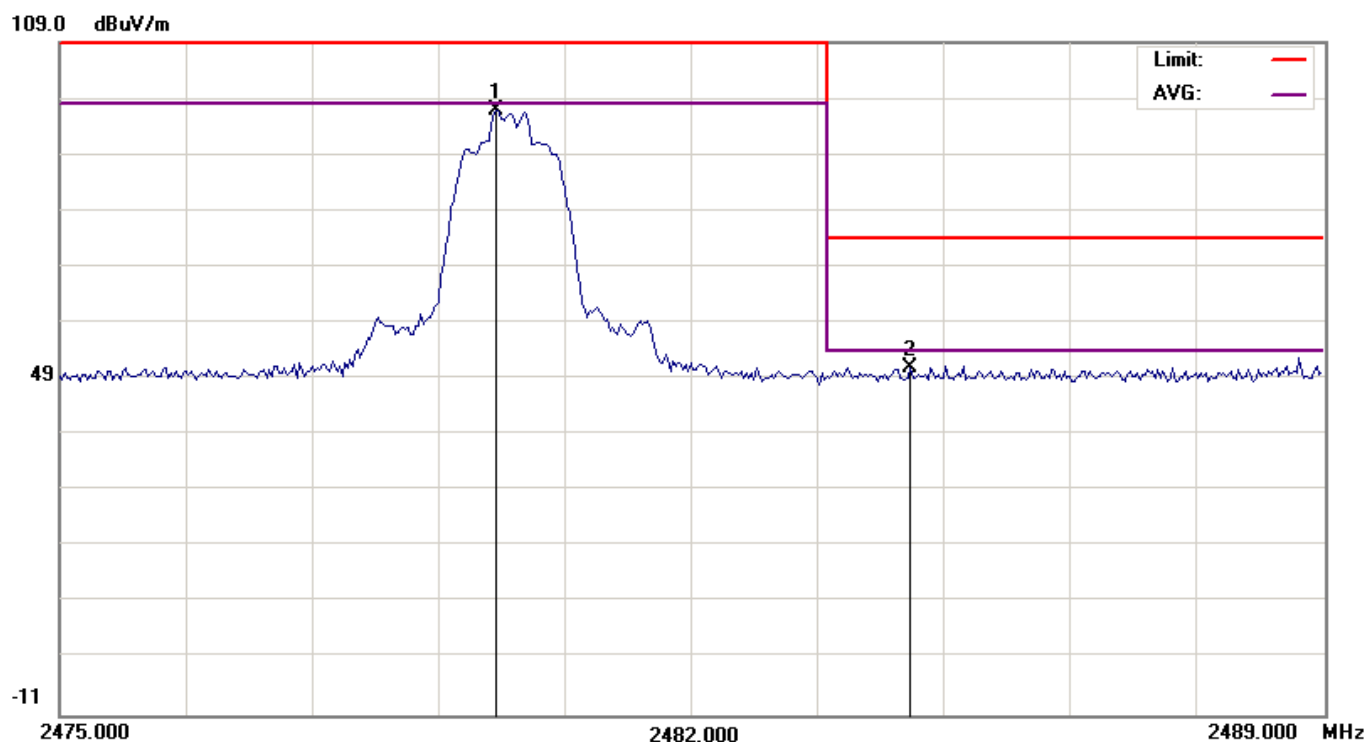


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Fundamental	CH-00 and CH-78 (2402~2480MHz)

High Band

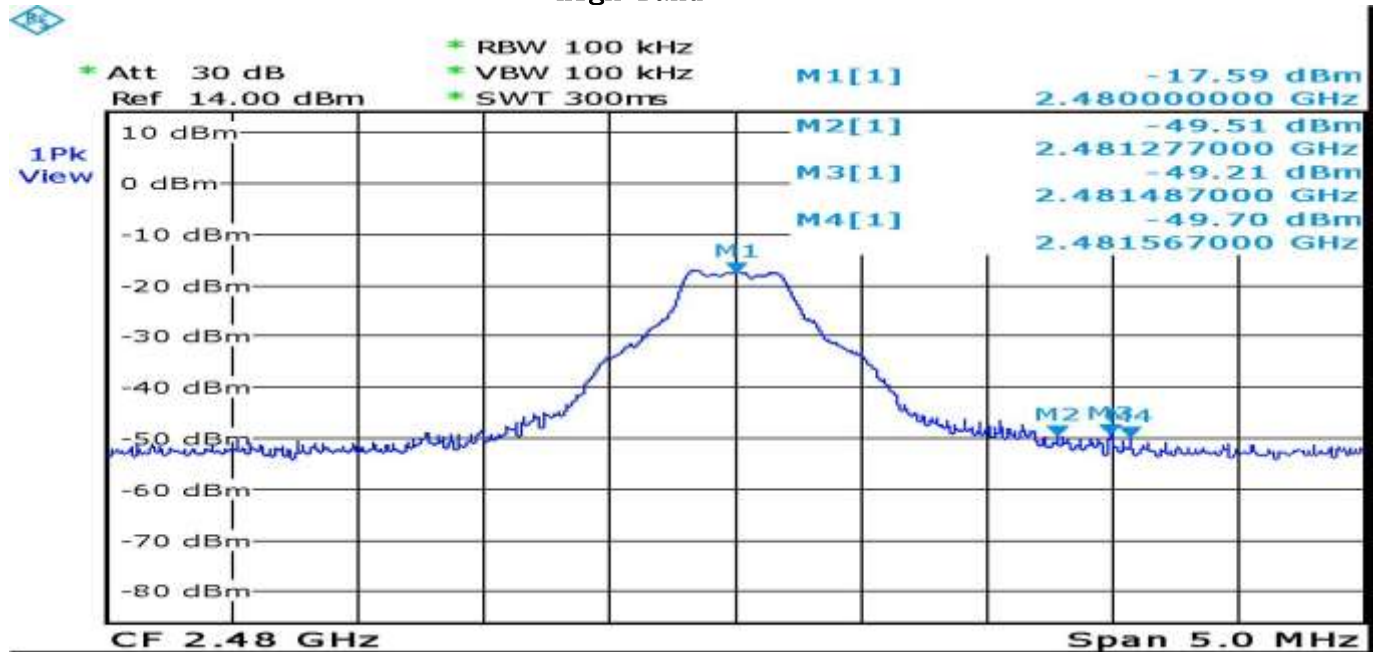


Low Band

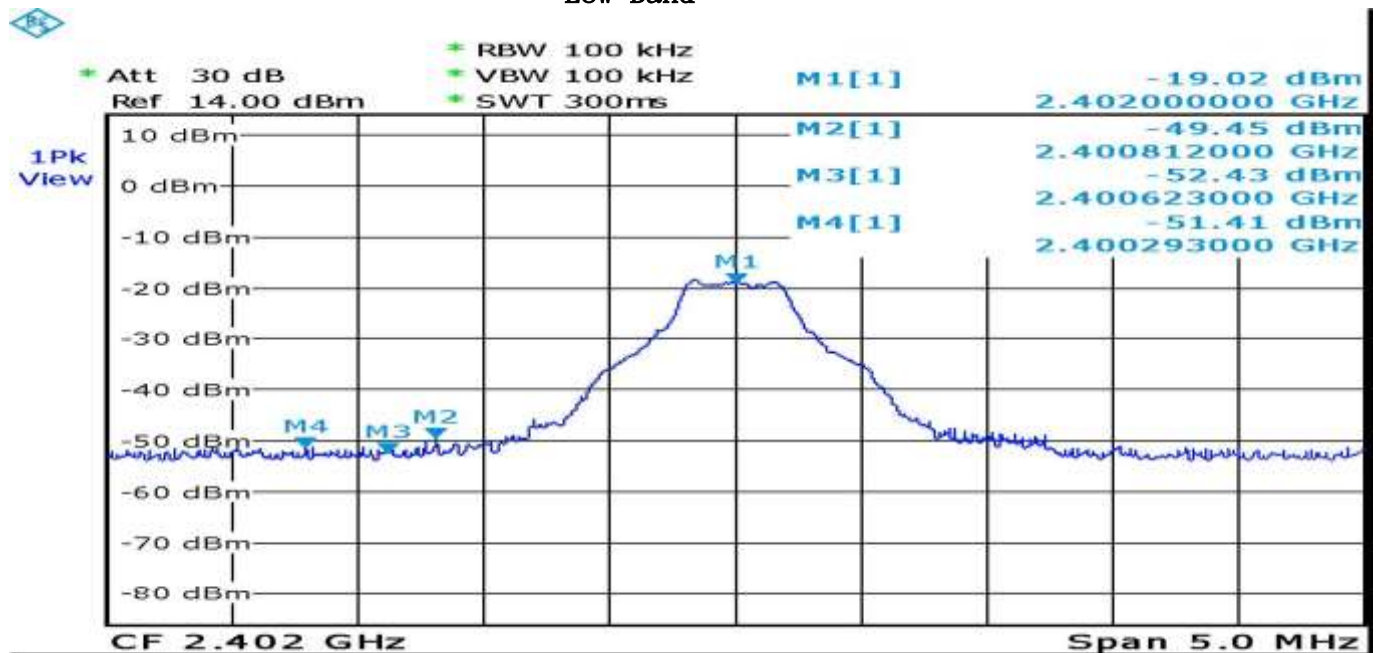


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- $\pi/4$ PSK	Fundamental	CH-00 and CH-78 (2402~2480MHz)

High Band

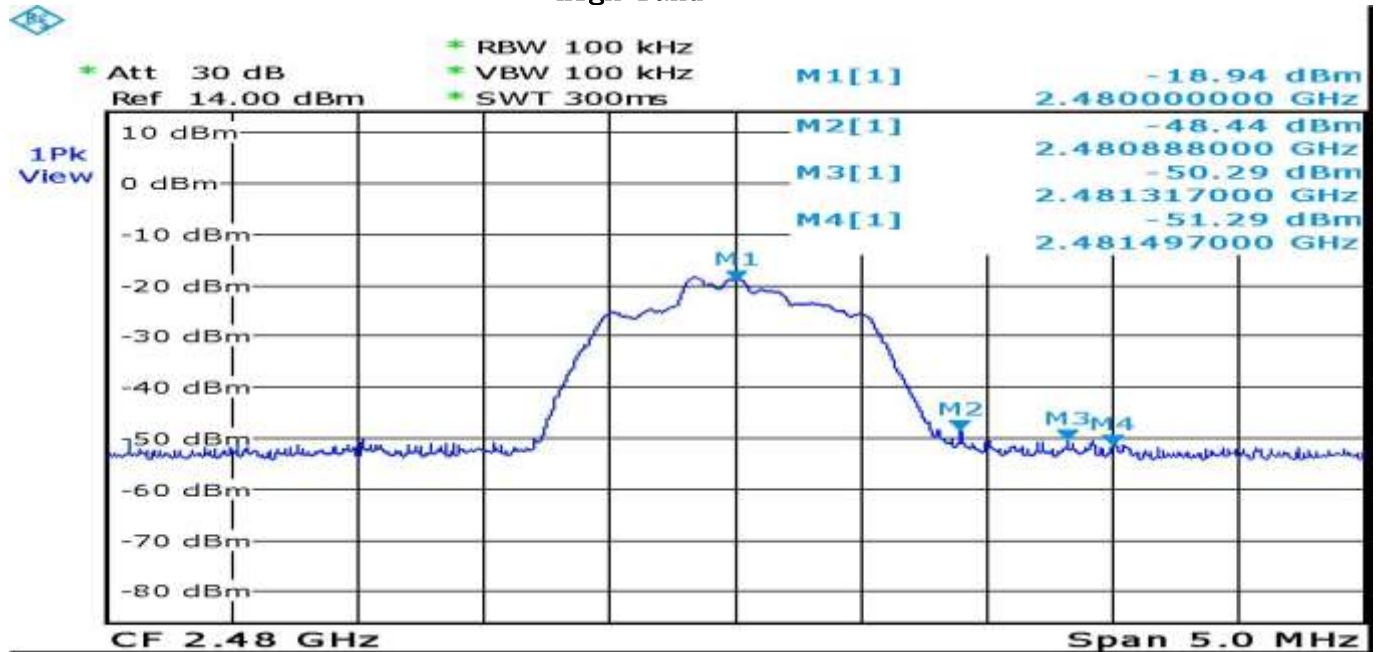


Low Band

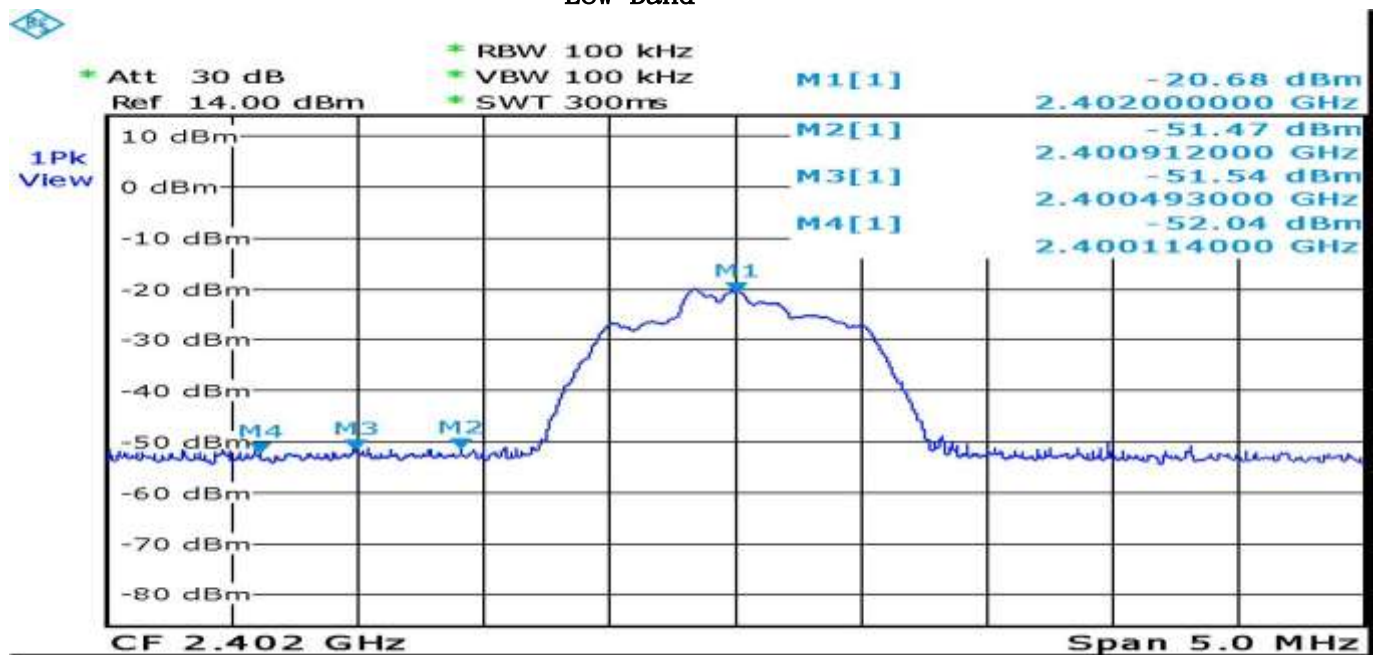


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Fundamental	CH-00 and CH-78 (2402~2480MHz)


High Band

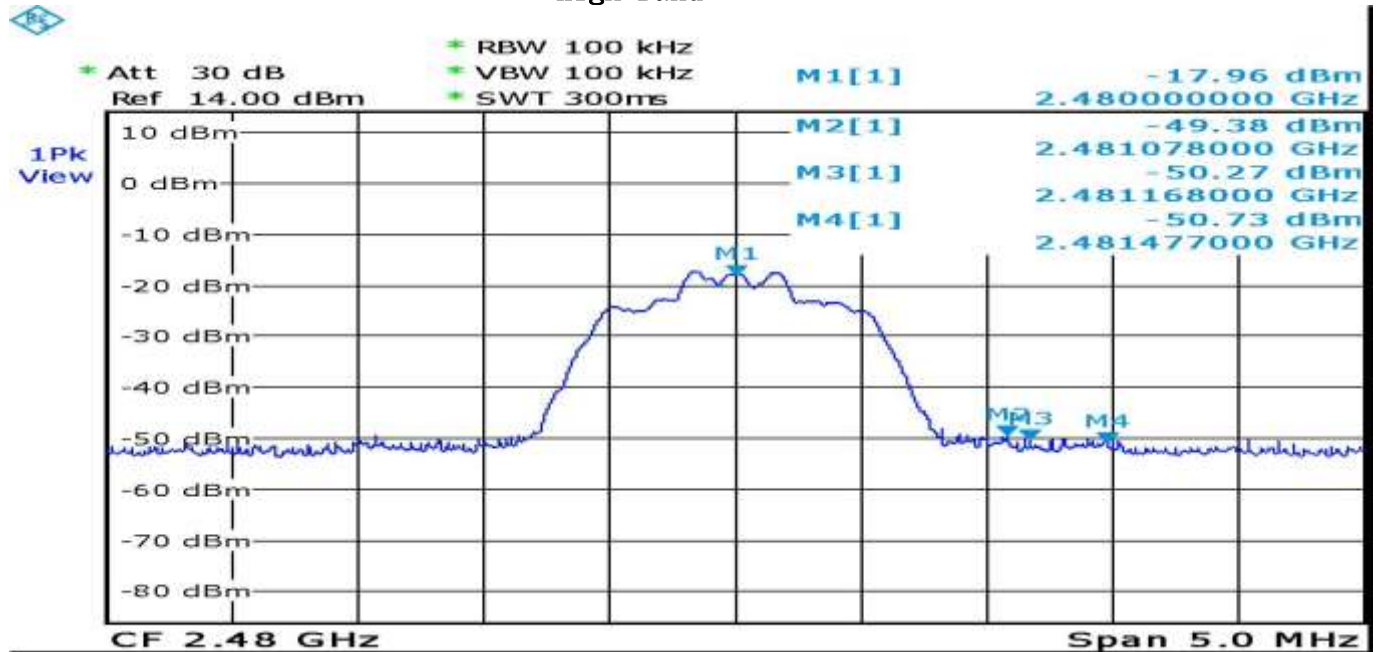


Low Band

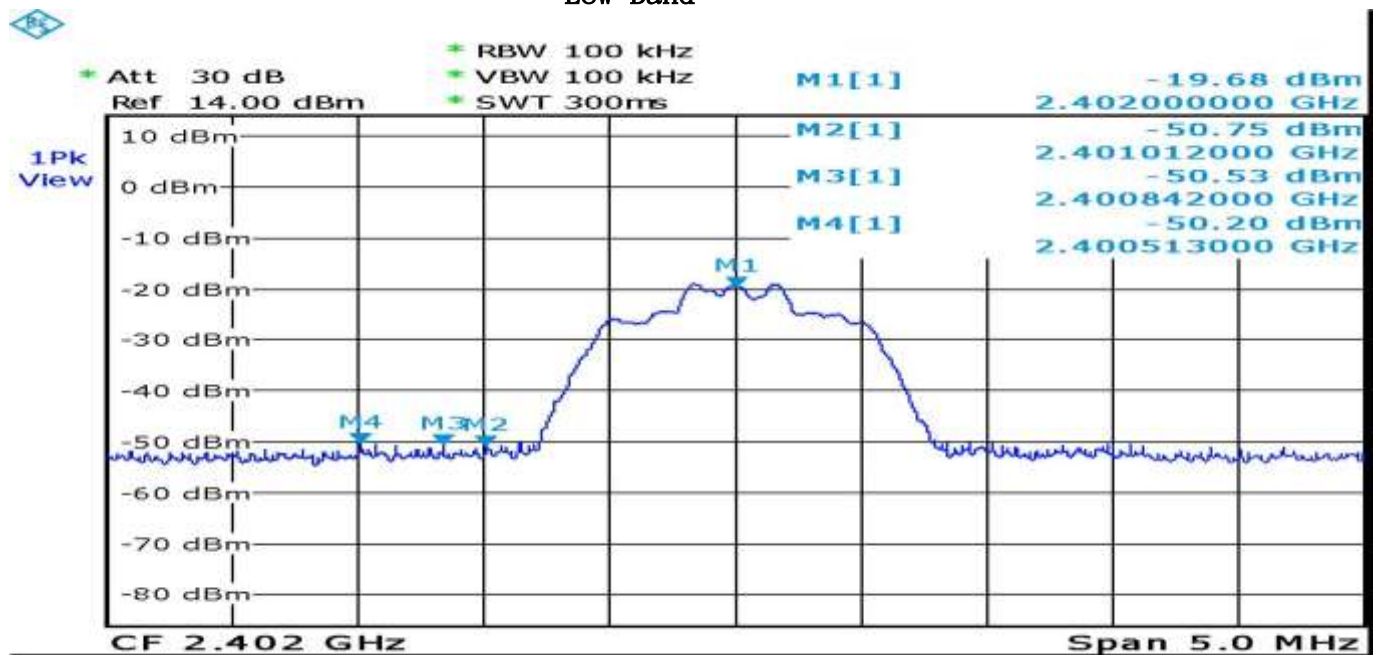


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Fundamental	2402MHz

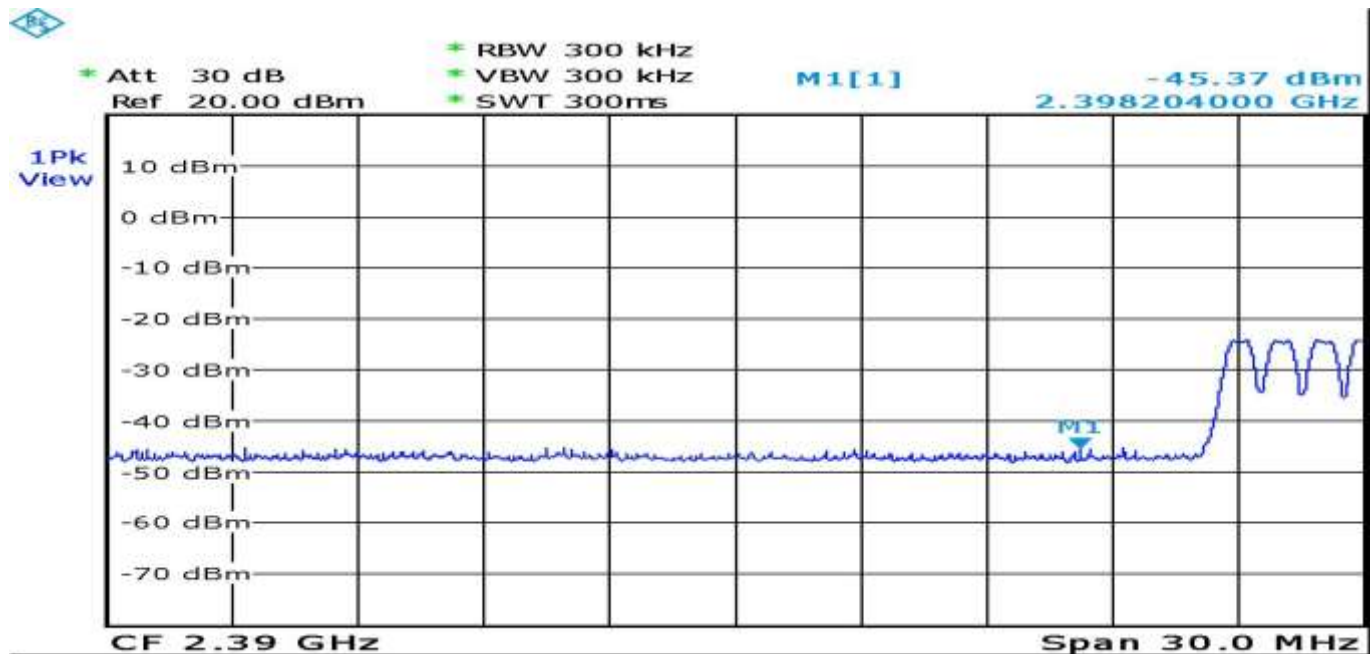


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Fundamental	2480MHz

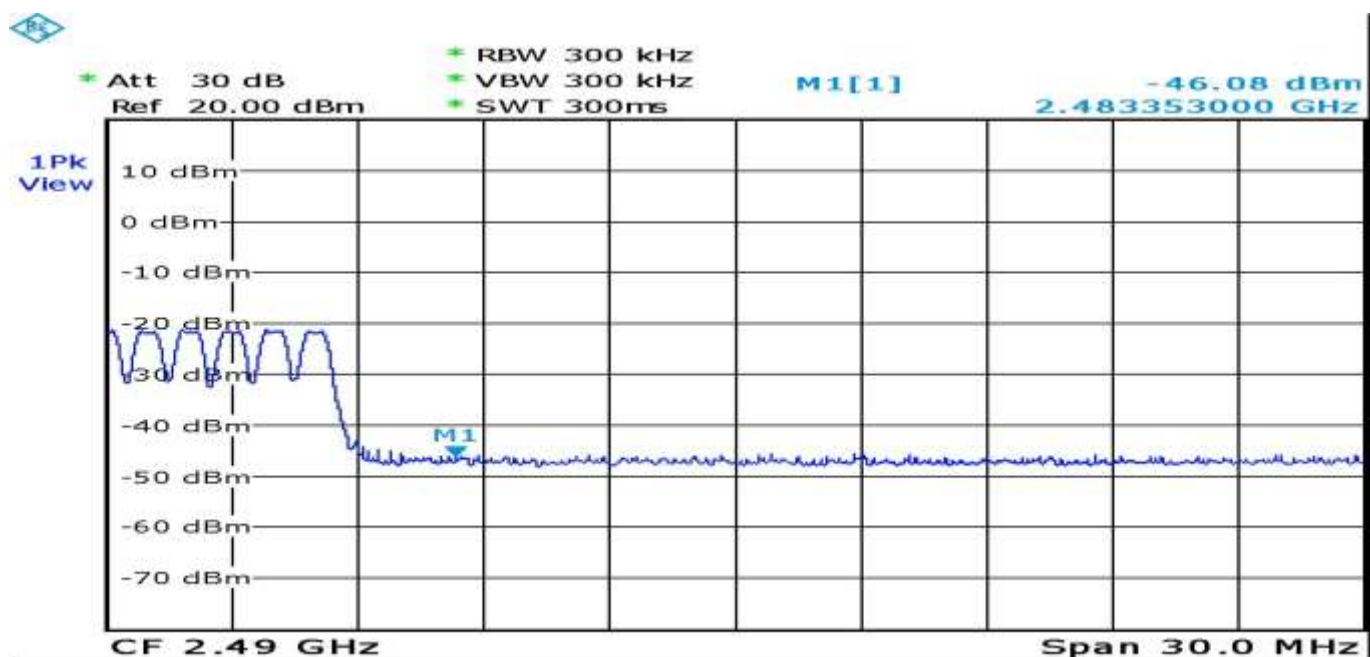


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- π /4 PSK	Fundamental	2402MHz

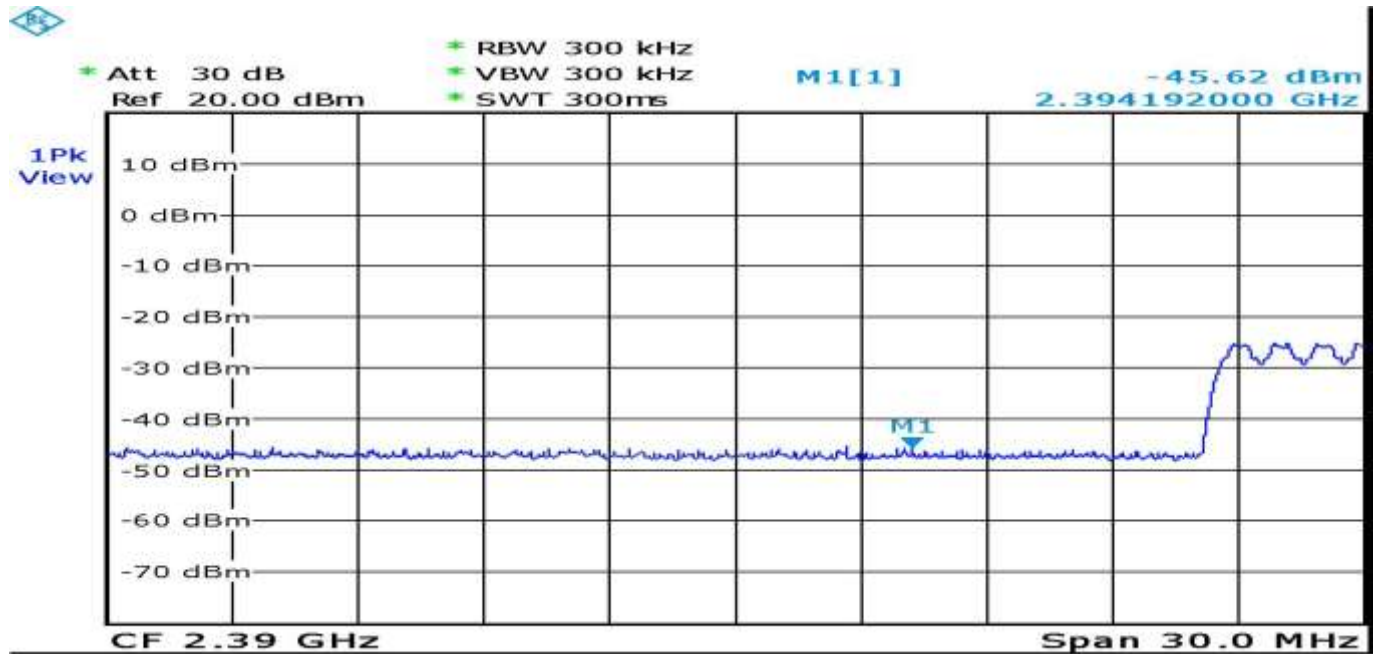


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- π /4 PSK	Fundamental	2480MHz

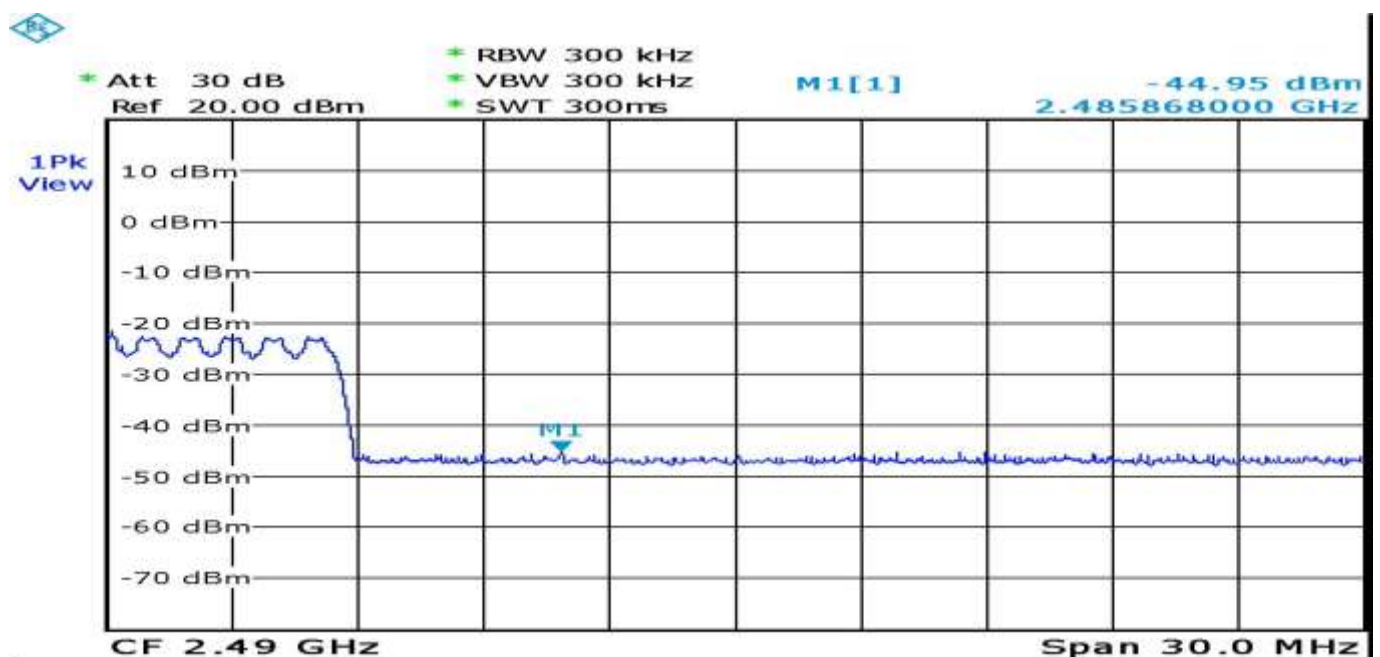

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Fundamental	2402MHz

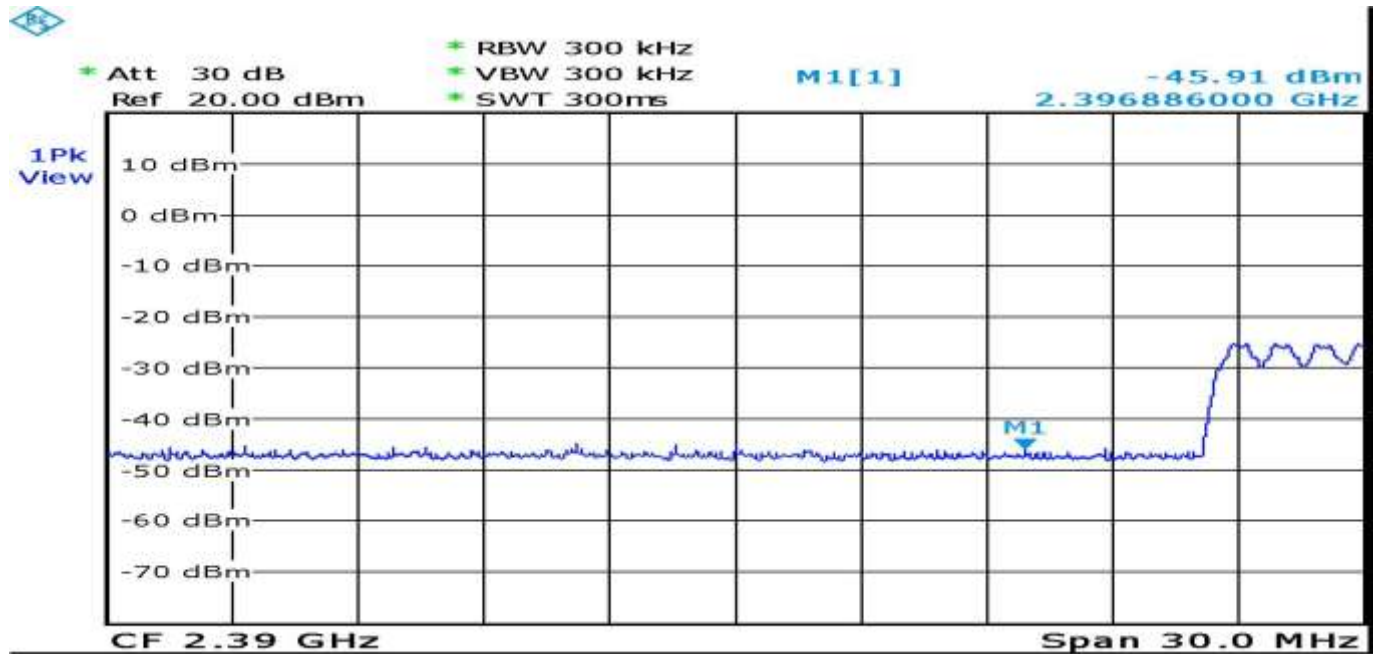

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Fundamental	2480MHz

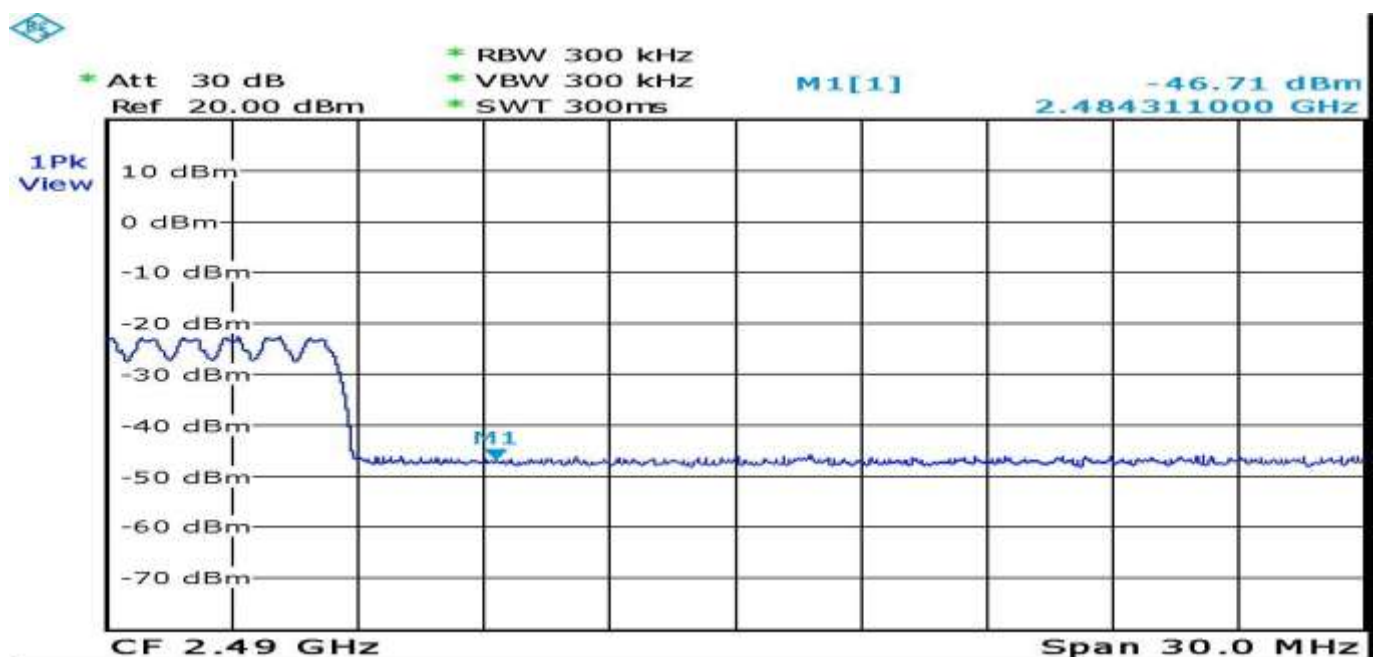

7. OCCUPIED BANDWIDTH


7.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

7.2 BLOCK DIAGRAM OF TEST SETUP

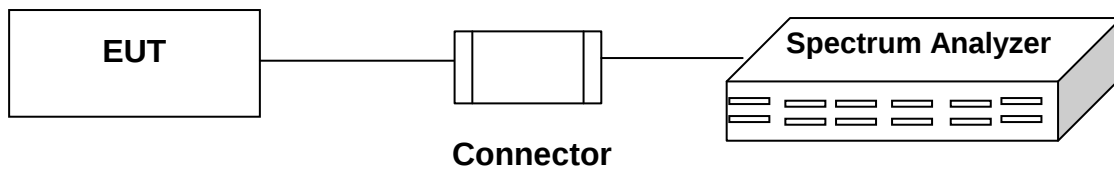


7.3 LIMIT



The maximum 20 dB bandwidth shall be measurement.

7.4 TEST RESULT

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Display Pattern	Program


Channel No.	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.868
38	2440	0.838
78	2480	0.838


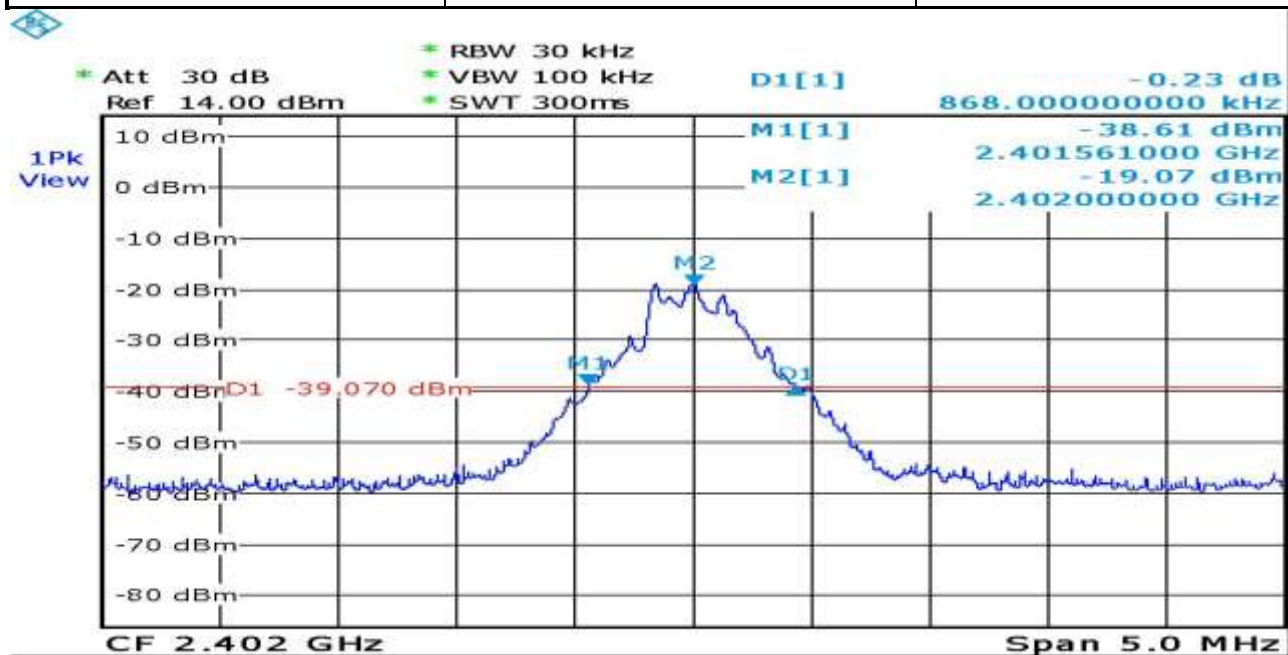


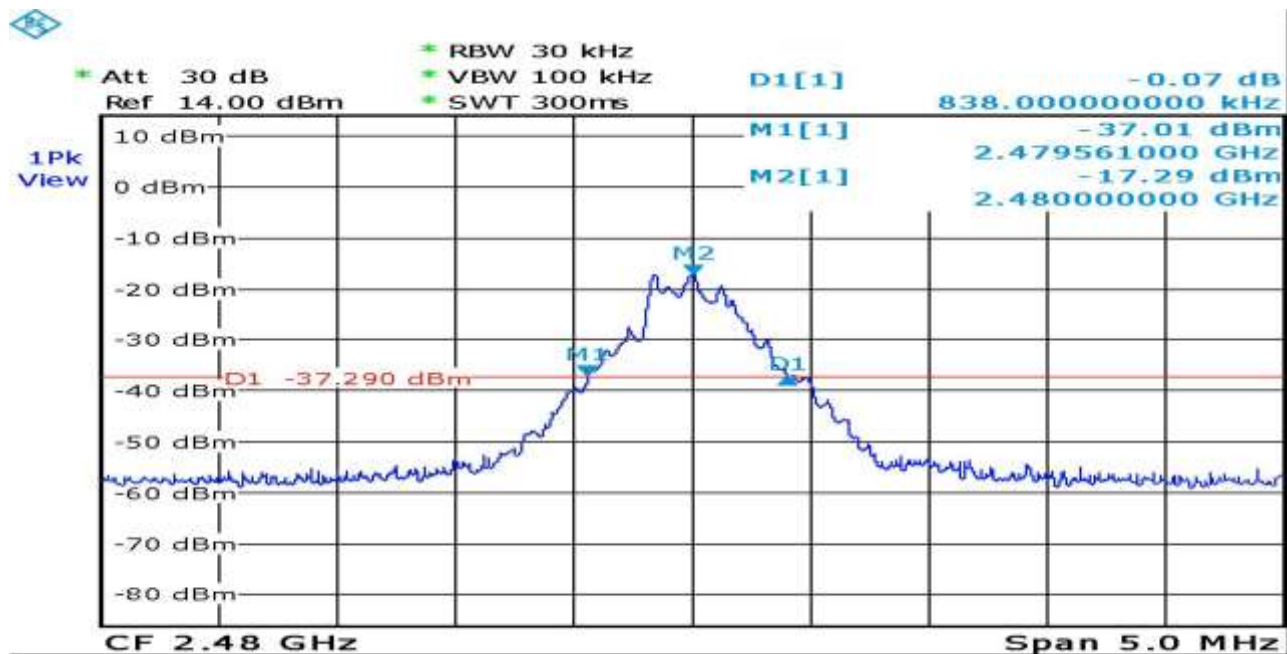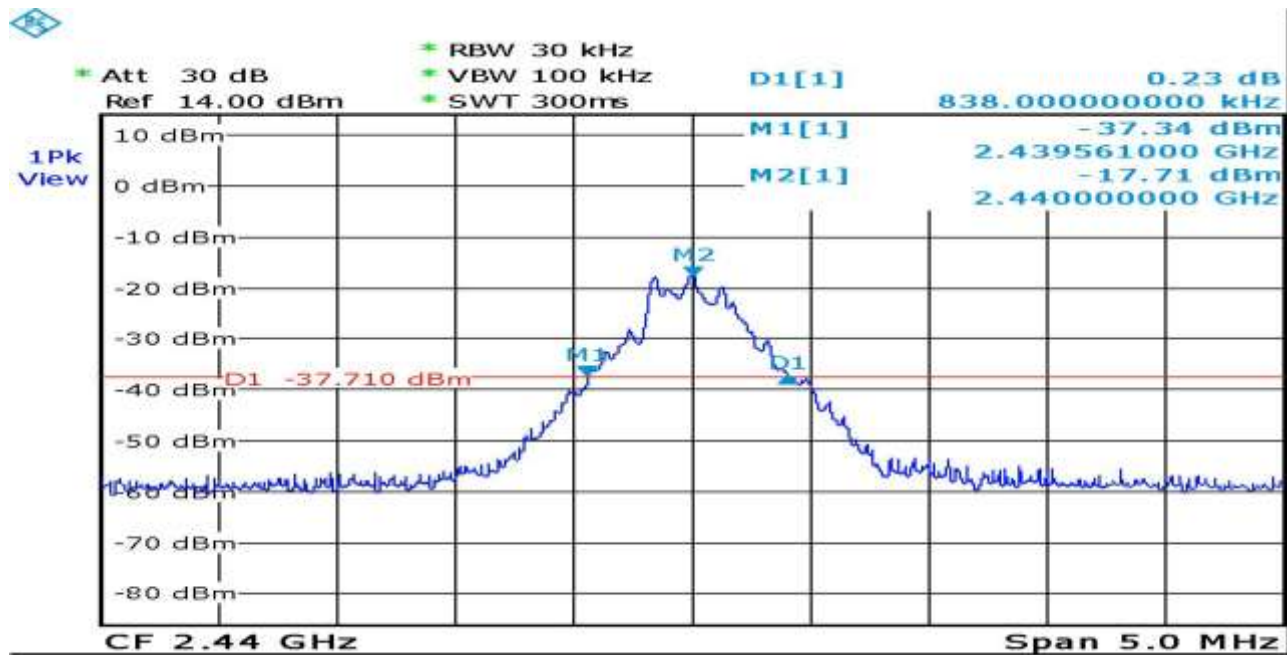

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- π /4 PSK	Display Pattern	Program


Channel No.	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.218
38	2440	1.208
78	2480	1.208


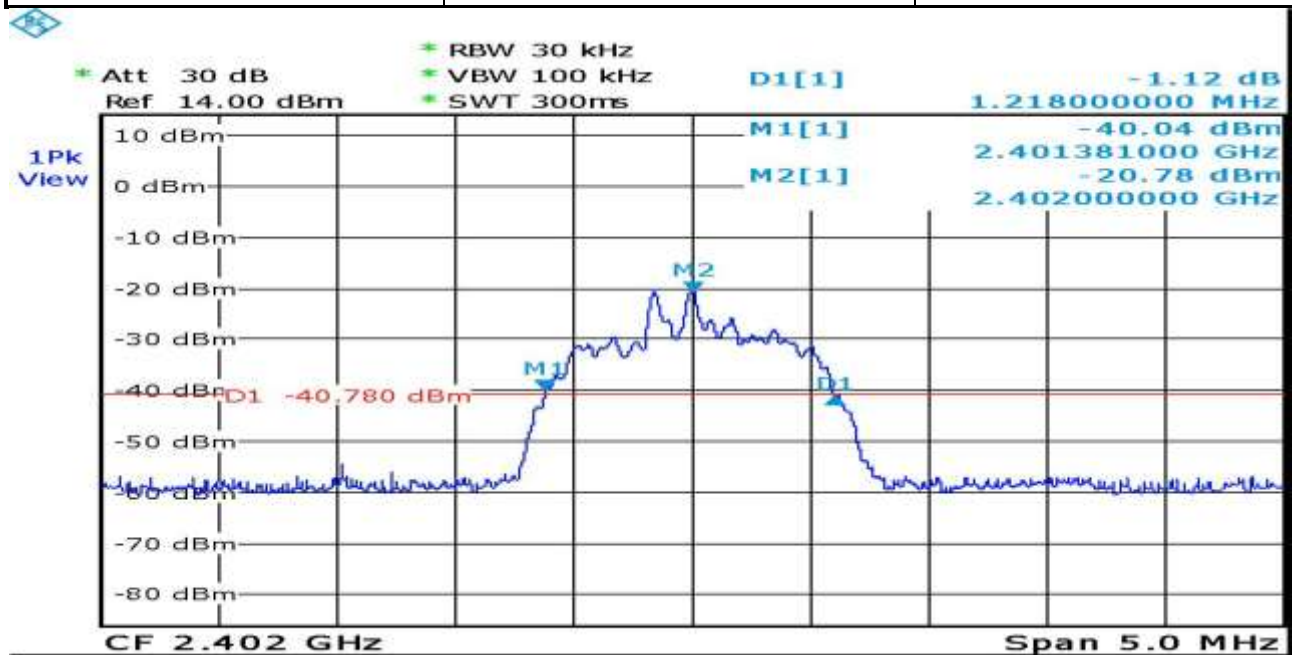


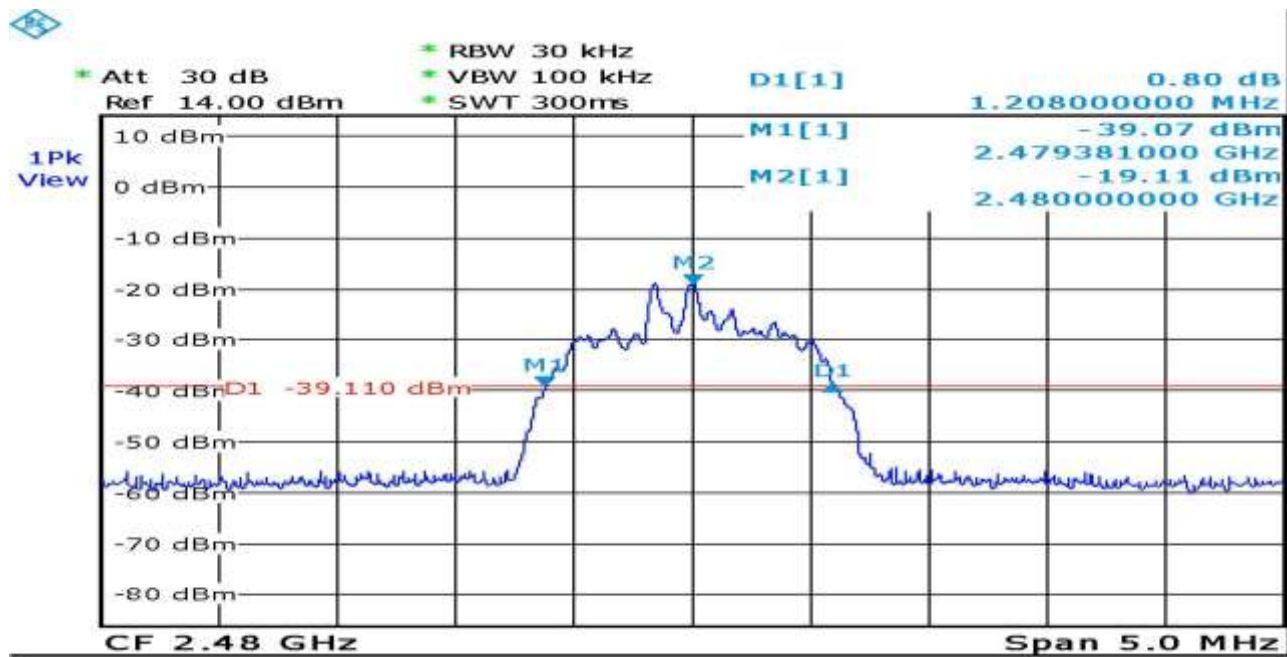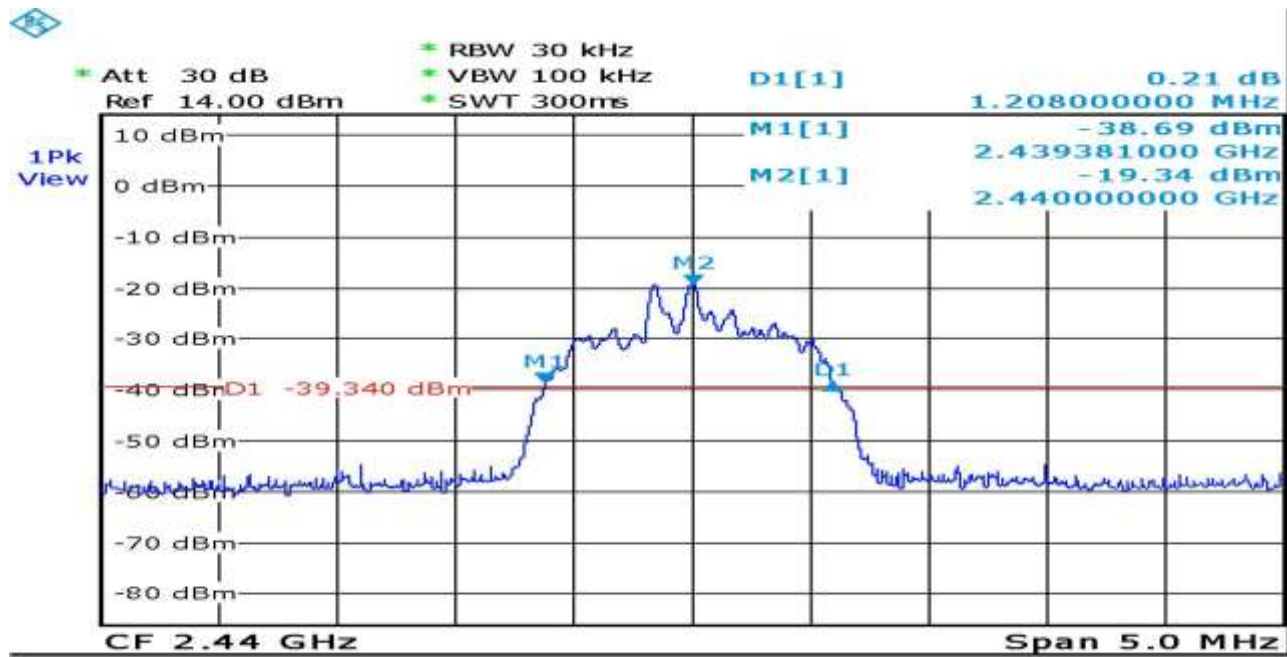

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Display Pattern	Program

Channel No.	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.208
38	2440	1.208
78	2480	1.208

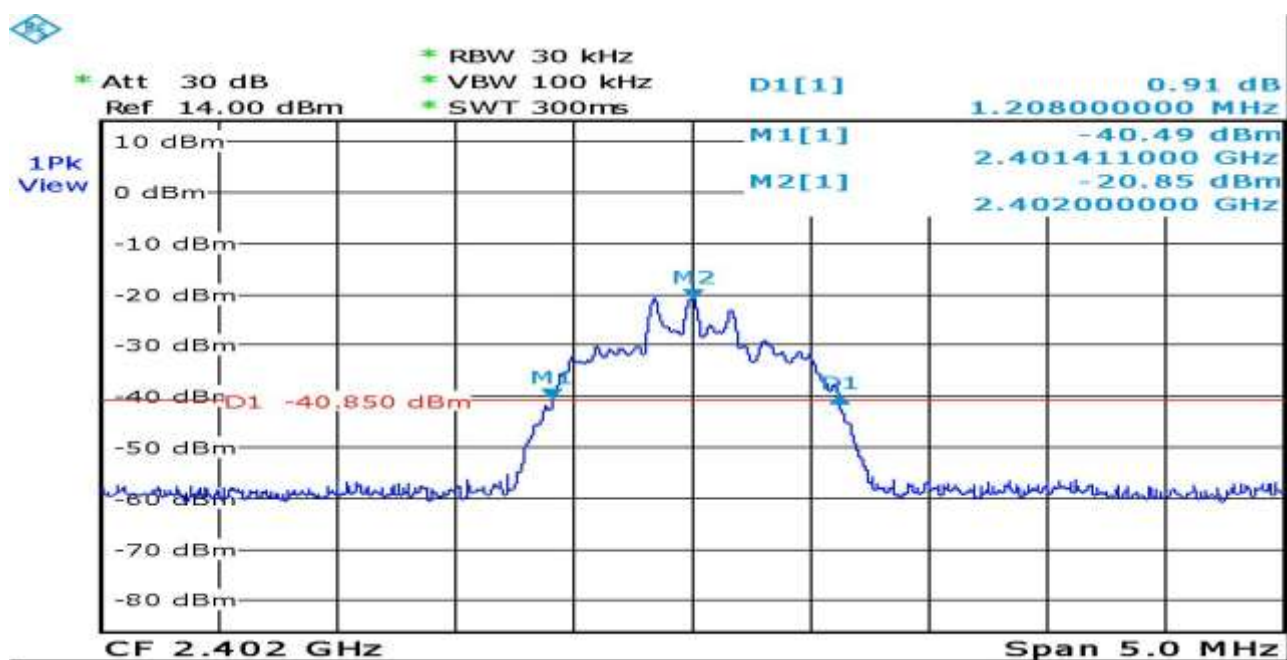

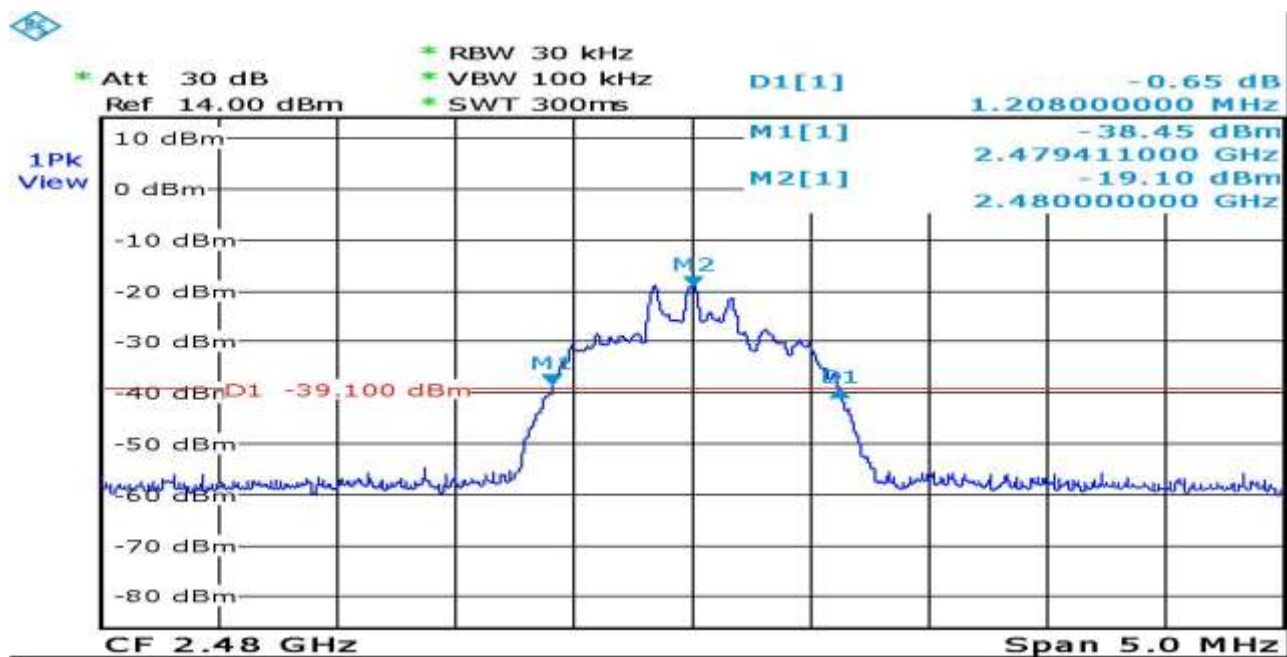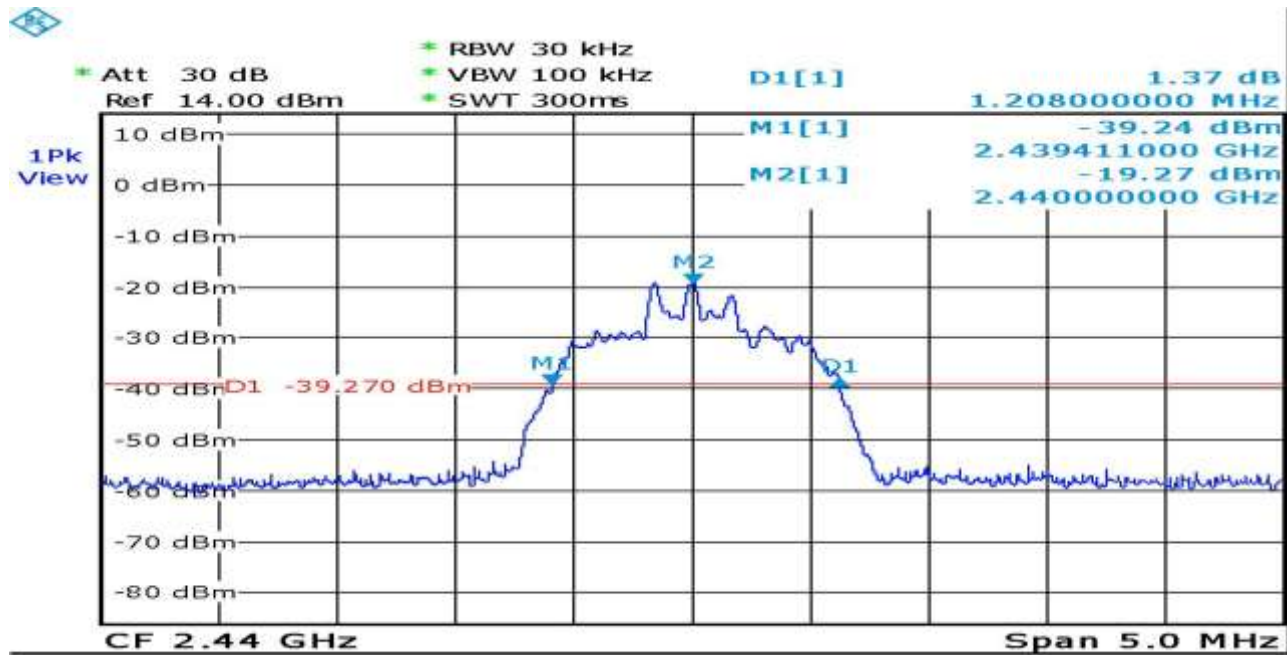

8. CHANNEL SEPARATION


8.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

8.2 BLOCK DIAGRAM OF TEST SETUP

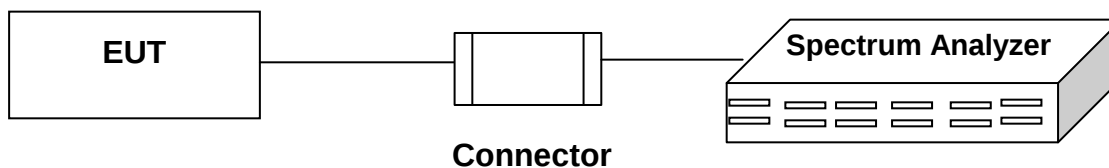

8.3 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25kHz or the 20dB bandwidth of hopping channel, whichever is greater.



Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater,

8.4 TEST RESULT

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Display Pattern	Program


Test Channel No.	Channel Separated (kHz)	Limit (kHz)	Two-thirds of 20dB Bandwidth (kHz)	Result
00	1018	>25	>578.666	Pass
38	1038	>25	>558.666	Pass
78	1018	>25	>558.666	Pass


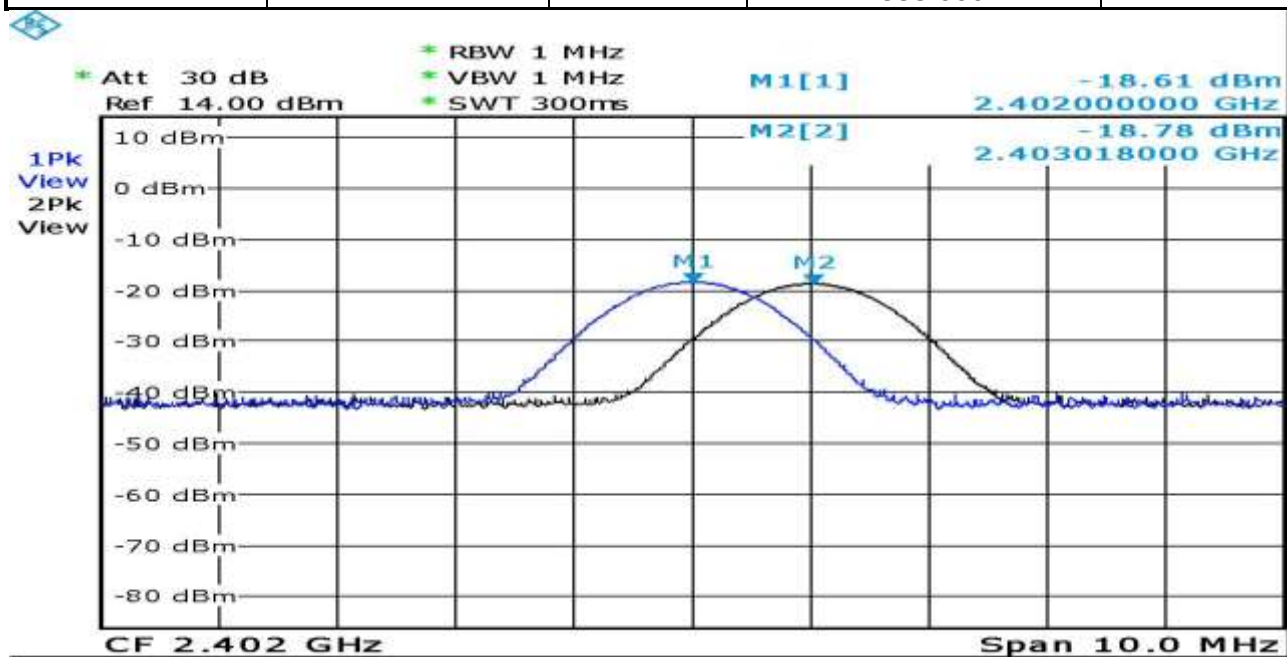


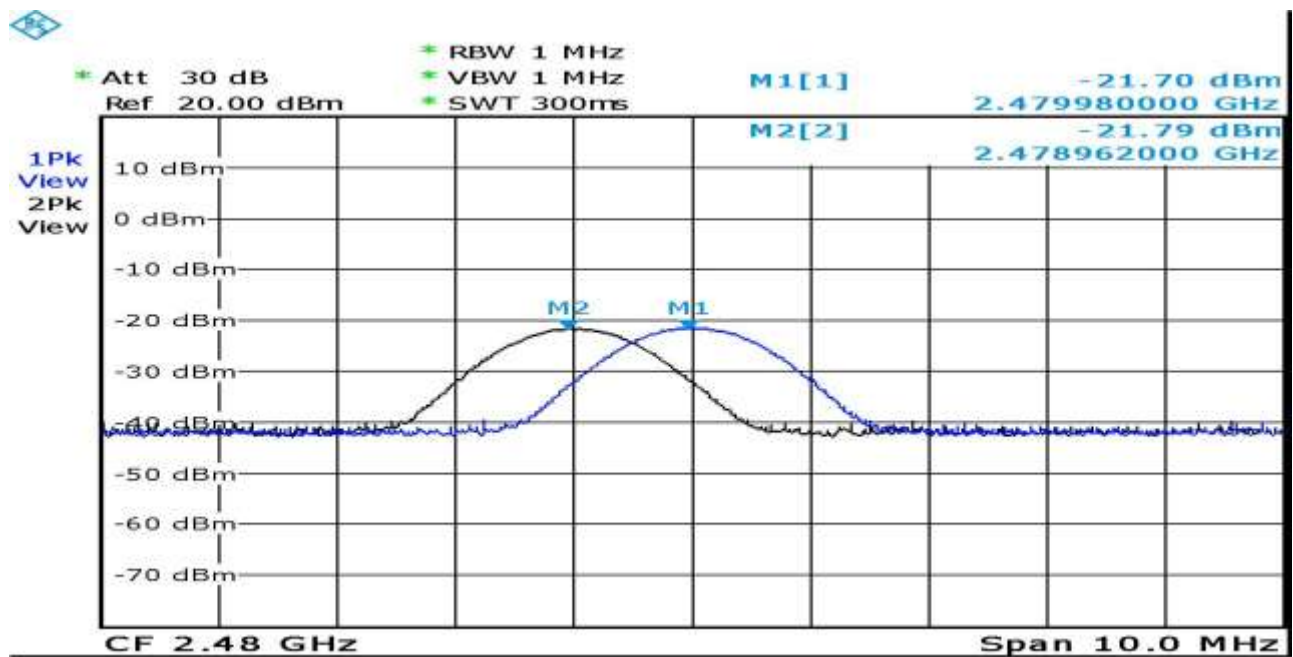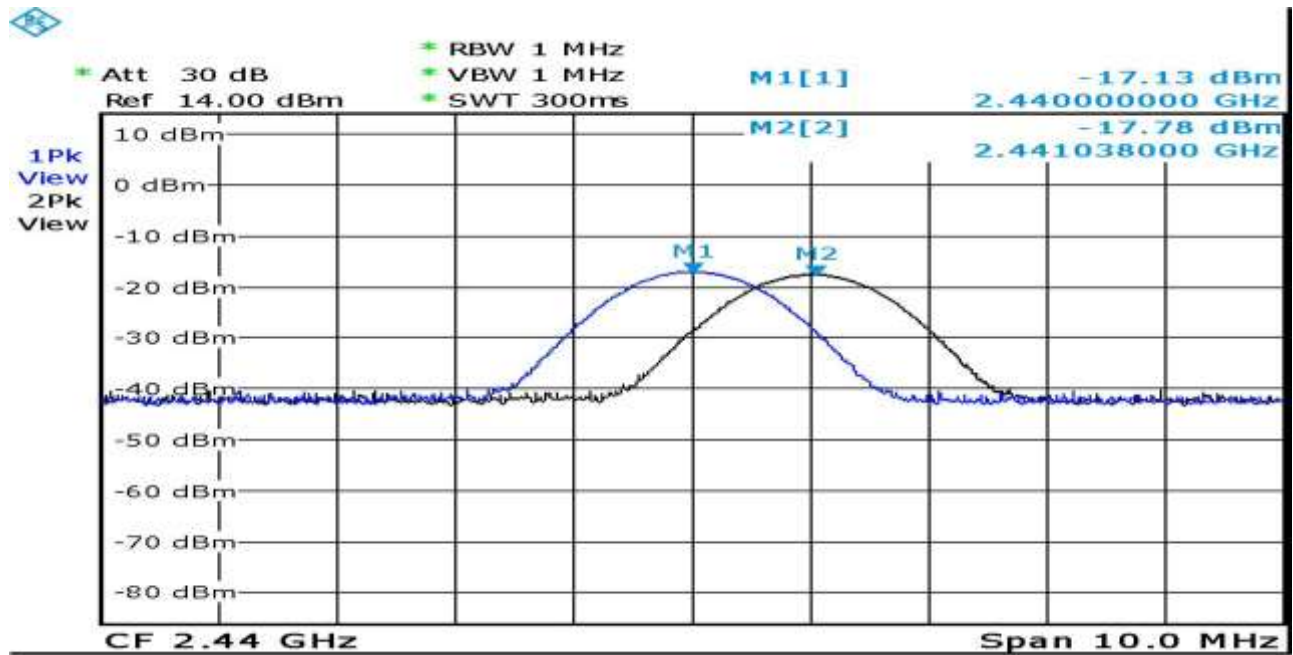

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- π /4 PSK	Display Pattern	Program


Test Channel No.	Channel Separated (kHz)	Limit (kHz)	Two-thirds of 20dB Bandwidth (kHz)	Result
00	1018	>25	>812.000	Pass
38	1018	>25	>805.333	Pass
78	1018	>25	>805.333	Pass


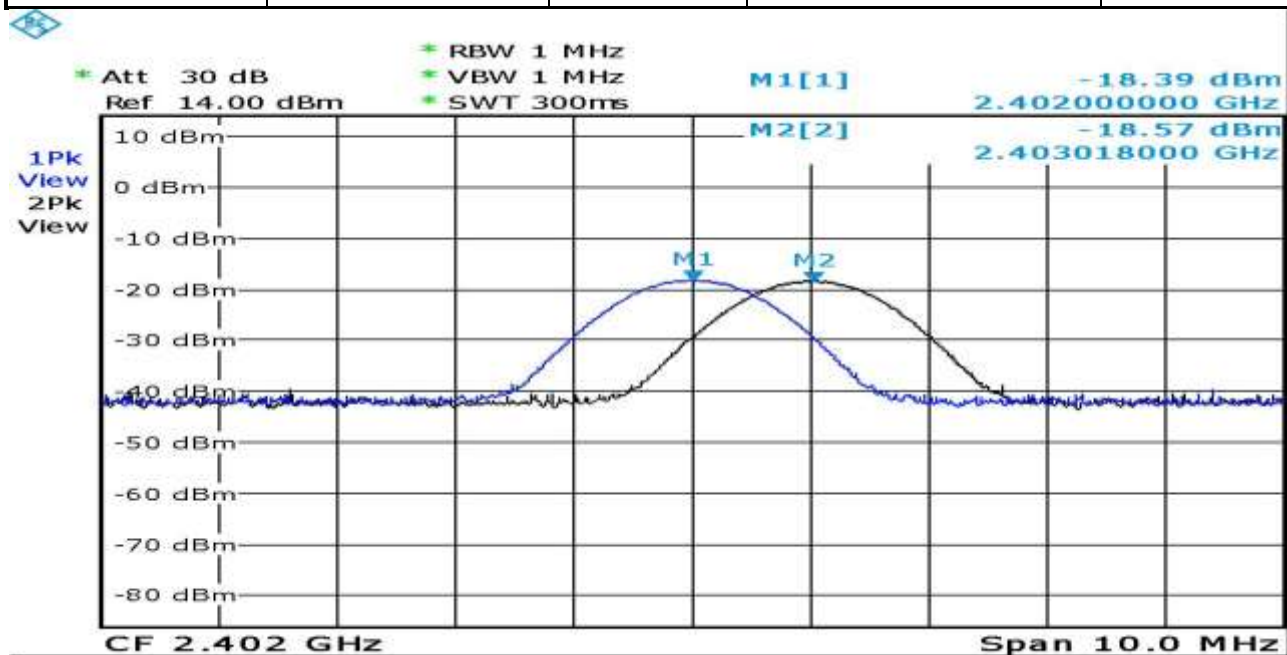


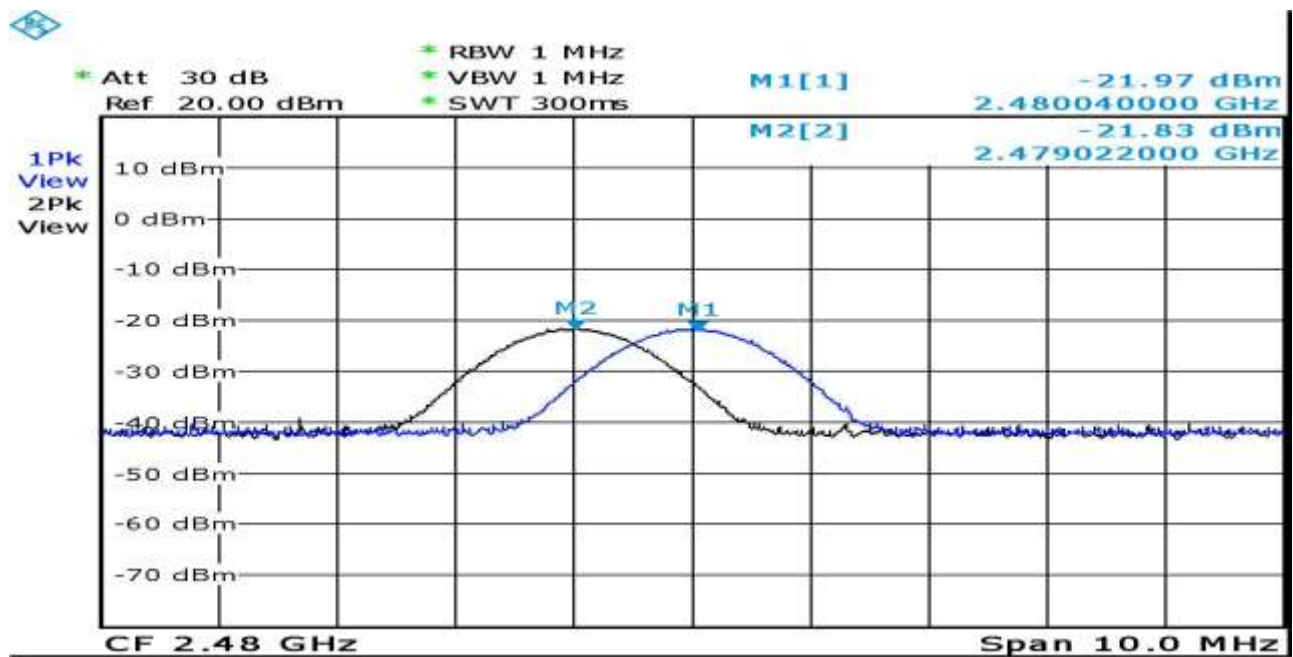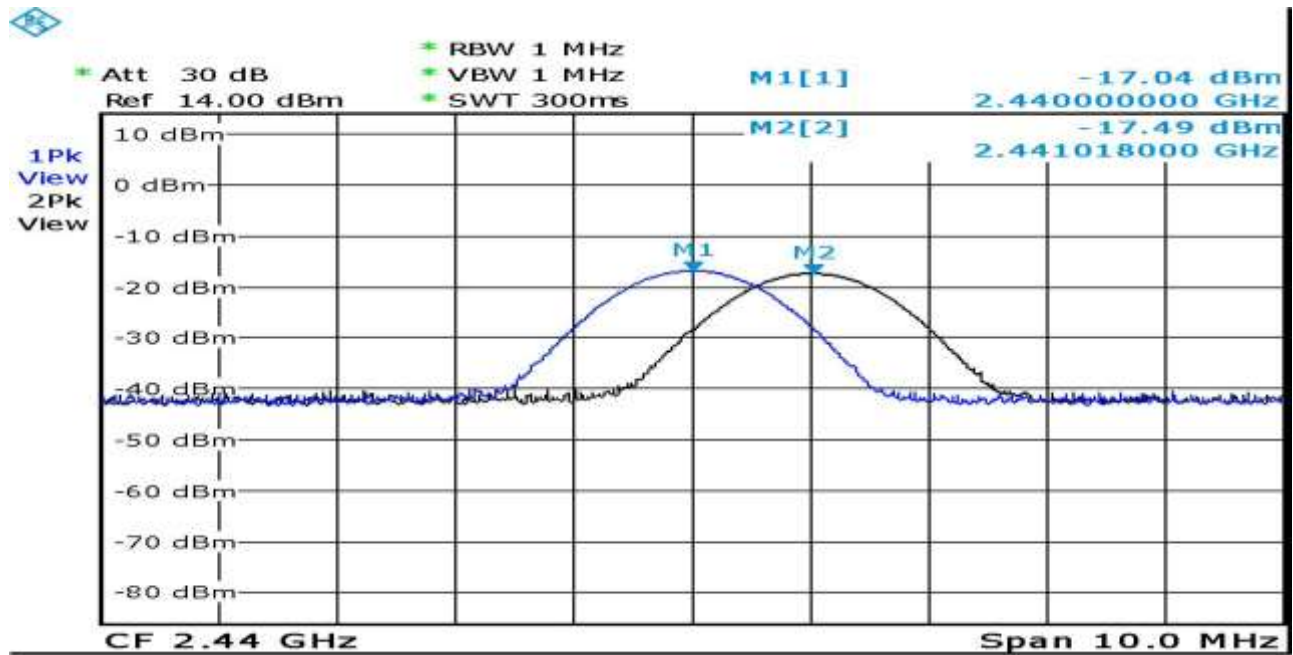

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Display Pattern	Program

Test Channel No.	Channel Separated (kHz)	Limit (kHz)	Two-thirds of 20dB Bandwidth (kHz)	Result
00	1018	>25	>805.333	Pass
38	1018	>25	>805.333	Pass
78	1058	>25	>805.333	Pass

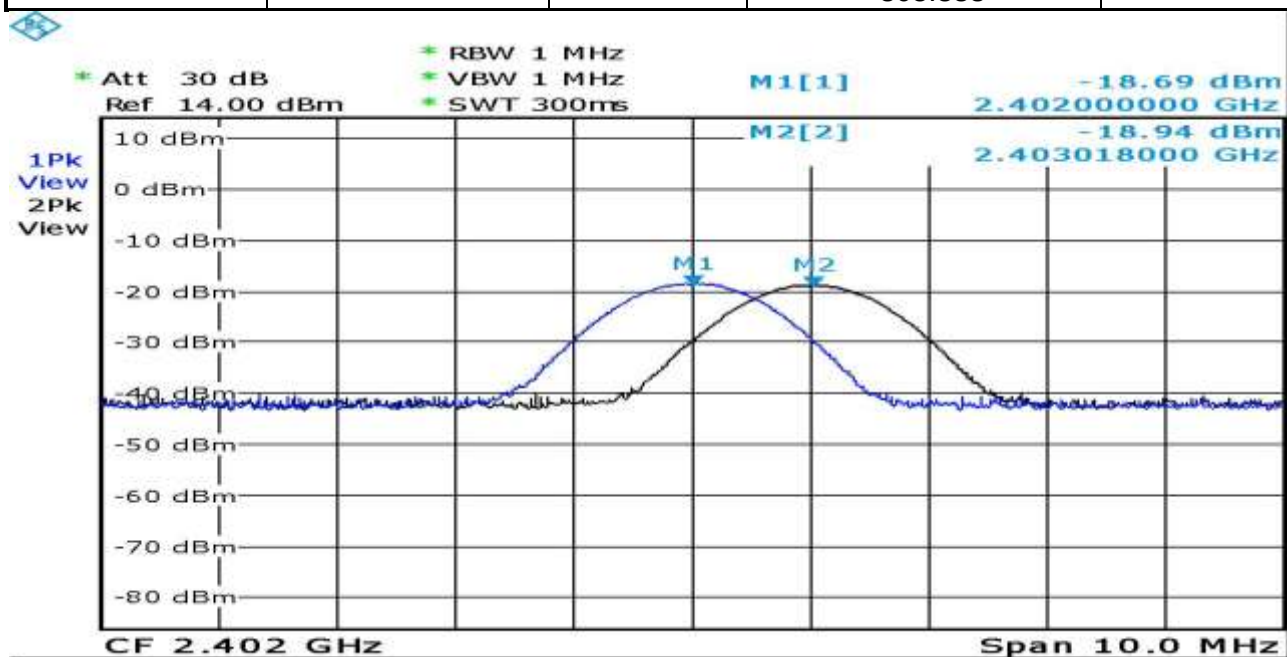

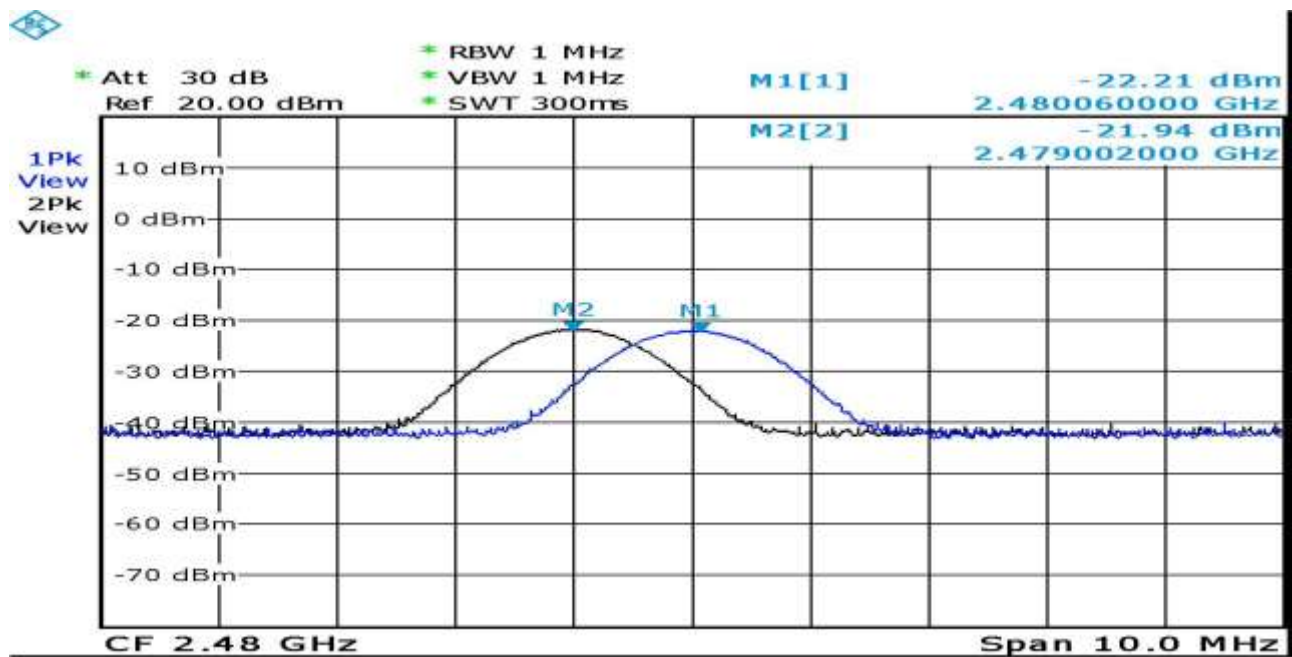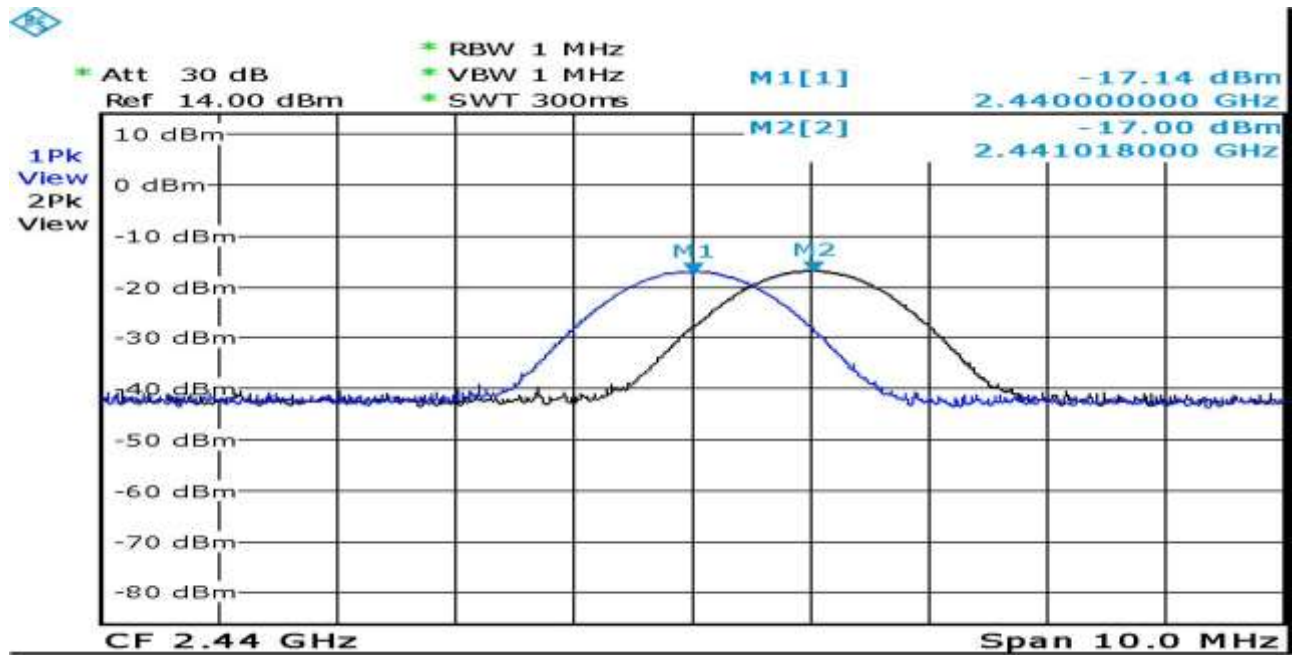

9. DWELL TIME


9.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

9.2 BLOCK DIAGRAM OF TEST SETUP

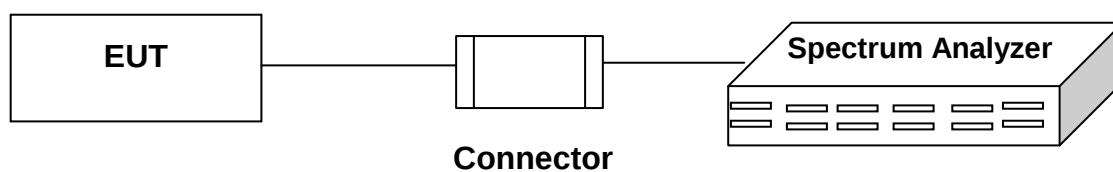

9.3 LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.


9.4 TEST RESULT

Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	GFSK	Test Frequency Range	2402 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 458.72(μs) = 0.00045872 (sec) ※ Dwell Time = 0. 00045872 (sec) x 320 (times) = 0.1467904 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

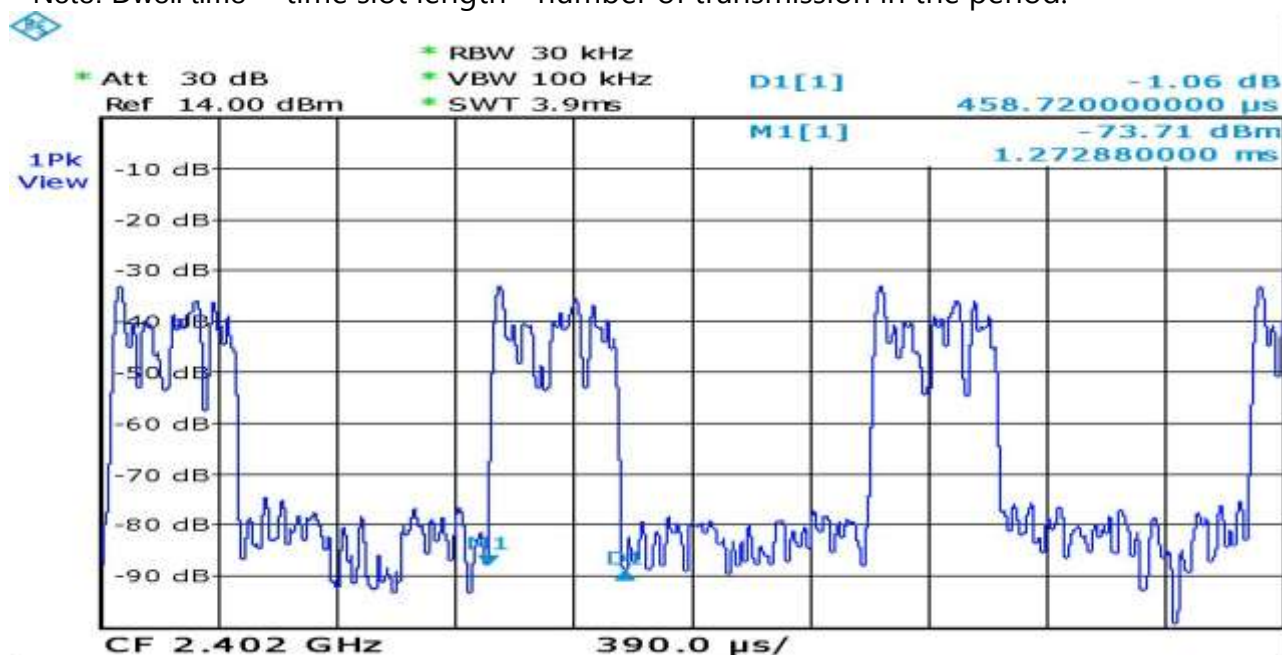

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 4/ 79) x (0.4 * 79) = 160 (times) Time slot length = 1723.8(μs) = 0.0017238 (sec)	< 0.4	Pass
※ Dwell Time = 0.0017238 (sec) x 160 (times) = 0.275808(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

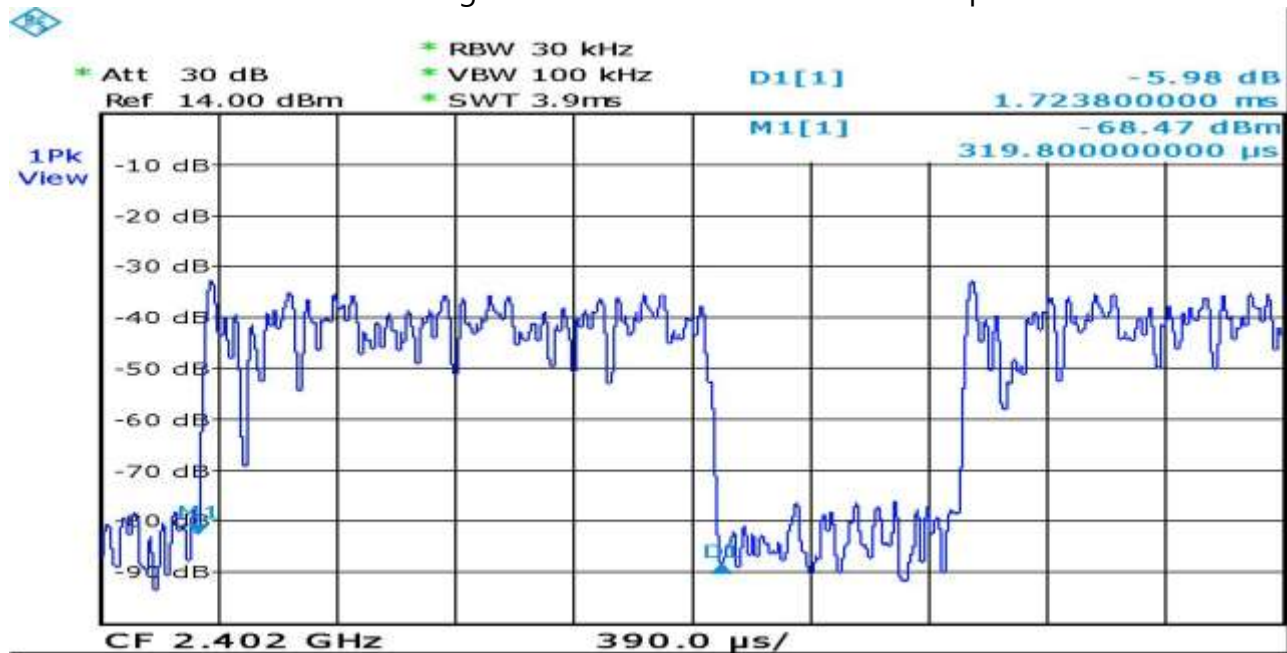

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 2971.8 (μs) = 0.0029718 (sec)	< 0.4	Pass
※ Dwell Time = 0.0029718 (sec) x 107 (times) = 0.3179826 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

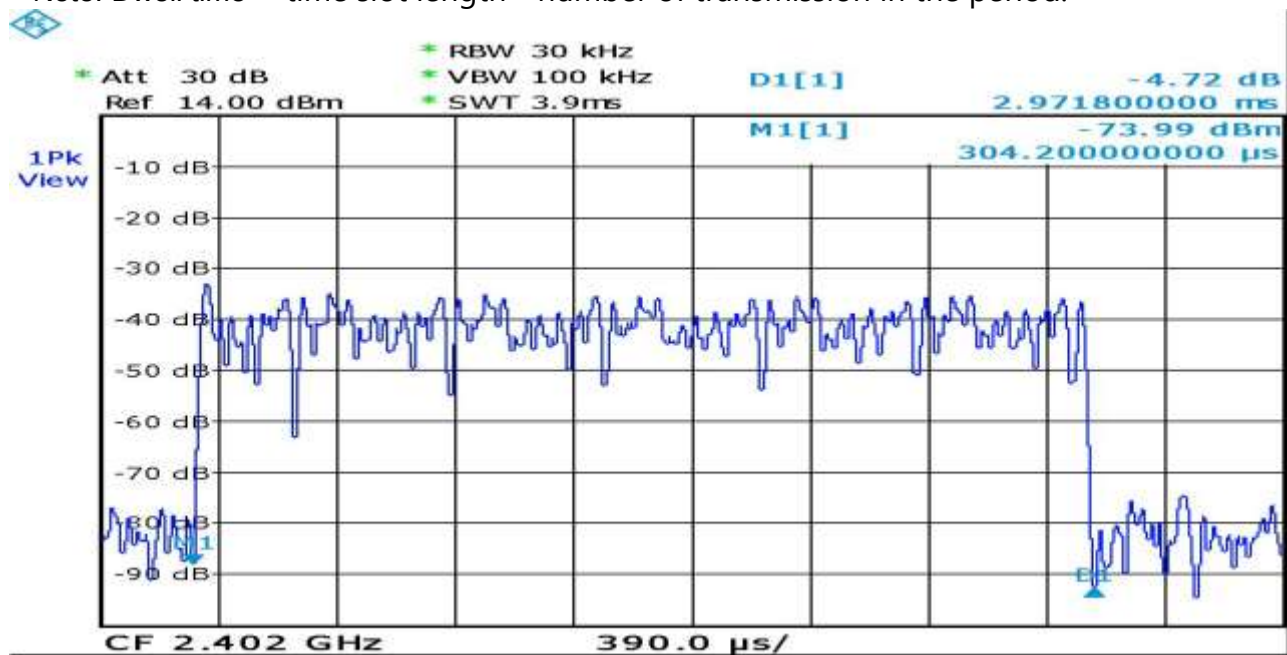


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	GFSK	Test Frequency Range	2440 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 500.6 (μs) = 0.0005006 (sec) ※ Dwell Time = 0. 0005006 (sec) x 320 (times) = 0.160192 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

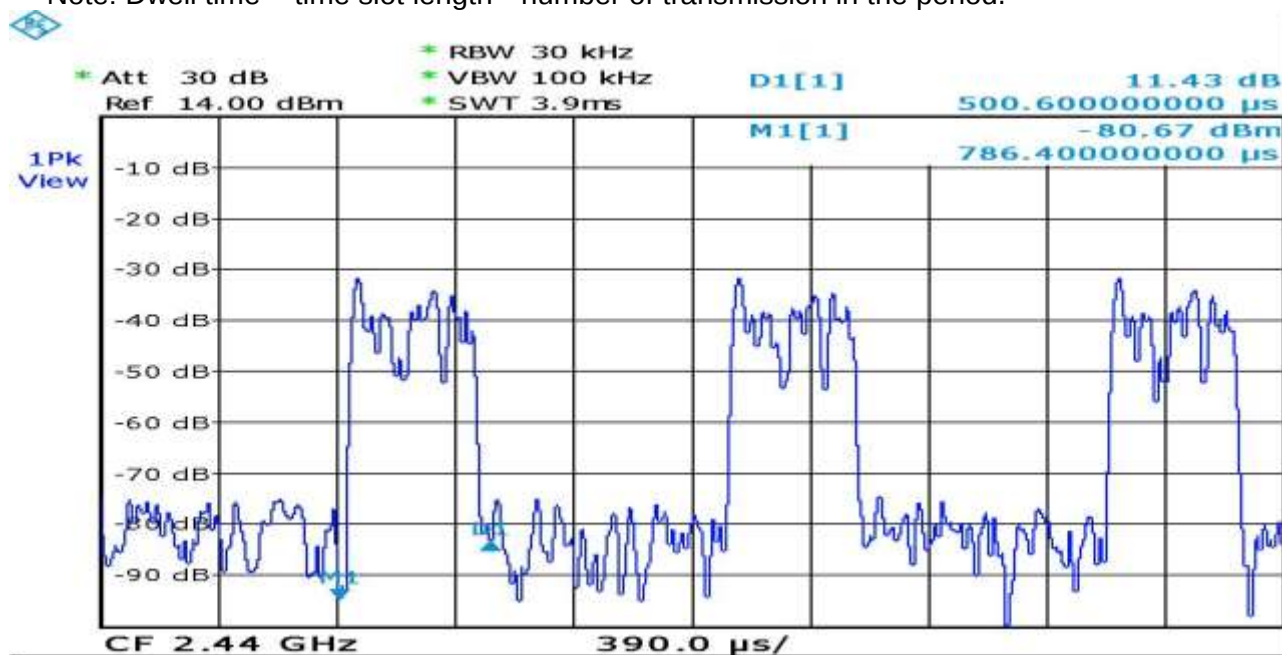

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 4/ 79) x (0.4 * 79) = 160 (times) Time slot length = 1747.2(μs) = 0.0017472 (sec)	< 0.4	Pass
※ Dwell Time = 0.0017472 (sec) x 160 (times) = 0.279552(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

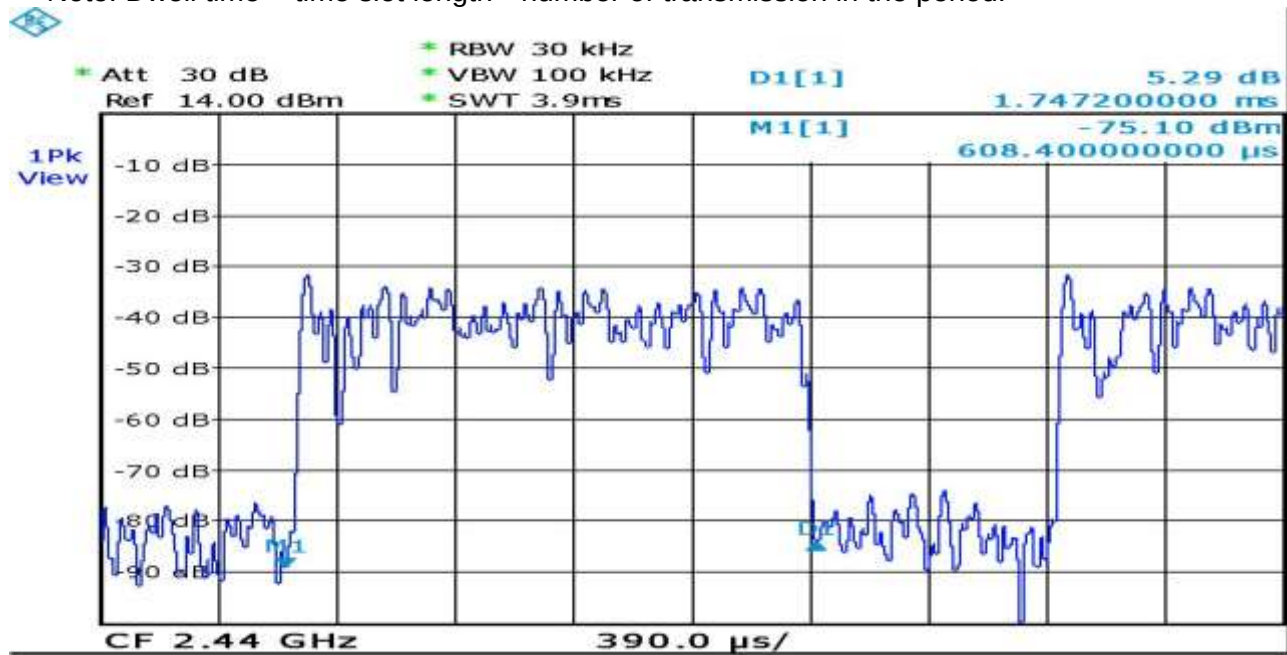

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3026.4 (μs) = 0.0030264(sec)	< 0.4	Pass
※ Dwell Time = 0.0030264 (sec) x 107 (times) = 0.3238248(sec)		

Note: Dwell time = time slot length * number of transmission in the period.

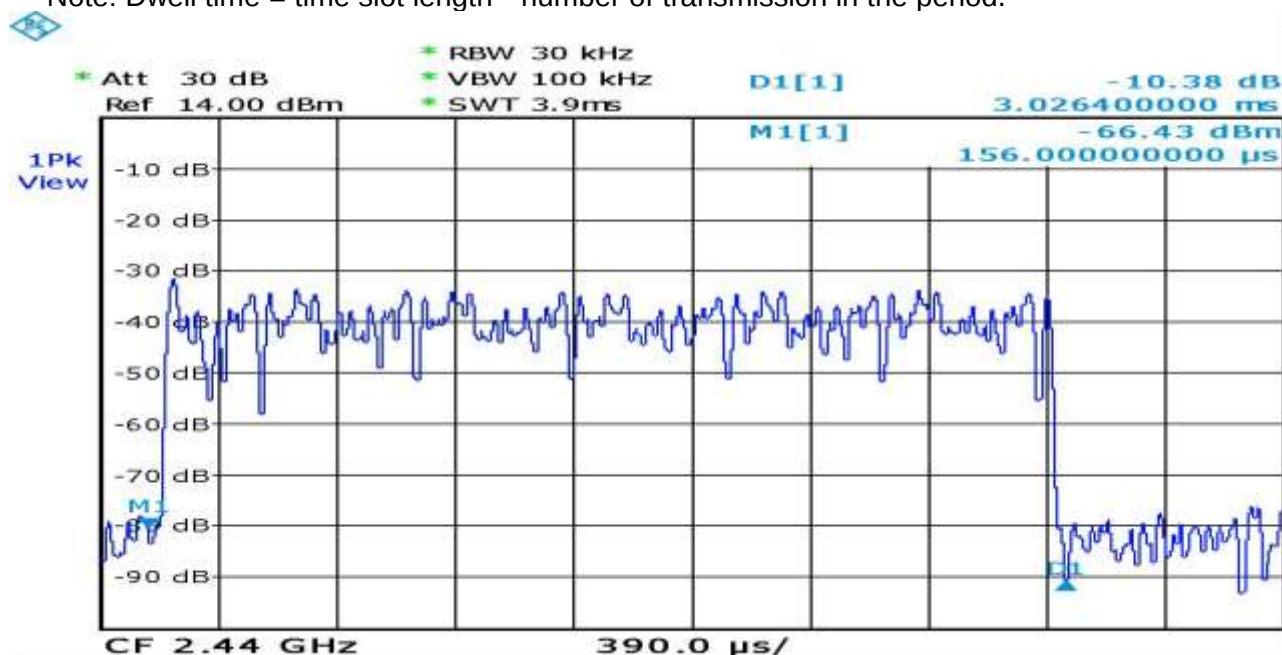


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	GFSK	Test Frequency Range	2480 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 546(μs) = 0.000546 (sec) ※ Dwell Time = 0. 000546 (sec) x 320 (times) = 0.17472 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

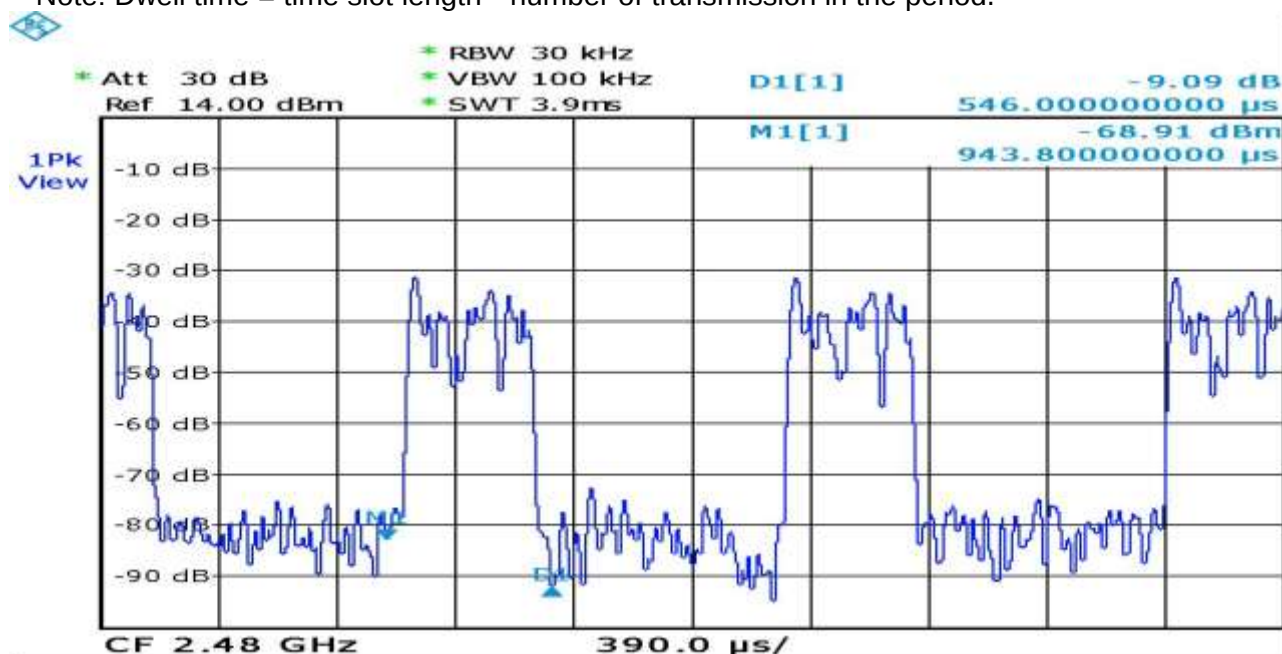

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = $0.4 \text{ (sec)} \times 79 \text{ (number of channel)}$ = 31.6 (sec) Hop rate = $(1600 / 4 / 79) \times (0.4 \times 79) = 160 \text{ (times)}$ Time slot length = $1723.8(\mu\text{s}) = 0.0017238 \text{ (sec)}$	< 0.4	Pass
※ Dwell Time = $0.0017238 \text{ (sec)} \times 160 \text{ (times)}$ = 0.275808(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

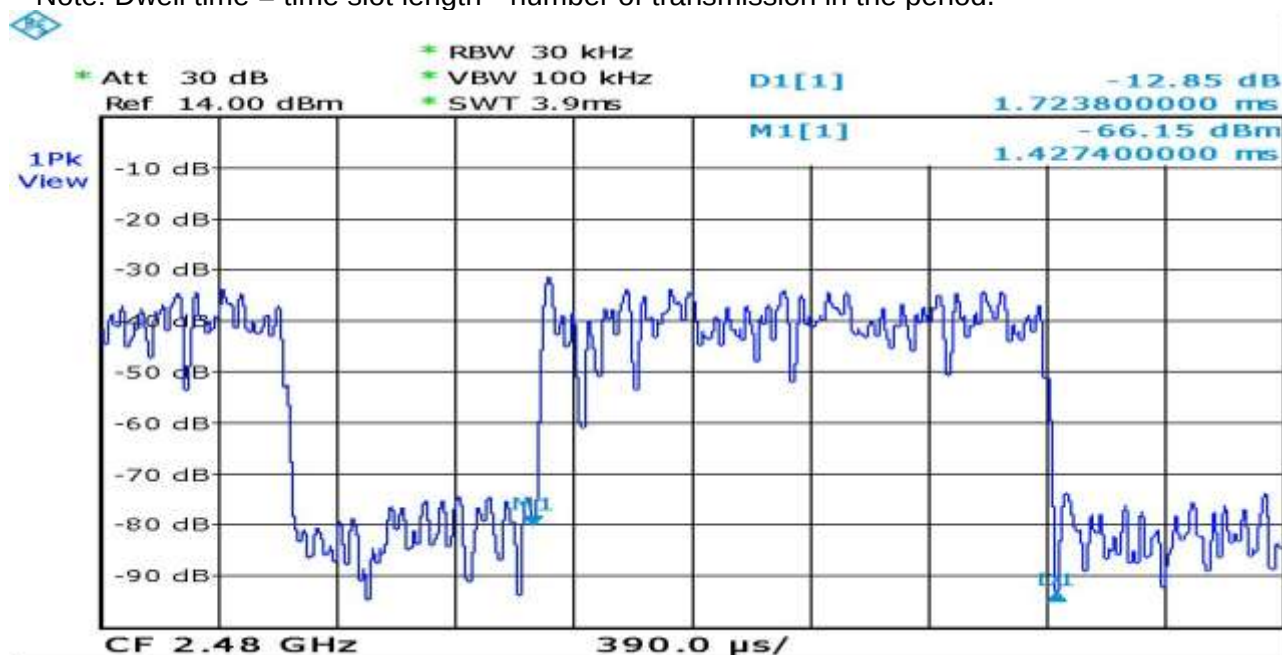

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3010.8 (μs) = 0.0030108 (sec)	< 0.4	Pass
※ Dwell Time = 0.0030108 (sec) x 107 (times) = 0.3221556 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

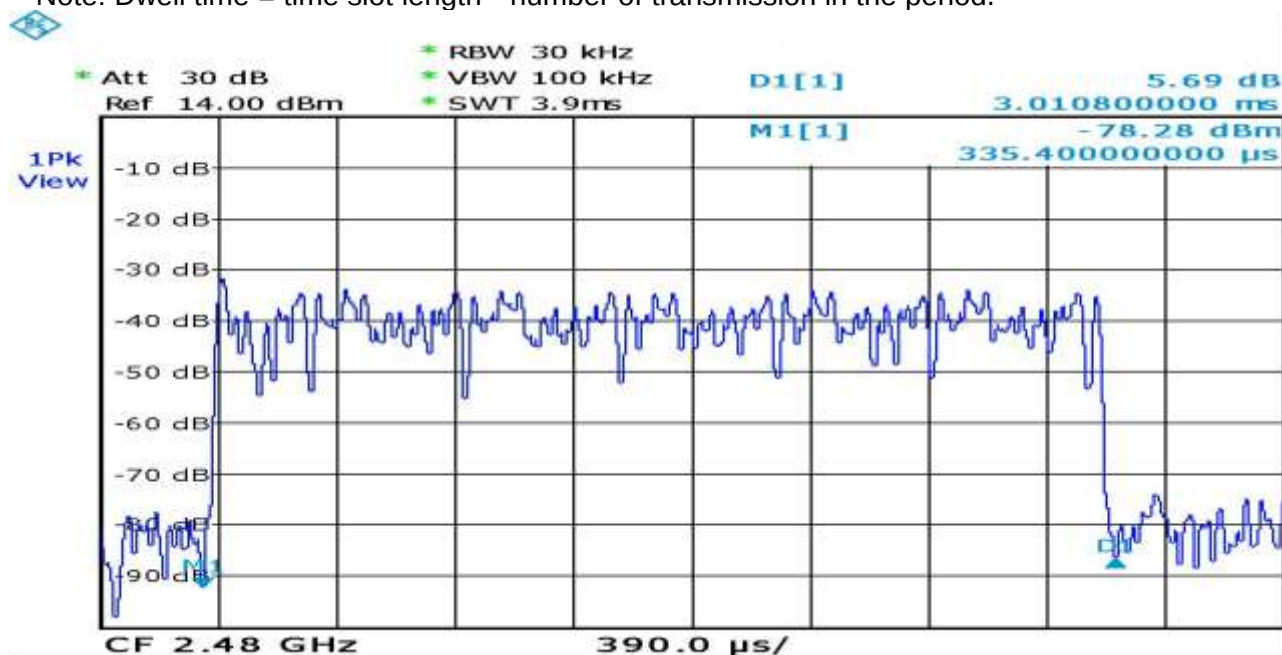


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	$\pi/4$ PSK	Test Frequency Range	2402 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 487.8(μ s) = 0.0004878(sec)	< 0.4	Pass
※ Dwell Time = 0. 0004878 (sec) x 320 (times) = 0.156096 (sec)		


Note: Dwell time = time slot length * number of transmission in the period.

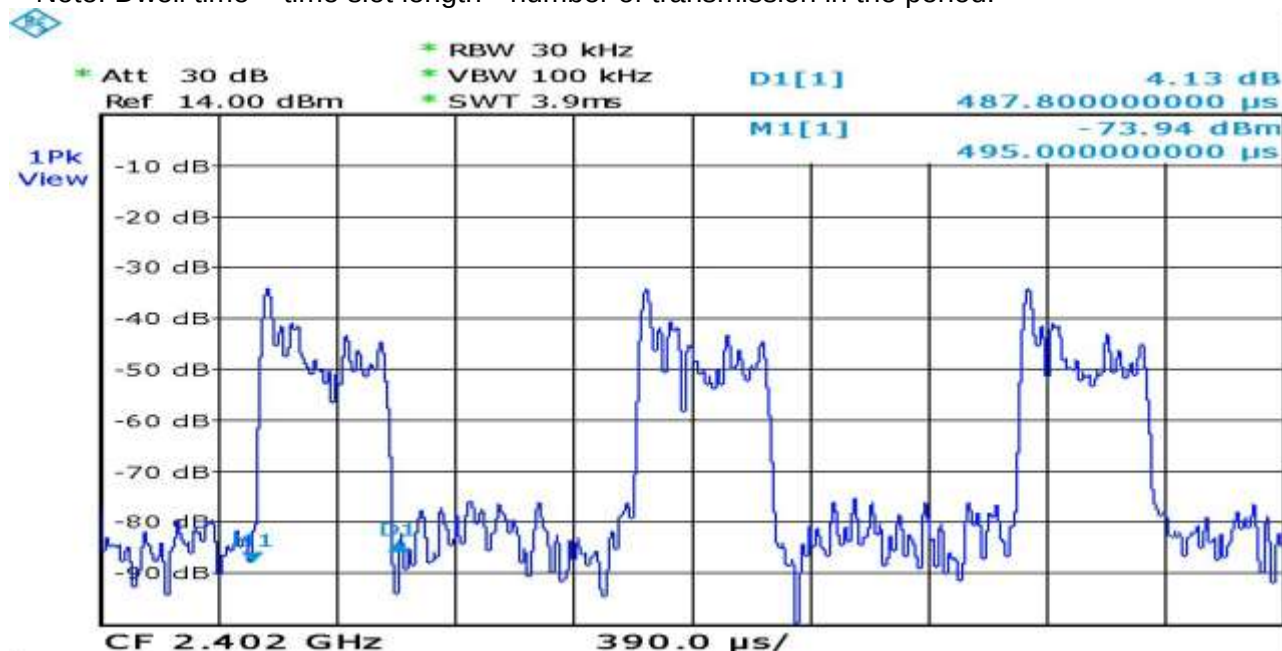

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = $0.4 \text{ (sec)} \times 79 \text{ (number of channel)}$ = 31.6 (sec) Hop rate = $(1600 / 4 / 79) \times (0.4 \times 79) = 160 \text{ (times)}$ Time slot length = $1741.2(\mu\text{s}) = 0.0017412 \text{ (sec)}$	< 0.4	Pass
※ Dwell Time = $0.0017412 \text{ (sec)} \times 160 \text{ (times)}$ = 0.278592(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

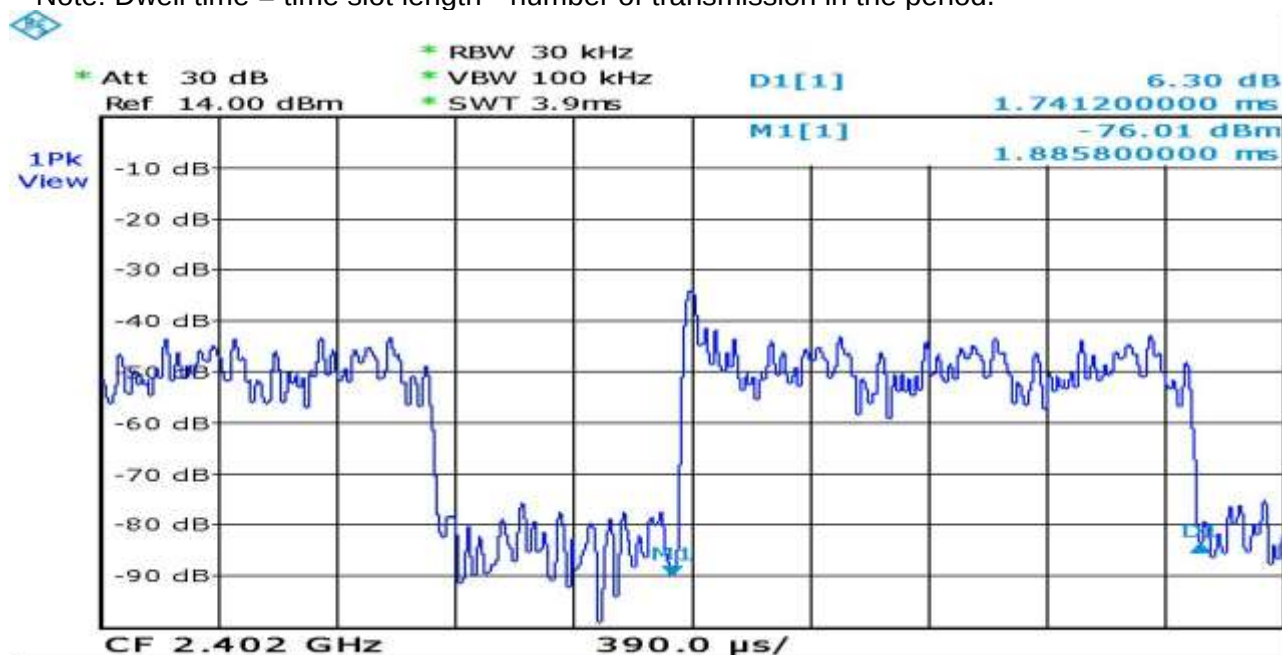

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3034.2(μs) = 0.0030342 (sec)	< 0.4	Pass
※ Dwell Time = 0.0030342 (sec) x 107 (times) = 0.3246594 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

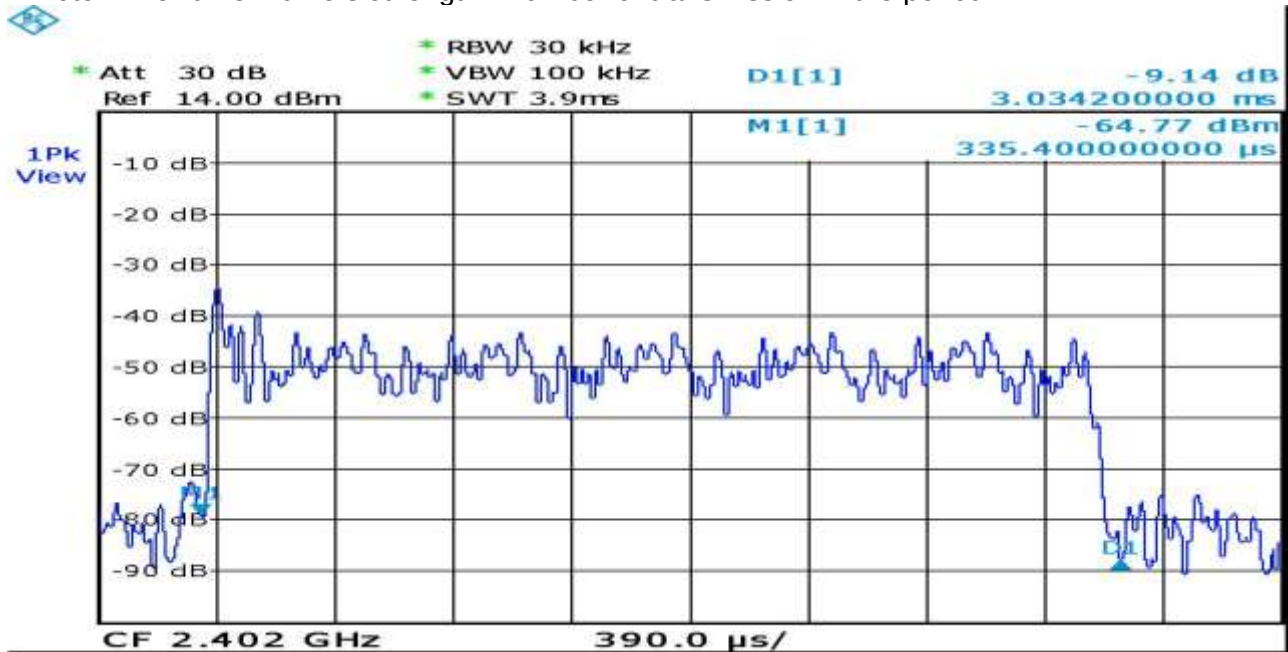


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	$\pi/4$ PSK	Test Frequency Range	2440 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 514.8(μ s) = 0.0005148 (sec) ※ Dwell Time = 0. 0005148 (sec) x 320 (times) = 0.164736(sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

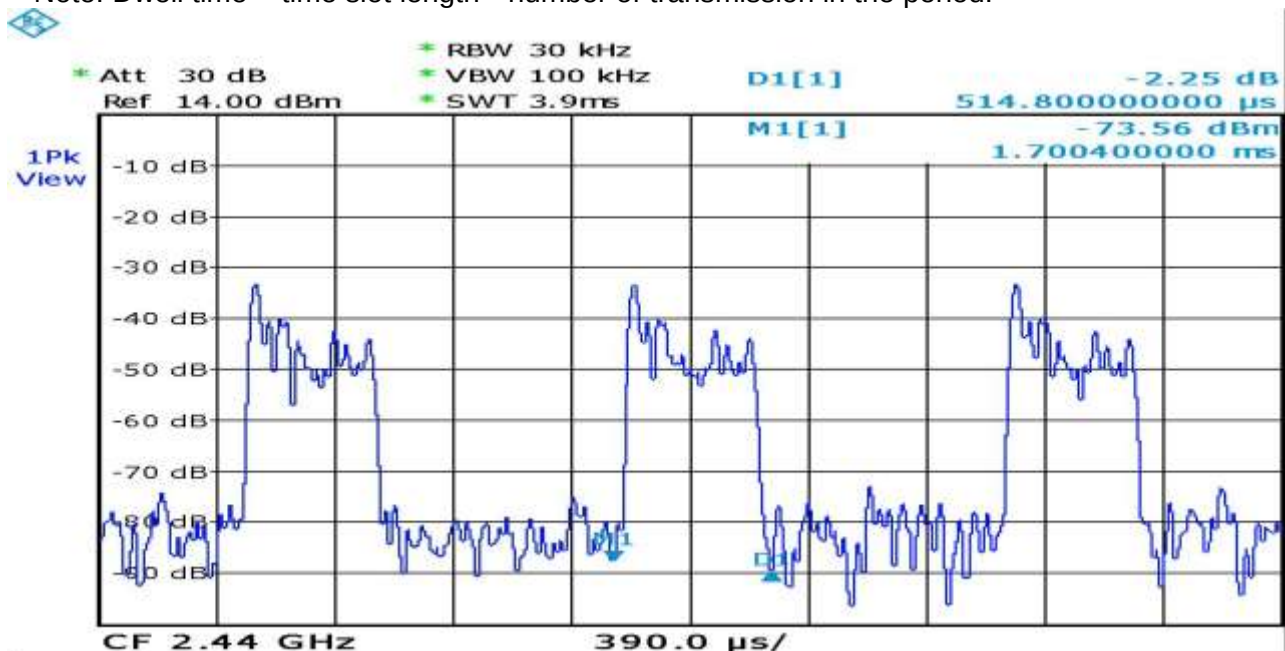

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = $0.4 \text{ (sec)} \times 79 \text{ (number of channel)}$ = 31.6 (sec) Hop rate = $(1600 / 4 / 79) \times (0.4 \times 79) = 160 \text{ (times)}$ Time slot length = $1731.6(\mu\text{s}) = 0.0017316 \text{ (sec)}$	< 0.4	Pass
※ Dwell Time = $0.0017316 \text{ (sec)} \times 160 \text{ (times)}$ = 0.277056(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

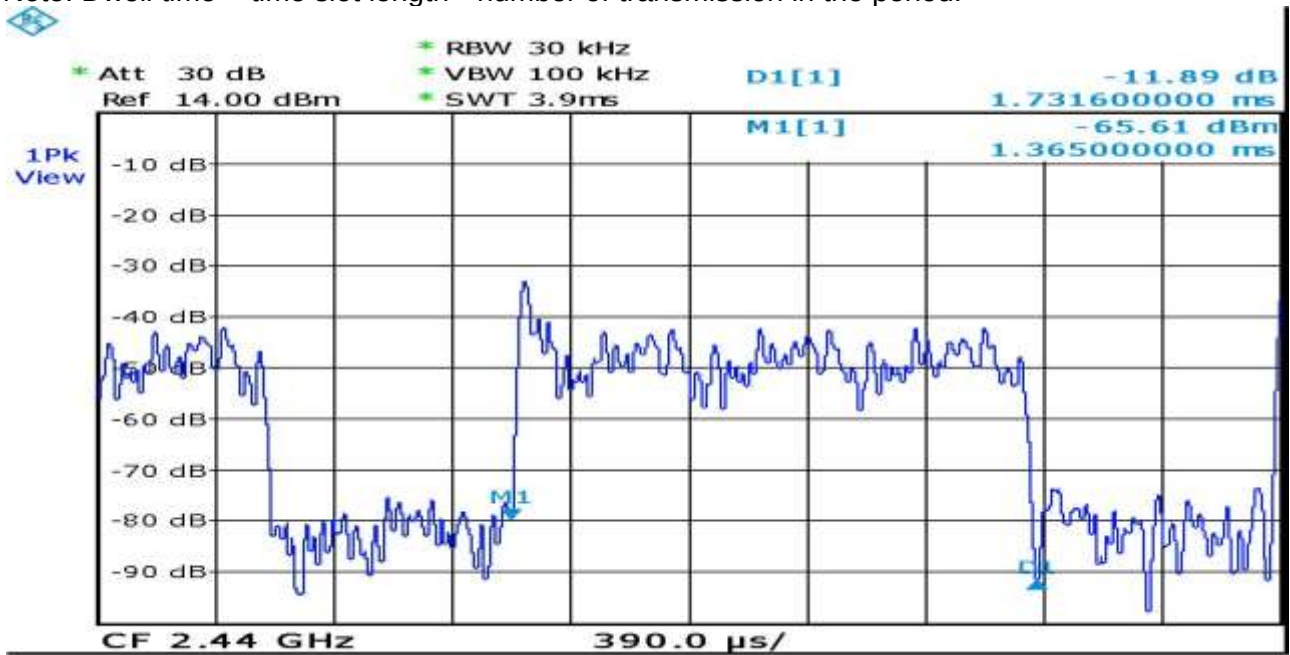

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3036 (μs) = 0.003036 (sec)	< 0.4	Pass
※ Dwell Time = 0.003036 (sec) x 107 (times) = 0.324852 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

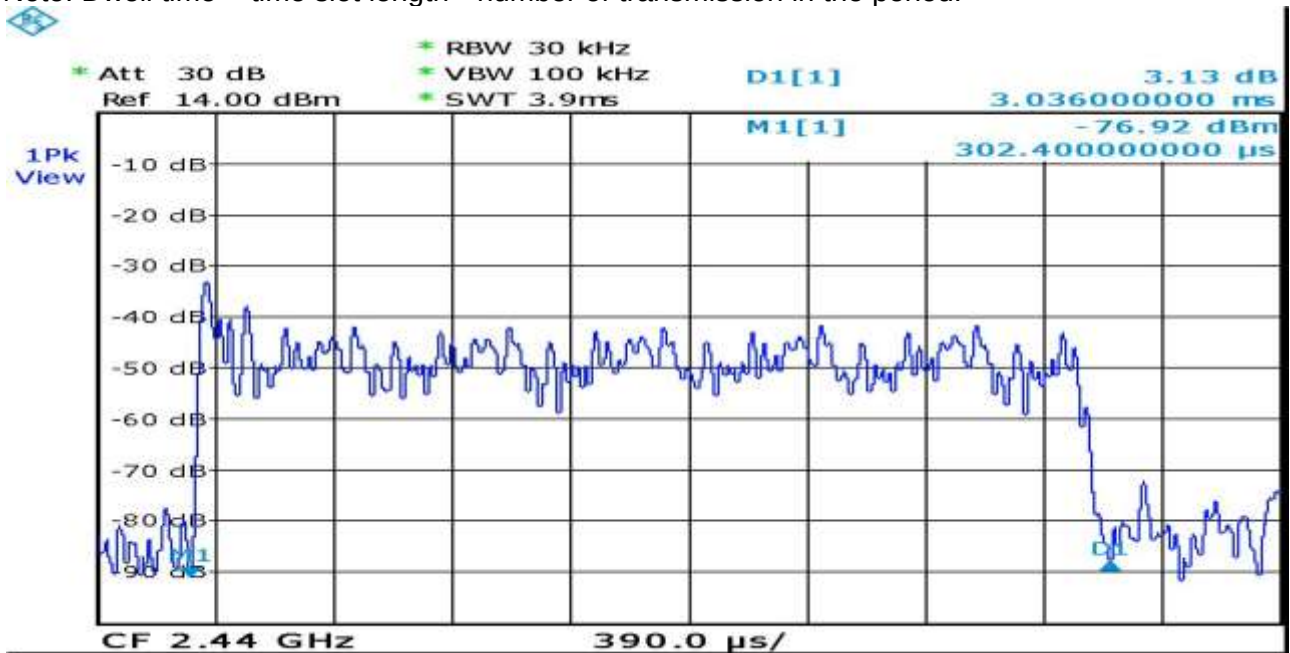


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	$\pi/4$ PSK	Test Frequency Range	2480 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 510.8(μ s) = 0.0005108 (sec) ※ Dwell Time = 0. 0005108 (sec) x 320 (times) = 0.163456 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

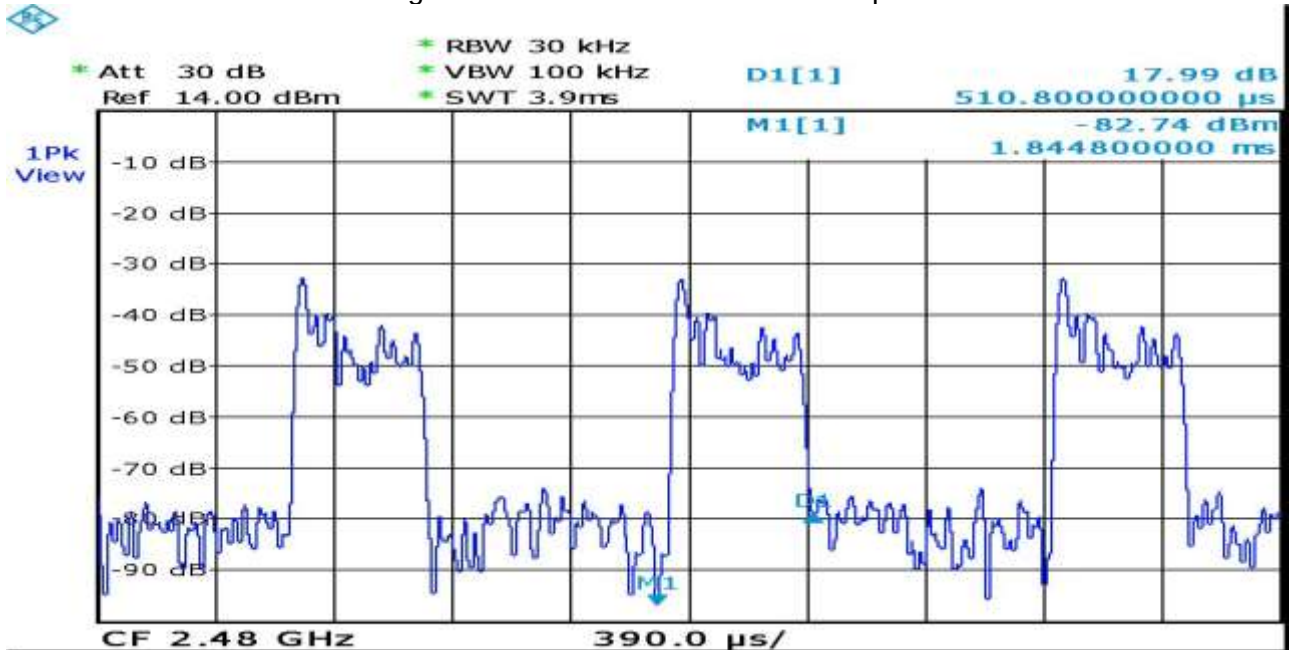

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 4/ 79) x (0.4 * 79) = 160 (times) Time slot length = 1772.2(μs) = 0.0017722 (sec)	< 0.4	Pass
※ Dwell Time = 0.0017722 (sec) x 160 (times) = 0.283552(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

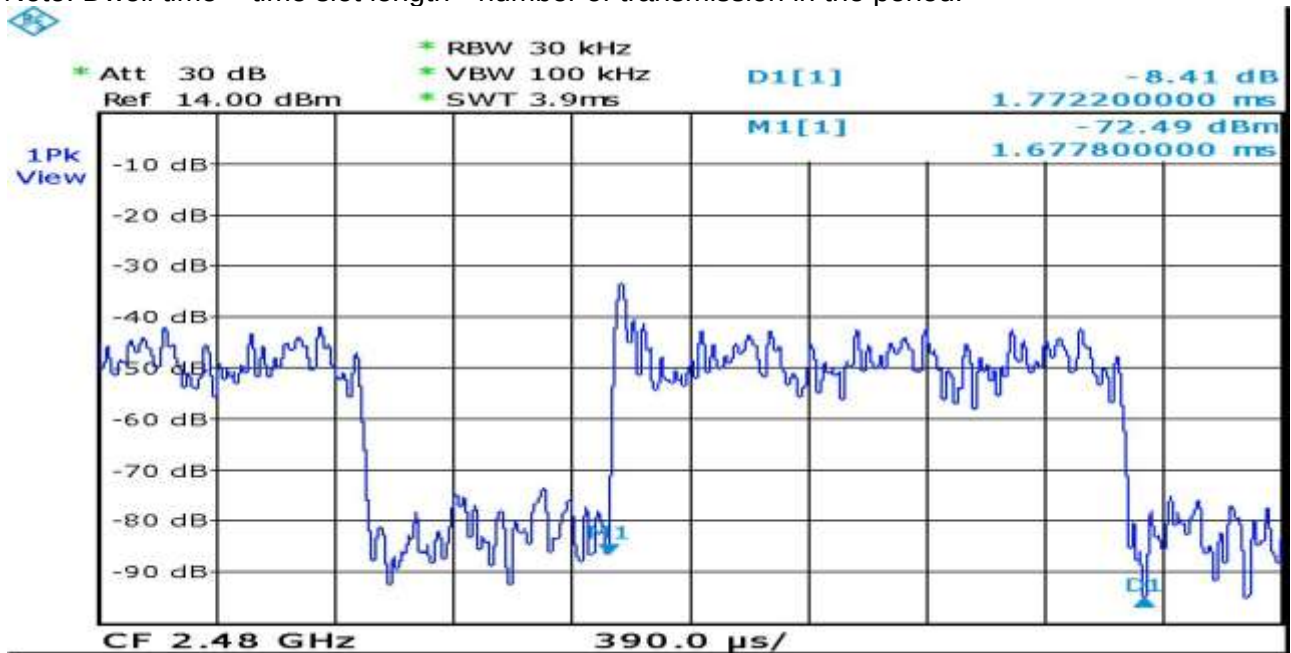

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 2971 (μs) = 0.002971(sec)	< 0.4	Pass
※ Dwell Time = 0.002971 (sec) x 107 (times) = 0.317897(sec)		

Note: Dwell time = time slot length * number of transmission in the period.

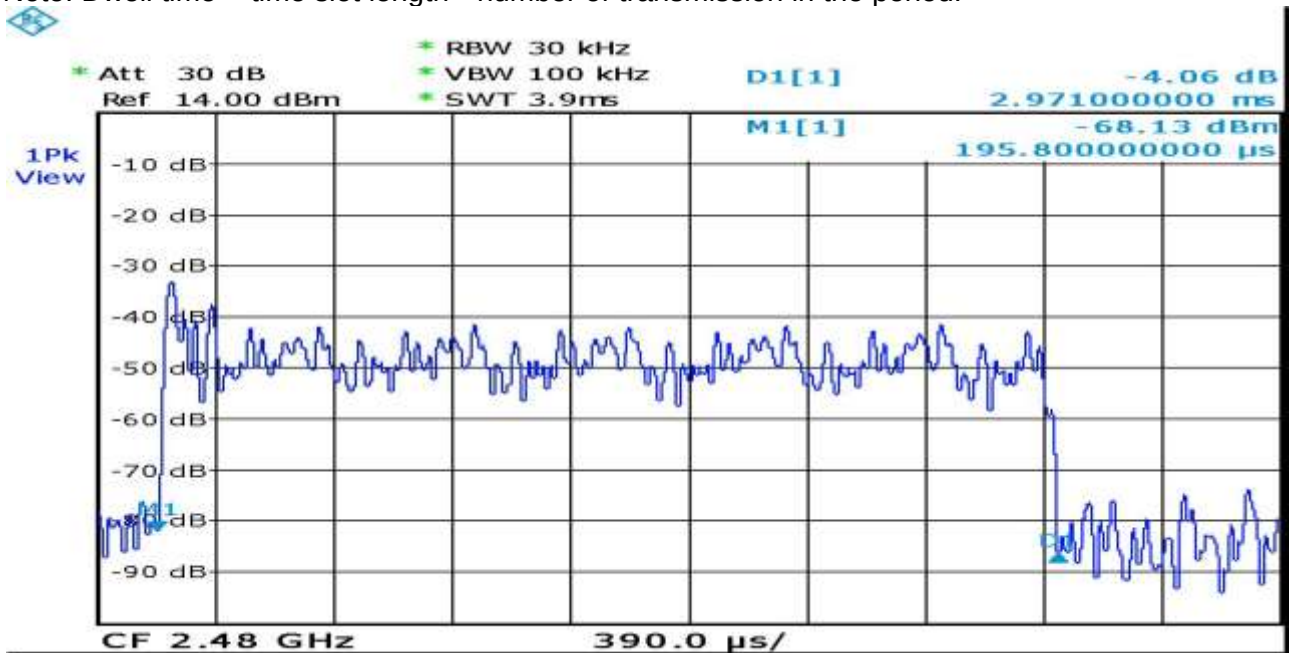


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	8DPSK	Test Frequency Range	2402 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 476.6(μs) = 0.0004766 (sec)	< 0.4	Pass
※ Dwell Time = 0.0004766(sec) x 320 (times) = 0.152512 (sec)		


Note: Dwell time = time slot length * number of transmission in the period.

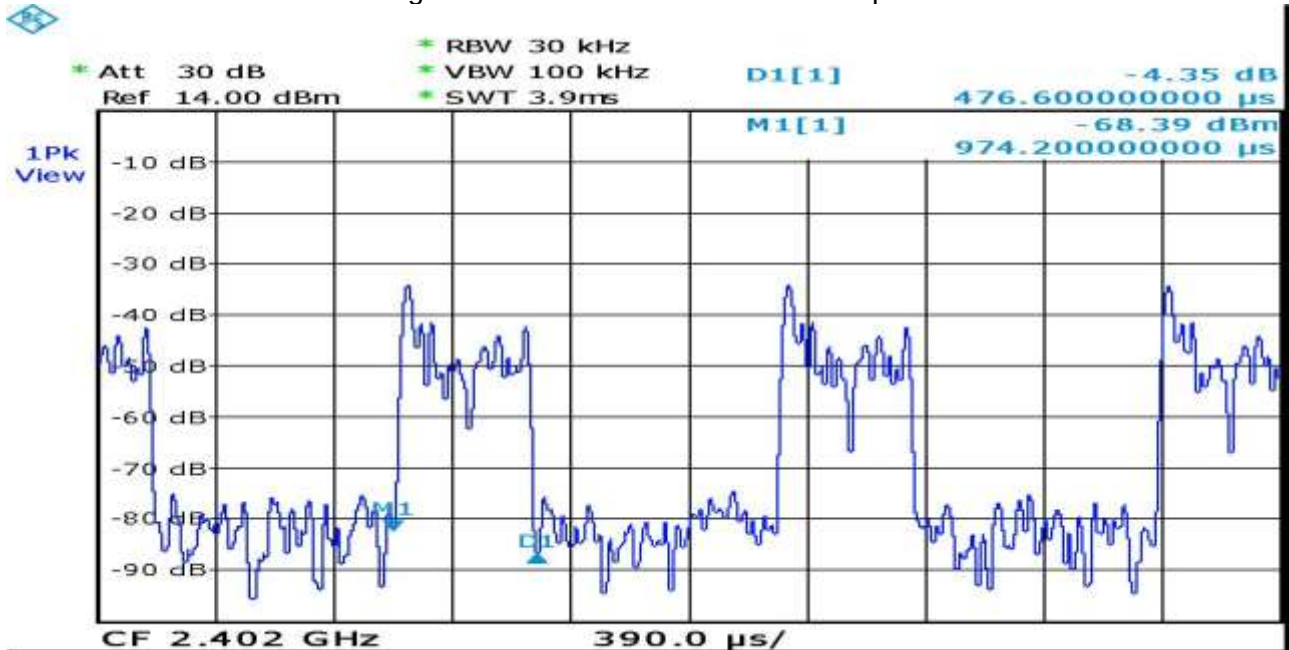

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = $0.4 \text{ (sec)} \times 79 \text{ (number of channel)}$ = 31.6 (sec) Hop rate = $(1600 / 4 / 79) \times (0.4 \times 79) = 160 \text{ (times)}$ Time slot length = $1792(\mu\text{s}) = 0.001792 \text{ (sec)}$	< 0.4	Pass
※ Dwell Time = $0.001792 \text{ (sec)} \times 160 \text{ (times)}$ = 0.28672(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

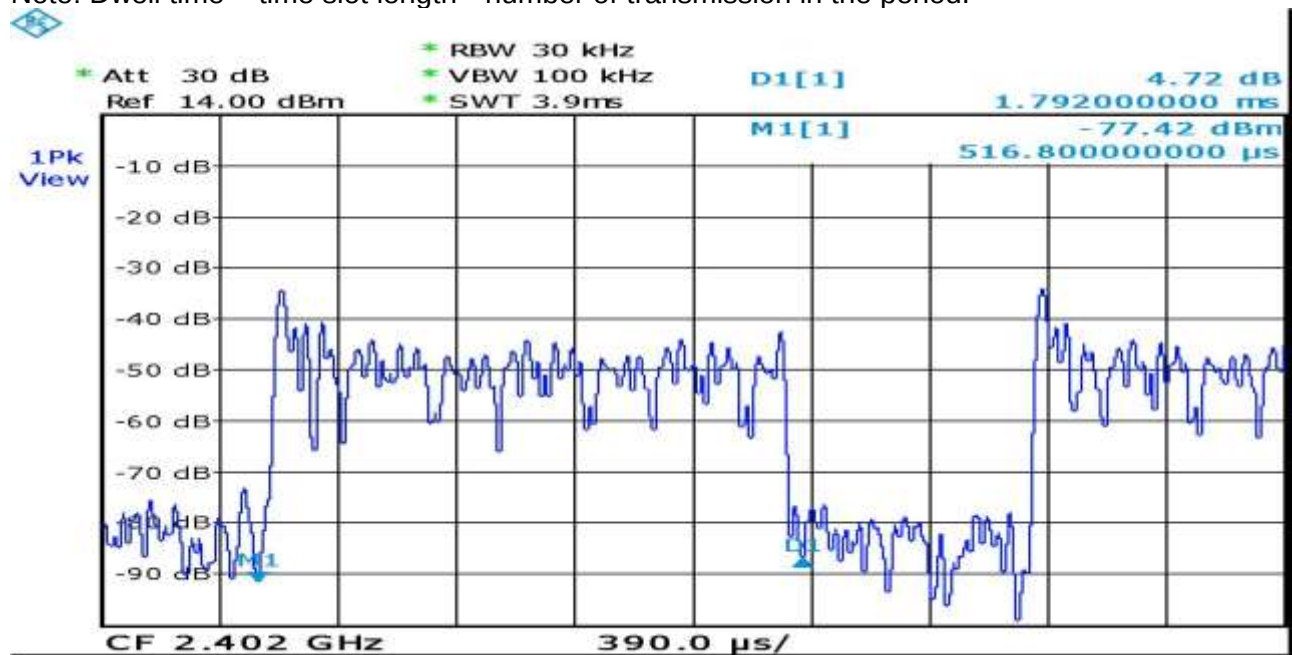

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3036 (μs) = 0.003036 (sec)	< 0.4	Pass
※ Dwell Time = 0.003036 (sec) × 107 (times) = 0.324852 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

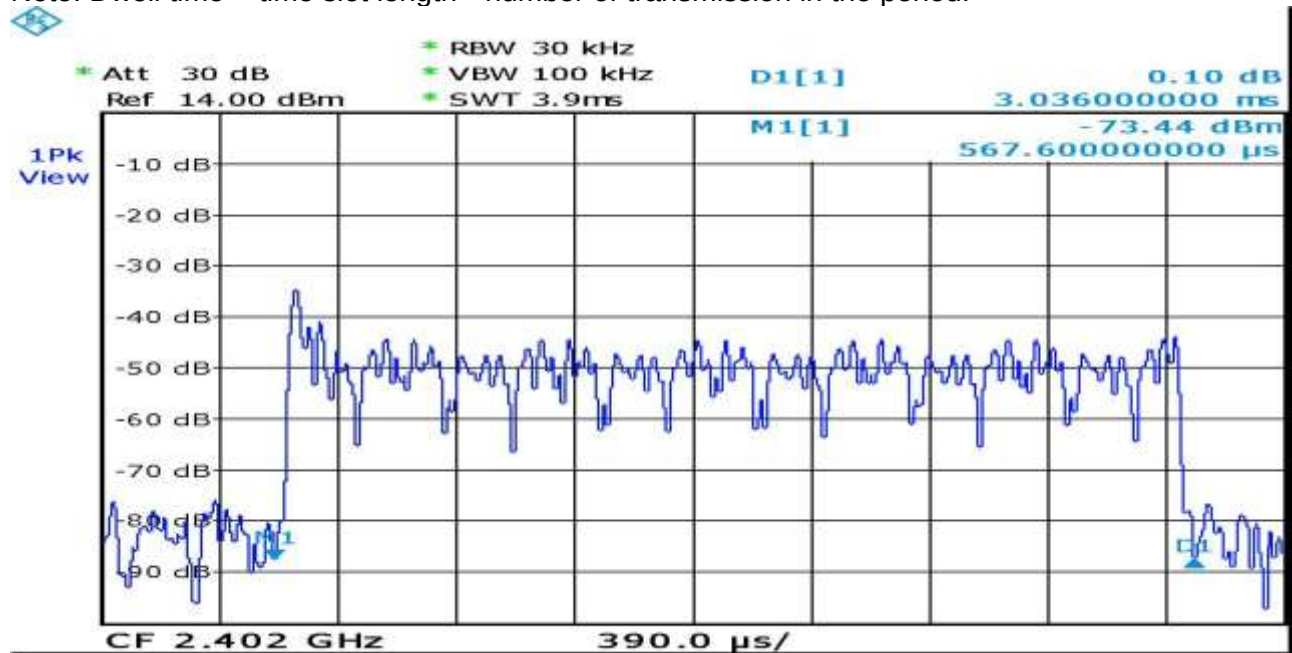


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	8DPSK	Test Frequency Range	2440 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 548(μs) = 0.000548 (sec) ※ Dwell Time = 0. 000548 (sec) x 320 (times) = 0.17536 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

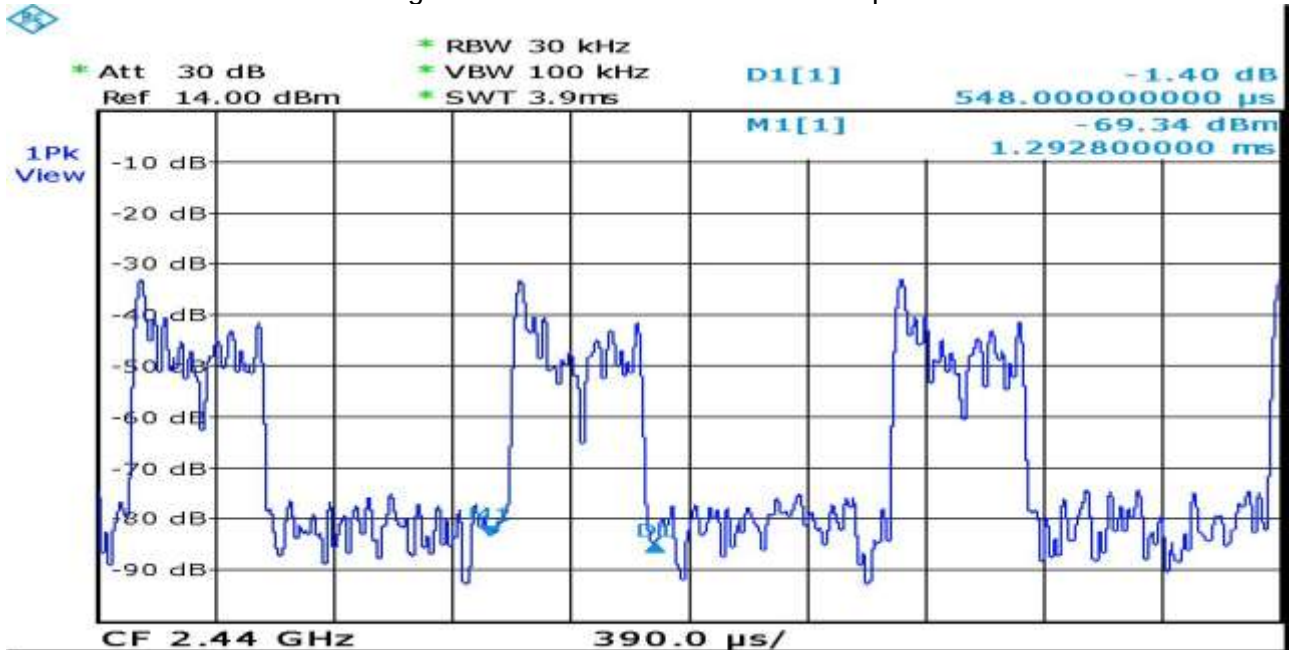

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 4/ 79) x (0.4 * 79) = 160 (times) Time slot length = 1738.2(μs) = 0.0017382(sec)	< 0.4	Pass
※ Dwell Time = 0.0017382 (sec) x 160 (times) = 0.278112(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

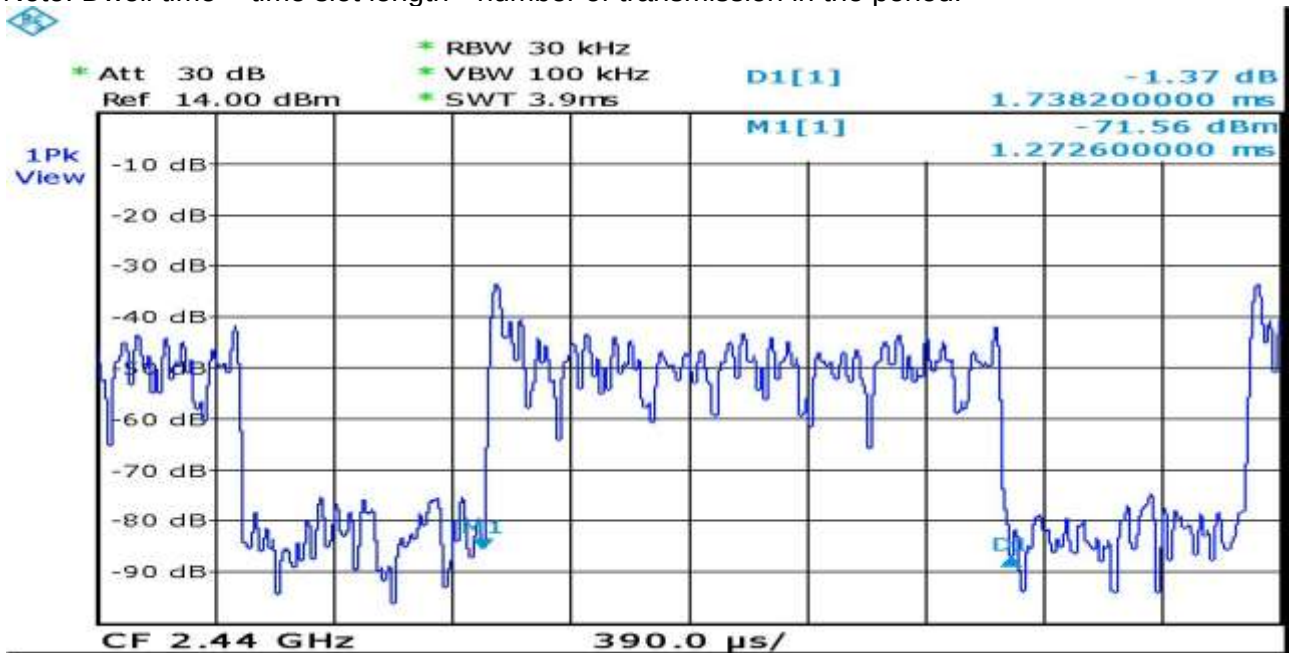

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3032.2 (μs) = 0.0030322 (sec)	< 0.4	Pass
※ Dwell Time = 0.0030322 (sec) x 107 (times) = 0.3244454 (sec)		

Note: Dwell time = time slot length * number of transmission in the period.

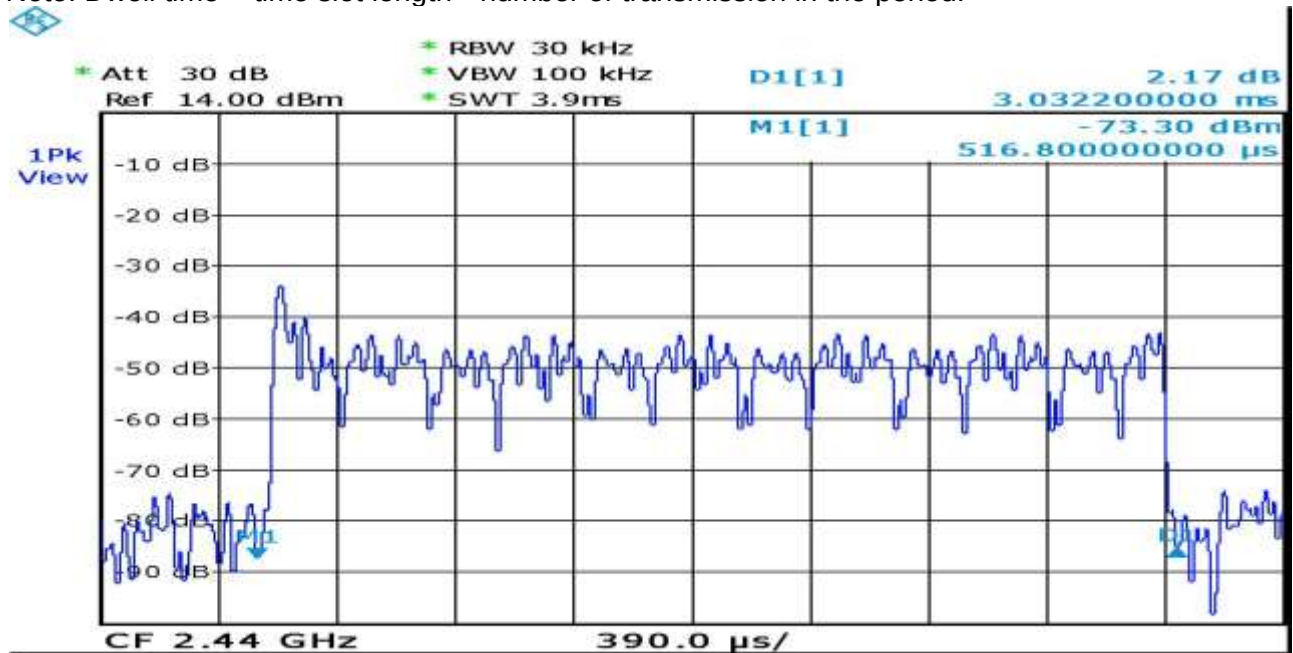


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	8DPSK	Test Frequency Range	2480 MHz

DH1

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 2/ 79) x (0.4 * 79) = 320 (times) Time slot length = 510.4(μs) = 0.0005104 (sec) ※ Dwell Time = 0. 0005104 (sec) x 320 (times) = 0.163328 (sec)	< 0.4	Pass


Note: Dwell time = time slot length * number of transmission in the period.

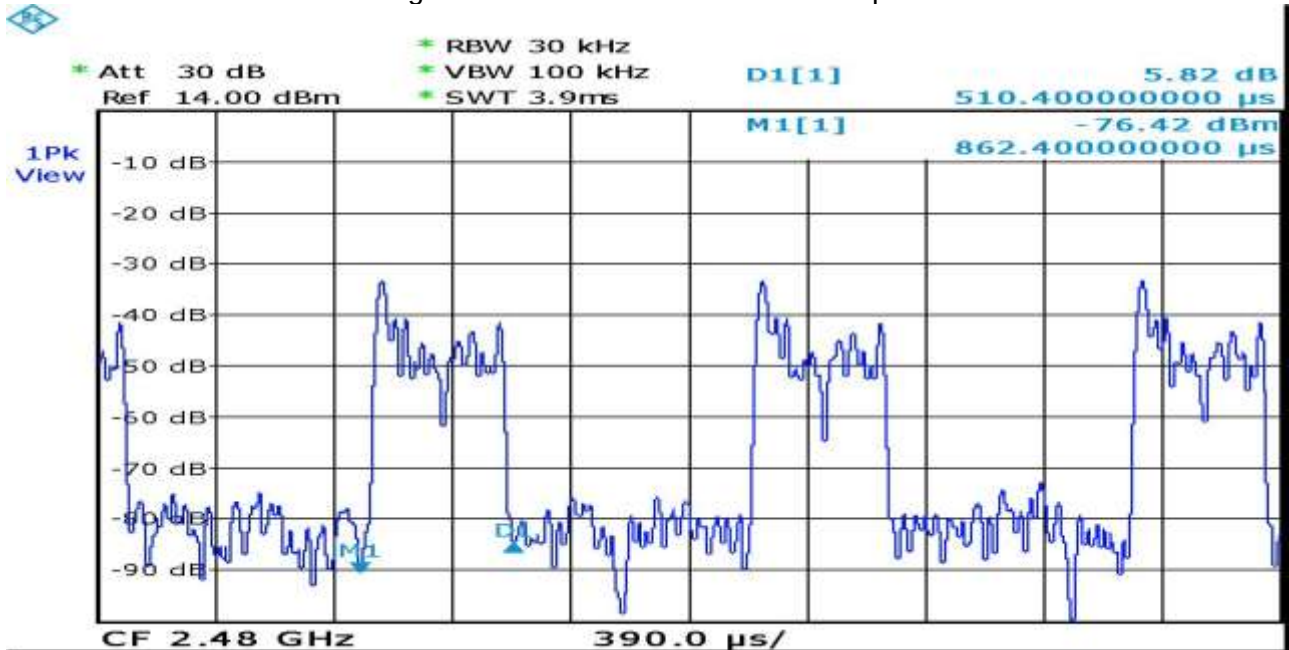

DH3

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 4/ 79) x (0.4 * 79) = 160 (times) Time slot length = 1770.4(μs) = 0.0017704(sec)	< 0.4	Pass
※ Dwell Time = 0.0017704 (sec) x 160 (times) = 0.283264(sec)		


Note: Dwell time = time slot length * number of transmission in the period.

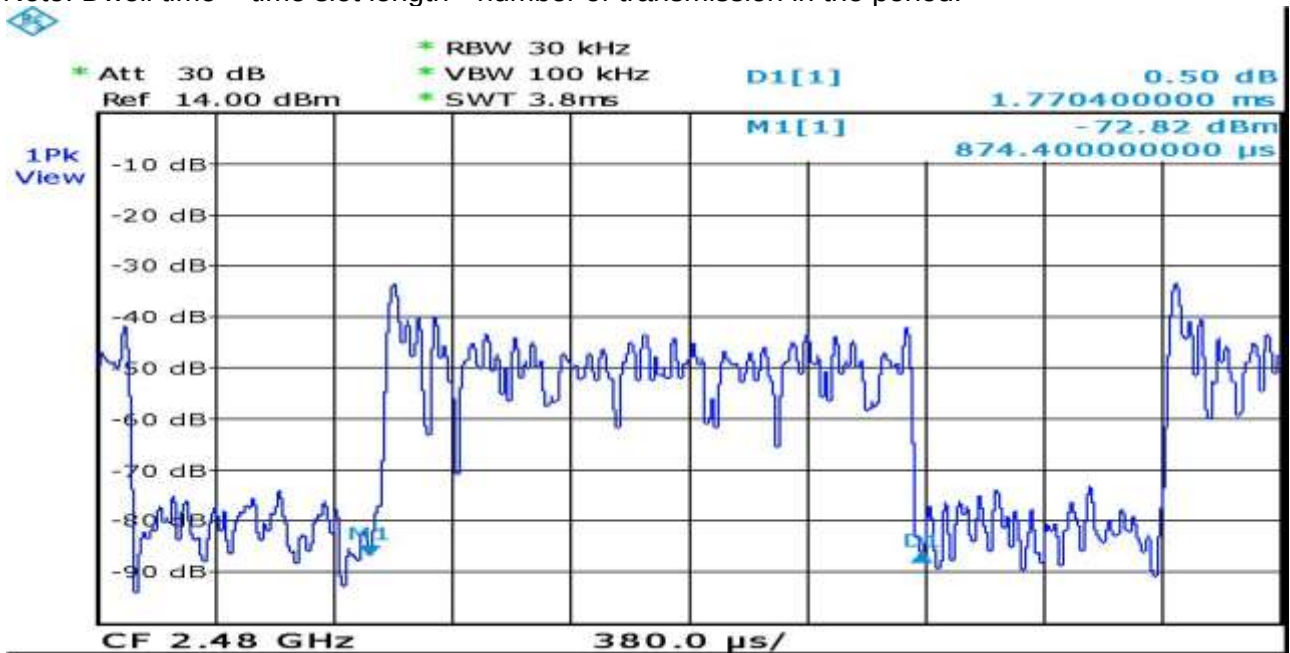

DH5

Measurement Level (sec)	Required Limit (sec)	Result
Period = 0.4 (sec) * 79 (number of channel) = 31.6 (sec) Hop rate = (1600/ 6/ 79) x (0.4 * 79) = 107(times) Time slot length = 3037.6(μs) = 0.0030376 (sec)	< 0.4	Pass
※ Dwell Time = 0.0030376 (sec) x 107 (times) = 0.3250232(sec)		

Note: Dwell time = time slot length * number of transmission in the period.

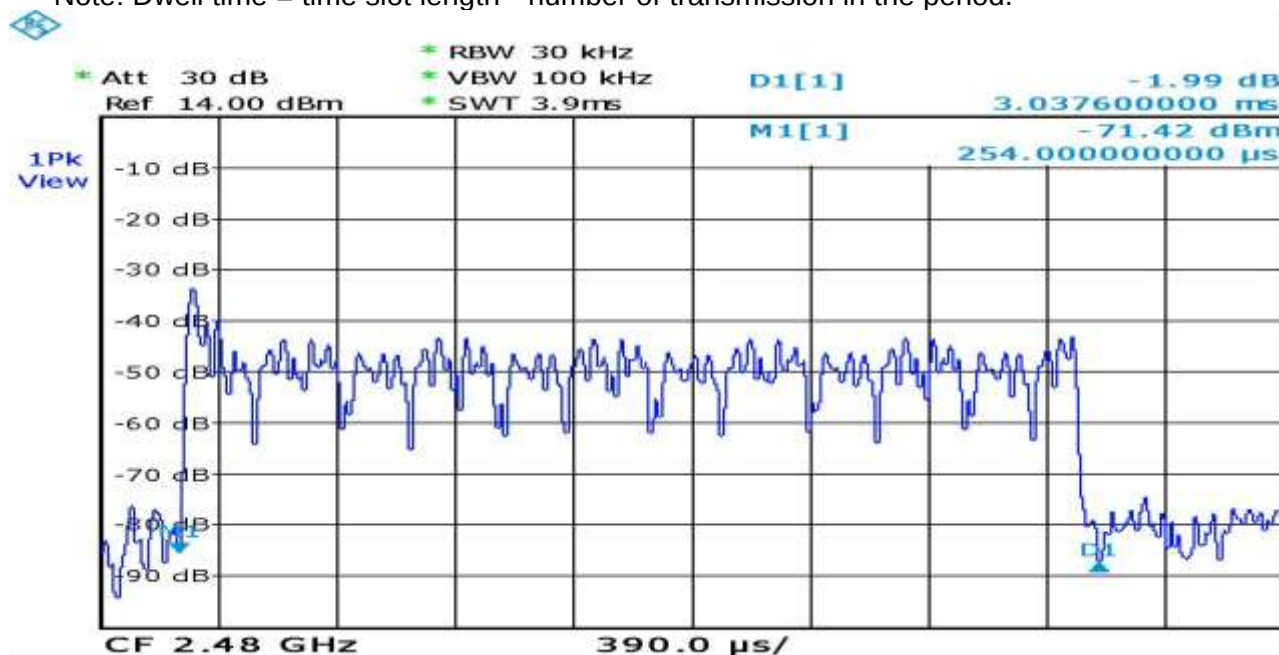

10. HOPPING CHANNEL


10.1 TEST EQUIPMENT

The following test equipments are used during the radiated emission tests:

Item	Instrument	Manufacturer	Model	S/N or Version	Next Cal. Date
1	Spectrum Analyzer	RS	FSL6	100517	2013.08.26

Note: All measurement critical items of test instrumentation were within their calibration period of 1 year.

10.2 BLOCK DIAGRAM OF TEST SETUP

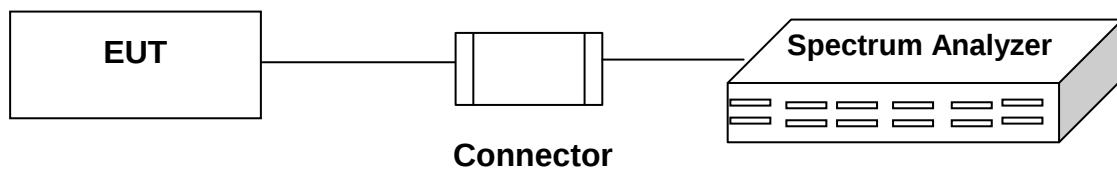

10.3 LIMIT


Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 non-overlapping hopping channels.

10.4 TEST RESULT


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 1-GFSK	Display Pattern	Program

Frequency Range (MHz)	Measurement (Hopping Channel)	Limit (Hopping Channel)	Result
2402 ~ 2480	79 Channel	>75 Channel	Pass


DH1

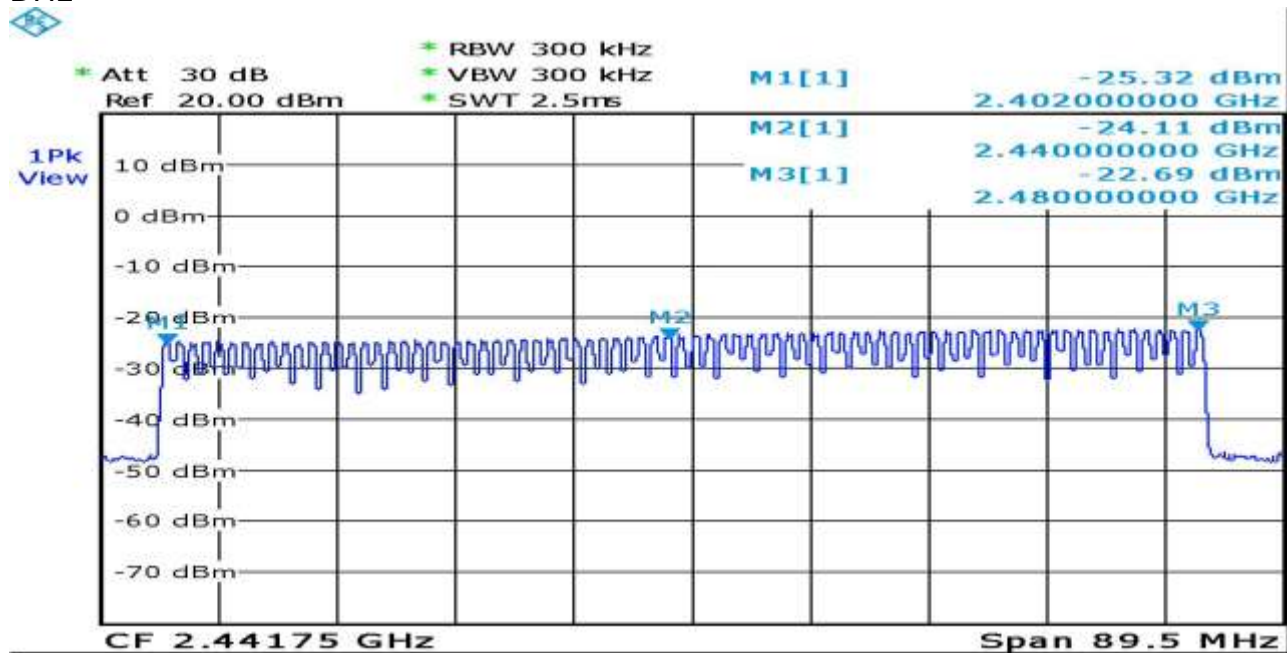

DH3

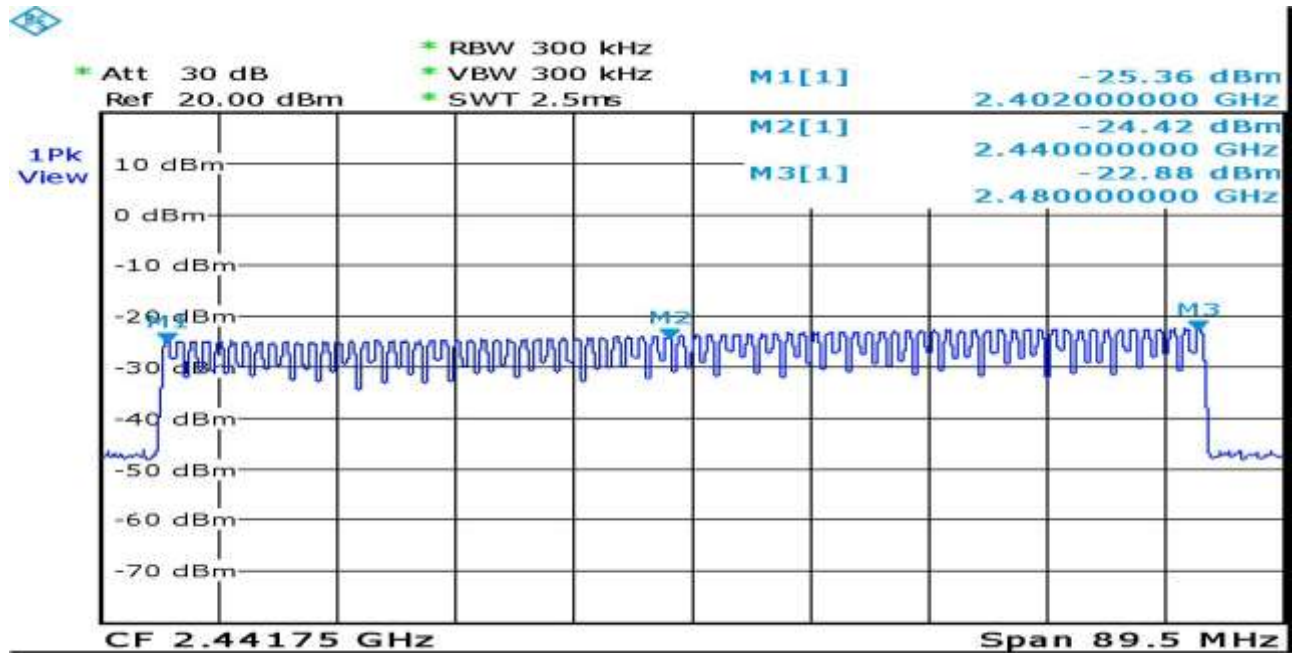


DH5

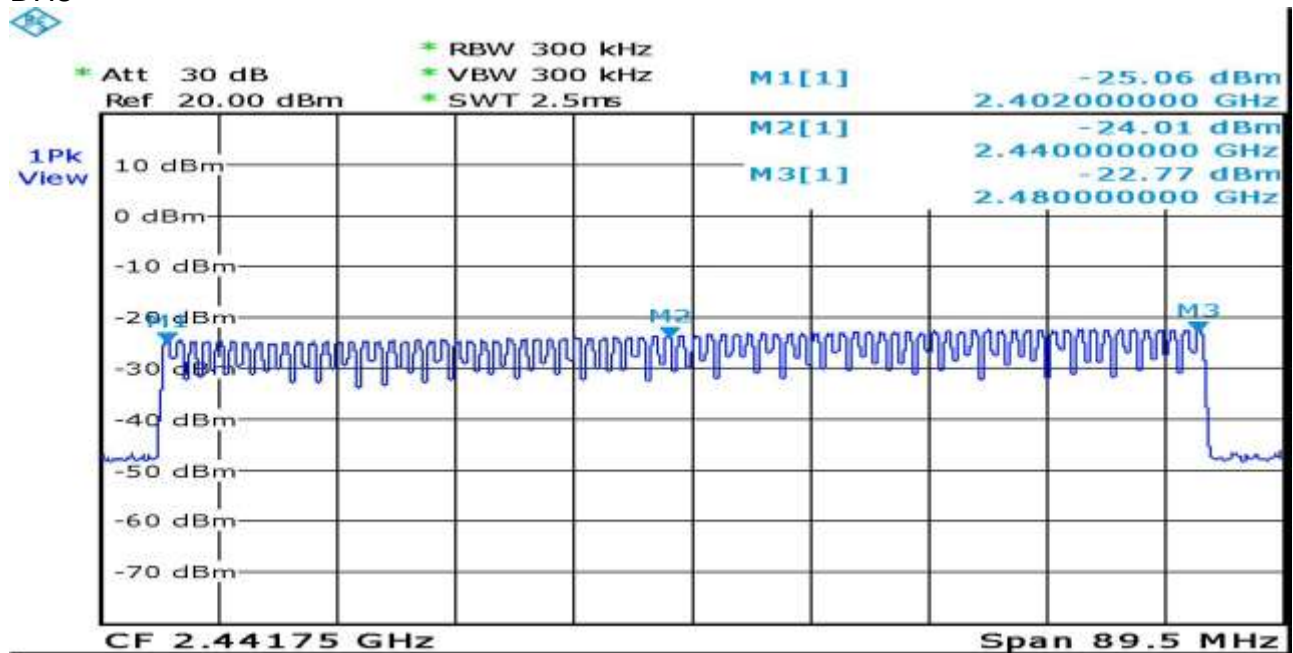


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 2- π /4 PSK	Display Pattern	Program

Frequency Range (MHz)	Measurement (Hopping Channel)	Limit (Hopping Channel)	Result
2402 ~ 2480	79 Channel	>75 Channel	Pass


DH1

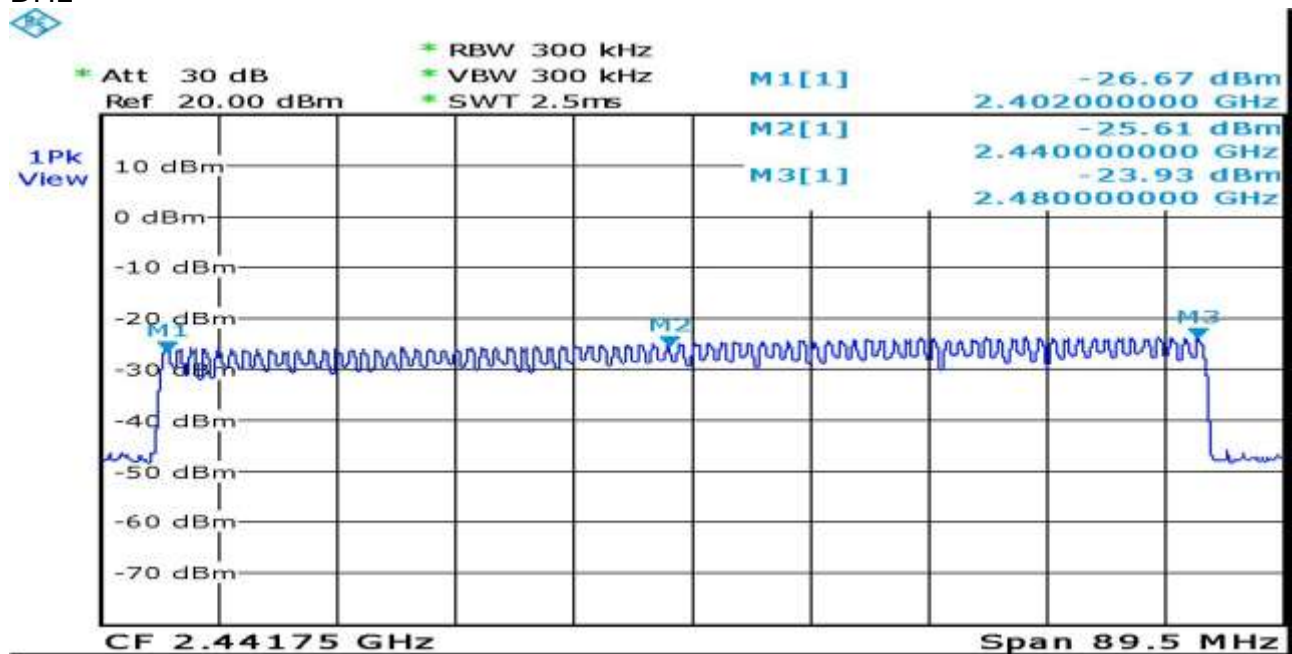

DH3

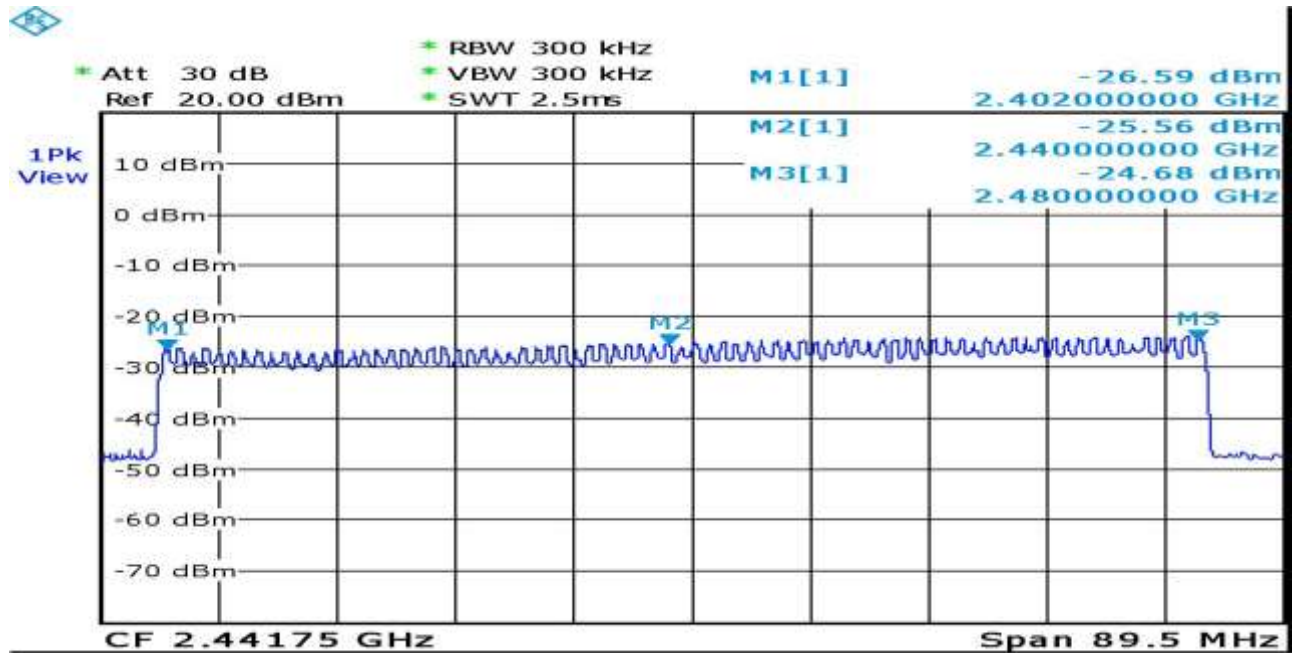


DH5

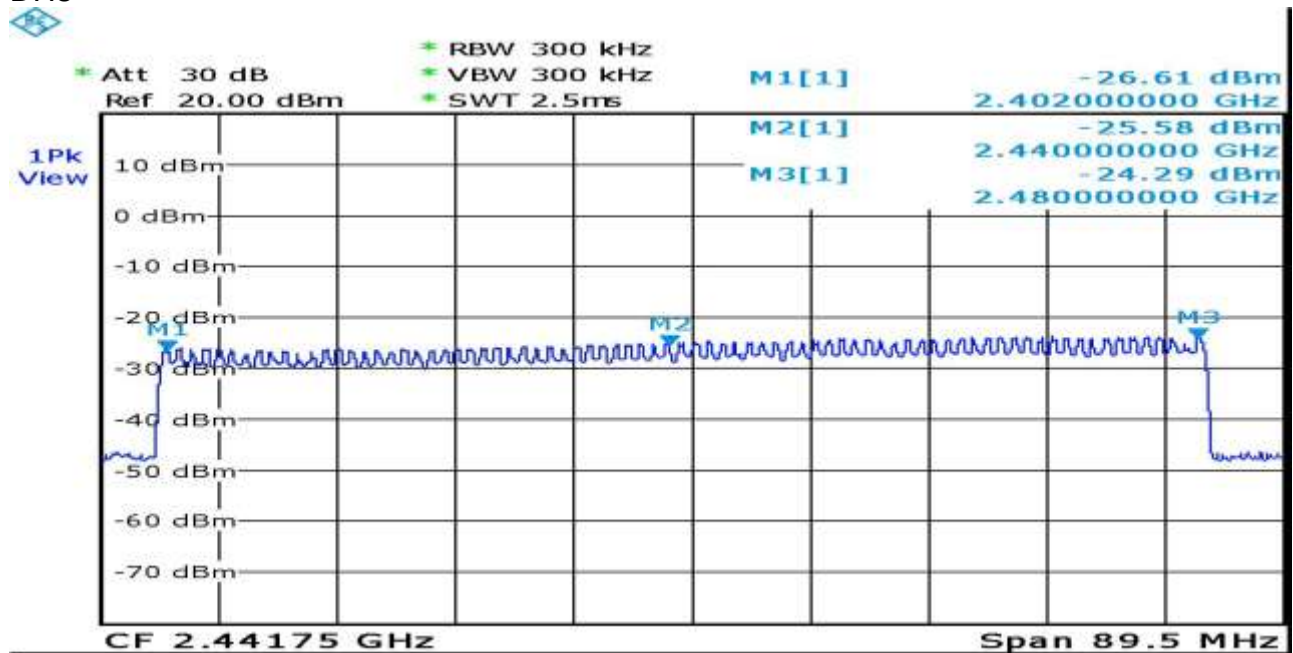


Date of Test	May 08, 2013	Temperature	20 deg/C
EUT	Bluetooth Speaker	Humidity	60 %RH
Working Cond.	Mode 3-8DPSK	Display Pattern	Program

Frequency Range (MHz)	Measurement (Hopping Channel)	Limit (Hopping Channel)	Result
2402 ~ 2480	79 Channel	>75 Channel	Pass


DH1

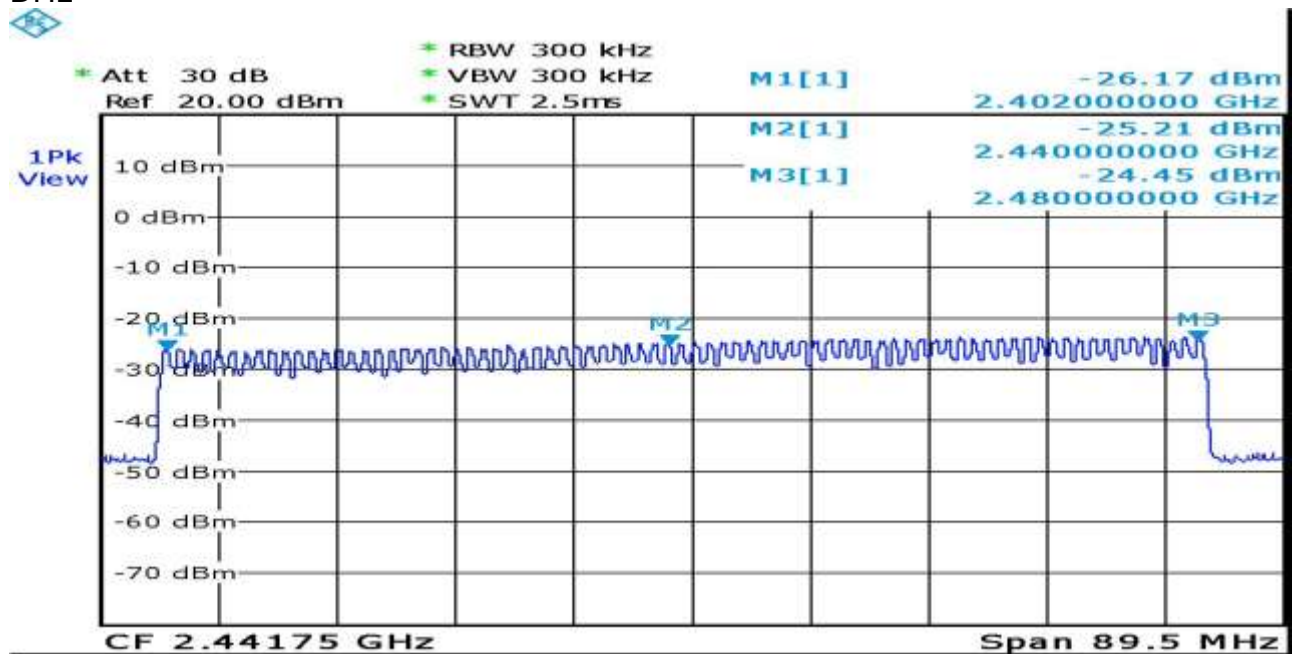

DH3

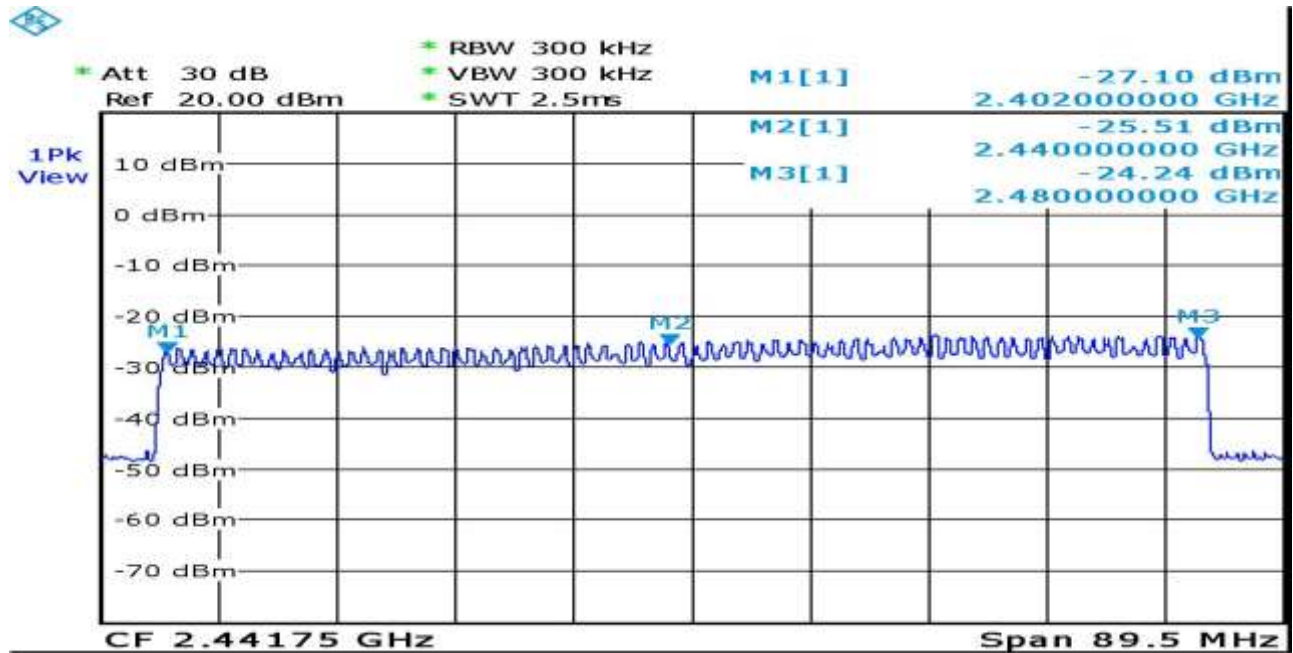

DH5

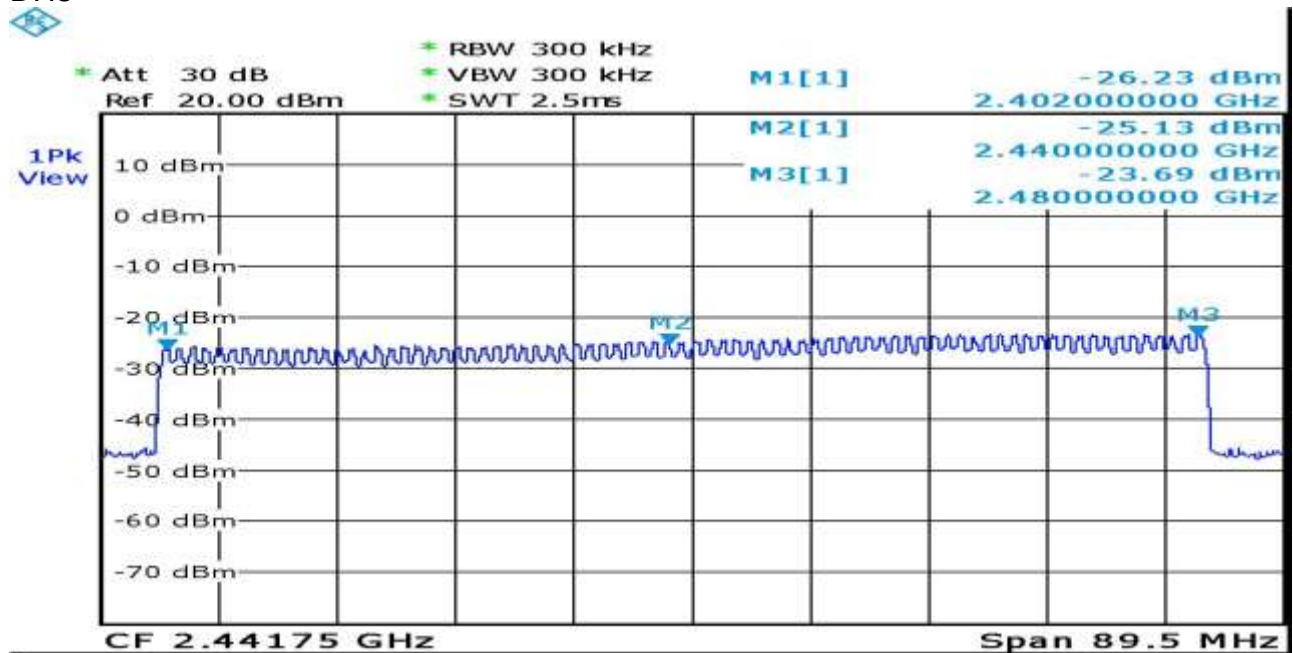

11. EMI REDUCTION METHOD DURING COMPLIANCE TESTING

No modification was made during testing.